




Appendix C. Co-location

1. Results of Radiated Emissions for Co-located


Temperature	23°C	Humidity	56%
Test Engineer	Alan Huang	Configurations	2.4GHz Bluetooth + 2.4GHz WLAN

Horizontal

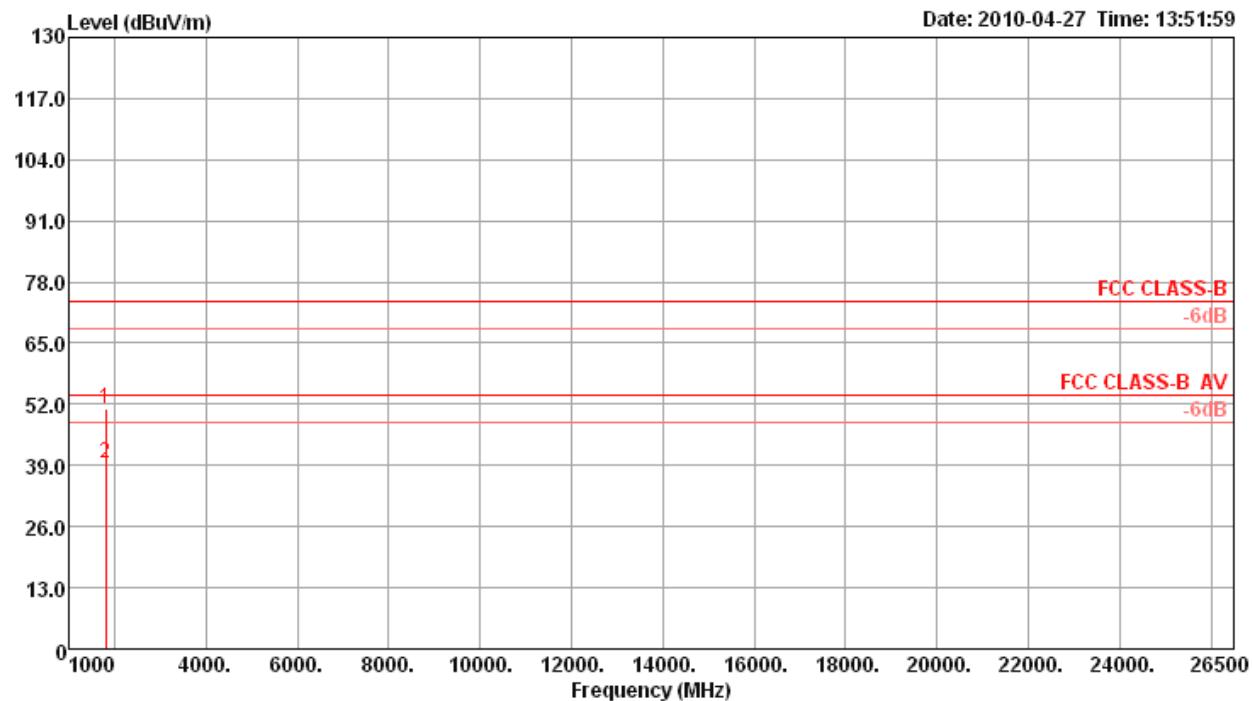

Freq	Level	Limit		Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	T/Pos	A/Pos	Remark	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm	
1	1807.78	51.15	74.00	-22.85	57.17	1.73	35.15	27.40		253	119 Peak	HORIZONTAL
2	1807.80	39.37	74.00	-34.63	45.39	1.73	35.15	27.40		253	119 Peak	HORIZONTAL

Vertical

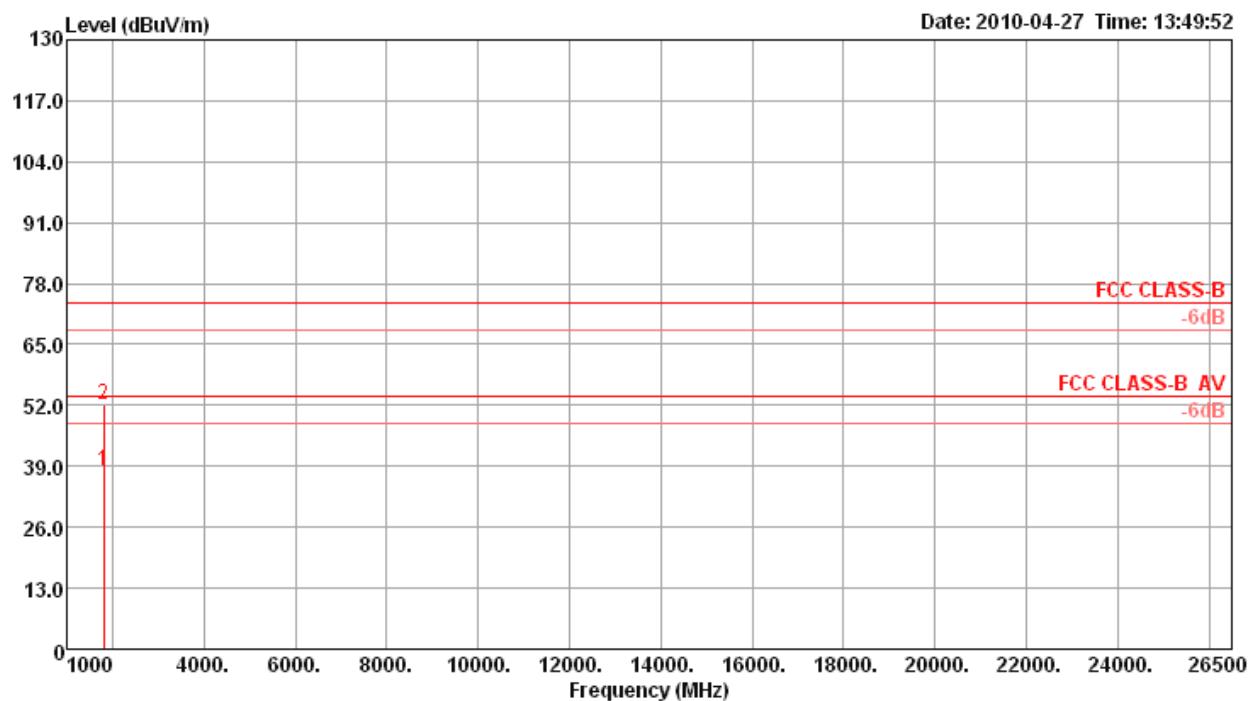

Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	1807.63	38.14	54.00	-15.86	44.16	1.73	35.15	27.40	147	100 Average	VERTICAL
2	1807.73	52.31	74.00	-21.69	58.33	1.73	35.15	27.40	147	100 Peak	VERTICAL