


FCC RADIO TEST REPORT

Applicant's company	Ralink Technology Corporation
Applicant Address	5F., No.36, Taiyuan St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.
FCC ID	VQF-RT3090PCIE
Manufacturer's company	DONG GUAN G-COM COMPUTER CO., LTD.
Manufacturer Address	1ST Row Yin Shan Rd., Yin Hwu Industrial Area, Qingxi Town, DongGuan City, Guang Dong, China

Product Name	11/b/g/n 1T1R PCIe Card
Brand Name	Ralink, Life-On
Model Name	RT3090PCIE, WN7601R
Test Rule	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2400 ~ 2483.5MHz
Received Date	Oct. 25, 2009
Final Test Date	Nov. 19, 2009
Submission Type	Original Equipment
Multiple Listing	Please refer to section 3.7

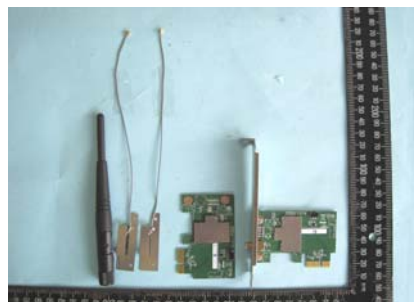

Statement

Test result included in this report is for the IEEE 802.11n and IEEE 802.11b/g part of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.4-2003** and **47 CFR FCC Part 15 Subpart C**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.

Table of Contents

1. CERTIFICATE OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	5
3.3. Table for Filed Antenna.....	5
3.4. Table for Carrier Frequencies	6
3.5. Table for Test Modes	7
3.6. Table for Testing Locations.....	7
3.7. Table for Multiple Listing.....	8
3.8. Table for Supporting Units	8
3.9. Table for Parameters of Test Software Setting	9
3.10. Test Configurations	10
4. TEST RESULT	15
4.1. AC Power Line Conducted Emissions Measurement.....	15
4.2. Maximum Conducted Output Power Measurement.....	21
4.3. Power Spectral Density Measurement	38
4.4. 6dB Spectrum Bandwidth Measurement	55
4.5. Radiated Emissions Measurement	72
4.6. Band Edge Emissions Measurement	128
4.7. Antenna Requirements	145
5. LIST OF MEASURING EQUIPMENTS	146
6. TEST LOCATION.....	147
7. TAF CERTIFICATE OF ACCREDITATION	148
APPENDIX A. PHOTOGRAPHS OF EUT.....	A1 ~ A14
APPENDIX B. TEST PHOTOS.....	B1 ~ B8
APPENDIX C. MAXIMUM PERMISSIBLE EXPOSURE.....	C1 ~C3
APPENDIX D. ANTENNA LIST	

History of This Test Report

Original Issue Date: Dec. 02, 2009

Report No.: FR9N2606

☒ No additional attachment.


☐ Additional attachment were issued as following record:

Attachment No.	Issue Date	Description

1. CERTIFICATE OF COMPLIANCE

Product Name : 11/b/g/n 1T1R PCIe Card
Brand Name : Ralink, Lite-On
Model Name : RT3090PCIE, WN7601R
Applicant : Ralink Technology Corporation
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Oct. 25, 2009 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.



Jordan Hsiao

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	6.26 dB
4.2	15.247(b)(3)	Maximum Conducted Output Power	Complies	3.86 dB
4.3	15.247(e)	Power Spectral Density	Complies	13.09 dB
4.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-
4.5	15.247(d)	Radiated Emissions	Complies	3.64 dB
4.6	15.247(d)	Band Edge Emissions	Complies	0.09 dB
4.7	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Maximum Conducted Output Power	±0.8dB	Confidence levels of 95%
Power Spectral Density	±0.5dB	Confidence levels of 95%
6dB Spectrum Bandwidth	±8.5×10 ⁻⁸	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7°C	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

3. GENERAL INFORMATION

3.1. Product Details

IEEE 802.11n

Items	Description
Product Type	WLAN (1TX, 1RX)
Radio Type	Intentional Transceiver
Power Type	From host system
Modulation	see the below table for IEEE 802.11n
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	see the below table for IEEE 802.11n
Frequency Range	2400 ~ 2483.5MHz
Channel Number	11 for 20MHz bandwidth ; 7 for 40MHz bandwidth
Channel Band Width (99%)	MCS0 (20MHz): 17.60 MHz ; MCS0 (40MHz): 36.00 MHz
Conducted Output Power	MCS0 (20MHz): 26.14 dBm ; MCS0 (40MHz): 23.98 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

IEEE 802.11b/g

Items	Description
Product Type	WLAN (1TX, 1RX)
Radio Type	Intentional Transceiver
Power Type	From host system
Modulation	DSSS for IEEE 802.11b ; OFDM for IEEE 802.11g
Data Modulation	DSSS (BPSK / QPSK / CCK) ; OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	DSSS (1/ 2/ 5.5/11) ; OFDM (6/9/12/18/24/36/48/54)
Frequency Range	2400 ~ 2483.5MHz
Channel Number	11
Channel Band Width (99%)	11b: 14.63 MHz ; 11g: 16.48 MHz
Conducted Output Power	11b: 24.61 dBm ; 11g: 26.10 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Antenna & Band width

Antenna	Single (TX)	
Band width Mode	20 MHz	40 MHz
IEEE 802.11b	V	X
IEEE 802.11g	V	X
IEEE 802.11n	V	V

IEEE 802.11n spec

MCS Index	Nss	Modulation	R	NBPSC	NCBPS		NDBPS		Datarate(Mbps)			
									800nsGI		400nsGI	
					20MHz	40MHz	20MHz	40MHz	20MHz	40MHz	20MHz	40MHz
0	1	BPSK	1/2	1	52	108	26	54	6.5	13.5	7.200	15
1	1	QPSK	1/2	2	104	216	52	108	13.0	27.0	14.400	30
2	1	QPSK	3/4	2	104	216	78	162	19.5	40.5	21.700	45
3	1	16-QAM	1/2	4	208	432	104	216	26.0	54.0	28.900	60
4	1	16-QAM	3/4	4	208	432	156	324	39.0	81.0	43.300	90
5	1	64-QAM	2/3	6	312	648	208	432	52.0	108.0	57.800	120
6	1	64-QAM	3/4	6	312	648	234	486	58.5	121.5	65.000	135
7	1	64-QAM	5/6	6	312	648	260	540	65.0	135.0	72.200	150
8	2	BPSK	1/2	1	104	216	52	108	13.0	27.0	14.444	30
9	2	QPSK	1/2	2	208	432	104	216	26.0	54.0	28.889	60
10	2	QPSK	3/4	2	208	432	156	324	39.0	81.0	43.333	90
11	2	16-QAM	1/2	4	416	864	208	432	52.0	108.0	57.778	120
12	2	16-QAM	3/4	4	416	864	312	648	78.0	162.0	86.667	180
13	2	64-QAM	2/3	6	624	1296	416	864	104.0	216.0	115.556	240
14	2	64-QAM	3/4	6	624	1296	468	972	117.0	243.0	130.000	270
15	2	64-QAM	5/6	6	624	1296	520	1080	130.0	270.0	144.444	300

Symbol	Explanation
NSS	Number of spatial streams
R	Code rate
NBPSC	Number of coded bits per single carrier
NCBPS	Number of coded bits per symbol
NDBPS	Number of data bits per symbol
GI	guard interval

3.2. Accessories

N/A

3.3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	Test Gain (dBi)	Remark
A	WANSHIH	YDW2310A1	PIFA Antenna	I-PEX	2.72	2.72	TX/RX
B	Micon	71306	Dipole Antenna	Reversed-SMA	3.43	2.93	TX/RX

Note 1: There are 4 antennas provided to this EUT, please refer to Appendix D for further information.

Due to Ant. A and B mentioned above are the highest gain value among two different types, only ant A and B were tested and recorded in this test report.

Note 2: Ant. B through an adapter connector and an antenna cable.


The total cable loss gain of connector and cable is 0.5dBi.

The test setup for dipole is similar to the final market antenna configuration for customer's request. It is dipole antenna with cable and lower antenna gain than the valued recorded in the test report.


Note 3: There are two types of EUT, one connector for dipole antenna and two connectors for PIFA antenna.

For Two Connectors:

The EUT supports the antenna with TX/RX diversity function.

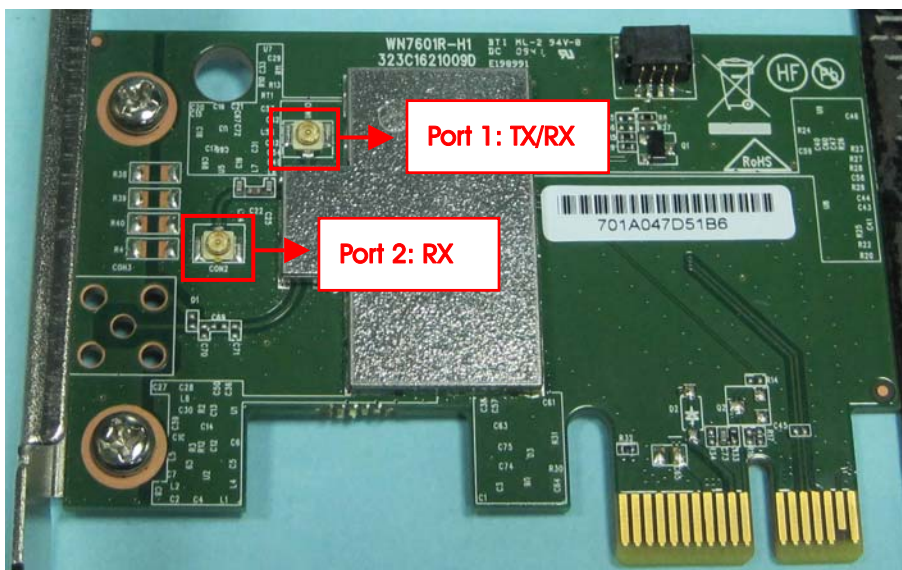

For One Connector:

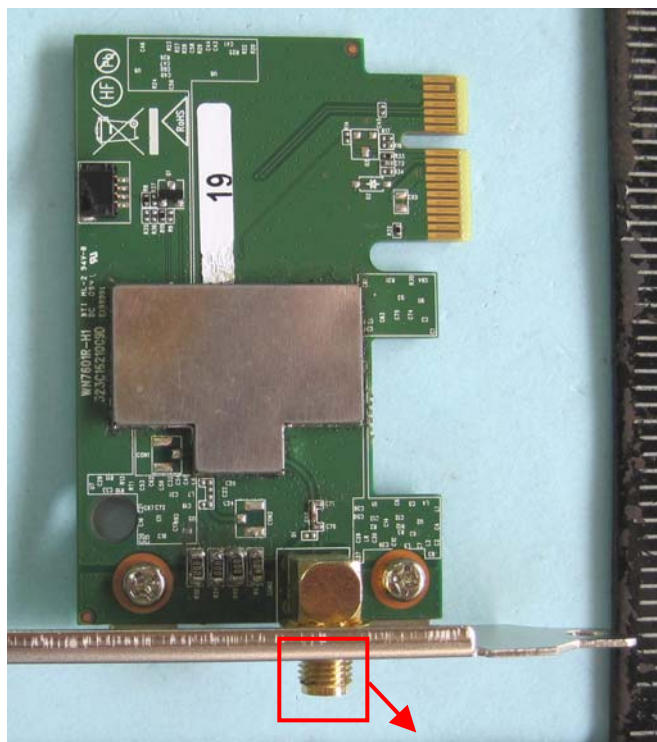

Antenna B: TX/RX

3.4. Table for Carrier Frequencies

There are two bandwidth systems for IEEE 802.11n.

For both 20MHz bandwidth systems, use Channel 1~Channel 11.

For both 40MHz bandwidth systems, use Channel 3~Channel 9.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	1	2412 MHz	7	2442 MHz
	2	2417 MHz	8	2447 MHz
	3	2422 MHz	9	2452 MHz
	4	2427 MHz	10	2457 MHz
	5	2432 MHz	11	2462 MHz
	6	2437 MHz		

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Antenna
AC Power Line Conducted Emissions	Normal Link	-	-	-
Maximum Peak Conducted Output Power	MCS0/20MHz	6.5 Mbps	1/6/11	A/B
	MCS0/40MHz	13.5 Mbps	3/6/9	A/B
	11b/BPSK	1 Mbps	1/6/11	A/B
	11g/BPSK	6 Mbps	1/6/11	A/B
Power Spectral Density 6dB Spectrum Bandwidth	MCS0/20MHz	6.5 Mbps	1/6/11	A/B
	MCS0/40MHz	13.5 Mbps	3/6/9	A/B
	11b/BPSK	1 Mbps	1/6/11	A/B
	11g/BPSK	6 Mbps	1/6/11	A/B
Radiated Emissions 9kHz~1GHz	Normal Link	-	-	-
Radiated Emissions 1GHz~10 th Harmonic	MCS0/20MHz	6.5 Mbps	1/6/11	A/B
	MCS0/40MHz	13.5 Mbps	3/6/9	A/B
	11b/BPSK	1 Mbps	1/6/11	A/B
	11g/BPSK	6 Mbps	1/6/11	A/B
Band Edge Emissions	MCS0/20MHz	6.5 Mbps	1/11	A/B
	MCS0/40MHz	13.5 Mbps	3/9	A/B
	11b/BPSK	1 Mbps	1/11	A/B
	11g/BPSK	6 Mbps	1/11	A/B

The following test modes were performed for all tests:

Mode 1. EUT with PIFA antenna

Mode 2. EUT with Dipole antenna

All the test results were tested and recorded in the report.

3.6. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH03-HY	SAC	Hwa Ya	480872	IC 4086	-
CO04-HY	Conduction	Hwa Ya	480872	IC 4086	-
TH01-HY	OVEN Room	Hwa Ya	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC); Fully Anechoic Chamber (FAC).

Please refer section 6 for Test Site Address.

3.7. Table for Multiple Listing

The brand/model names in the following table are all refer to the identical product.

Brand Name	Model Name	Description
Ralink	RT3090PCIE	Different model numbers are for different marketing.
Lite-On	WN7601R	

3.8. Table for Supporting Units

Support Unit	Brand	Model	FCC ID
PC	DELL	T3400	N/A
LCD Monitor	HP	FW660AA	N/A
Keyboard	iCooky	SK068	DoC
Mouse	iCooky	AMS0706W	DoC
Modem	ACEEX	DM1414	IFAXDM1414
Printer	EPSON	LQ-300+	DoC
Wireless AP	Planex	GW-AP54SGX	N/A

3.9. Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

<For Antenna A>

Power Parameters of IEEE 802.11n

Test Software Version	QA		
Frequency	2412 MHz	2437 MHz	2462 MHz
MCS0 20MHz	1F	1F	1F
Frequency	2422 MHz	2437 MHz	2452 MHz
MCS0 40MHz	1B	1F	1B

Power Parameters of IEEE 802.11b/g

Test Software Version	QA		
Frequency	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11b	1F	1F	1F
802.11g	1F	1F	1F

<For Antenna B>

Power Parameters of IEEE 802.11n

Test Software Version	QA		
Frequency	2412 MHz	2437 MHz	2462 MHz
MCS0 20MHz	1B	1F	1D
Frequency	2422 MHz	2437 MHz	2452 MHz
MCS0 40MHz	16	1C	17

Power Parameters of IEEE 802.11b/g

Test Software Version	QA		
Frequency	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11b	1B	1F	1A
802.11g	1C	1F	1C

During the test, the following programs under WIN XP were executed:


Executed "QA" to control the EUT continuously transmit RF signal.

3.10. Test Configurations


3.10.1. Radiation Emissions Test Configuration

Test Configuration: 9KHz~1GHz

Test Mode: Mode 1

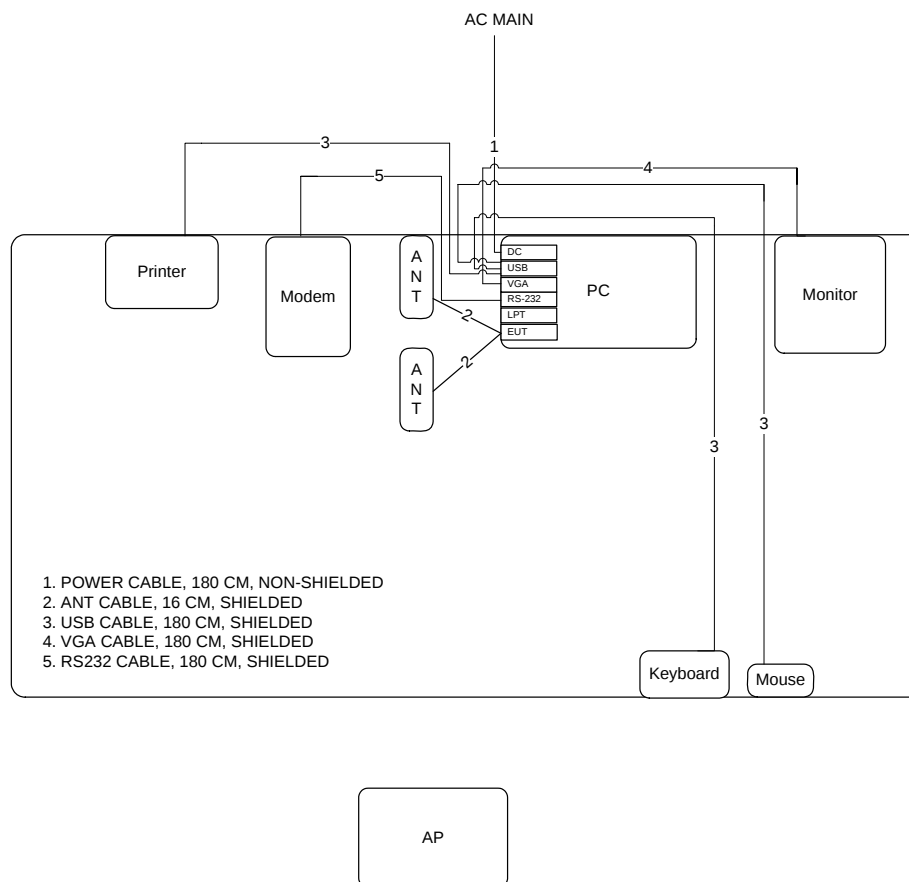


Test Mode: Mode 2

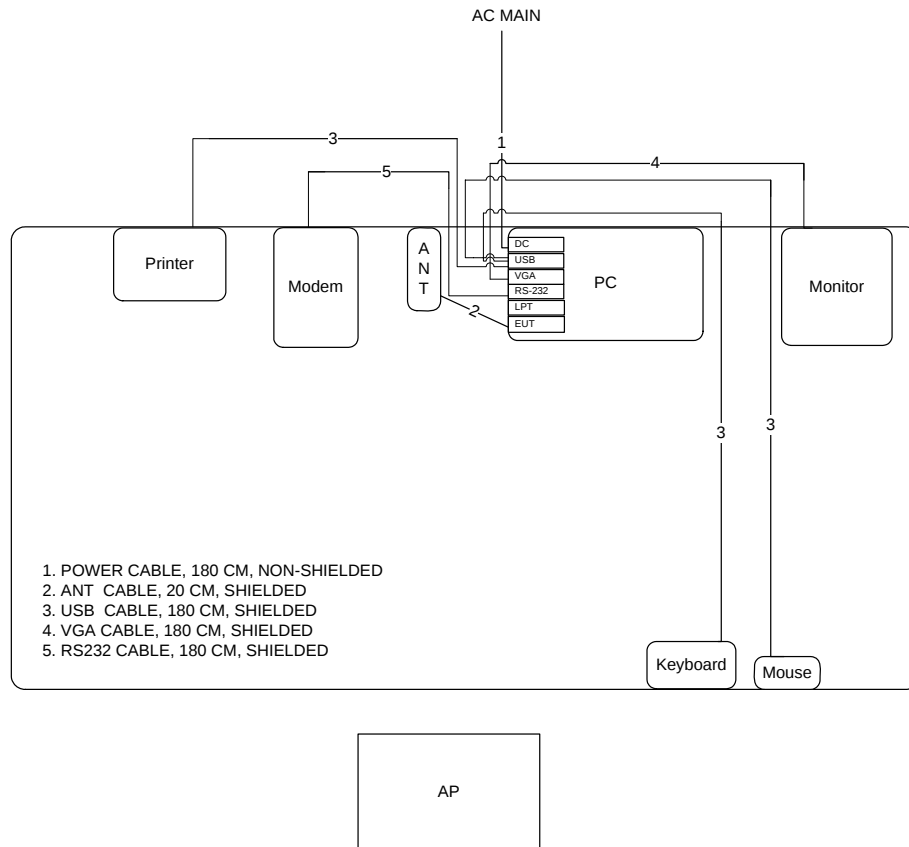


Test Configuration: above 1GHz

Test Mode: Mode 1

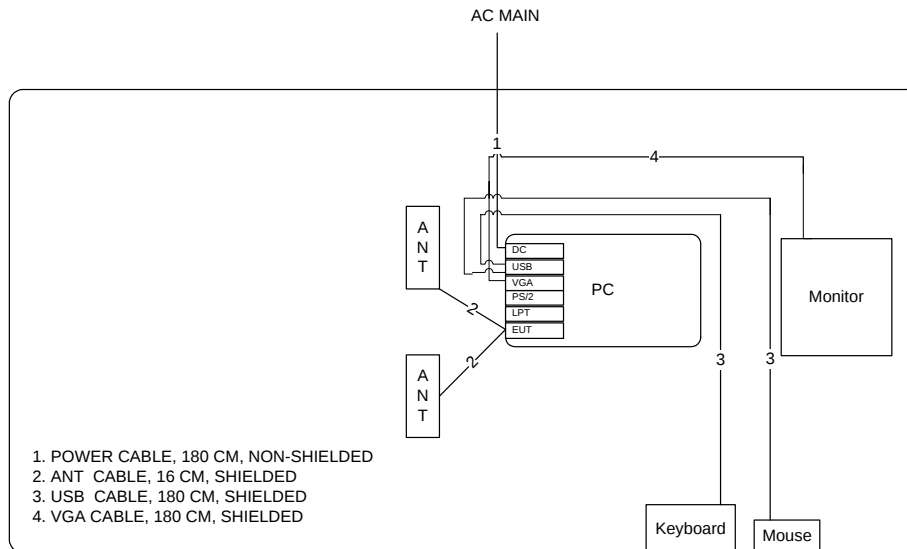


Test Mode: Mode 2

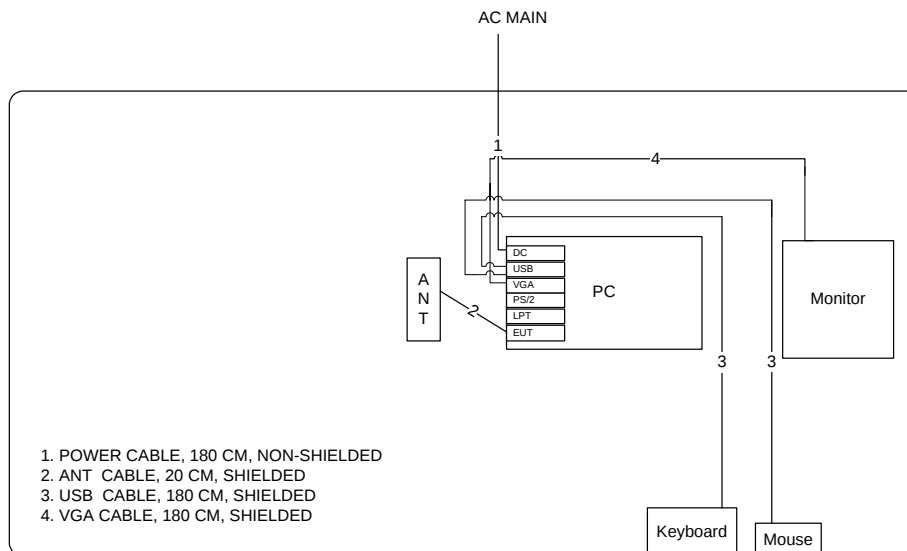


3.10.2. AC Power Line Conduction Emissions Test Configuration

Test Mode: Mode 1

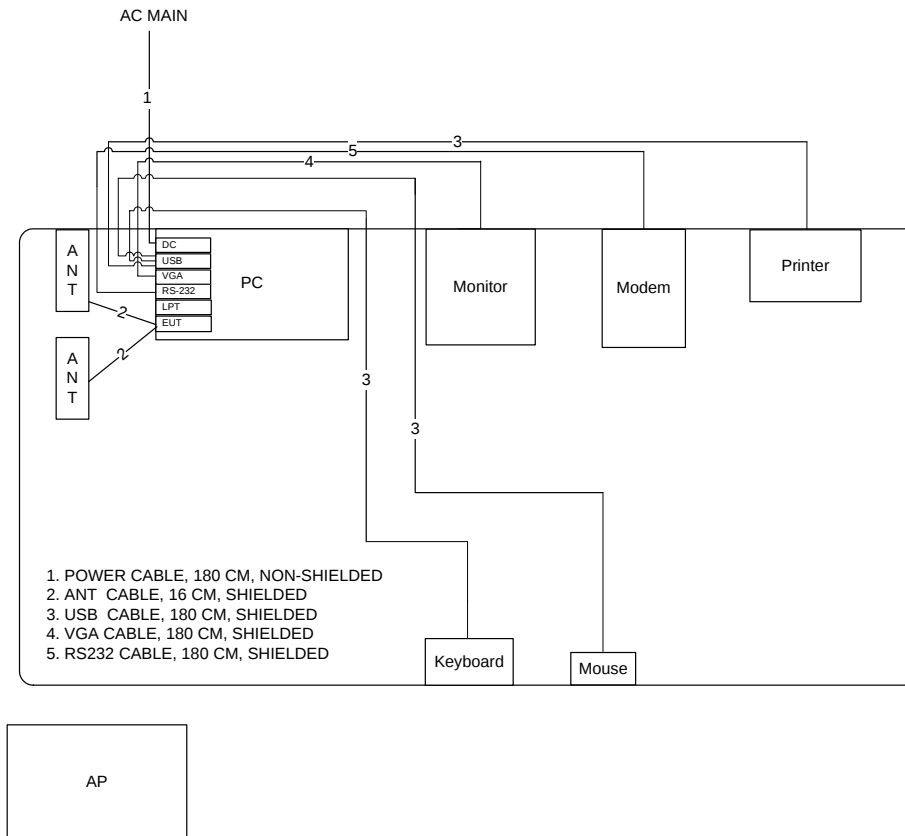

Test Mode: Mode 2

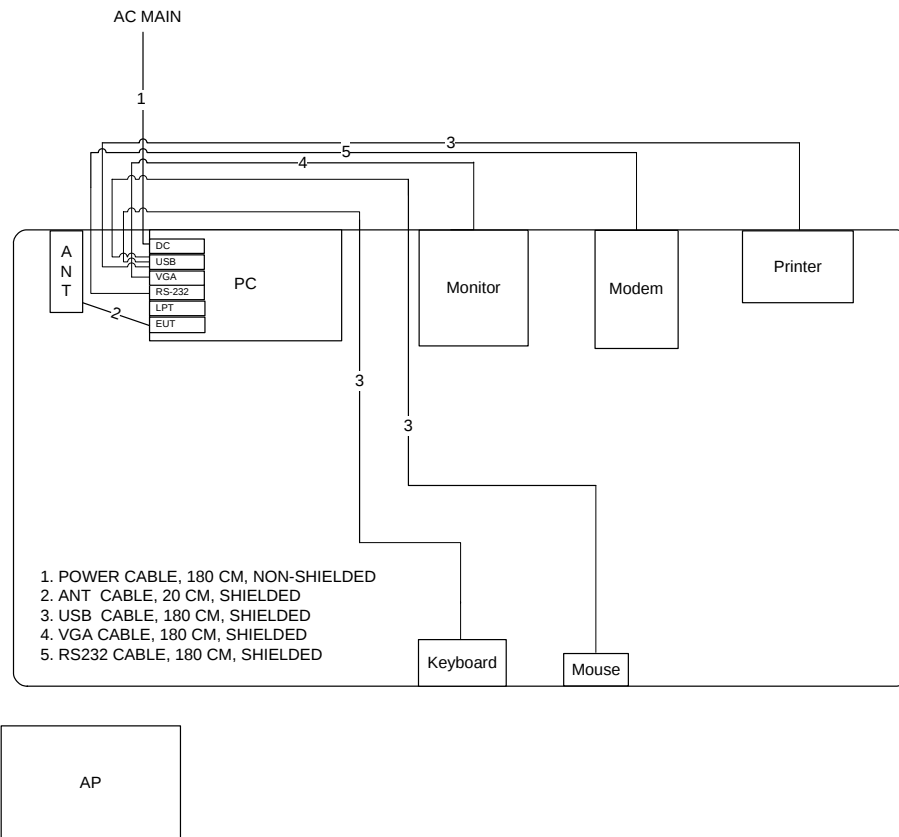

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

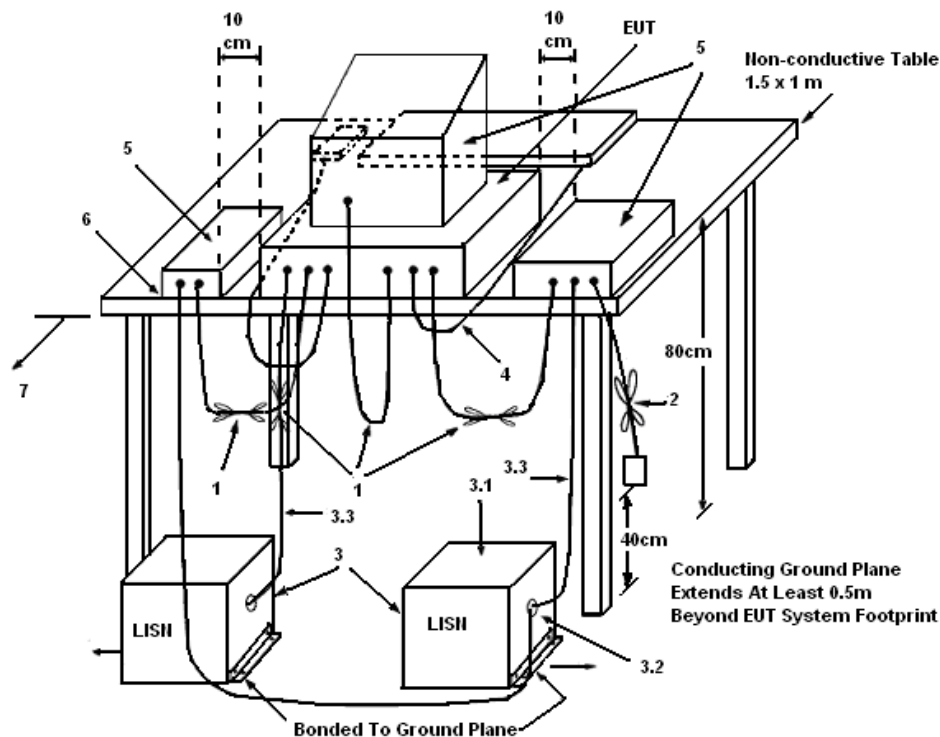

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
 - (3.1) All other equipment powered from additional LISN(s).
 - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
 - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	23°C	Humidity	54%
Test Engineer	Rex Chiu	Phase	Line
Configuration	Normal Link / Mode 1		

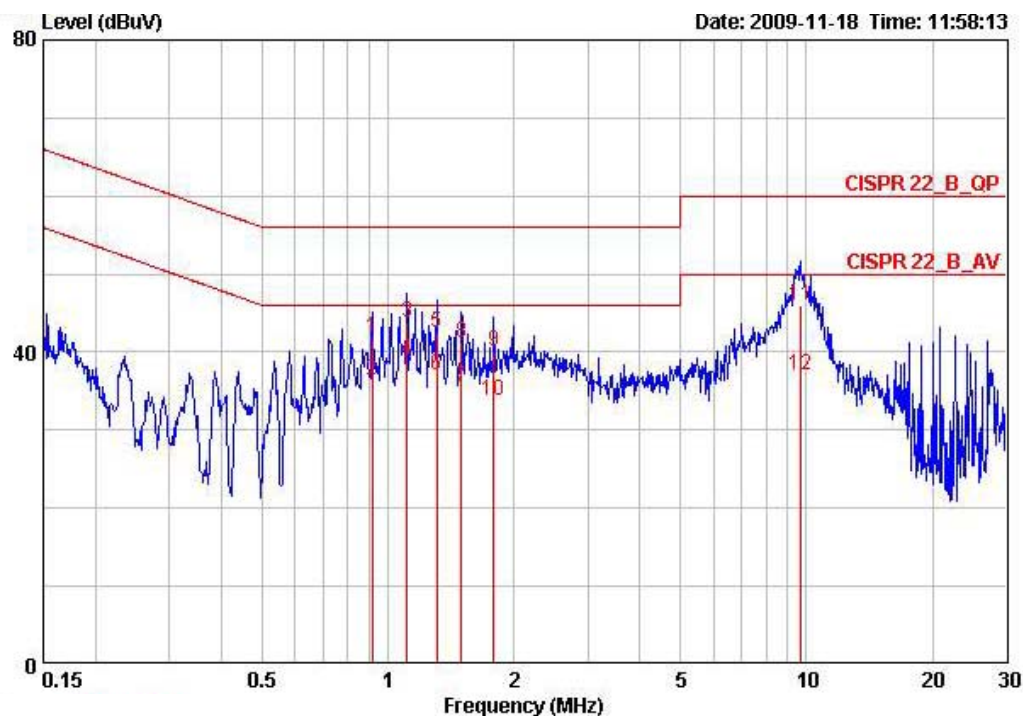

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1 ☒	0.91843	41.88	-14.12	56.00	41.65	0.03	0.20	QP
2 ☒	0.91843	36.38	-9.62	46.00	36.15	0.03	0.20	AVERAGE
3 ☒	1.113	43.73	-12.27	56.00	43.52	0.03	0.17	QP
4 ☒	1.113	38.98	-7.02	46.00	38.77	0.03	0.17	AVERAGE
5 ☒	1.307	42.44	-13.56	56.00	42.27	0.04	0.13	QP
6 ☒	1.307	37.01	-8.99	46.00	36.84	0.04	0.13	AVERAGE
7 ☒	1.500	35.51	-10.49	46.00	35.36	0.04	0.10	AVERAGE
8 ☒	1.500	41.14	-14.86	56.00	40.99	0.04	0.10	QP
9 ☒	1.790	40.02	-15.98	56.00	39.81	0.05	0.16	QP
10 ☒	1.790	33.81	-12.19	46.00	33.60	0.05	0.16	AVERAGE
11 ☒	9.654	45.94	-14.06	60.00	45.30	0.34	0.30	QP
12 ☒	9.654	36.95	-13.05	50.00	36.31	0.34	0.30	AVERAGE

Temperature	23°C	Humidity	54%
Test Engineer	Rex Chiu	Phase	Neutral
Configuration	Normal Link / Mode 1		

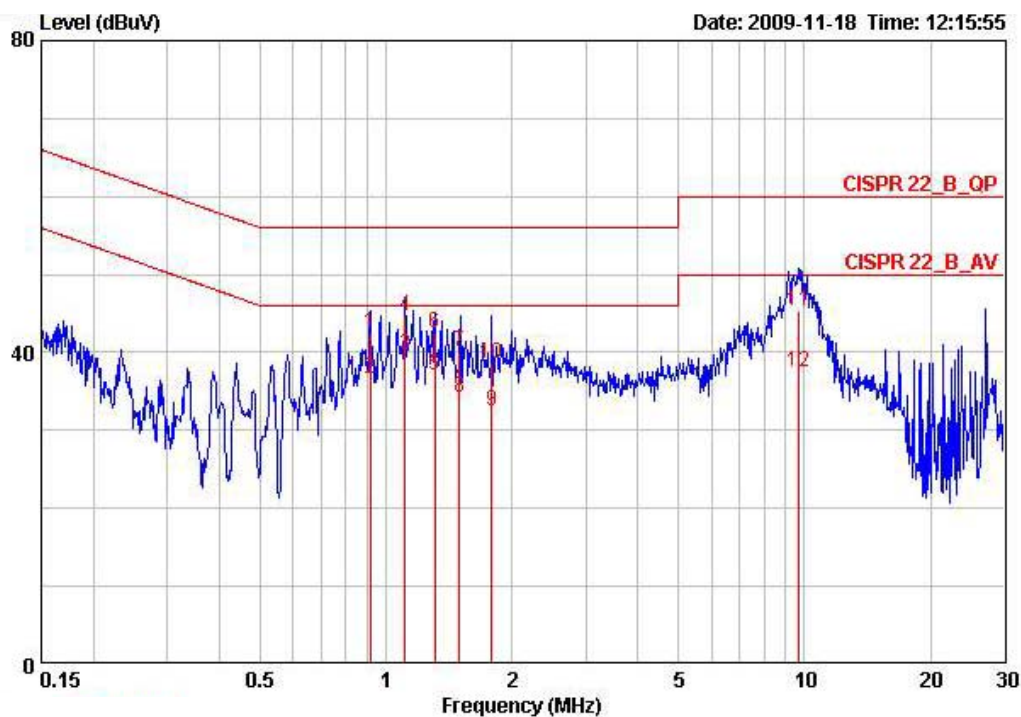


	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1 ☒	0.91843	42.41	-13.59	56.00	42.14	0.07	0.20	QP
2 ☒	0.91843	36.69	-9.31	46.00	36.42	0.07	0.20	AVERAGE
3 ☒	1.113	39.74	-6.26	46.00	39.49	0.07	0.17	AVERAGE
4 ☒	1.113	44.73	-11.27	56.00	44.48	0.07	0.17	QP
5 ☒	1.306	37.10	-8.90	46.00	36.89	0.08	0.13	AVERAGE
6 ☒	1.306	42.42	-13.58	56.00	42.21	0.08	0.13	QP
7 ☒	1.500	40.20	-15.80	56.00	40.01	0.08	0.10	QP
8 ☒	1.500	34.29	-11.71	46.00	34.10	0.08	0.10	AVERAGE
9 ☒	1.789	32.39	-13.61	46.00	32.14	0.09	0.16	AVERAGE
10	1.789	38.59	-17.41	56.00	38.34	0.09	0.16	QP
11 ☒	9.654	45.45	-14.55	60.00	44.77	0.38	0.30	QP
12 ☒	9.654	37.53	-12.47	50.00	36.85	0.38	0.30	AVERAGE

Note:


Level = Read Level + LISN Factor + Cable Loss.

Temperature	23°C	Humidity	54%
Test Engineer	Rex Chiu	Phase	Line
Configuration	Normal Link / Mode 2		

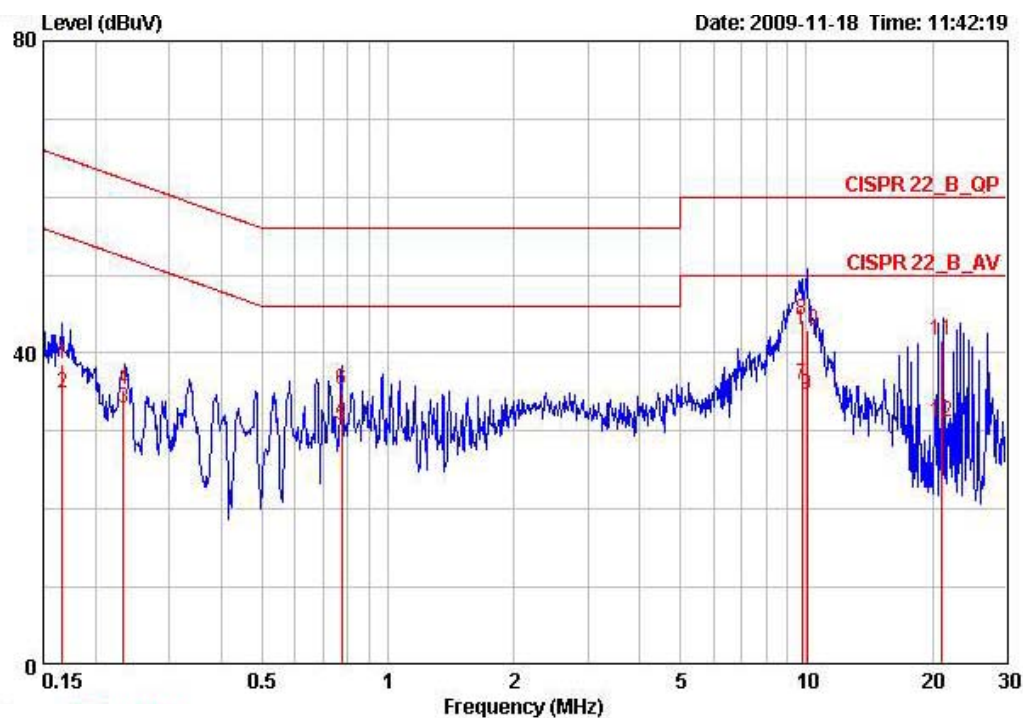

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.16677	38.60	-26.52	65.12	38.33	0.07	0.20	QP
2	0.16677	34.83	-20.29	55.12	34.56	0.07	0.20	AVERAGE
3	0.23277	32.99	-19.36	52.35	32.74	0.05	0.20	AVERAGE
4	0.23277	35.35	-27.00	62.35	35.10	0.05	0.20	QP
5	0.77439	30.81	-15.19	46.00	30.58	0.03	0.20	AVERAGE
6	0.77439	35.42	-20.58	56.00	35.19	0.03	0.20	QP
7	9.757	36.03	-13.97	50.00	35.39	0.34	0.30	AVERAGE
8	9.757	44.14	-15.86	60.00	43.50	0.34	0.30	QP
9	10.007	34.75	-15.25	50.00	34.09	0.35	0.31	AVERAGE
10	10.007	43.00	-17.00	60.00	42.34	0.35	0.31	QP
11	21.122	41.62	-18.38	60.00	40.22	0.90	0.50	QP
12	21.122	31.14	-18.86	50.00	29.74	0.90	0.50	AVERAGE

Temperature	23°C	Humidity	54%
Test Engineer	Rex Chiu	Phase	Neutral
Configuration	Normal Link / Mode 2		

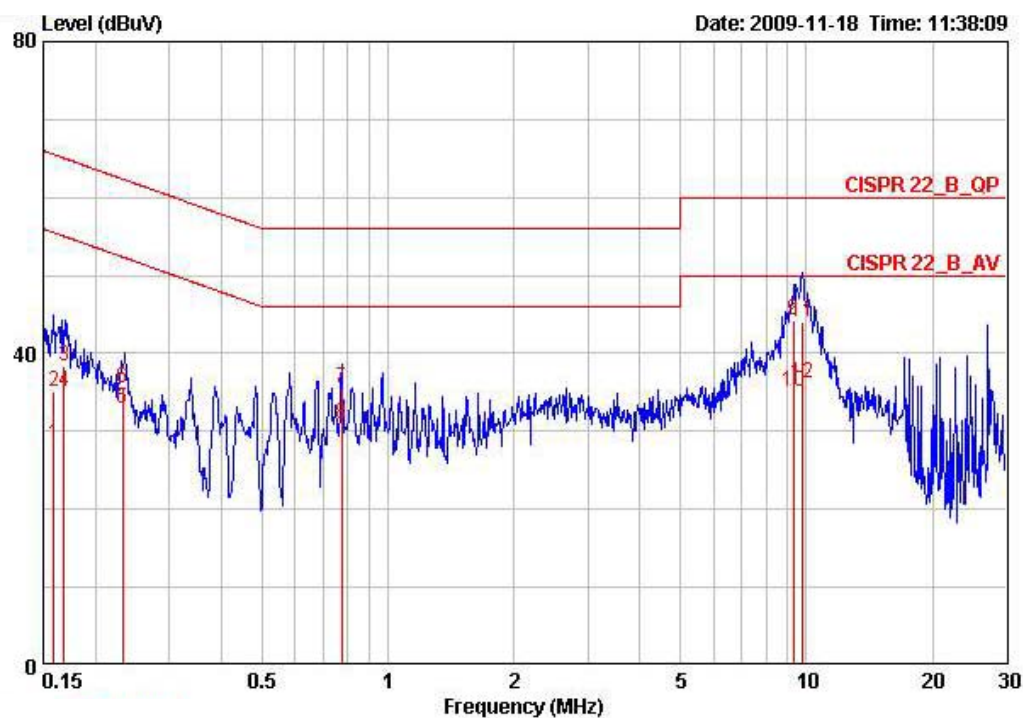

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.15900	28.33	-27.19	55.52	28.03	0.10	0.20	AVERAGE
2	0.15900	35.15	-30.37	65.52	34.85	0.10	0.20	QP
3	0.16780	38.34	-26.73	65.07	38.04	0.10	0.20	QP
4	0.16780	35.00	-20.07	55.07	34.70	0.10	0.20	AVERAGE
5	0.23260	32.84	-19.52	52.36	32.56	0.08	0.20	AVERAGE
6	0.23260	35.52	-26.84	62.36	35.24	0.08	0.20	QP
7	0.77399	35.52	-20.48	56.00	35.25	0.07	0.20	QP
8	0.77399	30.85	-15.15	46.00	30.58	0.07	0.20	AVERAGE
9	9.320	44.21	-15.79	60.00	43.54	0.37	0.30	QP
10	9.320	35.07	-14.93	50.00	34.40	0.37	0.30	AVERAGE
11	9.809	43.94	-16.06	60.00	43.26	0.38	0.30	QP
12	9.809	36.13	-13.87	50.00	35.45	0.38	0.30	AVERAGE

Note:

Level = Read Level + LISN Factor + Cable Loss.

4.2. Maximum Conducted Output Power Measurement

4.2.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. The limited has to be reduced by the amount in dB that the gain of the antenna exceed 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1MHz
VB	3MHz
Detector	RMS
Trace	Max Hold
Sweep Time	Auto

4.2.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Test was performed in accordance with Measurement of Digital Transmission Systems Operating under Section 15.247 March 23, 2005.
3. When measuring maximum conducted output power with multiple antenna systems, add every result of the values by mathematic formula.

4.2.4. Test Setup Layout

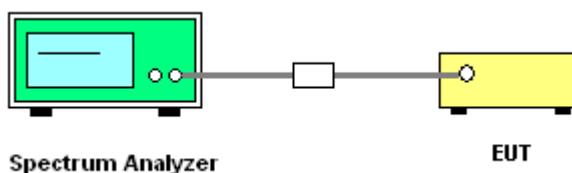

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of Maximum Conducted Output Power

<For Antenna A>

Temperature	24.3°C	Humidity	58%
Test Engineer	Sam Chen	Configurations	IEEE 802.11n / Antenna A

Configuration IEEE 802.11n MCS0 20MHz

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	24.00	30.00	Complies
6	2437 MHz	23.96	30.00	Complies
11	2462 MHz	23.60	30.00	Complies

Configuration IEEE 802.11n MCS0 40MHz

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	21.78	30.00	Complies
6	2437 MHz	23.98	30.00	Complies
9	2452 MHz	21.36	30.00	Complies

Temperature	24.3°C	Humidity	58%
Test Engineer	Sam Chen	Configurations	IEEE 802.11b/g / Antenna A

Configuration IEEE 802.11b

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	22.52	30.00	Complies
6	2437 MHz	22.49	30.00	Complies
11	2462 MHz	22.12	30.00	Complies

Configuration IEEE 802.11g

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	24.05	30.00	Complies
6	2437 MHz	23.91	30.00	Complies
11	2462 MHz	23.57	30.00	Complies

<For Antenna B>

Temperature	24.3°C	Humidity	58%
Test Engineer	Sam Chen	Configurations	IEEE 802.11n / Antenna B

Configuration IEEE 802.11n MCS0 20MHz

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	23.65	30.00	Complies
6	2437 MHz	26.14	30.00	Complies
11	2462 MHz	24.75	30.00	Complies

Configuration IEEE 802.11n MCS0 40MHz

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	20.61	30.00	Complies
6	2437 MHz	23.87	30.00	Complies
9	2452 MHz	20.90	30.00	Complies

Temperature	24.3°C	Humidity	58%
Test Engineer	Sam Chen	Configurations	IEEE 802.11b/g / Antenna B

Configuration IEEE 802.11b


Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	22.50	30.00	Complies
6	2437 MHz	24.61	30.00	Complies
11	2462 MHz	21.68	30.00	Complies

Configuration IEEE 802.11g

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	23.70	30.00	Complies
6	2437 MHz	26.10	30.00	Complies
11	2462 MHz	24.29	30.00	Complies


<For Antenna A>

Conducted Output Power Plot on Configuration IEEE 802.11n MCS0 20MHz / 2412 MHz

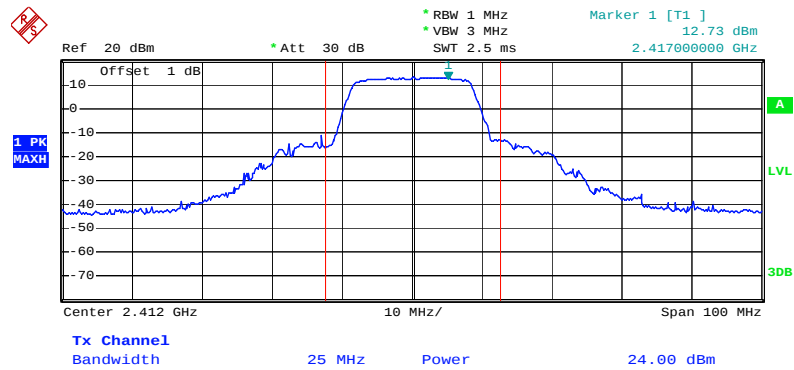


Date: 19.NOV.2009 11:02:52

Conducted Output Power Plot on Configuration IEEE 802.11n MCS0 20MHz / 2437 MHz

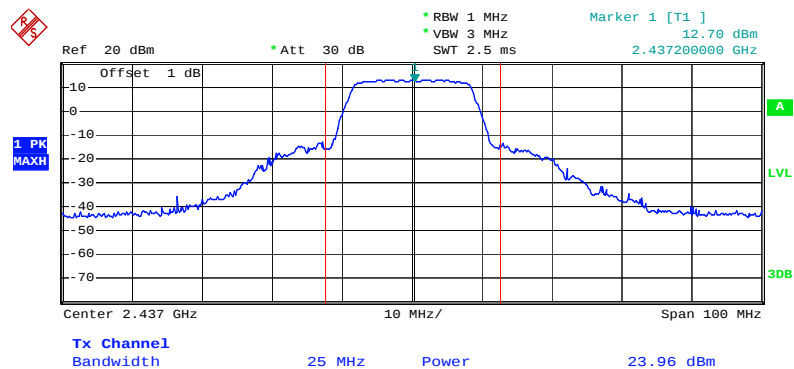


Date: 19.NOV.2009 11:02:19

Conducted Output Power Plot on Configuration IEEE 802.11n MCS0 20MHz / 2462 MHz

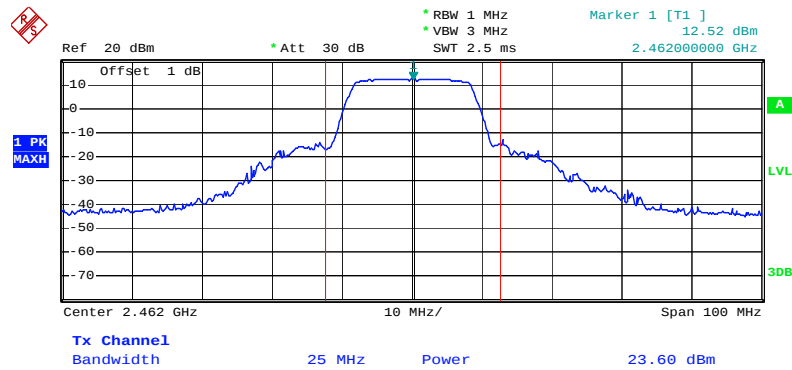


Date: 19.NOV.2009 11:01:34

Conducted Output Power Plot on Configuration IEEE 802.11n MCS0 40MHz / 2422 MHz

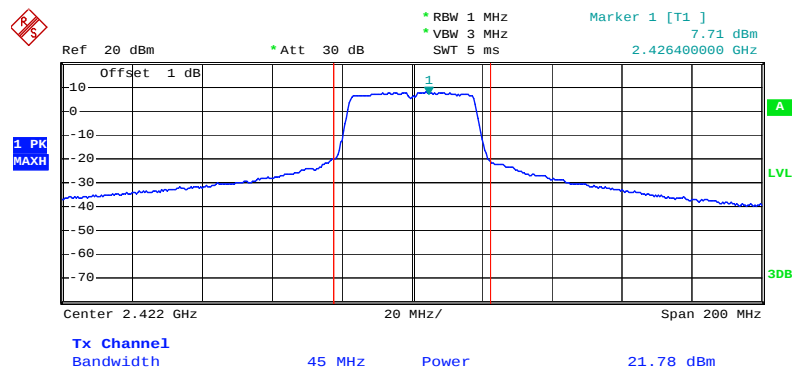


Date: 19.NOV.2009 11:04:26

Conducted Output Power Plot on Configuration IEEE 802.11n MCS0 40MHz / 2437 MHz

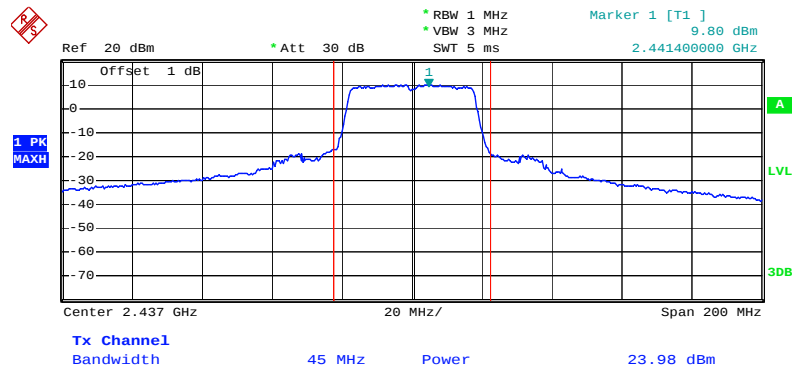


Date: 19.NOV.2009 11:05:33

Conducted Output Power Plot on Configuration IEEE 802.11n MCS0 40MHz / 2452 MHz

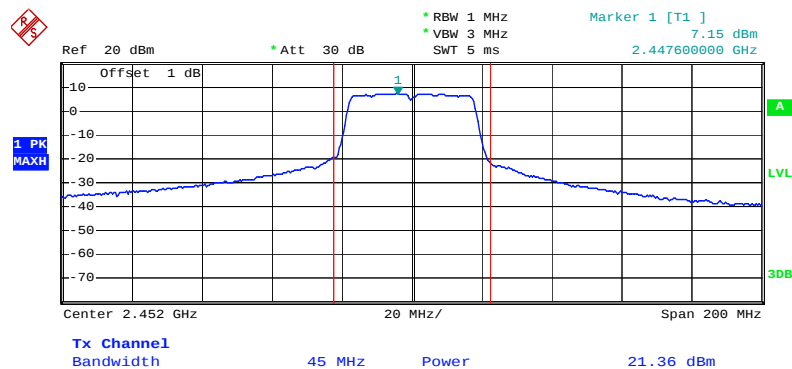


Date: 19.NOV.2009 11:06:10

Conducted Output Power Plot on Configuration IEEE 802.11b / 2412 MHz

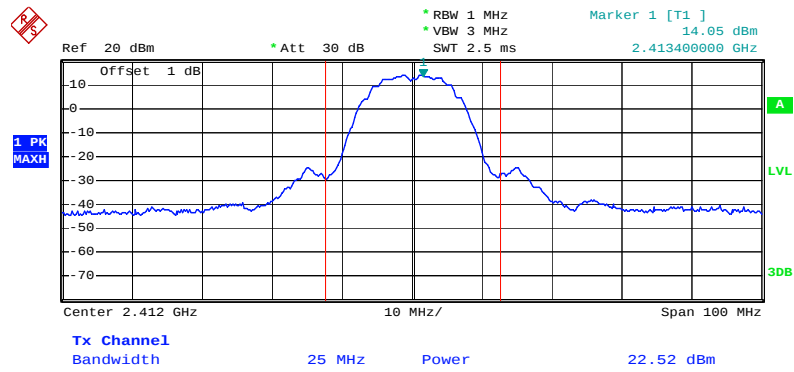


Date: 19.NOV.2009 10:57:13

Conducted Output Power Plot on Configuration IEEE 802.11b / 2437 MHz

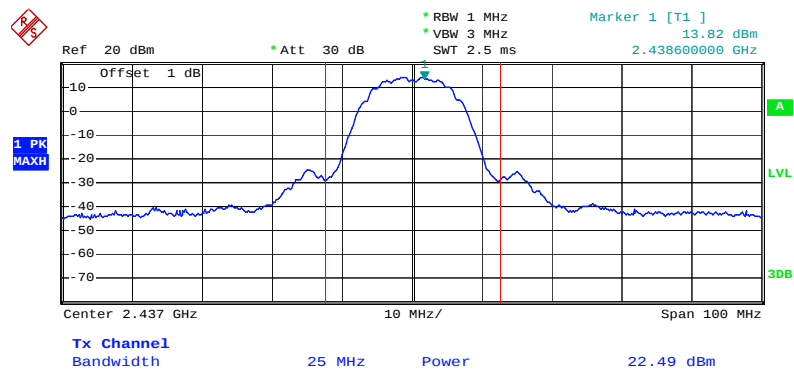


Date: 19.NOV.2009 10:57:34

Conducted Output Power Plot on Configuration IEEE 802.11b / 2462 MHz

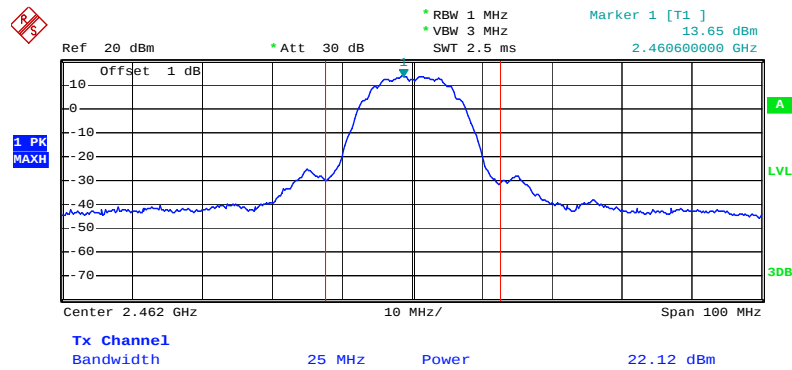


Date: 19.NOV.2009 10:57:58

Conducted Output Power Plot on Configuration IEEE 802.11g / 2412 MHz

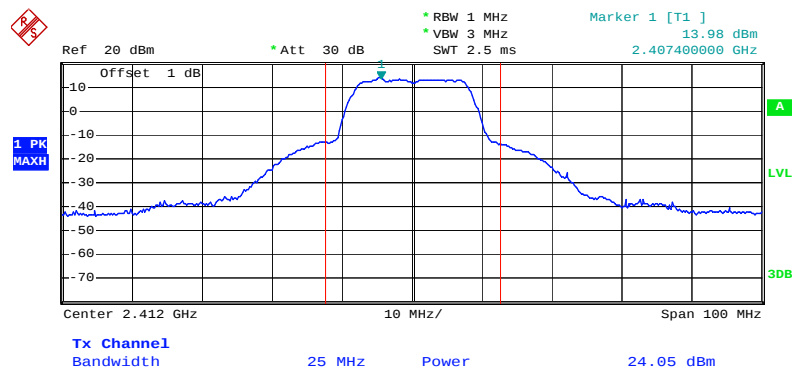


Date: 19.NOV.2009 10:59:33

Conducted Output Power Plot on Configuration IEEE 802.11g / 2437 MHz

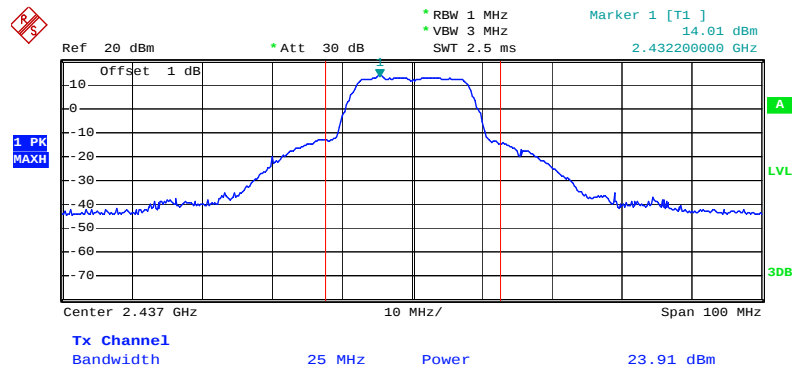

Date: 19.NOV.2009 11:00:07


Conducted Output Power Plot on Configuration IEEE 802.11g / 2462 MHz

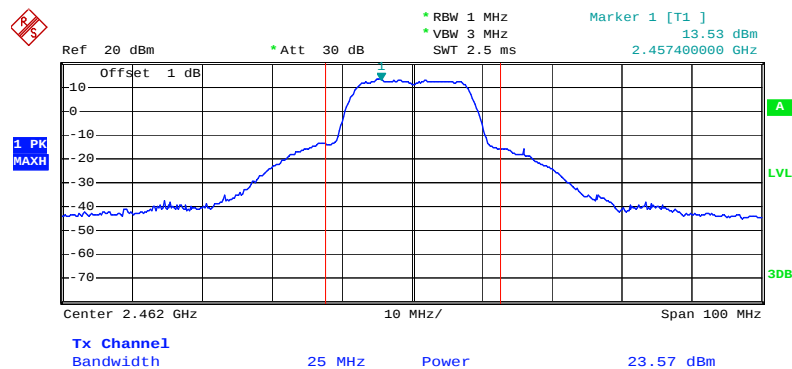

Date: 19.NOV.2009 11:00:49


<For Antenna B>

Conducted Output Power Plot on Configuration IEEE 802.11n MCS0 20MHz / 2412 MHz

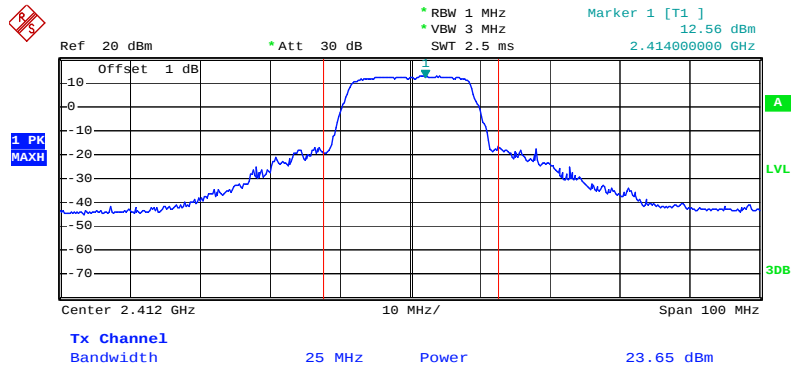


Date: 19.NOV.2009 13:19:50

Conducted Output Power Plot on Configuration IEEE 802.11n MCS0 20MHz / 2437 MHz

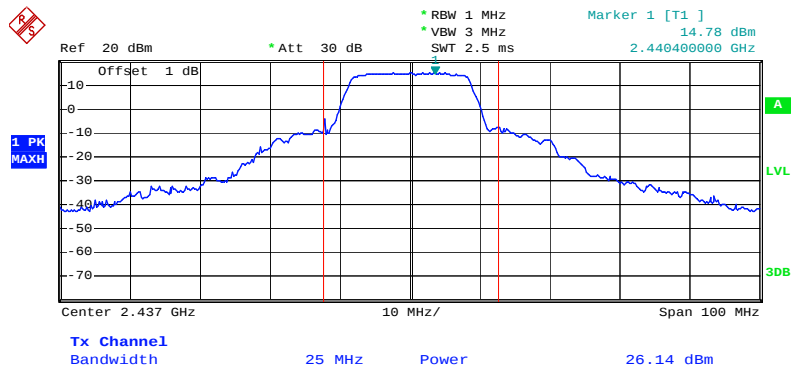


Date: 19.NOV.2009 13:21:04

Conducted Output Power Plot on Configuration IEEE 802.11n MCS0 20MHz / 2462 MHz

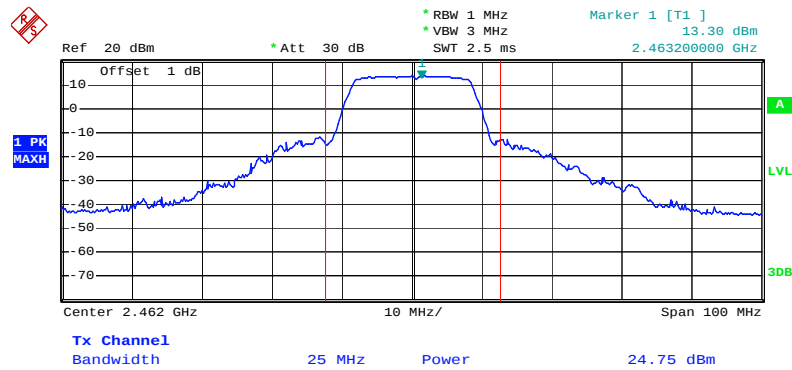


Date: 19.NOV.2009 13:21:53

Conducted Output Power Plot on Configuration IEEE 802.11n MCS0 40MHz / 2422 MHz

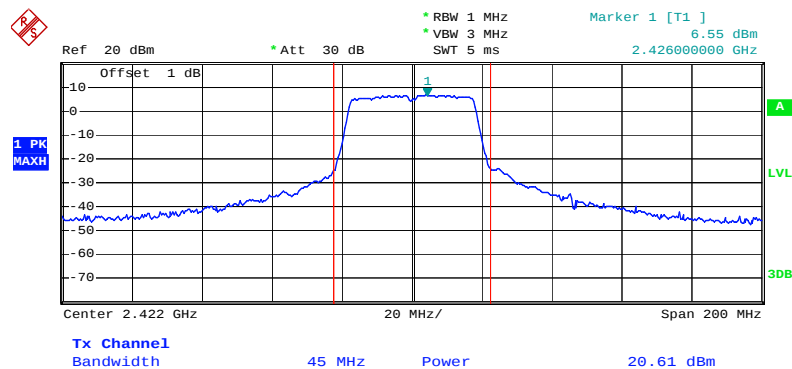


Date: 19.NOV.2009 13:23:09

Conducted Output Power Plot on Configuration IEEE 802.11n MCS0 40MHz / 2437 MHz

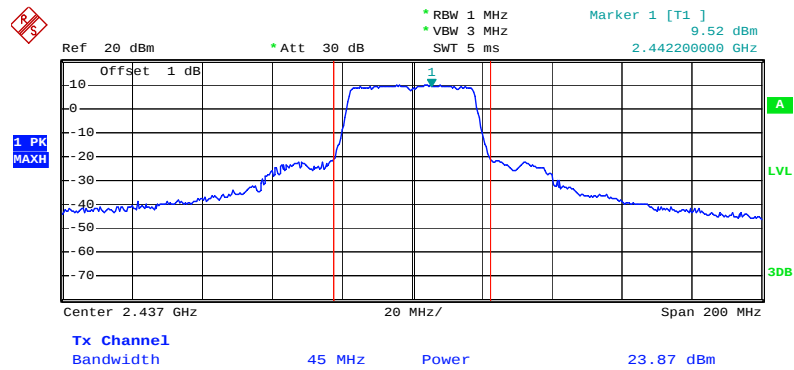


Date: 19.NOV.2009 13:23:41

Conducted Output Power Plot on Configuration IEEE 802.11n MCS0 40MHz / 2452 MHz

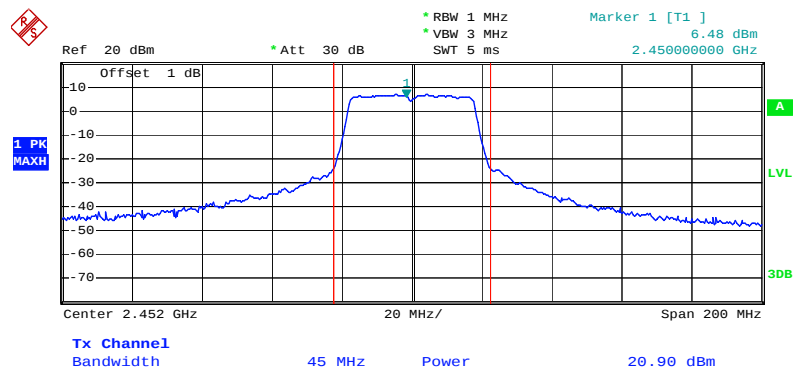


Date: 19.NOV.2009 13:24:23

Conducted Output Power Plot on Configuration IEEE 802.11b / 2412 MHz

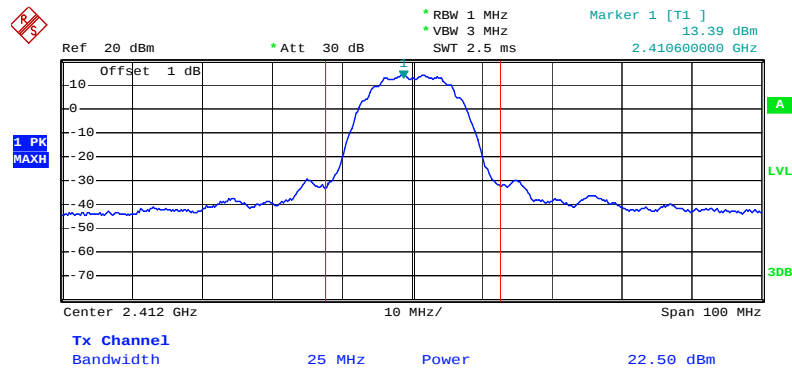


Date: 19.NOV.2009 13:13:05

Conducted Output Power Plot on Configuration IEEE 802.11b / 2437 MHz

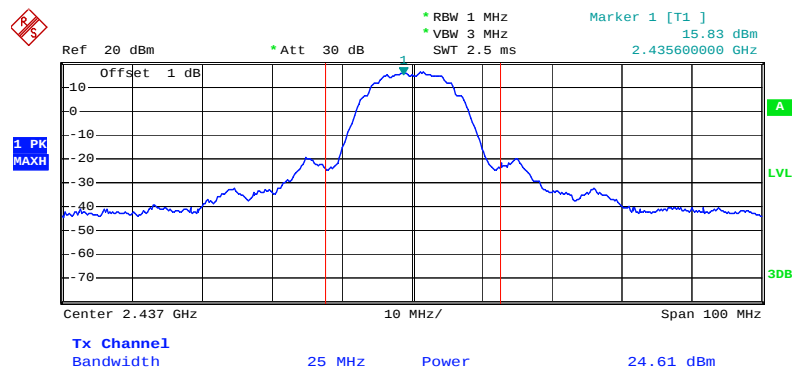


Date: 19.NOV.2009 13:18:31

Conducted Output Power Plot on Configuration IEEE 802.11b / 2462 MHz

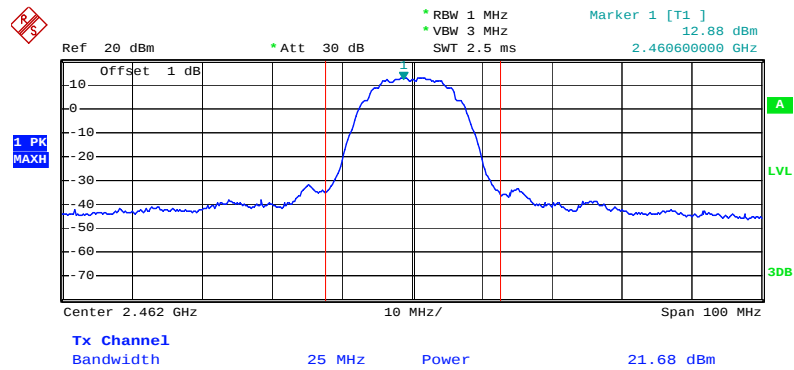


Date: 19.NOV.2009 13:13:34

Conducted Output Power Plot on Configuration IEEE 802.11g / 2412 MHz

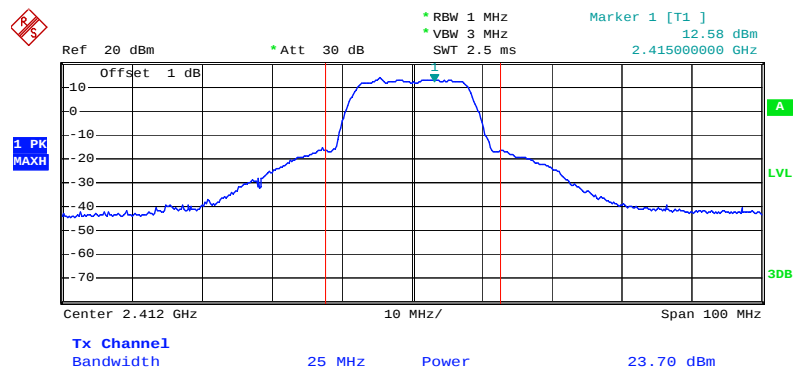


Date: 19.NOV.2009 13:14:41

Conducted Output Power Plot on Configuration IEEE 802.11g / 2437 MHz

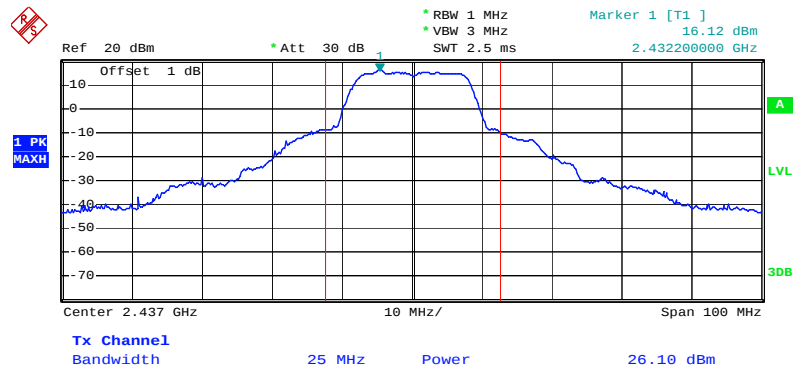

Date: 19.NOV.2009 13:15:57

Conducted Output Power Plot on Configuration IEEE 802.11g / 2462 MHz

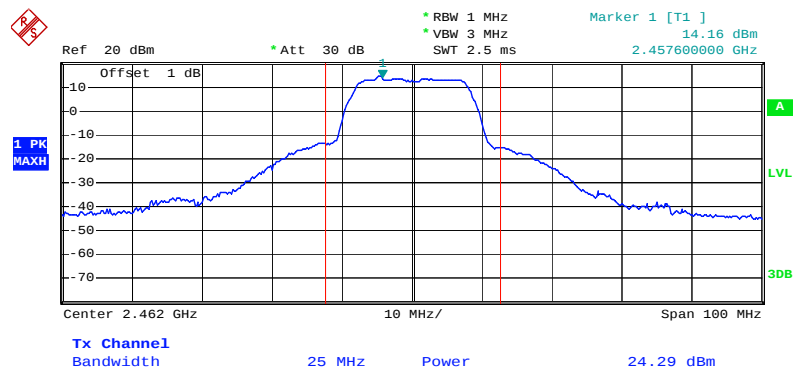

Date: 19.NOV.2009 13:16:54

4.3. Power Spectral Density Measurement

4.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of Spectrum Analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	30 kHz
RB	3 kHz
VB	30 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	10s

4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Set RBW of spectrum analyzer to 3kHz and VBW to 30kHz. Set Detector to Peak, Trace to Max Hold.
3. Mark the frequency with maximum peak power as the center of the display of the spectrum.
4. Set the span to 30kHz and the sweep time to 10s and record the maximum peak value.
5. Measuring multiple antennas, the connector is required to link with spectrum analyzer through a combiner.

4.3.4. Test Setup Layout

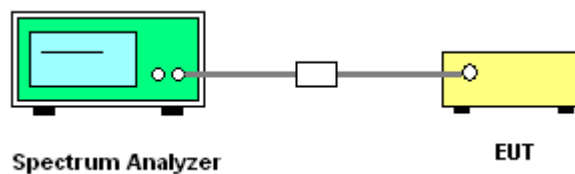

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Power Spectral Density

<For Antenna A>

Temperature	24.3°C	Humidity	58%
Test Engineer	Sam Chen	Configurations	IEEE 802.11n / Antenna A

Configuration IEEE 802.11n MCS0 20MHz

Channel	Frequency	Power Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
1	2412 MHz	-6.65	8.00	Complies
6	2437 MHz	-6.78	8.00	Complies
11	2462 MHz	-7.20	8.00	Complies

Configuration IEEE 802.11n MCS0 40MHz

Channel	Frequency	Power Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
3	2422 MHz	-9.37	8.00	Complies
6	2437 MHz	-7.07	8.00	Complies
9	2452 MHz	-9.81	8.00	Complies

Temperature	24.3°C	Humidity	58%
Test Engineer	Sam Chen	Configurations	IEEE 802.11b/g / Antenna A

Configuration IEEE 802.11b

Channel	Frequency	Power Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
1	2412 MHz	-5.75	8.00	Complies
6	2437 MHz	-5.36	8.00	Complies
11	2462 MHz	-5.33	8.00	Complies

Configuration IEEE 802.11g

Channel	Frequency	Power Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
1	2412 MHz	-7.07	8.00	Complies
6	2437 MHz	-7.11	8.00	Complies
11	2462 MHz	-7.51	8.00	Complies

<For Antenna B>

Temperature	24.3°C	Humidity	58%
Test Engineer	Sam Chen	Configurations	IEEE 802.11n / Antenna B

Configuration IEEE 802.11n MCS0 20MHz

Channel	Frequency	Power Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
1	2412 MHz	-7.54	8.00	Complies
6	2437 MHz	-5.09	8.00	Complies
11	2462 MHz	-6.13	8.00	Complies

Configuration IEEE 802.11n MCS0 40MHz

Channel	Frequency	Power Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
3	2422 MHz	-9.72	8.00	Complies
6	2437 MHz	-6.47	8.00	Complies
9	2452 MHz	-9.72	8.00	Complies

Temperature	24.3°C	Humidity	58%
Test Engineer	Sam Chen	Configurations	IEEE 802.11b/g / Antenna B

Configuration IEEE 802.11b


Channel	Frequency	Power Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
1	2412 MHz	-7.44	8.00	Complies
6	2437 MHz	-5.30	8.00	Complies
11	2462 MHz	-8.03	8.00	Complies

Configuration IEEE 802.11g

Channel	Frequency	Power Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
1	2412 MHz	-6.55	8.00	Complies
6	2437 MHz	-5.45	8.00	Complies
11	2462 MHz	-6.80	8.00	Complies


<For Antenna A>

Power Density Plot on Configuration IEEE 802.11n MCS0 20MHz / 2412 MHz

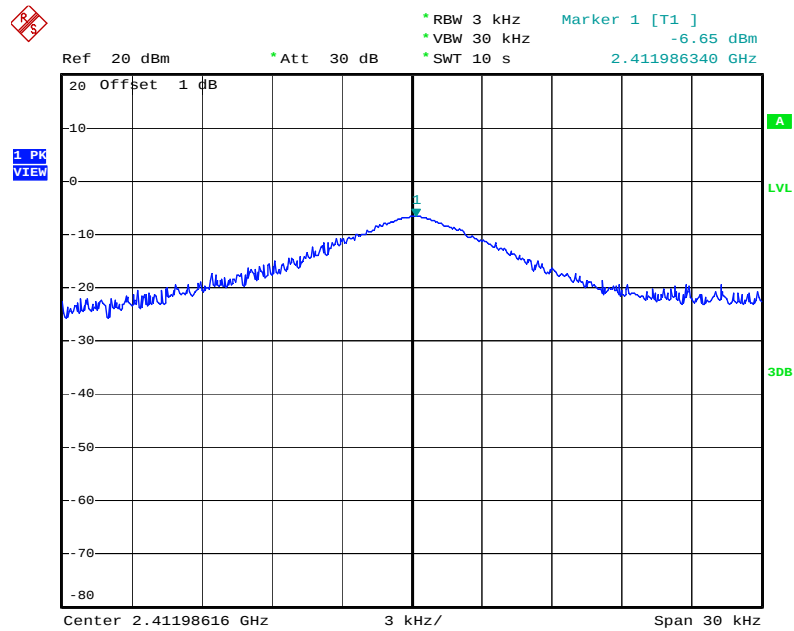


Date: 19.NOV.2009 12:36:53

Power Density Plot on Configuration IEEE 802.11n MCS0 20MHz / 2437 MHz

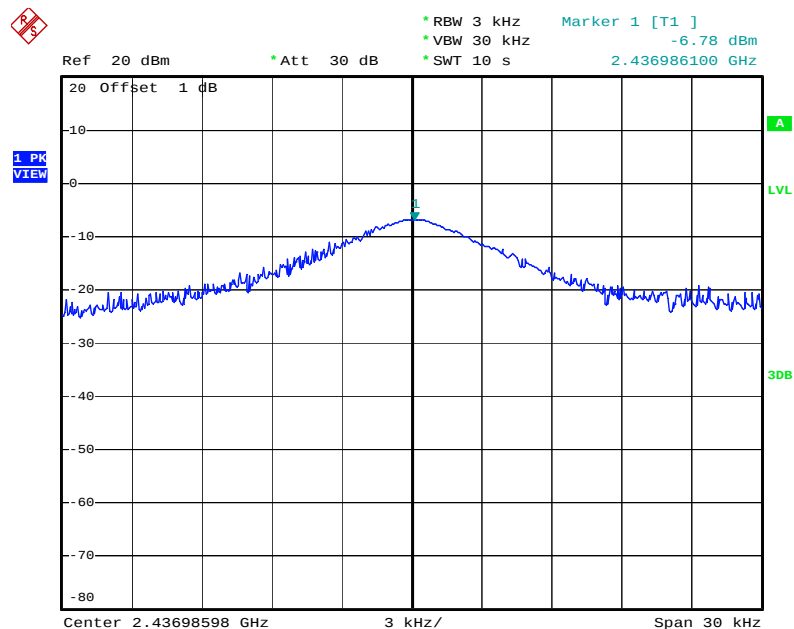


Date: 19.NOV.2009 12:40:06

Power Density Plot on Configuration IEEE 802.11n MCS0 20MHz / 2462 MHz

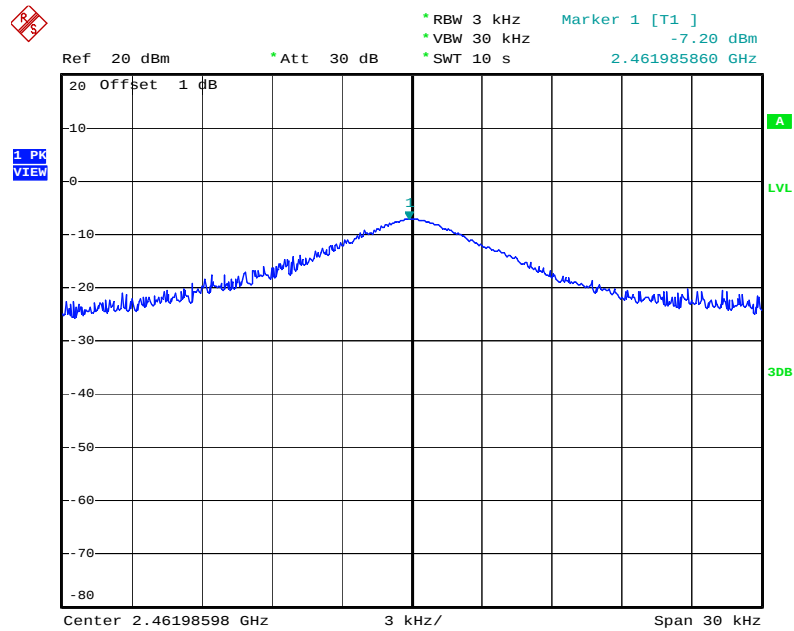


Date: 19.NOV.2009 12:42:00

Power Density Plot on Configuration IEEE 802.11n MCS0 40MHz / 2422 MHz

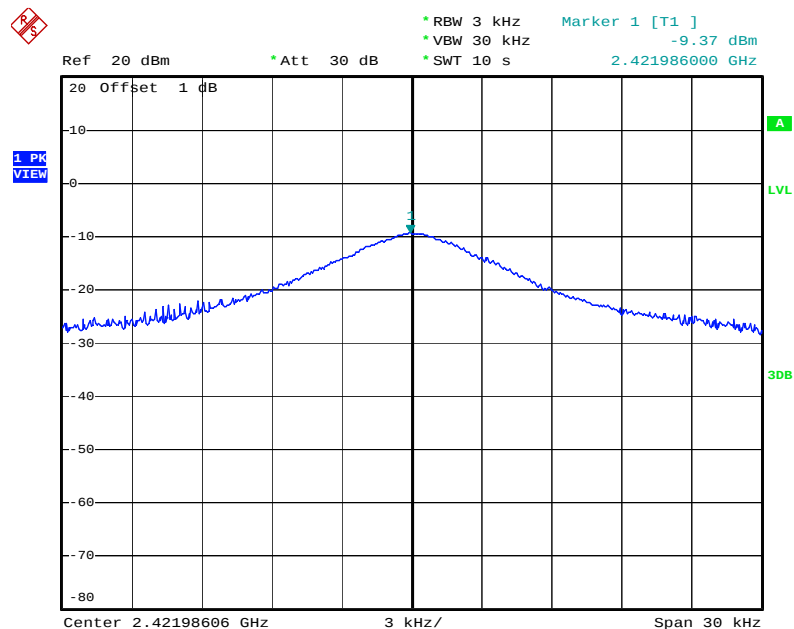


Date: 19.NOV.2009 11:12:30

Power Density Plot on Configuration IEEE 802.11n MCS0 40MHz / 2437 MHz

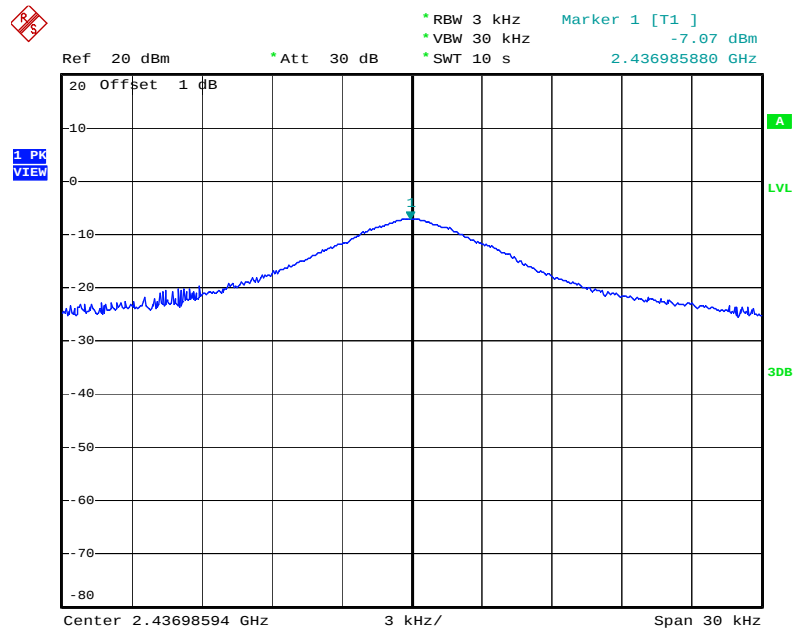


Date: 19.NOV.2009 11:10:08

Power Density Plot on Configuration IEEE 802.11n MCS0 40MHz / 2452 MHz

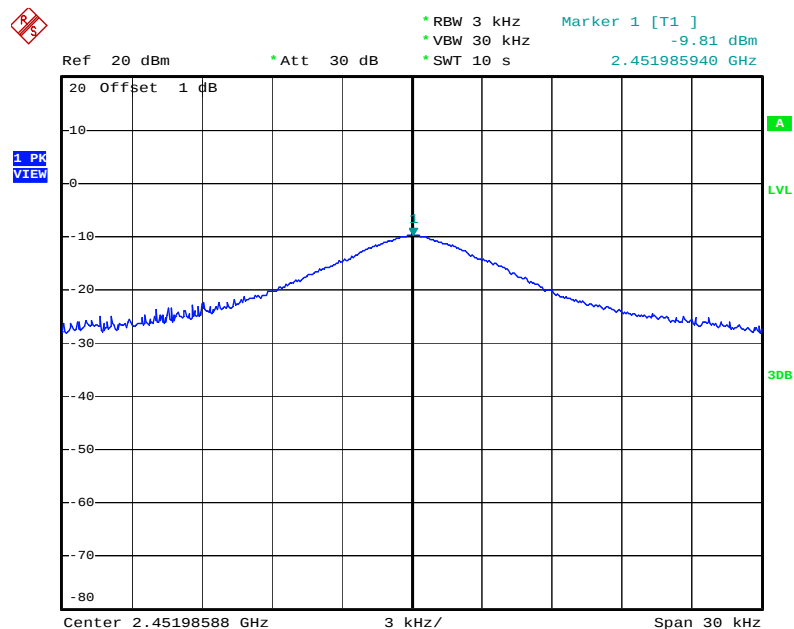


Date: 19.NOV.2009 11:08:13

Power Density Plot on Configuration IEEE 802.11b / 2412 MHz

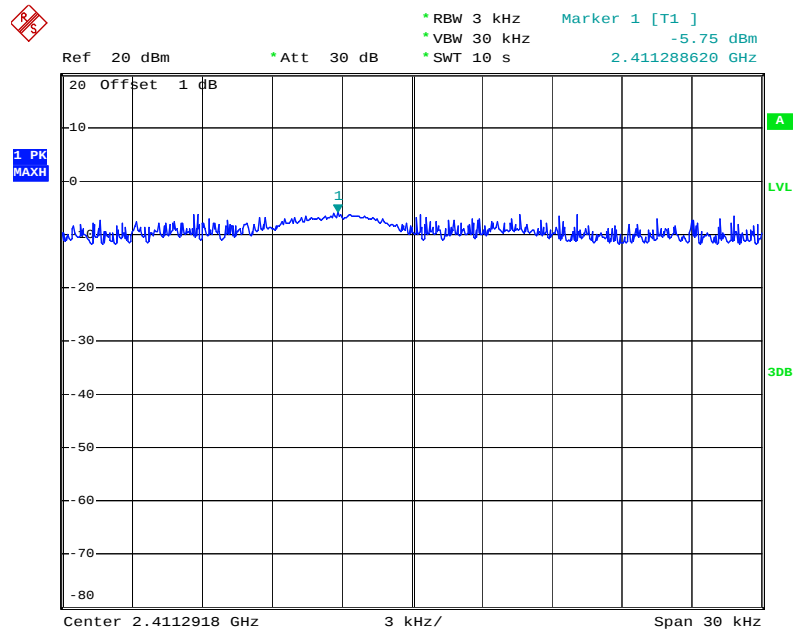


Date: 19.NOV.2009 13:00:52

Power Density Plot on Configuration IEEE 802.11b / 2437 MHz

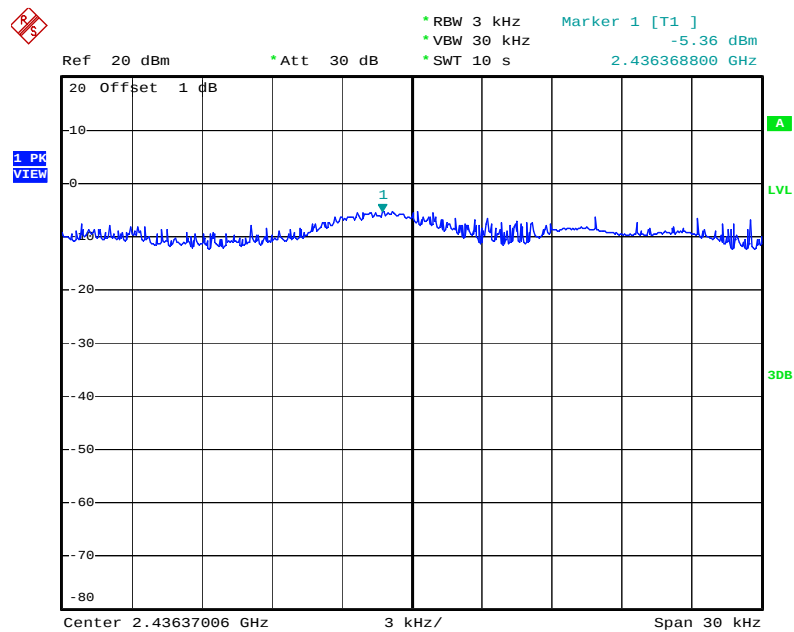


Date: 19.NOV.2009 12:56:33

Power Density Plot on Configuration IEEE 802.11b / 2462 MHz

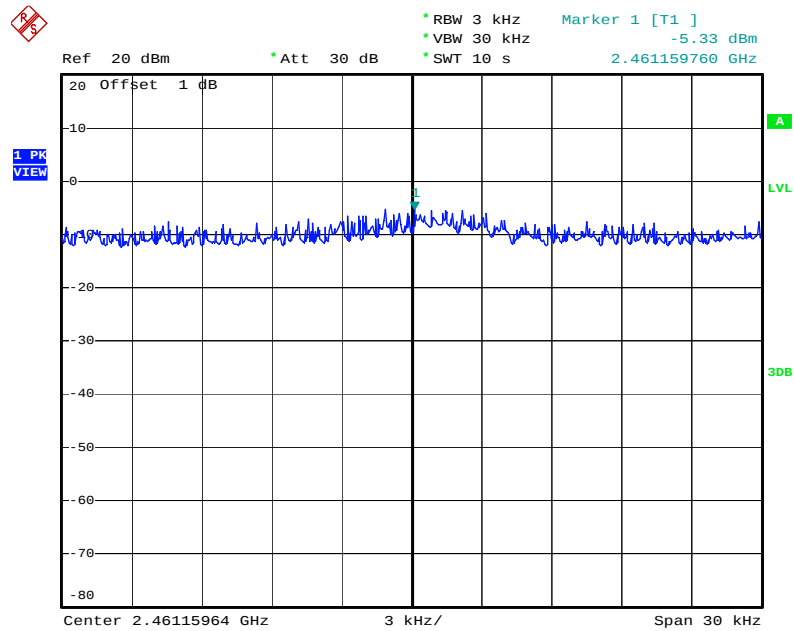


Date: 19.NOV.2009 12:59:24

Power Density Plot on Configuration IEEE 802.11g / 2412 MHz

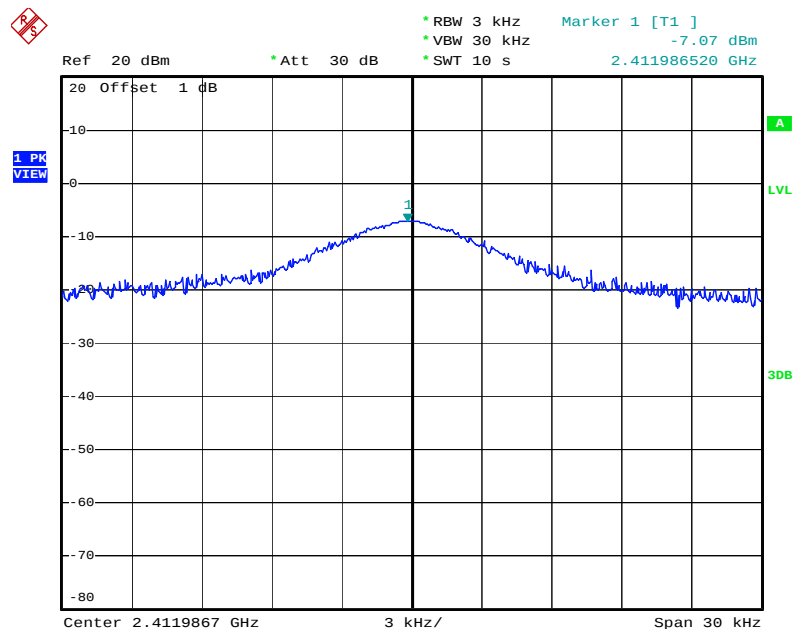


Date: 19.NOV.2009 12:49:03

Power Density Plot on Configuration IEEE 802.11g / 2437 MHz

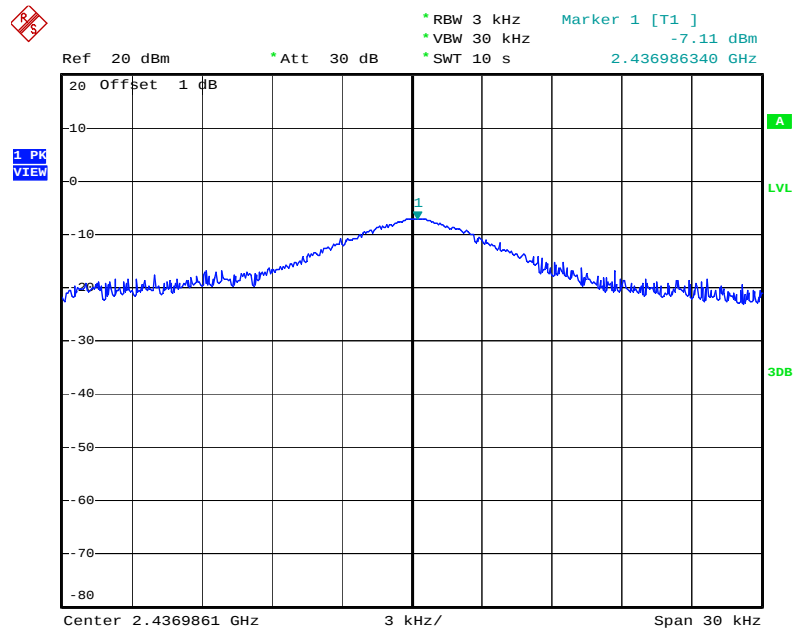

Date: 19.NOV.2009 12:46:14


Power Density Plot on Configuration IEEE 802.11g / 2462 MHz

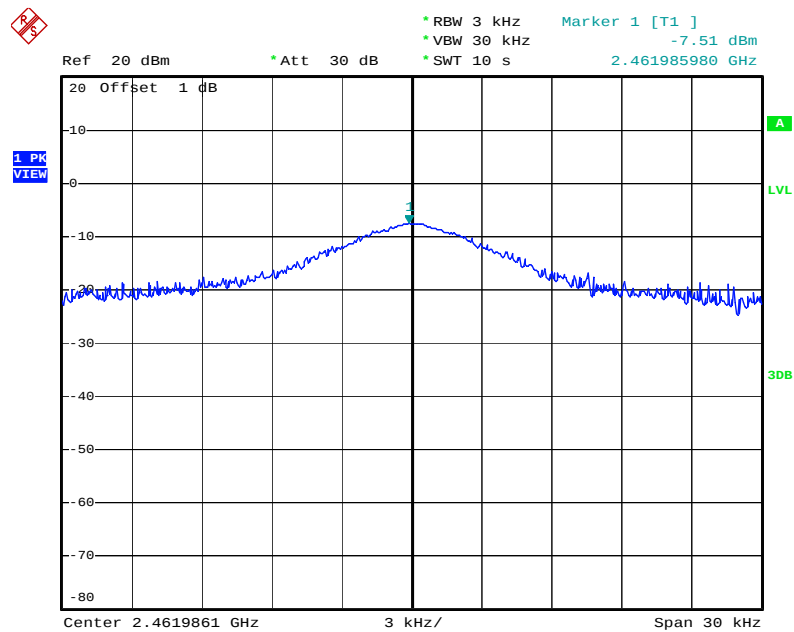

Date: 19.NOV.2009 12:44:15


<For Antenna B>

Power Density Plot on Configuration IEEE 802.11n MCS0 20MHz / 2412 MHz

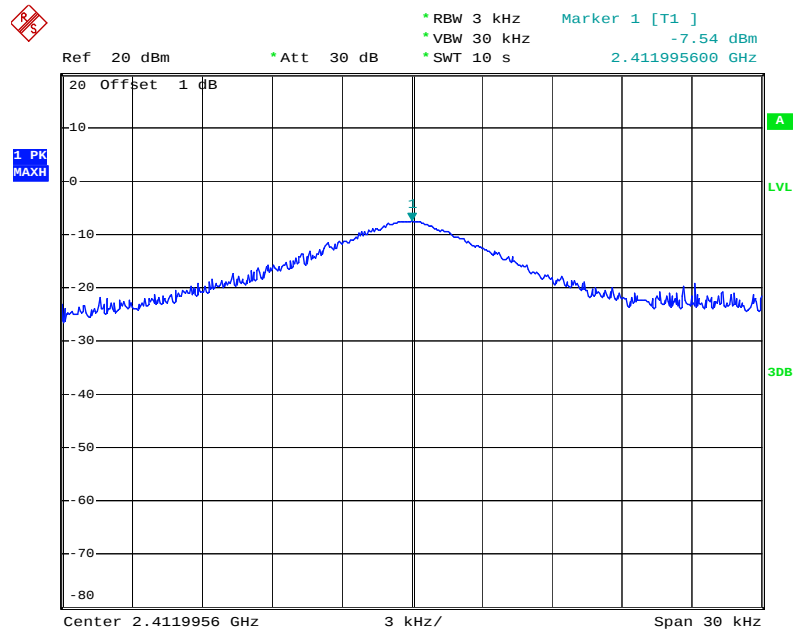


Date: 19.NOV.2009 13:32:23

Power Density Plot on Configuration IEEE 802.11n MCS0 20MHz / 2437 MHz

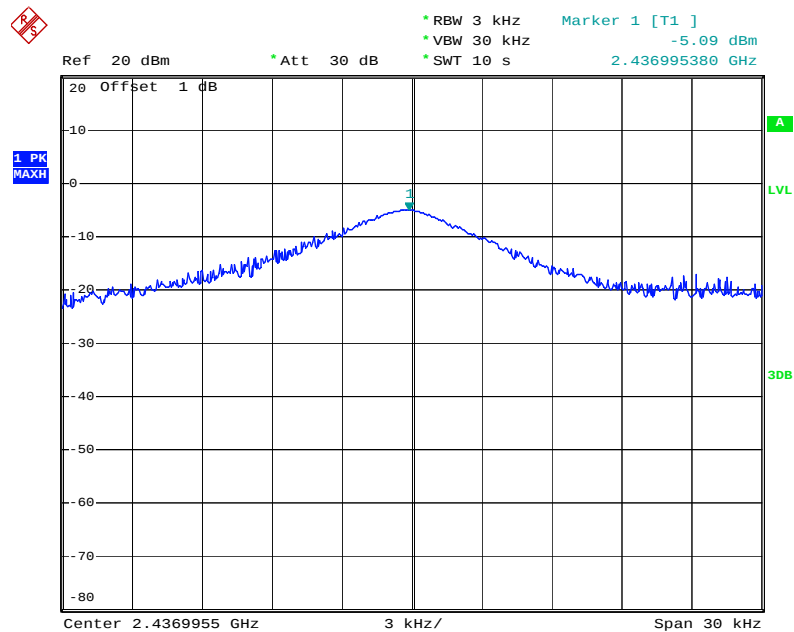


Date: 19.NOV.2009 13:33:55

Power Density Plot on Configuration IEEE 802.11n MCS0 20MHz / 2462 MHz

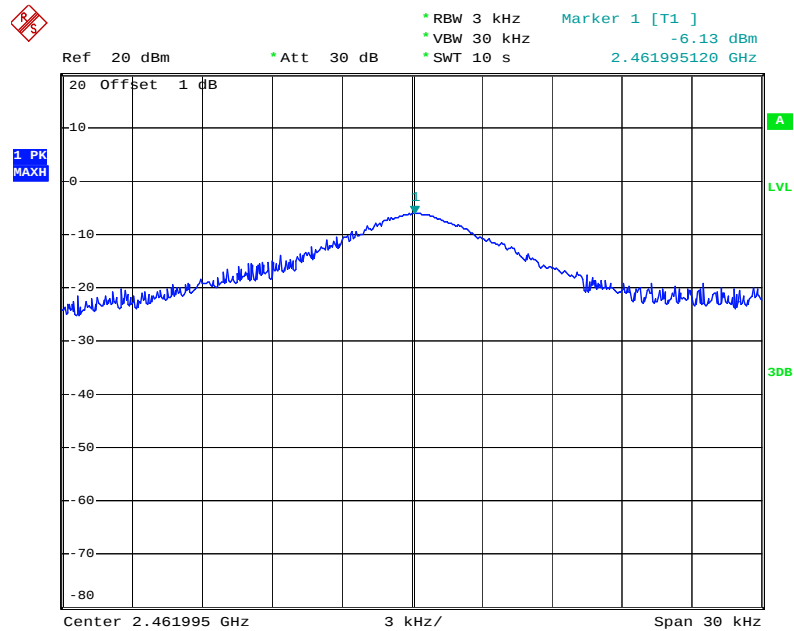


Date: 19.NOV.2009 13:35:01

Power Density Plot on Configuration IEEE 802.11n MCS0 40MHz / 2422 MHz

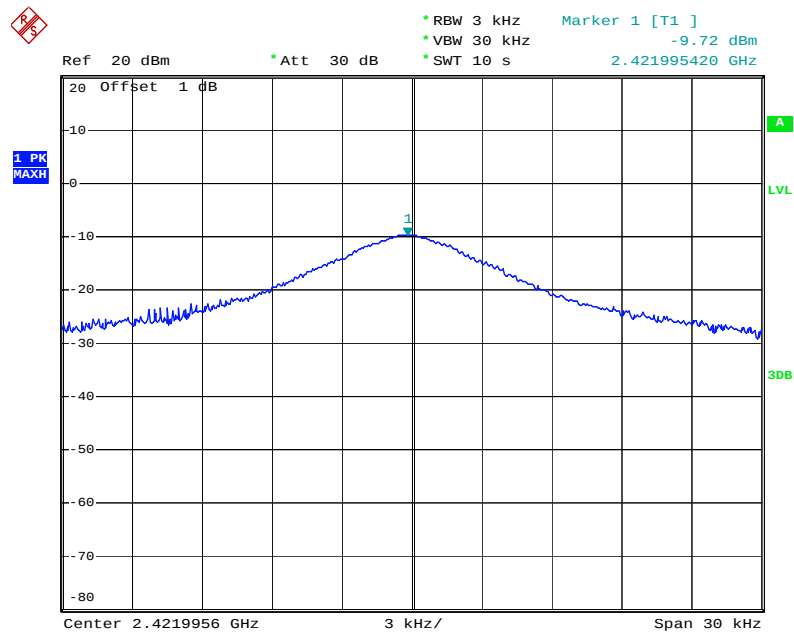


Date: 19.NOV.2009 13:29:36

Power Density Plot on Configuration IEEE 802.11n MCS0 40MHz / 2437 MHz

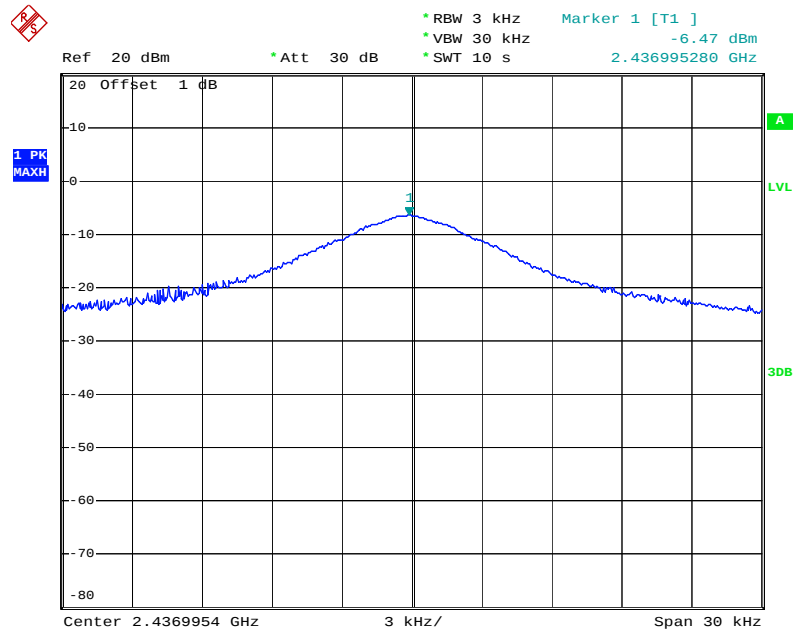


Date: 19.NOV.2009 13:28:38

Power Density Plot on Configuration IEEE 802.11n MCS0 40MHz / 2452 MHz

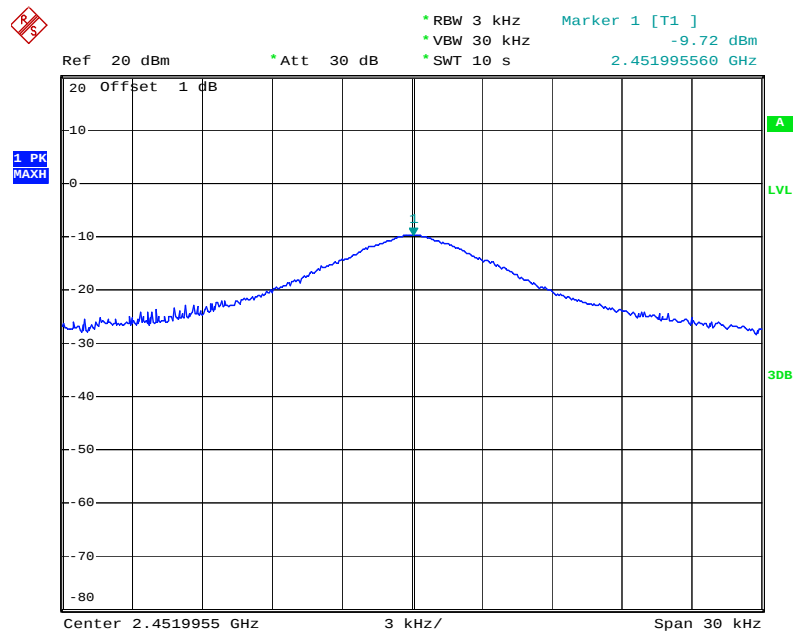


Date: 19.NOV.2009 13:26:20

Power Density Plot on Configuration IEEE 802.11b / 2412 MHz

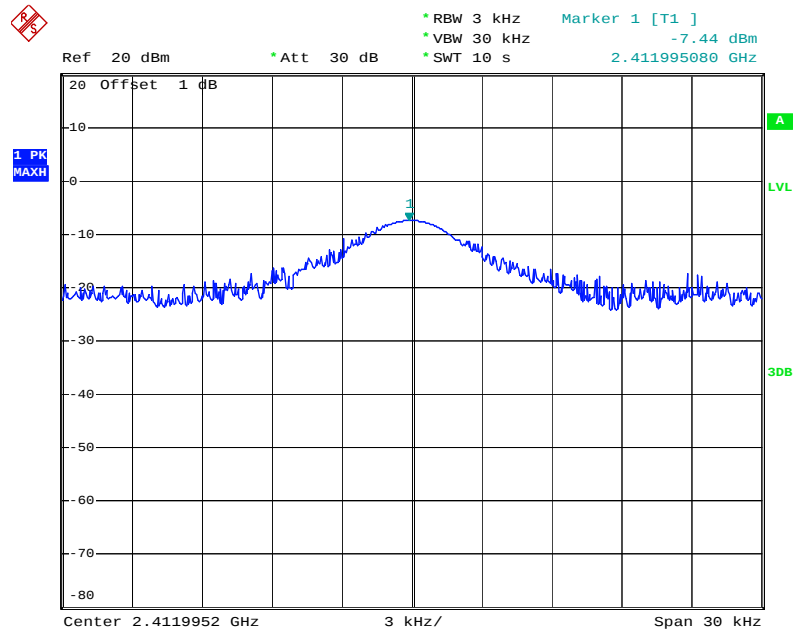


Date: 19.NOV.2009 13:42:49

Power Density Plot on Configuration IEEE 802.11b / 2437 MHz

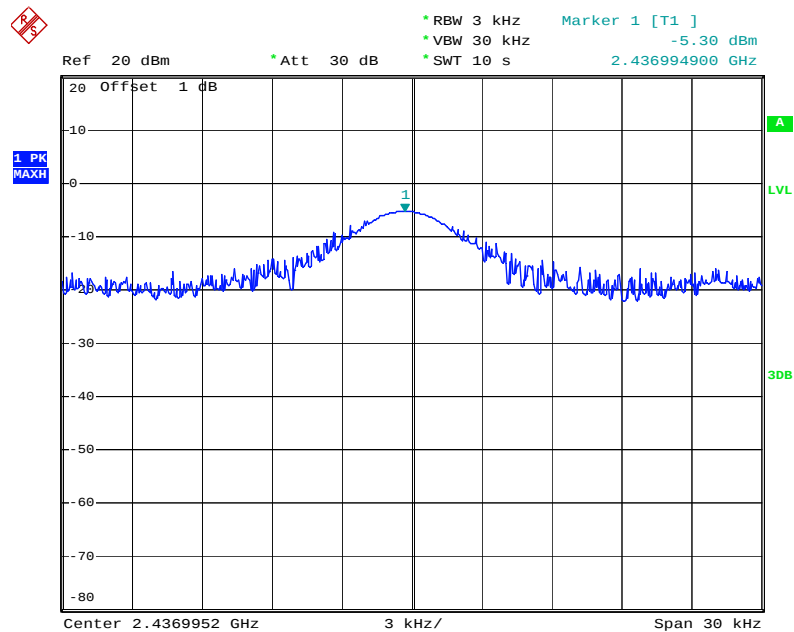


Date: 19.NOV.2009 13:44:44

Power Density Plot on Configuration IEEE 802.11b / 2462 MHz

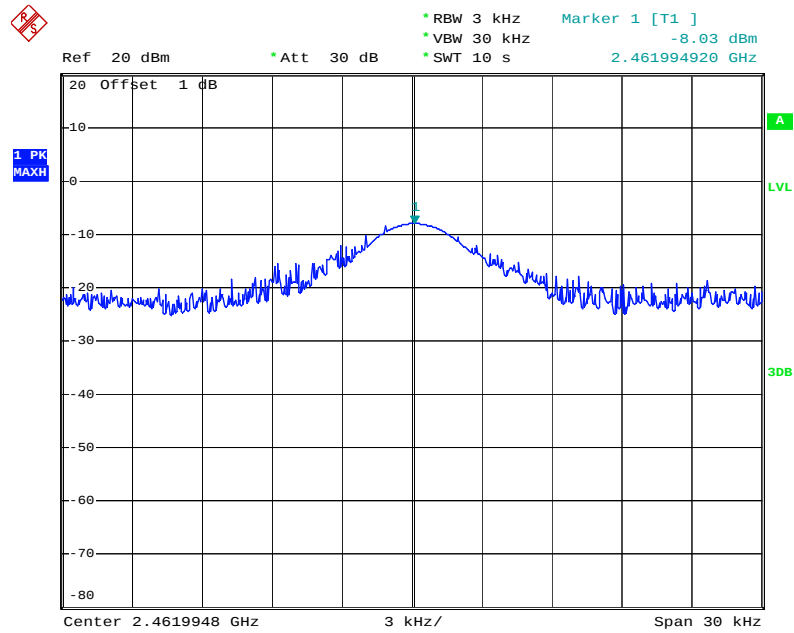


Date: 19.NOV.2009 13:45:46

Power Density Plot on Configuration IEEE 802.11g / 2412 MHz

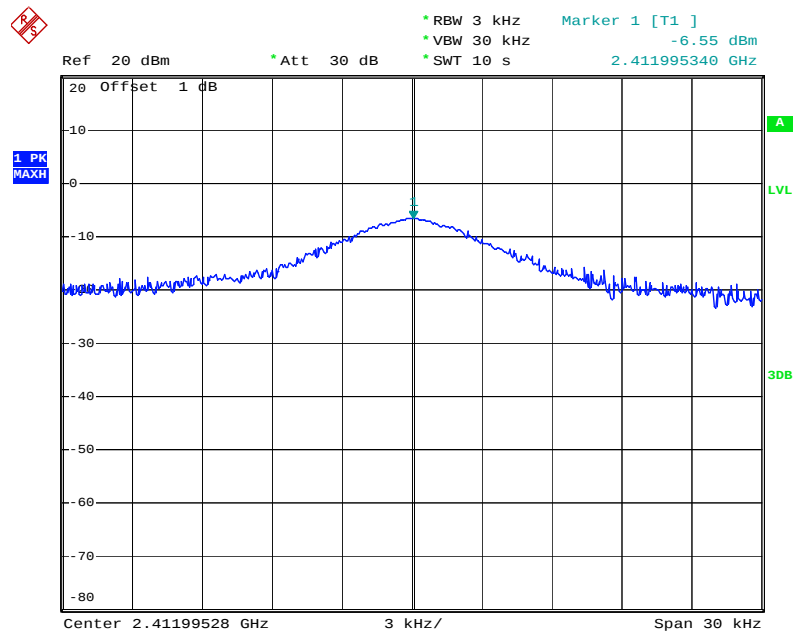


Date: 19.NOV.2009 13:40:26

Power Density Plot on Configuration IEEE 802.11g / 2437 MHz

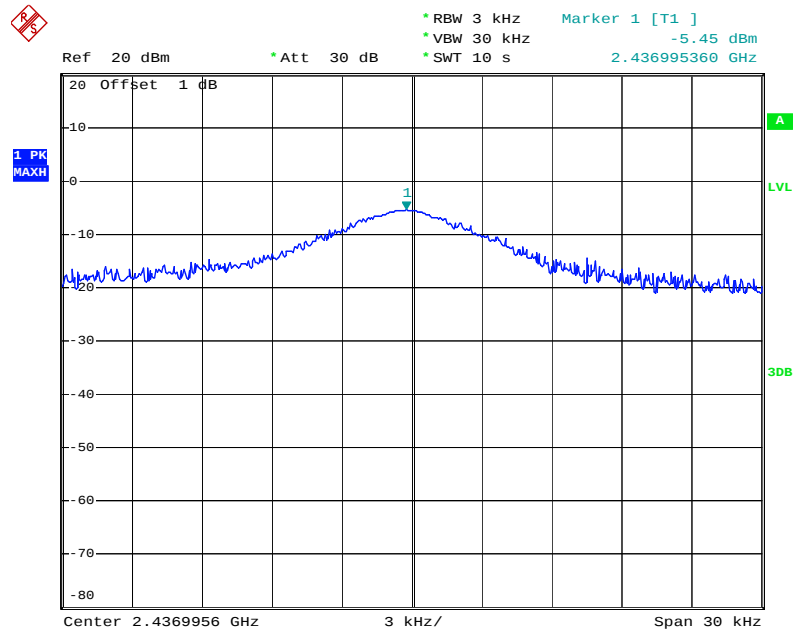

Date: 19.NOV.2009 13:39:01

Power Density Plot on Configuration IEEE 802.11g / 2462 MHz

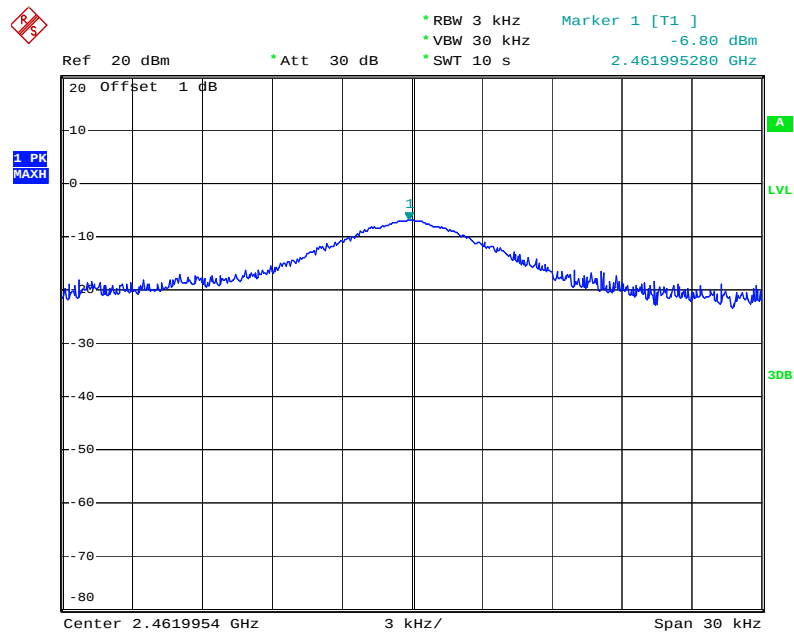

Date: 19.NOV.2009 13:37:43

4.4. 6dB Spectrum Bandwidth Measurement

4.4.1. Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the Spectrum Analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RB	100 kHz
VB	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were used.
3. Measured the spectrum width with power higher than 6dB below carrier.
4. Measuring multiple antennas, the connector is required to link with spectrum analyzer through a combiner.

4.4.4. Test Setup Layout

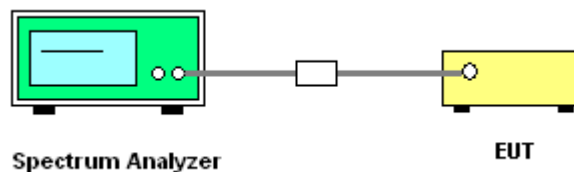

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of 6dB Spectrum Bandwidth

<For Antenna A>

Temperature	24.3°C	Humidity	58%
Test Engineer	Sam Chen	Configurations	IEEE 802.11n / Antenna A

Configuration IEEE 802.11n MCS0 20MHz

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	17.04	17.60	500	Complies
6	2437 MHz	16.92	17.60	500	Complies
11	2462 MHz	17.04	17.56	500	Complies

Configuration IEEE 802.11n MCS0 40MHz

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
3	2422 MHz	35.20	35.92	500	Complies
6	2437 MHz	35.20	36.00	500	Complies
9	2452 MHz	35.20	36.00	500	Complies

Temperature	24.3°C	Humidity	58%
Test Engineer	Sam Chen	Configurations	IEEE 802.11b/g / Antenna A

Configuration IEEE 802.11b

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	11.08	14.48	500	Complies
6	2437 MHz	10.20	14.52	500	Complies
11	2462 MHz	10.16	14.48	500	Complies

Configuration IEEE 802.11g

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	16.36	16.44	500	Complies
6	2437 MHz	16.36	16.44	500	Complies
11	2462 MHz	16.32	16.44	500	Complies

<For Antenna B>

Temperature	24.3°C	Humidity	58%
Test Engineer	Sam Chen	Configurations	IEEE 802.11n / Antenna B

Configuration IEEE 802.11n MCS0 20MHz

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	17.12	17.56	500	Complies
6	2437 MHz	17.04	17.60	500	Complies
11	2462 MHz	17.04	17.60	500	Complies

Configuration IEEE 802.11n MCS0 40MHz

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
3	2422 MHz	35.20	35.92	500	Complies
6	2437 MHz	35.04	36.00	500	Complies
9	2452 MHz	35.12	36.00	500	Complies

Temperature	24.3°C	Humidity	58%
Test Engineer	Sam Chen	Configurations	IEEE 802.11b/g / Antenna B

Configuration IEEE 802.11b


Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	12.08	14.63	500	Complies
6	2437 MHz	10.12	14.52	500	Complies
11	2462 MHz	10.12	14.40	500	Complies

Configuration IEEE 802.11g

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	16.32	16.48	500	Complies
6	2437 MHz	16.32	16.44	500	Complies
11	2462 MHz	16.32	16.44	500	Complies


<For Antenna A>

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz / 2412 MHz

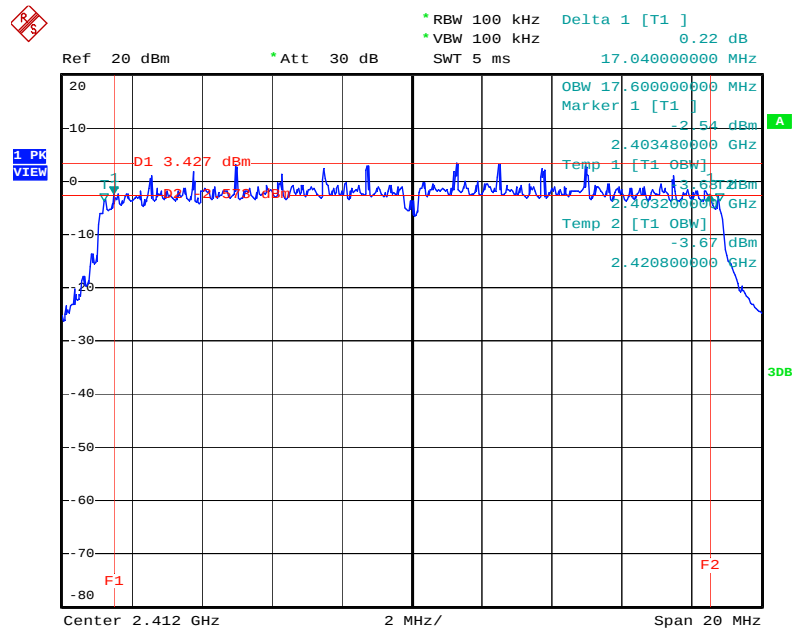


Date: 19.NOV.2009 12:35:25

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz / 2437 MHz

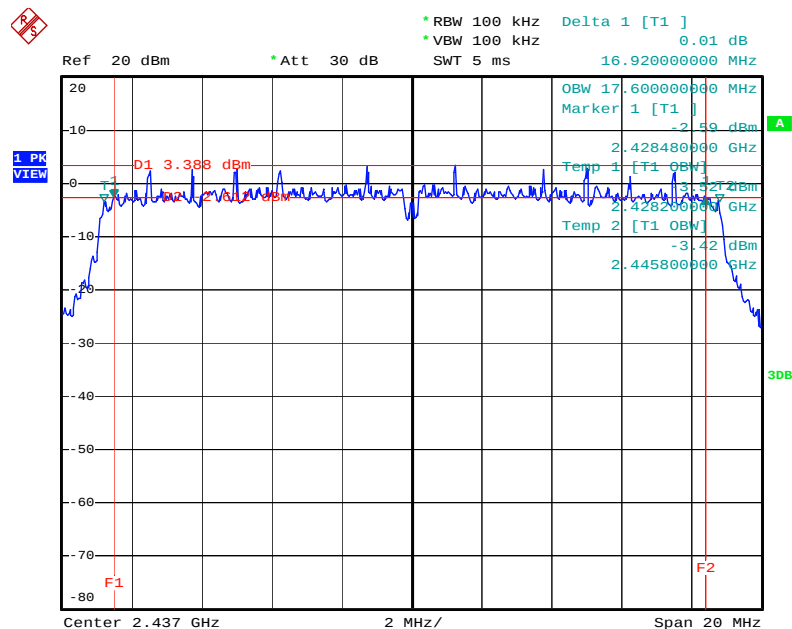


Date: 19.NOV.2009 12:38:38

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz / 2462 MHz

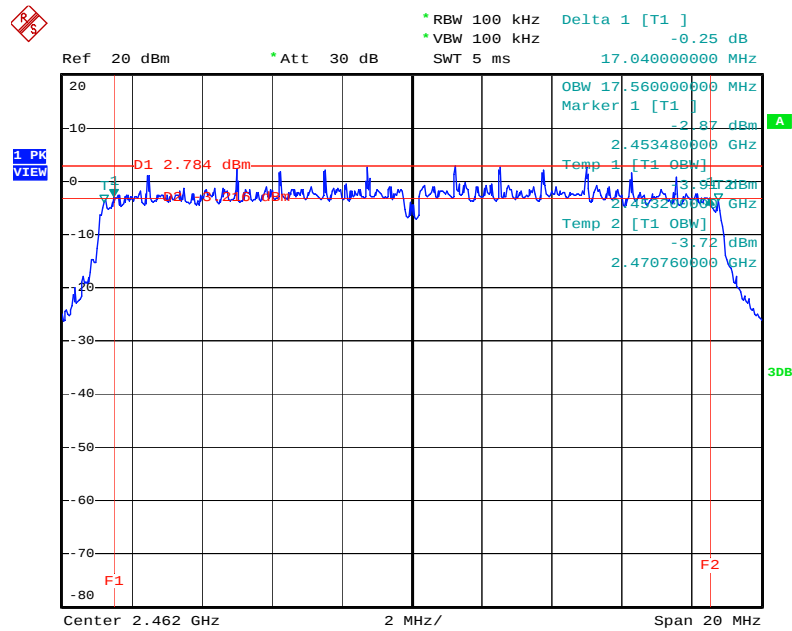


Date: 19.NOV.2009 12:40:33

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 40MHz / 2422 MHz

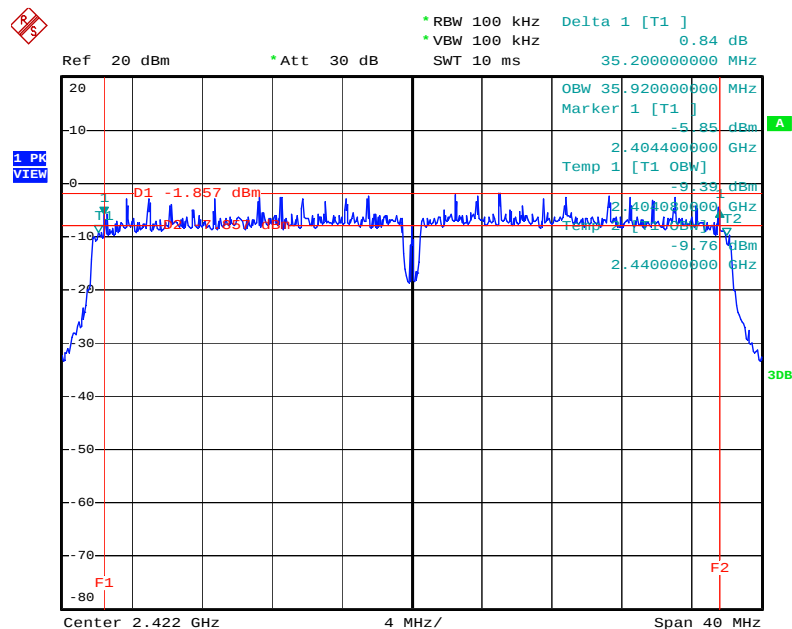


Date: 19.NOV.2009 11:11:03

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 40MHz / 2437 MHz

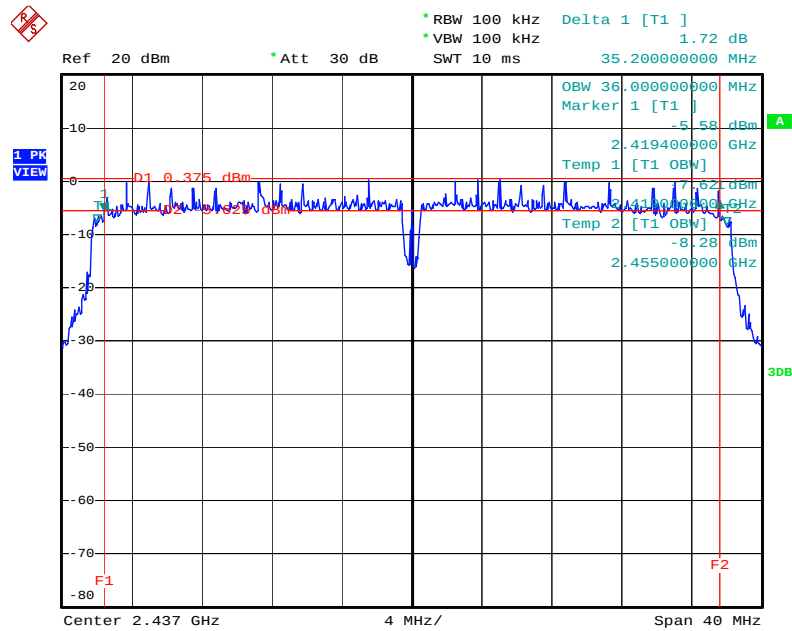


Date: 19.NOV.2009 11:08:41

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 40MHz / 2452 MHz

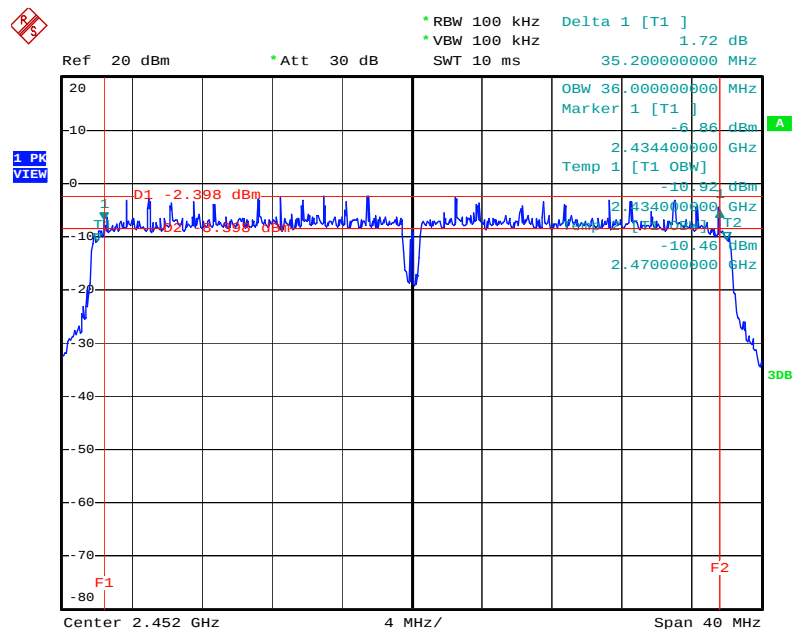


Date: 19.NOV.2009 11:06:45

6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2412 MHz

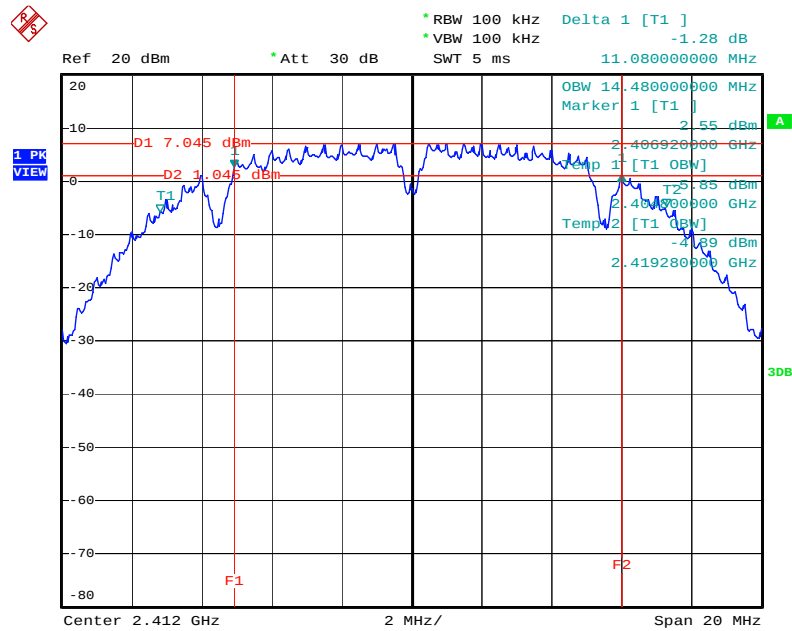


Date: 19.NOV.2009 12:52:38

6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2437 MHz

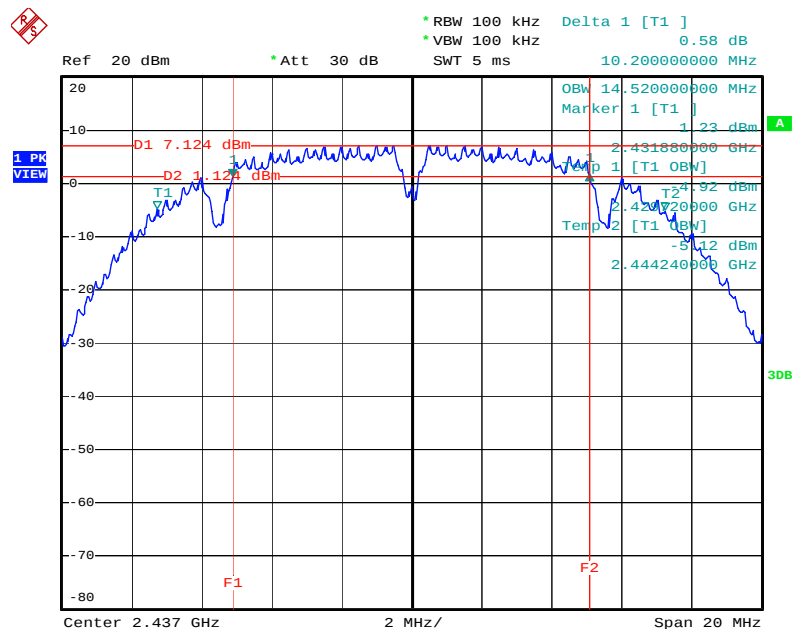


Date: 19.NOV.2009 12:55:04

6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2462 MHz

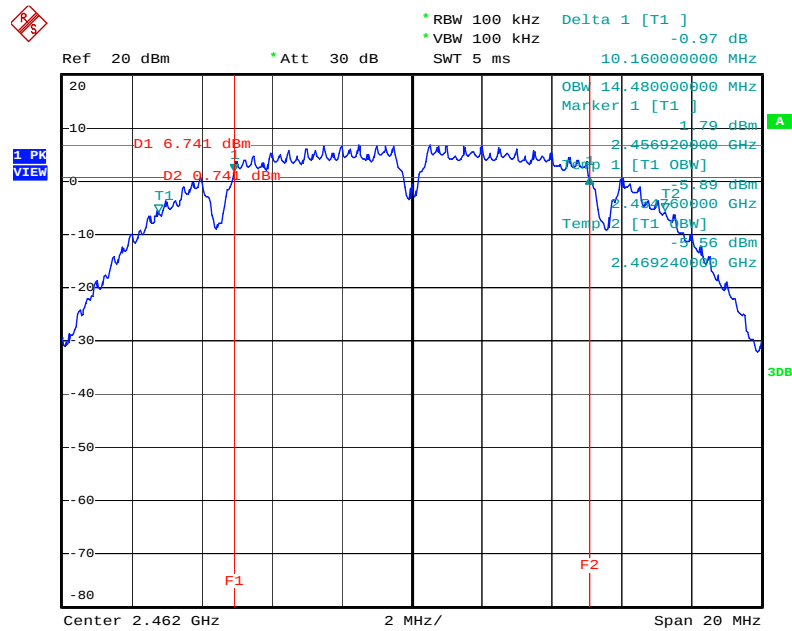

Date: 19.NOV.2009 12:57:57


6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2412 MHz

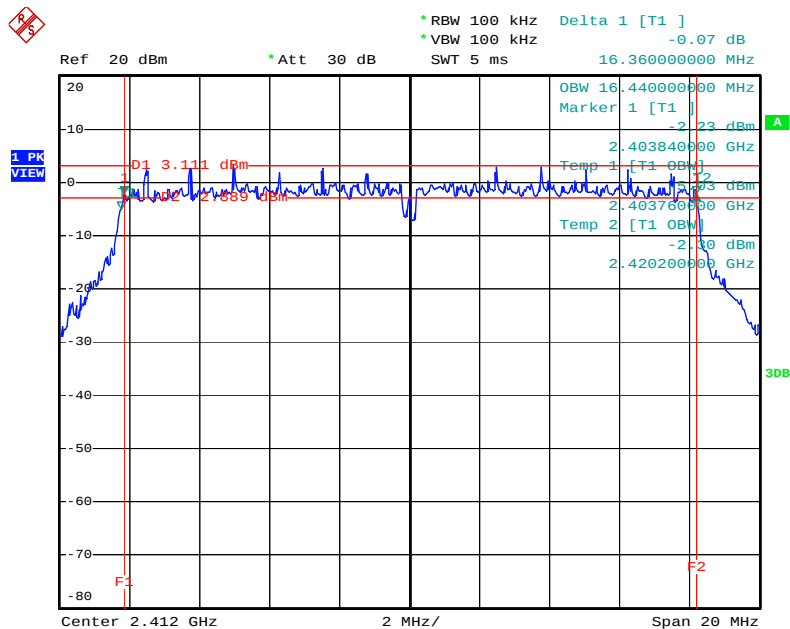

Date: 19.NOV.2009 12:47:36


1

6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2437 MHz

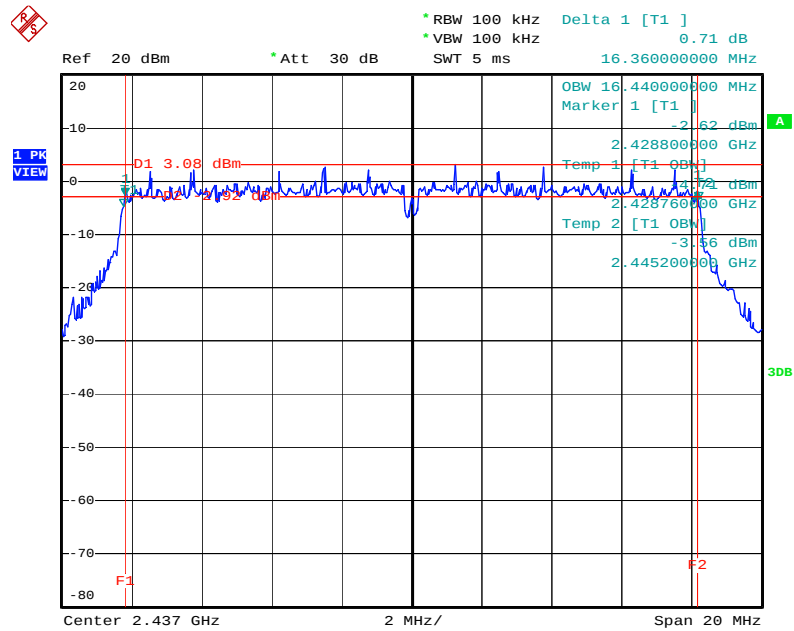

Date: 19.NOV.2009 12:44:45


6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2462 MHz

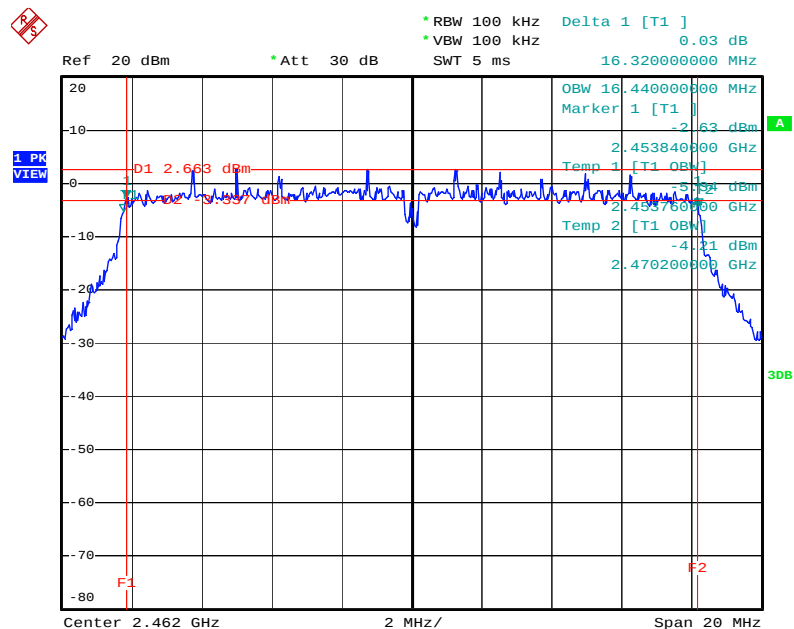

Date: 19.NOV.2009 12:42:47


<For Antenna B>

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz / 2412 MHz

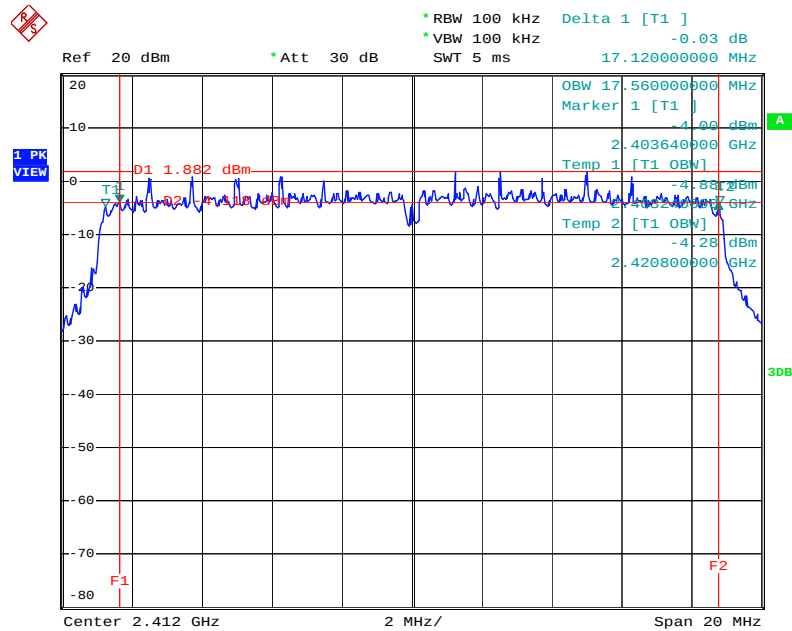


Date: 19.NOV.2009 13:31:36

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz / 2437 MHz

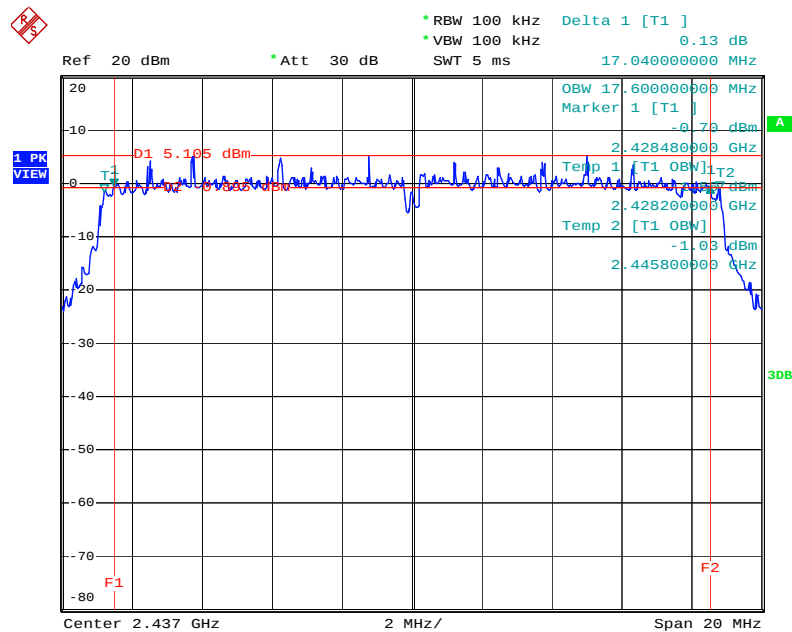


Date: 19.NOV.2009 13:33:10

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 20MHz / 2462 MHz

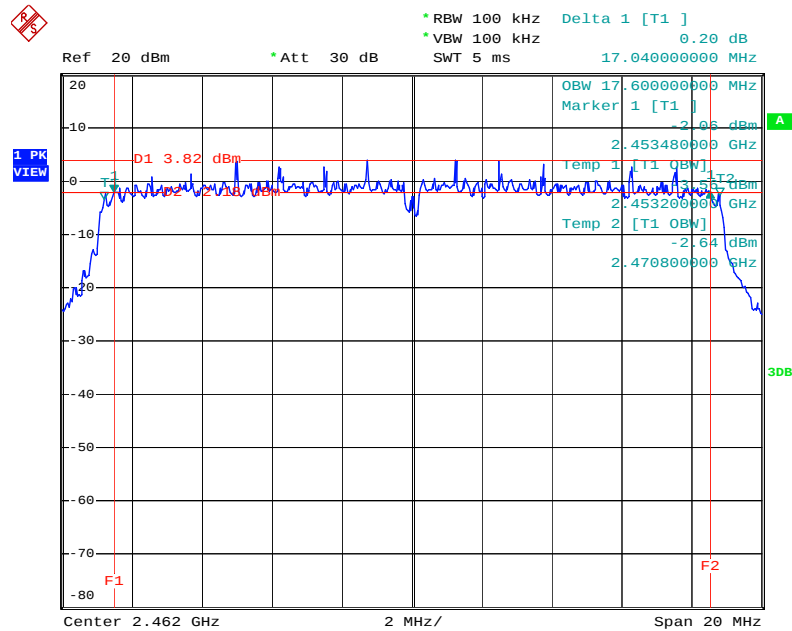


Date: 19.NOV.2009 13:34:23

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 40MHz / 2422 MHz

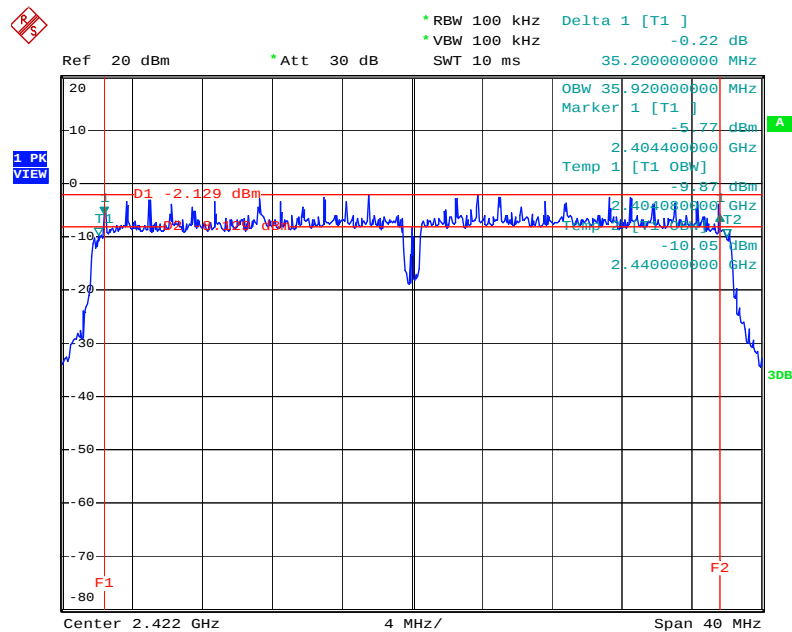


Date: 19.NOV.2009 13:29:52

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 40MHz / 2437 MHz

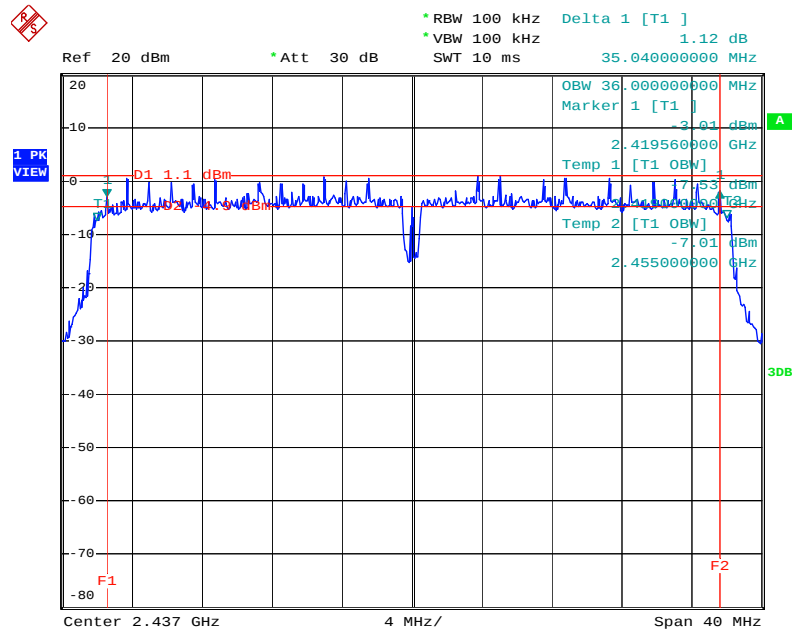


Date: 19.NOV.2009 13:27:44

6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 40MHz / 2452 MHz

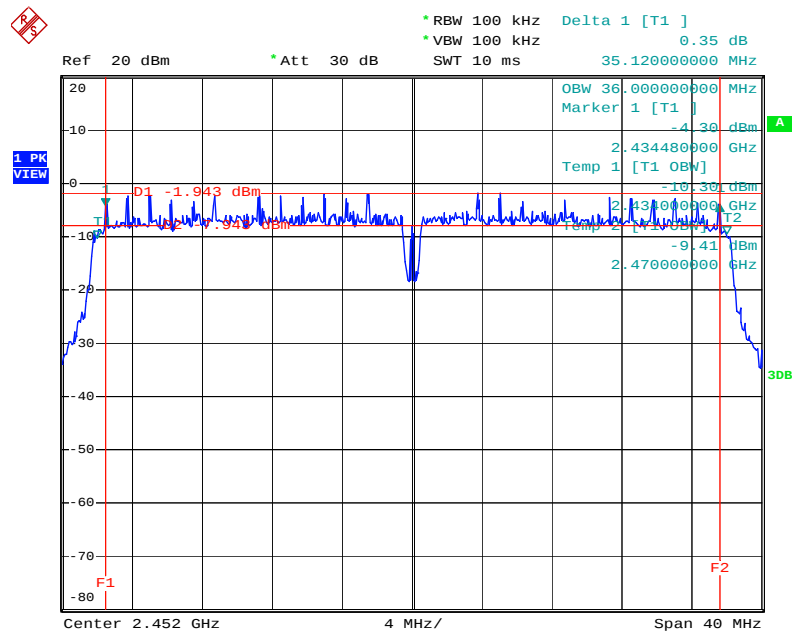


Date: 19.NOV.2009 13:25:18

6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2412 MHz

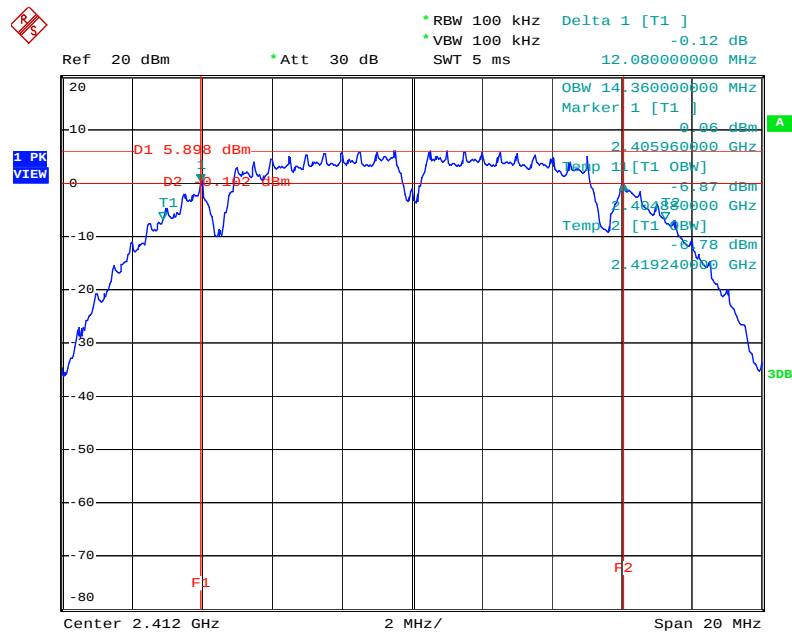


Date: 19.NOV.2009 13:43:19

6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2437 MHz

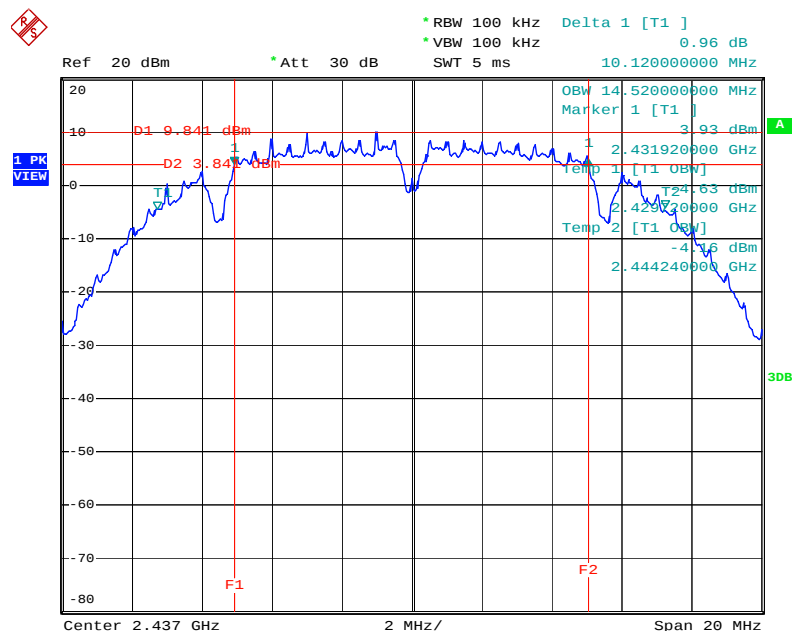


Date: 19.NOV.2009 13:43:52

6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2462 MHz

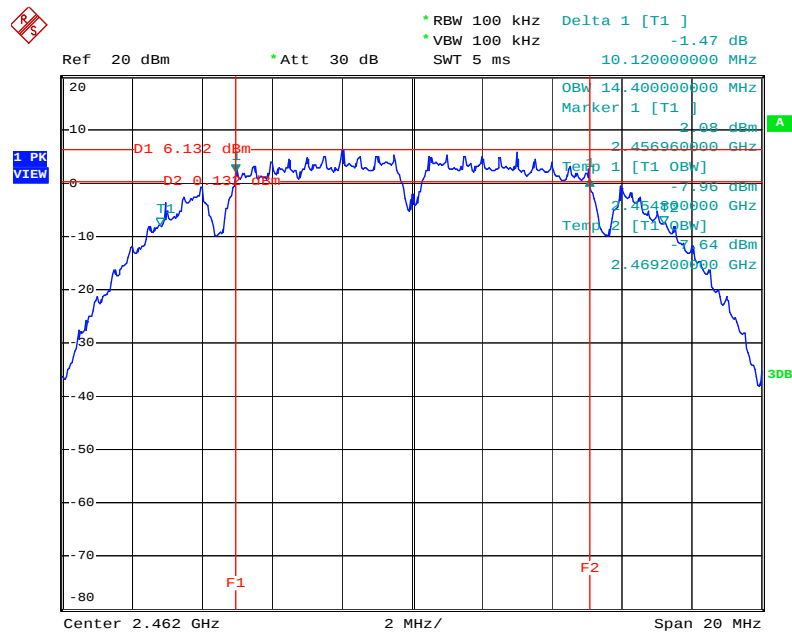


Date: 19.NOV.2009 13:46:33

6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2412 MHz

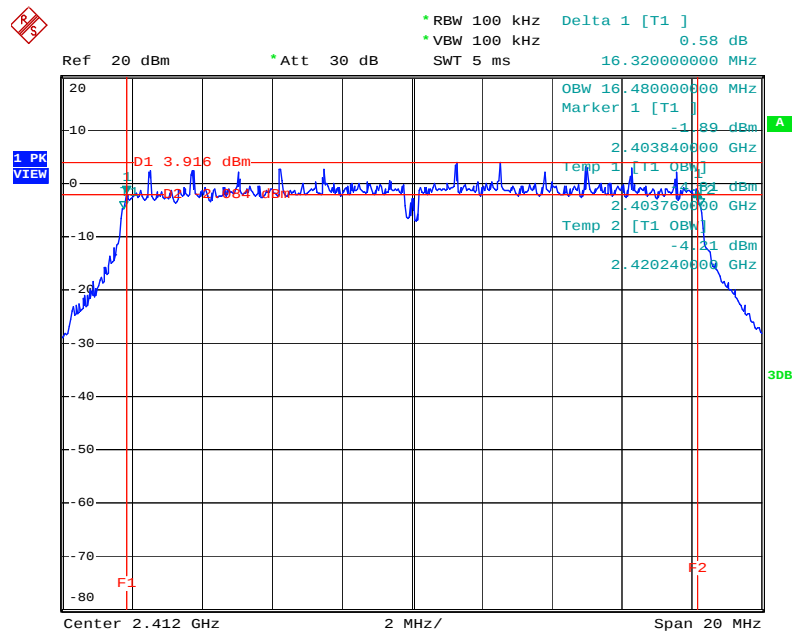


Date: 19.NOV.2009 13:39:40

6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2437 MHz

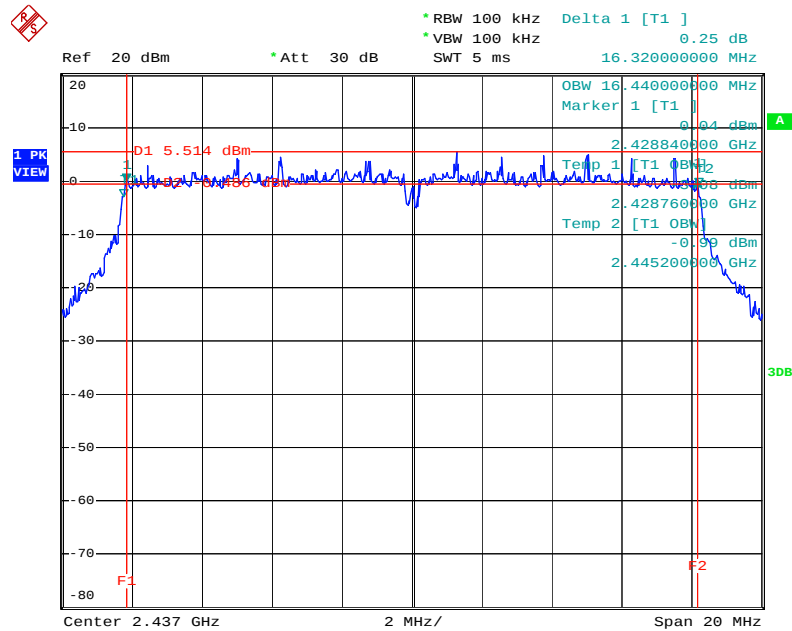

Date: 19.NOV.2009 13:38:16

6 dB Bandwidth Plot on Configuration IEEE 802.11g / 2462 MHz

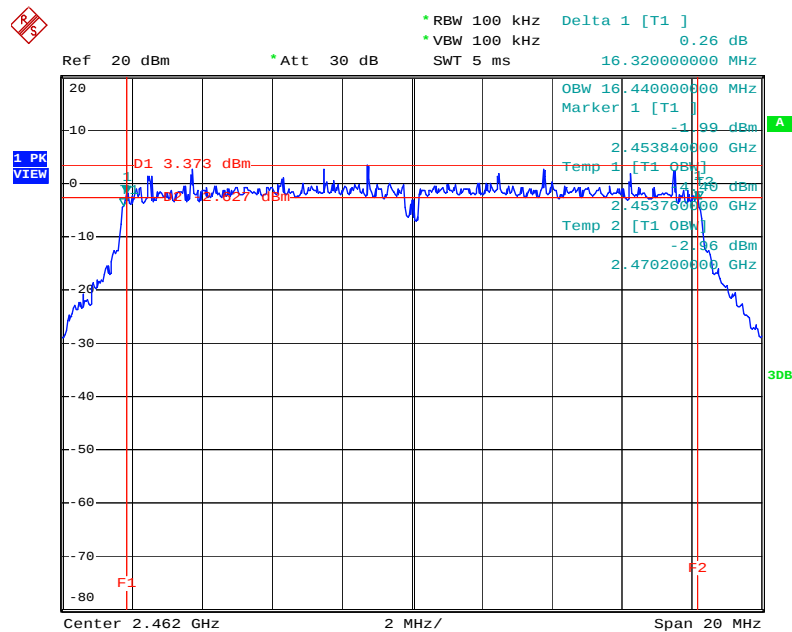

Date: 19.NOV.2009 13:36:53

4.5. Radiated Emissions Measurement

4.5.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1MHz / 1MHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 m to 4 m) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.5.4. Test Setup Layout

For radiated emissions below 30MHz

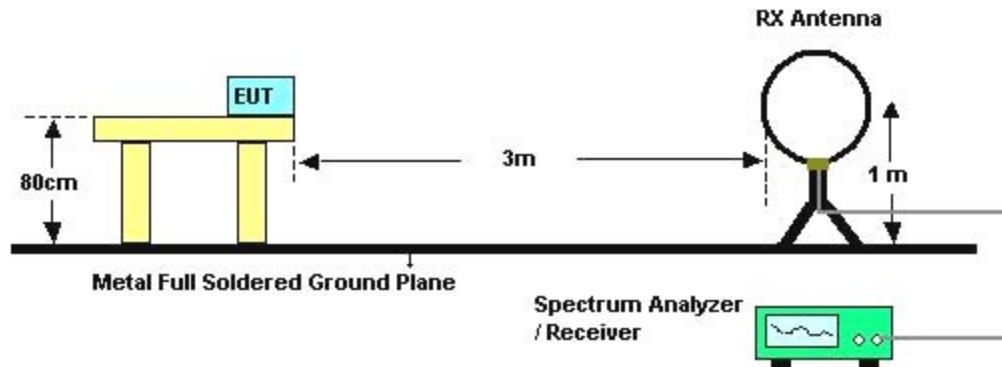

For radiated emissions above 30MHz

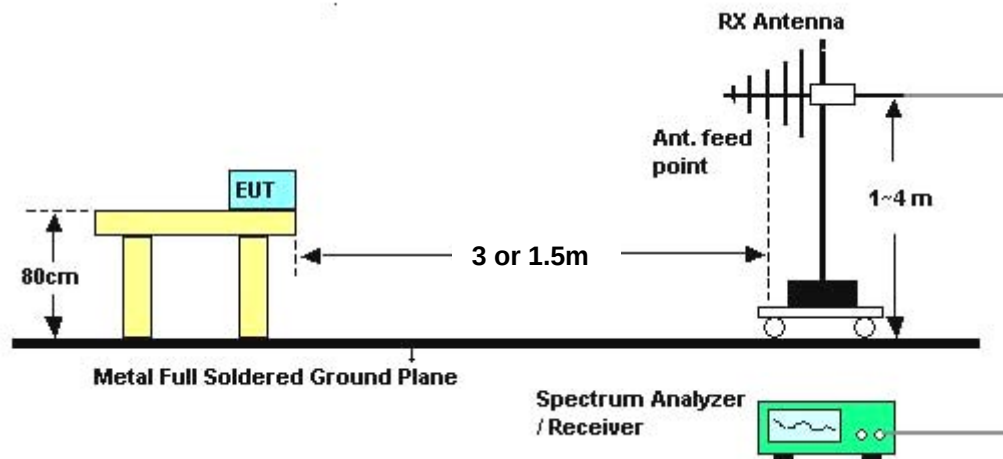

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.

Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1.5m]})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	23°C	Humidity	56%
Test Engineer	Allen Liu	Configurations	Normal Link

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);


Limit line = specific limits (dBuV) + distance extrapolation factor.

4.5.8. Results of Radiated Emissions (30MHz~1GHz)

<For Antenna A>


Temperature	23°C	Humidity	56%
Test Engineer	Allen Liu	Configurations	Normal Link / Antenna A

Horizontal

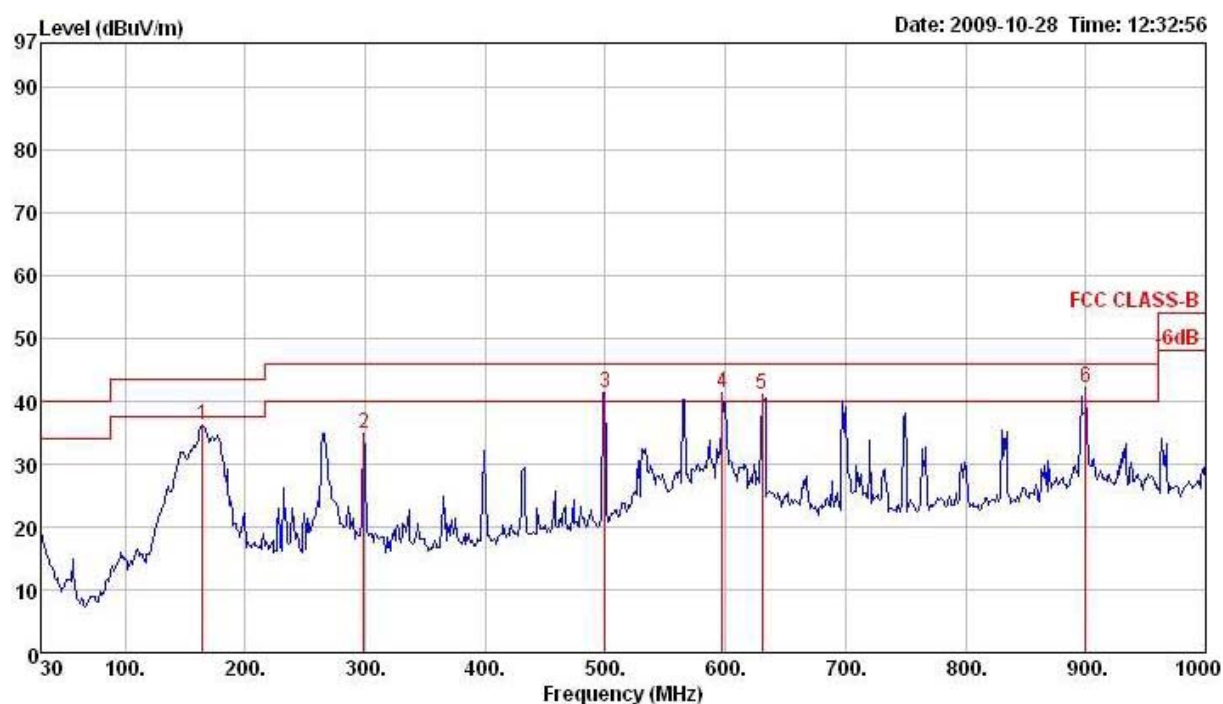

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	164.83	36.23	43.50	-7.27	49.59	1.52	27.27	12.39	0	100	Peak	HORIZONTAL
2	298.69	34.97	46.00	-11.03	46.42	2.10	26.90	13.35	0	100	Peak	HORIZONTAL
3	499.48	41.28	46.00	-4.72	49.06	2.70	28.09	17.61	0	100	Peak	HORIZONTAL
4	597.45	41.21	46.00	-4.79	47.68	2.89	28.10	18.74	0	100	Peak	HORIZONTAL
5	630.43	41.20	46.00	-4.80	47.32	3.08	28.07	18.87	0	100	Peak	HORIZONTAL
6 p	900.09	42.08	46.00	-3.92	45.35	3.60	27.40	20.53	0	100	Peak	HORIZONTAL

Vertical

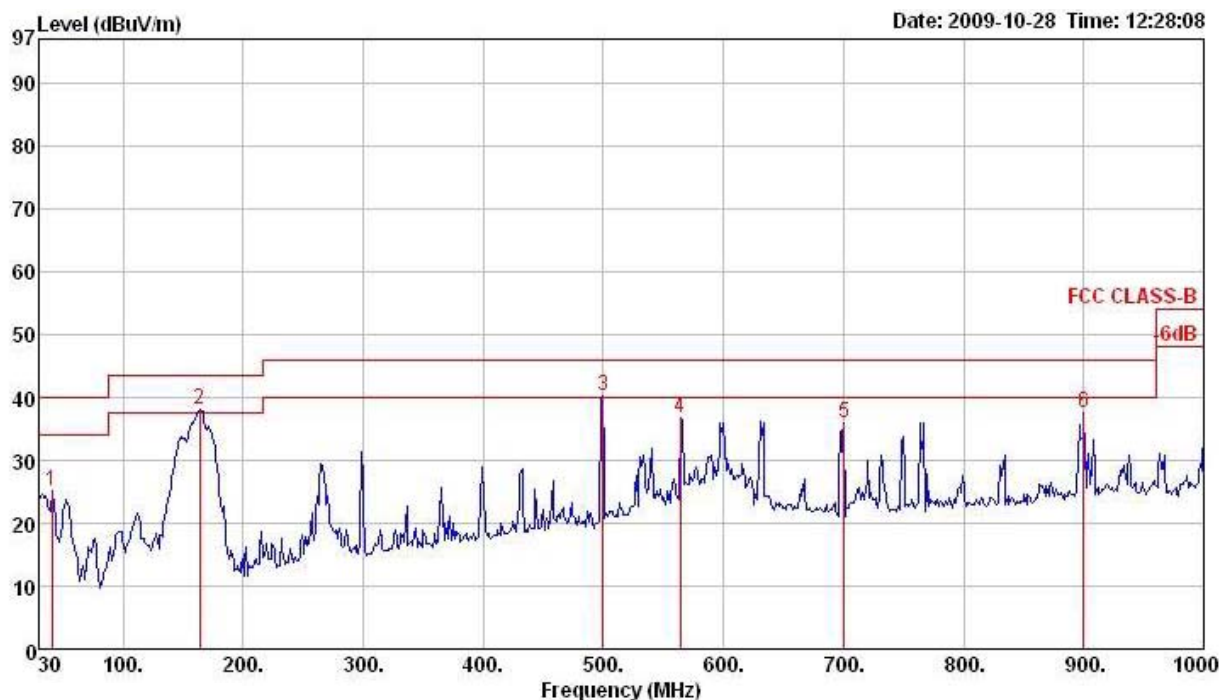

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	40.67	25.16	40.00	-14.84	39.71	0.70	27.80	12.55	0	400	Peak	VERTICAL
2	163.86	38.00	43.50	-5.50	51.44	1.52	27.28	12.32	0	400	Peak	VERTICAL
3	499.48	40.32	46.00	-5.68	48.10	2.70	28.09	17.61	0	400	Peak	VERTICAL
4	564.47	36.67	46.00	-9.33	43.58	2.83	28.10	18.36	0	400	Peak	VERTICAL
5	700.27	36.03	46.00	-9.97	41.63	3.30	27.99	19.09	0	400	Peak	VERTICAL
6	900.09	37.54	46.00	-8.46	40.81	3.60	27.40	20.53	0	400	Peak	VERTICAL

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.


Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

<For Antenna B>


Temperature	23°C	Humidity	56%
Test Engineer	Allen Liu	Configurations	Normal Link / Antenna B

Horizontal

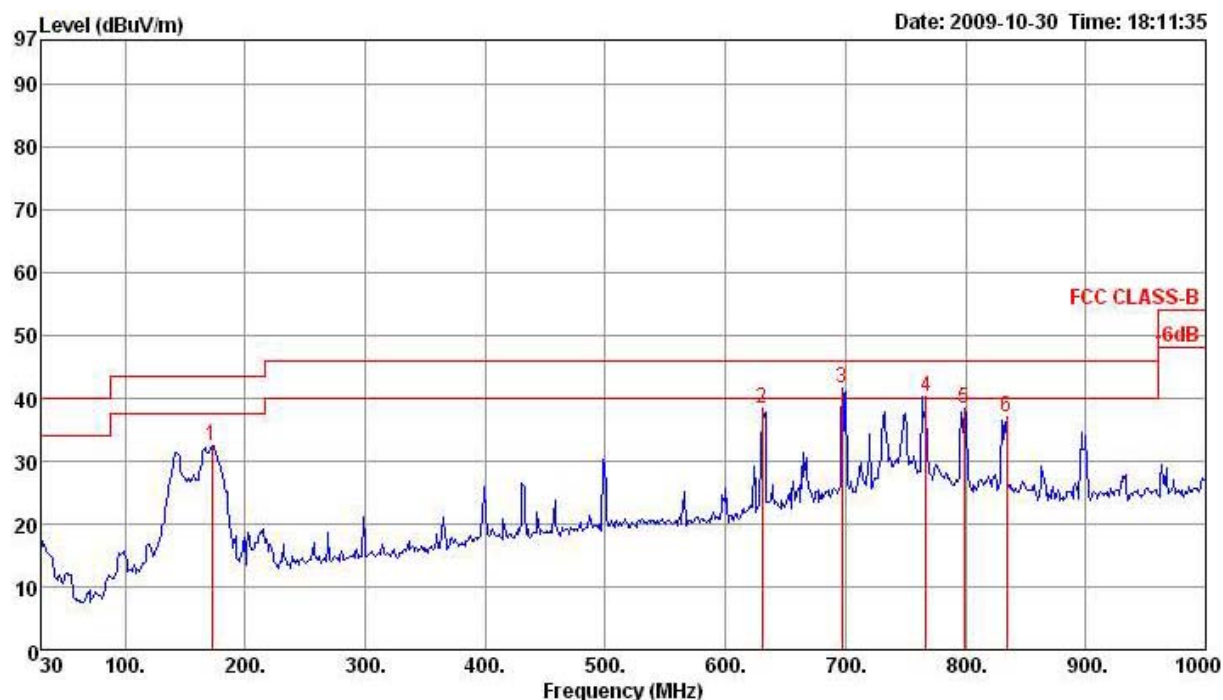

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	172.59	32.49	43.50	-11.01	45.19	1.56	27.23	12.97	0	100	Peak	HORIZONTAL
2	630.43	38.50	46.00	-7.50	44.62	3.08	28.07	18.87	0	100	Peak	HORIZONTAL
3 p	697.36	41.69	46.00	-4.31	47.30	3.31	28.00	19.08	0	100	Peak	HORIZONTAL
4 i	767.20	40.25	46.00	-5.75	45.00	3.43	27.73	19.55	0	100	Peak	HORIZONTAL
5	799.21	38.30	46.00	-7.70	42.85	3.30	27.61	19.76	0	100	Peak	HORIZONTAL
6	834.13	37.12	46.00	-8.88	41.25	3.37	27.53	20.03	0	100	Peak	HORIZONTAL

Vertical

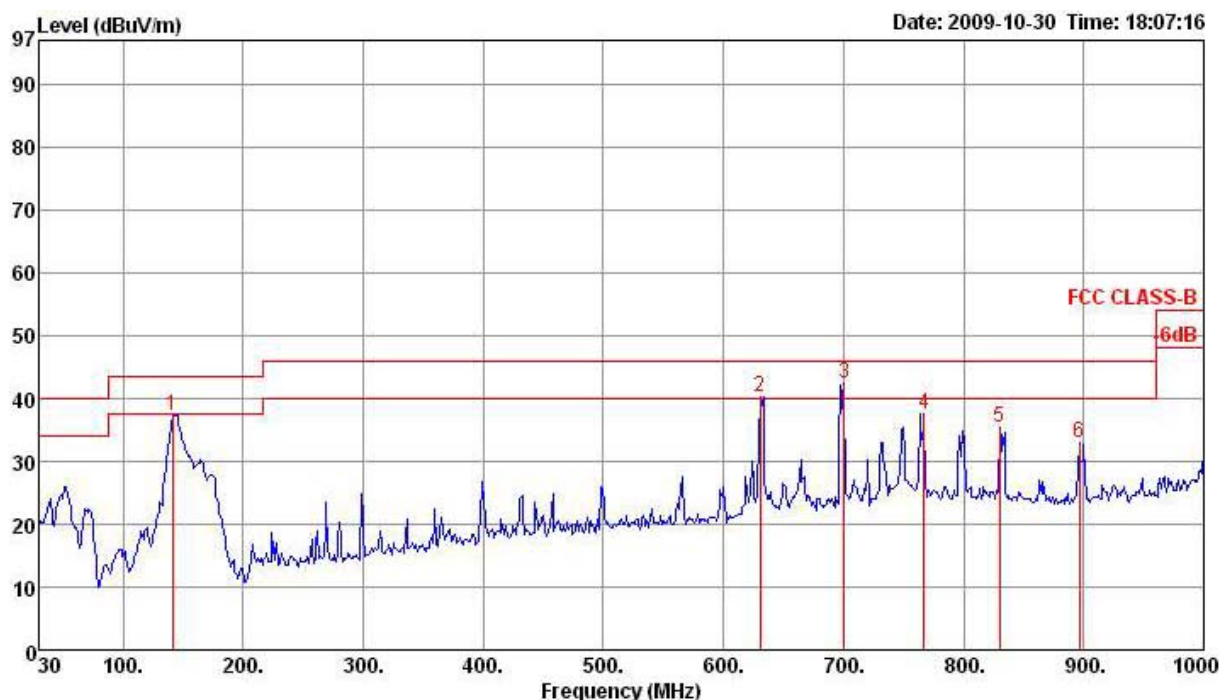

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	141.55	37.35	43.50	-6.15	51.07	1.41	27.39	12.26	0	400	Peak	VERTICAL
2	630.43	40.21	46.00	-5.79	46.33	3.08	28.07	18.87	0	400	Peak	VERTICAL
3	700.27	42.36	46.00	-3.64	47.96	3.30	27.99	19.09	0	400	Peak	VERTICAL
4	767.20	37.69	46.00	-8.31	42.44	3.43	27.73	19.55	0	400	Peak	VERTICAL
5	830.25	35.50	46.00	-10.50	39.68	3.36	27.54	20.00	0	400	Peak	VERTICAL
6	896.21	33.00	46.00	-13.00	36.33	3.58	27.41	20.50	0	400	Peak	VERTICAL

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).


Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.5.9. Results for Radiated Emissions (1GHz~10th Harmonic)

<For Antenna A>


Temperature	23°C	Humidity	56%
Test Engineer	Allen Liu	Configurations	IEEE 802.11n MCS0 20MHz Ch 1 / Antenna A

Horizontal

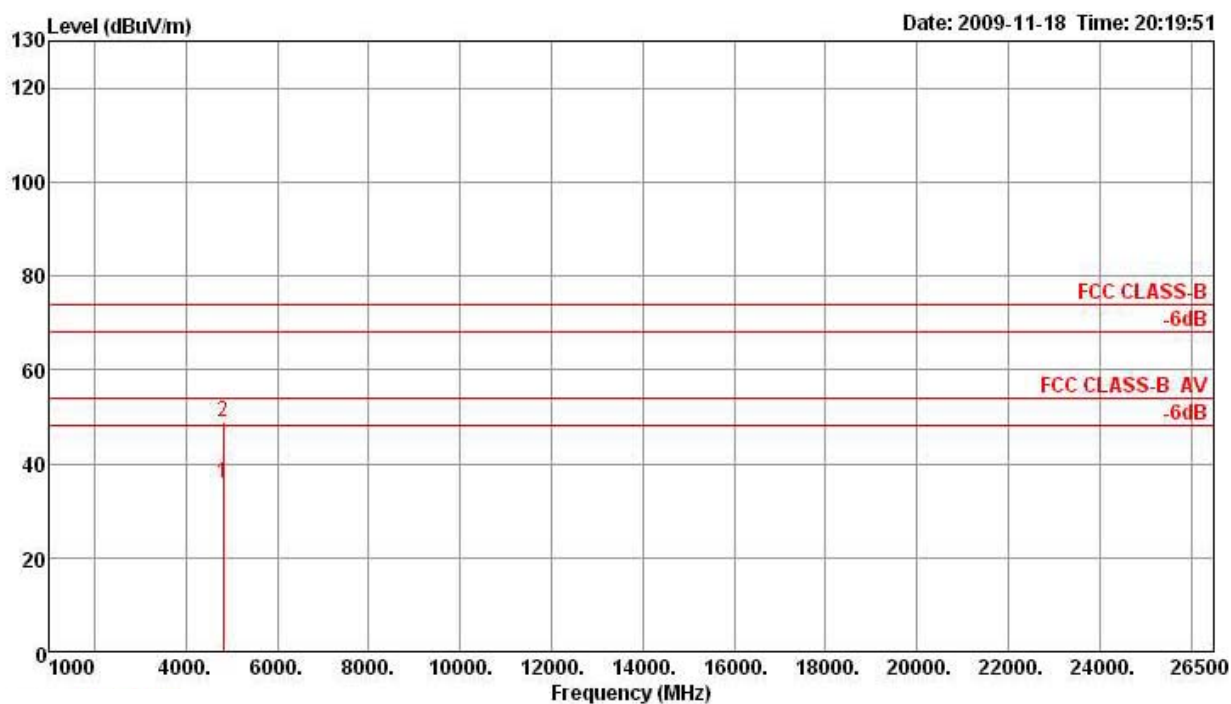

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4824.00	35.97	54.00	-18.03	31.39	6.39	35.20	33.39	210	100	Average	HORIZONTAL
2 p	4824.00	49.04	74.00	-24.96	44.46	6.39	35.20	33.39	210	100	Peak	HORIZONTAL


Vertical

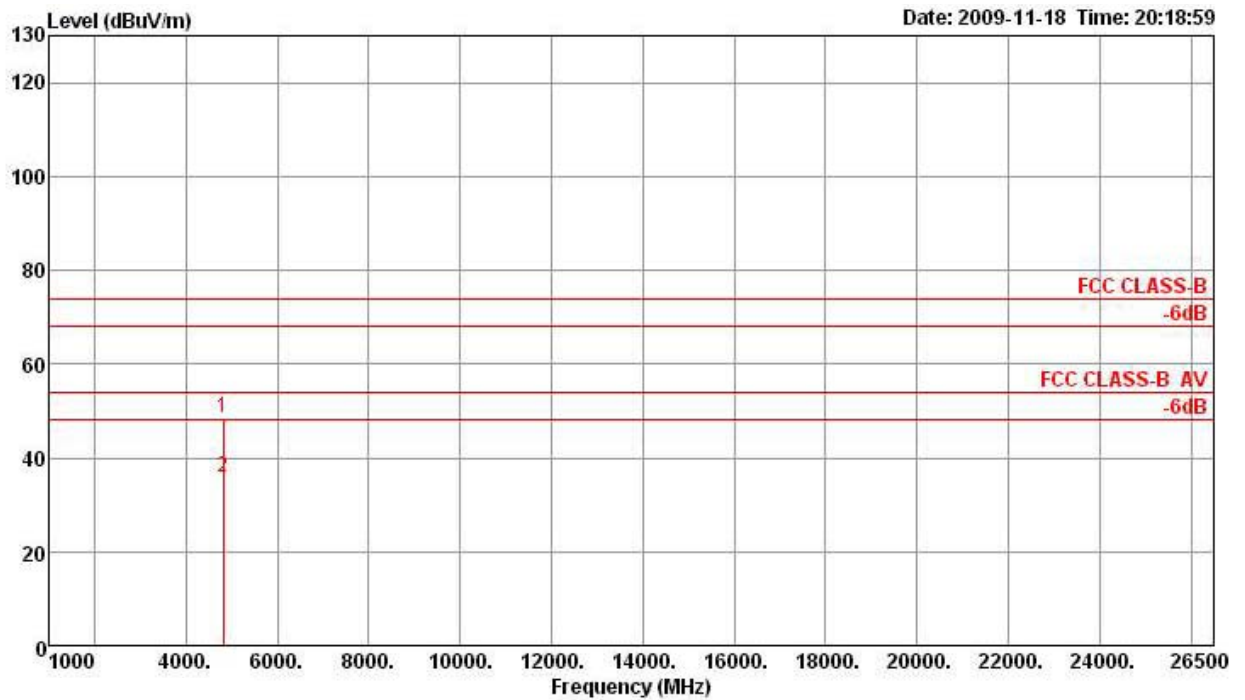

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4823.98	48.70	74.00	-25.30	44.12	6.39	35.20	33.39	88	100	Peak	VERTICAL
2 a	4824.01	35.96	54.00	-18.04	31.38	6.39	35.20	33.39	88	100	Average	VERTICAL


Temperature	23°C	Humidity	56%
Test Engineer	Allen Liu	Configurations	IEEE 802.11n MCS0 20MHz Ch 6 / Antenna A

Horizontal

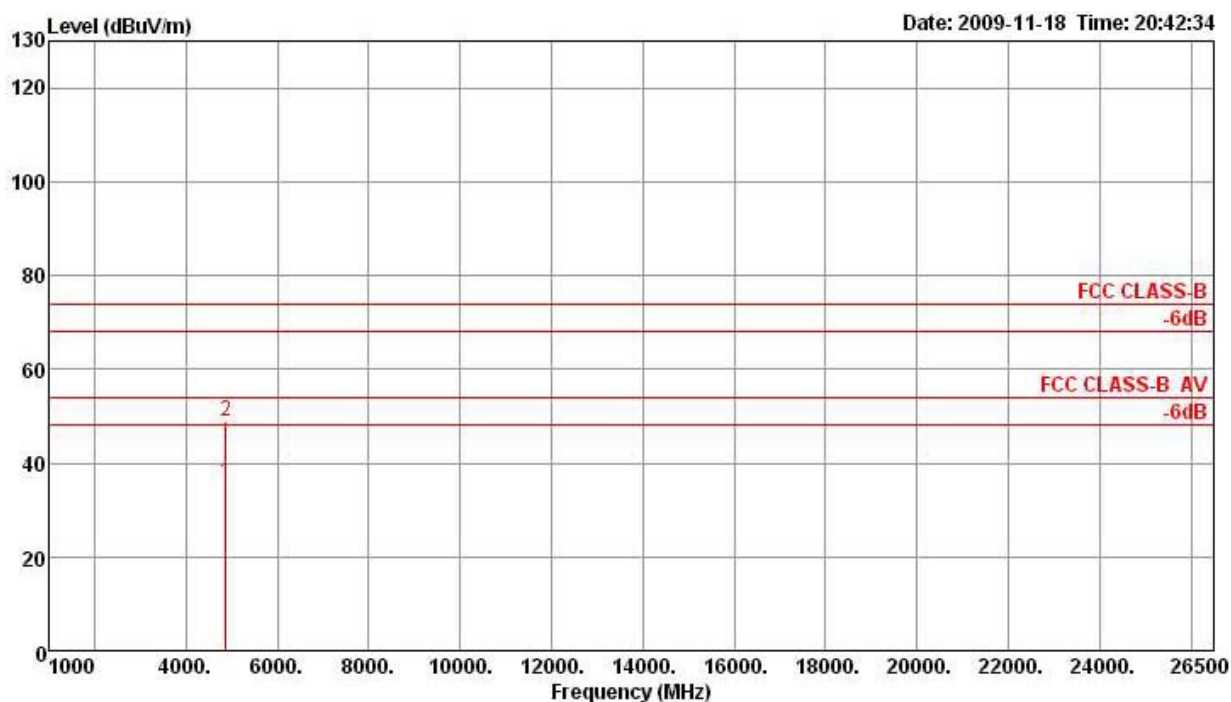

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4873.99	35.73	54.00	-18.27	30.89	6.56	35.20	33.48	171	100	Average	HORIZONTAL
2 p	4874.01	48.89	74.00	-25.11	44.05	6.56	35.20	33.48	171	100	Peak	HORIZONTAL


Vertical

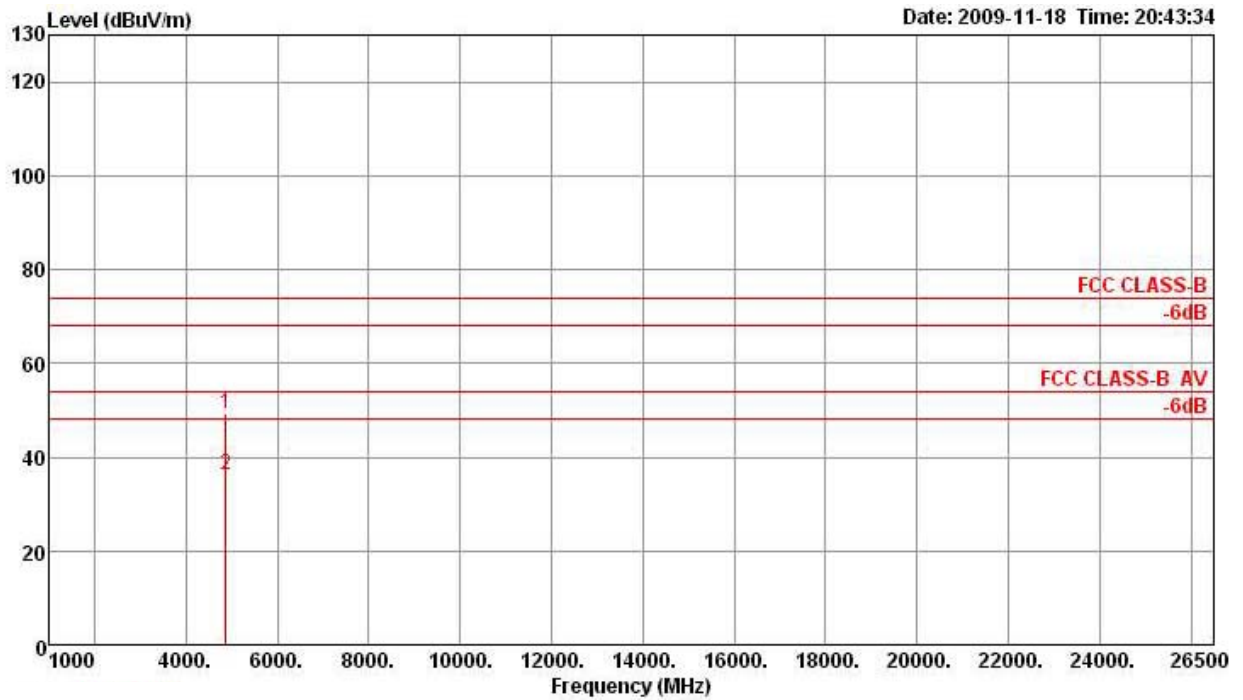

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4873.98	49.07	74.00	-24.93	44.23	6.56	35.20	33.48	351	100	Peak	VERTICAL
2 a	4874.02	36.33	54.00	-17.67	31.49	6.56	35.20	33.48	351	100	Average	VERTICAL


Temperature	23°C	Humidity	56%
Test Engineer	Allen Liu	Configurations	IEEE 802.11n MCS0 20MHz Ch11 / Antenna A

Horizontal

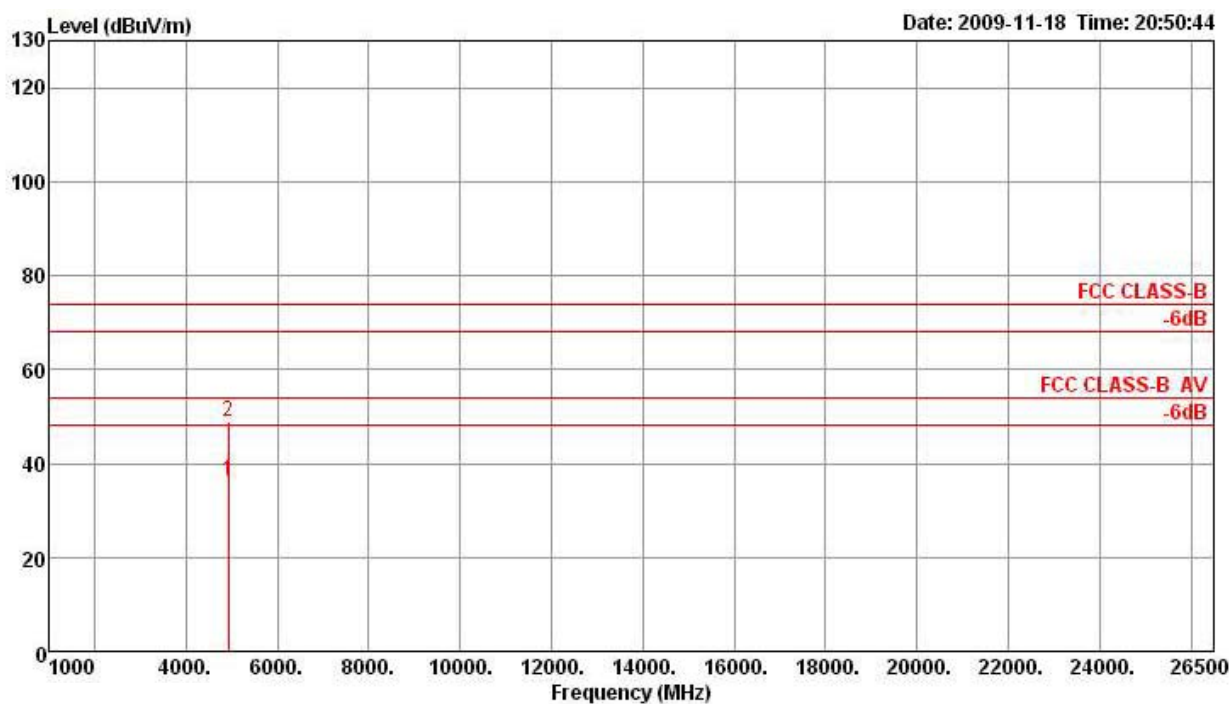

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4923.98	36.37	54.00	-17.63	31.26	6.73	35.20	33.58	52	100	Average	HORIZONTAL
2 p	4924.01	48.82	74.00	-25.18	43.71	6.73	35.20	33.58	52	100	Peak	HORIZONTAL


Vertical

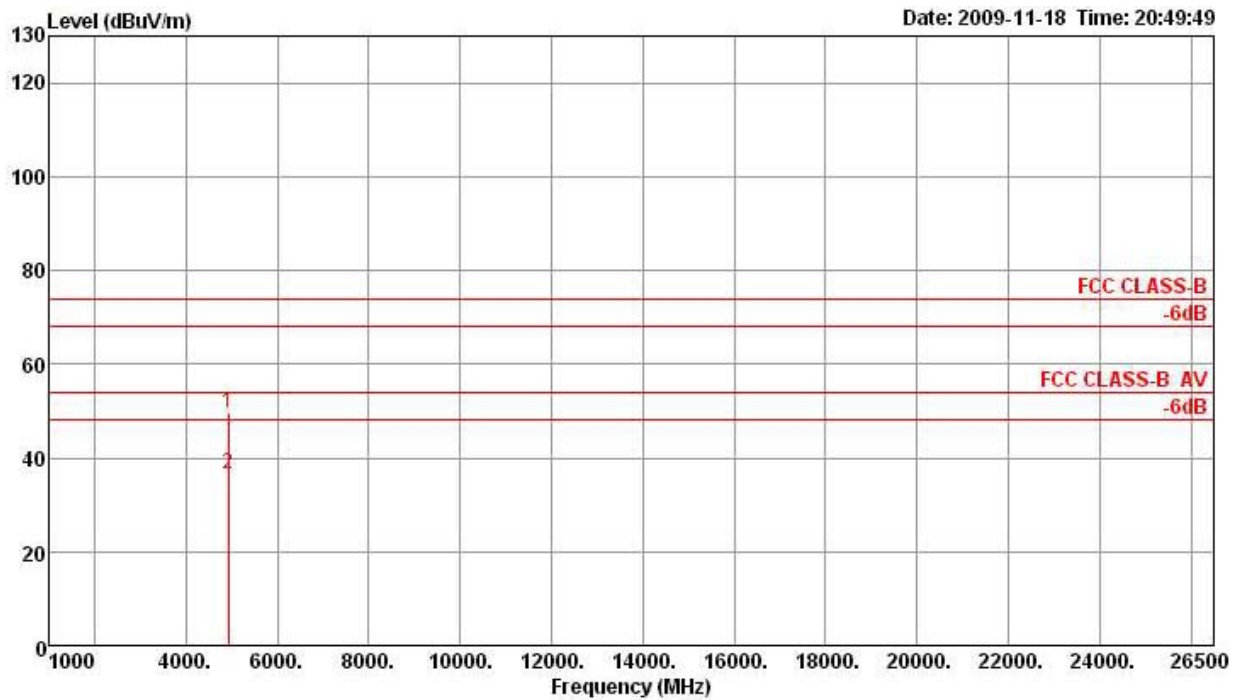

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4924.01	49.43	74.00	-24.57	44.32	6.73	35.20	33.58	212	100	Peak	VERTICAL
2 a	4924.02	36.50	54.00	-17.50	31.39	6.73	35.20	33.58	212	100	Average	VERTICAL


Temperature	23°C	Humidity	56%
Test Engineer	Allen Liu	Configurations	IEEE 802.11n MCS0 40MHz Ch 3 / Antenna A

Horizontal

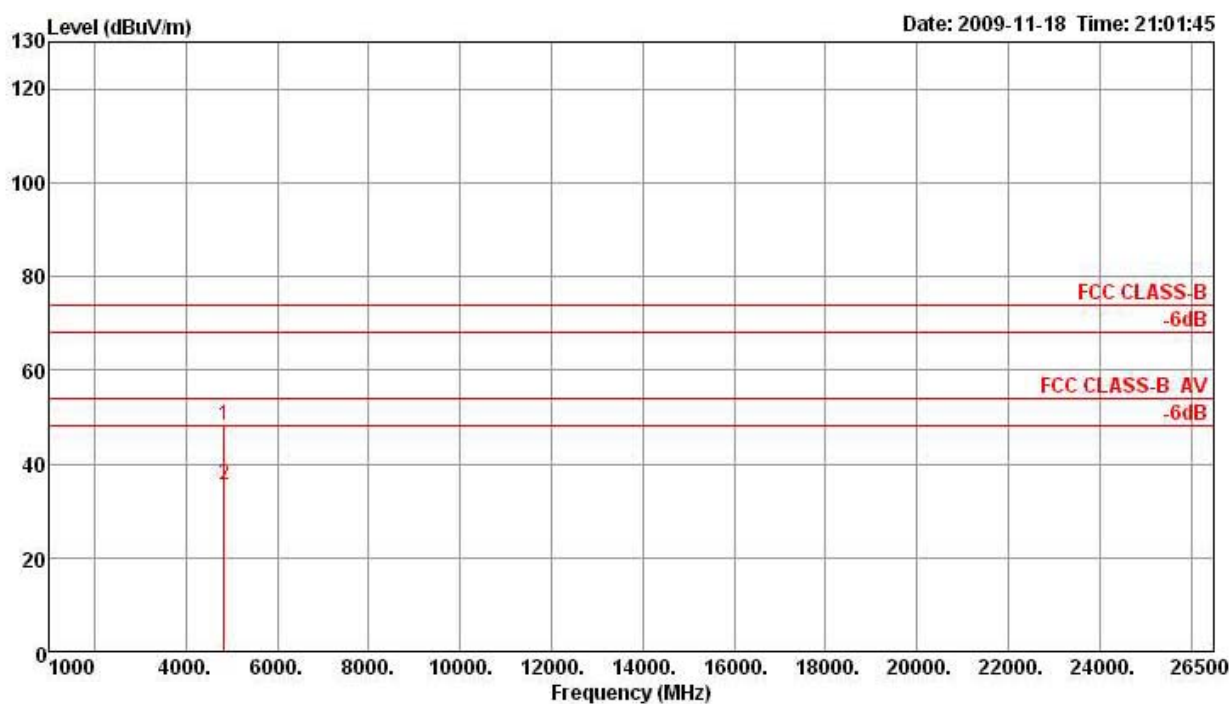

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4844.01	48.11	74.00	-25.89	43.42	6.47	35.20	33.42	10	100	Peak	HORIZONTAL
2 a	4844.02	35.55	54.00	-18.45	30.86	6.47	35.20	33.42	10	100	Average	HORIZONTAL


Vertical

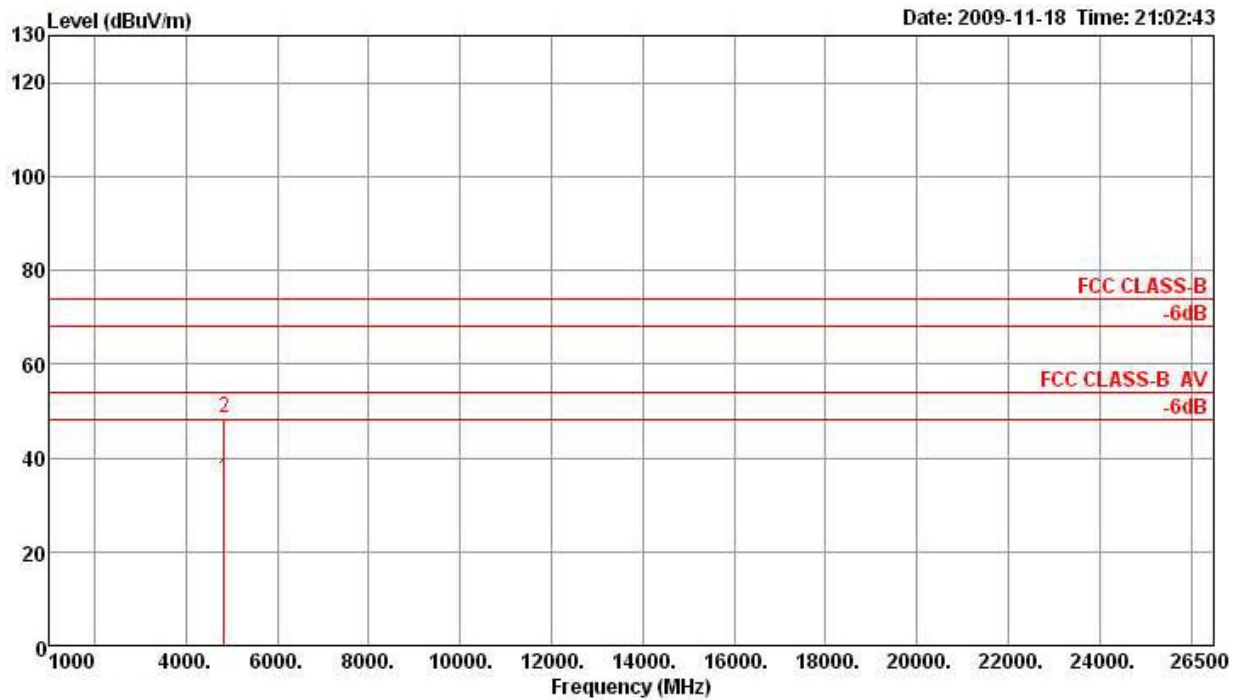

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4843.99	35.51	54.00	-18.49	30.82	6.47	35.20	33.42	114	100	Average	VERTICAL
2 p	4844.01	48.63	74.00	-25.37	43.94	6.47	35.20	33.42	114	100	Peak	VERTICAL


Temperature	23°C	Humidity	56%
Test Engineer	Allen Liu	Configurations	IEEE 802.11n MCS0 40MHz Ch 6 / Antenna A

Horizontal

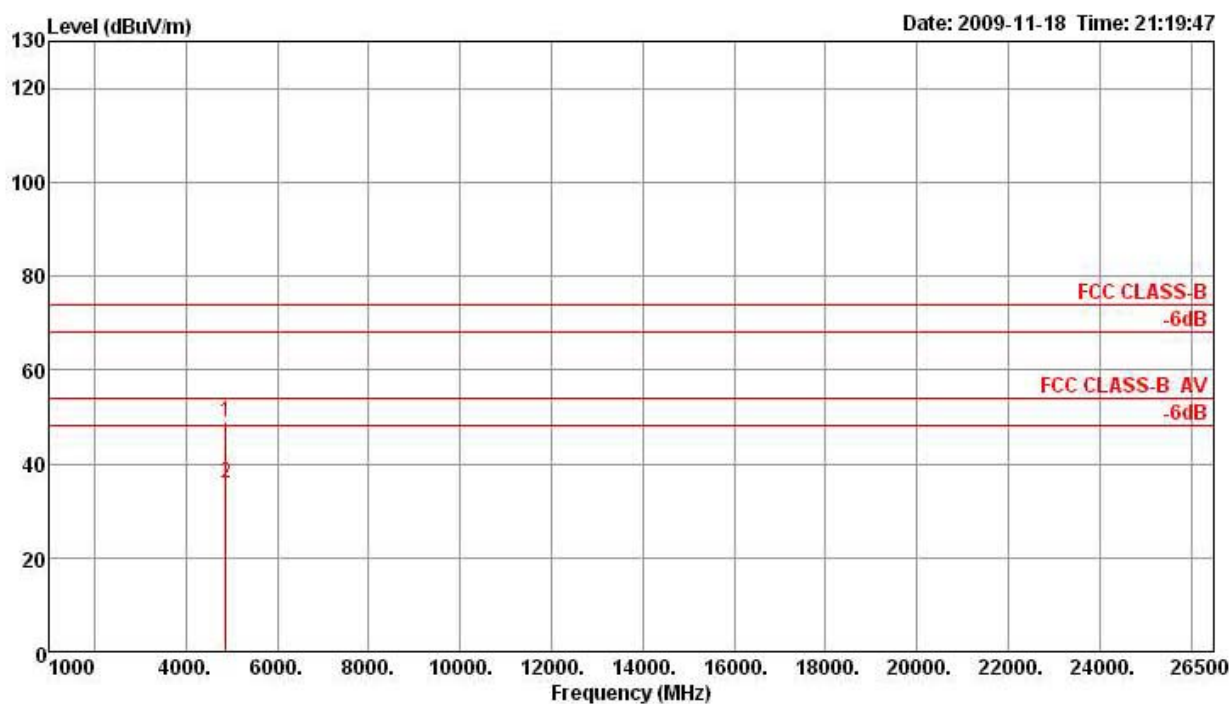

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4873.98	48.74	74.00	-25.26	43.90	6.56	35.20	33.48	248	100	Peak	HORIZONTAL
2 a	4873.99	35.78	54.00	-18.22	30.94	6.56	35.20	33.48	248	100	Average	HORIZONTAL


Vertical

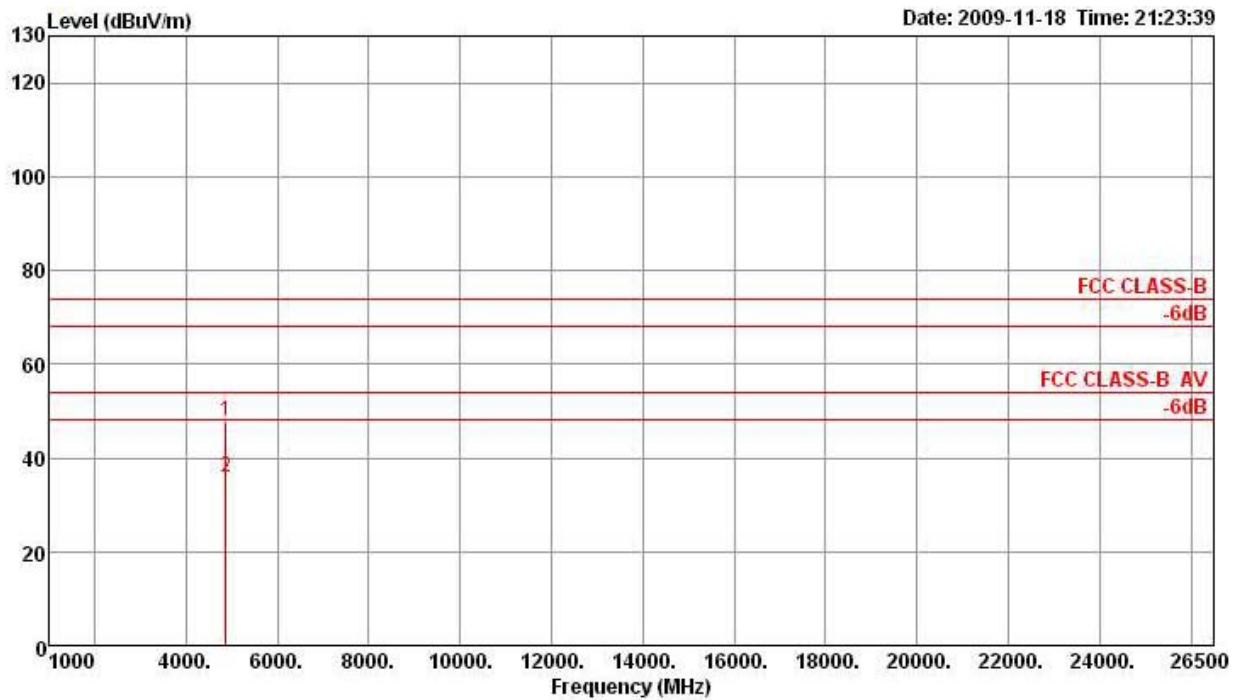

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4874.00	47.97	74.00	-26.03	43.13	6.56	35.20	33.48	142	100	Peak	VERTICAL
2 a	4874.00	35.90	54.00	-18.10	31.06	6.56	35.20	33.48	142	100	Average	VERTICAL


Temperature	23°C	Humidity	56%
Test Engineer	Allen Liu	Configurations	IEEE 802.11n MCS0 40MHz Ch 9 / Antenna A

Horizontal

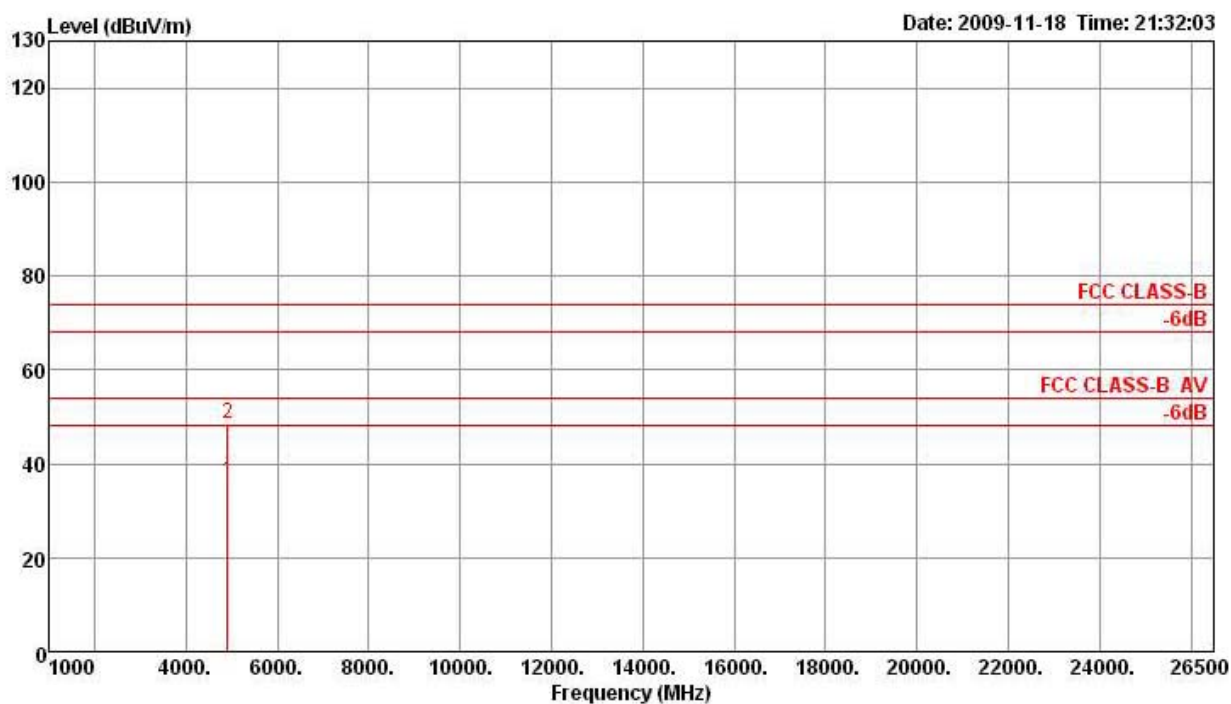

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4904.00	36.10	54.00	-17.90	31.14	6.65	35.20	33.51	187	100	Average	HORIZONTAL
2 p	4904.02	48.70	74.00	-25.30	43.74	6.65	35.20	33.51	187	100	Peak	HORIZONTAL

Vertical

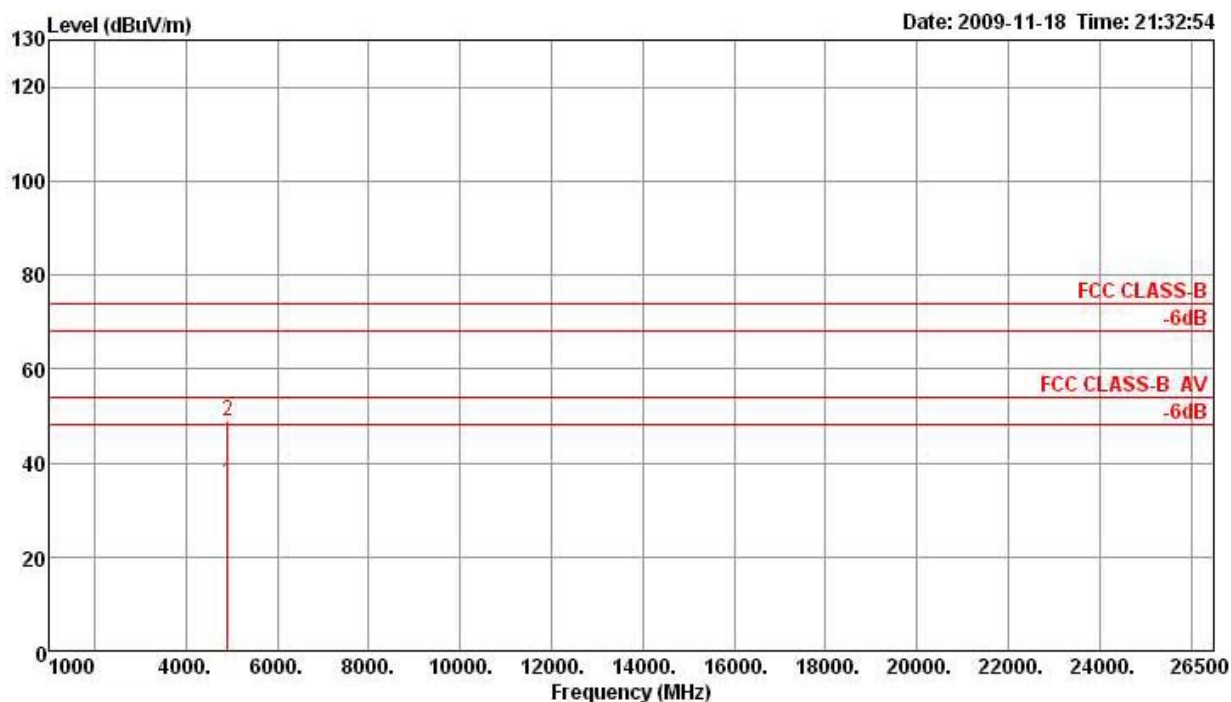

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4904.01	35.99	54.00	-18.01	31.03	6.65	35.20	33.51	30	100	Average	VERTICAL
2 p	4904.01	48.84	74.00	-25.16	43.88	6.65	35.20	33.51	30	100	Peak	VERTICAL

Note:


The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


Temperature	23°C	Humidity	56%
Test Engineer	Allen Liu	Configurations	IEEE 802.11b CH 1 / Antenna A

Horizontal

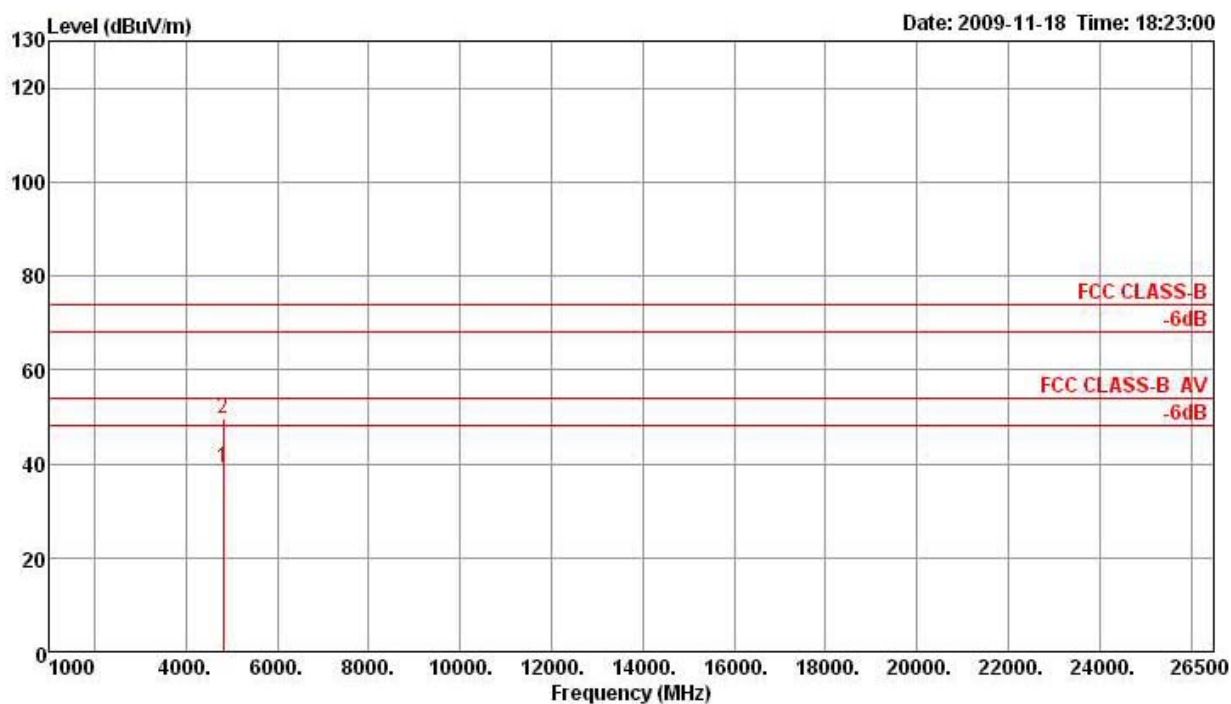

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4824.01	39.01	54.00	-14.99	34.43	6.39	35.20	33.39	178	100	Average	HORIZONTAL
2 p	4824.09	49.56	74.00	-24.44	44.98	6.39	35.20	33.39	178	100	Peak	HORIZONTAL


Vertical

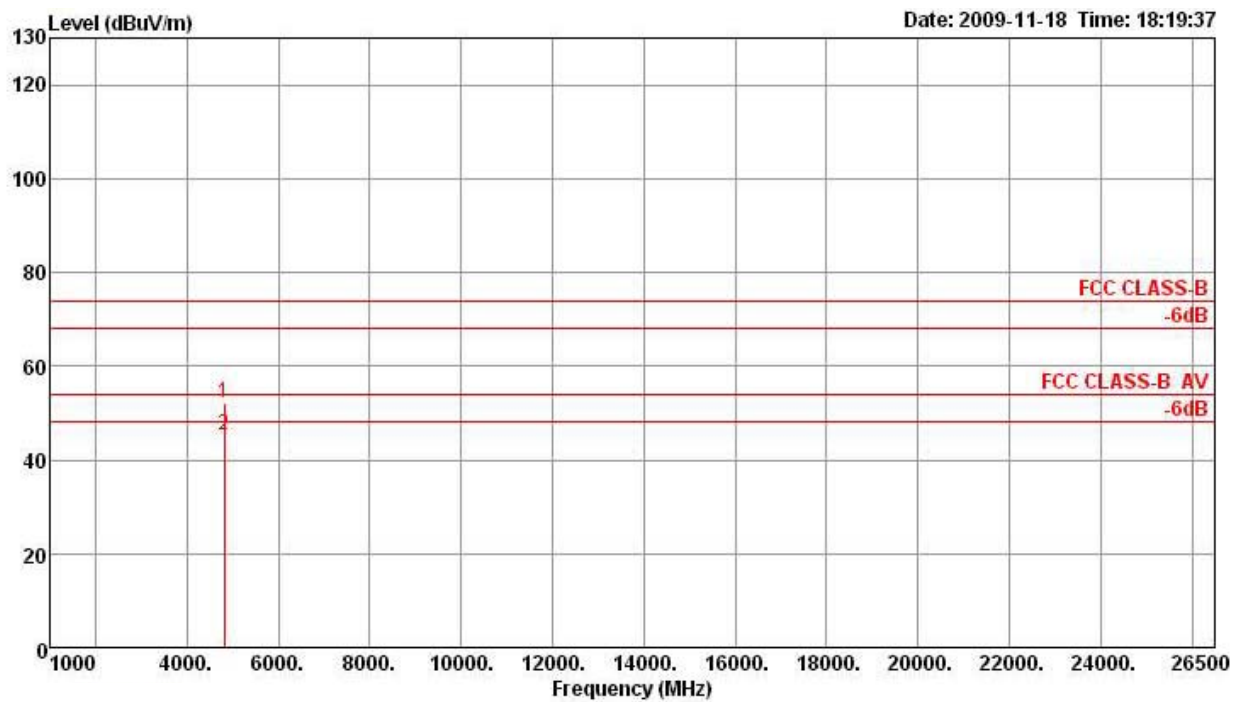

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4823.89	52.26	74.00	-21.74	47.68	6.39	35.20	33.39	234	111	Peak	VERTICAL
2 a	4823.99	45.36	54.00	-8.64	40.78	6.39	35.20	33.39	234	111	Average	VERTICAL


Temperature	23°C	Humidity	56%
Test Engineer	Allen Liu	Configurations	IEEE 802.11b CH 6 / Antenna A

Horizontal

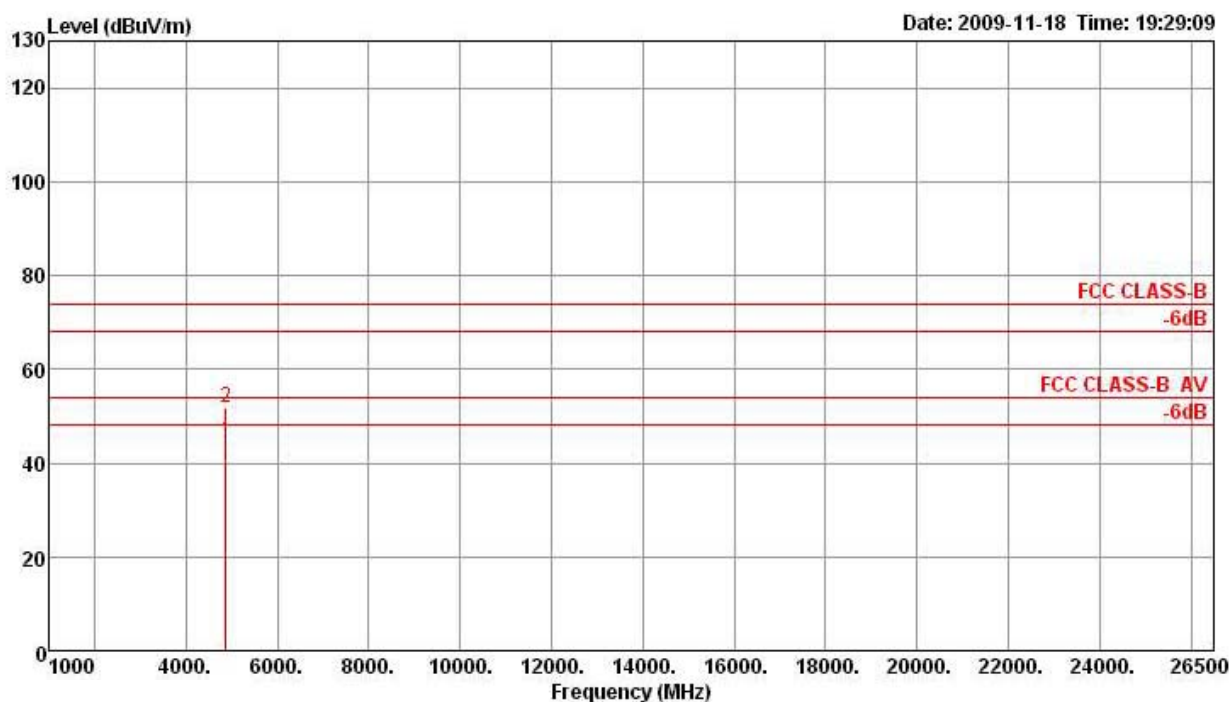

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4873.93	44.67	54.00	-9.33	39.83	6.56	35.20	33.48	155	134	Average	HORIZONTAL
2 p	4874.04	51.90	74.00	-22.10	47.06	6.56	35.20	33.48	155	134	Peak	HORIZONTAL


Vertical

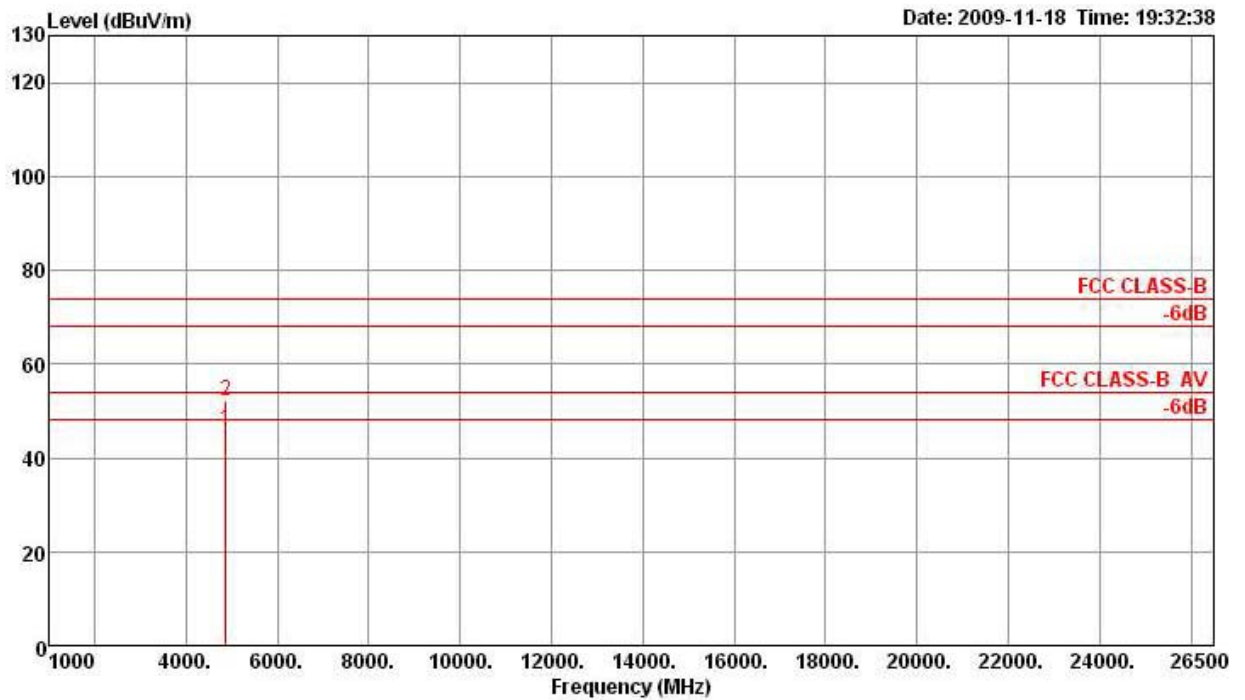

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4873.95	46.14	54.00	-7.86	41.30	6.56	35.20	33.48	233	108	Average	VERTICAL
2 p	4874.09	52.08	74.00	-21.92	47.24	6.56	35.20	33.48	233	108	Peak	VERTICAL


Temperature	23°C	Humidity	56%
Test Engineer	Allen Liu	Configurations	IEEE 802.11b CH 11 / Antenna A

Horizontal

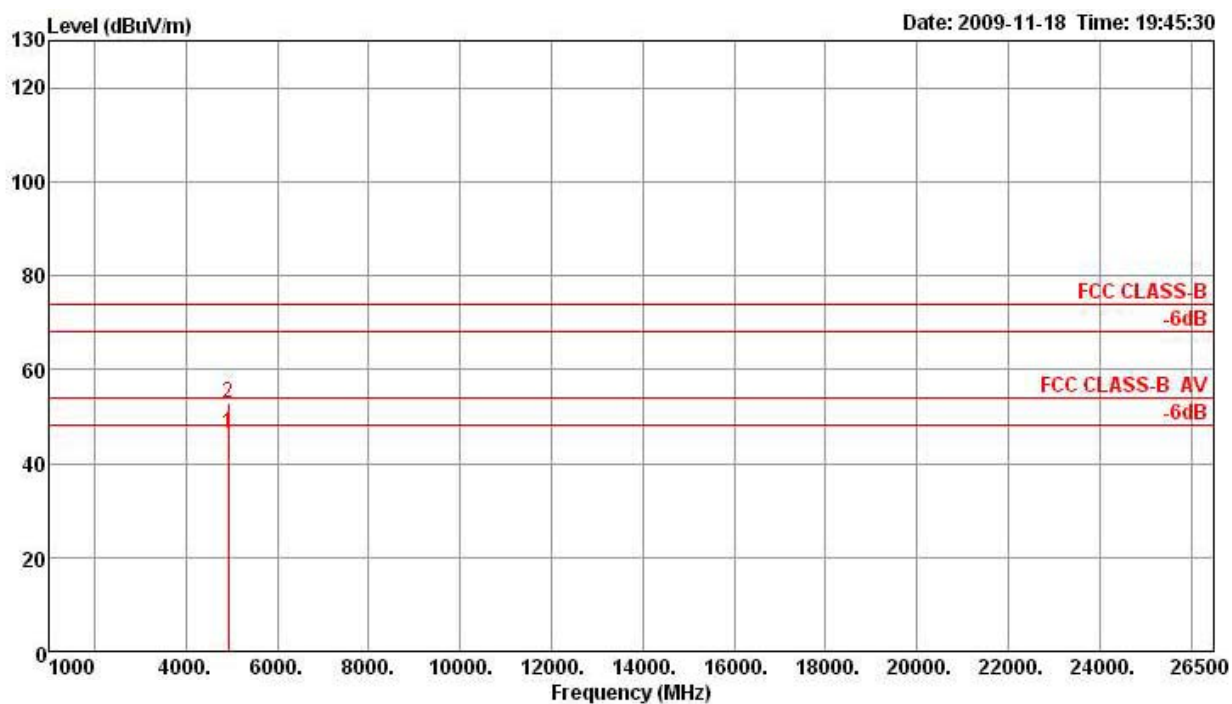

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4923.99	46.30	54.00	-7.70	41.19	6.73	35.20	33.58	166	139	Average	HORIZONTAL
2 p	4924.06	52.90	74.00	-21.10	47.79	6.73	35.20	33.58	166	139	Peak	HORIZONTAL


Vertical

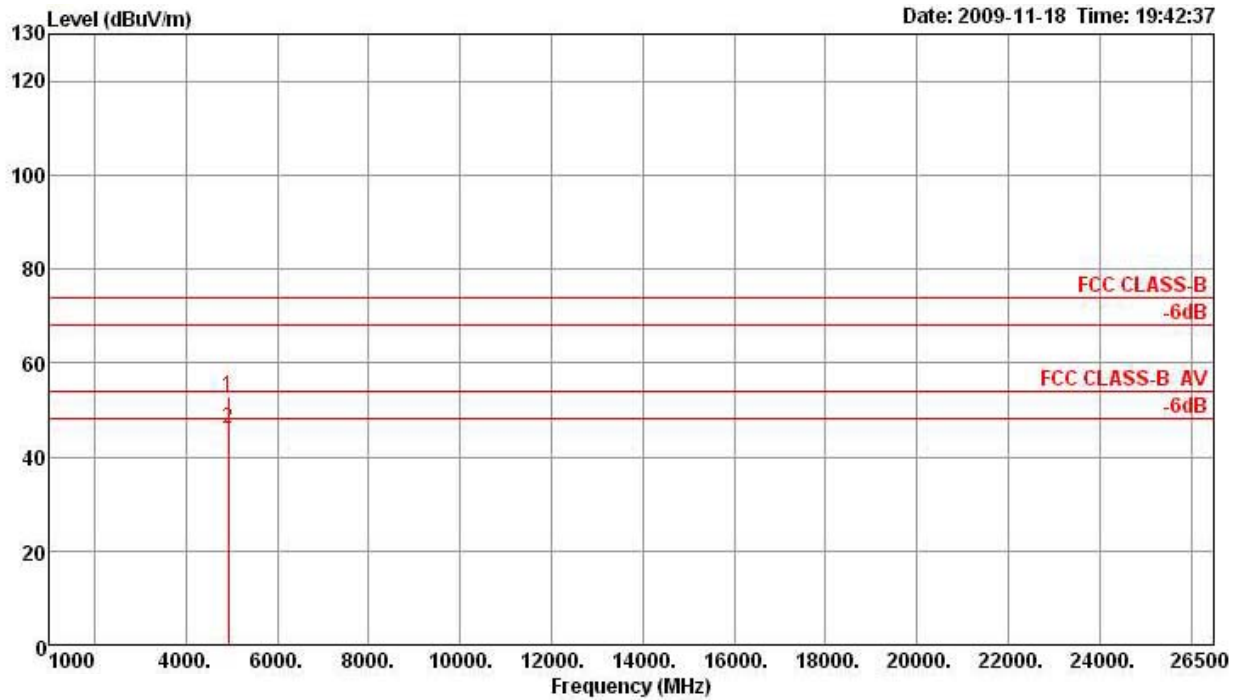

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4923.68	52.83	74.00	-21.17	47.72	6.73	35.20	33.58	199	102	Peak	VERTICAL
2 a	4923.96	46.12	54.00	-7.88	41.01	6.73	35.20	33.58	199	102	Average	VERTICAL


Temperature	23°C	Humidity	56%
Test Engineer	Allen Liu	Configurations	IEEE 802.11g CH 1 / Antenna A

Horizontal

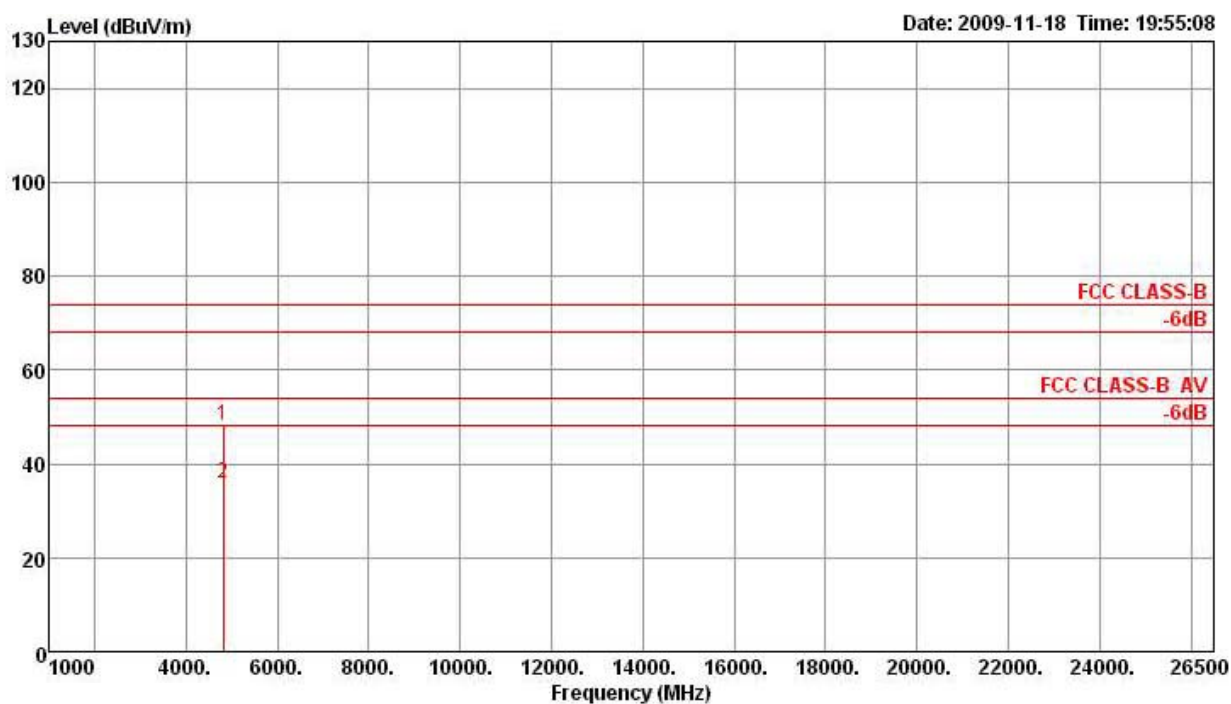

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4823.98	48.31	74.00	-25.69	43.73	6.39	35.20	33.39	199	100	Peak	HORIZONTAL
2 a	4823.99	35.76	54.00	-18.24	31.18	6.39	35.20	33.39	199	100	Average	HORIZONTAL


Vertical

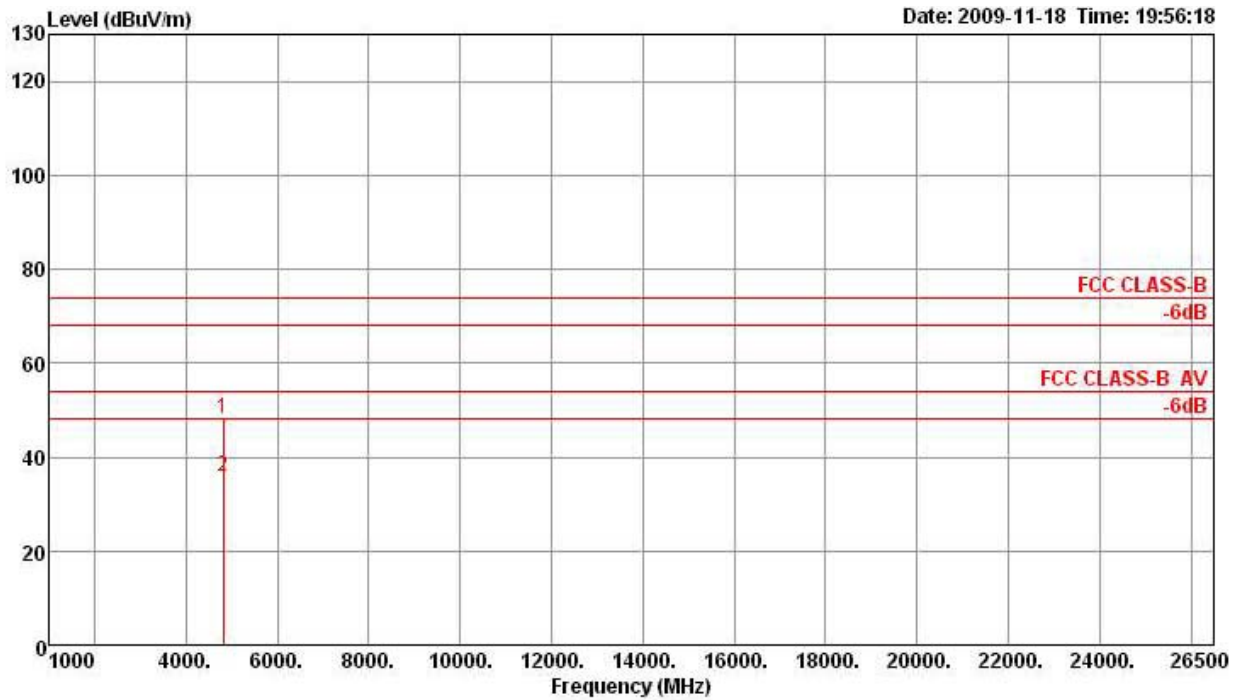

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4824.00	48.22	74.00	-25.78	43.64	6.39	35.20	33.39	301	100	Peak	VERTICAL
2 a	4824.00	35.97	54.00	-18.03	31.39	6.39	35.20	33.39	301	100	Average	VERTICAL


Temperature	23°C	Humidity	56%
Test Engineer	Allen Liu	Configurations	IEEE 802.11g CH 6 / Antenna A

Horizontal

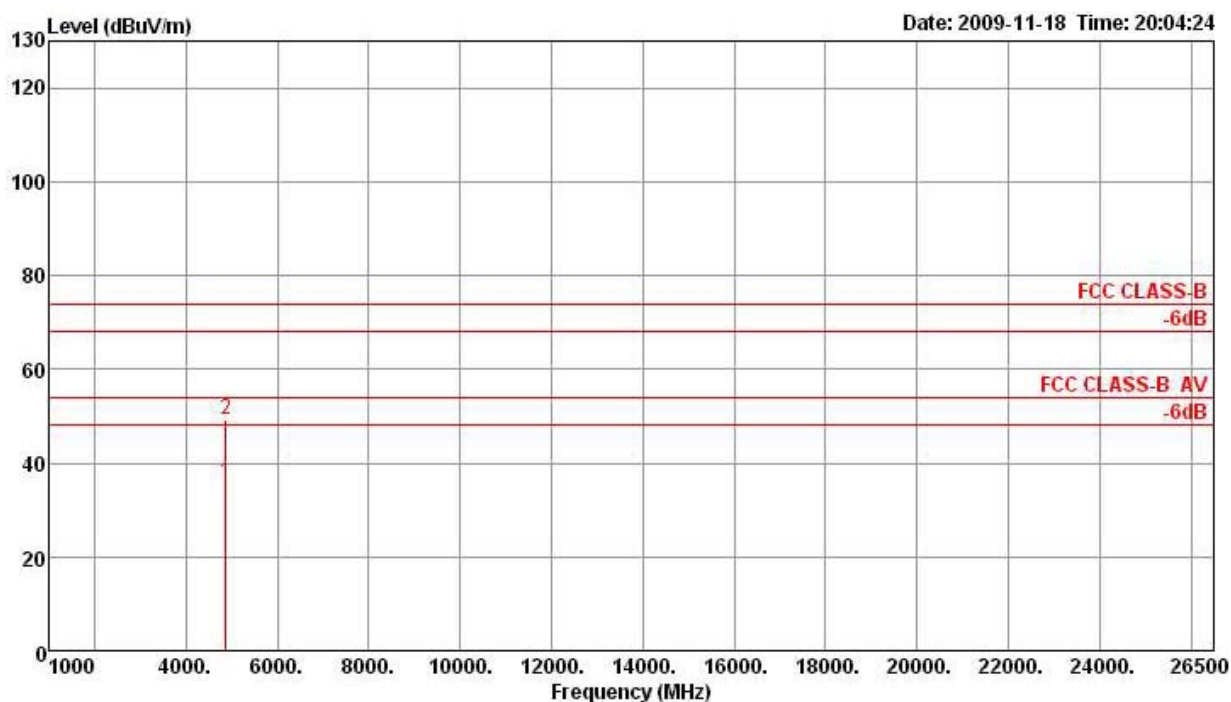

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	4873.99	35.80	54.00	-18.20	30.96	6.56	35.20	33.48	36	100	Average	HORIZONTAL
2 p	4873.99	49.23	74.00	-24.77	44.39	6.56	35.20	33.48	36	100	Peak	HORIZONTAL


Vertical

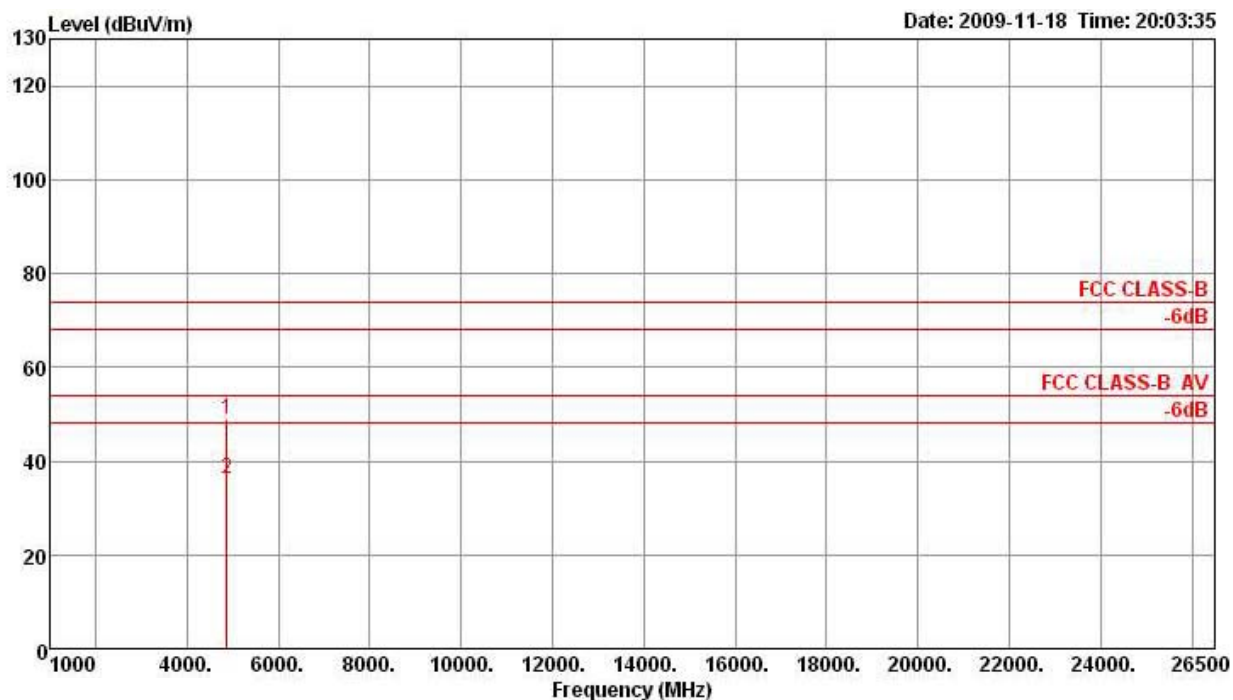

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4873.99	48.82	74.00	-25.18	43.98	6.56	35.20	33.48	159	100	Peak	VERTICAL
2 a	4874.01	36.29	54.00	-17.71	31.45	6.56	35.20	33.48	159	100	Average	VERTICAL


Temperature	23°C	Humidity	56%
Test Engineer	Allen Liu	Configurations	IEEE 802.11g CH 11 / Antenna A

Horizontal

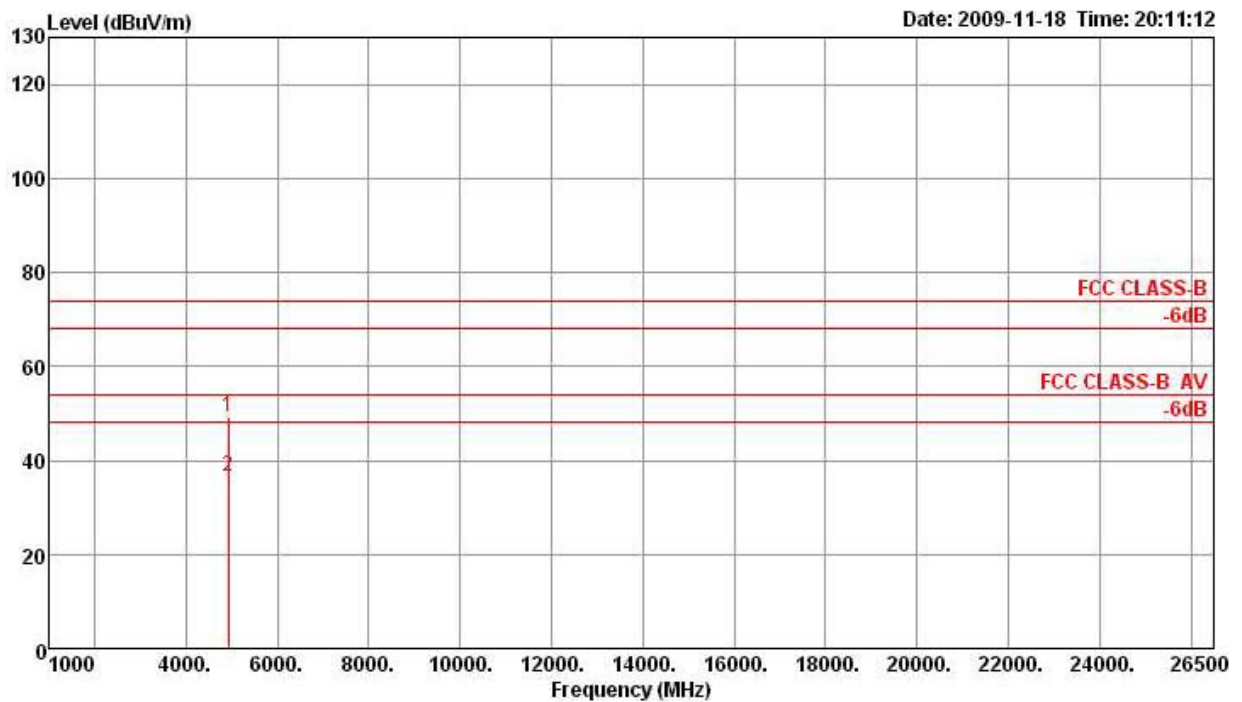

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4924.00	49.27	74.00	-24.73	44.16	6.73	35.20	33.58	165	100	Peak	HORIZONTAL
2 a	4924.02	36.52	54.00	-17.48	31.41	6.73	35.20	33.58	165	100	Average	HORIZONTAL

Vertical

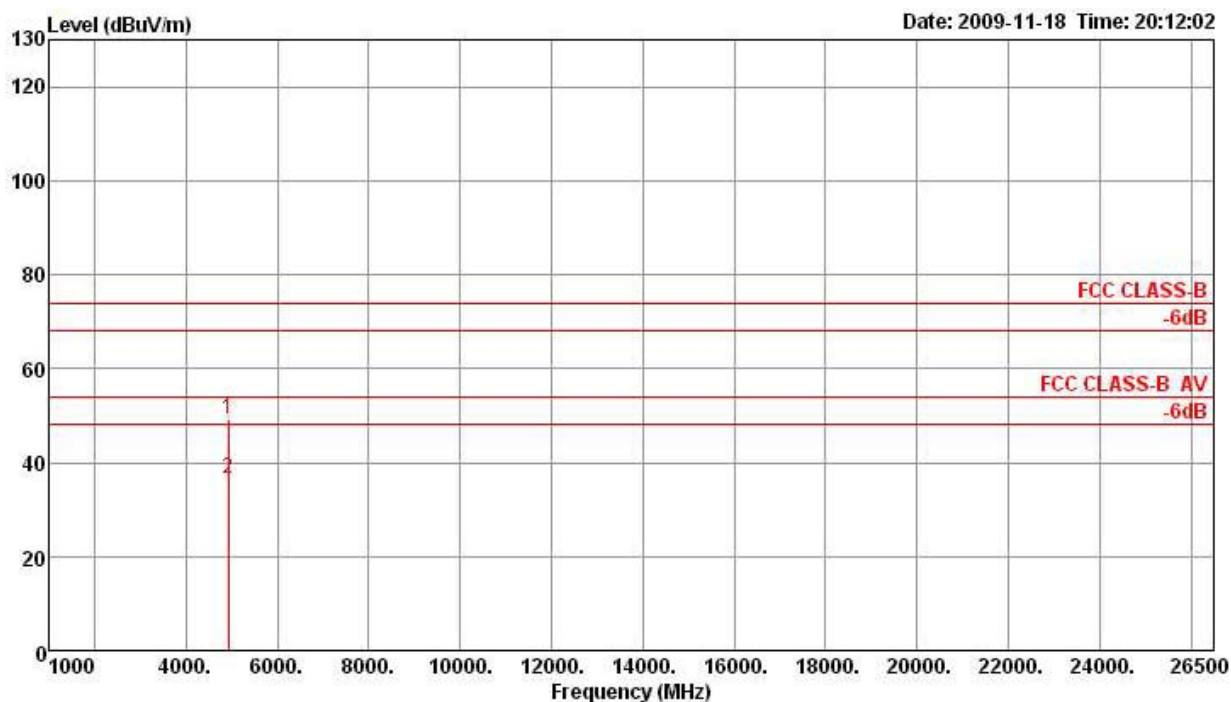

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4924.01	49.14	74.00	-24.86	44.03	6.73	35.20	33.58	248	100	Peak	VERTICAL
2 a	4924.01	36.67	54.00	-17.33	31.56	6.73	35.20	33.58	248	100	Average	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

<For Antenna B>


Temperature	23°C	Humidity	56%
Test Engineer	Allen Liu	Configurations	IEEE 802.11n MCS0 20MHz Ch 1 / Antenna B

Horizontal

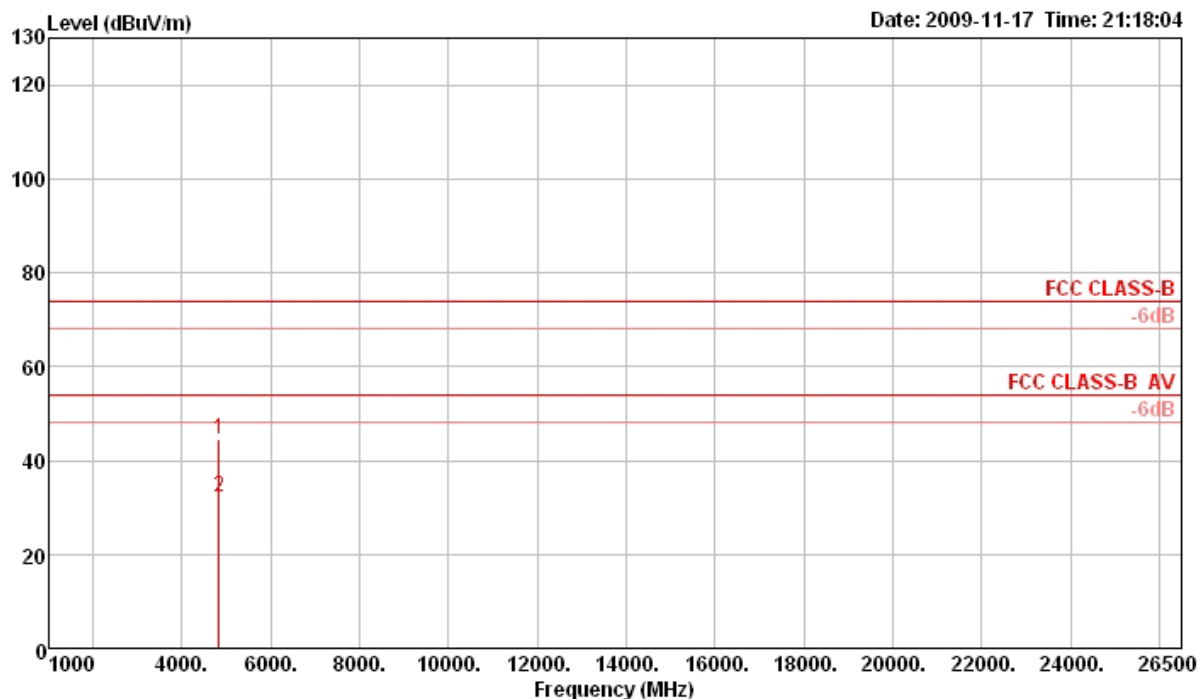

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1 p	4824.40	44.70	74.00	-29.30	42.71	3.96	33.06	35.03	324	100 Peak	HORIZONTAL
2 a	4824.67	32.06	54.00	-21.94	30.07	3.96	33.06	35.03	324	100 Average	HORIZONTAL


Vertical

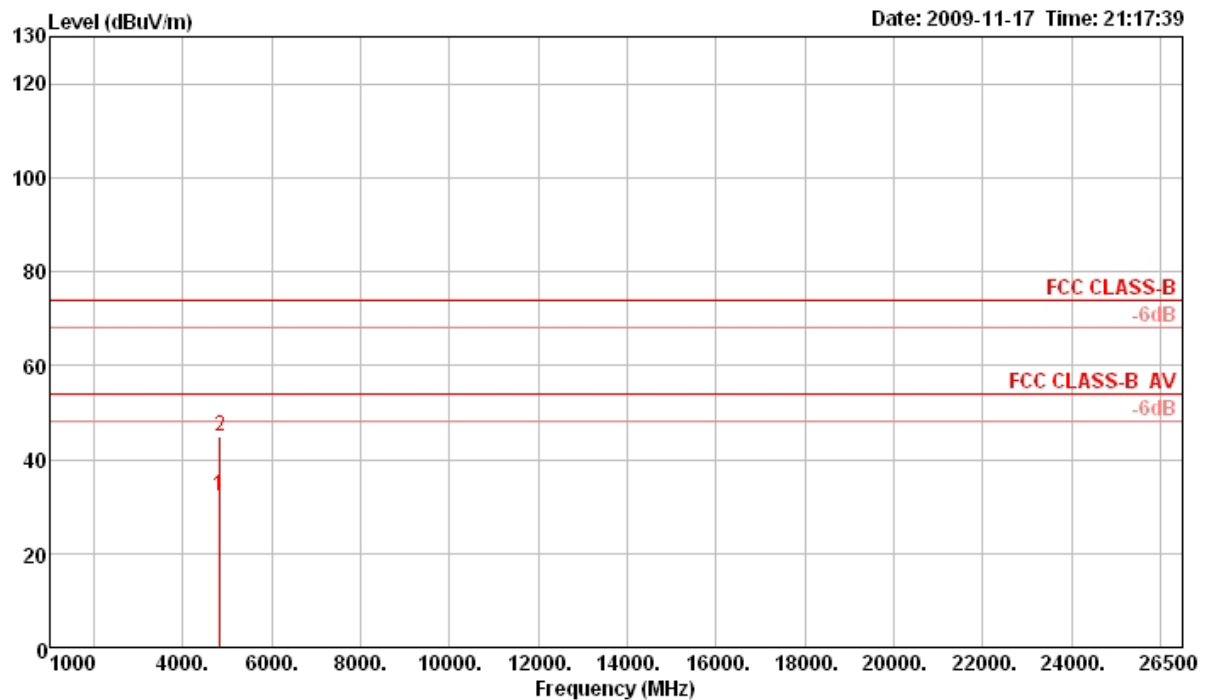

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1 a	4822.16	32.35	54.00	-21.65	30.36	3.96	33.06	35.03	197	100 Average	VERTICAL
2 p	4823.72	44.81	74.00	-29.19	42.82	3.96	33.06	35.03	197	100 Peak	VERTICAL


Temperature	23°C	Humidity	56%
Test Engineer	Allen Liu	Configurations	IEEE 802.11n MCS0 20MHz Ch 6 / Antenna B

Horizontal

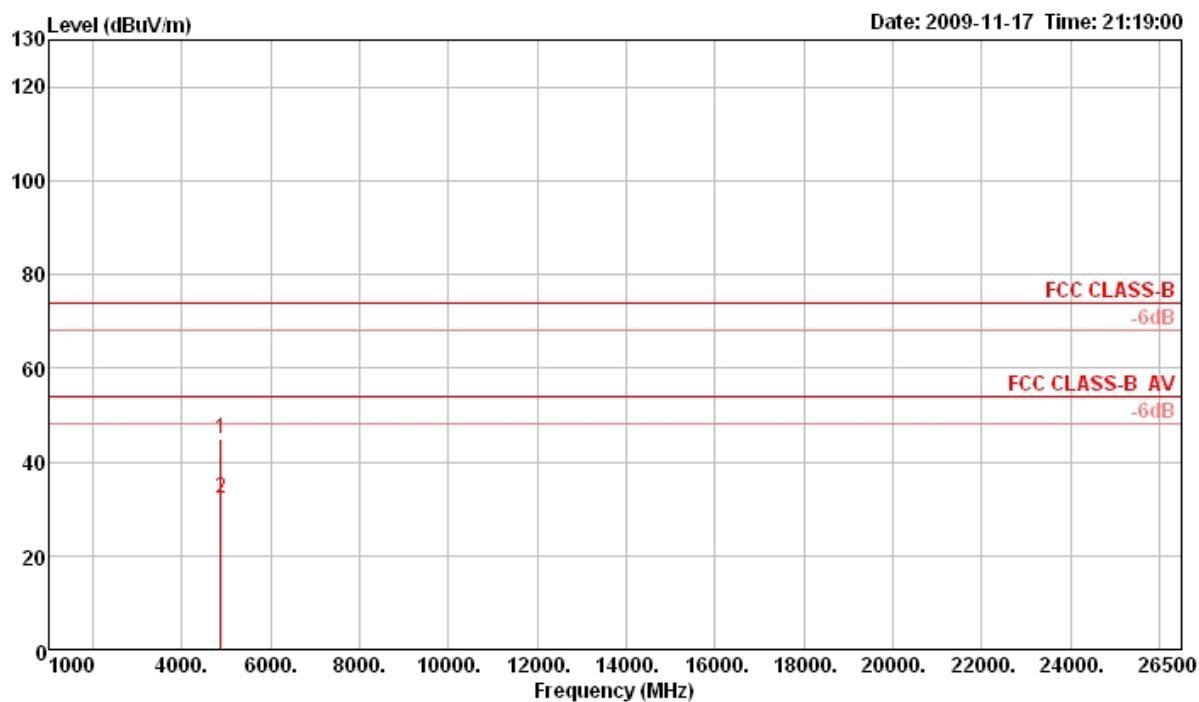

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1 p	4875.03	44.81	74.00	-29.19	42.71	3.97	33.16	35.03	156	100 Peak	HORIZONTAL
2 a	4875.53	32.14	54.00	-21.86	30.04	3.97	33.16	35.03	156	100 Average	HORIZONTAL


Vertical

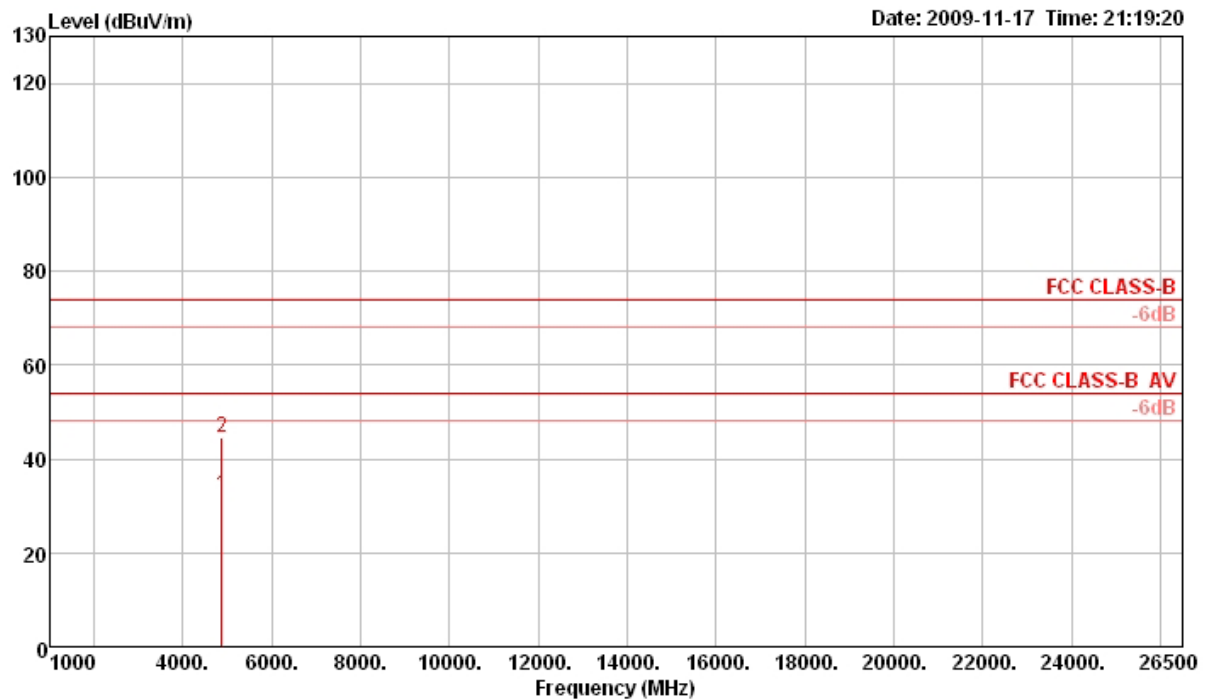

		Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	a	4875.42	32.05	54.00	-21.95	29.95	3.97	33.16	35.03	306	100 Average	VERTICAL
2	p	4876.15	44.55	74.00	-29.45	42.45	3.97	33.16	35.03	306	100 Peak	VERTICAL


Temperature	23°C	Humidity	56%
Test Engineer	Allen Liu	Configurations	IEEE 802.11n MCS0 20MHz Ch11 / Antenna B

Horizontal

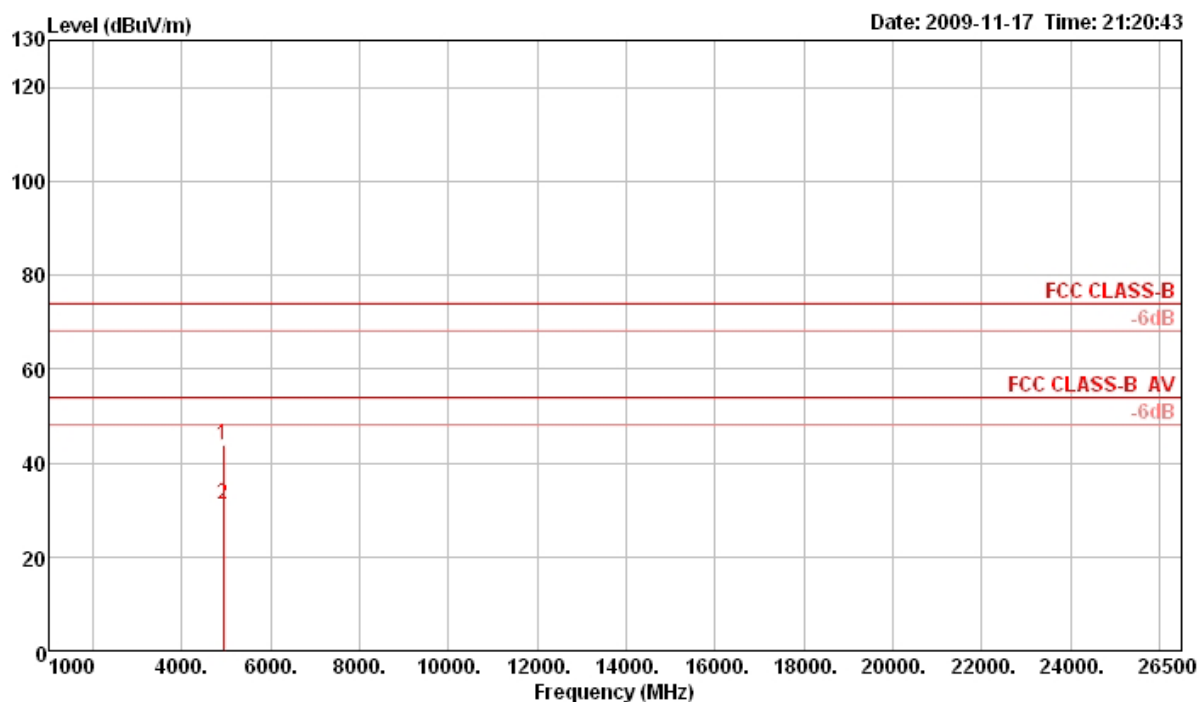

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1 p	4921.73	43.85	74.00	-30.15	41.66	3.97	33.23	35.01	317	100 Peak	HORIZONTAL
2 a	4922.39	31.21	54.00	-22.79	28.99	3.97	33.26	35.01	317	100 Average	HORIZONTAL


Vertical

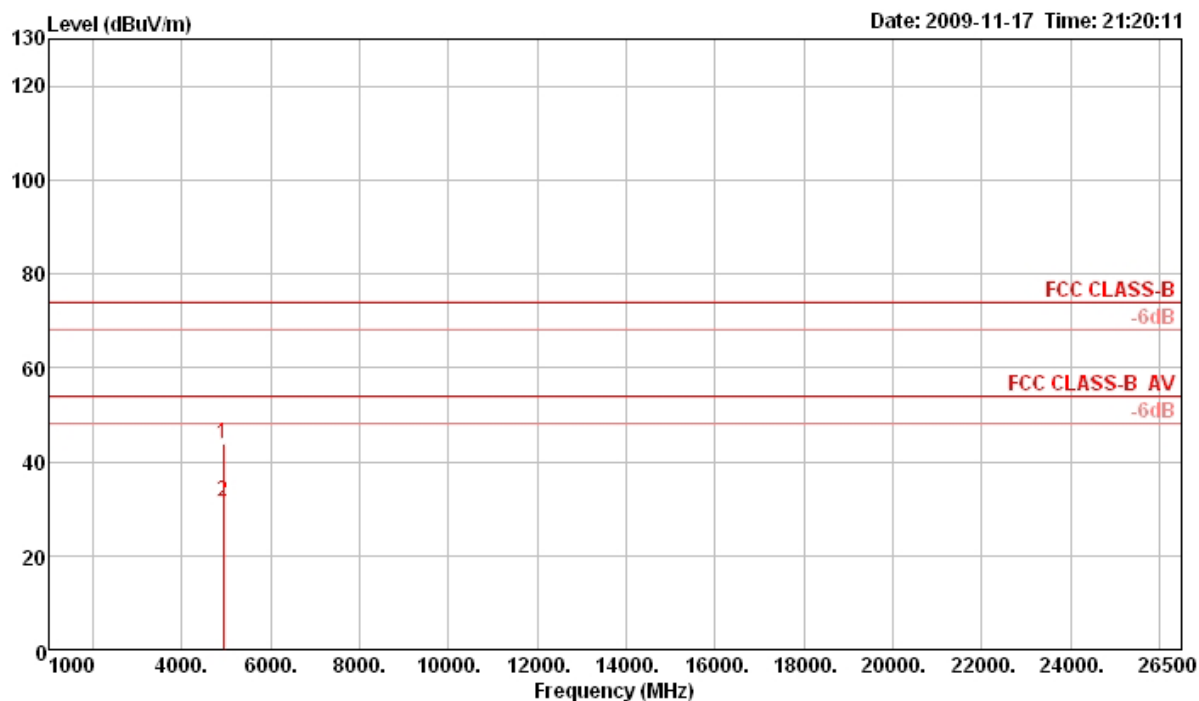

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1 p	4922.32	43.91	74.00	-30.09	41.69	3.97	33.26	35.01	162	100 Peak	VERTICAL
2 a	4925.26	31.56	54.00	-22.44	29.34	3.97	33.26	35.01	162	100 Average	VERTICAL


Temperature	23°C	Humidity	56%
Test Engineer	Allen Liu	Configurations	IEEE 802.11n MCS0 40MHz Ch 3 / Antenna B

Horizontal

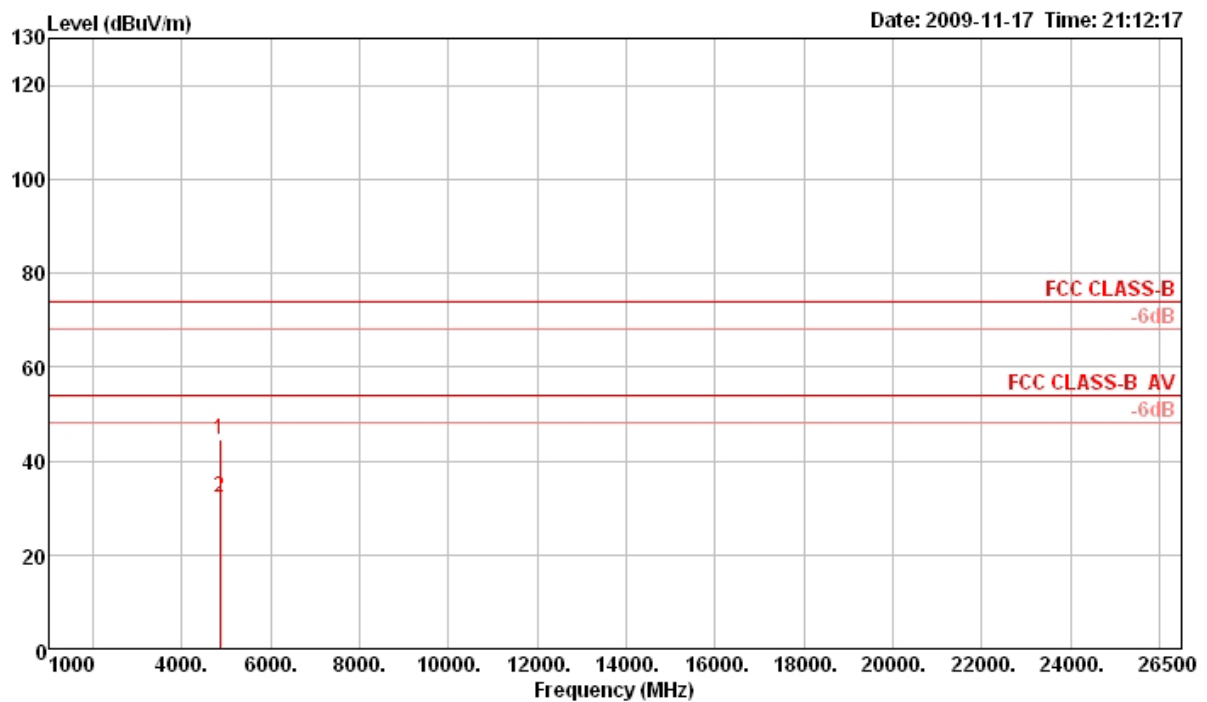

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1 p	4844.60	44.63	74.00	-29.37	42.61	3.96	33.09	35.03	254	100 Peak	HORIZONTAL
2 a	4845.93	32.10	54.00	-21.90	30.08	3.96	33.09	35.03	254	100 Average	HORIZONTAL


Vertical

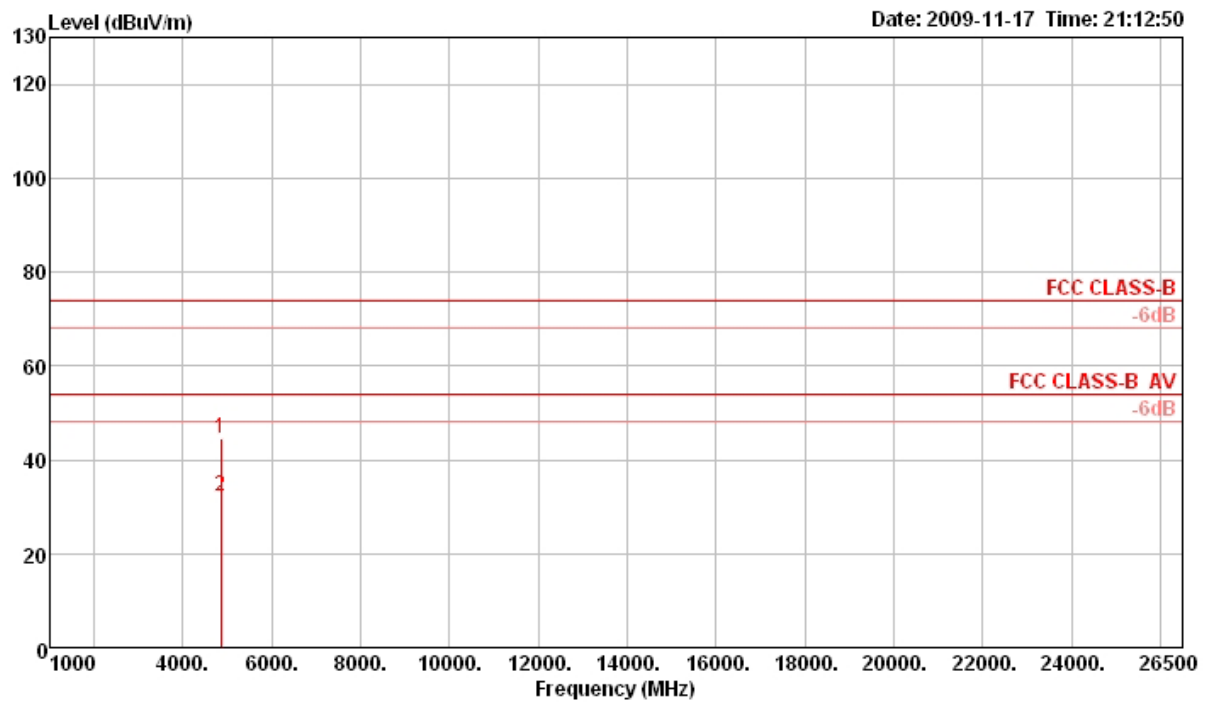

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1 p	4843.30	44.36	74.00	-29.64	42.34	3.96	33.09	35.03	121	100 Peak	VERTICAL
2 a	4846.05	32.18	54.00	-21.82	30.16	3.96	33.09	35.03	121	100 Average	VERTICAL


Temperature	23°C	Humidity	56%
Test Engineer	Allen Liu	Configurations	IEEE 802.11n MCS0 40MHz Ch 6 / Antenna B

Horizontal

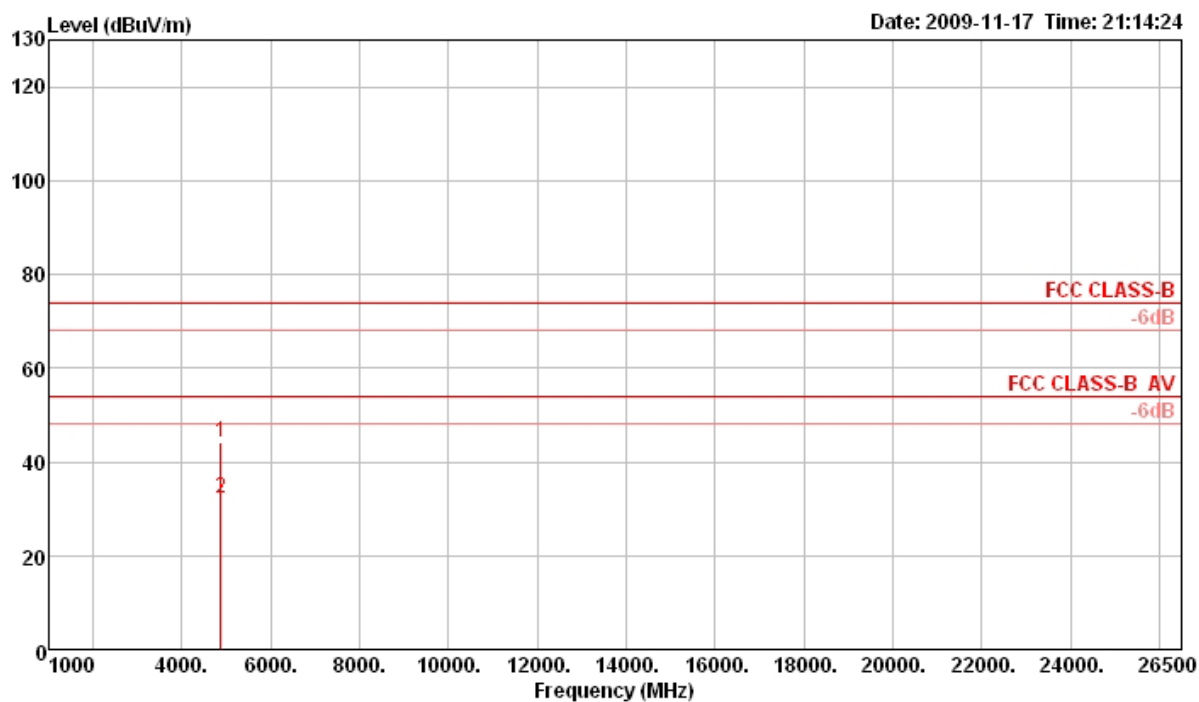

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1 p	4875.59	44.18	74.00	-29.82	42.08	3.97	33.16	35.03	188	100 Peak	HORIZONTAL
2 a	4875.88	32.17	54.00	-21.83	30.07	3.97	33.16	35.03	188	100 Average	HORIZONTAL


Vertical

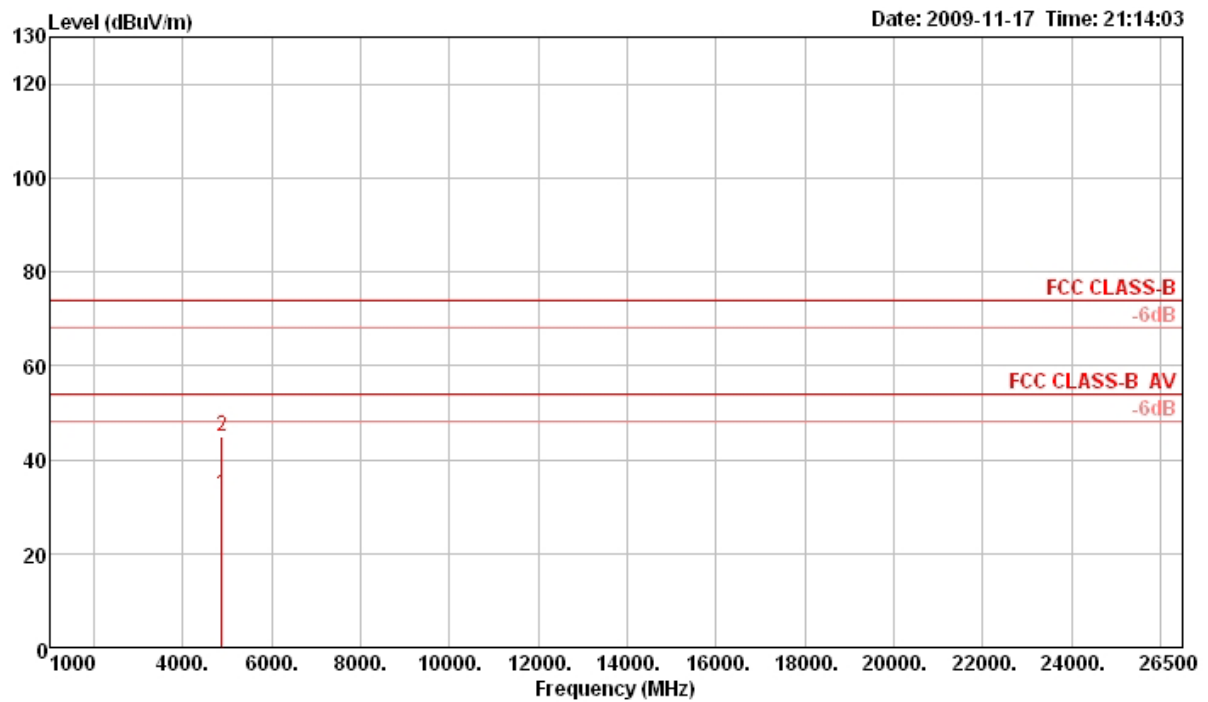

		Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	a	4875.20	32.47	54.00	-21.53	30.37	3.97	33.16	35.03	310	100 Average	VERTICAL
2	p	4875.47	45.04	74.00	-28.96	42.94	3.97	33.16	35.03	310	100 Peak	VERTICAL


Temperature	23°C	Humidity	56%
Test Engineer	Allen Liu	Configurations	IEEE 802.11n MCS0 40MHz Ch 9 / Antenna B

Horizontal

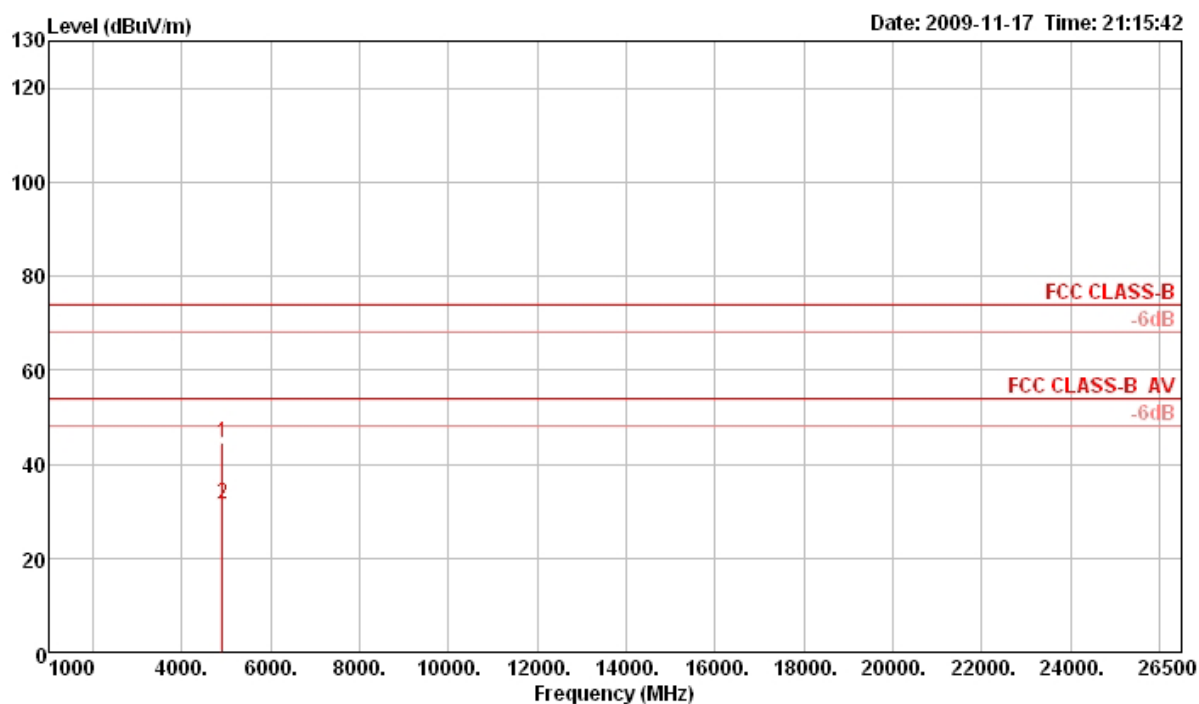

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1 p	4903.05	44.38	74.00	-29.62	42.24	3.97	33.19	35.02	114	100 Peak	HORIZONTAL
2 a	4903.28	31.68	54.00	-22.32	29.54	3.97	33.19	35.02	114	100 Average	HORIZONTAL

Vertical

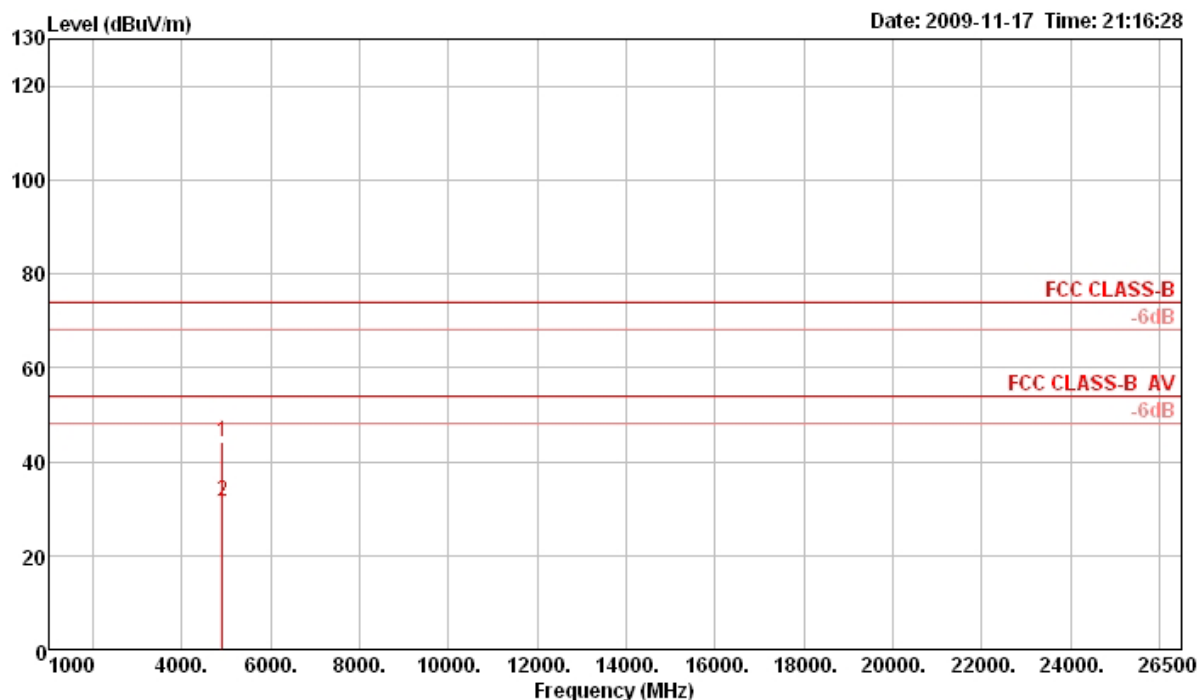

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1 p	4902.59	44.21	74.00	-29.79	42.07	3.97	33.19	35.02	316	100 Peak	VERTICAL
2 a	4904.87	31.59	54.00	-22.41	29.41	3.97	33.23	35.02	316	100 Average	VERTICAL

Note:


The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


Temperature	23°C	Humidity	56%
Test Engineer	Allen Liu	Configurations	IEEE 802.11b CH 1 / Antenna B

Horizontal

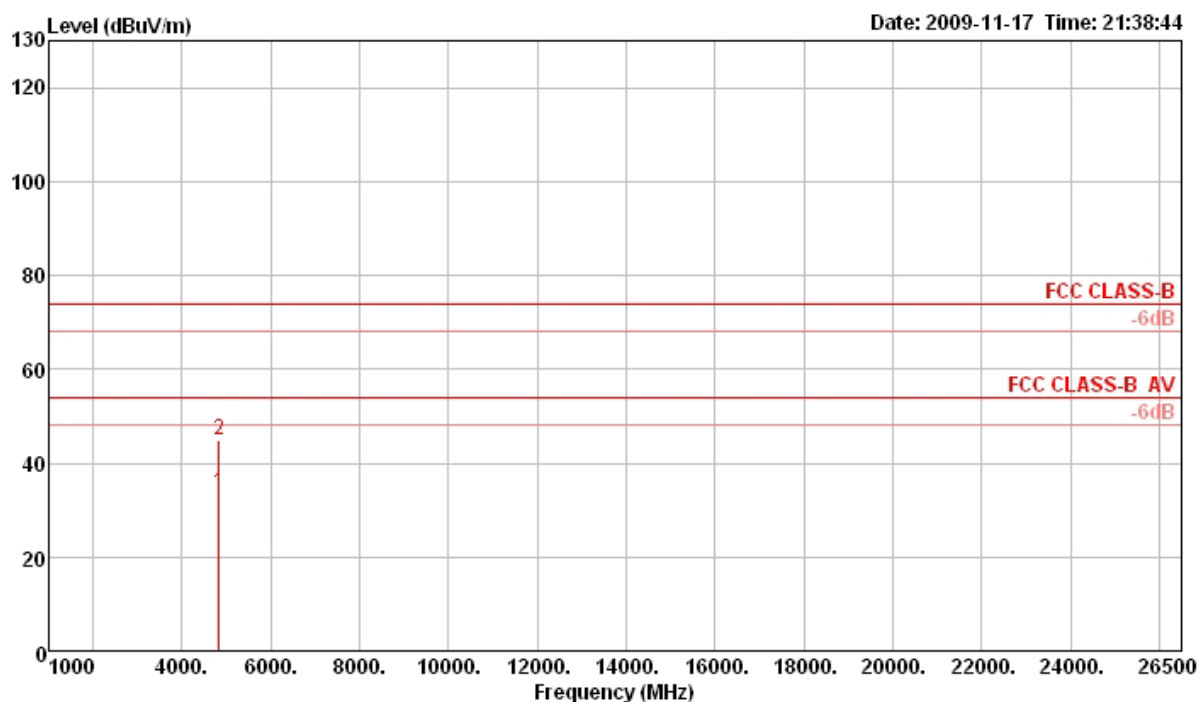

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1 a	4823.90	33.73	54.00	-20.27	31.74	3.96	33.06	35.03	135	98 Average	HORIZONTAL
2 p	4824.00	45.01	74.00	-28.99	43.02	3.96	33.06	35.03	135	98 Peak	HORIZONTAL


Vertical

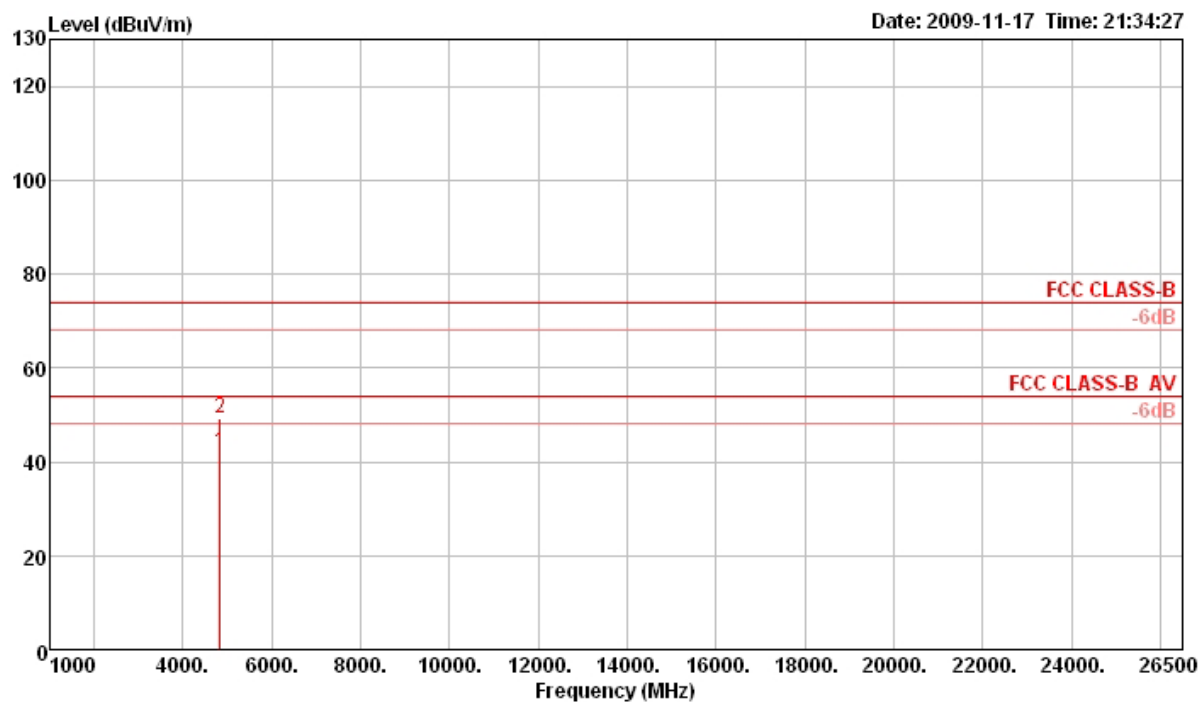

		Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	a	4823.98	41.90	54.00	-12.10	39.91	3.96	33.06	35.03	104	118 Average	VERTICAL
2	p	4824.10	49.20	74.00	-24.80	47.21	3.96	33.06	35.03	104	118 Peak	VERTICAL


Temperature	23°C	Humidity	56%
Test Engineer	Allen Liu	Configurations	IEEE 802.11b CH 6 / Antenna B

Horizontal

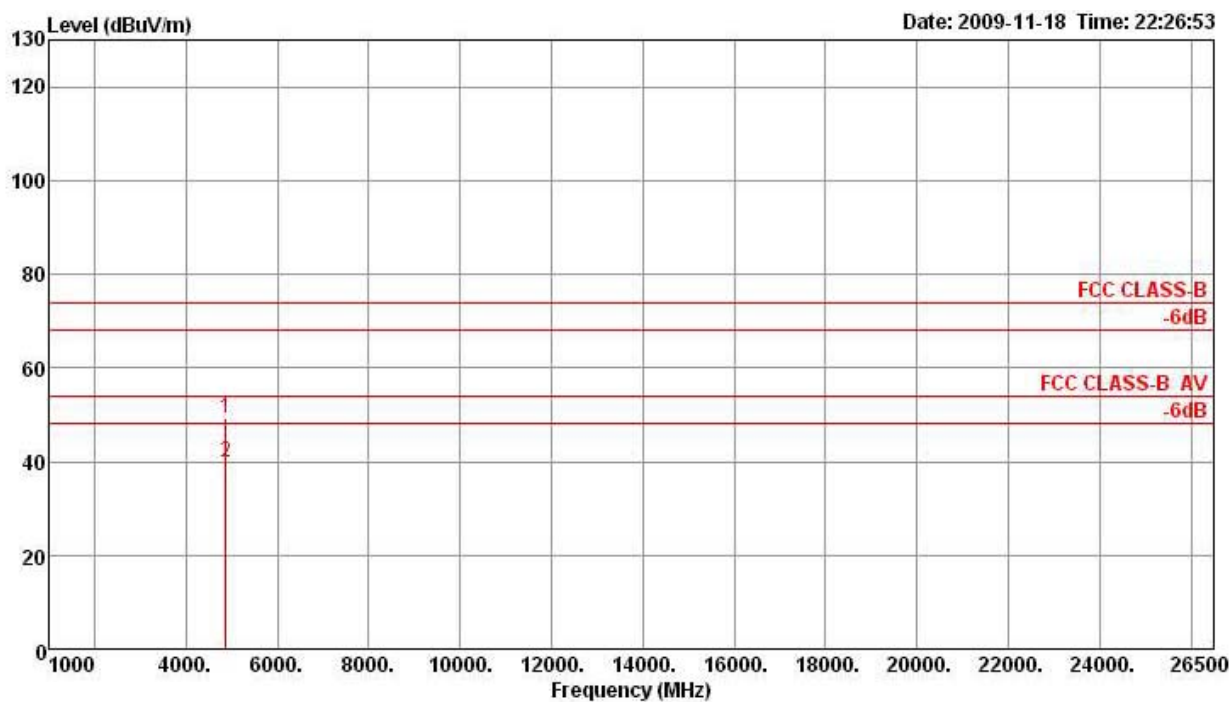

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4873.94	49.08	74.00	-24.92	46.47	4.33	35.20	33.48	159	100	Peak	HORIZONTAL
2 a	4873.99	39.81	54.00	-14.19	37.20	4.33	35.20	33.48	159	100	Average	HORIZONTAL


Vertical

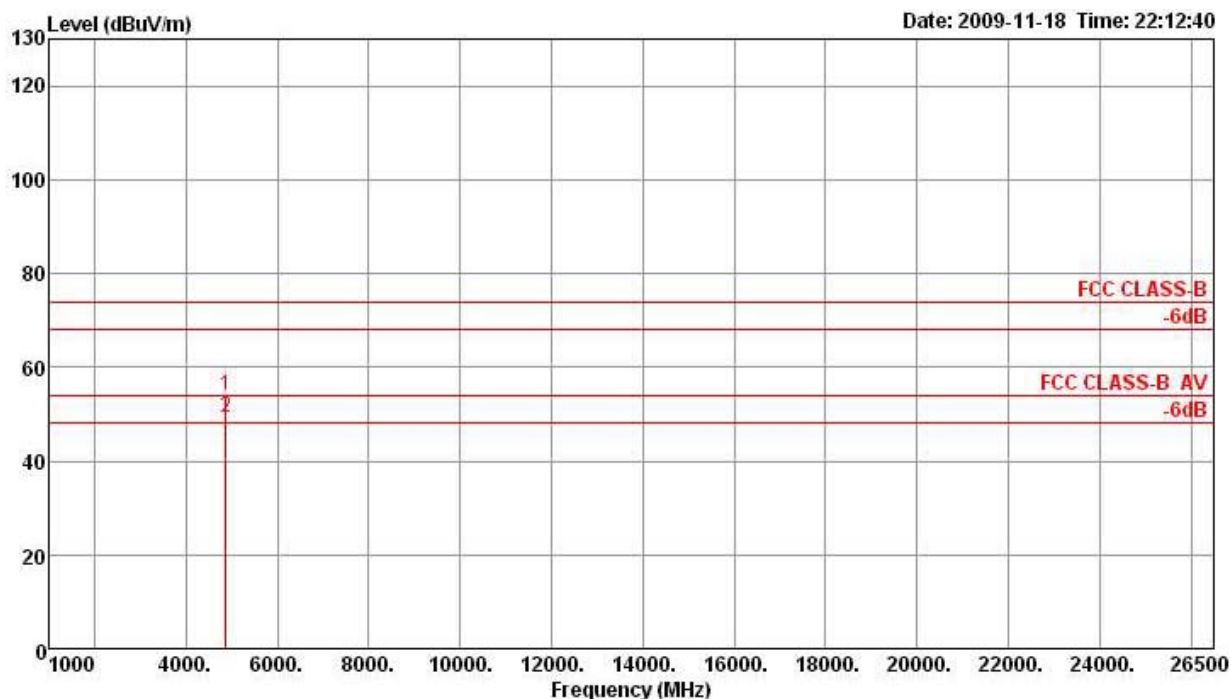

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	4873.89	53.95	74.00	-20.05	49.11	6.56	35.20	33.48	229	133	Peak	VERTICAL
2 a	4873.98	49.17	54.00	-4.83	44.33	6.56	35.20	33.48	229	133	Average	VERTICAL


Temperature	23°C	Humidity	56%
Test Engineer	Allen Liu	Configurations	IEEE 802.11b CH 11 / Antenna B

Horizontal

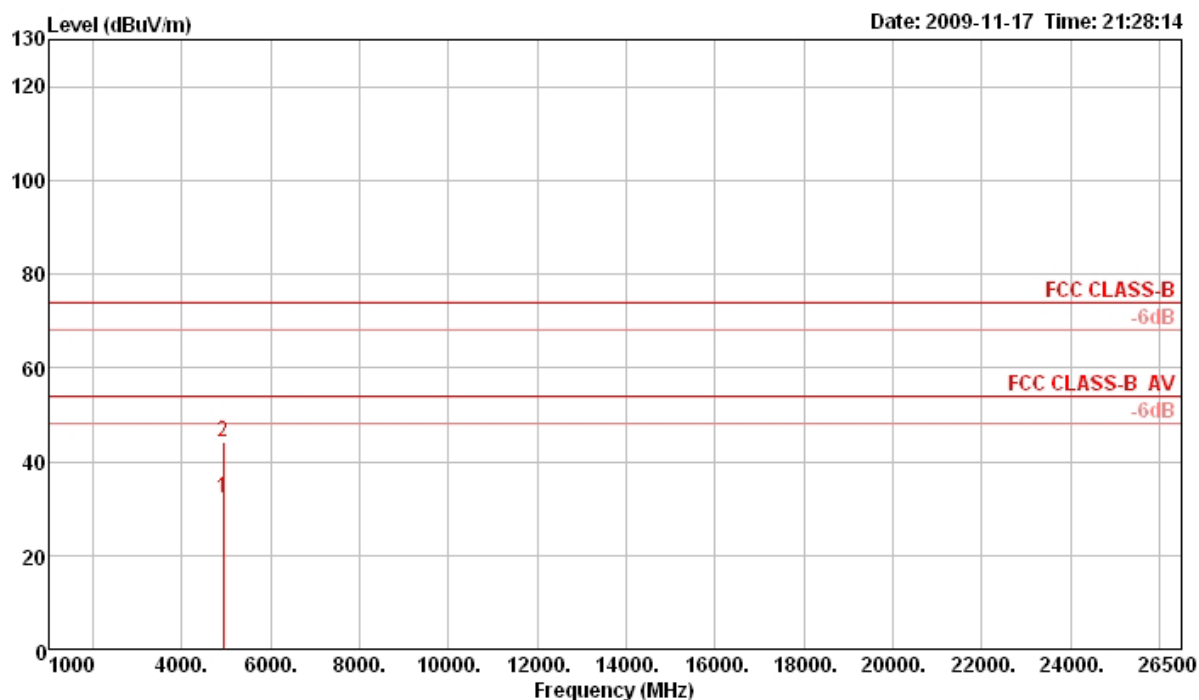

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1 a	4924.06	32.17	54.00	-21.83	29.95	3.97	33.26	35.01	191	101	Average
2 p	4924.17	44.01	74.00	-29.99	41.79	3.97	33.26	35.01	191	101	Peak


Vertical

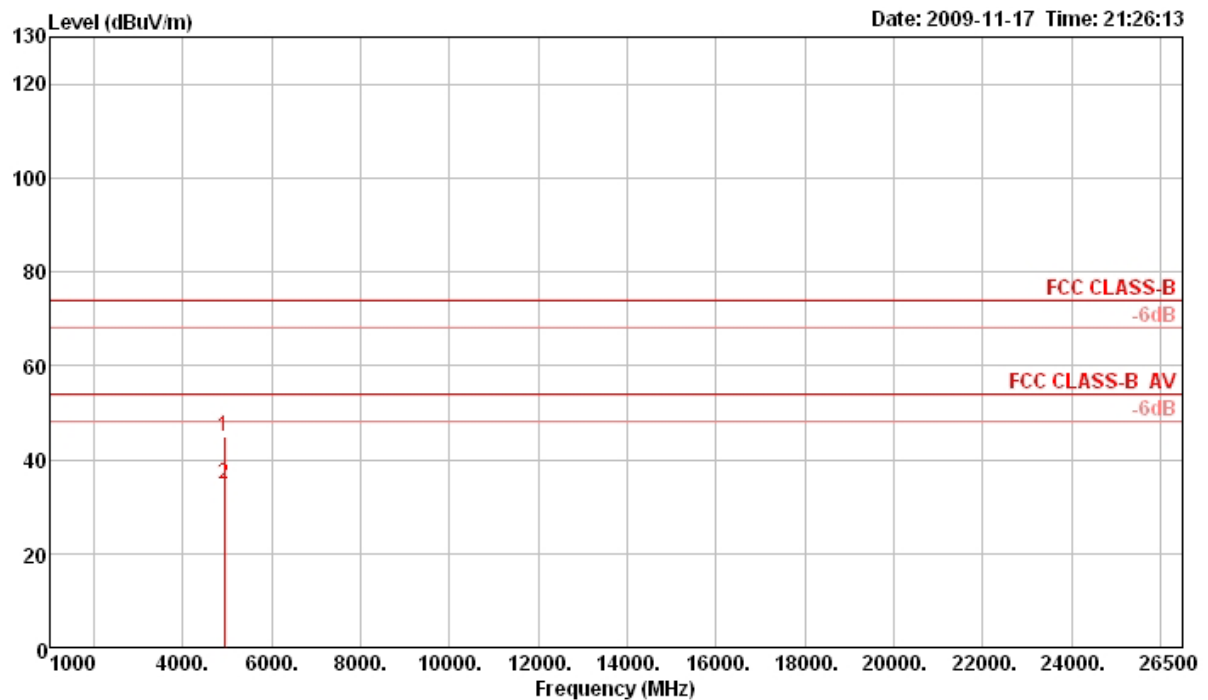

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1 p	4923.74	44.77	74.00	-29.23	42.55	3.97	33.26	35.01	142	130 Peak	VERTICAL
2 a	4923.96	34.62	54.00	-19.38	32.40	3.97	33.26	35.01	142	130 Average	VERTICAL


Temperature	23°C	Humidity	56%
Test Engineer	Allen Liu	Configurations	IEEE 802.11g CH 1 / Antenna B

Horizontal

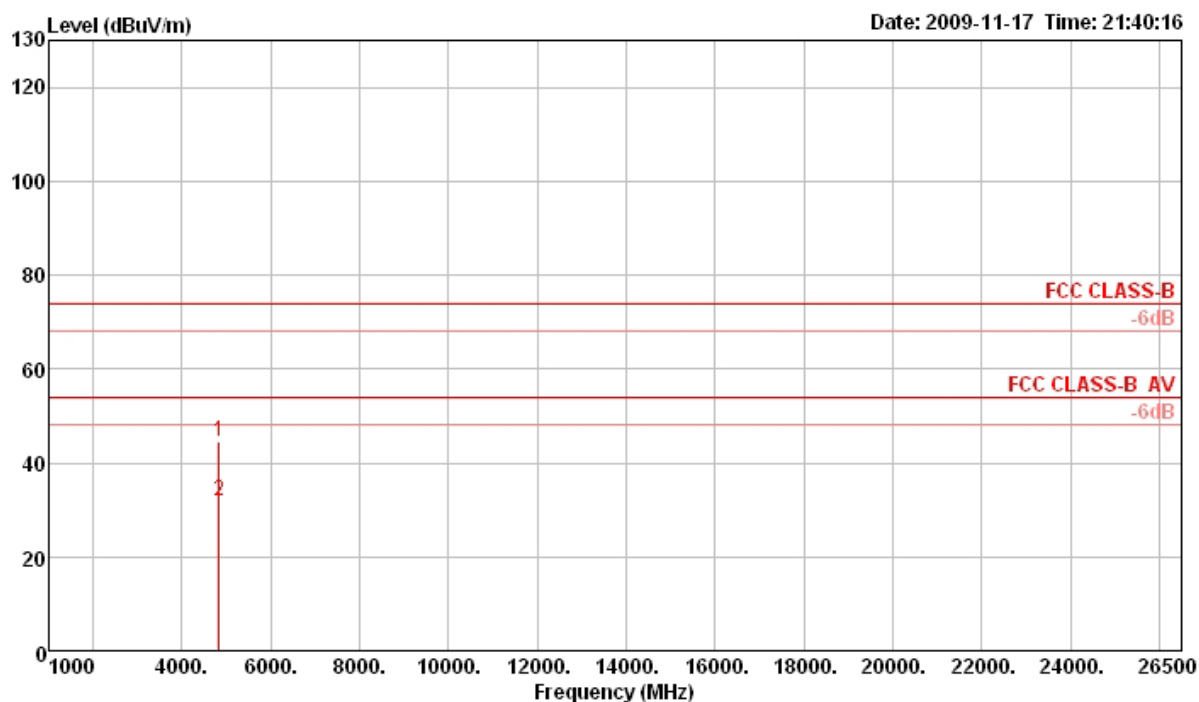

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1 p	4823.57	44.42	74.00	-29.58	42.43	3.96	33.06	35.03	351	98 Peak	HORIZONTAL
2 a	4824.01	31.88	54.00	-22.12	29.89	3.96	33.06	35.03	351	98 Average	HORIZONTAL


Vertical

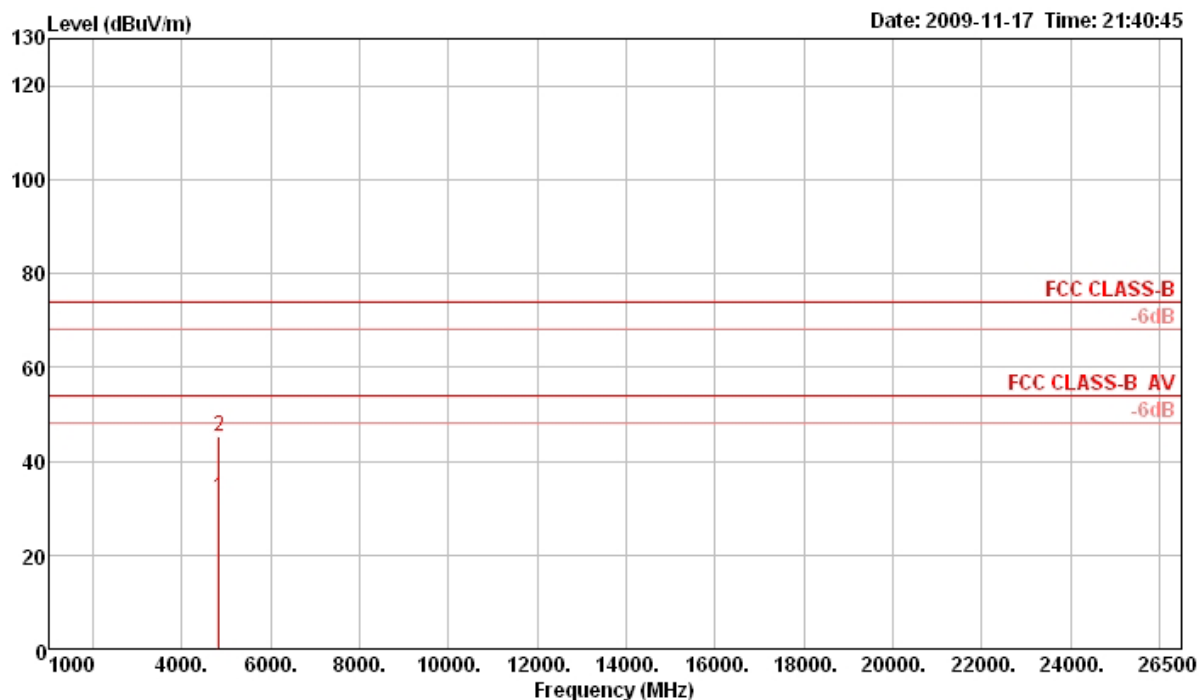

		Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	a	4824.13	32.13	54.00	-21.87	30.14	3.96	33.06	35.03	126	100 Average	VERTICAL
2	p	4824.50	45.26	74.00	-28.74	43.27	3.96	33.06	35.03	126	100 Peak	VERTICAL


Temperature	23°C	Humidity	56%
Test Engineer	Allen Liu	Configurations	IEEE 802.11g CH 6 / Antenna B

Horizontal

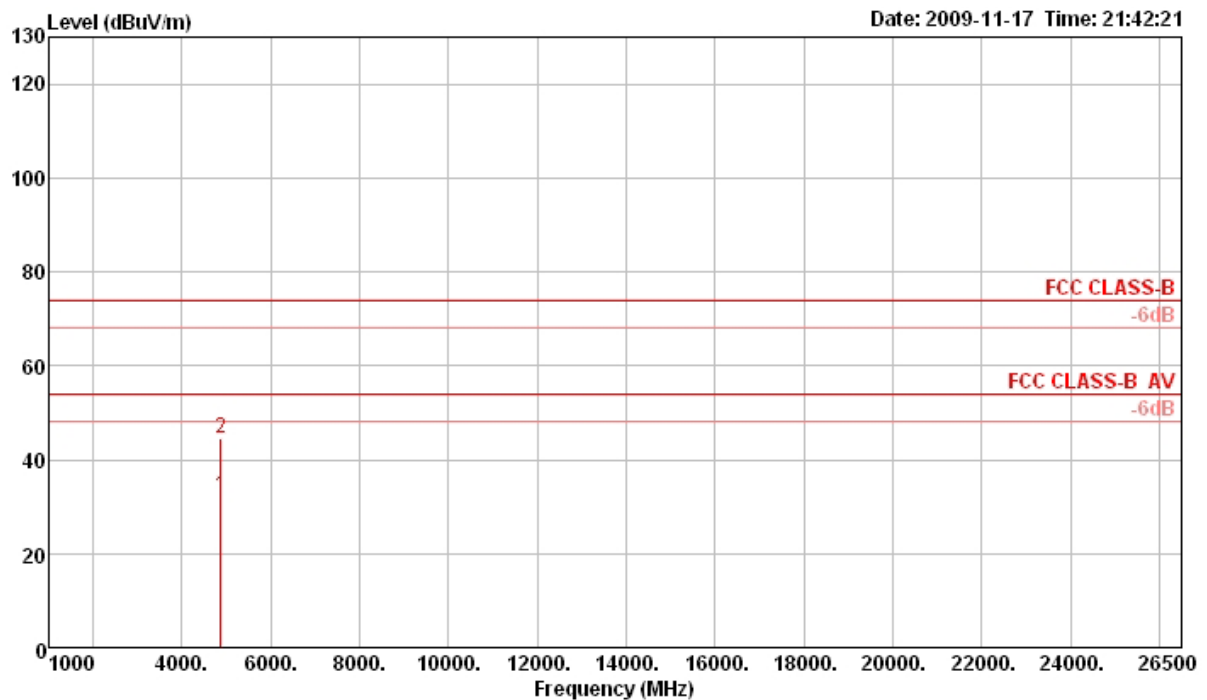

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1 a	4876.11	32.20	54.00	-21.80	30.10	3.97	33.16	35.03	316	100 Average	HORIZONTAL
2 p	4876.27	44.67	74.00	-29.33	42.57	3.97	33.16	35.03	316	100 Peak	HORIZONTAL


Vertical

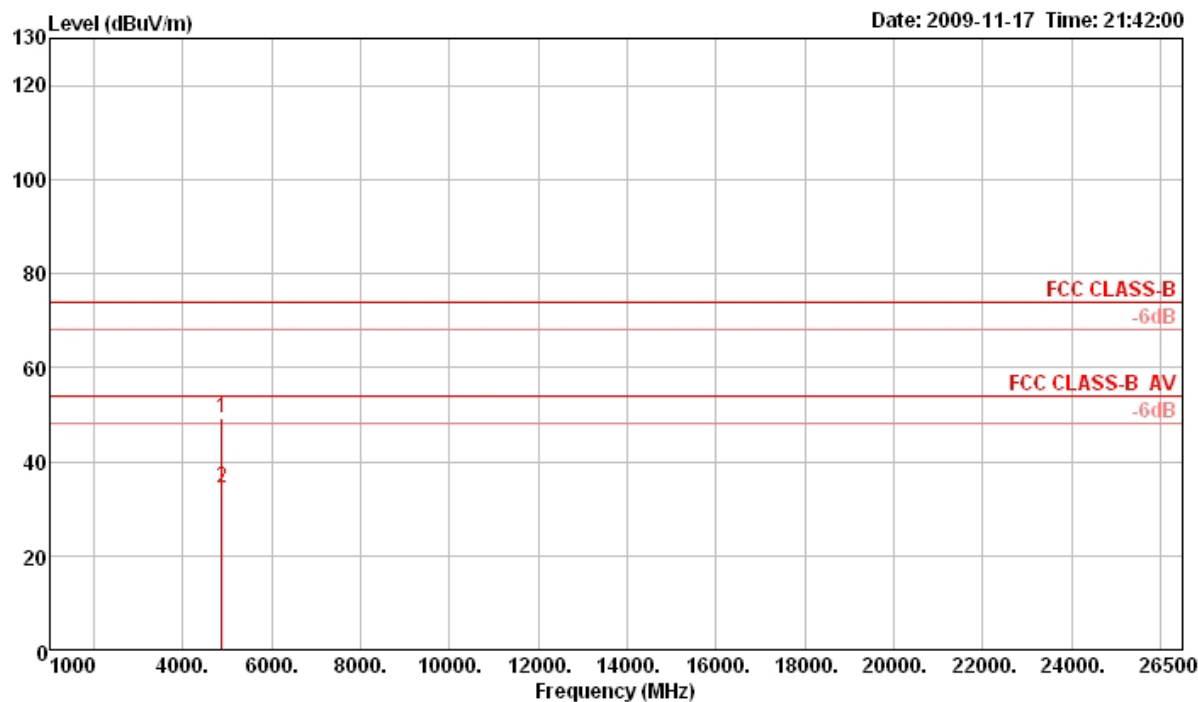

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1 p	4873.48	49.07	74.00	-24.93	46.97	3.97	33.16	35.03	186	103	Peak	VERTICAL
2 a	4874.47	34.28	54.00	-19.72	32.18	3.97	33.16	35.03	186	103	Average	VERTICAL


Temperature	23°C	Humidity	56%
Test Engineer	Allen Liu	Configurations	IEEE 802.11g CH 11 / Antenna B

Horizontal

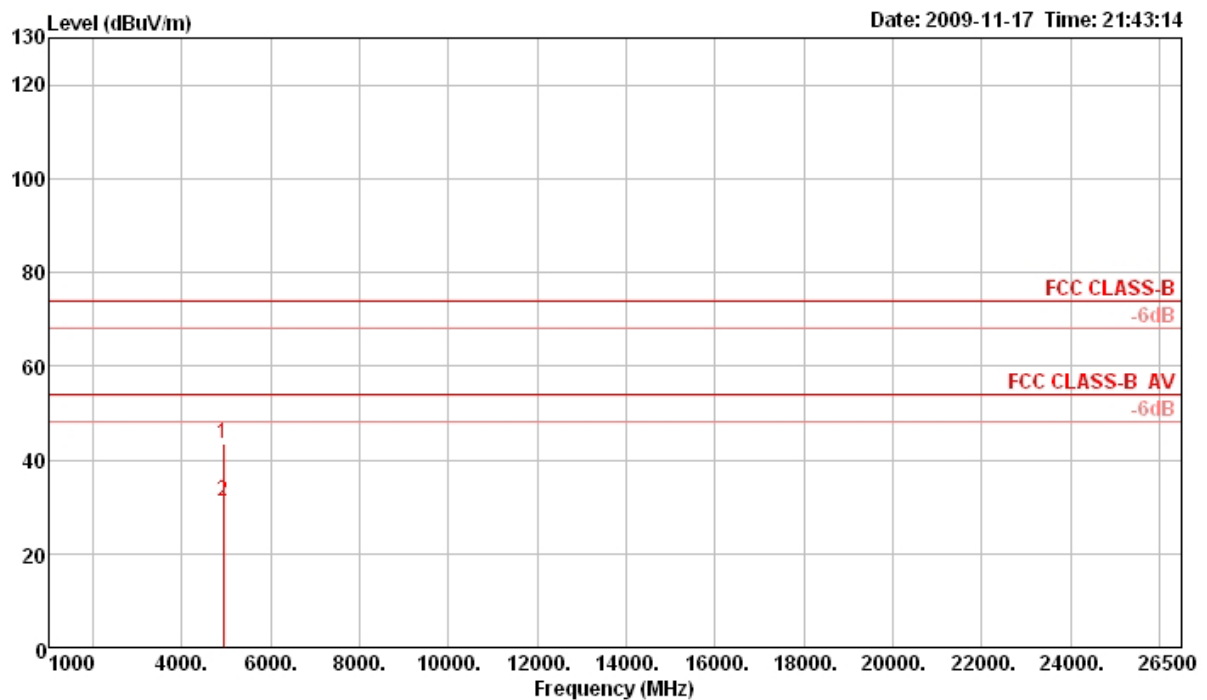

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1 p	4924.24	43.40	74.00	-30.60	41.18	3.97	33.26	35.01	50	100 Peak	HORIZONTAL
2 a	4925.11	31.19	54.00	-22.81	28.97	3.97	33.26	35.01	50	100 Average	HORIZONTAL

Vertical

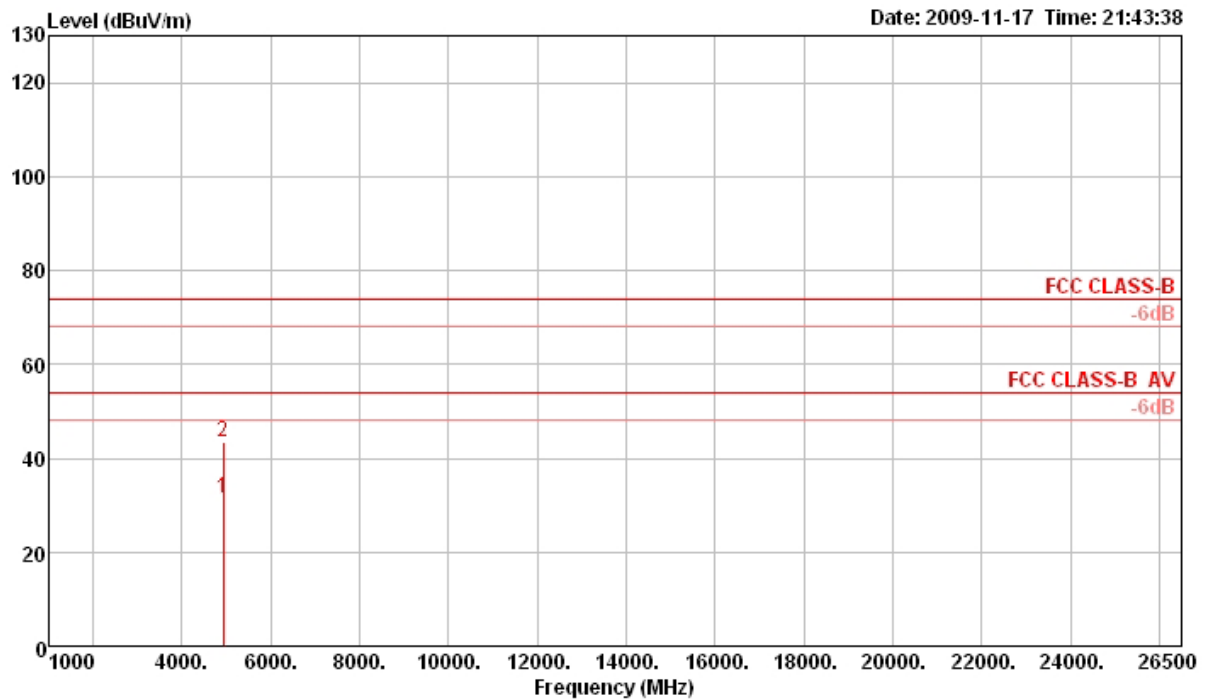

		Freq	Level	Limit	Over	Read	CableAntenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm	
1	a	4921.55	31.35	54.00	-22.65	29.16	3.97	33.23	35.01	237	100 Average	VERTICAL
2	p	4923.23	43.33	74.00	-30.67	41.11	3.97	33.26	35.01	237	100 Peak	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6. Band Edge Emissions Measurement

4.6.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB (Emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	100 KHz /100 KHz for Peak

4.6.3. Test Procedures

1. The test procedure is the same as section 4.5.3, only the frequency range investigated is limited to 100MHz around bandedges.
2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

4.6.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.5.4.

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Test Result of Band Edge and Fundamental Emissions

<For Antenna A>

Temperature	23°C	Humidity	56%
Test Engineer	Allen Liu	Configurations	IEEE 802.11n MCS0 20MHz Ch 1 / Antenna A
Test Date	Nov. 18, 2009		

Channel 1

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 i	2390.00	69.85	74.00	-4.15	38.92	2.88	0.00	28.05	207	166	Peak	HORIZONTAL
2 i	2390.00	52.54	54.00	-1.46	21.61	2.88	0.00	28.05	207	166	Average	HORIZONTAL
3 p	2412.20	109.31	74.00			2.88	0.00	28.09	207	166	Peak	HORIZONTAL
4 a	2413.40	98.46	54.00			2.88	0.00	28.09	207	166	Average	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz

Temperature	23°C	Humidity	56%
Test Engineer	Allen Liu	Configurations	IEEE 802.11n MCS0 20MHz Ch 6 / Antenna A
Test Date	Nov. 18, 2009		

Channel 6

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	2389.80	57.26	74.00	-16.74	26.33	2.88	0.00	28.05	223	132	Peak	HORIZONTAL
2	2390.00	45.94	54.00	-8.06	15.01	2.88	0.00	28.05	223	132	Average	HORIZONTAL
3 p	2437.40	110.26	74.00			2.89	0.00	28.18	223	132	Peak	HORIZONTAL
4 a	2438.40	99.33	54.00			2.89	0.00	28.18	223	132	Average	HORIZONTAL
5	2483.50	45.75	54.00	-8.25	14.56	2.93	0.00	28.26	223	132	Average	HORIZONTAL
6	2484.10	57.32	74.00	-16.68	26.13	2.93	0.00	28.26	223	132	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437MHz.

Temperature	23°C	Humidity	56%
Test Engineer	Allen Liu	Configurations	IEEE 802.11n MCS0 20MHz Ch 11 / Antenna A
Test Date	Nov. 18, 2009		

Channel 11

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	2460.40	100.44	54.00			2.91	0.00	28.22	204	151	Average	HORIZONTAL
2 p	2462.20	110.88	74.00			2.91	0.00	28.22	204	151	Peak	HORIZONTAL
3 i	2483.50	72.30	74.00	-1.70	41.11	2.93	0.00	28.26	204	151	Peak	HORIZONTAL
4 i	2483.50	53.63	54.00	-0.37	22.44	2.93	0.00	28.26	204	151	Average	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	23°C	Humidity	56%
Test Engineer	Allen Liu	Configurations	IEEE 802.11n MCS0 40MHz Ch 3 / Antenna A
Test Date	Nov. 18, 2009		

Channel 3

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 !	2388.80	71.25	74.00	-2.75	40.34	2.86	0.00	28.05	207	164	Peak	HORIZONTAL
2 !	2390.00	53.07	54.00	-0.93	22.14	2.88	0.00	28.05	207	164	Average	HORIZONTAL
3 a	2413.20	93.47	54.00			2.88	0.00	28.09	207	164	Average	HORIZONTAL
4 p	2413.60	104.41	74.00			2.88	0.00	28.09	207	164	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2422 MHz.

Temperature	23°C	Humidity	56%
Test Engineer	Allen Liu	Configurations	IEEE 802.11n MCS0 40MHz Ch 6 / Antenna A
Test Date	Nov. 18, 2009		

Channel 6

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	2388.80	67.03	74.00	-6.97	36.12	2.86	0.00	28.05	207	152	Peak	HORIZONTAL
2 !	2390.00	48.14	54.00	-5.86	17.21	2.88	0.00	28.05	207	152	Average	HORIZONTAL
3 p	2449.00	107.48	74.00			2.91	0.00	28.18	207	152	Peak	HORIZONTAL
4 a	2452.20	96.59	54.00			2.91	0.00	28.22	207	152	Average	HORIZONTAL
5 !	2483.50	71.35	74.00	-2.65	40.16	2.93	0.00	28.26	207	152	Peak	HORIZONTAL
6 !	2483.50	51.87	54.00	-2.13	20.68	2.93	0.00	28.26	207	152	Average	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437MHz.

Temperature	23°C	Humidity	56%
Test Engineer	Allen Liu	Configurations	IEEE 802.11n MCS0 40MHz Ch 9 / Antenna A
Test Date	Nov. 18, 2009		

Channel 9

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 a	2458.00	94.45	54.00			2.91	0.00	28.22	205	178	Average	HORIZONTAL
2 p	2460.00	105.40	74.00			2.91	0.00	28.22	205	178	Peak	HORIZONTAL
3 !	2483.90	73.37	74.00	-0.63	42.18	2.93	0.00	28.26	205	178	Peak	HORIZONTAL
4 !	2483.90	53.91	54.00	-0.09	22.72	2.93	0.00	28.26	205	178	Average	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2452 MHz.

Note: Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	23°C	Humidity	56%
Test Engineer	Allen Liu	Configurations	IEEE 802.11b CH 1 / Antenna A
Test Date	Nov. 18, 2009		

Channel 1

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	2388.00	57.51	74.00	-16.49	26.60	2.86	0.00	28.05	222	132	Peak	HORIZONTAL
2	2390.00	46.82	54.00	-7.18	15.89	2.88	0.00	28.05	222	132	Average	HORIZONTAL
3 a	2409.20	106.45	54.00			2.88	0.00	28.09	222	132	Average	HORIZONTAL
4 p	2411.20	110.50	74.00			2.88	0.00	28.09	222	132	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Temperature	23°C	Humidity	56%
Test Engineer	Allen Liu	Configurations	IEEE 802.11b CH 6 / Antenna A
Test Date	Nov. 18, 2009		

Channel 6

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	2389.80	56.91	74.00	-17.09	25.98	2.88	0.00	28.05	222	129	Peak	HORIZONTAL
2	2390.00	45.83	54.00	-8.17	14.90	2.88	0.00	28.05	222	129	Average	HORIZONTAL
3 a	2434.20	106.87	54.00			2.89	0.00	28.18	222	129	Average	HORIZONTAL
4 p	2436.20	111.15	74.00			2.89	0.00	28.18	222	129	Peak	HORIZONTAL
5	2483.50	45.87	54.00	-8.13	14.68	2.93	0.00	28.26	222	129	Average	HORIZONTAL
6	2485.70	56.84	74.00	-17.16	25.61	2.93	0.00	28.30	222	129	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437MHz.

Temperature	23°C	Humidity	56%
Test Engineer	Allen Liu	Configurations	IEEE 802.11b CH 11 / Antenna A
Test Date	Nov. 18, 2009		

Channel 11

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1 p	2461.20	112.50	74.00			2.91	0.00	28.22	206	153	Peak	HORIZONTAL
2 a	2461.20	108.51	54.00			2.91	0.00	28.22	206	153	Average	HORIZONTAL
3	2486.50	62.13	74.00	-11.87	30.90	2.93	0.00	28.30	206	153	Peak	HORIZONTAL
4 l	2487.10	53.24	54.00	-0.76	22.01	2.93	0.00	28.30	206	153	Average	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	23°C	Humidity	56%
Test Engineer	Allen Liu	Configurations	IEEE 802.11g CH 1 / Antenna A
Test Date	Nov. 18, 2009		

Channel 1

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	2389.60	62.42	74.00	-11.58	31.51	2.86	0.00	28.05	177	100	Peak	HORIZONTAL
2	2390.00	48.41	54.00	-5.59	17.48	2.88	0.00	28.05	177	100	Average	HORIZONTAL
3	2407.40	107.48	74.00			2.88	0.00	28.09	177	100	Peak	HORIZONTAL
4	2413.40	96.00	54.00			2.88	0.00	28.09	177	100	Average	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Temperature	23°C	Humidity	56%
Test Engineer	Allen Liu	Configurations	IEEE 802.11g CH 6 / Antenna A
Test Date	Nov. 18, 2009		

Channel 6

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	2388.80	55.86	74.00	-18.14	24.95	2.86	0.00	28.05	222	130	Peak	HORIZONTAL
2	2390.00	45.77	54.00	-8.23	14.84	2.88	0.00	28.05	222	130	Average	HORIZONTAL
3	2432.40	111.31	74.00			2.89	0.00	28.13	222	130	Peak	HORIZONTAL
4	2438.40	99.71	54.00			2.89	0.00	28.18	222	130	Average	HORIZONTAL
5	2483.50	45.86	54.00	-8.14	14.67	2.93	0.00	28.26	222	130	Average	HORIZONTAL
6	2485.10	56.76	74.00	-17.24	25.53	2.93	0.00	28.30	222	130	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Temperature	23°C	Humidity	56%
Test Engineer	Allen Liu	Configurations	IEEE 802.11g CH 11 / Antenna A
Test Date	Nov. 18, 2009		

Channel 11

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m	deg	cm		
1	2457.40	112.67	74.00			2.91	0.00	28.22	204	151	Peak	HORIZONTAL
2	2460.40	101.14	54.00			2.91	0.00	28.22	204	151	Average	HORIZONTAL
3	2483.50	52.71	54.00	-1.29	21.52	2.93	0.00	28.26	204	151	Average	HORIZONTAL
4	2483.90	70.82	74.00	-3.18	39.63	2.93	0.00	28.26	204	151	Peak	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Note: Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

<For Antenna B>

Temperature	23°C	Humidity	56%
Test Engineer	Allen Liu	Configurations	IEEE 802.11n MCS0 20MHz Ch 1 / Antenna B
Test Date	Nov. 17, 2009		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamplifier Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1 !	2390.00	51.30	54.00	-2.70	20.37	2.76	28.17	0.00	100	100	Average	VERTICAL
2 !	2390.00	72.85	74.00	-1.15	41.92	2.76	28.17	0.00	100	100	Peak	VERTICAL
3 p	2412.60	113.27	74.00			2.77	28.21	0.00	100	100	Peak	VERTICAL
4 a	2413.60	101.76	54.00			2.77	28.21	0.00	100	100	Average	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz

Temperature	23°C	Humidity	56%
Test Engineer	Allen Liu	Configurations	IEEE 802.11n MCS0 20MHz Ch 6 / Antenna B
Test Date	Nov. 17, 2009		

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamplifier Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2389.20	59.11	74.00	-14.89	28.18	2.76	28.17	0.00	104	100	Peak	VERTICAL
2	2389.80	47.31	54.00	-6.69	16.38	2.76	28.17	0.00	104	100	Average	VERTICAL
3 p	2432.60	115.80	74.00			2.78	28.25	0.00	104	100	Peak	VERTICAL
4 a	2435.60	105.27	54.00			2.78	28.29	0.00	104	100	Average	VERTICAL
5	2483.50	47.87	54.00	-6.13	16.69	2.81	28.37	0.00	104	100	Average	VERTICAL
6	2484.70	60.75	74.00	-13.25	29.57	2.81	28.37	0.00	104	100	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2437MHz.

Temperature	23°C	Humidity	56%
Test Engineer	Allen Liu	Configurations	IEEE 802.11n MCS0 20MHz Ch 11 / Antenna B
Test Date	Nov. 17, 2009		

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamplifier Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1 p	2461.80	113.25	74.00			2.80	28.33	0.00	262	98	Peak	VERTICAL
2 a	2465.20	102.47	54.00			2.80	28.33	0.00	262	98	Average	VERTICAL
3 !	2483.50	53.58	54.00	-0.42	22.40	2.81	28.37	0.00	262	98	Average	VERTICAL
4 !	2485.10	73.34	74.00	-0.66	42.12	2.81	28.41	0.00	262	98	Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	23°C	Humidity	56%
Test Engineer	Allen Liu	Configurations	IEEE 802.11n MCS0 40MHz Ch 3 / Antenna B
Test Date	Nov. 17, 2009		

Channel 3

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1 !	2389.60	51.41	54.00	-2.59	20.48	2.76	28.17	0.00	102	100	Average	VERTICAL
2 !	2390.00	73.67	74.00	-0.33	42.74	2.76	28.17	0.00	102	100	Peak	VERTICAL
3 a	2424.40	96.50	54.00			2.77	28.25	0.00	102	100	Average	VERTICAL
4 p	2425.20	107.43	74.00			2.77	28.25	0.00	102	100	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2422 MHz.

Temperature	23°C	Humidity	56%
Test Engineer	Allen Liu	Configurations	IEEE 802.11n MCS0 40MHz Ch 6 / Antenna B
Test Date	Nov. 17, 2009		

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1 !	2389.20	72.98	74.00	-1.02	42.05	2.76	28.17	0.00	104	100	Peak	VERTICAL
2 !	2390.00	52.94	54.00	-1.06	22.01	2.76	28.17	0.00	104	100	Average	VERTICAL
3 a	2434.60	101.28	54.00			2.78	28.29	0.00	104	100	Average	VERTICAL
4 p	2435.40	112.11	74.00			2.78	28.29	0.00	104	100	Peak	VERTICAL
5 !	2483.50	51.84	54.00	-2.16	20.66	2.81	28.37	0.00	104	100	Average	VERTICAL
6 !	2486.30	72.36	74.00	-1.64	41.14	2.81	28.41	0.00	104	100	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2437MHz.

Temperature	23°C	Humidity	56%
Test Engineer	Allen Liu	Configurations	IEEE 802.11n MCS0 40MHz Ch 9 / Antenna B
Test Date	Nov. 17, 2009		

Channel 9

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1 p	2461.80	113.25	74.00			2.80	28.33	0.00	262	98	Peak	VERTICAL
2 a	2465.20	102.47	54.00			2.80	28.33	0.00	262	98	Average	VERTICAL
3 !	2483.50	53.58	54.00	-0.42	22.40	2.81	28.37	0.00	262	98	Average	VERTICAL
4 !	2485.10	73.34	74.00	-0.66	42.12	2.81	28.41	0.00	262	98	Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 2452 MHz.

Note: Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	23°C	Humidity	56%
Test Engineer	Allen Liu	Configurations	IEEE 802.11b CH 1 / Antenna B
Test Date	Nov. 17, 2009		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2386.60	62.41	74.00	-11.59	31.48	2.76	28.17	0.00	103	100	Peak	VERTICAL
2 !	2387.20	53.91	54.00	-0.09	22.98	2.76	28.17	0.00	103	100	Average	VERTICAL
3 p	2413.20	115.22	74.00			2.77	28.21	0.00	103	100	Peak	VERTICAL
4 a	2414.80	111.27	54.00			2.77	28.21	0.00	103	100	Average	VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Temperature	23°C	Humidity	56%
Test Engineer	Allen Liu	Configurations	IEEE 802.11b CH 6 / Antenna B
Test Date	Nov. 18, 2009		

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2387.20	57.16	74.00	-16.84	26.25	2.86	0.00	28.05	20	100	Peak	VERTICAL
2	2390.00	46.47	54.00	-7.53	15.54	2.88	0.00	28.05	20	100	Average	VERTICAL
3 p	2438.20	113.26	74.00			2.89	0.00	28.18	20	100	Peak	VERTICAL
4 a	2439.60	109.55	54.00			2.89	0.00	28.18	20	100	Average	VERTICAL
5	2484.30	46.59	54.00	-7.41	15.40	2.93	0.00	28.26	20	100	Average	VERTICAL
6	2484.90	57.93	74.00	-16.07	26.74	2.93	0.00	28.26	20	100	Peak	VERTICAL

Item 3, 4 are the fundamental frequency at 2437MHz.

Temperature	23°C	Humidity	56%
Test Engineer	Allen Liu	Configurations	IEEE 802.11b CH 11 / Antenna B
Test Date	Nov. 17, 2009		

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1 p	2463.20	113.21	74.00			2.80	28.33	0.00	103	98	Peak	VERTICAL
2 a	2464.80	109.50	54.00			2.80	28.33	0.00	103	98	Average	VERTICAL
3 !	2487.20	53.57	54.00	-0.43	22.35	2.81	28.41	0.00	103	98	Average	VERTICAL
4	2487.90	62.59	74.00	-11.41	31.37	2.81	28.41	0.00	103	98	Peak	VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Temperature	23°C	Humidity	56%
Test Engineer	Allen Liu	Configurations	IEEE 802.11g CH 1 / Antenna B
Test Date	Nov. 17, 2009		

Channel 1

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1 !	2390.00	53.22	54.00	-0.78	22.29	2.76	28.17	0.00	102	99 Average		VERTICAL
2 !	2390.00	72.11	74.00	-1.89	41.18	2.76	28.17	0.00	102	99 Peak		VERTICAL
3 a	2413.40	103.81	54.00			2.77	28.21	0.00	102	99 Average		VERTICAL
4 p	2414.80	114.11	74.00			2.77	28.21	0.00	102	99 Peak		VERTICAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Temperature	23°C	Humidity	56%
Test Engineer	Allen Liu	Configurations	IEEE 802.11g CH 6 / Antenna B
Test Date	Nov. 17, 2009		

Channel 6

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	2389.40	59.09	74.00	-14.91	28.16	2.76	28.17	0.00	103	99 Peak		VERTICAL
2	2389.80	47.41	54.00	-6.59	16.48	2.76	28.17	0.00	103	99 Average		VERTICAL
3 p	2432.40	117.03	74.00			2.78	28.25	0.00	103	99 Peak		VERTICAL
4 a	2435.80	106.06	54.00			2.78	28.29	0.00	103	99 Average		VERTICAL
5 !	2483.50	48.31	54.00	-5.69	17.13	2.81	28.37	0.00	103	99 Average		VERTICAL
6	2484.70	62.13	74.00	-11.87	30.95	2.81	28.37	0.00	103	99 Peak		VERTICAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Temperature	23°C	Humidity	56%
Test Engineer	Allen Liu	Configurations	IEEE 802.11g CH 11 / Antenna B
Test Date	Nov. 17, 2009		

Channel 11

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1 p	2457.40	115.14	74.00			2.80	28.33	0.00	102	98 Peak		VERTICAL
2 a	2465.80	103.82	54.00			2.80	28.33	0.00	102	98 Average		VERTICAL
3 !	2483.50	53.18	54.00	-0.82	22.00	2.81	28.37	0.00	102	98 Average		VERTICAL
4 !	2483.70	72.73	74.00	-1.27	41.55	2.81	28.37	0.00	102	98 Peak		VERTICAL

Item 1, 2 are the fundamental frequency at 2462 MHz.


Note: Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

For Emission not in Restricted Band


<For Antenna A>

Low Band Edge Plot on Configuration IEEE 802.11n MCS0 20MHz / 2412 MHz

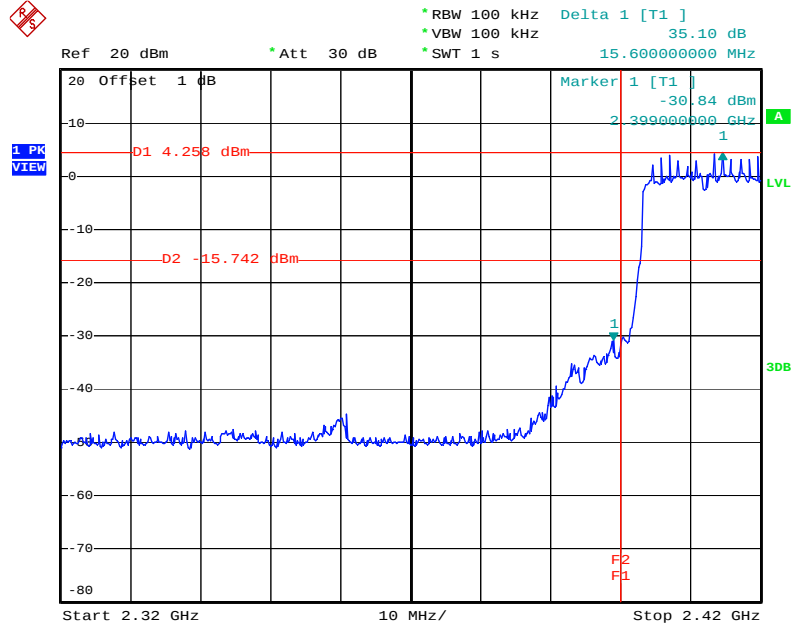


Date: 19.NOV.2009 12:37:01

High Band Edge Plot on Configuration IEEE 802.11n MCS0 20MHz / 2462 MHz

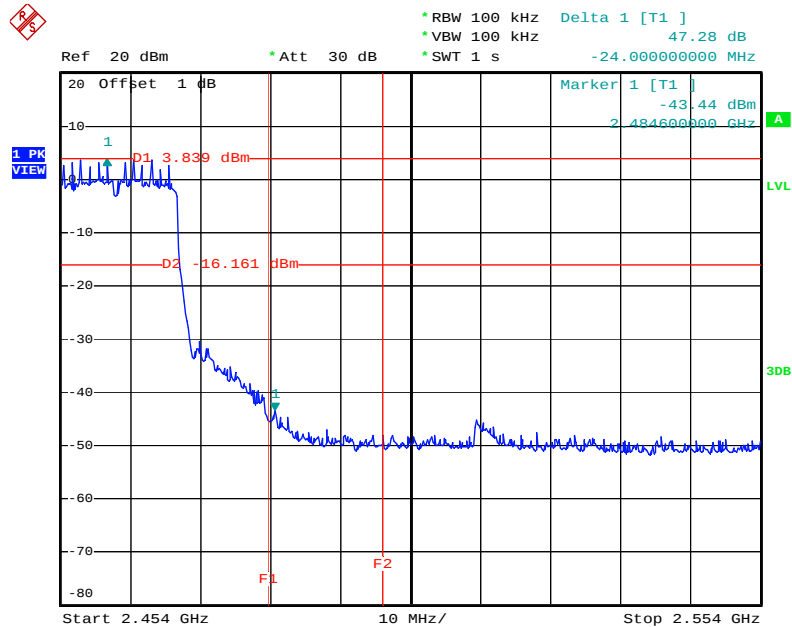


Date: 19.NOV.2009 12:42:08

Low Band Edge Plot on Configuration IEEE 802.11n MCS0 40MHz / 2422 MHz

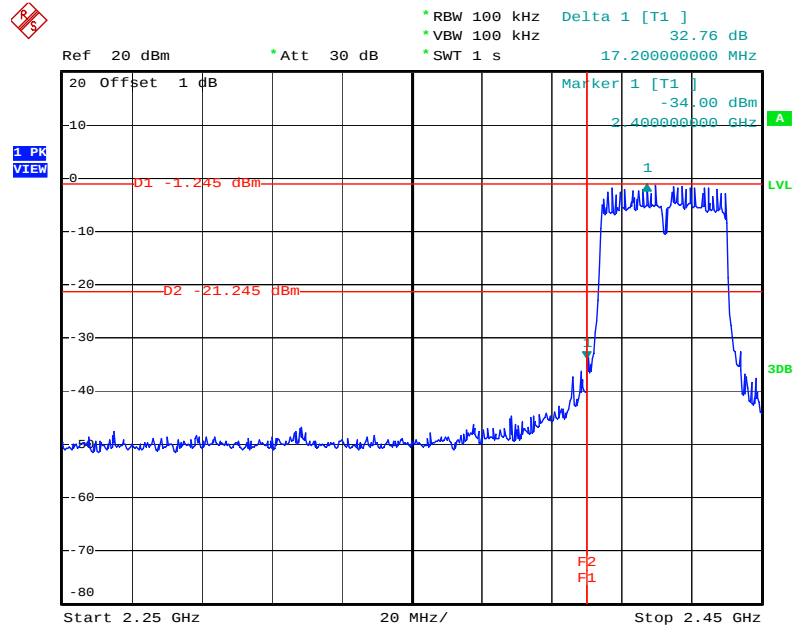


Date: 19.NOV.2009 11:12:39

High Band Edge Plot on Configuration IEEE 802.11n MCS0 40MHz / 2452 MHz

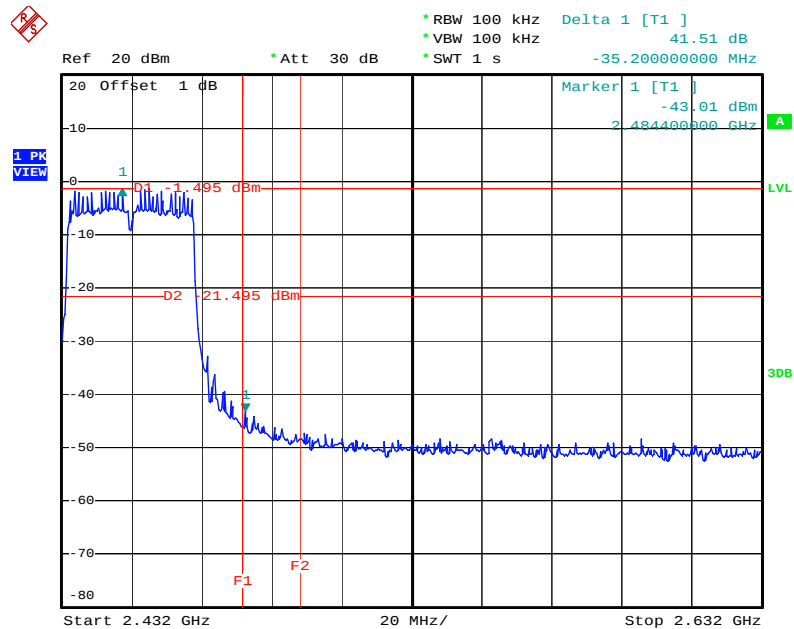


Date: 19.NOV.2009 11:08:21

Low Band Edge Plot on Configuration IEEE 802.11b / 2412 MHz

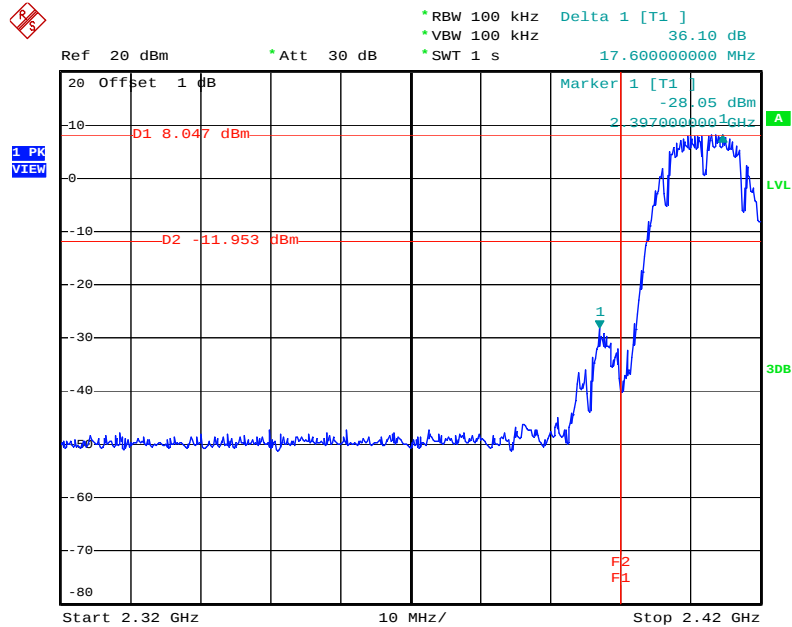


Date: 19.NOV.2009 12:54:13

High Band Edge Plot on Configuration IEEE 802.11b / 2462 MHz

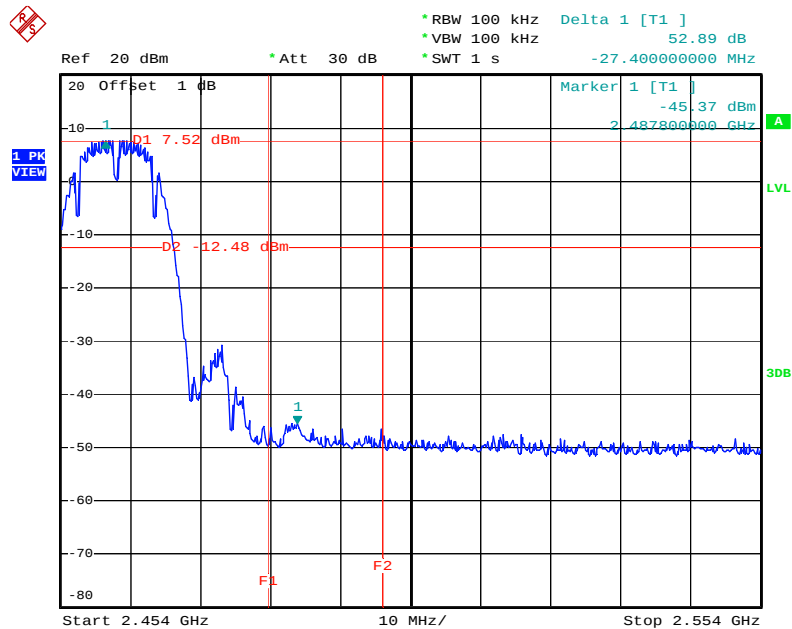


Date: 19.NOV.2009 12:59:32

Low Band Edge Plot on Configuration IEEE 802.11g / 2412 MHz

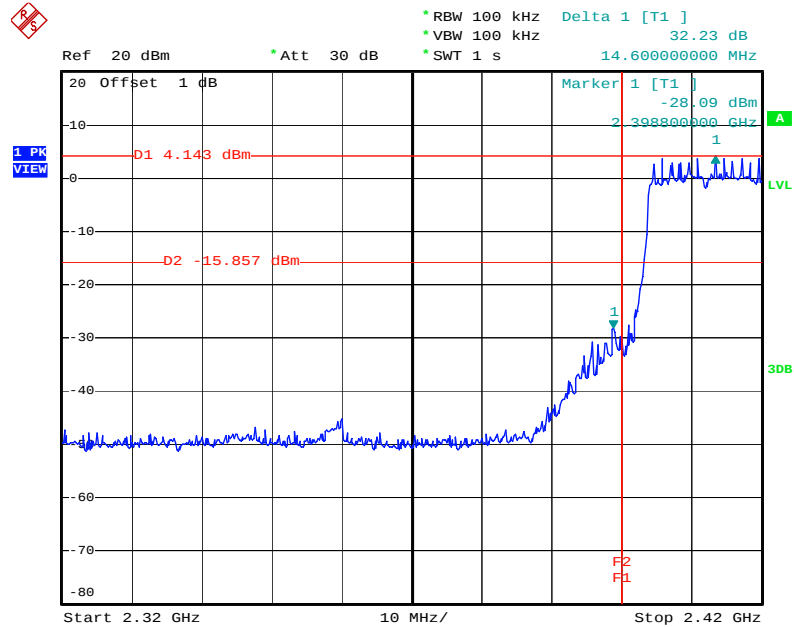

Date: 19.NOV.2009 12:49:11


High Band Edge Plot on Configuration IEEE 802.11g / 2462 MHz

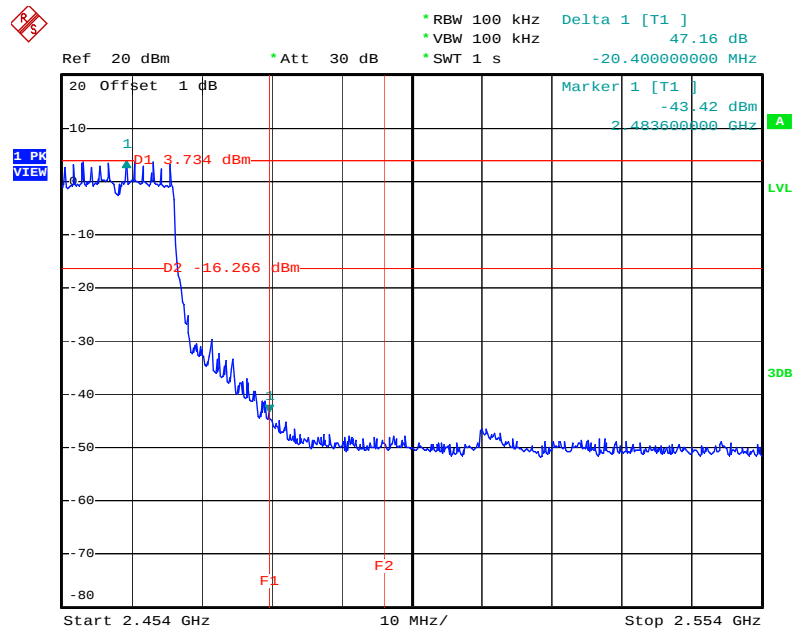

Date: 19.NOV.2009 12:44:23


<For Antenna B>

Low Band Edge Plot on Configuration IEEE 802.11n MCS0 20MHz / 2412 MHz

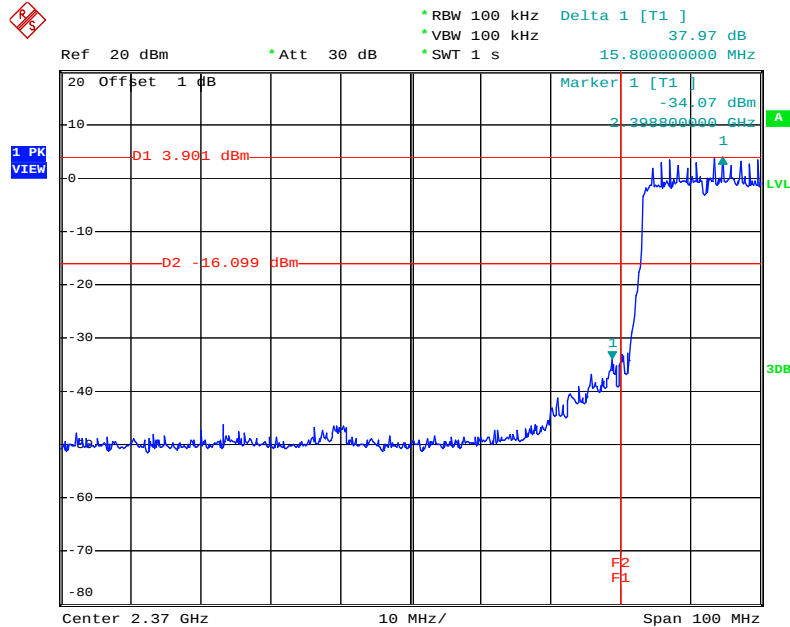


Date: 19.NOV.2009 13:32:40

High Band Edge Plot on Configuration IEEE 802.11n MCS0 20MHz / 2462 MHz

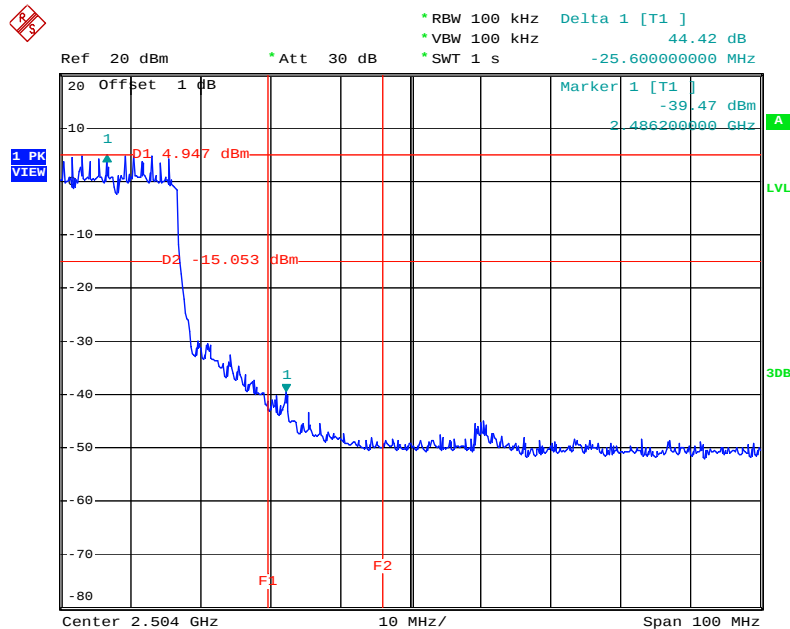


Date: 19.NOV.2009 13:35:20

Low Band Edge Plot on Configuration IEEE 802.11n MCS0 40MHz / 2422 MHz

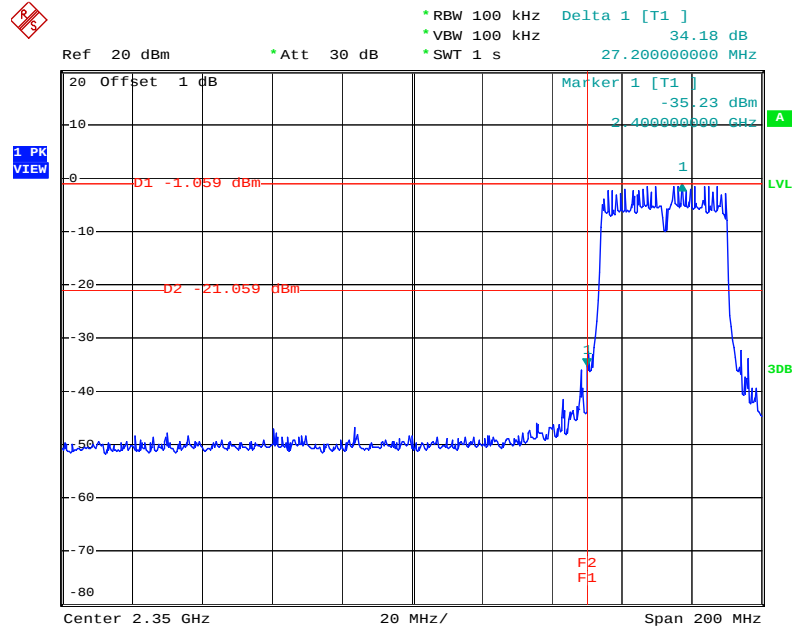


Date: 19.NOV.2009 13:30:15

High Band Edge Plot on Configuration IEEE 802.11n MCS0 40MHz / 2452 MHz

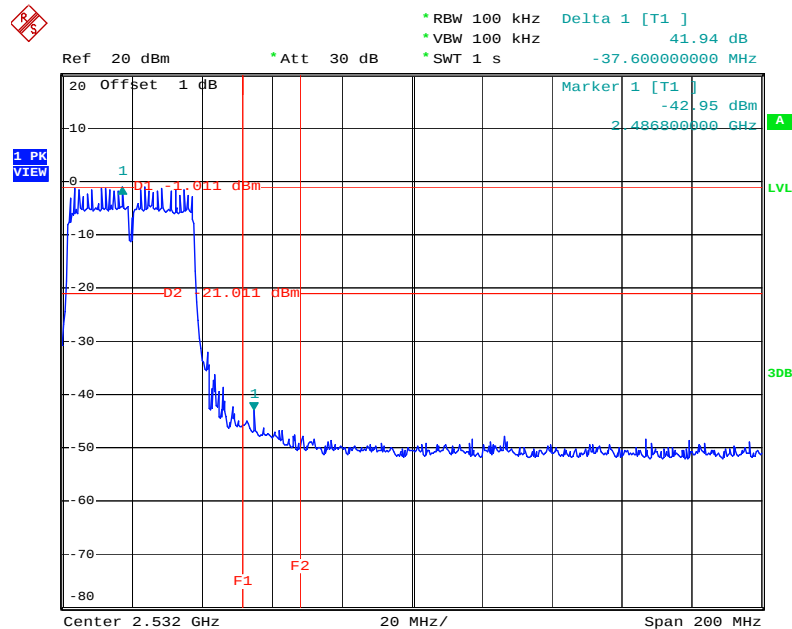


Date: 19.NOV.2009 13:26:45

Low Band Edge Plot on Configuration IEEE 802.11b / 2412 MHz

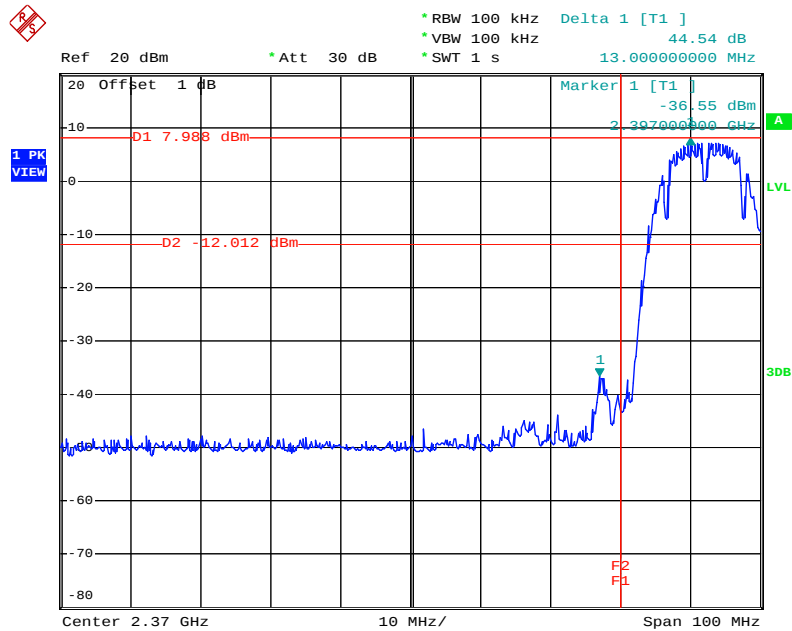


Date: 19.NOV.2009 13:41:43

High Band Edge Plot on Configuration IEEE 802.11b / 2462 MHz

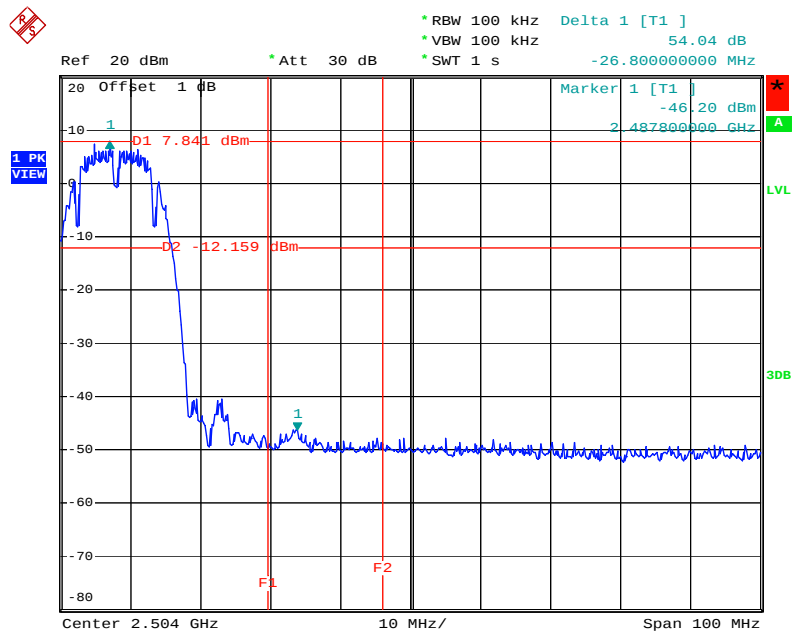


Date: 19.NOV.2009 13:46:14

Low Band Edge Plot on Configuration IEEE 802.11g / 2412 MHz

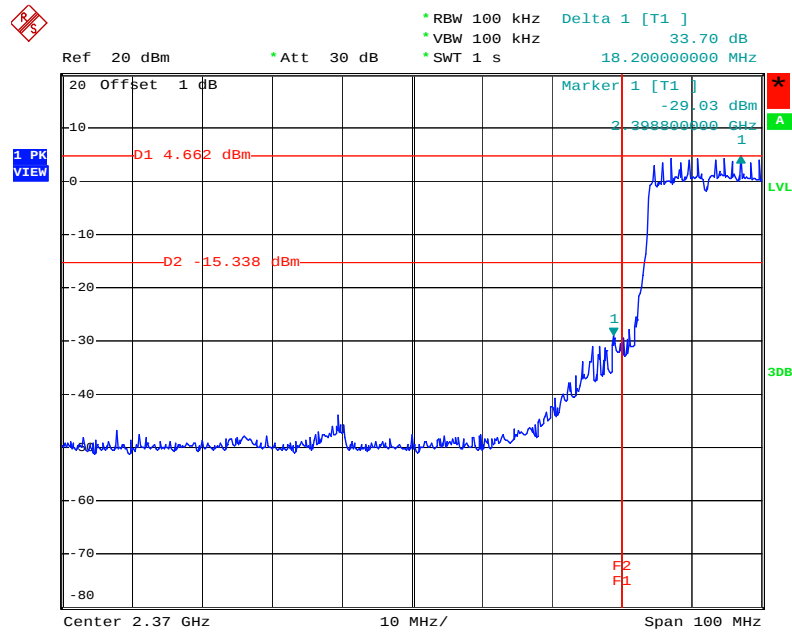

Date: 19.NOV.2009 13:40:49

High Band Edge Plot on Configuration IEEE 802.11g / 2462 MHz

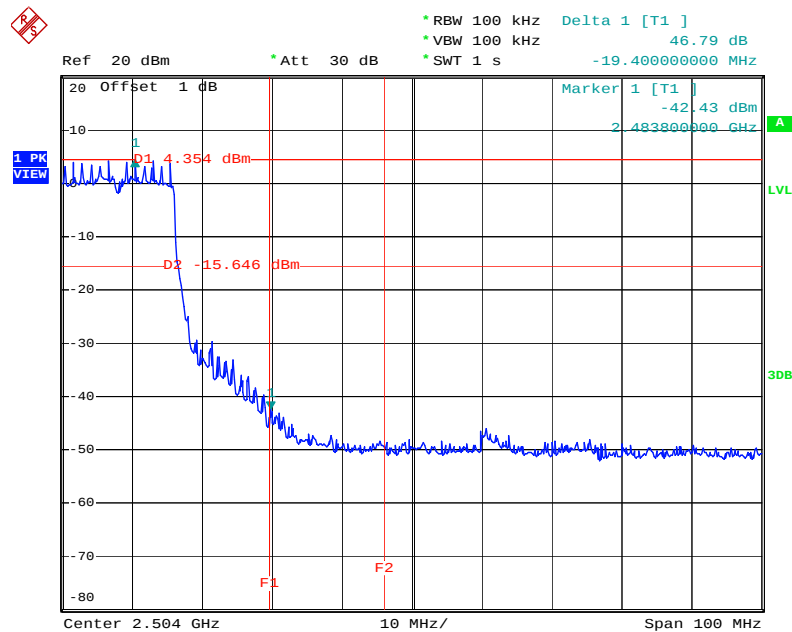

Date: 19.NOV.2009 13:36:19

4.7. Antenna Requirements

4.7.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.7.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz – 2.75GHz	Apr. 15, 2009	Conduction (CO04-HY)
LISN	MessTec	NNB-2/16Z	99079	9kHz – 30MHz	Mar. 23, 2009	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3810/2NM	9703-1839	9kHz – 30MHz	Mar. 22, 2009	Conduction (CO04-HY)
RF Cable-CON	UTIFLEX	3102-26886-4	CB049	9kHz – 30MHz	Apr. 20, 2009	Conduction (CO04-HY)
ISN	SCHAFFNER	ISN T400	21653	9kHz – 30MHz	Jun. 11, 2009	Conduction (CO04-HY)
EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	N/A	Conduction (CO04-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30 MHz - 1 GHz 3m	Jun. 07, 2009	Radiation (03CH03-HY)
Amplifier	SCHAFFNER	COA9231A	18667	9 kHz - 2 GHz	Jan. 23, 2009	Radiation (03CH03-HY)
Amplifier	Agilent	8449B	3008A02120	1 GHz - 26.5 GHz	Jul. 21, 2009	Radiation (03CH03-HY)
Amplifier	MITEQ	AMF-6F-260400	9121372	26.5 GHz - 40 GHz	Apr. 06, 2009*	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSP30	100305	9 kHz - 40 GHz	Feb. 03, 2009	Radiation (03CH03-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz - 30 MHz	Jul. 28, 2008*	Radiation (03CH03-HY)
Bilog Antenna	SCHAFFNER	CBL 6112D	22237	30 MHz – 1 GHz	Sep. 26, 2009	Radiation (03CH03-HY)
Horn Antenna	EMCO	3115	6741	1GHz ~ 18GHz	Apr. 28, 2009	Radiation (03CH03-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15 GHz - 40 GHz	Jan.16, 2009	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30 MHz - 1 GHz	Jan. 05, 2009	Radiation (03CH03-HY)
RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	1 GHz - 40 GHz	Jan. 05, 2009	Radiation (03CH03-HY)
Turn Table	HD	DS 420	420/650/00	0 – 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSU26.5	100015	20Hz ~ 26.5GHz	Oct. 29, 2009	Conducted (TH01-HY)
Power Meter	R&S	NRVS	100444	DC ~ 40GHz	Jul. 31, 2009	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z51	100666	DC ~ 30GHz	Aug. 05, 2009	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z32	100057	30MHz ~ 6GHz	Jul. 31, 2009	Conducted (TH01-HY)
AC Power Source	HPC	HPA-500W	HPA-9100024	AC 0 ~ 300V	Jul. 12, 2009*	Conducted (TH01-HY)
DC Power Source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Mar. 13, 2009	Conducted (TH01-HY)
Temp. and Humidity Chamber	Giant Force	GTH-225-20-S	MAB0103-001	N/A	Aug. 06, 2009	Conducted (TH01-HY)
RF CABLE-1m	Jye Bao	RG142	CB034-1m	20MHz ~ 7GHz	Dec. 01, 2008	Conducted (TH01-HY)
RF CABLE-2m	Jye Bao	RG142	CB035-2m	20MHz ~ 1GHz	Dec. 01, 2008	Conducted (TH01-HY)
Vector Signal Generator	R&S	SMU200A	102098	100kHz ~ 6GHz	Feb. 13, 2009	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Mar. 25, 2009	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.

Note: *Calibration Interval of instruments listed above is two year.

6. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 nd Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

7. TAF CERTIFICATE OF ACCREDITATION



Certificate No. : LI190-070110

財團法人全國認證基金會
Taiwan Accreditation Foundation

Certificate of Accreditation

This is to certify that

Sporton International Inc.
EMC & Wireless Communications Laboratory
No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,
Taiwan, R.O.C.

is accredited in respect of laboratory

Accreditation Criteria	: ISO/IEC 17025:2005
Accreditation Number	: 1190
Originally Accredited	: December 15, 2003
Effective Period	: January 10, 2007 to January 09, 2010
Accredited Scope	: Testing Field, see described in the Appendix
Specific Accreditation Program	: Accreditation Program for Designated Testing Laboratory for Commodities Inspection Accreditation Program for Telecommunication Equipment Testing Laboratory



Jay-San Chen
President, Taiwan Accreditation Foundation
Date : January 10, 2007

P1, total 9 pages

The Appendix forms an integral part of this Certificate, which shall be invalid when used without the Appendix.