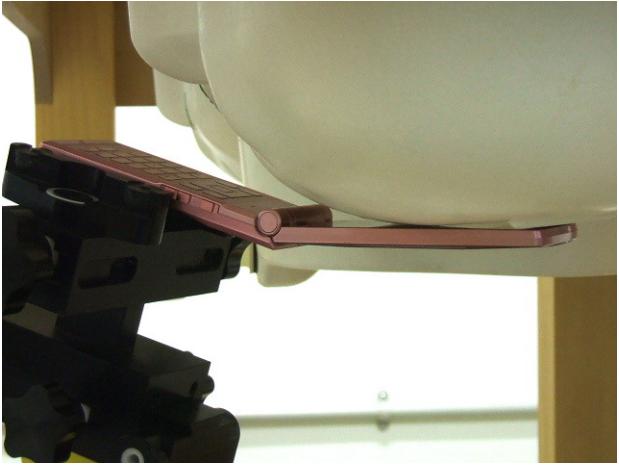
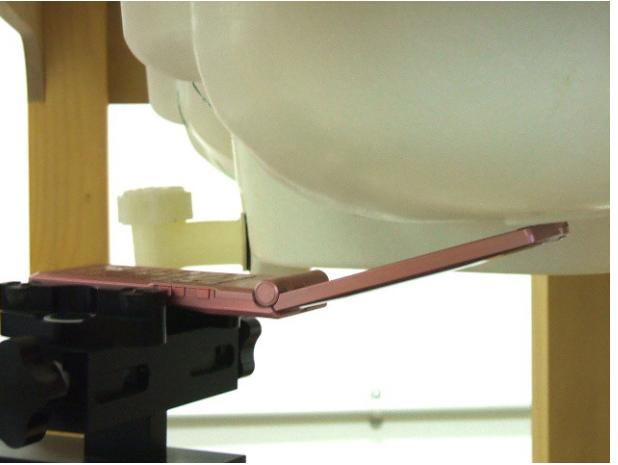
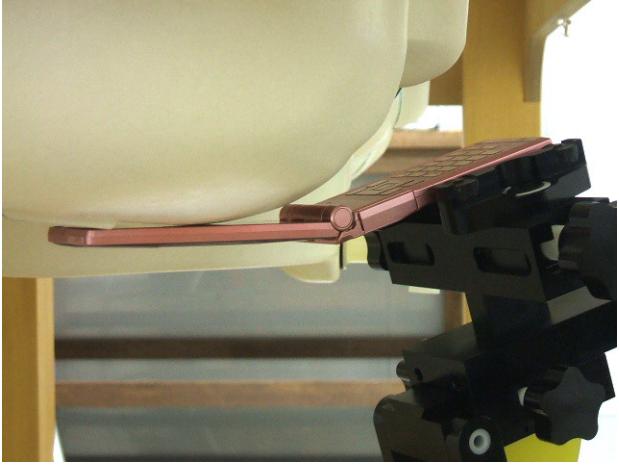
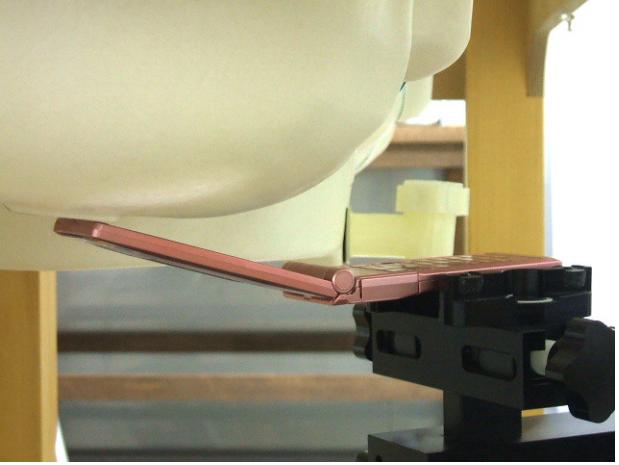
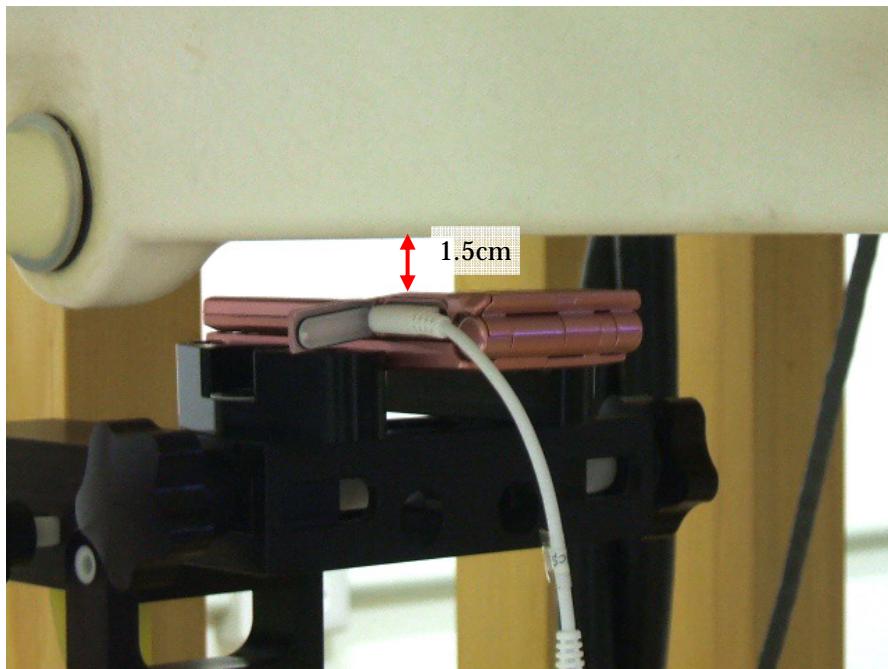


A.3 SAR Measurement Data**A.3.1 Left Head**

								
Cheek/Touch Position		Ear/Tilt Position						
WCDMA Band-V (Duty Cycle: 100 %, Crest Factor: 1)		Date : October 3, 2008						
Test Position	Frequency		Power Drift [dB]					
	Channel	MHz						
Cheek/Touch	4132	826.40	23.22	-0.063	1.6	0.384	22.0	
	4182	836.40	23.27	-0.085		0.350	22.0	
	4233	846.60	23.24	-0.021		0.307	22.0	
Ear/Tilt	4132	826.40	--	--	1.6	**	--	
	4182	836.40	23.27	-0.083		0.143	22.0	
	4233	846.60	--	--		**	--	
NOTES :								
1. Depth of Liquid : 15.0 cm 2. Transmitter power was measured at the antenna-conducted terminal. 3. SAR is measured using a 12.2 kbps RMC. 4. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit. 5. Please refer to attachment for the result presentation in plot format.								

A.3.2 Right Head

								
Cheek/Touch Position		Ear/Tilt Position						
WCDMA Band-V (Duty Cycle: 100 %, Crest Factor: 1)		Date : October 3, 2008						
Test Position	Frequency		Power Drift [dB]					
	Channel	MHz						
Cheek/Touch	4132	826.40	--	--	1.6	**	--	
	4182	836.40	23.27	-0.038		0.321	22.0	
	4233	846.60	--	--		**	--	
Ear/Tilt	4132	826.40	--	--	1.6	**	--	
	4182	836.40	23.27	-0.007		0.149	22.0	
	4233	846.60	--	--		**	--	
NOTES :								
1. Depth of Liquid : 15.0 cm 2. Transmitter power was measured at the antenna-conducted terminal. 3. SAR is measured using a 12.2 kbps RMC. 4. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit. 5. Please refer to attachment for the result presentation in plot format.								

A.3.3 Body-worn Position

WCDMA Band-V (Duty Cycle: 100 %, Crest Factor: 1)

Date : October 1, 2008

Separation Distance	Frequency		Tx Power [dBm]	Power Drift [dB]	Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
	Channel	MHz					
1.5 cm	4132	826.40	23.22	-0.005	1.6	0.399	22.0
	4182	836.40	23.27	-0.004		0.484	22.0
	4233	846.60	23.24	-0.022		0.435	22.0

NOTES :

1. Depth of Liquid : 15.0 cm
2. Transmitter power was measured at the antenna-conducted terminal.
3. SAR is measured using a 12.2 kbps RMC.
4. The earphone wire connected to the EUT to simulate hand-free operation in a body-worn configuration.
5. Please refer to attachment for the result presentation in plot format.