

SAR TEST REPORT (FOR MOBILE)

REPORT NO.: SA990129L07-1

MODEL NO.: F-06B

RECEIVED: Feb. 01, 2010

TESTED: Feb. 25 ~ Feb. 27, 2010

ISSUED: Mar. 04, 2010

APPLICANT: FUJITSU LIMITED

ADDRESS: 1-1, Kamikodanaka 4-chome, Nakahara-ku, Kawasaki

211-8588, Japan

ISSUED BY: Bureau Veritas Consumer Products Services (H.K.)

Ltd., Taoyuan Branch

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou Hsiang,

Taipei Hsien 244, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei Shan

Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This test report consists of 49 pages in total except Appendix. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.







TABLE OF CONTENTS

1.	CERTIFICATION	3
2.	GENERAL INFORMATION	4
2.1	GENERAL DESCRIPTION OF EUT	4
2.2	SAR MEASUREMENT CONDITIONS FOR WCDMA	6
2.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	8
2.4	GENERAL INOFRMATION OF THE SAR SYSTEM	9
2.5	GENERAL DESCRIPTION OF THE SPATIAL PEAK SAR EVALUATION	12
3.	DESCRIPTION OF SUPPORT UNITS	
4.	DESCRIPTION OF TEST POSITION	17
4.1	DESCRIPTION OF TEST POSITION	17
4.1.1	TOUCH/CHEEK TEST POSITION	18
4.1.2	TILT TEST POSITION	19
4.1.3	BODY-WORN CONFIGURATION	19
4.2	DESCRIPTION OF TEST MODE	20
4.3	SUMMARY OF TEST RESULTS	21
5.	TEST RESULTS	22
5.1	TEST PROCEDURES	22
5.2	MEASURED SAR RESULTS	24
5.3	SAR LIMITS	28
5.4	RECIPES FOR TISSUE SIMULATING LIQUIDS	29
5.5	TEST EQUIPMENT FOR TISSUE PROPERTY	36
6.	SYSTEM VALIDATION	37
6.1	TEST EQUIPMENT	37
6.2	TEST PROCEDURE	38
6.3	VALIDATION RESULTS	40
6.4	SYSTEM VALIDATION UNCERTAINTIES	41
7.	MEASUREMENT SAR PROCEDURE UNCERTAINTIES	
7.1	PROBE CALIBRATION UNCERTAINTY	42
7.2	ISOTROPY UNCERTAINTY	43
7.3	BOUNDARY EFFECT UNCERTAINTY	43
7.4	PROBE LINEARITY UNCERTAINTY	44
7.5	READOUT ELECTRONICS UNCERTAINTY	44
7.6	RESPONSE TIME UNCERTAINTY	44
7.7	INTEGRATION TIME UNCERTAINTY	
7.8	PROBE POSITIONER MECHANICAL TOLERANCE	
7.9	PROBE POSITIONING	
7.10	PHANTOM UNCERTAINTY	47
7.11	DASY4 UNCERTAINTY BUDGET	
8.	INFORMATION ON THE TESTING LABORATORIES	49
APPE	NDIX A: TEST DATA	
	NDIX B: ADT SAR MEASUREMENT SYSTEM	
	NDIX C: PHOTOGRAPHS OF SYSTEM VALIDATION	
APPE	NDIX D: SYSTEM CERTIFICATE & CALIBRATION	



1. CERTIFICATION

PRODUCT: Mobile phone

MODEL: F-06B BRAND: FOMA

APPLICANT: FUJITSU LIMITED

TESTED: Feb. 25 ~ Feb. 27, 2010

TEST SAMPLE: ENGINEERING SAMPLE

STANDARDS: FCC Part 2 (Section 2.1093)

FCC OET Bulletin 65, Supplement C (01-01)

RSS-102

The above equipment (model: F-06B) have been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : , DATE : Mar. 04, 2010

Joanna Wang / Senior Specialist

TECHNICAL

ACCEPTANCE : Mar. 04, 2010

Responsible for RF Mason Chang / Engineer , DATE : Mar. 04, 2010

APPROVED BY : (**App.** (**DATE** : Mar. 04, 2010

Gary Chang / Assistant Manager



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

EUT	Mobile phone
MODEL NO.	F-06B
POWER SUPPLY	3.7Vdc (Li-ion battery)
POWER SUPPLY	5.4Vdc (Adapter)
CLASSIFICATION	Portable device, production unit
MODULATION TYPE	GMSK / BPSK
	Tx Frequency:
	824.2MHz ~ 848.8MHz (850MHz band)
EDECLIENCY BANCE	1850.2MHz ~ 1909.8MHz (1900MHz band)
FREQUENCY RANGE	Rx Frequency:
	869.2MHz ~ 893.8MHz (850MHz band)
	1930.2MHz ~ 1989.8MHz (1900MHz band)
	WCDMA 850 band:
	23.72dBm / 826.4MHz for channel 4132
	23.61dBm / 836.4MHz for channel 4182
	23.09dBm / 846.6MHz for channel 4233
CHANNEL FREQUENCIES	PCS 1900 band:
UNDER TEST AND ITS	29.98dBm / 1850.2MHz for channel 512
CONDUCTED OUTPUT	29.71dBm / 1880.0MHz for channel 661
POWER	29.93dBm / 1909.8MHz for channel 810
	PCS 1900 GPRS TS1:
	29.98dBm / 1850.2MHz for channel 512
	29.76dBm / 1880.0MHz for channel 661
	29.94dBm / 1909.8MHz for channel 810
MAVIMUM CAD (4 %)	Head: 0.380W/kg
MAXIMUM SAR (1g)	Body: 0.511W/kg
	850MHz: Integral antenna with -4dBi gain (EUT Open)
MAX. ANTENNA GAIN	Integral antenna with -4dBi gain (EUT Close)
MAX. ANTENNA GAIN	1900MHz: Integral antenna with -3dBi gain (EUT Open)
	Integral antenna with -3dBi gain (EUT Close)
DATA CABLE	NA
I/O PORTS	Refer to user's manual
ACCESSORY DEVICES	Battery



NOTE:

1. The EUT uses the following Li-ion battery:

BRAND	Fujitsu Limited
MODEL	N/A
RATING	3.7Vdc, 900mAh

2. The following accessories are for support units only.

PRODUCT	BRAND	DESCRIPTION
Power supply adapter	SIVIK	I/P: 100-240Vac, 50-60Hz, 0.12A O/P: 5.4Vdc, 700mA

3. The EUT is a Mobile phone. The functions of EUT listed as below:

	REFERENCE REPORT	
WLAN 802.11b/g	SA990129L07	
WCDMA 850	SA990129L07-1	
PCS 1900 / PCS 1900 GPRS TS1	SA990129L07-1	
WLAN + MOBILE (CO-LOCATED)	SA990129L07-2	

4. The communicated functions of EUT listed as below:

		850MHz	1900MHz	
	GSM		$\sqrt{}$	
2G	GPRS		$\sqrt{}$	With 802.11b/g
	EDGE		$\sqrt{}$	function
	WCDMA	$\sqrt{}$		Turionon
3G	Release 5 HSDPA	V		

5. IMEI Code: 35316903****** (*=0-9)

6. Hardware version: V2.17. Software version: R18.2

8. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.



2.2 SAR MEASUREMENT CONDITIONS FOR WCDMA

The following procedures were followed according to FCC "SAR Measurement Procedure for 3G Devices", October 2007.

Ø WCDMA Handsets

The following procedures are applicable to WCDMA handsets operating under 3GPP Release 99, Release 5 and Release 6.19 The default test configuration is to measure SAR with an established radio link between the DUT and a communication test set using a 12.2 kbps RMC (reference measurement channel) configured in Test Loop Mode 1. SAR is selectively confirmed for other physical channel configurations (DPCCH & DPDCHn), HSDPA and HSPA (HSUPA/HSDPA) modes according to output power, exposure conditions and device operating capabilities. Both uplink and downlink should be configured with the same RMC or AMR, when required. SAR for Release 5 HSDPA and Release 6 HSPA are measured using the applicable FRC (fixed reference channel) and E-DCH reference channel configurations. Maximum output power is verified according to applicable versions of 3GPP TS 34.121 and SAR must be measured according to these maximum output conditions. When Maximum Power Reduction (MPR) is not implemented according to Cubic Metric (CM) requirements for Release 6 HSPA, the following procedures do not apply.

Ø Output Power Verification

Maximum output power is verified on the High, Middle and Low channels according to the procedures described in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC (transmit power control) set to all "1's" for WCDMA/HSDPA or applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HSDPA, HSPA) should be tabulated in the SAR report. All configurations that are not supported by the DUT or cannot be measured due to technical or equipment limitations should be clearly identified.

Ø Head SAR Measurements

SAR for head exposure configurations in voice mode is measured using a 12.2 kbps RMC with TPC bits configured to all "1's". SAR in AMR configurations is not required when the maximum average output of each RF channel for 12.2 kbps AMR is less than ¼ dB higher than that measured in 12.2 kbps RMC. Otherwise, SAR is measured on the maximum output channel in 12.2 kbps AMR with a 3.4 kbps SRB (signaling radio bearer) using the exposure configuration that results in the highest SAR in 12.2 kbps RMC for that RF channel.



Ø Body SAR Measurements

SAR for body exposure configurations in voice and data modes is measured using a 12.2 kbps RMC with TPC bits configured to all "1's". SAR for other spreading codes and multiple DPDCHn, when supported by the DUT, are not required when the maximum average output of each RF channel, for each spreading code and DPDCHn configuration, are less than ¼ dB higher than those measured in 12.2 kbps RMC. Otherwise, SAR is measured on the maximum output channel with an applicable RMC configuration for the corresponding spreading code or DPDCHn using the exposure configuration that results in the highest SAR with 12.2 kbps RMC. When more than 2 DPDCHn are supported by the DUT, it may be necessary to configure additional DPDCHn for a DUT using FTM (Factory Test Mode) or other chipset based test approaches with parameters similar to those used in 384 kbps and 768 kbps RMC.

Ø Release 5 HSDPA Data Devices

The following procedures are applicable to HSDPA data devices operating under 3GPP Release 5. Body exposure conditions are typically required for these devices, including handsets and data modems operating in various electronic devices. HSDPA operates in conjunction with WCDMA and requires an active DPCCH. The default test configuration is to measure SAR in WCDMA without HSDPA, with an established radio link between the DUT and a communication test set using a 12.2 kbps RMC (reference measurement channel) configured in Test Loop Mode 1. SAR for HSDPA is selectively measured using the highest SAR configuration in WCDMA with an FRC (fixed reference channel) in H-set 1 and a 12.2 kbps RMC. SAR is selectively confirmed for other physical channel configurations (DPCCH & DPDCHn) according to output power, exposure conditions and device operating capabilities. Maximum output power is verified according to the applicable versions of 3GPP TS 34.121 and SAR must be measured according to these maximum output conditions. The DUT must be tested according to its UE Category and explained in the SAR report.

Ø Output Power Verification

Maximum output power is verified on the High, Middle and Low channels according to the Release 5 procedures described in section 5.2 of 3GPP TS 34.121, using an FRC with H-set 1 and a 12.2 kbps RMC with TPC (transmit power control) set to all "1's". When HSDPA is active output power is measured according requirements for HS-DPCCH Sub-test 1 - 4. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HS-DPCCH etc.), with and without HSDPA active, should be tabulated in the SAR report. All configurations that are not supported by the DUT or cannot be measured due to technical or equipment limitations should be clearly identified in the SAR report.



Ø SAR Measurements

When voice transmission and head exposure conditions are applicable to a WCDMA/HSDPA data device, head exposure is measured according to the 'Head SAR Measurements' procedures in the 'WCDMA Handsets' section of this document. SAR for body exposure configurations is measured according to the 'Body SAR Measurements' procedures of that section. In <u>addition</u>, body SAR is also measured for HSDPA when the maximum average output of each RF channel with HSDPA active is at least ¼ dB higher than that measured without HSDPA using 12.2 kbps RMC or the maximum SAR for 12.2 kbps RMC is above 75% of the SAR limit. Body SAR for HSDPA is measured using an FRC with H-Set 1 in Sub-test 1 and a 12.2 kbps RMC configured in Test Loop Mode 1, using the highest body SAR configuration in 12.2 kbps RMC without HSDPA.

2.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to the specifications of the manufacturer, this product must comply with the requirements of the following standards:

FCC 47 CFR Part 2 (2.1093)

FCC OET Bulletin 65, Supplement C (01-01)

RSS-102

IEEE 1528-2003

All test items have been performed and recorded as per the above standards.



2.4 GENERAL INOFRMATION OF THE SAR SYSTEM

DASY4 (software 4.7 Build 80) consists of high precision robot, probe alignment sensor, phantom, robot controller, controlled measurement server and near-field probe. The robot includes six axes that can move to the precision position of the DASY4 software defined. The DASY4 software can define the area that is detected by the probe. The robot is connected to controlled box. Controlled measurement server is connected to the controlled robot box. The DAE includes amplifier, signal multiplexing, AD converter, offset measurement and surface detection. It is connected to the Electro-optical coupler (ECO). The ECO performs the conversion form the optical into digital electric signal of the DAE and transfers data to the PC.

EX3DV4 ISOTROPIC E-FIELD PROBE

CONSTRUCTIONSymmetrical design with triangular core Built-in shielding against static charges

PEEK enclosure material (resistant to organic solvents, e.g., DGBE)

FREQUENCY 10 MHz > 6 GHz

Linearity: ± 0.2 dB (30 MHz to 6 GHz)

DIRECTIVITY ± 0.3 dB in HSL (rotation around probe axis)

± 0.5 dB in tissue material (rotation normal to probe axis)

DYNAMIC RANGE 10 μ W/g to > 100 mW/g

Linearity: \pm 0.2 dB (noise: typically < 1 μ W/g)

DIMENSIONSOverall length: 330 mm (Tip: 20 mm)

Tip diameter: 2.5 mm (Body: 12 mm)

Typical distance from probe tip to dipole centers: 1 mm

APPLICATION High precision dosimetric measurements in any exposure scenario

(e.g., very strong gradient fields). Only probe which enables

compliance testing for frequencies up to 6 GHz with precision of better

30%.

NOTE

- 1. The Probe parameters have been calibrated by the SPEAG. Please reference "APPENDIX D" for the Calibration Certification Report.
- 2. For frequencies above 800MHz, calibration in a rectangular wave-guide is used, because wave-guide size is manageable.
- 3. For frequencies below 800MHz, temperature transfer calibration is used because the wave-guide size becomes relatively large.



TWIN SAM V4.0

CONSTRUCTION The shell corresponds to the specifications of the Specific

Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528-2003, CENELEC 50361 and IEC 62209. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points with the robot.

SHELL THICKNESS 2 ± 0.2 mm

FILLING VOLUME Approx. 25 liters

DIMENSIONS Height: 810 mm; Length: 1000 mm; Width: 500 mm

SYSTEM VALIDATION KITS:

Symmetrical dipole with I/4 balun

Enables measurement of feedpoint impedance with NWA **CONSTRUCTION**

Matched for use near flat phantoms filled with brain simulating

solutions

Includes distance holder and tripod adaptor

Calibrated SAR value for specified position and input power at the **CALIBRATION**

flat phantom in brain simulating solutions

FREQUENCY 835, 1900

RETURN LOSS > 20 dB at specified validation position

POWER

> 100 W (f < 1 GHz); > 40 W (f > 1 GHz)**CAPABILITY**

Dipoles for other frequencies or solutions and other calibration **OPTIONS**

conditions upon request



DEVICE HOLDER FOR SAM TWIN PHANTOM

GSM/GPRS/CDMA Mobile Phone device is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles. The holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity ε =3 and loss tangent δ =0.02. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered. The device holder for the portable device makes up of the polyethylene foam. The dielectric parameters of

The device holder for the GSM900/DCS1800/PCS1900

material close to the dielectric parameters of the air.

CONSTRUCTION

DATA ACQUISITION ELECTRONICS

CONSTRUCTION

The data acquisition electronics (DAE3) consists of a highly sensitive electrometer grade preamplifier with auto-zeroing, a channel and gain-switching multiplex, a fast 16 bit AD converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock. The mechanical probe is mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection. The input impedance of the DAE3 box is 200MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



2.5 GENERAL DESCRIPTION OF THE SPATIAL PEAK SAR EVALUATION

The DASY4 post-processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the micro-volt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters: - Sensitivity Norm_i, a_{i0}, a_{i1}, a_{i2}

Conversion factor ConvF_i
 Diode compression point dcp_i
 Frequency F

- Crest factor Cf

Media parameters: - Conductivity σ

Device parameters:

- Density ρ

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \bullet \frac{cf}{dcp_i}$$

 V_i =compensated signal of channel i (i = x, y, z) U_i =input signal of channel I (i = x, y, z)

Cf =crest factor of exciting field (DASY parameter) dcp_i =diode compression point (DASY parameter)



From the compensated input signals the primary field data for each channel can be evaluated:

E-fieldprobes:
$$E_i = \sqrt{\frac{V_1}{Norm_i \cdot ConvF}}$$

H-fieldprobes:
$$H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

 V_i =compensated signal of channel I (i = x, y, z)

Norm_i =sensor sensitivity of channel i $\mu V/(V/m)2$ for (i = x, y, z)

E-field Probes

ConvF = sensitivity enhancement in solution

a_{ii} = sensor sensitivity factors for H-field probes

F = carrier frequency [GHz]

E_i = electric field strength of channel i in V/mH_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{S}{r \cdot 1'000}$$

SAR = local specific absorption rate in mW/g

 E_{tot} = total field strength in V/m

 σ = conductivity in [mho/m] or [Siemens/m]

 ρ = equivalent tissue density in g/cm3



Note that the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid. The entire evaluation of the spatial peak values is performed within the Post-processing engine (SEMCAD). The system always gives the maximum values for the 1 g and 10 g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- 1. The extraction of the measured data (grid and values) from the Zoom Scan
- 2. The calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- 3. The generation of a high-resolution mesh within the measured volume
- 4. The interpolation of all measured values from the measurement grid to the high-resolution grid
- 5. The extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- 6. The calculation of the averaged SAR within masses of 1 g and 10 g.

The probe is calibrated at the center of the dipole sensors that is located 1 to 2.7mm away from the probe tip. During measurements, the probe stops shortly above the phantom surface, depending on the probe and the surface detecting system. Both distances are included as parameters in the probe configuration file. The software always knows exactly how far away the measured point is from the surface. As the probe cannot directly measure at the surface, the values between the deepest measured point and the surface must be extrapolated. The angle between the probe axis and the surface normal line is less than 30 degree.

In the Area Scan, the gradient of the interpolation function is evaluated to find all the extreme of the SAR distribution. The uncertainty on the locations of the extreme is less than 1/20 of the grid size. Only local maximum within -2 dB of the global maximum are searched and passed for the Cube Scan measurement. In the Cube Scan, the interpolation function is used to extrapolate the Peak SAR from the lowest measurement points to the inner phantom surface (the extrapolation distance). The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5mm.



The maximum search is automatically performed after each area scan measurement. It is based on splines in two or three dimensions. The procedure can find the maximum for most SAR distributions even with relatively large grid spacing. After the area scanning measurement, the probe is automatically moved to a position at the interpolated maximum. The following scan can directly use this position for reference, e.g., for a finer resolution grid or the cube evaluations. The 1g and 10g peak evaluations are only available for the predefined cube 7 x 7 x 7 scans. The routines are verified and optimized for the grid dimensions used in these cube measurements. The measured volume of 30 x 30 x 30mm contains about 30g of tissue. The first procedure is an extrapolation (incl. boundary correction) to get the points between the lowest measured plane and the surface. The next step uses 3D interpolation to get all points within the measured volume in a 1mm grid (42875 points). In the last step, a 1g cube is placed numerically into the volume and its averaged SAR is calculated. This cube is the moved around until the highest averaged SAR is found. If the highest SAR is found at the edge of the measured volume, the system will issue a warning: higher SAR values might be found outside of the measured volume. In that case the cube measurement can be repeated, using the new interpolated maximum as the center.



3. DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.
1	Universal Radio Communication Tester	R&S	CMU200	117260

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA

NOTE: All power cords of the above support units are non shielded (1.8m).



4. DESCRIPTION OF TEST POSITION

4.1 DESCRIPTION OF TEST POSITION


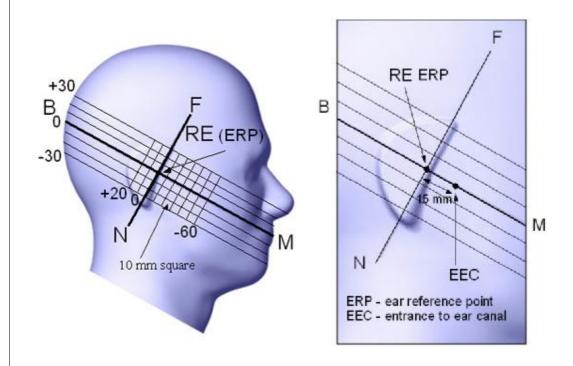



FIGURE 3.1



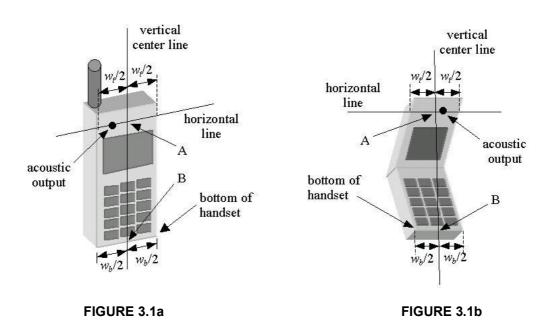


4.1.1 TOUCH/CHEEK TEST POSITION

The head position in Figure 3.1, the ear reference points ERP are 15mm above entrance to ear canal along the B-M line. The line N-F (Neck-Front) is perpendicular to the B-M (Back Mouth) line. The handset device in Figure 3.1a and 3.1b, The vertical centerline pass through two points on the front side of handset: the midpoint of the width wt of the handset at the level of the acoustic output (point A) and the midpoint of the width Wb of the bottom of the handset (point B). The vertical centerline is perpendicular to the horizontal line and pass through the center of the acoustic output. The point A touches the ERP and the vertical centerline of the handset is parallel to the B-M line. While maintaining the point A contact with the ear(ERP), rotate the handset about the line NF until any point on handset is in contact with the cheek of the phantom







TOUCH/CHEEK POSITION FIGURE




4.1.2 TILT TEST POSITION

Adjust the device in the cheek position. While maintaining a point of the handset contact in the ear, move the bottom of the handset away from the mouth by an angle of 15 degrees.







TILT POSITION FIGURE

4.1.3 BODY-WORN CONFIGURATION

The handset device attached the belt clip or the holster. The keypad face of the handset is against with the bottom of the flat phantom face and the bottom of the keypad face contact to the bottom of the flat phantom.

When multiple accessories that do not contain metallic components are supplied with the device, the device may be tested with only the accessory that dictates the closest spacing to the body. When multiple accessories that contain metallic components are supplied with the device, the device must be tested with each accessory that contains a unique metallic component. If multiple accessories share an identical metallic component (e.g., the same metallic belt-clip used with different holsters with no other metallic components), only accessory that dictates the closest spacing to the body must be tested.



4.2 DESCRIPTION OF TEST MODE

TEST MODE	COMMUNICATION MODE	MODULATION TYPE	ASSESSMENT POSTITION	TESTED CHANNEL	REMARK
1			Right Head / Cheek	4182	Panel Close
2			Right Head / Tilt	4182	Panel Close
3			Left Head / Cheek	4132, 4182, 4233	Panel Close
4	WCDMA 850	BPSK	Left Head / Tilt	4182	Panel Close
5	WCDINIA 650	BPSK	Right Head / Cheek	4132, 4182, 4233	Panel Slide
6			Right Head / Tilt	4182	Panel Slide
7			Left Head / Cheek	4182	Panel Slide
8			Left Head / Tilt	4182	Panel Slide
9			Right Head / Cheek	661	Panel Close
10			Right Head / Tilt	661	Panel Close
11			Left Head / Cheek	661	Panel Close
12	PCS 1900	GMSK	Left Head / Tilt	512, 661, 810	Panel Close
13	PCS 1900	GIVISK	Right Head / Cheek	512, 661, 810	Panel Slide
14			Right Head / Tilt	661	Panel Slide
15			Left Head / Cheek	661	Panel Slide
16			Left Head / Tilt	661	Panel Slide
17	WCDMA 850	BPSK	Body / Front	4182	Panel Close
18	NCO PINIPON	DFON	Body / Bottom	4132, 4182, 4233	Panel Close
19	PCS 1900		Body / Front	661	Panel Close
20	FC9 1900	CMSK	Body / Bottom	512, 661, 810	Panel Close
21	DCS 1000 CDDS TS4	GMSK	Body / Front	661	Panel Close
22	PCS 1900 GPRS TS1		Body / Bottom	512, 661, 810	Panel Close

NOTE: The Body position to the phantom with 15mm-separation distance.



4.3 SUMMARY OF TEST RESULTS

ITEM		1	2	3	4	5	6	7	8
PART OF ASSESSMENT		HEAD POSITION							
COMMUNICATION MODE					WCDN	1A 850			
CHAN.	FREQ. (MHz)			MEASU	RED VALUE	OF 1g SAF	R (W/kg)		
4132	826.4	=	-	0.269	=	0.120	=	=	-
4182	836.4	0.275	0.225	0.297	0.235	0.155	0.058	0.148	0.067
4233	846.6	-	-	0.272	-	0.129	-	-	-
IT	ГЕМ	9	10	11	12	13	14	15	16
PART OF A	ASSESSMENT				HEAD P	OSITION			
соммини	COMMUNICATION MODE		PCS 1900						
					PCS	1900			
CHAN.	FREQ. (MHz)			MEASU		1900 OF 1g SAF	R (W/kg)		
CHAN. 512		-	-	MEASUF			R (W/kg)	-	-
	FREQ. (MHz)	0.268	- 0.359	- 0.361	RED VALUE	OF 1g SAF		- 0.078	- 0.077

NOTE: The worst value of each communication has been marked by boldface.

ITEM		17 18			
PART OF ASSESSMENT		BODY POSITION			
COMMUNICATION MODE		WCDMA 850			
CHAN.	FREQ. (MHz)	MEASURED VALUE	OF 1g SAR (W/kg)		
4132	826.4	-	0.479		
4182	836.4	0.204	0.511		
4233	846.6	-	0.484		

ITEM		19 20 21 22					
PART OF ASSESSMENT BODY POSITION							
COMMUNIC	CATION MODE	PCS	PCS 1900 PCS 1900 GPRS TS1				
CHAN.	FREQ. (MHz)		MEASURED VALUE OF 1g SAR (W/kg)				
512	1850.2	-	0.224	-	0.274		
661	1880.0	0.091	0.253	0.089	0.334		
810	1909.8	-	0.279	-	0.363		

NOTE: The worst value of each communication has been marked by boldface.



5. TEST RESULTS

5.1 TEST PROCEDURES

The EUT (Mobile phone) makes a phone call to the communication simulator station. Establish the simulation communication configuration rather the actual communication. Then the EUT could continuous the transmission mode. Adjust the PCL of the base station could controlled the EUT to transmitted the maximum output power. The base station also could control the transmission channel. The SAR value was calculated via the 3D spline interpolation algorithm that has been implemented in the software of DASY4 SAR measurement system manufactured and calibrated by SPEAG. According to the IEEE 1528 / EN 50361, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- Power reference measurement
- Verification of the power reference measurement
- Area scan
- Zoom scan
- Power reference measurement

The area scan with 15mm x 15mm grid was performed for the highest spatial SAR location. Consist of 11 x 13 points while the scan size is the 150mm x 180mm. The zoom scan with 30mm x 30mm x 30mm volume was performed for SAR value averaged over 1g and 10g spatial volumes.



In the zoom scan, the distance between the measurement point at the probe sensor location (geometric center behind the probe tip) and the phantom surface is 4.0 mm and maintained at a constant distance of ± 1.0 mm during a zoom scan to determine peak SAR locations. The distance is 4mm between the first measurement point and the bottom surface of the phantom. The secondary measurement point to the bottom surface of the phantom is with 9mm separation distance. The cube size is 7 x 7 x 7 points consist of 343 points and the grid space is 5mm.

The measurement time is 0.5 s at each point of the zoom scan. The probe boundary effect compensation shall be applied during the SAR test. Because of the tip of the probe to the Phantom surface separated distances are longer than half a tip probe diameter.

In the area scan, the separation distance is 4mm between the each measurement point and the phantom surface. The scan size shall be included the transmission portion of the EUT. The measurement time is the same as the zoom scan. At last the reference power drift shall be less than $\pm 5\%$.



5.2 MEASURED SAR RESULTS

850MHz BAND HEAD POSITION

				erature:22.9°C, :62%RH	Liquid Te	emperat	ture:22.5°C		
TESTED BY		James Fan			DATE		Feb	o. 25, 2010	
CHAN.	FREQ. (MHz)		ULATION TYPE	TX POWER (dBm)	POW DRIFT		DEVICE TES		MEASURED 1g SAR (W/kg)
4182	836.4			23.61	0.12	24	1		0.275
4182	836.4			23.61	0.08	36	2		0.225
4132	826.4			23.72	0.02	28	3		0.269
4182	836.4			23.61	0.10)3	3		0.297
4233	846.6			23.09	0.00)5	3		0.272
4182	836.4	F	BPSK	23.61	0.02	20	4		0.235
4132	826.4			23.72	-0.07	76	5		0.120
4182	836.4			23.61	-0.0	50	5		0.155
4233	846.6			23.09	0.12	21	5		0.129
4182	836.4			23.61	0.12	25	6		0.058
4182	836.4			23.61	0.13	34	7		0.148
4182	836.4			23.61	0.10)3	8		0.067

- 1. Test configuration of each mode is described in section 4.2.
- $2. \ In this testing, the limit for General Population Spatial Peak averaged over {\it 1g, 1.6W/kg}, is applied.$
- 3. Please see the Appendix A for the data.
- 4. The variation of the EUT conducted power measured before and after SAR testing should not over 5%.



1900MHz BAND HEAD POSITION

	RONMENT DITION		emperature:22.8°C dity:61%RH	erature:22.8°C, Liquid Temperature:22.5°C :61%RH				
TESTED BY Ja		Jame	s Fan	DATE	F	Feb. 26, 2010		
CHAN.	FREQ. (MHz)	MODULATIO TYPE	TX POWER (dBm)	POWER DRIFT (%)	DEVICE TEST POSITION MOD			
661	1880		29.71	0.012	9	0.268		
661	1880		29.71	-0.006	10	0.359		
661	1880		29.71	-0.035	11	0.361		
512	1850.2		29.98	-0.072	12	0.354		
661	1880		29.71	-0.015	12	0.380		
810	1909.8	GMSK	29.93	0.042	12	0.373		
512	1850.2	Cilion	29.98	0.116	13	0.071		
661	1880		29.71	-0.176	13	0.082		
810	1909.8		29.93	0.118	13	0.083		
661	1880		29.71	-0.053	14	0.066		
661	1880		29.71	-0.073	15	0.078		
661	1880		29.71	-0.166	16	0.077		

- 1. Test configuration of each mode is described in section 4.2.
- $2. \ In this testing, the limit for General Population Spatial Peak averaged over {\it 1g, 1.6W/kg}, is applied.$
- 3. Please see the Appendix A for the data.
- 4. The variation of the EUT conducted power measured before and after SAR testing should not over 5%.



850MHz BAND BODY POSITION

			•	Air Temperature:22.8°C, Liquid Temperature:22.4°C Humidity:61%RH						
TESTED BY		James Fan			DATE Feb		o. 27, 2010			
CHAN.	FREQ. (MHz)	MODULATION TYPE		TX POWER (dBm)	POW DRIFT		DEVICE TE POSITION M		MEASURED 1g SAR (W/kg)	
4182	836.4			23.61	0.14	8	17		0.204	
4132	826.4		BPSK	23.72	0.02	:3	18		0.479	
4182	836.4		JF OK	23.61	0.10	9	18		0.511	
4233	846.6			23.09	-0.02	27	18		0.484	

- 1. Test configuration of each mode is described in section 4.2.
- 2. In this testing, the limit for General Population Spatial Peak averaged over 1g, 1.6W/kg, is applied.
- 3. Please see the Appendix A for the data.
- 4. The variation of the EUT conducted power measured before and after SAR testing should not over 5%.



1900MHz BAND BODY POSITION

			Air Temperature:22.7°C, Liquid Temperature:22.4°C Humidity:61%RH						
TESTED BY			James Fa	ın		DATE		Feb	o. 27, 2010
CHAN.	FREQ. (MHz)	_	ULATION TYPE	TX POWER (dBm)	POW DRIFT		DEVICE TES POSITION MO	-	MEASURED 1g SAR (W/kg)
661	1880			29.71	-0.09	96	19		0.091
512	1850.2			29.98	-0.07	78	20		0.224
661	1880			29.71	0.00	06	20		0.253
810	1909.8	,	GMSK	29.93	-0.04	15	20		0.279
661	1880		JWJK	29.76	-0.17	79	21		0.089
512	1850.2			29.98	0.03	30	22		0.274
661	1880			29.76	0.005		22		0.334
810	1909.8			29.94	-0.023		22		0.363

- 1. Test configuration of each mode is described in section 4.2.
- $2. \ In this testing, the limit for General Population Spatial Peak averaged over {\it 1g, 1.6W/kg}, is applied.$
- 3. Please see the Appendix A for the data.
- 4. The variation of the EUT conducted power measured before and after SAR testing should not over 5%.



5.3 SAR LIMITS

	SAR (W/kg)				
HUMAN EXPOSURE	(General Population / Uncontrolled Exposure Environment)	(Occupational / controlled Exposure Environment)			
Spatial Average (whole body)	0.08	0.4			
Spatial Peak (averaged over 1 g)	1.6	8.0			
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4.0	20.0			

- 1. This limits accord to 47 CFR 2.1093 Safety Limit.
- 2. The EUT property been complied with the partial body exposure limit under the general population environment.



5.4 RECIPES FOR TISSUE SIMULATING LIQUIDS

For the measurement of the field distribution inside the SAM phantom, the phantom must be filled with 25 litters of tissue simulation liquid.

The following ingredients are used:

• WATER- Deionized water (pure H20), resistivity _16 M - as basis for the liquid

• SUGAR- Refined sugar in crystals, as available in food shops - to reduce relative

permittivity

• SALT- Pure NaCl - to increase conductivity

• CELLULOSE- Hydroxyethyl-cellulose, medium viscosity (75-125 mPa.s, 2% in water,

20_C),

CAS # 54290 - to increase viscosity and to keep sugar in solution

• PRESERVATIVE- Preventol D-7 Bayer AG, D-51368 Leverkusen, CAS # 55965-84-9 - to

prevent the spread of bacteria and molds

• **DGMBE**- Diethylenglycol-monobuthyl ether (DGMBE), Fluka Chemie GmbH,

CAS # 112-34-5 - to reduce relative permittivity

THE RECIPES FOR 835MHz SIMULATING LIQUID TABLE

INGREDIENT	HEAD SIMULATING LIQUID 835MHz (HSL-835)	MUSCLE SIMULATING LIQUID 835MHz (MSL-835)
Water	40.28%	50.07%
Cellulose	02.41%	NA
Salt	01.38%	0.94%
Preventtol D-7	00.18%	0.09%
Sugar	57.97%	48.2%
Dielectric Parameters at 22°C	f = 835MHz ε= 41.5 ± 5% σ= 0.97 ± 5% S/m	f= 835MHz ε= 55.0 ± 5% σ = 1.05 ± 5% S/m



THE RECIPES FOR 1900MHz SIMULATING LIQUID TABLE

INGREDIENT	HEAD SIMULATING LIQUID 1900MHz (HSL-1900)	MUSCLE SIMULATING LIQUID 1900MHz (MSL-1900)
Water	55.24%	70.16%
DGMBE	44.45%	29.44%
Salt	0.306%	00.39%
Dielectric Parameters at 22°C	f= 1900MHz ε= 40.0 ± 5% σ = 1.40 ± 5% S/m	f= 1900MHz ε= 53.3 ± 5% σ= 1.52 ± 5% S/m



Testing the liquids using the Agilent Network Analyzer MA2491A and Agilent Dielectric Probe Kit 85070D. The testing procedure is following as

- 1. Turn Network Analyzer on and allow at least 30 min. warm up.
- 2. Mount dielectric probe kit so that interconnecting cable to Network Analyzer will not be moved during measurements or calibration.
- 3. Pour de-ionized water and measure water temperature (±1°).
- 4. Set water temperature in Agilent-Software (Calibration Setup).
- 5. Perform calibration.
- 6. Validate calibration with dielectric material of known properties (e.g. polished ceramic slab with >8mm thickness ϵ '=10.0, ϵ ''=0.0). If measured parameters do not fit within tolerance, repeat calibration (±0.2 for ϵ ': ±0.1 for ϵ ").
- 7. Conductivity can be calculated from ε'' by $\sigma = \omega \ \epsilon_0 \ \epsilon'' = \epsilon'' \ f \ [GHz] / 18$.
- 8. Measure liquid shortly after calibration. Repeat calibration every hour.
- 9. Stir the liquid to be measured. Take a sample (~50ml) with a syringe from the center of the liquid container.
- 10. Pour the liquid into a small glass flask. Hold the syringe at the bottom of the flask to avoid air bubbles.
- 11. Put the dielectric probe in the glass flask. Check that there are no air bubbles in front of the opening in the dielectric probe kit.
- 12. Perform measurements.
- 13. Adjust medium parameters in DASY4 for the frequencies necessary for the measurements ('Setup Config', select medium (e.g. Brain 900 MHz) and press 'Option'-button.

Select the current medium for the frequency of the validation (e.g. Setup Medium Brain 900 MHz).



850MHz BAND SIMULATING LIQUID

LIQUID T	YPE	HSL-835					
SIMULATING LIQUID TEMP.		22.5					
TEST DA	ΓΕ		Feb. 25, 2010				
TESTED	ВҮ		James Fan				
FREQ. (MHz)	LIQUID PARAMETER	STANDARD VALUE	STANDARD VALUE MEASUREMENT ERR VALUE PERCENT				
826.4		41.50	42.00	1.20			
835.0	Permitivity	41.50	41.90	0.96			
836.4	(ε)	41.50	41.90	0.96			
846.6		41.50	41.80	0.72			
826.4		0.90	0.91	1.11			
835.0	Conductivity	0.90	0.92	2.22			
836.4	(σ) S/m	0.90	0.92	2.22			
846.6		0.91	0.93	2.20			
Dielectric Parameters Required at 22℃			f= 835MHz ε= 41.5 ± 5% σ = 0.97 ± 5% S/m				



LIQUID T	YPE	MSL-835					
SIMULATING LIQUID TEMP.		22.4					
TEST DA	ΓΕ		Feb. 27, 2010				
TESTED I	ВҮ		James Fan				
FREQ. (MHz)	LIQUID PARAMETER	STANDARD VALUE	STANDARD VALUE MEASUREMENT ERRO PERCENTA				
826.4		55.20	54.00	-2.17			
835.0	Permitivity	55.20	53.90	-2.36			
836.4	(ε)	55.20	53.80	-2.54			
846.6		55.20	53.90	-2.36			
826.4		0.97	0.96	-1.03			
835.0	Conductivity	0.97	0.97	0.00			
836.4	(σ) S/m	0.97	0.98	1.03			
846.6		0.98	0.97	-1.02			
Dielectric Parameters Required at 22℃		f= 835MHz ε= 55.0 ± 5% σ= 1.05 ± 5% S/m					



1900MHz BAND SIMULATING LIQUID

LIQUID TYPE		HSL-1900				
SIMULATING LIQUID TEMP.		22.5				
TEST DA	ΓΕ		Feb. 26, 2010			
TESTED I	ВҮ		James Fan			
FREQ. (MHz)	LIQUID PARAMETER	STANDARD VALUE	MEASUREMENT VALUE	ERROR PERCENTAGE (%)		
1850.2		40.00	40.30	0.75		
1880.0	Permitivity	40.00	40.30	0.75		
1900.0	(ε)	40.00	40.30	0.75		
1909.8		40.00	40.30	0.75		
1850.2		1.40	1.38	-1.43		
1880.0	Conductivity (σ)	1.40	1.40	0.00		
1900.0	S/m	1.40	1.43	2.14		
1909.8		1.40	1.44	2.86		
Dielectric Parameters Required at 22℃			f= 1900MHz ε= 40.0 ± 5% σ = 1.40 ± 5% S/m			



LIQUID T	YPE	MSL-1900					
SIMULATING LIQUID TEMP.		22.4					
TEST DA	ΓΕ		Feb. 27, 2010				
TESTED	ВҮ		James Fan				
FREQ. (MHz)	LIQUID PARAMETER	STANDARD VALUE	MEASUREMENT VALUE	ERROR PERCENTAGE (%)			
1850.2		53.30	54.80	2.81			
1880.0	Permitivity	53.30	54.70	2.63			
1900.0	(ε)	53.30	54.60	2.44			
1909.8		53.30	54.60	2.44			
1850.2		1.52	1.53	0.66			
1880.0	Conductivity (σ)	1.52	1.55	1.97			
1900.0	S/m	1.52	1.56	2.63			
1909.8		1.52	1.57	3.29			
Dielectric Parameters Required at 22℃		f= 1900MHz ε= 53.3 ± 5% σ= 1.52 ± 5% S/m					



5.5 TEST EQUIPMENT FOR TISSUE PROPERTY

ITEM	NAME	BRAND	TYPE	SERIES NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
1	Network Analyzer	Anritsu	MA2491A	030953	Apr. 10, 2009	Apr. 09, 2010
2	Dielectric Probe	Agilent	85070D	US01440176	NA	NA

- 1. Before starting, all test equipment shall be warmed up for 30min.
- 2. The tolerance (k=1) specified by Agilent for general dielectric measurements, deriving from inaccuracies in the calibration data, analyzer drift, and random errors, are usually ±2.5% and ±5% for measured permittivity and conductivity, respectively. However, the tolerances for the conductivity is smaller for material with large loss tangents, i.e., less than ±2.5% (k=1). It can be substantially smaller if more accurate methods are applied.



6. SYSTEM VALIDATION

The system validation was performed in the flat phantom with equipment listed in the following table. Since the SAR value is calculated from the measured electric field, dielectric constant and conductivity of the body tissue and the SAR is proportional to the square of the electric field. So, the SAR value will be also proportional to the RF power input to the system validation dipole under the same test environment. In our system validation test, 250mW RF input power was used.

6.1 TEST EQUIPMENT

ITEM	NAME	BRAND	TYPE	SERIES NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION	
1	SAM Phantom	S&P	QD000 P40 CA	TP-1150 NA		NA	
2	Signal Generator	Anritsu	68247B	984703	May 21, 2009	May 20, 2010	
3	E-Field Probe	S&P	EX3DV4	3590	Apr. 28, 2009	Apr. 27, 2010	
4	DAE	S&P	DAE 4	861	Jan. 22, 2010	Jan. 21, 2011	
5	Dinala	alidation S&P	D835V2	4d021	May 25, 2009	May 24, 2010	
6		0 8 1	D1900V2	5d022	Mar. 17, 2009	Mar. 16, 2010	

NOTE: Before starting the measurement, all test equipment shall be warmed up for 30min.



6.2 TEST PROCEDURE

Before you start the system performance check, need only to tell the system with which components (probe, medium, and device) are performing the system performance check; the system will take care of all parameters. The dipole must be placed beneath the flat phantom section of the SAM Twin Phantom with the correct distance holder in place. The distance holder should touch the phantom surface with a light pressure at the reference marking (little cross) and be oriented parallel to the long side of the phantom. Accurate positioning is not necessary, since the system will search for the peak SAR location, except that the dipole arms should be parallel to the surface. The device holder for the EUT can be left in place but should be rotated away from the dipole.

- 1.The "Power Reference Measurement" and "Power Drift Measurement" jobs are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the amplifier output power. If it is too high (above ±0.1 dB), the system performance check should be repeated; some amplifiers have very high drift during warm-up. A stable amplifier gives drift results in the DASY system below ±0.02 dB.
- 2.The "Surface Check" job tests the optical surface detection system of the DASY system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above ±0.1mm). In that case it is better to abort the system performance check and stir the liquid.



- 3. The "Area Scan" job measures the SAR above the dipole on a plane parallel to the surface. It is used to locate the approximate location of the peak SAR. The proposed scan uses large grid spacing for faster measurement; due to the symmetric field, the peak detection is reliable. If a finer graphic is desired, the grid spacing can be reduced. Grid spacing and orientation have no influence on the SAR result.
- 4. The "Zoom Scan" job measures the field in a volume around the peak SAR value assessed in the previous "Area Scan" job (for more information see the application note on SAR evaluation).

About the validation dipole positioning uncertainty, the constant and low loss dielectric spacer is used to establish the correct distance between the top surface of the dipole and the bottom surface of the phantom, the error component introduced by the uncertainty of the distance between the liquid (i.e., phantom shell) and the validation dipole in the DASY4 system is less than ±0.1mm.

$$SAR_{tolerance}[\%] = 100 \times (\frac{(a+d)^2}{a^2} - 1)$$

As the closest distance is 10mm, the resulting tolerance SAR $_{tolerance}$ [%] is <2%.



6.3 VALIDATION RESULTS

SYSTEM VALIDATION TEST OF SIMULATING LIQUID							
FREQUENCY (MHz)	REQUIRED SAR (mW/g)	MEASURED SAR (mW/g)	DEVIATION (%)	SEPARATION DISTANCE	TESTED DATE		
HSL 835	2.37 (1g)	2.27	-4.22	15mm	Feb. 25, 2010		
MSL 835	2.54 (1g)	2.36	-7.08	15mm	Feb. 27, 2010		
HSL 1900	10.20 (1g)	9.83	-3.63	10mm	Feb. 26, 2010		
MSL 1900	10.20 (1g)	9.76	-4.31	10mm	Feb. 27, 2010		
TESTED BY	James Fan						

NOTE: Please see Appendix for the photo of system validation test.



6.4 SYSTEM VALIDATION UNCERTAINTIES

In the table below, the system validation uncertainty with respect to the analytically assessed SAR value of a dipole source as given in the IEEE 1528 standard is given. This uncertainty is smaller than the expected uncertainty for mobile phone measurements due to the simplified setup and the symmetric field distribution.

Error Description	Tolerance (±%)	Probability Distribution	Divisor	(0	C _i)	Uncei	dard rtainty %)	(v _i)	
	, ,			(1g)	(10g)	(1g)	(10g)		
Measurement System									
Probe Calibration	5.50	Normal	1	1	1	5.50	5.50	∞	
Axial Isotropy	4.70	Rectangular	√3	0.7	0.7	1.90	1.90	8	
Hemispherical Isotropy	9.60	Rectangular	√3	0.7	0.7	3.88	3.88	8	
Boundary effects	1.00	Rectangular	√3	1	1	0.58	0.58	8	
Linearity	4.70	Rectangular	√3	1	1	2.71	2.71	∞	
System Detection Limits	1.00	Rectangular	√3	1	1	0.58	0.58	8	
Readout Electronics	0.30	Normal	1	1	1	0.30	0.30	8	
Response Time	0.80	Rectangular	√3	1	1	0.46	0.46	∞	
Integration Time	2.60	Rectangular	√3	1	1	1.50	1.50	∞	
RF Ambient Noise	3.00	Rectangular	√3	1	1	1.73	1.73	8	
RF Ambient Reflections	3.00	Rectangular	√3	1	1	1.73	1.73	∞	
Probe Positioner	0.40	Rectangular	√3	1	1	0.23	0.23	∞	
Probe Positioning	2.90	Rectangular	√3	1	1	1.67	1.67	∞	
Max. SAR Eval.	1.00	Rectangular	√3	1	1	0.58	0.58	∞	
		Dipole Re	elated						
Dipole Axis to Liquid Distance	2.00	Rectangular	√3	1	1	1.15	1.15	145	
Input Power Drift	5.00	Rectangular	$\sqrt{3}$	1	1	2.89	2.89	∞	
		Phantom and Tiss	ue paramet	ters					
Phantom Uncertainty	4.00	Rectangular	√3	1	1	2.31	2.31	∞	
Liquid Conductivity (target)	5.00	Rectangular	√3	0.64	0.43	1.85	1.24	8	
Liquid Conductivity (measurement)	3.86	Normal	1	0.64	0.43	2.47	1.66	∞	
Liquid Permittivity (target)	5.00	Rectangular	√3	0.6	0.49	1.73	1.41	∞	
Liquid Permittivity (measurement)	3.46	Normal	1	0.6	0.49	2.08	1.70	∞	
Combined Standard Uncertainty						10.03	9.64		
Coverage Factor for 95%						Kp=2			
Expanded Uncertainty (K=2)						20.05	19.27		

NOTE: About the system validation uncertainty assessment, please reference the section 7.



7. MEASUREMENT SAR PROCEDURE UNCERTAINTIES

The assessment of spatial peak SAR of the hand handheld devices is according to IEEE 1528. All testing situation shall be met below these requirements.

- The system is used by an experienced engineer who follows the manual and the guidelines taught during the training provided by SPEAG.
- The probe has been calibrated within the requested period and the stated uncertainty for the relevant frequency bands does not exceed 4.8% (k=1).
- The validation dipole has been calibrated within the requested period and the system performance check has been successful.
- The DAE unit has been calibrated within the within the requested period.
- The minimum distance between the probe sensor and inner phantom shell is selected to be between 4 and 5mm.
- The operational mode of the DUT is CW, CDMA, FDMA or TDMA (GSM, DCS, PCS, IS136 and PDC) and the measurement/integration time per point is >500 ms.
- The dielectric parameters of the liquid have been assessed using Agilent 85070D dielectric probe kit or a more accurate method.
- The dielectric parameters are within 5% of the target values.
- The DUT has been positioned as described in section 3.

7.1 PROBE CALIBRATION UNCERTAINTY

SPEAG conducts the probe calibration in compliance with international and national standards (e.g. IEEE 1528, EN 50361, IEC 62209, etc.) under ISO17025. The uncertainties are stated on the calibration certificate. For the most relevant frequency bands, these values do not exceed 4.8% (k=1). If evaluations of other bands are performed for which the uncertainty exceeds these values, the uncertainty tables given in the summary have to be revised accordingly.



7.2 ISOTROPY UNCERTAINTY

The axial isotropy tolerance accounts for probe rotation around its axis while the hemispherical isotropy error includes all probe orientations and field polarizations. These parameters are assessed by SPEAG during initial calibration. In 2001, SPEAG further tightened its quality controls and warrants that the maximal deviation from axial isotropy is ± 0.20 dB, while the maximum deviation of hemispherical isotropy is ± 0.40 dB, corresponding to $\pm 4.7\%$ and $\pm 9.6\%$, respectively. A weighting factor of cp equal to 0.5 can be applied, since the axis of the probe deviates less than 30 degrees from the normal surface orientation.

7.3 BOUNDARY EFFECT UNCERTAINTY

The effect can be estimated according to the following error approximation formula

$$SAR_{tolerance}[\%] = SAR_{be}[\%] \times \frac{(d_{be} + d_{step})^2}{2d_{step}} \frac{e^{-\frac{d_{be}}{d/2}}}{d/2}$$

$$d_{be} + d_{step} < 10mm$$

The parameter d_{be} is the distance in mm between the surface and the closest measurement point used in the averaging process; d_{step} is the separation distance in mm between the first and second measurement points; δ is the minimum penetration depth in mm within the head tissue equivalent liquids (i.e., δ = 13.95 mm at 3GHz); SAR_{be} is the deviation between the measured SAR value at the distance d_{be} from the boundary and the wave-guide analytical value SAR_{ref}.DASY4 applies a boundary effect compensation algorithm according to IEEE 1528, which is possible since the axis of the probe never deviates more than 30 degrees from the normal surface orientation. SAR_{be}[%] is assessed during the calibration process and SPEAG warrants that the uncertainty at distances larger than 4mm is always less than 1%.In summary, the worst case boundary effect SAR tolerance[%] for scanning distances larger than 4mm is < \pm 0.8%.



7.4 PROBE LINEARITY UNCERTAINTY

Field probe linearity uncertainty includes errors from the assessment and compensation of the diode compression effects for CW and pulsed signals with known duty cycles. This error is assessed using the procedure described in IEEE 1528. For SPEAG field probes, the measured difference between CW and pulsed signals, with pulse frequencies between 10 Hz and 1 kHz and duty cycles between 1 and 100, is $< \pm 0.20$ dB ($< \pm 4.7\%$).

7.5 READOUT ELECTRONICS UNCERTAINTY

All uncertainties related to the probe readout electronics (DAE unit), including the gain and linearity of the instrumentation amplifier, its loading effect on the probe, and accuracy of the signal conversion algorithm, have been assessed accordingly to IEEE 1528. The combination (root-sum-square RSS method) of these components results in an overall maximum error of ±1.0%.

7.6 RESPONSE TIME UNCERTAINTY

The time response of the field probes is assessed by exposing the probe to a well-controlled electric field producing SAR larger than 2.0 W/kg at the tissue medium surface. The signal response time is evaluated as the time required by the system to reach 90% of the expected final value after an on/of switch of the power source. Analytically, it can be expressed as:

$$SAR_{tolerance} [\%] = 100 \times (\frac{T_m}{T_m + te^{-T_m/t} - t} - 1)$$

where Tm is 500 ms, i.e., the time between measurement samples, and $_{\rm T}$ the time constant. The response time $_{\rm T}$ of SPEAG's probes is <5 ms. In the current implementation, DASY4 waits longer than 100 ms after having reached the grid point before starting a measurement, i.e., the response time uncertainty is negligible.



7.7 INTEGRATION TIME UNCERTAINTY

If the device under test does not emit a CW signal, the integration time applied to measure the electric field at a specific point may introduce additional uncertainties due to the discretization and can be assessed as follows

$$SAR_{tolerance}$$
 [%] = $100 \times \sum_{allsub-frames} \frac{t_{frame}}{t_{int\ egration}} \frac{slot_{idle}}{slot_{total}}$

The tolerances for the different systems are given in Table 7.1, whereby the worst-case $SAR_{tolerance}$ is 2.6%.

System	SAR _{tolerance} %		
CW	0		
CDMA*	0		
WCDMA*	0		
FDMA	0		
IS-136	2.6		
PDC	2.6		
GSM/DCS/PCS	1.7		
DECT	1.9		
Worst-Case	2.6		

TABLE 7.1



7.8 PROBE POSITIONER MECHANICAL TOLERANCE

The mechanical tolerance of the field probe positioner can introduce probe positioning uncertainties. The resulting SAR uncertainty is assessed by comparing the SAR obtained according to the specifications of the probe positioner with respect to the actual position defined by the geometric enter of the probe sensors. The tolerance is determined as:

$$SAR_{tolerance}[\%] = 100 \times \frac{d_{ph}}{d/2}$$

The specified repeatability of the RX robot family used in DASY4 systems is $\pm 25 \,\mu$ m. The absolute accuracy for short distance movements is better than ± 0.1 mm, i.e., the SAR_{tolerance}[%] is better than 1.5% (rectangular).

7.9 PROBE POSITIONING

The probe positioning procedures affect the tolerance of the separation distance between the probe tip and the phantom surface as:

$$SAR_{tolerance}[\%] = 100 \times \frac{d_{ph}}{d/2}$$

where d_{ph} is the maximum deviation of the distance between the probe tip and the phantom surface. The optical surface detection has a precision of better than 0.2 mm, resulting in an SAR_{tolerance}[%] of <2.9% (rectangular distribution). Since the mechanical detection provides better accuracy, 2.9% is a worst-case figure for DASY4 system.



7.10 PHANTOM UNCERTAINTY

The SAR measurement uncertainty due to SPEAG phantom shell production tolerances has been evaluated using

$$SAR_{tolerance}[\%] \cong 100 \times \frac{2d}{a},$$
 $d << a$

For a maximum deviation d of the inner and outer shell of the phantom from that specified in the CAD file of ± 0.2 mm, and a 10mm spacing a between source and tissue liquid, the calculated phantom uncertainty is $\pm 4.0\%$.



7.11 DASY4 UNCERTAINTY BUDGET

Error Description	Tolerance (±%)	Probability Distribution	Divisor	(C _i)		Standard Uncertainty (±%)		(v _i)
				(1g)	(10g)	(1g)	(10g)	
Measurement Equipment								
Probe Calibration	5.50	Normal	1	1	1	5.50	5.50	∞
Axial Isotropy	4.70	Rectangular	√3	0.7	0.7	1.90	1.90	∞
Hemispherical Isotropy	9.60	Rectangular	√3	0.7	0.7	3.88	3.88	∞
Boundary effects	1.00	Rectangular	√3	1	1	0.58	0.58	∞
Linearity	4.70	Rectangular	√3	1	1	2.71	2.71	∞
System Detection Limits	1.00	Rectangular	√3	1	1	0.58	0.58	∞
Readout Electronics	0.30	Normal	1	1	1	0.30	0.30	∞
Response Time	0.80	Rectangular	√3	1	1	0.46	0.46	∞
Integration Time	2.60	Rectangular	√3	1	1	1.50	1.50	8
RF Ambient Noise	3.00	Rectangular	√3	1	1	1.73	1.73	∞
RF Ambient Reflections	3.00	Rectangular	√3	1	1	1.73	1.73	8
Probe Positioner	0.40	Rectangular	√3	1	1	0.23	0.23	8
Probe Positioning	2.90	Rectangular	√3	1	1	1.67	1.67	8
Max. SAR Eval.	1.00	Rectangular	√3	1	1	0.58	0.58	8
		Test Sample	Related					
Device Positioning	0.89	Normal	1	1	1	0.89	0.89	9
Device Holder	3.60	Normal	1	1	1	3.60	3.60	5
Power Drift	5.00	Rectangular	√3	1	1	2.89	2.89	8
	F	Phantom and Tiss	ue paramete	ers				
Phantom Uncertainty	4.00	Rectangular	√3	1	1	2.31	2.31	8
Liquid Conductivity (target)	5.00	Rectangular	√3	0.64	0.43	1.85	1.24	∞
Liquid Conductivity (measurement)	3.86	Normal	1	0.64	0.43	2.47	1.66	∞
Liquid Permittivity (target)	5.00	Rectangular	√3	0.6	0.49	1.73	1.41	∞
Liquid Permittivity (measurement)	3.46	Normal	1	0.6	0.49	2.08	1.70	8
Combined Standard Uncertainty						10.63	10.26	
Coverage Factor for 95%							Kp=2	
Expanded Uncertainty (K=2)						21.25	20.52	

TABLE 7.2



8. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

<u>www.adt.com.tw/index.5/phtml</u>. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab: Hsin Chu EMC/RF Lab: Tel: 886-2-26052180 Tel: 886-3-5935343

Fax: 886-2-26051924 Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232 Fax: 886-3-3185050

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.


---END---



APPENDIX A: TEST DATA

Liquid Level Photo



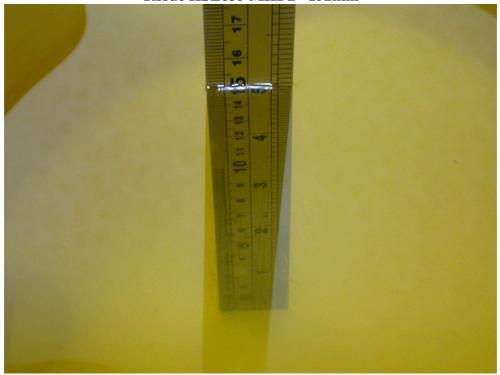


Tissue HSL1900 MHz D=152mm





Tissue MSL835 MHz D=150mm

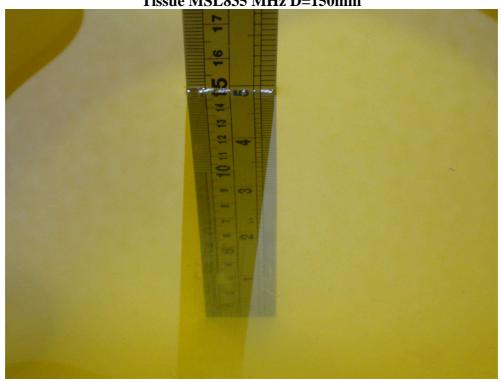







Date/Time: 2010/2/25 01:25:32

Test Laboratory: Bureau Veritas ADT

M01-Right Head Cheek Close WCDMA850 Ch4182

DUT: Mobile Phone ; Type: F-06B

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL835 Medium parameters used: f = 836.4 MHz; $\sigma = 0.92 \text{ mho/m}$; $\varepsilon_r = 41.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section; DUT test position: Cheek; Modulation type: BPSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(9.79, 9.79, 9.79); Calibrated: 2009/4/28

- Sensor-Surface: 3mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn861; Calibrated: 2010/1/22

- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Mid Channel 4182 /Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.292 mW/g

Mid Channel 4182 /Zoom Scan (7x7x11)/Cube 0: Measurement grid: dx=5mm, dy=5mm,


dz=3mm

Reference Value = 14.3 V/m; Power Drift = 0.124 dB

Peak SAR (extrapolated) = 0.278 W/kg

SAR(1 g) = 0.275 mW/g; SAR(10 g) = 0.189 mW/g

Maximum value of SAR (measured) = 0.308 mW/g

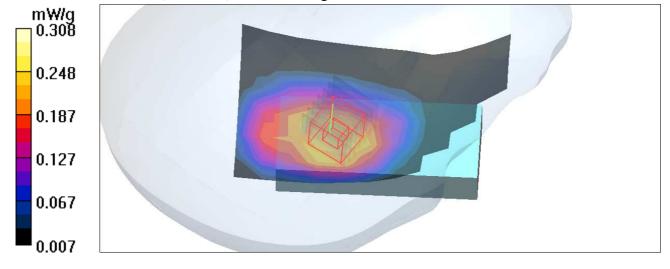



Date/Time: 2010/2/25 02:06:45

Test Laboratory: Bureau Veritas ADT

M02-Right Head Tilt Close WCDMA850 Ch4182

DUT: Mobile Phone ; Type: F-06B

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL835 Medium parameters used: f = 836.4 MHz; $\sigma = 0.92 \text{ mho/m}$; $\varepsilon_r = 41.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section; DUT test position: Tilt; Modulation type: BPSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(9.79, 9.79, 9.79); Calibrated: 2009/4/28

- Sensor-Surface: 3mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn861; Calibrated: 2010/1/22

- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Mid Channel 4182 Tilt/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.237 mW/g

Mid Channel 4182 Tilt/Zoom Scan (7x7x11) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 15.3 V/m; Power Drift = 0.086 dB

Peak SAR (extrapolated) = 0.375 W/kg

SAR(1 g) = 0.225 mW/g; SAR(10 g) = 0.146 mW/gMaximum value of SAR (measured) = 0.269 mW/g

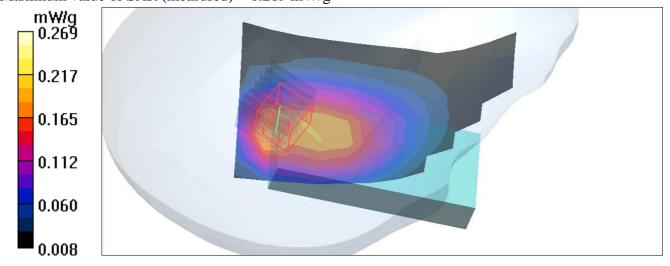



Date/Time: 2010/2/25 03:50:41

Test Laboratory: Bureau Veritas ADT

M03-Left Head Cheek Close WCDMA850 Ch4132

DUT: Mobile Phone ; Type: F-06B

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: HSL835 Medium parameters used: f = 826.4 MHz; $\sigma = 0.91$ mho/m; $\varepsilon_r = 42$; $\rho = 1000$ kg/m³

Phantom section: Left Section; DUT test position: Cheek; Modulation type: BPSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(9.79, 9.79, 9.79); Calibrated: 2009/4/28

- Sensor-Surface: 3mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn861; Calibrated: 2010/1/22

- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Mid Channel 4132 /Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.277 mW/g

Mid Channel 4132 /Zoom Scan (7x7x11) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 15.8 V/m; Power Drift = 0.028 dB

Peak SAR (extrapolated) = 0.356 W/kg

SAR(1 g) = 0.269 mW/g; SAR(10 g) = 0.182 mW/gMaximum value of SAR (measured) = 0.293 mW/g

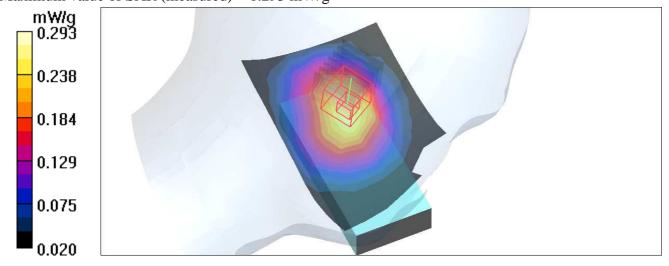



Date/Time: 2010/2/25 02:42:08

Test Laboratory: Bureau Veritas ADT

M03-Left Head Cheek Close WCDMA850 Ch4182

DUT: Mobile Phone ; Type: F-06B

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL835 Medium parameters used: f = 836.4 MHz; $\sigma = 0.92 \text{ mho/m}$; $\varepsilon_r = 41.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section; DUT test position: Cheek; Modulation type: BPSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(9.79, 9.79, 9.79); Calibrated: 2009/4/28

- Sensor-Surface: 3mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn861; Calibrated: 2010/1/22

- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Mid Channel 4182 /Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.336 mW/g

Mid Channel 4182 /Zoom Scan (7x7x11) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 17.1 V/m; Power Drift = 0.103 dB

Peak SAR (extrapolated) = 0.416 W/kg

SAR(1 g) = 0.297 mW/g; SAR(10 g) = 0.206 mW/gMaximum value of SAR (measured) = 0.339 mW/g

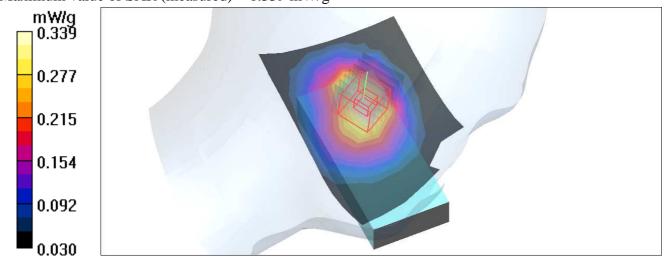



Date/Time: 2010/2/25 04:25:15

Test Laboratory: Bureau Veritas ADT

M03-Left Head Cheek Close WCDMA850 Ch4233

DUT: Mobile Phone ; Type: F-06B

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: HSL835 Medium parameters used: f = 846.6 MHz; $\sigma = 0.93$ mho/m; $\varepsilon_r = 41.8$; $\rho = 1000$ kg/m³

Phantom section: Left Section; DUT test position: Cheek; Modulation type: BPSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(9.79, 9.79, 9.79); Calibrated: 2009/4/28

- Sensor-Surface: 3mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn861; Calibrated: 2010/1/22

- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Mid Channel 4233 /Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.286 mW/g

Mid Channel 4233 /Zoom Scan (7x7x11) /Cube 0: Measurement grid: dx=5mm, dy=5mm,


dz=3mm

Reference Value = 16.1 V/m; Power Drift = 0.005 dB

Peak SAR (extrapolated) = 0.373 W/kg

SAR(1 g) = 0.272 mW/g; SAR(10 g) = 0.193 mW/g

Maximum value of SAR (measured) = 0.304 mW/g

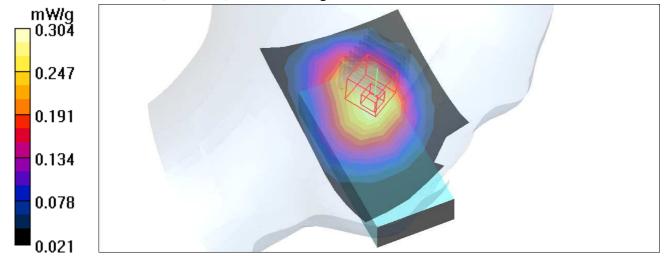



Date/Time: 2010/2/25 03:19:16

Test Laboratory: Bureau Veritas ADT

M04-Left Head Tilt Close WCDMA850 Ch4182

DUT: Mobile Phone ; Type: F-06B

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL835 Medium parameters used: f = 836.4 MHz; $\sigma = 0.92$ mho/m; $\varepsilon_r = 41.9$; $\rho = 1000$ kg/m³

Phantom section: Left Section; DUT test position: Cheek; Modulation type: BPSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(9.79, 9.79, 9.79); Calibrated: 2009/4/28

- Sensor-Surface: 3mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn861; Calibrated: 2010/1/22

- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Mid Channel 4182 /Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.283 mW/g

Mid Channel 4182 /Zoom Scan (7x7x11) /Cube 0: Measurement grid: dx=5mm, dy=5mm,


dz=3mm

Reference Value = 17.0 V/m; Power Drift = 0.020 dB

Peak SAR (extrapolated) = 0.395 W/kg

SAR(1 g) = 0.235 mW/g; SAR(10 g) = 0.163 mW/g

Maximum value of SAR (measured) = 0.280 mW/g

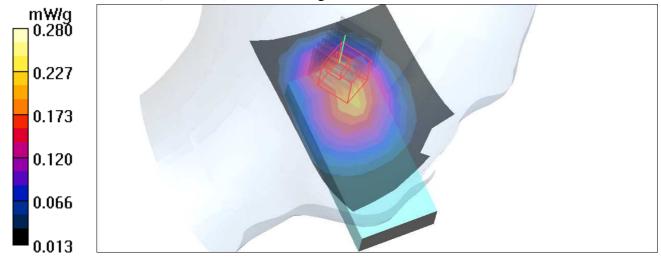



Date/Time: 2010/2/25 07:05:40

Test Laboratory: Bureau Veritas ADT

M05-Right Head Cheek Slide WCDMA850 Ch4132

DUT: Mobile Phone ; Type: F-06B

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: HSL835 Medium parameters used: f = 826.4 MHz; $\sigma = 0.91$ mho/m; $\varepsilon_r = 42$; $\rho = 1000$ kg/m³

Phantom section: Right Section; DUT test position: Cheek; Modulation type: BPSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(9.79, 9.79, 9.79); Calibrated: 2009/4/28

- Sensor-Surface: 3mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn861; Calibrated: 2010/1/22

- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Mid Channel 4132 /Area Scan (7x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.126 mW/g

Mid Channel 4132 /Zoom Scan (7x7x11) /Cube 0: Measurement grid: dx=5mm, dy=5mm,


dz=3mm

Reference Value = 5.49 V/m; Power Drift = -0.076 dB

Peak SAR (extrapolated) = 0.150 W/kg

SAR(1 g) = 0.120 mW/g; SAR(10 g) = 0.090 mW/g

Maximum value of SAR (measured) = 0.131 mW/g

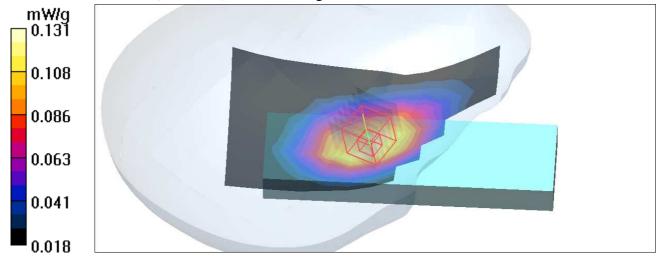



Date/Time: 2010/2/25 04:59:32

Test Laboratory: Bureau Veritas ADT

M05-Right Head Cheek Slide WCDMA850 Ch4182

DUT: Mobile Phone ; Type: F-06B

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL835 Medium parameters used: f = 836.4 MHz; $\sigma = 0.92 \text{ mho/m}$; $\varepsilon_r = 41.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section; DUT test position: Cheek; Modulation type: BPSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(9.79, 9.79, 9.79); Calibrated: 2009/4/28

- Sensor-Surface: 3mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn861; Calibrated: 2010/1/22

- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Mid Channel 4182 /Area Scan (7x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.161 mW/g

Mid Channel 4182 /Zoom Scan (7x7x11) /Cube 0: Measurement grid: dx=5mm, dy=5mm,


dz=3mm

Reference Value = 5.19 V/m; Power Drift = -0.050 dB

Peak SAR (extrapolated) = 0.198 W/kg

SAR(1 g) = 0.155 mW/g; SAR(10 g) = 0.115 mW/g

Maximum value of SAR (measured) = 0.174 mW/g

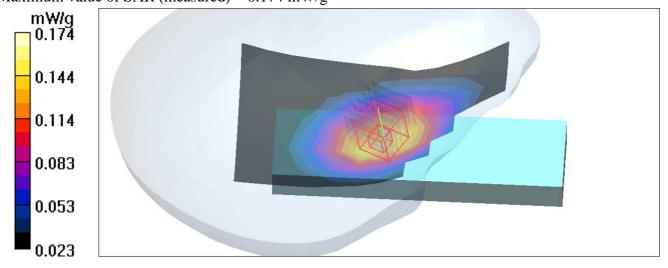



Date/Time: 2010/2/25 07:33:09

Test Laboratory: Bureau Veritas ADT

M05-Right Head Cheek Slide WCDMA850 Ch4233

DUT: Mobile Phone ; Type: F-06B

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: HSL835 Medium parameters used: f = 846.6 MHz; $\sigma = 0.93 \text{ mho/m}$; $\varepsilon_r = 41.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section; DUT test position: Cheek; Modulation type: BPSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(9.79, 9.79, 9.79); Calibrated: 2009/4/28

- Sensor-Surface: 3mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn861; Calibrated: 2010/1/22

- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Mid Channel 4233 /Area Scan (7x15x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.141 mW/g

Mid Channel 4233 /Zoom Scan (7x7x11) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 5.39 V/m; Power Drift = 0.121 dB

Peak SAR (extrapolated) = 0.167 W/kg

SAR(1 g) = 0.129 mW/g; SAR(10 g) = 0.098 mW/gMaximum value of SAR (measured) = 0.146 mW/g

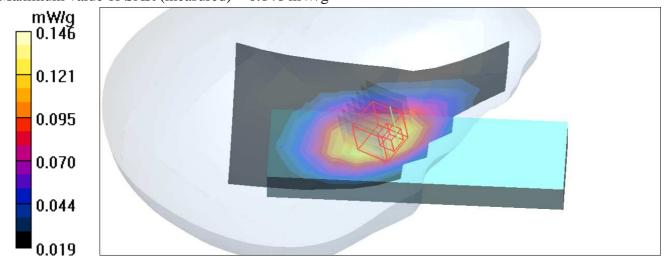



Date/Time: 2010/2/25 05:32:23

Test Laboratory: Bureau Veritas ADT

M06-Right Head Tilt Slide WCDMA850 Ch4182

DUT: Mobile Phone ; Type: F-06B

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL835 Medium parameters used: f = 836.4 MHz; $\sigma = 0.92 \text{ mho/m}$; $\varepsilon_r = 41.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section; DUT test position: Tilt; Modulation type: BPSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(9.79, 9.79, 9.79); Calibrated: 2009/4/28

- Sensor-Surface: 3mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn861: Calibrated: 2010/1/22

- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Mid Channel 4182 /Area Scan (7x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.060 mW/g

Mid Channel 4182 /Zoom Scan (7x7x11) /Cube 0: Measurement grid: dx=5mm, dy=5mm,


dz=3mm

Reference Value = 5.98 V/m; Power Drift = 0.125 dB

Peak SAR (extrapolated) = 0.073 W/kg

SAR(1 g) = 0.058 mW/g; SAR(10 g) = 0.043 mW/g

Maximum value of SAR (measured) = 0.064 mW/g

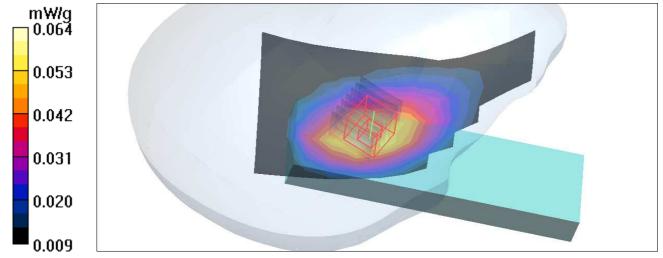



Date/Time: 2010/2/25 06:06:53

Test Laboratory: Bureau Veritas ADT

M07-Left Head Cheek Slide WCDMA850 Ch4182

DUT: Mobile Phone ; Type: F-06B

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL835 Medium parameters used: f = 836.4 MHz; $\sigma = 0.92 \text{ mho/m}$; $\varepsilon_r = 41.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section; DUT test position: Cheek; Modulation type: BPSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(9.79, 9.79, 9.79); Calibrated: 2009/4/28

- Sensor-Surface: 3mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn861; Calibrated: 2010/1/22

- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Mid Channel 4182 /Area Scan (7x15x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.145 mW/g


Maximum value of SAR (measured) = 0.145 mW/g

Mid Channel 4182 /Zoom Scan (7x7x11)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 4.17 V/m; Power Drift = 0.134 dB

Peak SAR (extrapolated) = 0.188 W/kg

SAR(1 g) = 0.148 mW/g; SAR(10 g) = 0.111 mW/gMaximum value of SAR (measured) = 0.162 mW/g

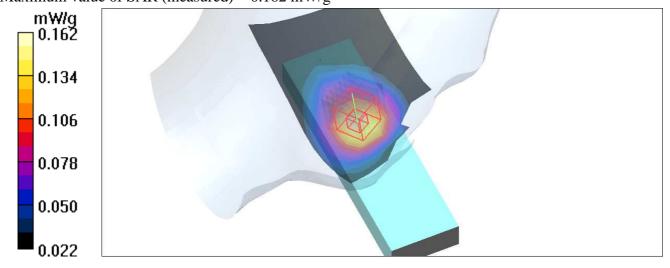



Date/Time: 2010/2/25 06:37:47

Test Laboratory: Bureau Veritas ADT

M08-Left Head Tilt slide WCDMA850 Ch4182

DUT: Mobile Phone : Type: F-06B

Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL835 Medium parameters used: f = 836.4 MHz; $\sigma = 0.92 \text{ mho/m}$; $\varepsilon_r = 41.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section; DUT test position: Tilt; Modulation type: BPSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(9.79, 9.79, 9.79); Calibrated: 2009/4/28

- Sensor-Surface: 3mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn861: Calibrated: 2010/1/22

- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Mid Channel 4182 /Area Scan (7x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.065 mW/g

Mid Channel 4182 /Zoom Scan (7x7x11) /Cube 0: Measurement grid: dx=5mm, dy=5mm,


dz=3mm

Reference Value = 5.55 V/m; Power Drift = 0.103 dB

Peak SAR (extrapolated) = 0.084 W/kg

 $SAR(1 g) = \frac{0.067}{mW/g}; SAR(10 g) = 0.051 mW/g$

Maximum value of SAR (measured) = 0.074 mW/g

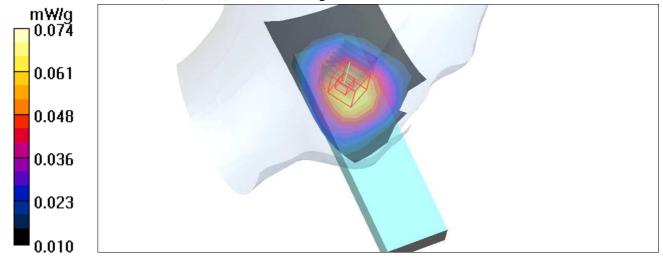



Date/Time: 2010/2/26 01:04:13

Test Laboratory: Bureau Veritas ADT

M09-Right Head Cheek Close GSM 1900 Ch661

DUT: Mobile Phone ; Type: F-06B

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: HSL1900 Medium parameters used: f = 1880 MHz; $\sigma = 1.4$ mho/m; $\varepsilon_r = 40.3$; $\rho = 1000$ kg/m³

Phantom section: Right Section; DUT test position: Cheek; Modulation type: GMSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.39, 8.39, 8.39); Calibrated: 2009/4/28

- Sensor-Surface: 3mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn861; Calibrated: 2010/1/22

- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Mid Channel 661 /Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.311 mW/g

Mid Channel 661 /Zoom Scan (7x7x11) /Cube 0: Measurement grid: dx=5mm, dy=5mm,


dz=3mm

Reference Value = 13.2 V/m; Power Drift = 0.012 dB

Peak SAR (extrapolated) = 0.474 W/kg

SAR(1 g) = 0.268 mW/g; SAR(10 g) = 0.167 mW/g

Maximum value of SAR (measured) = 0.321 mW/g

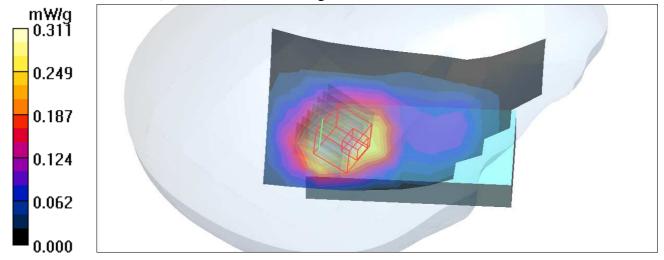



Date/Time: 2010/2/26 01:34:55

Test Laboratory: Bureau Veritas ADT

M10-Right Head Tilt Close GSM 1900 Ch661

DUT: Mobile Phone ; Type: F-06B

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: HSL1900 Medium parameters used: f = 1880 MHz; $\sigma = 1.4$ mho/m; $\varepsilon_r = 40.3$; $\rho = 1000$ kg/m³

Phantom section: Right Section; DUT test position: Tilt; Modulation type: GMSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.39, 8.39, 8.39); Calibrated: 2009/4/28

- Sensor-Surface: 3mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn861; Calibrated: 2010/1/22

- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Mid Channel 661 /Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.436 mW/g

Mid Channel 661 /Zoom Scan (7x7x11) /Cube 0: Measurement grid: dx=5mm, dy=5mm,


dz=3mm

Reference Value = 15.5 V/m; Power Drift = -0.006 dB

Peak SAR (extrapolated) = 0.643 W/kg

SAR(1 g) = 0.359 mW/g; SAR(10 g) = 0.201 mW/g

Maximum value of SAR (measured) = 0.439 mW/g

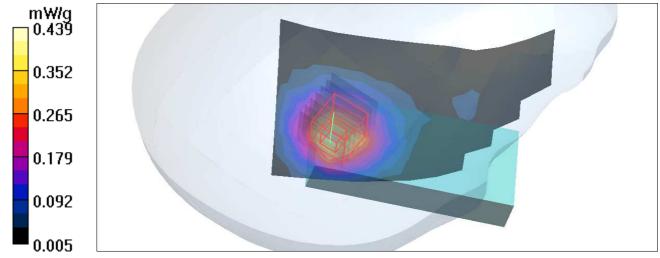



Date/Time: 2010/2/26 02:12:07

Test Laboratory: Bureau Veritas ADT

M11-Left Head Cheek Close GSM 1900 Ch 661

DUT: Mobile Phone ; Type: F-06B

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: HSL1900 Medium parameters used: f = 1880 MHz; $\sigma = 1.4$ mho/m; $\varepsilon_r = 40.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section; DUT test position: Cheek; Modulation type: GMSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.39, 8.39, 8.39); Calibrated: 2009/4/28

- Sensor-Surface: 3mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn861; Calibrated: 2010/1/22

- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Mid Channel 661 /Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.412 mW/g

Mid Channel 661 /Zoom Scan (7x7x11) /Cube 0: Measurement grid: dx=5mm, dy=5mm,


dz=3mm

Reference Value = 14.1 V/m; Power Drift = -0.035 dB

Peak SAR (extrapolated) = 0.578 W/kg

SAR(1 g) = 0.361 mW/g; SAR(10 g) = 0.211 mW/g

Maximum value of SAR (measured) = 0.435 mW/g

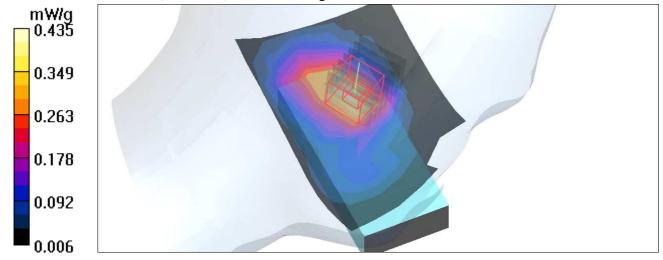



Date/Time: 2010/2/26 03:14:20

Test Laboratory: Bureau Veritas ADT

M12-Left Head Tilt Close GSM 1900 Ch512

DUT: Mobile Phone ; Type: F-06B

Communication System: PCS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: HSL1900 Medium parameters used: f=1850.2 MHz; $\sigma=1.38$ mho/m; $\epsilon_r=40.3$; $\rho=1000$

 kg/m^3

Phantom section: Left Section; DUT test position: Tilt; Modulation type: GMSK

DASY4 Configuration:

- Probe: EX3DV4 SN3590; ConvF(8.39, 8.39, 8.39); Calibrated: 2009/4/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2010/1/22
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Mid Channel 512 /Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.375 mW/g


Mid Channel 512 /Zoom Scan (7x7x11) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 16.2 V/m; Power Drift = -0.072 dB

Peak SAR (extrapolated) = 0.598 W/kg

SAR(1 g) = 0.354 mW/g; SAR(10 g) = 0.207 mW/g

Maximum value of SAR (measured) = 0.426 mW/g

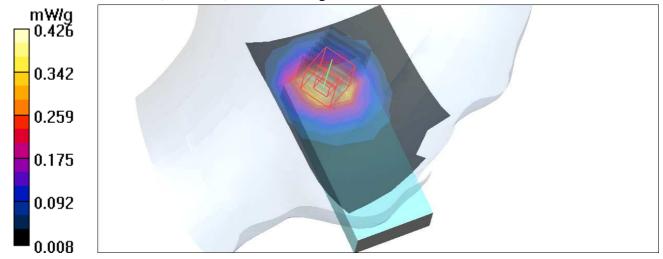



Date/Time: 2010/2/26 02:43:19

Test Laboratory: Bureau Veritas ADT

M12-Left Head Tilt Close GSM 1900 Ch661

DUT: Mobile Phone ; Type: F-06B

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: HSL1900 Medium parameters used: f = 1880 MHz; $\sigma = 1.4$ mho/m; $\varepsilon_r = 40.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section; DUT test position: Tilt; Modulation type: GMSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.39, 8.39, 8.39); Calibrated: 2009/4/28

- Sensor-Surface: 3mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn861; Calibrated: 2010/1/22

- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Mid Channel 661 /Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.396 mW/g

Mid Channel 661 /Zoom Scan (7x7x11)/Cube 0: Measurement grid: dx=5mm, dy=5mm,


dz=3mm

Reference Value = 16.0 V/m; Power Drift = -0.015 dB

Peak SAR (extrapolated) = 0.640 W/kg

SAR(1 g) = 0.380 mW/g; SAR(10 g) = 0.220 mW/g

Maximum value of SAR (measured) = 0.457 mW/g

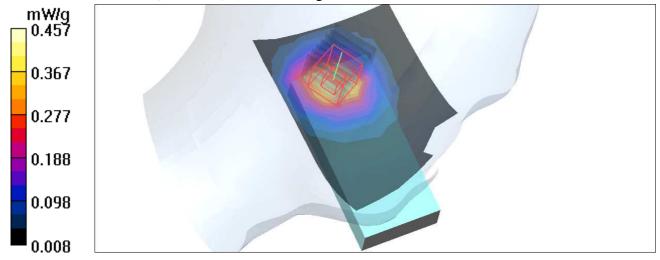



Date/Time: 2010/2/26 03:48:19

Test Laboratory: Bureau Veritas ADT

M12-Left Head Tilt Close GSM 1900 Ch810

DUT: Mobile Phone ; Type: F-06B

Communication System: PCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: HSL1900 Medium parameters used (extrapolated): f=1909.8 MHz; $\sigma=1.44$ mho/m; $\epsilon_r=40.3$;

 $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section; DUT test position: Tilt; Modulation type: GMSK

DASY4 Configuration:

- Probe: EX3DV4 SN3590; ConvF(8.39, 8.39, 8.39); Calibrated: 2009/4/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2010/1/22
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Mid Channel 810 /Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.406 mW/g


Mid Channel 810 /Zoom Scan (7x7x11) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 15.3 V/m; Power Drift = 0.042 dB

Peak SAR (extrapolated) = 0.635 W/kg

SAR(1 g) = 0.373 mW/g; SAR(10 g) = 0.214 mW/g

Maximum value of SAR (measured) = 0.453 mW/g

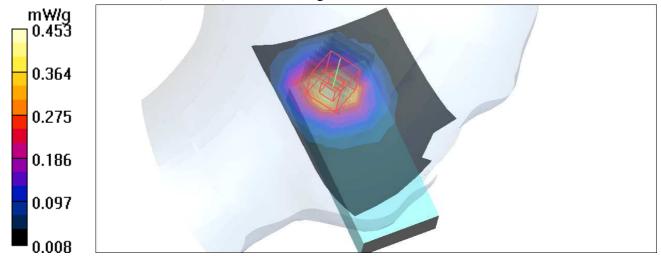



Date/Time: 2010/2/26 07:32:26

Test Laboratory: Bureau Veritas ADT

M13-Right Head Cheek Slide GSM 1900 Ch512

DUT: Mobile Phone ; Type: F-06B

Communication System: PCS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: HSL1900 Medium parameters used: f=1850.2 MHz; $\sigma=1.38$ mho/m; $\epsilon_r=40.3$; $\rho=1000$

 kg/m^3

Phantom section: Right Section; DUT test position: Cheek; Modulation type: GMSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.39, 8.39, 8.39); Calibrated: 2009/4/28

- Sensor-Surface: 3mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn861; Calibrated: 2010/1/22

- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Mid Channel 512 /Area Scan (7x15x1): Measurement grid: dx=15mm, dy=15mm


Maximum value of SAR (measured) = 0.086 mW/g

Mid Channel 512 /Zoom Scan (7x7x11) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 5.05 V/m; Power Drift = 0.116 dB

Peak SAR (extrapolated) = 0.111 W/kg

SAR(1 g) = 0.071 mW/g; SAR(10 g) = 0.043 mW/g

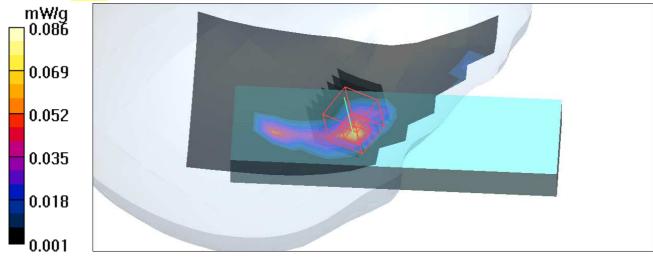



Date/Time: 2010/2/26 04:17:29

Test Laboratory: Bureau Veritas ADT

M13-Right Head Cheek Slide GSM 1900 Ch661

DUT: Mobile Phone ; Type: F-06B

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: HSL1900 Medium parameters used: f = 1880 MHz; $\sigma = 1.4$ mho/m; $\varepsilon_r = 40.3$; $\rho = 1000$ kg/m³

Phantom section: Right Section; DUT test position: Cheek; Modulation type: GMSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.39, 8.39, 8.39); Calibrated: 2009/4/28

- Sensor-Surface: 3mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn861; Calibrated: 2010/1/22

- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Mid Channel 661 /Area Scan (7x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.092 mW/g

Mid Channel 661 /Zoom Scan (7x7x11) /Cube 0: Measurement grid: dx=5mm, dy=5mm,


dz=3mm

Reference Value = 4.60 V/m; Power Drift = -0.176 dB

Peak SAR (extrapolated) = 0.122 W/kg

SAR(1 g) = 0.082 mW/g; SAR(10 g) = 0.049 mW/g

Maximum value of SAR (measured) = 0.099 mW/g

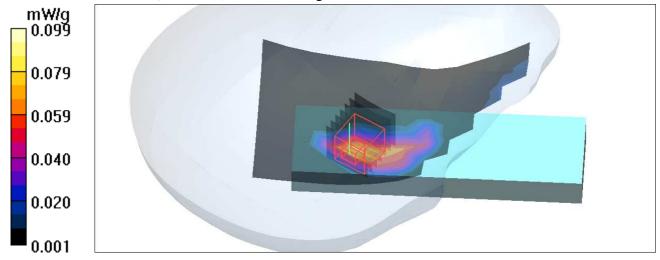



Date/Time: 2010/2/26 07:58:58

Test Laboratory: Bureau Veritas ADT

M13-Right Head Cheek Slide GSM 1900 Ch810

DUT: Mobile Phone ; Type: F-06B

Communication System: PCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: HSL1900 Medium parameters used (extrapolated): f=1909.8 MHz; $\sigma=1.44$ mho/m; $\epsilon_r=40.3$;

 $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section; DUT test position: Cheek; Modulation type: GMSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.39, 8.39, 8.39); Calibrated: 2009/4/28

- Sensor-Surface: 3mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn861; Calibrated: 2010/1/22

- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Mid Channel 810 /Area Scan (7x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.100 mW/g

Mid Channel 810 /Zoom Scan (7x7x11) /Cube 0: Measurement grid: dx=5mm, dy=5mm,


dz=3mm

Reference Value = 5.73 V/m; Power Drift = 0.118 dB

Peak SAR (extrapolated) = 0.135 W/kg

SAR(1 g) = 0.083 mW/g; SAR(10 g) = 0.048 mW/g

Maximum value of SAR (measured) = 0.101 mW/g

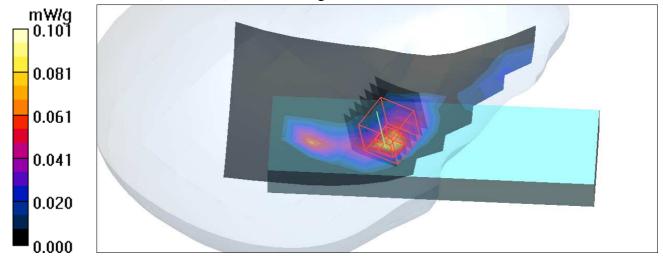



Date/Time: 2010/2/26 04:52:58

Test Laboratory: Bureau Veritas ADT

M14-Right Head Tilt Slide GSM 1900 Ch661

DUT: Mobile Phone ; Type: F-06B

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: HSL1900 Medium parameters used: f = 1880 MHz; $\sigma = 1.4$ mho/m; $\varepsilon_r = 40.3$; $\rho = 1000$ kg/m³

Phantom section: Right Section; DUT test position: Tilt; Modulation type: GMSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.39, 8.39, 8.39); Calibrated: 2009/4/28

- Sensor-Surface: 3mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn861; Calibrated: 2010/1/22

- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Mid Channel 661 /Area Scan (7x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.079 mW/g

Mid Channel 661 /Zoom Scan (7x7x11) /Cube 0: Measurement grid: dx=5mm, dy=5mm,


dz=3mm

Reference Value = 5.95 V/m; Power Drift = -0.053 dB

Peak SAR (extrapolated) = 0.106 W/kg

$SAR(1 g) = \frac{0.066}{0.066} mW/g; SAR(10 g) = 0.037 mW/g$

Maximum value of SAR (measured) = 0.080 mW/g

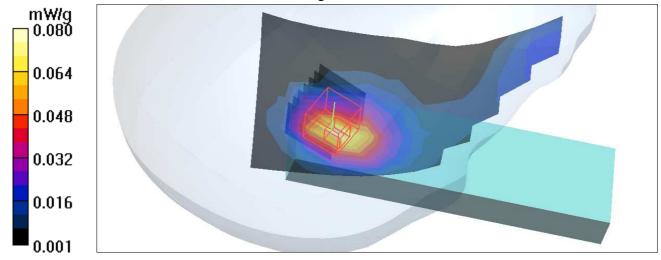



Date/Time: 2010/2/26 05:29:04

Test Laboratory: Bureau Veritas ADT

M15-Left Head Cheek Slide GSM 1900 Ch661

DUT: Mobile Phone ; Type: F-06B

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: HSL1900 Medium parameters used: f = 1880 MHz; $\sigma = 1.4$ mho/m; $\varepsilon_r = 40.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section; DUT test position: Cheek; Modulation type: GMSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.39, 8.39, 8.39); Calibrated: 2009/4/28

- Sensor-Surface: 3mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn861; Calibrated: 2010/1/22

- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Mid Channel 661 /Area Scan (7x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.086 mW/g

Mid Channel 661 /Zoom Scan (7x7x11) /Cube 0: Measurement grid: dx=5mm, dy=5mm,


dz=3mm

Reference Value = 5.15 V/m; Power Drift = -0.073 dB

Peak SAR (extrapolated) = 0.121 W/kg

SAR(1 g) = 0.078 mW/g; SAR(10 g) = 0.045 mW/g

Maximum value of SAR (measured) = 0.093 mW/g

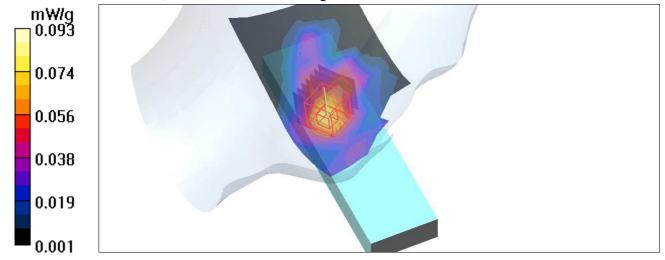



Date/Time: 2010/2/26 05:57:04

Test Laboratory: Bureau Veritas ADT

M16-Left Head Tilt Slide GSM 1900 Ch661

DUT: Mobile Phone ; Type: F-06B

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: HSL1900 Medium parameters used: f = 1880 MHz; $\sigma = 1.4$ mho/m; $\varepsilon_r = 40.3$; $\rho = 1000$ kg/m³

Phantom section: Left Section; DUT test position: Tilt; Modulation type: GMSK

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.39, 8.39, 8.39); Calibrated: 2009/4/28

- Sensor-Surface: 3mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn861; Calibrated: 2010/1/22

- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Mid Channel 661 /Area Scan (7x15x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.080 mW/g

Mid Channel 661 /Zoom Scan (7x7x11) /Cube 0: Measurement grid: dx=5mm, dy=5mm,


dz=3mm

Reference Value = 7.22 V/m; Power Drift = -0.166 dB

Peak SAR (extrapolated) = 0.131 W/kg

SAR(1 g) = 0.077 mW/g; SAR(10 g) = 0.042 mW/g

Maximum value of SAR (measured) = 0.095 mW/g

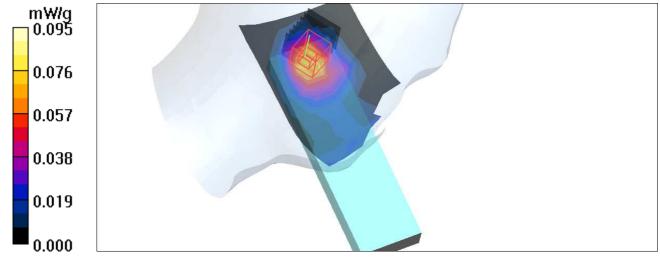



Date/Time: 2010/2/27 01:17:32

Test Laboratory: Bureau Veritas ADT

M17-Body FRONT WCDMA 850 Ch4182

DUT: Mobile Phone ; Type: F-06B

Communication System: WCDMA Band 5; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: MSL835 Medium parameters used: f = 836.4 MHz; $\sigma = 0.97$ mho/m; $\varepsilon_r = 53.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; DUT test position: Body; Modulation Type: BPSK

Separation Distance: 15 mm (The tip side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 SN3590; ConvF(9.93, 9.93, 9.93); Calibrated: 2009/4/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2010/1/22
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Mid Channel 4182 /Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.221 mW/g

Mid Channel 4182 /Zoom Scan (7x7x11) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 6.64 V/m; Power Drift = 0.148 dB

Peak SAR (extrapolated) = 0.264 W/kg

SAR(1 g) = 0.204 mW/g; SAR(10 g) = 0.153 mW/gMaximum value of SAR (measured) = 0.225 mW/g

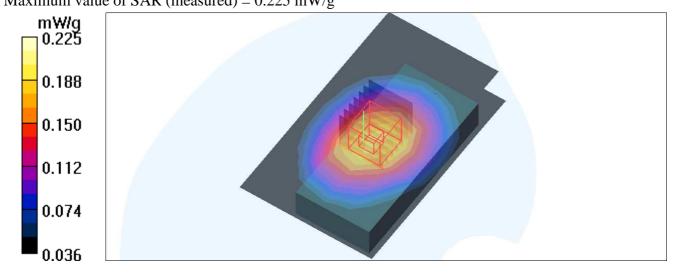



Date/Time: 2010/2/27 02:49:58

Test Laboratory: Bureau Veritas ADT

M18-Body Bottom WCDMA 850 Ch4132

DUT: Mobile Phone ; Type: F-06B

Communication System: WCDMA Band 5; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: MSL835 Medium parameters used: f = 826.4 MHz; $\sigma = 0.96 \text{ mho/m}$; $\varepsilon_r = 54$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; DUT test position: Body; Modulation Type: BPSK

Separation Distance: 15mm (The tip side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(9.93, 9.93, 9.93); Calibrated: 2009/4/28

- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2010/1/22
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Low Channel 4132 /Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.542 mW/g

Low Channel 4132 /Zoom Scan (7x7x11) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 6.20 V/m; Power Drift = 0.023 dB

Peak SAR (extrapolated) = 0.684 W/kg

SAR(1 g) = 0.479 mW/g; SAR(10 g) = 0.332 mW/gMaximum value of SAR (measured) = 0.547 mW/g

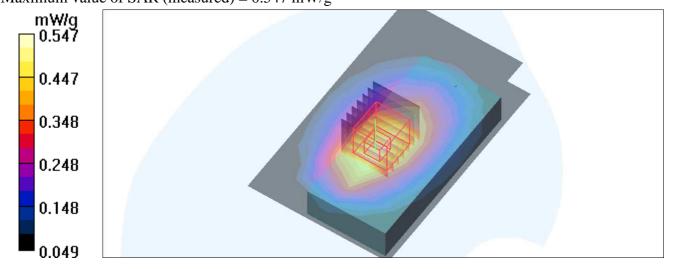



Date/Time: 2010/2/27 01:53:13

Test Laboratory: Bureau Veritas ADT

M18-Body Bottom WCDMA 850 Ch4182

DUT: Mobile Phone ; Type: F-06B

Communication System: WCDMA Band 5; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: MSL835 Medium parameters used: f = 836.4 MHz; $\sigma = 0.97 \text{ mho/m}$; $\varepsilon_r = 53.9$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; DUT test position: Body; Modulation Type: BPSK

Separation Distance: 15 mm (The tip side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(9.93, 9.93, 9.93); Calibrated: 2009/4/28

- Sensor-Surface: 3mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn861; Calibrated: 2010/1/22

- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Mid Channel 4182 /Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.571 mW/g

Mid Channel 4182 /Zoom Scan (7x7x11) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 16.5 V/m; Power Drift = 0.109 dB

Peak SAR (extrapolated) = 0.721 W/kg

SAR(1 g) = 0.511 mW/g; SAR(10 g) = 0.354 mW/gMaximum value of SAR (measured) = 0.584 mW/g

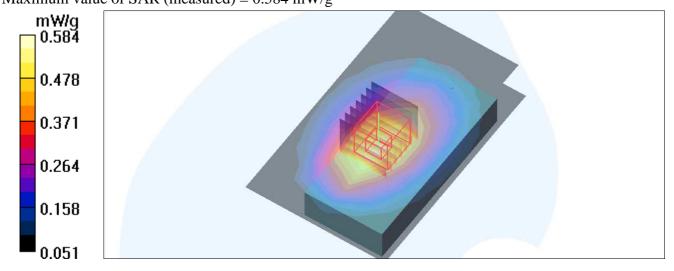



Date/Time: 2010/2/27 03:49:50

Test Laboratory: Bureau Veritas ADT

M18-Body Bottom WCDMA 850 Ch4233

DUT: Mobile Phone ; Type: F-06B

Communication System: WCDMA Band 5; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: MSL835 Medium parameters used: f = 846.6 MHz; $\sigma = 0.98 \text{ mho/m}$; $\varepsilon_r = 53.8$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section; DUT test position: Body; Modulation Type: BPSK

Separation Distance: 15 mm (The tip side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 SN3590; ConvF(9.93, 9.93, 9.93); Calibrated: 2009/4/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2010/1/22
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

High Channel 4233 /Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.546 mW/g


High Channel 4233 /Zoom Scan (7x7x11)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 6.47 V/m; Power Drift = -0.027 dB

Peak SAR (extrapolated) = 0.684 W/kg

SAR(1 g) = 0.484 mW/g; SAR(10 g) = 0.335 mW/g

Maximum value of SAR (measured) = 0.553 mW/g

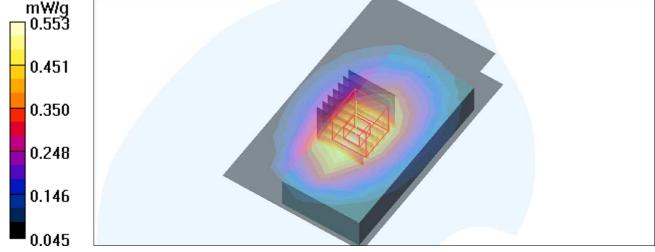



Date/Time: 2010/2/27 06:09:30

Test Laboratory: Bureau Veritas ADT

M19-Body Front PCS 1900 Ch661

DUT: Mobile Phone ; Type: F-06B

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: MSL1900 Medium parameters used: f = 1880 MHz; $\sigma = 1.55$ mho/m; $\varepsilon_r = 54.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; DUT test position: Body; Modulation Type: GMSK

Separation Distance: 15 mm (The tip side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 SN3590; ConvF(8.39, 8.39, 8.39); Calibrated: 2009/4/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2010/1/22
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Mid Channel 661/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.103 mW/g

Mid Channel 661/Zoom Scan (7x7x11) /Cube 0: Measurement grid: dx=5mm, dy=5mm,

dz=3mm

Reference Value = 7.65 V/m; Power Drift = -0.096 dB

Peak SAR (extrapolated) = 0.142 W/kg

 $SAR(1 g) = \frac{0.091}{0.091} mW/g; SAR(10 g) = 0.057 mW/g$

Maximum value of SAR (measured) = 0.107 mW/g


Mid Channel 661/Zoom Scan (7x7x11) /Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 7.65 V/m; Power Drift = -0.096 dB

Peak SAR (extrapolated) = 0.107 W/kg

SAR(1 g) = 0.069 mW/g; SAR(10 g) = 0.044 mW/g

Maximum value of SAR (measured) = 0.081 mW/g

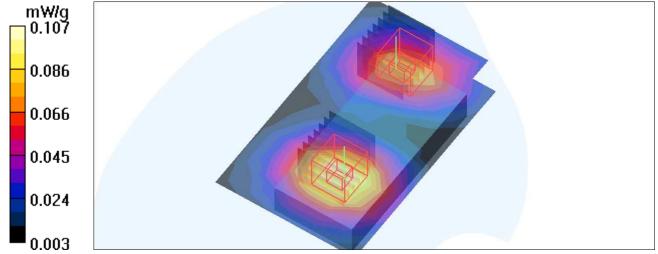



Date/Time: 2010/2/27 07:54:24

Test Laboratory: Bureau Veritas ADT

M20-Body Bottom PCS 1900 Ch512

DUT: Mobile Phone ; Type: F-06B

Communication System: PCS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: MSL1900 Medium parameters used: f=1850.2 MHz; $\sigma=1.53$ mho/m; $\epsilon_r=54.8$; $\rho=1000$

 kg/m^3

Phantom section: Flat Section; DUT test position: Body; Modulation Type: GMSK

Separation Distance: 15mm (The tip side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590 ; ConvF(8.39, 8.39, 8.39) ; Calibrated: 2009/4/28

- Sensor-Surface: 3mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn861; Calibrated: 2010/1/22

- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Low Channel 512/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.237 mW/g

Low Channel 512/Zoom Scan (7x7x11) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 9.26 V/m: Power Drift = -0.078 dB

Peak SAR (extrapolated) = 0.368 W/kg

SAR(1 g) = 0.224 mW/g; SAR(10 g) = 0.131 mW/gMaximum value of SAR (measured) = 0.271 mW/g

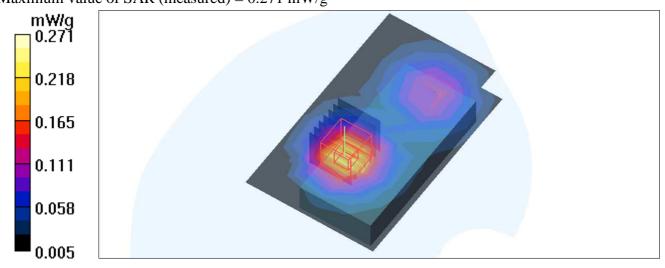



Date/Time: 2010/2/27 06:52:44

Test Laboratory: Bureau Veritas ADT

M20-Body Bottom PCS 1900 Ch661

DUT: Mobile Phone ; Type: F-06B

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: MSL1900 Medium parameters used: f = 1880 MHz; $\sigma = 1.55$ mho/m; $\varepsilon_r = 54.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; DUT test position: Body; Modulation Type: GMSK

Separation Distance: 0 mm (The tip side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.39, 8.39, 8.39); Calibrated: 2009/4/28

- Sensor-Surface: 3mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn861; Calibrated: 2010/1/22

- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Mid Channel 661/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.269 mW/g

Mid Channel 661/Zoom Scan (7x7x11) /Cube 0: Measurement grid: dx=5mm, dy=5mm,


dz=3mm

Reference Value = 9.57 V/m; Power Drift = 0.006 dB

Peak SAR (extrapolated) = 0.423 W/kg

$SAR(1 g) = \frac{0.253}{mW/g}; SAR(10 g) = 0.146 mW/g$

Maximum value of SAR (measured) = 0.308 mW/g

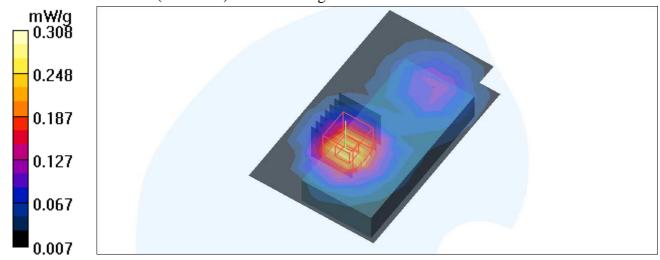



Date/Time: 2010/2/27 08:45:13

Test Laboratory: Bureau Veritas ADT

M20-Body Bottom PCS 1900 Ch810

DUT: Mobile Phone ; Type: F-06B

Communication System: PCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: MSL1900 Medium parameters used: f=1909.8 MHz; $\sigma=1.57$ mho/m; $\epsilon_r=54.6$; $\rho=1000$

 kg/m^3

Phantom section: Flat Section; DUT test position: Body; Modulation Type: GMSK

Separation Distance: 15 mm (The tip side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.39, 8.39, 8.39); Calibrated: 2009/4/28

- Sensor-Surface: 3mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn861; Calibrated: 2010/1/22

- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


High Channel 810/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.292 mW/g

High Channel 810/Zoom Scan (7x7x11) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 9.76 V/m: Power Drift = -0.045 dB

Peak SAR (extrapolated) = 0.466 W/kg

SAR(1 g) = 0.279 mW/g; SAR(10 g) = 0.160 mW/gMaximum value of SAR (measured) = 0.340 mW/g

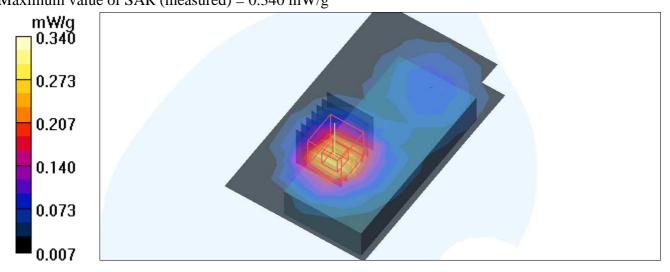



Date/Time: 2010/2/27 09:57:55

Test Laboratory: Bureau Veritas ADT

M21-Body Front PCS 1900 TS1 Ch661

DUT: Mobile Phone ; Type: F-06B

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: MSL1900 Medium parameters used: f = 1880 MHz; $\sigma = 1.55$ mho/m; $\varepsilon_r = 54.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; DUT test position: Body; Modulation Type: GMSK

Separation Distance: 15 mm (The tip side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 SN3590; ConvF(8.39, 8.39, 8.39); Calibrated: 2009/4/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2010/1/22
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Mid Channel 661/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.105 mW/g

Mid Channel 661/Zoom Scan (7x7x11)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 7.39 V/m; Power Drift = -0.179 dB

Peak SAR (extrapolated) = 0.140 W/kg

SAR(1 g) = 0.089 mW/g; SAR(10 g) = 0.056 mW/g

Mid Channel 661/Zoom Scan (7x7x11) /Cube 1: Measurement grid: dx=5mm, dy=5mm,


dz=3mm

Reference Value = 7.39 V/m; Power Drift = -0.179 dB

Peak SAR (extrapolated) = 0.108 W/kg

SAR(1 g) = 0.07 mW/g; SAR(10 g) = 0.044 mW/g

Maximum value of SAR (measured) = 0.084 mW/g

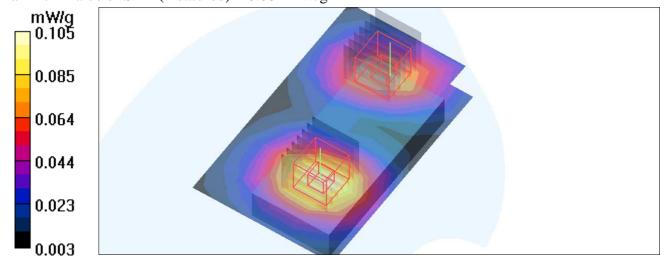



Date/Time: 2010/2/27 11:51:46

Test Laboratory: Bureau Veritas ADT

M22-Body Bottom PCS 1900 TS1 Ch512

DUT: Mobile Phone ; Type: F-06B

Communication System: PCS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: MSL1900 Medium parameters used: f=1850.2 MHz; $\sigma=1.53$ mho/m; $\epsilon_r=54.8$; $\rho=1000$

 kg/m^3

Phantom section: Flat Section; DUT test position: Body; Modulation Type: GMSK

Separation Distance: 15mm (The tip side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.39, 8.39, 8.39); Calibrated: 2009/4/28

- Sensor-Surface: 3mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn861; Calibrated: 2010/1/22

- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Low Channel 512/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.291 mW/g

Low Channel 512/Zoom Scan (7x7x11)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 10.2 V/m; Power Drift = 0.030 dB

Peak SAR (extrapolated) = 0.449 W/kg

SAR(1 g) = 0.274 mW/g; SAR(10 g) = 0.158 mW/gMaximum value of SAR (measured) = 0.329 mW/g

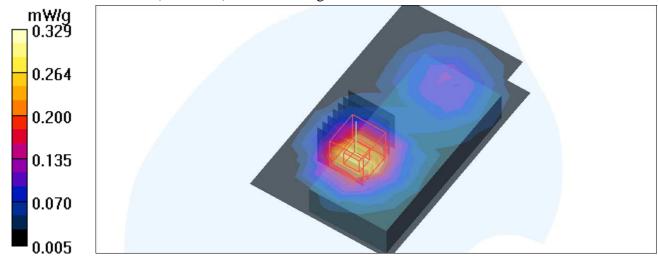



Date/Time: 2010/2/27 10:52:49

Test Laboratory: Bureau Veritas ADT

M22-Body Bottom PCS 1900 TS1 Ch661

DUT: Mobile Phone ; Type: F-06B

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: MSL1900 Medium parameters used: f = 1880 MHz; $\sigma = 1.55$ mho/m; $\varepsilon_r = 54.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section; DUT test position: Body; Modulation Type: GMSK

Separation Distance: 15 mm (The tip side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.39, 8.39, 8.39); Calibrated: 2009/4/28

- Sensor-Surface: 3mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn861; Calibrated: 2010/1/22

- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Mid Channel 661/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.351 mW/g

Mid Channel 661/Zoom Scan (7x7x11) /Cube 0: Measurement grid: dx=5mm, dy=5mm,


dz=3mm

Reference Value = 11.0 V/m; Power Drift = 0.005 dB

Peak SAR (extrapolated) = 0.554 W/kg

SAR(1 g) = 0.334 mW/g; SAR(10 g) = 0.193 mW/g

Maximum value of SAR (measured) = 0.404 mW/g

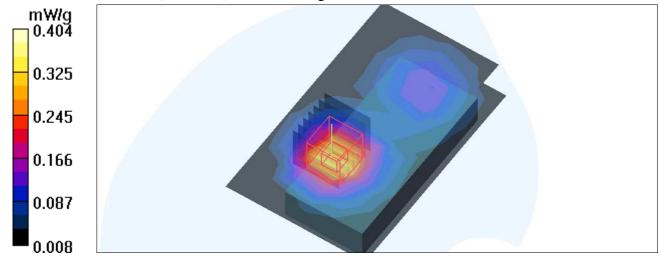



Date/Time: 2010/2/27 13:01:42

Test Laboratory: Bureau Veritas ADT

M22-Body Bottom PCS 1900 TS1 Ch810

DUT: Mobile Phone ; Type: F-06B

Communication System: PCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: MSL1900 Medium parameters used: f=1909.8 MHz; $\sigma=1.57$ mho/m; $\epsilon_r=54.6$; $\rho=1000$

 kg/m^3

Phantom section: Flat Section; DUT test position: Body; Modulation Type: GMSK

Separation Distance: 15 mm (The tip side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 - SN3590 ; ConvF(8.39, 8.39, 8.39) ; Calibrated: 2009/4/28

- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn861; Calibrated: 2010/1/22
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

High Channel 810/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.377 mW/g


High Channel 810/Zoom Scan (7x7x11) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 11.2 V/m; Power Drift = -0.023 dB

Peak SAR (extrapolated) = 0.604 W/kg

SAR(1 g) = 0.363 mW/g; SAR(10 g) = 0.208 mW/g

Maximum value of SAR (measured) = 0.440 mW/g

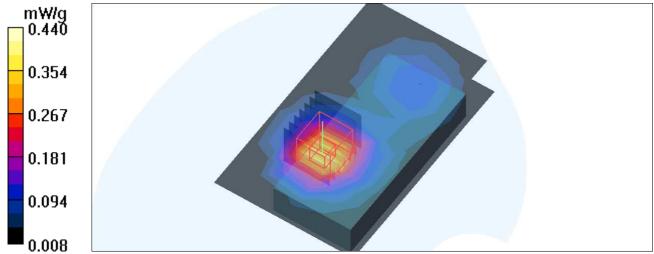



Date/Time: 2010/2/25 00:34:26

Test Laboratory: Bureau Veritas ADT

System Validation HSL 835MHz

DUT: Dipole 850 MHz; Type: D835V2; Serial: 4d021; Test Frequency: 835 MHz

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1; Modulation type: CW

Medium: HSL835; Medium parameters used: f = 835 MHz; $\sigma = 0.92$ mho/m; $\varepsilon_r = 41.9$; $\rho = 1000$ kg/m³;

Liquid level: 151 mm

Phantom section: Flat Section; Separation distance: 15 mm (The feetpoint of the dipole to the

Phantom)Air temp.: 22.9 degrees; Liquid temp.: 22.5 degrees

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(9.79, 9.79, 9.79); Calibrated: 2009/4/28

- Sensor-Surface: 3mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn861; Calibrated: 2010/1/22

- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

d=15mm, Pin=250mW/Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 2.30 mW/g


d=15mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 52.6 V/m; Power Drift = 0.035 dB

Peak SAR (extrapolated) = 3.07 W/kg

SAR(1 g) = 2.27 mW/g; SAR(10 g) = 1.49 mW/g

Maximum value of SAR (measured) = 2.37 mW/g

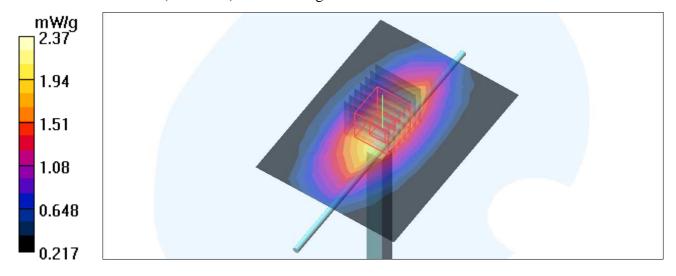



Date/Time: 2010/2/27 00:35:40

Test Laboratory: Bureau Veritas ADT

System Validation MSL 835 MHz

DUT: Dipole 850 MHz; Type: D835V2; Serial: 4d021; Test Frequency: 835 MHz

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1; Modulation type: CW

Medium: MSL835; Medium parameters used: f = 835 MHz; $\sigma = 0.97$ mho/m; $\varepsilon_r = 53.9$; $\rho = 1000$ kg/m³;

Liquid level: 150 mm

Phantom section: Flat Section; Separation distance: 15 mm (The feetpoint of the dipole to the

Phantom)Air temp.: 22.8 degrees; Liquid temp.: 22.4 degrees

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(9.93, 9.93, 9.93); Calibrated: 2009/4/28

- Sensor-Surface: 3mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn861; Calibrated: 2010/1/22

- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

d=15mm, Pin=250mW/Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 2.28 mW/g

d=15mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 52.0 V/m; Power Drift = -0.030 dB

Peak SAR (extrapolated) = 3.08 W/kg

SAR(1 g) = 2.36 mW/g; SAR(10 g) = 1.55 mW/gMaximum value of SAR (measured) = 2.39 mW/g

1.95 1.52 1.08 0.648 0.212



Date/Time: 2010/2/26 00:38:02

Test Laboratory: Bureau Veritas ADT

System Validation HSL 1900MHz

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d022; Test Frequency: 1900 MHz

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1; Modulation type: CW

Medium: HSL1900; Medium parameters used: f = 1900 MHz; $\sigma = 1.43$ mho/m; $\varepsilon_r = 40.3$; $\rho = 1000$ kg/m³;

Liquid level: 152 mm

Phantom section: Flat Section; Separation distance: 10 mm (The feetpoint of the dipole to the

Phantom)Air temp.: 22.8 degrees; Liquid temp.: 22.5 degrees

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.39, 8.39, 8.39); Calibrated: 2009/4/28

- Sensor-Surface: 3mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn861; Calibrated: 2010/1/22

- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

d=10mm, Pin=250mW/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 12.5 mW/g


d=10mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm,

dy=5mm, dz=5mm

Reference Value = 94.4 V/m; Power Drift = -0.051 dB

Peak SAR (extrapolated) = 19.2 W/kg

SAR(1 g) = 9.83 mW/g; SAR(10 g) = 5.05 mW/g

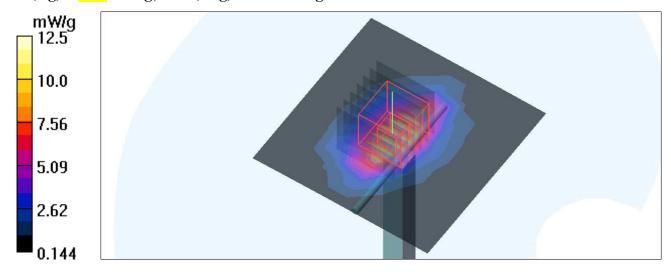



Date/Time: 2010/2/27 05:21:29

Test Laboratory: Bureau Veritas ADT

System Validation MSL 1900MHz

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: 5d022; Test Frequency: 1900 MHz

Communication System: CW ; Frequency: 1900 MHz; Duty Cycle: 1:1; Modulation type: CW Medium: MSL1900;Medium parameters used: f=1900 MHz; $\sigma=1.56$ mho/m; $\epsilon_r=54.6$; $\rho=1000$

kg/m³; Liquid level: 151 mm

Phantom section: Flat Section; Separation distance: 10 mm (The feetpoint of the dipole to the

Phantom)Air temp.: 22.7 degrees; Liquid temp.: 22.4 degrees

DASY4 Configuration:

- Probe: EX3DV4 - SN3590; ConvF(8.39, 8.39, 8.39); Calibrated: 2009/4/28

- Sensor-Surface: 3mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn861; Calibrated: 2010/1/22

- Phantom: SAM 12; Type: SAM V4.0; Serial: TP 1202

- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


d=10mm, Pin=250mW/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 12.7 mW/g

d=10mm, Pin=250mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 89.2 V/m; Power Drift = -0.043 dB

Peak SAR (extrapolated) = 18.3 W/kg

SAR(1 g) = 9.76 mW/g; SAR(10 g) = 5.03 mW/g

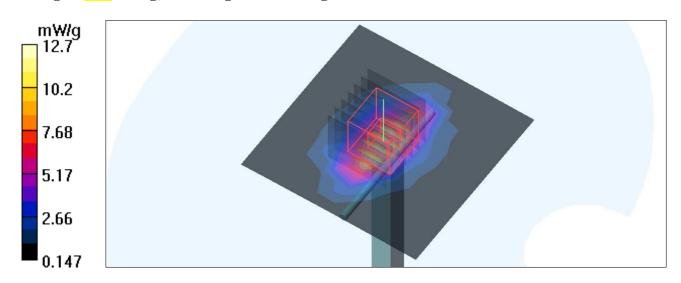



APPENDIX B: BV ADT SAR MEASUREMENT SYSTEM





APPENDIX C: PHOTOGRAPHS OF SYSTEM VALIDATION

