



A D T

# SAR TEST REPORT

**REPORT NO.:** SA990514C15

**MODEL NO.:** F-09B

**RECEIVED:** May 14, 2010

**TESTED:** May 25 ~ May 28, 2010

**ISSUED:** May 28, 2010

**APPLICANT:** FUJITSU LIMITED

**ADDRESS:** 1-1, Kamikodanaka 4-chome, Nakahara-ku,  
Kawasaki 211-8588, Japan

**ISSUED BY:** Bureau Veritas Consumer Products Services (H.K.)  
Ltd., Taoyuan Branch

**LAB ADDRESS:** No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou Hsiang,  
Taipei Hsien 244, Taiwan, R.O.C.

**TEST LOCATION:** No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei  
Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This test report consists of 25 pages in total except Appendix. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.





A D T

## TABLE OF CONTENTS

1. CERTIFICATION .....	3
2. GENERAL INFORMATION .....	4
2.1 GENERAL DESCRIPTION OF EUT.....	4
2.2 GENERAL DESCRIPTION OF APPLIED STANDARDS.....	5
2.3 GENERAL INOFRIMATION OF THE SAR SYSTEM .....	6
2.4 TEST EQUIPMENT .....	9
2.5 GENERAL DESCRIPTION OF THE SPATIAL PEAK SAR EVALUATION .....	10
3. DESCRIPTION OF SUPPORT UNITS.....	13
4. RECIPES FOR TISSUE SIMULATING LIQUIDS .....	14
5. SYSTEM VALIDATION.....	18
5.1 TEST PROCEDURE .....	18
5.2 VALIDATION RESULTS .....	19
5.3 SYSTEM VALIDATION UNCERTAINTIES .....	20
6. TEST RESULTS .....	21
6.1 TEST PROCEDURES.....	21
6.2 DESCRIPTION OF TEST CONDITION.....	22
6.3 MEASURED SAR RESULT .....	23
6.4 SAR LIMITS .....	24
7. INFORMATION ON THE TESTING LABORATORIES .....	25

APPENDIX A: TEST CONFIGURATIONS AND TEST DATA

APPENDIX B: ADT SAR MEASUREMENT SYSTEM

APPENDIX C: PHOTOGRAPHS OF SYSTEM VALIDATION

APPENDIX D: SYSTEM CERTIFICATE & CALIBRATION



A D T

## 1. CERTIFICATION

**PRODUCT:** Mobile phone

**MODEL NO.:** F-09B

**BRAND:** FOMA

**APPLICANT:** FUJITSU LIMITED

**TESTED:** May 25 ~ May 28, 2010

**TEST SAMPLE:** ENGINEERING SAMPLE

**STANDARDS:** FCC Part 2 (Section 2.1093)

FCC OET Bulletin 65, Supplement C (01-01)

RSS-102

The above equipment (model: F-09B) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**PREPARED BY** : *Andrea Hsia* , DATE: May 28, 2010  
Andrea Hsia / Specialist

**TECHNICAL  
ACCEPTANCE** : *Mason Chang* , DATE: May 28, 2010  
Responsible for RF Mason Chang / Engineer

**APPROVED BY** : *Gary Chang* , DATE: May 28, 2010  
Gary Chang / Assistant Manager



A D T

## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

EUT	Mobile phone	
MODEL NO.	F-09B	
POWER SUPPLY	3.7Vdc (Li-ion battery) 5.4Vdc (Adapter)	
MODULATION TYPE	<b>For WCDMA 850:</b> WCDMA (Band 5) / HSDPA <b>For PCS 1900:</b> GMSK	
FREQUENCY RANGE	824MHz ~ 849MHz ; 1850MHz ~ 1910MHz	
CHANNEL FREQUENCIES UNDER TEST AND ITS CONDUCTED OUTPUT POWER	<b>WCDMA 850 band</b> 23.7dBm / 824.2MHz for CH128 23.5dBm / 836.6MHz for CH190 23.3dBm / 848.8MHz for CH251	<b>PCS1900 band</b> 29.0dBm / 1850.2MHz for CH512 29.1dBm / 1880.0MHz for CH661 29.0dBm / 1909.8MHz for CH810
MAX. AVERAGE SAR (1g)	<b>WCDMA 850</b> PCS1900	1.52W/kg 1.19W/kg
ANTENNA TYPE	Embedded inverted-F	
ANTENNA GAIN	<b>850MHz:</b> Integral antenna with -2dBi gain (EUT open) Integral antenna with -5dBi gain (EUT close) <b>1900MHz:</b> Integral antenna with 0dBi gain (EUT open) Integral antenna with -2dBi gain (EUT close)	
DATA CABLE	NA	
I/O PORTS	Refer to user's manual	
ACCESSORY DEVICES	Battery	

#### NOTE:

1. The EUT is powered by the following battery.

BATTERY	
BRAND	Fujitsu Limited
MODEL	F17
RATING	3.7Vdc, 800mAh

2. The following accessory is for support units only.

PRODUCT	BRAND	DESCRIPTION
Adapter	SMK	I/P: 100-240Vac, 0.12A, 50-60Hz O/P: 5.4Vdc, 700mA
USB cable	NA	0.8m non-shielded cable without core

3. Hardware version: V2.3
4. Software version: R23.1.
5. IMEI Code: 359085030009607.
6. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.



A D T

## 2.2 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to the specifications of the manufacturer, this product must comply with the requirements of the following standards:

**FCC Part 2 (2.1093)**

**FCC OET Bulletin 65, Supplement C (01- 01)**

**RSS-102**

**IEEE 1528-2003**

All test items have been performed and recorded as per the above standards.

## 2.3 GENERAL INOFRMATION OF THE SAR SYSTEM

DASY5 (**Software 5.2 Build 162**) consists of high precision robot, probe alignment sensor, phantom, robot controller, controlled measurement server and near-field probe. The robot includes six axes that can move to the precision position of the DASY5 software defined. The DASY5 software can define the area that is detected by the probe. The robot is connected to controlled box. Controlled measurement server is connected to the controlled robot box. The DAE includes amplifier, signal multiplexing, AD converter, offset measurement and surface detection. It is connected to the Electro-optical coupler (ECO). The ECO performs the conversion form the optical into digital electric signal of the DAE and transfers data to the PC.

## EX3DV3 ISOTROPIC E-FIELD PROBE

<b>CONSTRUCTION</b>	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
<b>FREQUENCY</b>	10 MHz to > 6 GHz Linearity: $\pm 0.2$ dB (30 MHz to 6 GHz)
<b>DIRECTIVITY</b>	$\pm 0.3$ dB in HSL (rotation around probe axis) $\pm 0.5$ dB in tissue material (rotation normal to probe axis)
<b>DYNAMIC RANGE</b>	10 $\mu$ W/g to > 100 mW/g Linearity: $\pm 0.2$ dB (noise: typically < 1 $\mu$ W/g)
<b>DIMENSIONS</b>	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
<b>APPLICATION</b>	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.

### NOTE

1. The Probe parameters have been calibrated by the SPEAG. Please reference "APPENDIX D" for the Calibration Certification Report.
2. For frequencies above 800MHz, calibration in a rectangular wave-guide is used, because wave-guide size is manageable.
3. For frequencies below 800MHz, temperature transfer calibration is used because the wave-guide size becomes relatively large.



A D T

## TWIN SAM V4.0

<b>CONSTRUCTION</b>	The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528-2003, EN 62209-1 and IEC 62209. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points with the robot.
<b>SHELL THICKNESS</b>	2 ± 0.2mm
<b>FILLING VOLUME</b>	Approx. 25liters
<b>DIMENSIONS</b>	Height: 810mm; Length: 1000mm; Width: 500mm

## SYSTEM VALIDATION KITS:

<b>CONSTRUCTION</b>	Symmetrical dipole with I/4 balun enables measurement of feedpoint impedance with NWA matched for use near flat phantoms filled with brain simulating solutions. Includes distance holder and tripod adaptor
<b>CALIBRATION</b>	Calibrated SAR value for specified position and input power at the flat phantom in brain simulating solutions
<b>FREQUENCY</b>	835, 1900MHz
<b>RETURN LOSS</b>	> 20dB at specified validation position
<b>POWER CAPABILITY</b>	> 100W (f < 1GHz); > 40W (f > 1GHz)
<b>OPTIONS</b>	Dipoles for other frequencies or solutions and other calibration conditions upon request



A D T

## DEVICE HOLDER FOR SAM TWIN PHANTOM

### CONSTRUCTION

The device holder for the mobile phone device is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles. The holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity  $\epsilon = 3$  and loss tangent  $\delta = 0.02$ . The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered. The device holder for the portable device makes up of the polyethylene foam. The dielectric parameters of material close to the dielectric parameters of the air.

## DATA ACQUISITION ELECTRONICS

### CONSTRUCTION

The data acquisition electronics (DAE3) consists of a highly sensitive electrometer grade preamplifier with auto-zeroing, a channel and gain-switching multiplex, a fast 16 bit AD converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock. The mechanical probe is mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection. The input impedance of the DAE3 box is 200MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



A D T

## 2.4 TEST EQUIPMENT

### FOR SAR MEASUREMENT

ITEM	NAME	BRAND	TYPE	SERIES NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
1	SAM Phantom	S & P	QD000 P40 CA	TP-1485	NA	NA
2	Signal Generator	Agilent	E8257C	MY43320668	Feb. 23, 2010	Feb. 22, 2011
3	E-Field Probe	S & P	EX3DV3	3504	Jan. 26, 2010	Jan. 25, 2011
4	DAE	S & P	DAE	510	Dec. 16, 2009	Dec. 15, 2010
5	Robot Positioner	Staubli Unimation	NA	NA	NA	NA
6	Validation Dipole	S & P	D835V2	4d021	Apr. 29, 2010	Apr. 28, 2011
7	Validation Dipole	S & P	D1900V2	5d036	Feb. 23, 2010	Feb. 22, 2011

**NOTE:** Before starting, all test equipment shall be warmed up for 30min.

### FOR TISSUE PROPERTY

ITEM	NAME	BRAND	TYPE	SERIES NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
1	Network Analyzer	Agilent	E8358A	US41480538	Dec. 03, 2009	Dec. 02, 2010
2	Dielectric Probe	Agilent	85070D	US01440176	NA	NA

#### NOTE:

1. Before starting, all test equipment shall be warmed up for 30min.
2. The tolerance ( $k=1$ ) specified by Agilent for general dielectric measurements, deriving from inaccuracies in the calibration data, analyzer drift, and random errors, are usually  $\pm 2.5\%$  and  $\pm 5\%$  for measured permittivity and conductivity, respectively. However, the tolerances for the conductivity is smaller for material with large loss tangents, i.e., less than  $\pm 2.5\%$  ( $k=1$ ). It can be substantially smaller if more accurate methods are applied

## 2.5 GENERAL DESCRIPTION OF THE SPATIAL PEAK SAR EVALUATION

The DASY5 post-processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the micro-volt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Norm <sub>i</sub> , a <sub>i0</sub> , a <sub>i1</sub> , a <sub>i2</sub>
	- Conversion factor	ConvF <sub>i</sub>
	- Diode compression point	dcp <sub>i</sub>
Device parameters:	- Frequency	F
	- Crest factor	Cf
Media parameters:	- Conductivity	$\sigma$
	- Density	$\rho$

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \bullet \frac{cf}{dcp_i}$$

V <sub>i</sub>	=compensated signal of channel i	(i = x, y, z)
U <sub>i</sub>	=input signal of channel i	(i = x, y, z)
Cf	=crest factor of exciting field	(DASY parameter)
dcp <sub>i</sub>	=diode compression point	(DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

$$\text{E-fieldprobes: } E_i = \sqrt{\frac{V_i}{\text{Norm}_i \cdot \text{ConvF}}}$$

$$\text{H-fieldprobes: } H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

$V_i$	= compensated signal of channel i	$(i = x, y, z)$
$\text{Norm}_i$	= sensor sensitivity of channel i $\mu\text{V}/(\text{V}/\text{m})^2$ for E-field Probes	$(i = x, y, z)$
$\text{ConvF}$	= sensitivity enhancement in solution	
$a_{ij}$	= sensor sensitivity factors for H-field probes	
$F$	= carrier frequency [GHz]	
$E_i$	= electric field strength of channel i in $\text{V}/\text{m}$	
$H_i$	= magnetic field strength of channel i in $\text{A}/\text{m}$	

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1'000}$$

$SAR$	= local specific absorption rate in $\text{mW}/\text{g}$
$E_{tot}$	= total field strength in $\text{V}/\text{m}$
$\sigma$	= conductivity in [ $\text{mho}/\text{m}$ ] or [ $\text{Siemens}/\text{m}$ ]
$\rho$	= equivalent tissue density in $\text{g}/\text{cm}^3$



A D T

Note that the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid. The entire evaluation of the spatial peak values is performed within the Post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

1. The extraction of the measured data (grid and values) from the Zoom Scan
2. The calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
3. The generation of a high-resolution mesh within the measured volume
4. The interpolation of all measured values from the measurement grid to the high-resolution grid
5. The extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
6. The calculation of the averaged SAR within masses of 1g and 10g.

The probe is calibrated at the center of the dipole sensors that is located 1 to 2.7mm away from the probe tip. During measurements, the probe stops shortly above the phantom surface, depending on the probe and the surface detecting system. Both distances are included as parameters in the probe configuration file. The software always knows exactly how far away the measured point is from the surface. As the probe cannot directly measure at the surface, the values between the deepest measured point and the surface must be extrapolated. The angle between the probe axis and the surface normal line is less than 30 degree.



A D T

The maximum search is automatically performed after each area scan measurement. It is based on splines in two or three dimensions. The procedure can find the maximum for most SAR distributions even with relatively large grid spacing. After the area scanning measurement, the probe is automatically moved to a position at the interpolated maximum. The following scan can directly use this position for reference, e.g., for a finer resolution grid or the cube evaluations. The 1g and 10g peak evaluations are only available for the predefined cube 7 x 7 x 7 scans. The routines are verified and optimized for the grid dimensions used in these cube measurements. The measured volume of 30 x 30 x 30mm contains about 30g of tissue. The first procedure is an extrapolation (incl. boundary correction) to get the points between the lowest measured plane and the surface. The next step uses 3D interpolation to get all points within the measured volume in a 1mm grid (42875 points). In the last step, a 1g cube is placed numerically into the volume and its averaged SAR is calculated. This cube is moved around until the highest averaged SAR is found. If the highest SAR is found at the edge of the measured volume, the system will issue a warning: higher SAR values might be found outside of the measured volume. In that case the cube measurement can be repeated, using the new interpolated maximum as the center.

### 3. DESCRIPTION OF SUPPORT UNITS

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.
1	Universal Radio Communication Tester	R&S	CMU200	104484

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA

**NOTE:** All power cords of the above support units are non shielded (1.8m).

## 4. RECIPES FOR TISSUE SIMULATING LIQUIDS

For the measurement of the field distribution inside the SAM phantom, the phantom must be filled with 25 litters of tissue simulation liquid.

The following are some common ingredients :

- **WATER-** Deionized water (pure H<sub>2</sub>O), resistivity  $\geq 16$  M - as basis for the liquid
- **SUGAR-** Refined sugar in crystals, as available in food shops - to reduce relative permittivity
- **SALT-** Pure NaCl - to increase conductivity
- **CELLULOSE-** Hydroxyethyl-cellulose, medium viscosity (75-125mPa.s, 2% in water, 20°C),  
CAS # 54290 - to increase viscosity and to keep sugar in solution
- **PRESERVATIVE-** Preventol D-7 Bayer AG, D-51368 Leverkusen, CAS # 55965-84-9 - to prevent the spread of bacteria and molds
- **DGMBE-** Diethylenglycol-monobutyl ether (DGMBE), Fluka Chemie GmbH,  
CAS # 112-34-5 - to reduce relative permittivity

THE RECIPES FOR 835MHz SIMULATING LIQUID TABLE

INGREDIENT	HEAD SIMULATING LIQUID 835MHz (HSL-835)	MUSCLE SIMULATING LIQUID 835MHz (MSL-835)
Water	40.28%	50.07%
Cellulose	02.41%	NA
Salt	01.38%	0.94%
Preventol D-7	00.18%	0.09%
Sugar	57.97%	48.2%
Dielectric Parameters at 22°C	$f = 835\text{MHz}$ $\epsilon = 41.5 \pm 5\%$ $\sigma = 0.97 \pm 5\% \text{ S/m}$	$f = 835\text{MHz}$ $\epsilon = 55.0 \pm 5\%$ $\sigma = 1.05 \pm 5\% \text{ S/m}$

## THE RECIPES FOR 1900MHz SIMULATING LIQUID TABLE

INGREDIENT	HEAD SIMULATING LIQUID 1900MHz (HSL-1900)	MUSCLE SIMULATING LIQUID 1900MHz (MSL-1900)
Water	55.24%	70.16%
DGMBE	44.45%	29.44%
Salt	0.306%	00.39%
Dielectric Parameters at 22°C	$f = 1900\text{MHz}$ $\epsilon = 40.0 \pm 5\%$ $\sigma = 1.40 \pm 5\% \text{ S/m}$	$f = 1900\text{MHz}$ $\epsilon = 53.3 \pm 5\%$ $\sigma = 1.52 \pm 5\% \text{ S/m}$

Testing the liquids using the Agilent Network Analyzer E8358A and Agilent Dielectric Probe Kit 85070D. The testing procedure is following as

1. Turn Network Analyzer on and allow at least 30min. warm up.
2. Mount dielectric probe kit so that interconnecting cable to Network Analyzer will not be moved during measurements or calibration.
3. Pour de-ionized water and measure water temperature ( $\pm 1^\circ$ ).
4. Set water temperature in Agilent-Software (Calibration Setup).
5. Perform calibration.
6. Validate calibration with dielectric material of known properties (e.g. polished ceramic slab with  $>8\text{mm}$  thickness  $\epsilon' = 10.0$ ,  $\epsilon'' = 0.0$ ). If measured parameters do not fit within tolerance, repeat calibration ( $\pm 0.2$  for  $\epsilon'$ :  $\pm 0.1$  for  $\epsilon''$ ).
7. Conductivity can be calculated from  $\epsilon''$  by  $\sigma = \omega \epsilon_0 \epsilon'' = \epsilon'' f [\text{GHz}] / 18$ .
8. Measure liquid shortly after calibration. Repeat calibration every hour.
9. Stir the liquid to be measured. Take a sample ( $\sim 50\text{ml}$ ) with a syringe from the center of the liquid container.
10. Pour the liquid into a small glass flask. Hold the syringe at the bottom of the flask to avoid air bubbles.
11. Put the dielectric probe in the glass flask. Check that there are no air bubbles in front of the opening in the dielectric probe kit.
12. Perform measurements.
13. Adjust medium parameters in DASY5 for the frequencies necessary for the measurements ('Setup Config', select medium (e.g. Brain 900MHz) and press 'Option'-button).
14. Select the current medium for the frequency of the validation (e.g. Setup Medium Brain 900MHz).



A D T

### FOR BAND SIMULATING LIQUID

LIQUID TYPE		HSL-835			
SIMULATING LIQUID TEMP.		22.6			
TEST DATE		May 25, 2010			
TESTED BY		Aaron Liang			
FREQ. (MHz)	LIQUID PARAMETER	STANDARD VALUE	MEASUREMENT VALUE	ERROR PERCENTAGE (%)	LIMIT( % )
826.4	Permitivity ( $\epsilon$ )	41.50	42.30	1.93	$\pm 5$
835.0		41.50	42.00	1.20	
836.4		41.50	41.90	0.96	
846.6		41.50	41.70	0.48	
826.4	Conductivity ( $\sigma$ ) S/m	0.90	0.91	1.11	
835.0		0.90	0.92	2.22	
836.4		0.90	0.93	3.33	
846.6		0.91	0.94	3.30	

LIQUID TYPE		MSL-835			
SIMULATING LIQUID TEMP.		22.7			
TEST DATE		May 27, 2010			
TESTED BY		Aaron Liang			
FREQ. (MHz)	LIQUID PARAMETER	STANDARD VALUE	MEASUREMENT VALUE	ERROR PERCENTAGE (%)	LIMIT( % )
826.4	Permitivity ( $\epsilon$ )	55.20	54.00	-2.17	$\pm 5$
835.0		55.20	53.90	-2.36	
836.4		55.20	53.80	-2.54	
846.6		55.20	53.70	-2.72	
826.4	Conductivity ( $\sigma$ ) S/m	0.97	0.95	-2.06	
835.0		0.97	0.96	-1.03	
836.4		0.97	0.98	1.03	
846.6		0.98	0.99	1.02	



A D T

LIQUID TYPE		HSL-1900			
SIMULATING LIQUID TEMP.		22.7			
TEST DATE		May 26, 2010			
TESTED BY		Aaron Liang			
FREQ. (MHz)	LIQUID PARAMETER	STANDARD VALUE	MEASUREMENT VALUE	ERROR PERCENTAGE (%)	LIMIT( % )
1850.2	Permitivity ( $\epsilon$ )	40.00	39.80	-0.50	$\pm 5$
1880.0		40.00	3970	-0.75	
1900.0		40.00	39.60	-1.00	
1909.8		40.00	39.50	-1.25	
1850.2	Conductivity ( $\sigma$ ) S/m	1.40	1.34	-4.29	
1880.0		1.40	1.35	-3.57	
1900.0		1.40	1.36	-2.86	
1909.8		1.40	1.39	-0.71	

LIQUID TYPE		MSL-1900			
SIMULATING LIQUID TEMP.		22.8			
TEST DATE		May 28, 2010			
TESTED BY		Aaron Liang			
FREQ. (MHz)	LIQUID PARAMETER	STANDARD VALUE	MEASUREMENT VALUE	ERROR PERCENTAGE (%)	LIMIT( % )
1850.2	Permitivity ( $\epsilon$ )	53.30	54.80	2.81	$\pm 5$
1880.0		53.30	54.70	2.63	
1900.0		53.30	54.60	2.44	
1909.8		53.30	54.50	2.25	
1850.2	Conductivity ( $\sigma$ ) S/m	1.52	1.53	0.66	
1880.0		1.52	1.55	1.97	
1900.0		1.52	1.56	2.63	
1909.8		1.52	1.57	3.29	

## 5. SYSTEM VALIDATION

The system validation was performed in the flat phantom with equipment listed in the following table. Since the SAR value is calculated from the measured electric field, dielectric constant and conductivity of the body tissue and the SAR is proportional to the square of the electric field. So, the SAR value will be also proportional to the RF power input to the system validation dipole under the same test environment. In our system validation test, 250mW RF input power was used.

### 5.1 TEST PROCEDURE

Before the system performance check, we need only to tell the system which components (probe, medium, and device) are used for the system performance check; the system will take care of all parameters. The dipole must be placed beneath the flat section of the SAM Twin Phantom with the correct distance holder in place. The distance holder should touch the phantom surface with a light pressure at the reference marking (little cross) and be oriented parallel to the long side of the phantom. Accurate positioning is not necessary, since the system will search for the peak SAR location, except that the dipole arms should be parallel to the surface. The device holder for mobile phones can be left in place but should be rotated away from the dipole.

1. The "Power Reference Measurement" and "Power Drift Measurement" jobs are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the amplifier output power. If it is too high (above  $\pm 0.1$  dB), the system performance check should be repeated; some amplifiers have very high drift during warm-up. A stable amplifier gives drift results in the DASY system below  $\pm 0.02$  dB.
2. The "Surface Check" job tests the optical surface detection system of the DASY system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above  $\pm 0.1$  mm). In that case it is better to abort the system performance check and stir the liquid.

3. The "Area Scan" job measures the SAR above the dipole on a plane parallel to the surface. It is used to locate the approximate location of the peak SAR. The proposed scan uses large grid spacing for faster measurement; due to the symmetric field, the peak detection is reliable. If a finer graphic is desired, the grid spacing can be reduced. Grid spacing and orientation have no influence on the SAR result.
4. The "Zoom Scan" job measures the field in a volume around the peak SAR value assessed in the previous "Area Scan" job (for more information see the application note on SAR evaluation).

About the validation dipole positioning uncertainty, the constant and low loss dielectric spacer is used to establish the correct distance between the top surface of the dipole and the bottom surface of the phantom, the error component introduced by the uncertainty of the distance between the liquid (i.e., phantom shell) and the validation dipole in the DASY5 system is less than  $\pm 0.1\text{mm}$ .

$$SAR_{tolerance} [\%] = 100 \times \left( \frac{(a + d)^2}{a^2} - 1 \right)$$

As the closest distance is 10mm, the resulting tolerance  $SAR_{tolerance} [\%]$  is  $<2\%$ .

## 5.2 VALIDATION RESULTS

SYSTEM VALIDATION TEST OF SIMULATING LIQUID					
FREQUENCY (MHz)	REQUIRED SAR (mW/g)	MEASURED SAR (mW/g)	DEVIATION (%)	SEPARATION DISTANCE	TESTED DATE
HSL835	2.37 (1g)	2.45	3.38	15mm	May 25, 2010
MSL835	2.52 (1g)	2.48	-1.59	15mm	May 27, 2010
HSL1900	10.00 (1g)	10.30	3.00	10mm	May 26, 2010
MSL1900	10.30 (1g)	10.60	2.91	10mm	May 28, 2010
TESTED BY	Aaron Liang.				

**NOTE:** Please see Appendix for the photo of system validation test.

### 5.3 SYSTEM VALIDATION UNCERTAINTIES

In the table below, the system validation uncertainty with respect to the analytically assessed SAR value of a dipole source as given in the IEEE 1528 standard is given. This uncertainty is smaller than the expected uncertainty for mobile phone measurements due to the simplified setup and the symmetric field distribution.

Error Description	Tolerance (±%)	Probability Distribution	Divisor	(C <sub>i</sub> )		Standard Uncertainty (±%)		(v <sub>i</sub> )
				(1g)	(10g)	(1g)	(10g)	
<b>Measurement System</b>								
Probe Calibration	5.50	Normal	1	1	1	5.50	5.50	∞
Axial Isotropy	0.50	Rectangular	$\sqrt{3}$	0.7	0.7	0.20	0.20	∞
Hemispherical Isotropy	2.60	Rectangular	$\sqrt{3}$	0.7	0.7	1.05	1.05	∞
Boundary effects	1.00	Rectangular	$\sqrt{3}$	1	1	0.58	0.58	∞
Linearity	0.60	Rectangular	$\sqrt{3}$	1	1	0.35	0.35	∞
System Detection Limits	1.00	Rectangular	$\sqrt{3}$	1	1	0.58	0.58	∞
Readout Electronics	0.30	Normal	1	1	1	0.30	0.30	∞
Response Time	0.80	Rectangular	$\sqrt{3}$	1	1	0.46	0.46	∞
Integration Time	2.60	Rectangular	$\sqrt{3}$	1	1	1.50	1.50	∞
RF Ambient Noise	3.00	Rectangular	$\sqrt{3}$	1	1	1.73	1.73	∞
RF Ambient Reflections	3.00	Rectangular	$\sqrt{3}$	1	1	1.73	1.73	∞
Probe Positioner	0.40	Rectangular	$\sqrt{3}$	1	1	0.23	0.23	∞
Probe Positioning	2.90	Rectangular	$\sqrt{3}$	1	1	1.67	1.67	∞
Max. SAR Eval.	1.00	Rectangular	$\sqrt{3}$	1	1	0.58	0.58	∞
<b>Dipole Related</b>								
Dipole Axis to Liquid Distance	2.00	Rectangular	$\sqrt{3}$	1	1	1.15	1.15	145
Input Power Drift	5.00	Rectangular	$\sqrt{3}$	1	1	2.89	2.89	∞
<b>Phantom and Tissue parameters</b>								
Phantom Uncertainty	4.00	Rectangular	$\sqrt{3}$	1	1	2.31	2.31	∞
Liquid Conductivity (target)	5.00	Rectangular	$\sqrt{3}$	0.64	0.43	1.85	1.24	∞
Liquid Conductivity (measurement)	4.74	Normal	1	0.64	0.43	3.03	2.04	∞
Liquid Permittivity (target)	5.00	Rectangular	$\sqrt{3}$	0.6	0.49	1.73	1.41	∞
Liquid Permittivity (measurement)	3.46	Normal	1	0.6	0.49	2.08	1.70	∞
<b>Combined Standard Uncertainty</b>							<b>8.88</b>	<b>8.34</b>
<b>Coverage Factor for 95%</b>							<b>Kp=2</b>	
<b>Expanded Uncertainty (K=2)</b>							<b>17.76</b>	<b>16.67</b>

**NOTE:** About the system validation uncertainty assessment, please reference the section 7.

## 6. TEST RESULTS

### 6.1 TEST PROCEDURES

The EUT makes a phone call to the communication simulator station. Establish the simulation communication configuration rather the actual communication. Then the EUT could continuous the transmission mode. Adjust the PCL of the base station could controlled the EUT to transmitted the maximum output power. The base station also could control the transmission channel. The SAR value was calculated via the 3D spline interpolation algorithm that has been implemented in the software of DASY5 SAR measurement system manufactured and calibrated by SPEAG. According to the IEEE 1528 / EN 62209-1, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- Power reference measurement
- Verification of the power reference measurement
- Area scan
- Zoom scan
- Power reference measurement

The area scan was performed for the highest spatial SAR location. The zoom scan with 30mm x 30mm x 30mm volume was performed for SAR value averaged over 1g and 10g spatial volumes.

In the zoom scan, the distance between the measurement point at the probe sensor location (geometric center behind the probe tip) and the phantom surface is 3mm and maintained at a constant distance of  $\pm 0.5$ mm during a zoom scan to determine peak SAR locations. The distance is 3mm between the first measurement point and the bottom surface of the phantom. The secondary measurement point to the bottom surface of the phantom is with 8mm separation distance. The cube size is 7 x 7 x 7 points consists of 343 points and the grid space is 5mm.



A D T

The measurement time is 0.5s at each point of the zoom scan. The probe boundary effect compensation shall be applied during the SAR test. Because of the tip of the probe to the Phantom surface separated distances are longer than half a tip probe diameter.

In the area scan, the separation distance is 3mm between the each measurement point and the phantom surface. The scan size shall be included the transmission portion of the EUT. The measurement time is the same as the zoom scan. At last the reference power drift shall be less than  $\pm 5\%$ .

## 6.2 DESCRIPTION OF TEST CONDITION

TEST DATE	TISSUE TYPE / FREQ.	TEST MODE	TEMPERATURE (°C)		HUMIDITY (%RH)	TESTED BY
			AMBENT	LIQUID		
May 25, 2010	HSL835	1 ~ 3	23.0	22.6	61	Aaron Liang
May 26, 2010	HSL1900	4 ~ 6	23.1	22.7	62	Aaron Liang
May 27, 2010	MSL835	7 ~ 14	23.1	22.7	62	Aaron Liang
May 28, 2010	MSL1900	15 ~ 22	23.0	22.8	62	Aaron Liang

## 6.3 MEASURED SAR RESULT

Stand-alone SAR (1g)		
BODY / HSL	Front	
<b>WCDMA 850</b>		
Low	1.52	
Middle	1.41	
High	1.26	
<b>PCS 1900</b>		
Low	1.04	
Middle	1.13	
High	1.19	

Stand-alone SAR (1g)-15mm		
BODY / MSL	Front	Bottom
<b>WCDMA 850</b>		
Low	0.525	
Middle	0.256	0.508
High	0.387	
<b>WCDMA 850 HSDPA</b>		
Low	0.534	
Middle	0.232	0.516
High	0.394	
<b>PCS 1900</b>		
Low	0.286	
Middle	0.145	0.362
High	0.43	
<b>PCS 1900 GPRS TS1</b>		
Low	0.241	
Middle	0.154	0.318
High	0.394	

**NOTE:**

1. In this testing, the limit for General Population Spatial Peak averaged over 1g, 1.6 W/kg, is applied.
2. Please see the Appendix A for the data.
3. The variation of the EUT conducted power measured before and after SAR testing should not over 5%.
4. Per DA-02-1438A1, when 1-g SAR for the middle channel is less than 0.8 W/kg, testing for the other channels is not required



A D T

## 6.4 SAR LIMITS

HUMAN EXPOSURE	SAR (W/kg)	
	(GENERAL POPULATION / UNCONTROLLED EXPOSURE ENVIRONMENT)	(OCCUPATIONAL / CONTROLLED EXPOSURE ENVIRONMENT)
Spatial Peak (averaged over 1 g)	1.6	8.0

### NOTE:

1. This limits accord to 47 CFR 2.1093 – Safety Limit.
2. The EUT property been complied with the partial body exposure limit under the general population environment.



A D T

## 7. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: [www.adt.com.tw/index.5/phtml](http://www.adt.com.tw/index.5/phtml). If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab:**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF Lab:**

Tel: 886-3-5935343

Fax: 886-3-5935342

**Hwa Ya EMC/RF/Safety/Telecom Lab:**

Tel: 886-3-3183232

Fax: 886-3-3185050

**Web Site:** [www.adt.com.tw](http://www.adt.com.tw)


The address and road map of all our labs can be found in our web site also.

---END---


## APPENDIX A: TEST DATA

### Liquid Level Photo


Tissue HSL835MHz D=151mm

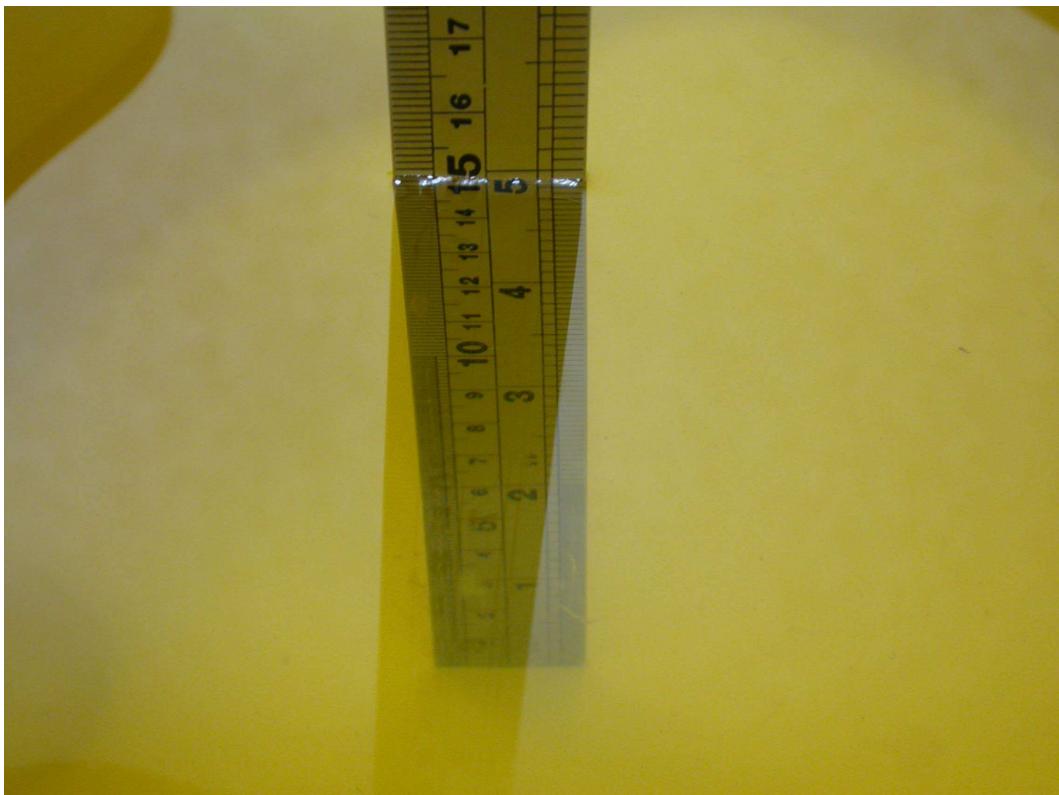

Tissue HSL1900MHz D=154mm

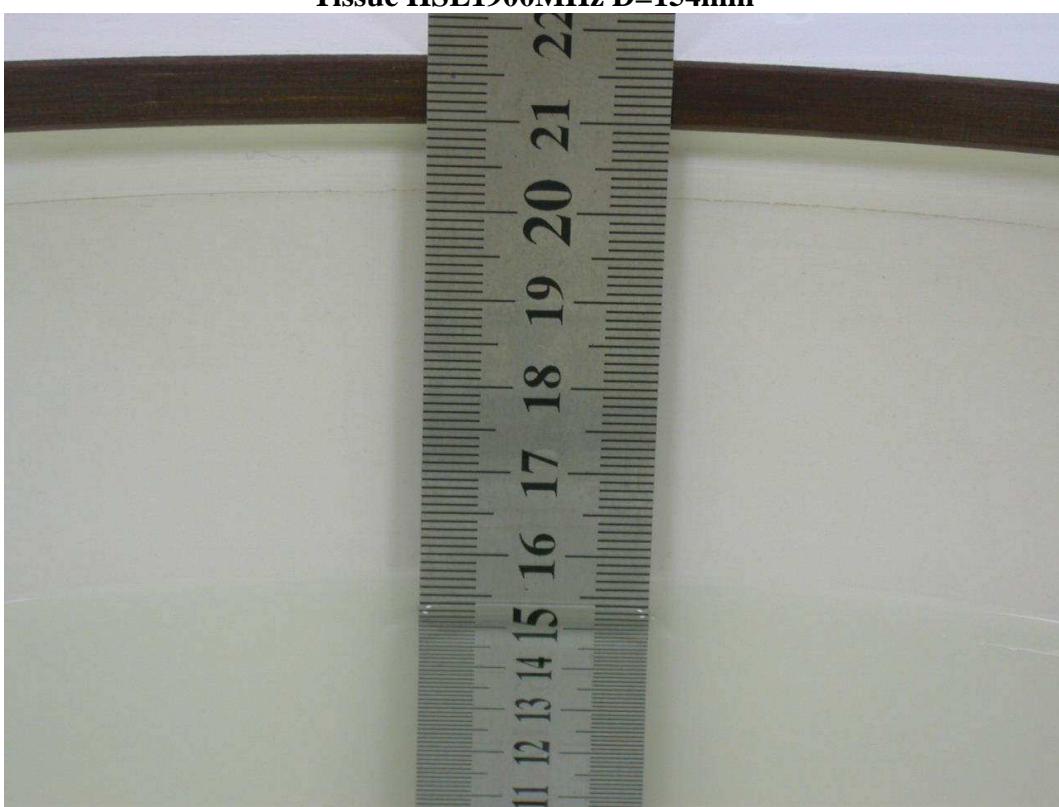

**Tissue MSL835MHz D=152mm**

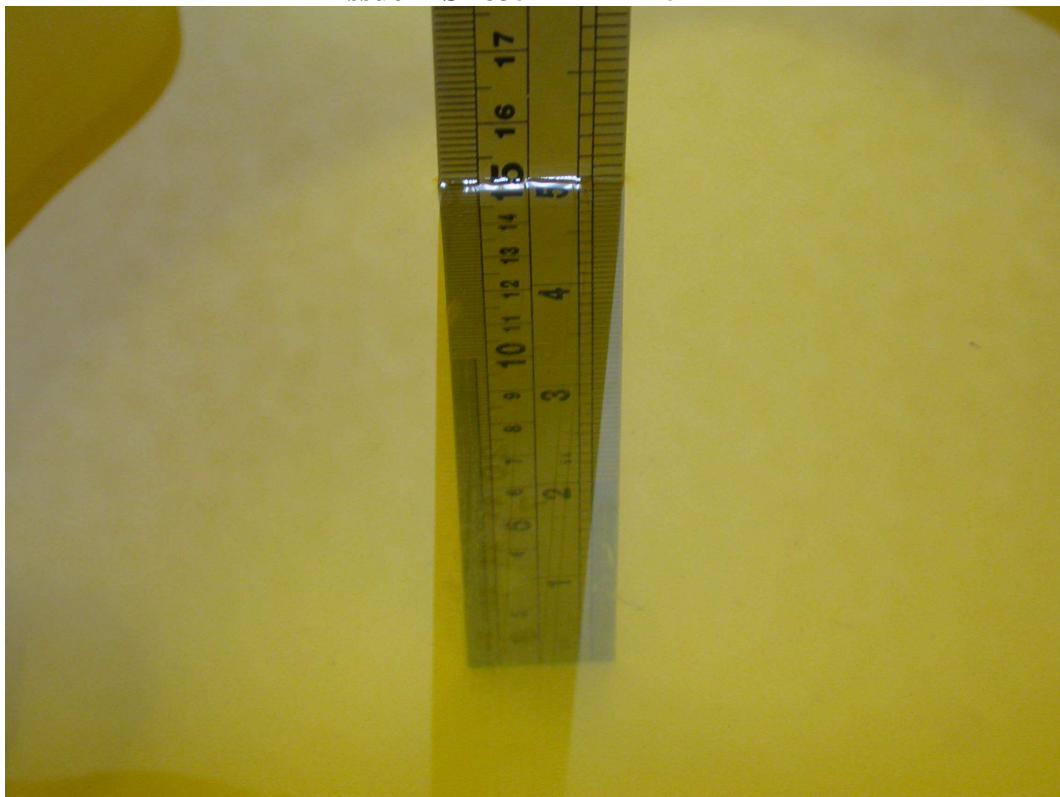

**Tissue MSL1900MHz D=151mm**



Test Laboratory: Bureau Veritas ADT

## M01-Body- HSL-WCDMA 850-Ch4132

### DUT: Mobile Phone ; Type: F-09B

Communication System: WCDMA 850 ; Frequency: 826.4 MHz ; Duty Cycle: 1:1 ; Modulation type: BPSK

Medium: HSL 835 Medium parameters used:  $f = 826.4$  MHz;  $\sigma = 0.91$  mho/m;  $\epsilon_r = 42.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section ; Separation distance : 0 mm (The Front side of the EUT with leather to the Phantom)

DASY5 Configuration:

- Probe: EX3DV3 - SN3504; ConvF(9.8, 9.8, 9.8); Calibrated: 2010/1/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2009/12/16
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1485
- Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 61

**Low Channel 4132/Area Scan (7x16x1):** Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (measured) = 1.57 mW/g


**Low Channel 4132/Zoom Scan (7x7x9)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 40 V/m; Power Drift = -0.159 dB

Peak SAR (extrapolated) = 2.43 W/kg

**SAR(1 g) = 1.52 mW/g; SAR(10 g) = 0.973 mW/g**

Maximum value of SAR (measured) = 1.8 mW/g

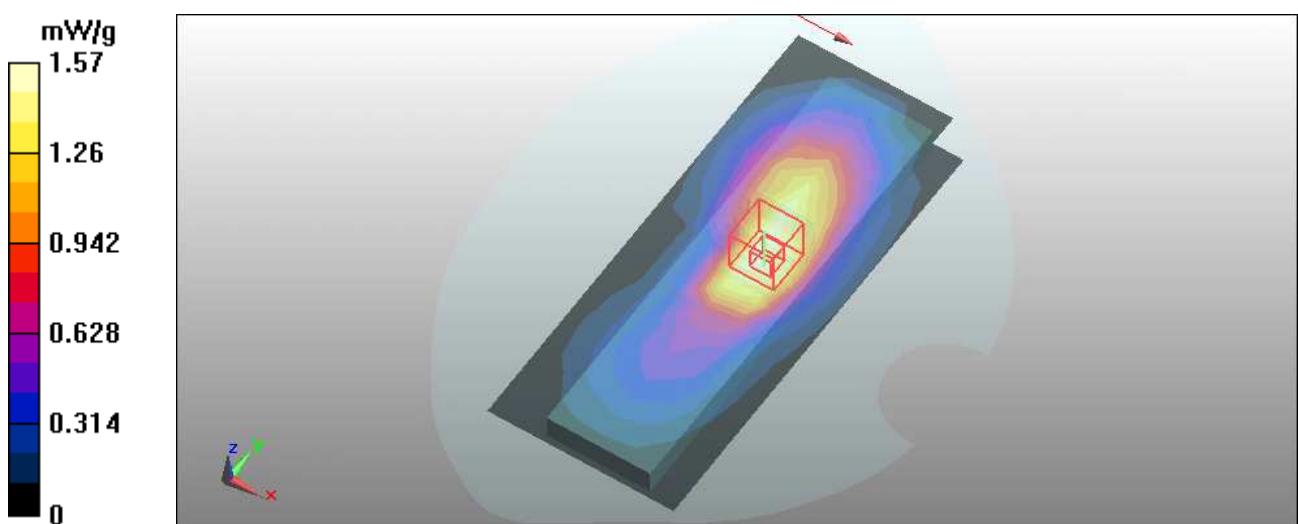

Test Laboratory: Bureau Veritas ADT

## M02-Body- HSL-WCDMA 850-Ch4182

### DUT: Mobile Phone ; Type: F-09B

Communication System: WCDMA 850 ; Frequency: 836.4 MHz ; Duty Cycle: 1:1 ; Modulation type: BPSK

Medium: HSL 835 Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.93$  mho/m;  $\epsilon_r = 41.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section ; Separation distance : 0 mm (The Front side of the EUT with leather to the Phantom)

DASY5 Configuration:

- Probe: EX3DV3 - SN3504; ConvF(9.8, 9.8, 9.8); Calibrated: 2010/1/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2009/12/16
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1485
- Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 61

**Mid Channel 4182/Area Scan (7x16x1):** Measurement grid: dx=15mm, dy=15mm


Maximum value of SAR (measured) = 1.52 mW/g

**Mid Channel 4182/Zoom Scan (7x7x9)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=3mm  
 Reference Value = 36.4 V/m; Power Drift = -0.103 dB

Peak SAR (extrapolated) = 2.17 W/kg

**SAR(1 g) = 1.41 mW/g; SAR(10 g) = 0.913 mW/g**

Maximum value of SAR (measured) = 1.65 mW/g

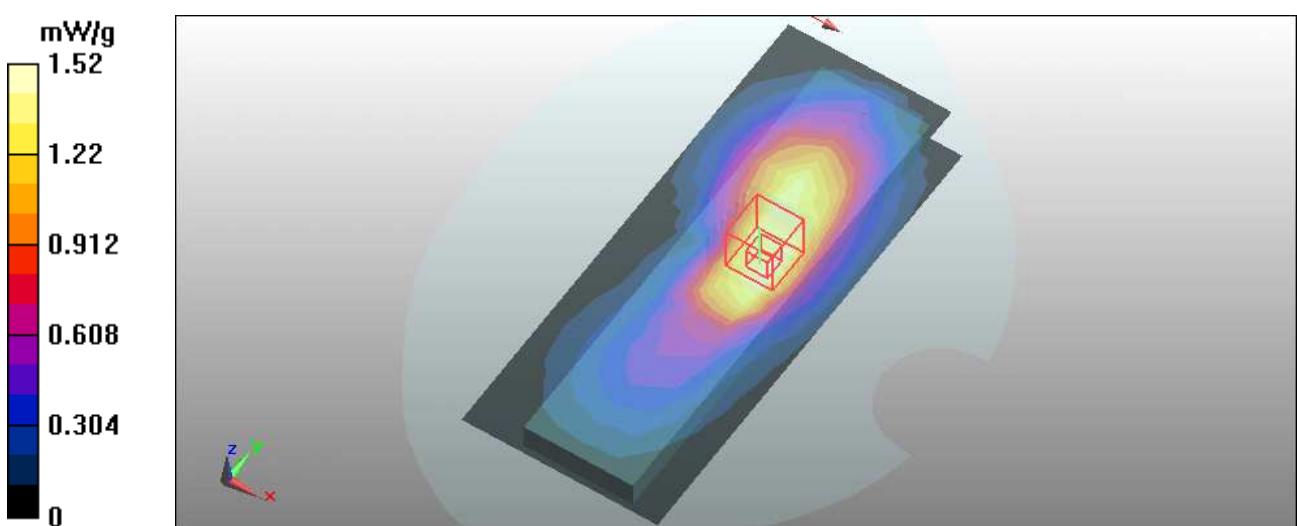

Test Laboratory: Bureau Veritas ADT

## M03-Body- HSL-WCDMA 850-Ch4233

**DUT: Mobile Phone ; Type: F-09B**

Communication System: WCDMA 850 ; Frequency: 846.6 MHz ; Duty Cycle: 1:1 ; Modulation type: BPSK

Medium: HSL 835 Medium parameters used:  $f = 846.6$  MHz;  $\sigma = 0.94$  mho/m;  $\epsilon_r = 41.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section ; Separation distance : 0 mm (The Front side of the EUT with leather to the Phantom)

DASY5 Configuration:

- Probe: EX3DV3 - SN3504; ConvF(9.8, 9.8, 9.8); Calibrated: 2010/1/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2009/12/16
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1485
- Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 61

**High Channel 4233/Area Scan (7x16x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.45 mW/g


**High Channel 4233/Zoom Scan (7x7x9)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 28.9 V/m; Power Drift = -0.124 dB

Peak SAR (extrapolated) = 1.74 W/kg

**SAR(1 g) = 1.26 mW/g; SAR(10 g) = 0.887 mW/g**

Maximum value of SAR (measured) = 1.43 mW/g

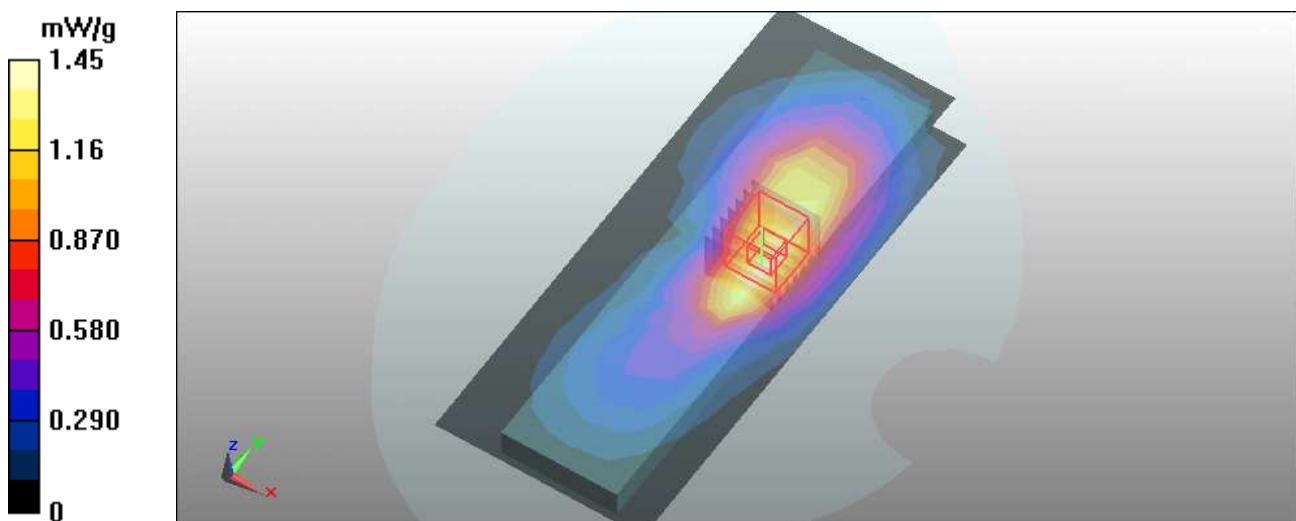

Test Laboratory: Bureau Veritas ADT

## M04-Body- HSL-PCS 1900-Ch512

**DUT: Mobile Phone ; Type: F-09B**

Communication System: GSM 1900 ; Frequency: 1850.2 MHz ; Duty Cycle: 1:8.3 ; Modulation type: GMSK

Medium: HSL1900 Medium parameters used:  $f = 1850.2$  MHz;  $\sigma = 1.34$  mho/m;  $\epsilon_r = 39.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section ; Separation distance : 0 mm (The Front side of the EUT with leather to the Phantom)

DASY5 Configuration:

- Probe: EX3DV3 - SN3504; ConvF(8.2, 8.2, 8.2); Calibrated: 2010/1/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2009/12/16
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1485
- Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 61


**Low Channel 512/Area Scan (7x16x1):** Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (measured) = 1.11 mW/g

**Low Channel 512/Zoom Scan (7x7x9)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=3mm  
 Reference Value = 22.9 V/m; Power Drift = -0.119 dB

Peak SAR (extrapolated) = 1.62 W/kg

**SAR(1 g) = 1.04 mW/g; SAR(10 g) = 0.600 mW/g**

Maximum value of SAR (measured) = 1.24 mW/g

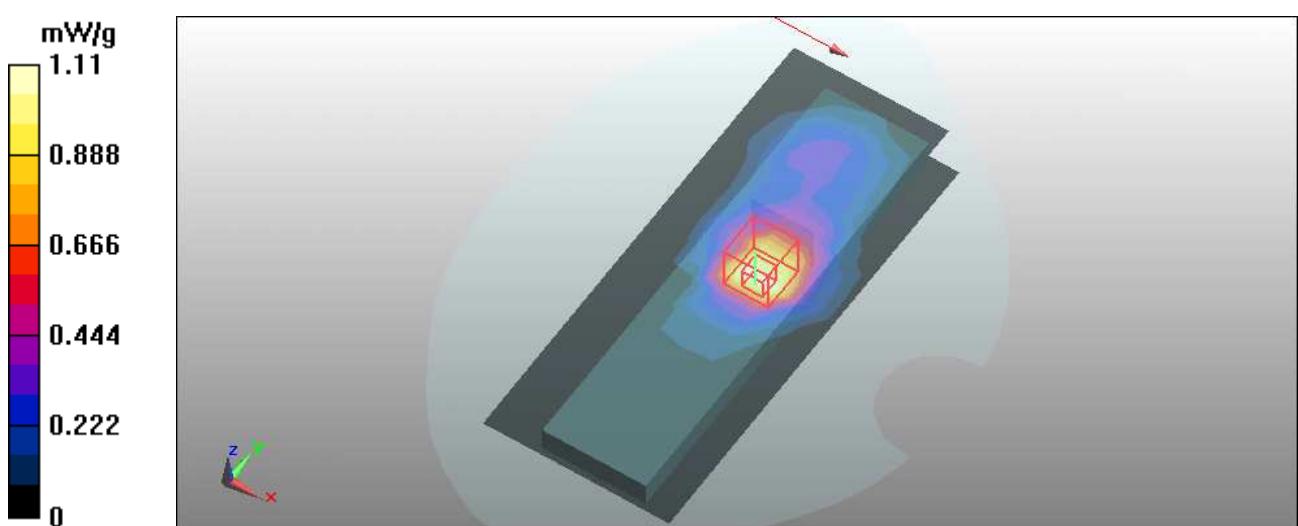

Test Laboratory: Bureau Veritas ADT

## M05-Body- HSL-PCS 1900-Ch661

**DUT: Mobile Phone ; Type: F-09B**

Communication System: GSM 1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:8.3 ; Modulation type: GMSK

Medium: HSL1900 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.35$  mho/m;  $\epsilon_r = 39.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section ; Separation distance : 0 mm (The Front side of the EUT with leather to the Phantom)

DASY5 Configuration:

- Probe: EX3DV3 - SN3504; ConvF(8.2, 8.2, 8.2); Calibrated: 2010/1/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2009/12/16
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1485
- Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 61

**Mid Channel 661/Area Scan (7x16x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.24 mW/g


**Mid Channel 661/Zoom Scan (7x7x9)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 24.2 V/m; Power Drift = -0.162 dB

Peak SAR (extrapolated) = 1.73 W/kg

**SAR(1 g) = 1.13 mW/g; SAR(10 g) = 0.657 mW/g**

Maximum value of SAR (measured) = 1.36 mW/g

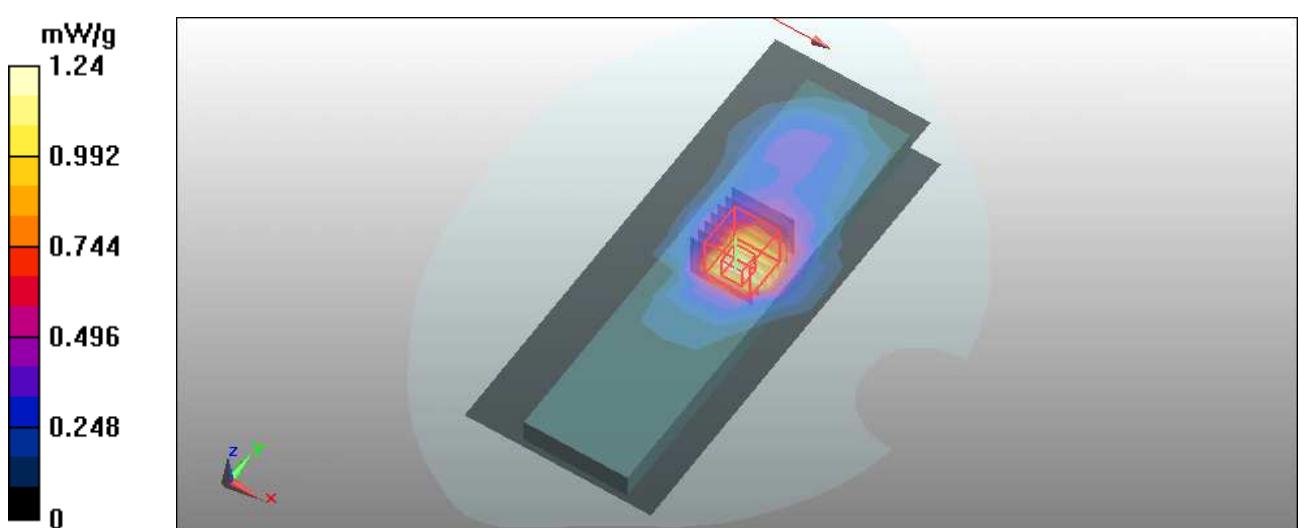

Test Laboratory: Bureau Veritas ADT

## M06-Body- Head-PCS 1900-Ch810

**DUT: Mobile Phone ; Type: F-09B**

Communication System: GSM 1900 ; Frequency: 1909.8 MHz ; Duty Cycle: 1:8.3 ; Modulation type: GMSK

Medium: HSL1900 Medium parameters used:  $f = 1909.8$  MHz;  $\sigma = 1.39$  mho/m;  $\epsilon_r = 39.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section ; Separation distance : 0 mm (The Front side of the EUT with leather to the Phantom)

DASY5 Configuration:

- Probe: EX3DV3 - SN3504; ConvF(8.2, 8.2, 8.2); Calibrated: 2010/1/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2009/12/16
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1485
- Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 61


**High Channel 810/Area Scan (7x16x1):** Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (measured) = 1.31 mW/g

**High Channel 810/Zoom Scan (7x7x9)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=3mm  
 Reference Value = 24.8 V/m; Power Drift = -0.113 dB

Peak SAR (extrapolated) = 1.85 W/kg

**SAR(1 g) = 1.19 mW/g; SAR(10 g) = 0.694 mW/g**

Maximum value of SAR (measured) = 1.43 mW/g

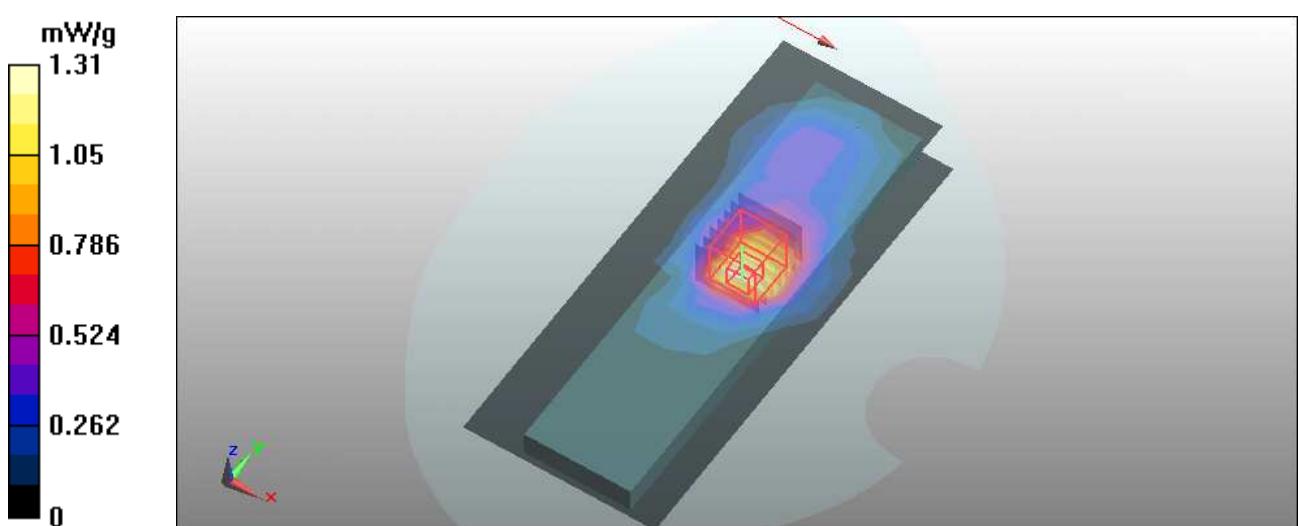

Test Laboratory: Bureau Veritas ADT

## M07-Body-WCDMA 850-Front-Ch4182

**DUT: Mobile Phone ; Type: F-09B**

Communication System: WCDMA 850 ; Frequency: 836.4 MHz ; Duty Cycle: 1:1 ; Modulation type: BPSK

Medium: MSL 835 Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.98$  mho/m;  $\epsilon_r = 53.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section ; Separation distance : 15 mm (The Front side of the EUT with leather to the Phantom)

DASY5 Configuration:

- Probe: EX3DV3 - SN3504; ConvF(9.83, 9.83, 9.83); Calibrated: 2010/1/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2009/12/16
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1485
- Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 61

**Mid Channel 4182/Area Scan (7x11x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.283 mW/g


**Mid Channel 4182/Zoom Scan(7x7x9)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 11.9 V/m; Power Drift = -0.102 dB

Peak SAR (extrapolated) = 0.332 W/kg

**SAR(1 g) = 0.256 mW/g; SAR(10 g) = 0.189 mW/g**

Maximum value of SAR (measured) = 0.284 mW/g

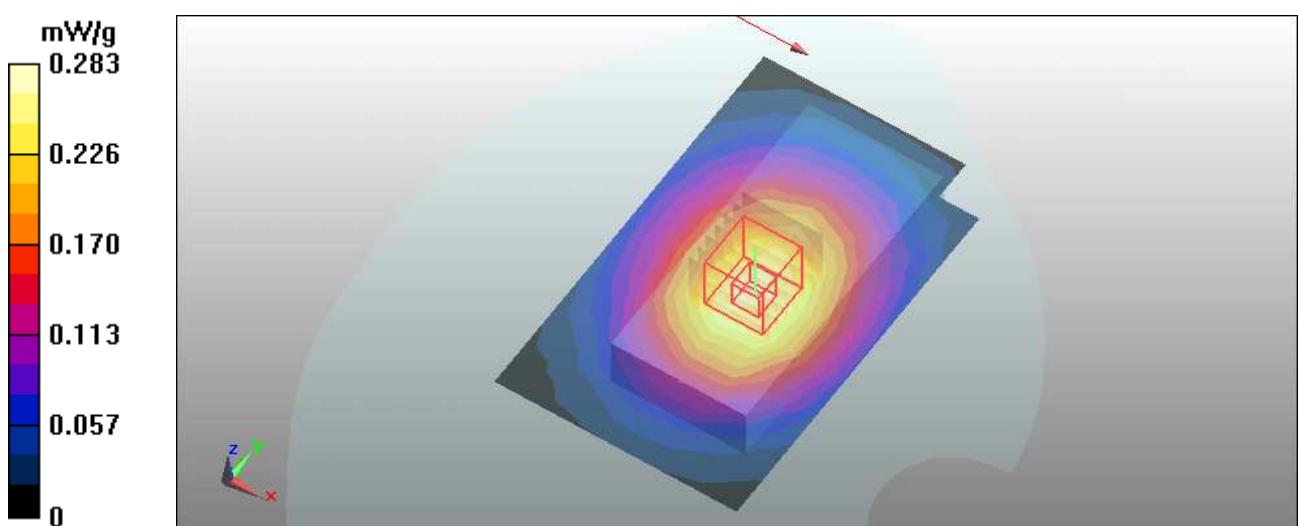

Test Laboratory: Bureau Veritas ADT

## M08-Body-WCDMA 850-Bottom-Ch4132

**DUT: Mobile Phone ; Type: F-09B**

Communication System: WCDMA 850 ; Frequency: 826.4 MHz ; Duty Cycle: 1:1 ; Modulation type: BPSK

Medium: MSL 835 Medium parameters used:  $f = 826.4$  MHz;  $\sigma = 0.95$  mho/m;  $\epsilon_r = 54$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section ; Separation distance : 15 mm (The Bottom side of the EUT with leather to the Phantom)

DASY5 Configuration:

- Probe: EX3DV3 - SN3504; ConvF(9.83, 9.83, 9.83); Calibrated: 2010/1/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2009/12/16
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1485
- Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 61

**Low Channel 4132/Area Scan (7x11x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.584 mW/g


**Low Channel 4132/Zoom Scan(7x7x9)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 16 V/m; Power Drift = -0.057 dB

Peak SAR (extrapolated) = 0.746 W/kg

**SAR(1 g) = 0.525 mW/g; SAR(10 g) = 0.365 mW/g**

Maximum value of SAR (measured) = 0.597 mW/g

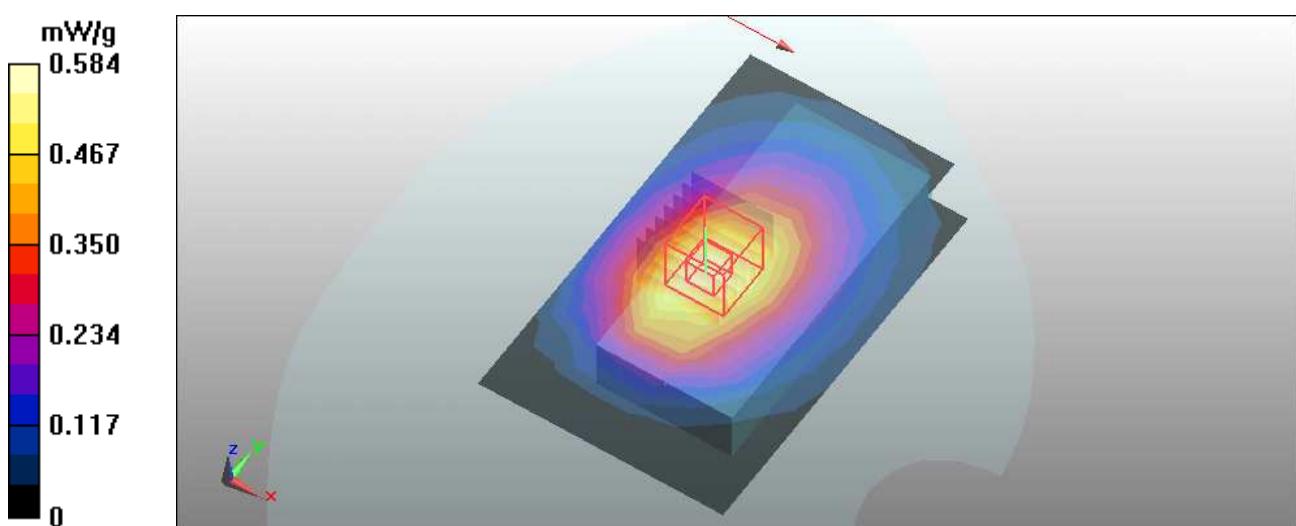

Test Laboratory: Bureau Veritas ADT

## M09-Body-WCDMA 850-Bottom-4182

**DUT: Mobile Phone ; Type: F-09B**

Communication System: WCDMA 850 ; Frequency: 836.4 MHz ; Duty Cycle: 1:1 ; Modulation type: BPSK

Medium: MSL 835 Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.98$  mho/m;  $\epsilon_r = 53.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section ; Separation distance : 15 mm (The Bottom side of the EUT with leather to the Phantom)

DASY5 Configuration:

- Probe: EX3DV3 - SN3504; ConvF(9.83, 9.83, 9.83); Calibrated: 2010/1/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2009/12/16
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1485
- Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 61

**Mid Channel 4182/Area Scan (7x11x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.526 mW/g


**Mid Channel 4182/Zoom Scan (7x7x7) (7x7x9)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 15.9 V/m; Power Drift = -0.167 dB

Peak SAR (extrapolated) = 0.721 W/kg

**SAR(1 g) = 0.508 mW/g; SAR(10 g) = 0.352 mW/g**

Maximum value of SAR (measured) = 0.576 mW/g

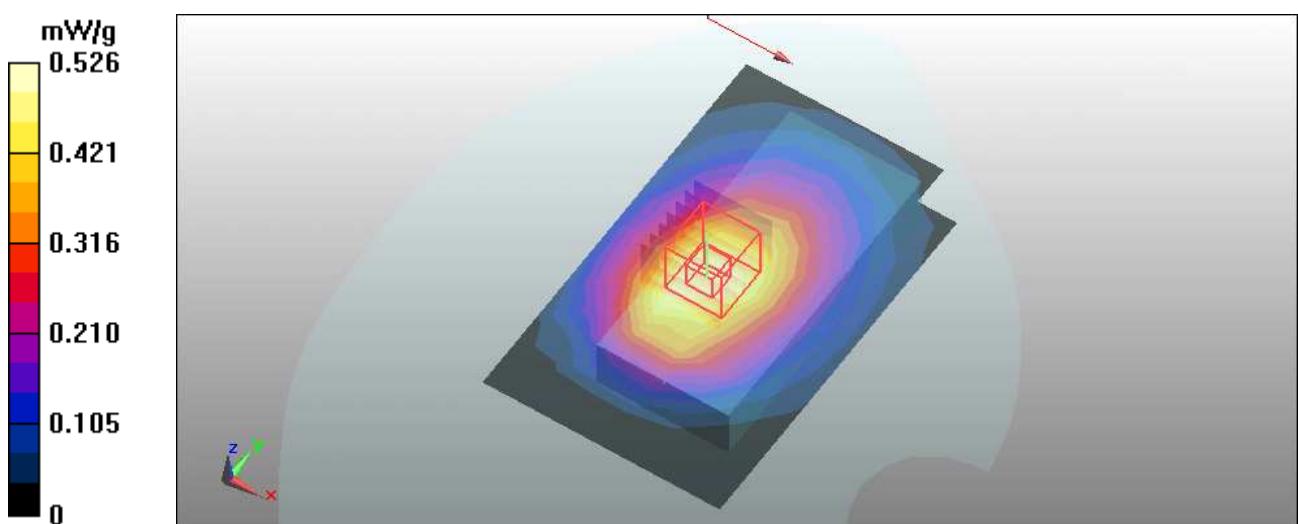

Test Laboratory: Bureau Veritas ADT

## M10-Body-WCDMA 850-Bottom-Ch4233

### DUT: Mobile Phone ; Type: F-09B

Communication System: WCDMA 850 ; Frequency: 846.6 MHz ; Duty Cycle: 1:1 ; Modulation type: BPSK

Medium: MSL 835 Medium parameters used:  $f = 846.6$  MHz;  $\sigma = 0.99$  mho/m;  $\epsilon_r = 53.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section ; Separation distance : 15 mm (The Bottom side of the EUT with leather to the Phantom)

DASY5 Configuration:

- Probe: EX3DV3 - SN3504; ConvF(9.83, 9.83, 9.83); Calibrated: 2010/1/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2009/12/16
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1485
- Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 61

**High Channel 4233/Area Scan (7x11x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.421 mW/g


**High Channel 4233/Zoom Scan(7x7x9)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 13.4 V/m; Power Drift = 0.189 dB

Peak SAR (extrapolated) = 0.544 W/kg

**SAR(1 g) = 0.387 mW/g; SAR(10 g) = 0.269 mW/g**

Maximum value of SAR (measured) = 0.441 mW/g

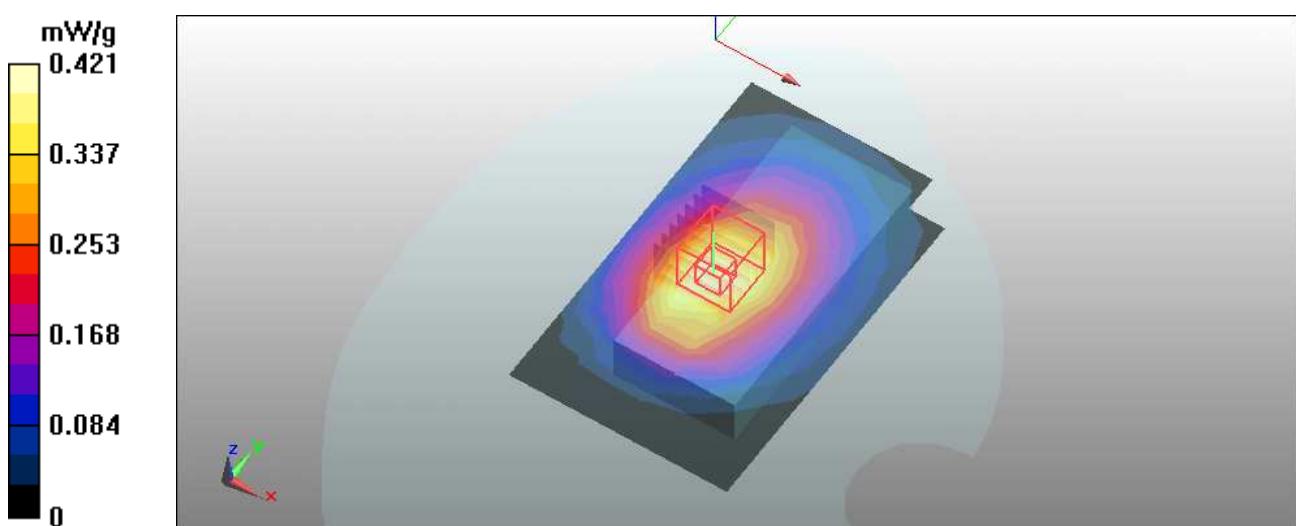

Test Laboratory: Bureau Veritas ADT

## M11-HSDPA-Body-WCDMA 850-Front-Ch4182

**DUT: Mobile Phone ; Type: F-09B**

Communication System: WCDMA 850 ; Frequency: 836.4 MHz ; Duty Cycle: 1:1 ; Modulation type: BPSK

Medium: MSL 835 Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.98$  mho/m;  $\epsilon_r = 53.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section ; Separation distance : 15 mm (The Front side of the EUT with leather to the Phantom)

DASY5 Configuration:

- Probe: EX3DV3 - SN3504; ConvF(9.83, 9.83, 9.83); Calibrated: 2010/1/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2009/12/16
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1485
- Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 61

**Mid Channel 4182/Area Scan (7x11x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.255 mW/g


**Mid Channel 4182/Zoom Scan(7x7x9)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 11.3 V/m; Power Drift = -0.041 dB

Peak SAR (extrapolated) = 0.302 W/kg

**SAR(1 g) = 0.232 mW/g; SAR(10 g) = 0.171 mW/g**

Maximum value of SAR (measured) = 0.256 mW/g

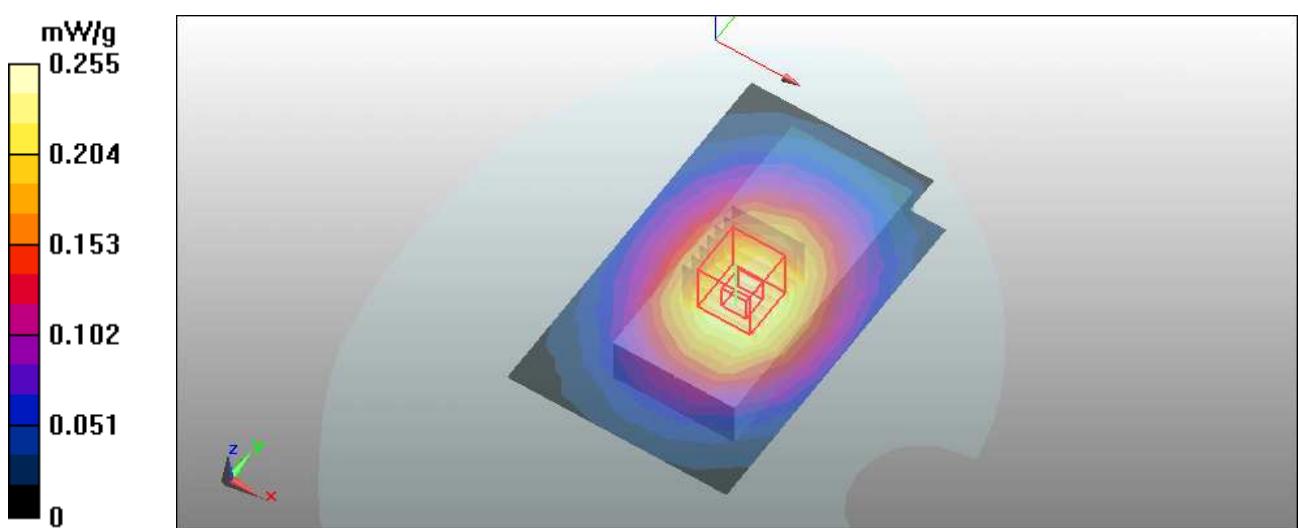

Test Laboratory: Bureau Veritas ADT

## M12-HSDPA-Body-WCDMA 850-Bottom-Ch4132

**DUT: Mobile Phone ; Type: F-09B**

Communication System: WCDMA 850 ; Frequency: 826.4 MHz ; Duty Cycle: 1:1 ; Modulation type: BPSK

Medium: MSL 835 Medium parameters used:  $f = 826.4$  MHz;  $\sigma = 0.95$  mho/m;  $\epsilon_r = 54$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section ; Separation distance : 15 mm (The Bottom side of the EUT with leather to the Phantom)

DASY5 Configuration:

- Probe: EX3DV3 - SN3504; ConvF(9.83, 9.83, 9.83); Calibrated: 2010/1/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2009/12/16
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1485
- Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 61

**Low Channel 4132/Area Scan (7x11x1):** Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (measured) = 0.585 mW/g


**Low Channel 4132/Zoom Scan (7x7x9)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 17.1 V/m; Power Drift = -0.036 dB

Peak SAR (extrapolated) = 0.807 W/kg

**SAR(1 g) = 0.534 mW/g; SAR(10 g) = 0.367 mW/g**

Maximum value of SAR (measured) = 0.614 mW/g

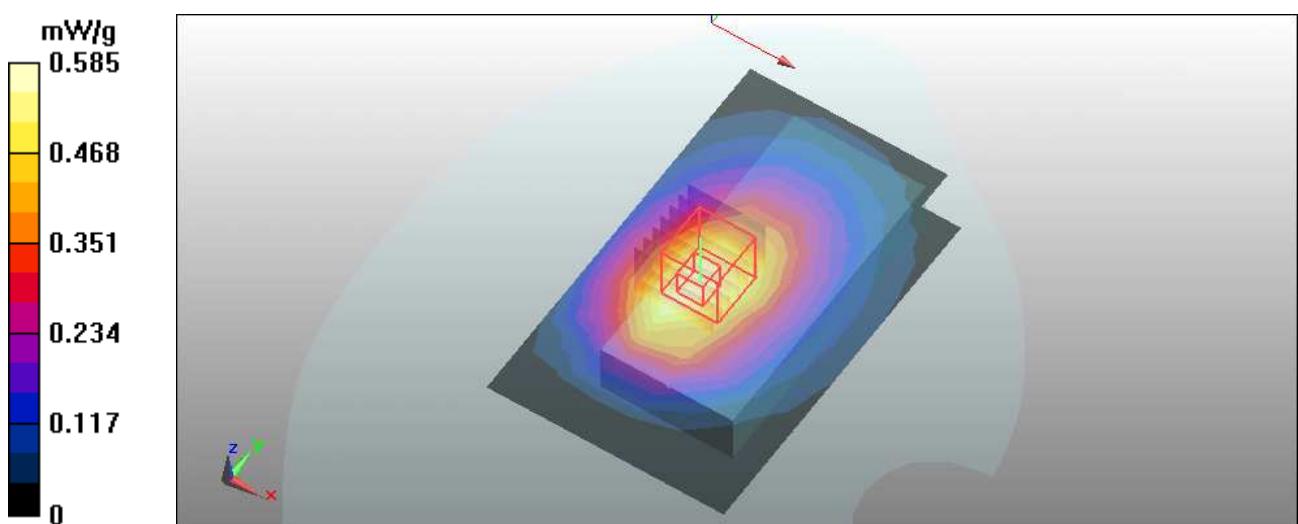

Test Laboratory: Bureau Veritas ADT

## M13-HSDPA-Body-WCDMA 850-Bottom-Ch4182

**DUT: Mobile Phone ; Type: F-09B**

Communication System: WCDMA 850 ; Frequency: 836.4 MHz ; Duty Cycle: 1:1 ; Modulation type: BPSK

Medium: MSL 835 Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.98$  mho/m;  $\epsilon_r = 53.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section ; Separation distance : 15 mm (The Bottom side of the EUT with leather to the Phantom)

DASY5 Configuration:

- Probe: EX3DV3 - SN3504; ConvF(9.83, 9.83, 9.83); Calibrated: 2010/1/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2009/12/16
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1485
- Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 61

**Mid Channel 4182/Area Scan (7x11x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.569 mW/g


**Mid Channel 4182/Zoom Scan(7x7x9)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 16.3 V/m; Power Drift = 0.026 dB

Peak SAR (extrapolated) = 0.737 W/kg

**SAR(1 g) = 0.516 mW/g; SAR(10 g) = 0.356 mW/g**

Maximum value of SAR (measured) = 0.586 mW/g

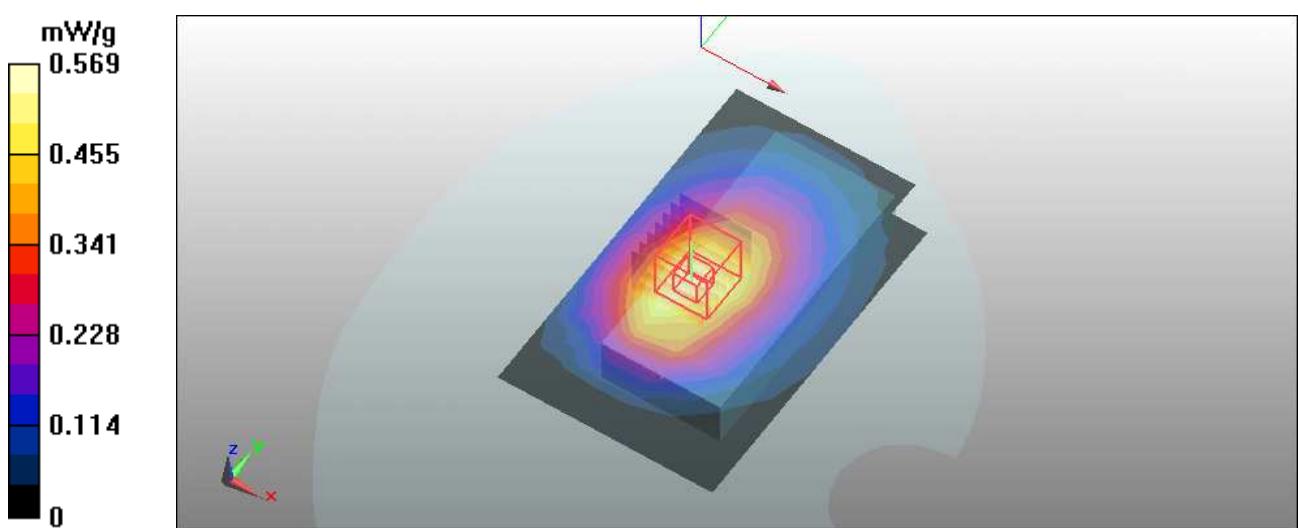

Test Laboratory: Bureau Veritas ADT

## M14-HSDPA-Body-WCDMA 850-Bottom-Ch4233

**DUT: Mobile Phone ; Type: F-09B**

Communication System: WCDMA 850 ; Frequency: 846.6 MHz ; Duty Cycle: 1:1 ; Modulation type: BPSK

Medium: MSL 835 Medium parameters used:  $f = 846.6$  MHz;  $\sigma = 0.99$  mho/m;  $\epsilon_r = 53.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section ; Separation distance : 15 mm (The Bottom side of the EUT with leather to the Phantom)

DASY5 Configuration:

- Probe: EX3DV3 - SN3504; ConvF(9.83, 9.83, 9.83); Calibrated: 2010/1/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2009/12/16
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1485
- Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 61

**High Channel 4233/Area Scan (7x11x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.433 mW/g


**High Channel 4233/Zoom Scan (7x7x9)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 14.1 V/m; Power Drift = 0.065 dB

Peak SAR (extrapolated) = 0.562 W/kg

**SAR(1 g) = 0.394 mW/g; SAR(10 g) = 0.273 mW/g**

Maximum value of SAR (measured) = 0.448 mW/g

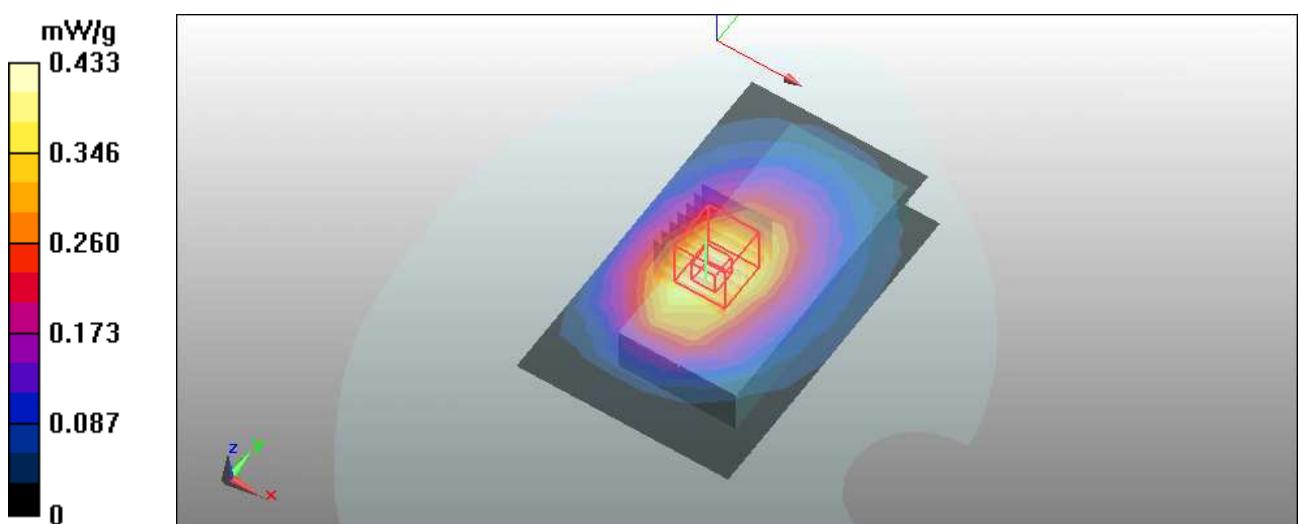

Test Laboratory: Bureau Veritas ADT

## M15-Body-PCS 1900-Front-Ch661

**DUT: Mobile Phone ; Type: F-09B**

Communication System: GSM 1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:8.3 ; Modulation type: GMSK

Medium: MSL 1900 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.55$  mho/m;  $\epsilon_r = 54.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section ; Separation distance : 15 mm (The Front side of the EUT with leather to the Phantom)

DASY5 Configuration:

- Probe: EX3DV3 - SN3504; ConvF(8.52, 8.52, 8.52); Calibrated: 2010/1/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2009/12/16
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1485
- Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 61

**Mid Channel 661/Area Scan (7x11x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.161 mW/g


**Mid Channel 661/Zoom Scan(7x7x9)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 8.37 V/m; Power Drift = 0.083 dB

Peak SAR (extrapolated) = 0.224 W/kg

**SAR(1 g) = 0.145 mW/g; SAR(10 g) = 0.091 mW/g**

Maximum value of SAR (measured) = 0.172 mW/g

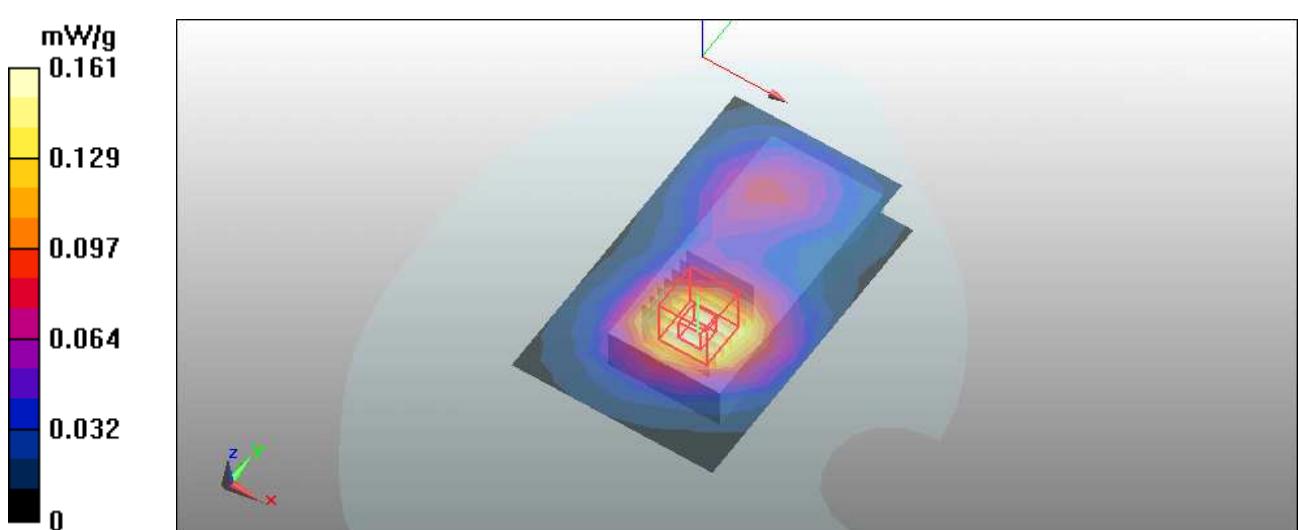

Test Laboratory: Bureau Veritas ADT

## M16-Body-PCS 1900-Bottom-Ch512

**DUT: Mobile Phone ; Type: F-09B**

Communication System: GSM 1900 ; Frequency: 1850.2 MHz ; Duty Cycle: 1:8.3 ; Modulation type: GMSK

Medium: MSL 1900 Medium parameters used:  $f = 1850.2$  MHz;  $\sigma = 1.53$  mho/m;  $\epsilon_r = 54.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section ; Separation distance : 15 mm (The Bottom side of the EUT with leather to the Phantom)

DASY5 Configuration:

- Probe: EX3DV3 - SN3504; ConvF(8.52, 8.52, 8.52); Calibrated: 2010/1/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2009/12/16
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1485
- Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 61

**Low Channel 512/Area Scan (7x11x1):** Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (measured) = 0.299 mW/g


**Low Channel 512/Zoom Scan (7x7x9)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 9.75 V/m; Power Drift = 0.117 dB

Peak SAR (extrapolated) = 0.455 W/kg

**SAR(1 g) = 0.286 mW/g; SAR(10 g) = 0.168 mW/g**

Maximum value of SAR (measured) = 0.343 mW/g

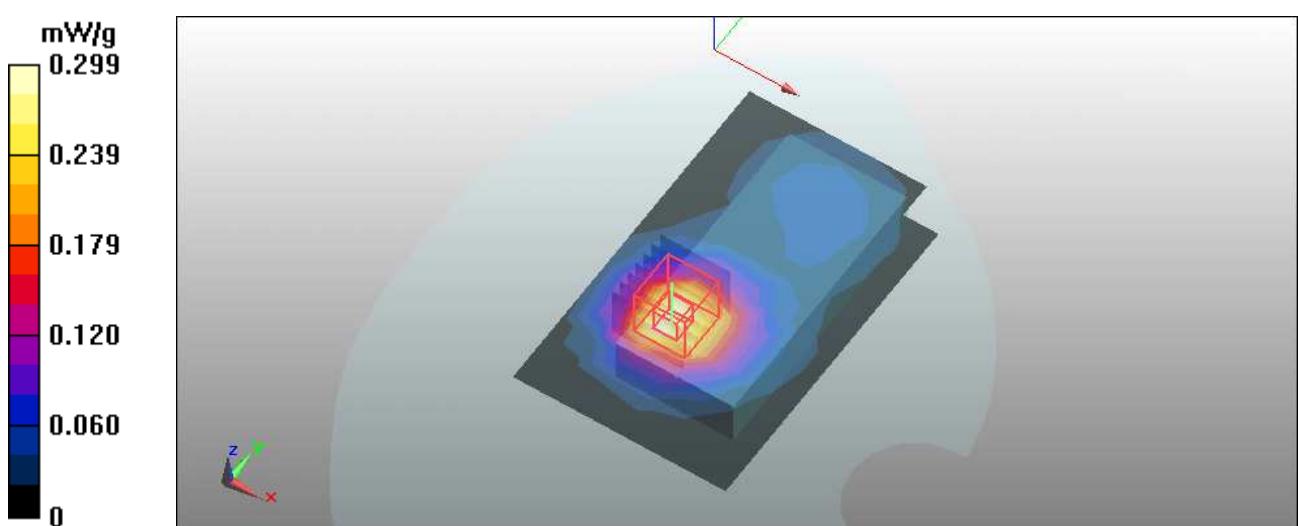

Test Laboratory: Bureau Veritas ADT

## M17-Body-PCS 1900-Bottom-Ch661

**DUT: Mobile Phone ; Type: F-09B**

Communication System: GSM 1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:8.3 ; Modulation type: GMSK

Medium: MSL 1900 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.55$  mho/m;  $\epsilon_r = 54.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section ; Separation distance : 15 mm (The Bottom side of the EUT with leather to the Phantom)

DASY5 Configuration:

- Probe: EX3DV3 - SN3504; ConvF(8.52, 8.52, 8.52); Calibrated: 2010/1/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2009/12/16
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1485
- Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 61

**Mid Channel 661/Area Scan (7x11x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.376 mW/g


**Mid Channel 661/Zoom Scan(7x7x9)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 11 V/m; Power Drift = 0.086 dB

Peak SAR (extrapolated) = 0.571 W/kg

**SAR(1 g) = 0.362 mW/g; SAR(10 g) = 0.213 mW/g**

Maximum value of SAR (measured) = 0.434 mW/g

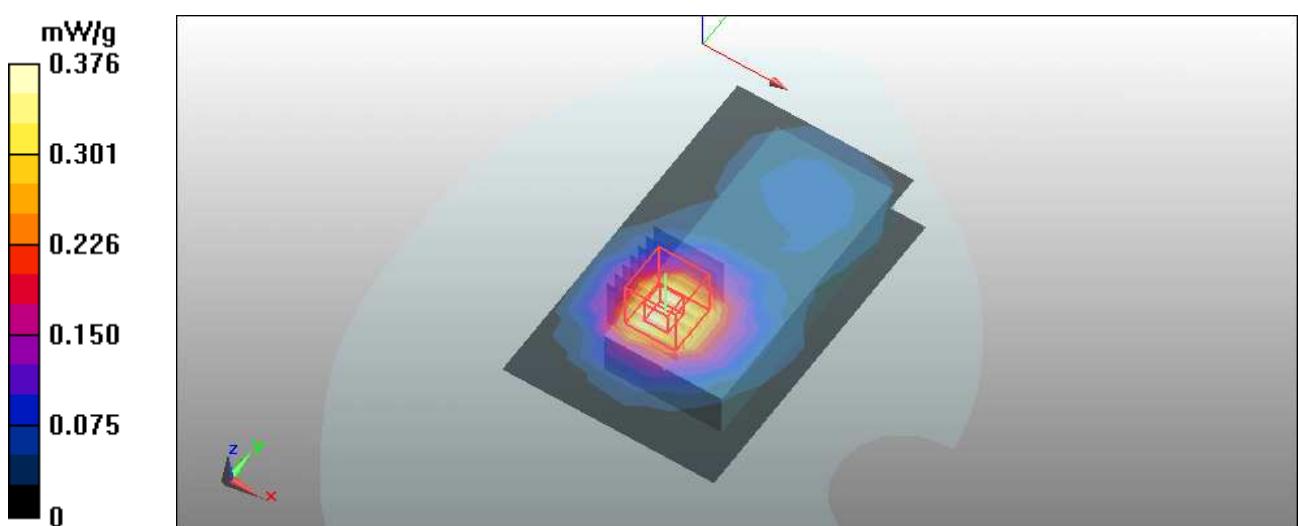

Test Laboratory: Bureau Veritas ADT

## M18-Body-PCS 1900-Bottom-Ch810

**DUT: Mobile Phone ; Type: F-09B**

Communication System: GSM 1900 ; Frequency: 1909.8 MHz ; Duty Cycle: 1:8.3 ; Modulation type: GMSK

Medium: MSL 1900 Medium parameters used:  $f = 1909.8$  MHz;  $\sigma = 1.57$  mho/m;  $\epsilon_r = 54.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section ; Separation distance : 15 mm (The Bottom side of the EUT with leather to the Phantom)

DASY5 Configuration:

- Probe: EX3DV3 - SN3504; ConvF(8.52, 8.52, 8.52); Calibrated: 2010/1/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2009/12/16
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1485
- Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 61


**High Channel 810/Area Scan (7x11x1):** Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (measured) = 0.463 mW/g

**High Channel 810/Zoom Scan (7x7x9)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=3mm  
 Reference Value = 11.6 V/m; Power Drift = 0.083 dB

Peak SAR (extrapolated) = 0.694 W/kg

**SAR(1 g) = 0.430 mW/g; SAR(10 g) = 0.252 mW/g**

Maximum value of SAR (measured) = 0.515 mW/g

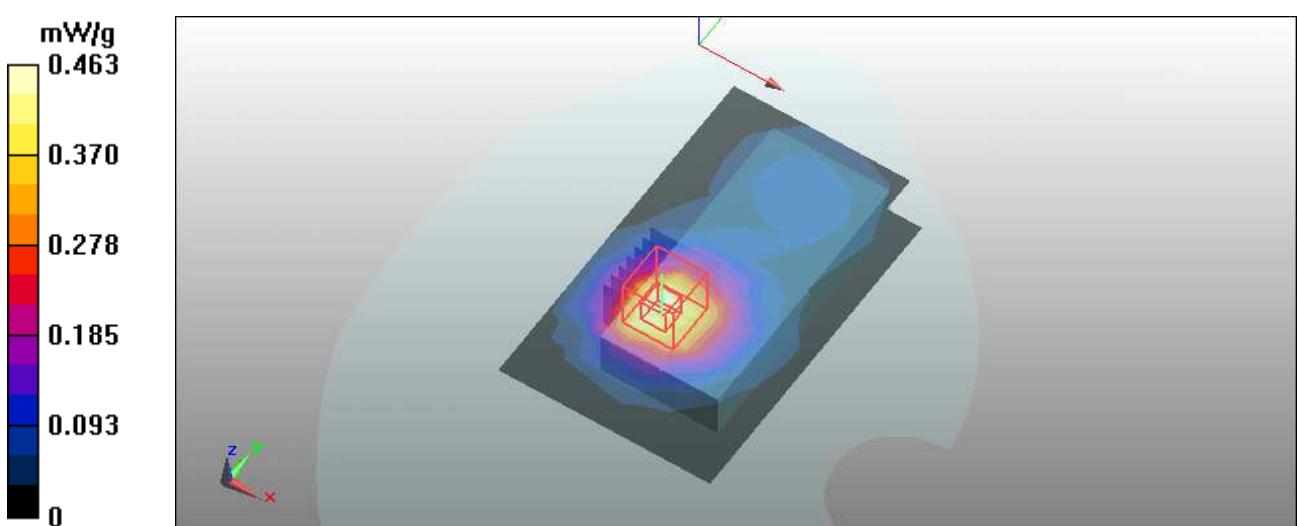

Test Laboratory: Bureau Veritas ADT

## M19-GPRS TS1-Body-PCS 1900-Front-Ch661

**DUT: Mobile Phone ; Type: F-09B**

Communication System: GSM 1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:8.3 ; Modulation type: GMSK

Medium: MSL 1900 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.55$  mho/m;  $\epsilon_r = 54.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section ; Separation distance : 15 mm (The Front side of the EUT with leather to the Phantom)

DASY5 Configuration:

- Probe: EX3DV3 - SN3504; ConvF(8.52, 8.52, 8.52); Calibrated: 2010/1/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2009/12/16
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1485
- Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 61

**Mid Channel 661/Area Scan (7x11x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.170 mW/g


**Mid Channel 661/Zoom Scan (7x7x9)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 8.81 V/m; Power Drift = -0.032 dB

Peak SAR (extrapolated) = 0.240 W/kg

**SAR(1 g) = 0.154 mW/g; SAR(10 g) = 0.097 mW/g**

Maximum value of SAR (measured) = 0.182 mW/g

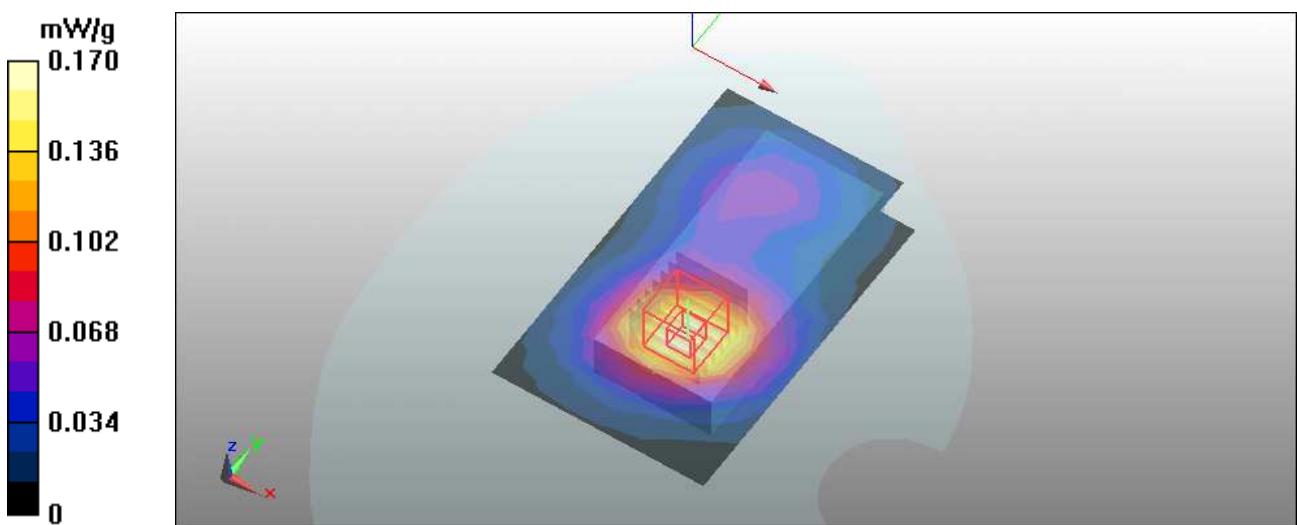

Test Laboratory: Bureau Veritas ADT

## M20-GPRS TS1-Body-PCS 1900-Bottom-Ch512

**DUT: Mobile Phone ; Type: F-09B**

Communication System: GSM 1900 ; Frequency: 1850.2 MHz ; Duty Cycle: 1:8.3 ; Modulation type: GMSK

Medium: MSL 1900 Medium parameters used:  $f = 1850.2$  MHz;  $\sigma = 1.53$  mho/m;  $\epsilon_r = 54.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section ; Separation distance : 15 mm (The Bottom side of the EUT with leather to the Phantom)

DASY5 Configuration:

- Probe: EX3DV3 - SN3504; ConvF(8.52, 8.52, 8.52); Calibrated: 2010/1/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2009/12/16
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1485
- Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 61

**Low Channel 512/Area Scan (7x11x1):** Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (measured) = 0.264 mW/g


**Low Channel 512/Zoom Scan (7x7x7) (7x7x9)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 8.22 V/m; Power Drift = 0.044 dB

Peak SAR (extrapolated) = 0.384 W/kg

**SAR(1 g) = 0.241 mW/g; SAR(10 g) = 0.141 mW/g**

Maximum value of SAR (measured) = 0.289 mW/g

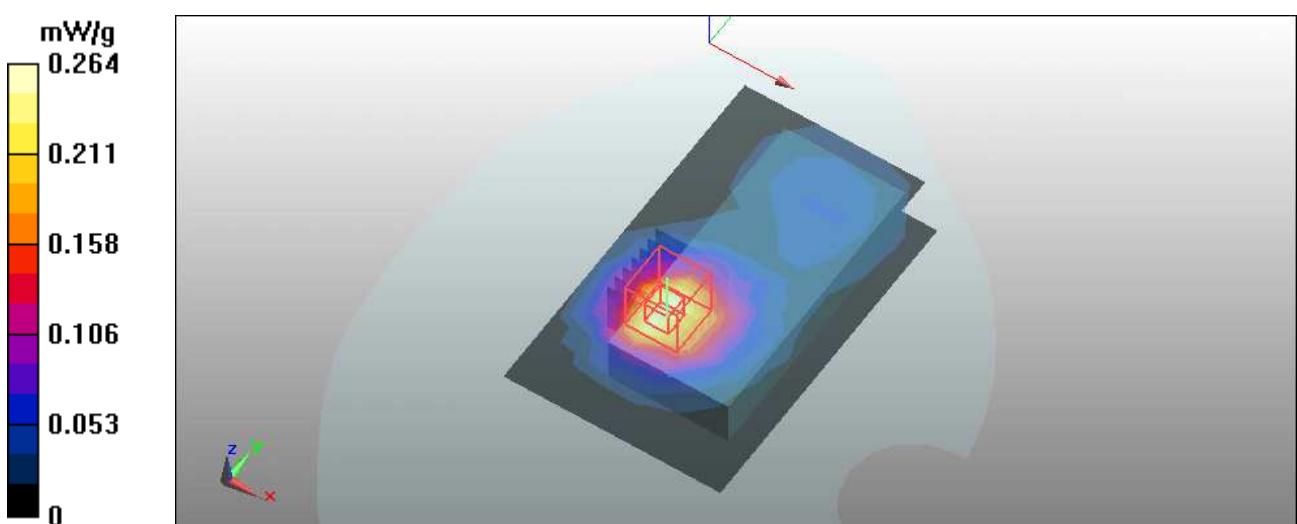

Test Laboratory: Bureau Veritas ADT

## M21-GPRS TS1-Body-PCS 1900-Bottom-Ch661

**DUT: Mobile Phone ; Type: F-09B**

Communication System: GSM 1900 ; Frequency: 1880 MHz ; Duty Cycle: 1:8.3 ; Modulation type: GMSK

Medium: MSL 1900 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.55$  mho/m;  $\epsilon_r = 54.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
 Phantom section: Flat Section ; Separation distance : 15 mm (The Bottom side of the EUT with leather to the Phantom)

DASY5 Configuration:

- Probe: EX3DV3 - SN3504; ConvF(8.52, 8.52, 8.52); Calibrated: 2010/1/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2009/12/16
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1485
- Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 61

**Mid Channel 661/Area Scan (7x11x1):** Measurement grid: dx=15mm, dy=15mm


Maximum value of SAR (measured) = 0.350 mW/g

**Mid Channel 661/Zoom Scan(7x7x9)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=3mm  
 Reference Value = 9.41 V/m; Power Drift = 0.114 dB

Peak SAR (extrapolated) = 0.505 W/kg

**SAR(1 g) = 0.318 mW/g; SAR(10 g) = 0.185 mW/g**

Maximum value of SAR (measured) = 0.381 mW/g

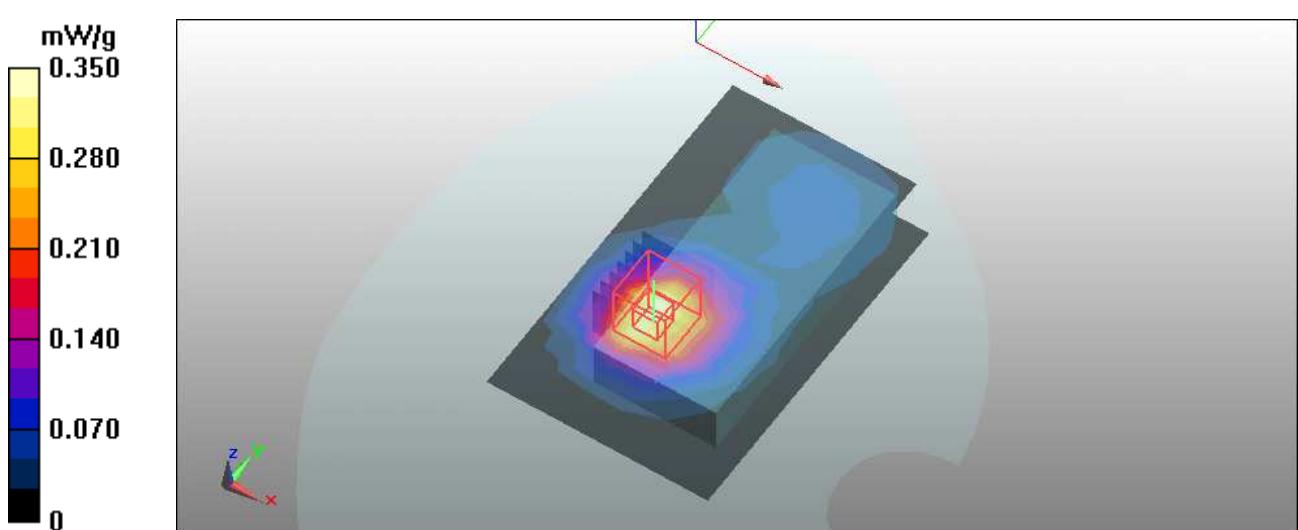

Test Laboratory: Bureau Veritas ADT

## M22-GPRS TS1-Body-PCS 1900-Bottom-Ch810

### DUT: Mobile Phone ; Type: F-09B

Communication System: GSM 1900 ; Frequency: 1909.8 MHz ; Duty Cycle: 1:8.3 ; Modulation type: GMSK

Medium: MSL 1900 Medium parameters used:  $f = 1909.8$  MHz;  $\sigma = 1.57$  mho/m;  $\epsilon_r = 54.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section ; Separation distance : 15 mm (The Bottom side of the EUT with leather to the Phantom)

DASY5 Configuration:

- Probe: EX3DV3 - SN3504; ConvF(8.52, 8.52, 8.52); Calibrated: 2010/1/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2009/12/16
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1485
- Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 61


**High Channel 810/Area Scan (7x11x1):** Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (measured) = 0.440 mW/g

**High Channel 810/Zoom Scan (7x7x9)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=3mm  
 Reference Value = 10.2 V/m; Power Drift = 0.040 dB

Peak SAR (extrapolated) = 0.629 W/kg

**SAR(1 g) = 0.394 mW/g; SAR(10 g) = 0.230 mW/g**

Maximum value of SAR (measured) = 0.469 mW/g

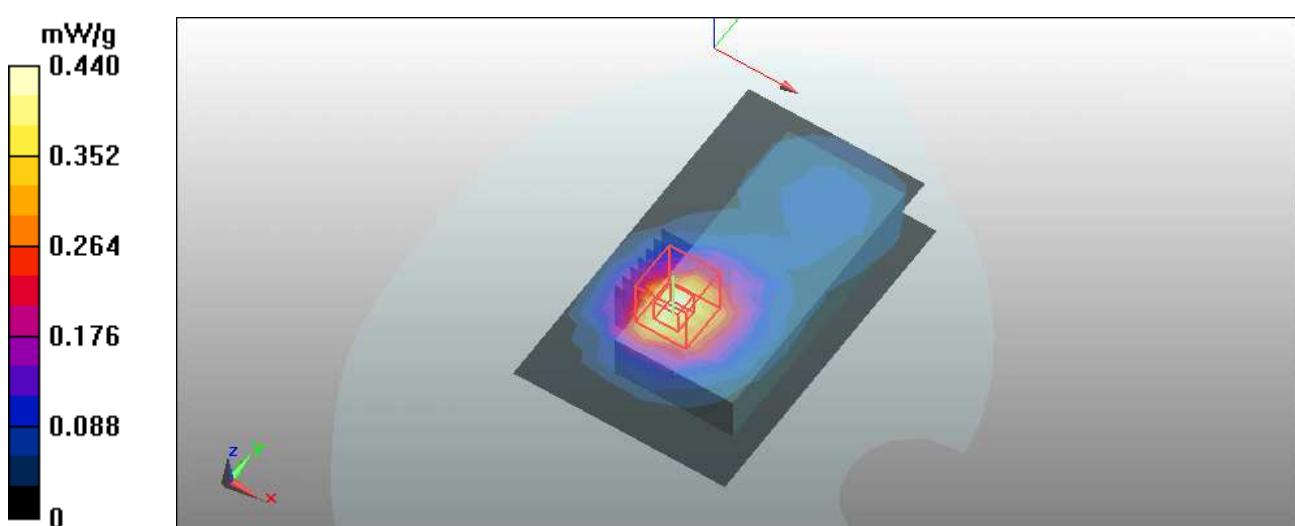

Test Laboratory: Bureau Veritas ADT

## System Validation Check-HSL835

**DUT: Dipole 835 MHz ; Type: D835V2 ; Serial: 4d021 ; Test Frequency: 835 MHz**

Communication System: CW ; Frequency: 835 MHz; Duty Cycle: 1:1; Modulation type: CW

Medium: HSL850; Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.92$  mho/m;  $\epsilon_r = 42$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Liquid level : 151 mm

Phantom section: Flat Section ; Separation distance : 15 mm (The feetpoint of the dipole to the Phantom) Air temp. : 23 degrees ; Liquid temp. : 22.6 degrees

DASY5 Configuration:

- Probe: EX3DV3 - SN3504; ConvF(9.8, 9.8, 9.8); Calibrated: 2010/1/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2009/12/16
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1485
- Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 61

**d=15mm, Pin=250 mW/Area Scan (7x9x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (measured) = 2.51 mW/g


**d=15mm, Pin=250 mW/Zoom Scan (7x7x7) (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 47.2 V/m; Power Drift = -0.081 dB

Peak SAR (extrapolated) = 3.69 W/kg

**SAR(1 g) = 2.45 mW/g; SAR(10 g) = 1.59 mW/g**

Maximum value of SAR (measured) = 2.86 mW/g

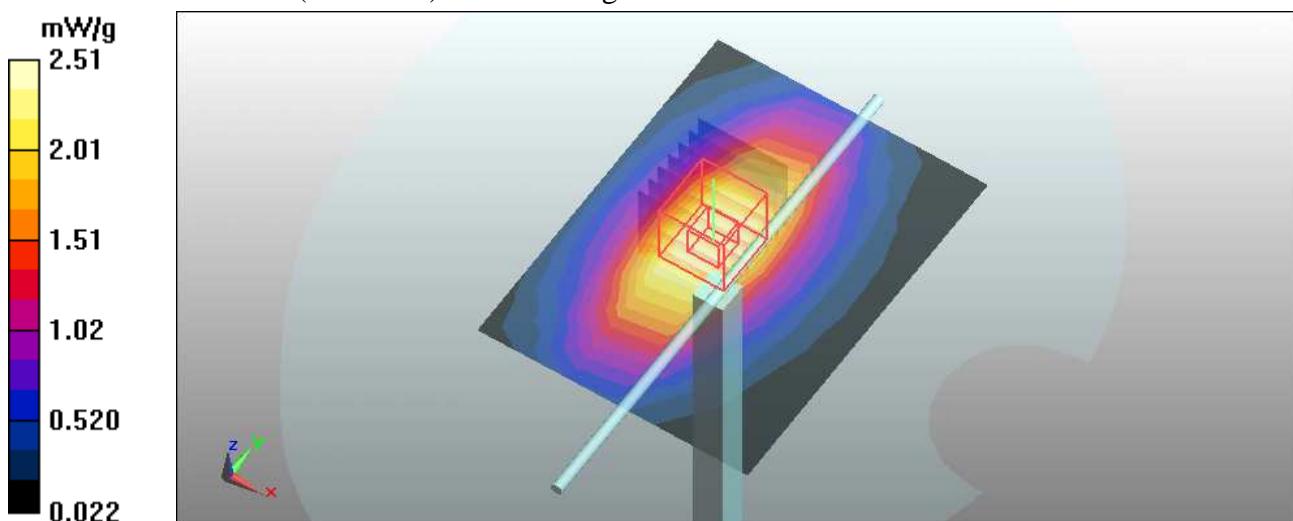

Test Laboratory: Bureau Veritas ADT

## System Validation Check-HSL1900

**DUT: Dipole 1900 MHz ; Type: D1900V2 ; Serial: 5d036 ; Test Frequency: 1900 MHz**

Communication System: CW ; Frequency: 1900 MHz; Duty Cycle: 1:1; Modulation type: CW  
 Medium: HSL1900; Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.36$  mho/m;  $\epsilon_r = 39.6$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Liquid level : 154 mm

Phantom section: Flat Section ; Separation distance : 10 mm (The feetpoint of the dipole to the Phantom)  
 Air temp. : 23.1 degrees ; Liquid temp. : 22.7 degrees

DASY5 Configuration:

- Probe: EX3DV3 - SN3504; ConvF(8.2, 8.2, 8.2); Calibrated: 2010/1/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2009/12/16
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1485
- Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 61


**d=10mm, Pin=250 mW/Area Scan (7x7x1):** Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (measured) = 13 mW/g

**d=10mm, Pin=250 mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 97.5 V/m; Power Drift = -0.051 dB

Peak SAR (extrapolated) = 19.1 W/kg

**SAR(1 g) = 10.3 mW/g; SAR(10 g) = 5.39 mW/g**

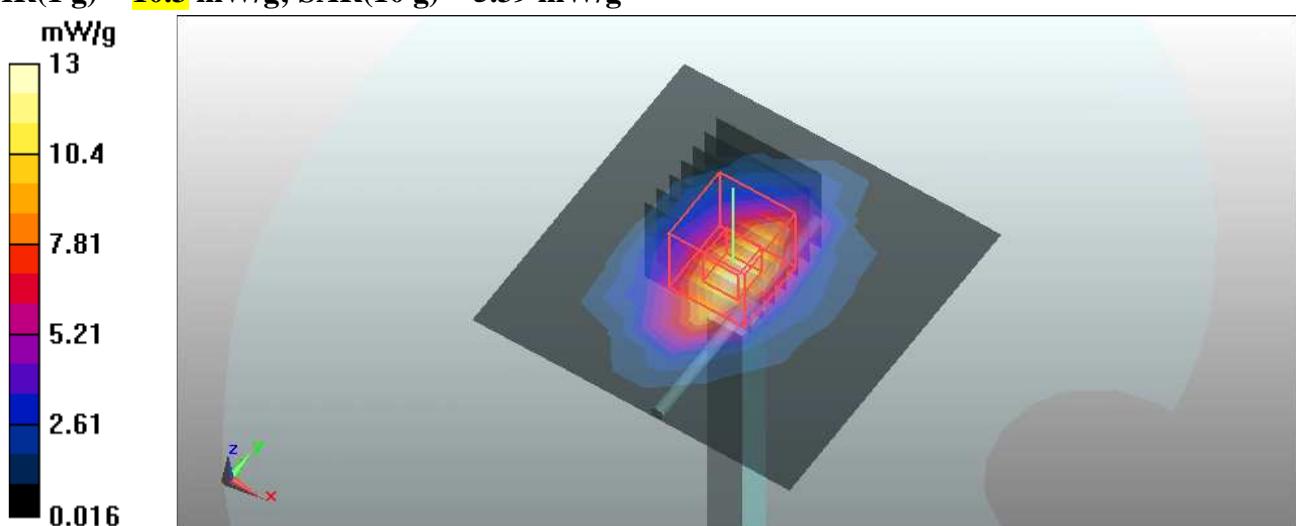

Test Laboratory: Bureau Veritas ADT

## System Validation Check-MSL835

**DUT: Dipole 835 MHz ; Type: D835V2 ; Serial: 4d021 ; Test Frequency: 835 MHz**

Communication System: CW ; Frequency: 835 MHz; Duty Cycle: 1:1; Modulation type: CW

Medium: MSL 835; Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.96$  mho/m;  $\epsilon_r = 53.9$ ;  $\rho = 1000$  kg/m<sup>3</sup> ; Liquid level : 152 mm

Phantom section: Flat Section ; Separation distance : 15 mm (The feetpoint of the dipole to the Phantom) Air temp. : 23.1 degrees ; Liquid temp. : 22.7 degrees

DASY5 Configuration:

- Probe: EX3DV3 - SN3504; ConvF(9.83, 9.83, 9.83); Calibrated: 2010/1/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: 2009/12/16
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1485
- Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 61

**d=15mm, Pin=250 mW/Area Scan (7x9x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (measured) = 2.51 mW/g


**d=15mm, Pin=250 mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 44.7 V/m; Power Drift = -0.085 dB

Peak SAR (extrapolated) = 3.72 W/kg

**SAR(1 g) = 2.48 mW/g; SAR(10 g) = 1.62 mW/g**

Maximum value of SAR (measured) = 2.9 mW/g

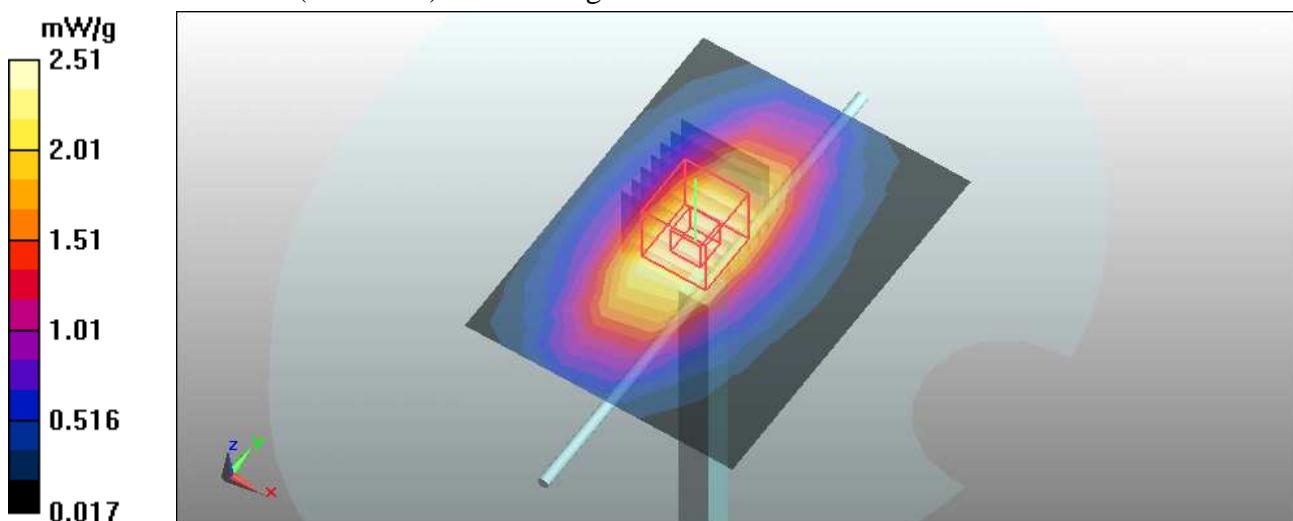

Test Laboratory: Bureau Veritas ADT

## System Validation Check-MSL 1900MHz

**DUT: Dipole 1900 MHz ; Type: D1900V2 ; Serial: 5d036 ; Test Frequency: 1900 MHz**

Communication System: CW ; Frequency: 1900 MHz; Duty Cycle: 1:1; Modulation type: CW  
 Medium: MSL1900; Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.56$  mho/m;  $\epsilon_r = 54.6$ ;  $\rho = 1000$  kg/m<sup>3</sup> ; Liquid level : 151 mm

Phantom section: Flat Section ; Separation distance : 10 mm (The feetpoint of the dipole to the Phantom) Air temp. : 23 degrees ; Liquid temp. : 22.8 degrees

DASY5 Configuration:

- Probe: EX3DV3 - SN3504; ConvF(8.21, 8.21, 8.21); Calibrated: 2009/1/21
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn510; Calibrated: DAE not calibrated
- Phantom: SAM with CRP; Type: SAM; Serial: TP-1485
- Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 61

**d=10mm, Pin=250mW/Area Scan (7x7x1):** Measurement grid: dx=15mm, dy=15mm  
 Maximum value of SAR (measured) = 9.3 mW/g


**d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 73.4 V/m; Power Drift = 0.157 dB


Peak SAR (extrapolated) = 19.7 W/kg

**SAR(1 g) = 10.6 mW/g; SAR(10 g) = 5.49 mW/g**

Maximum value of SAR (measured) = 13.5 mW/g

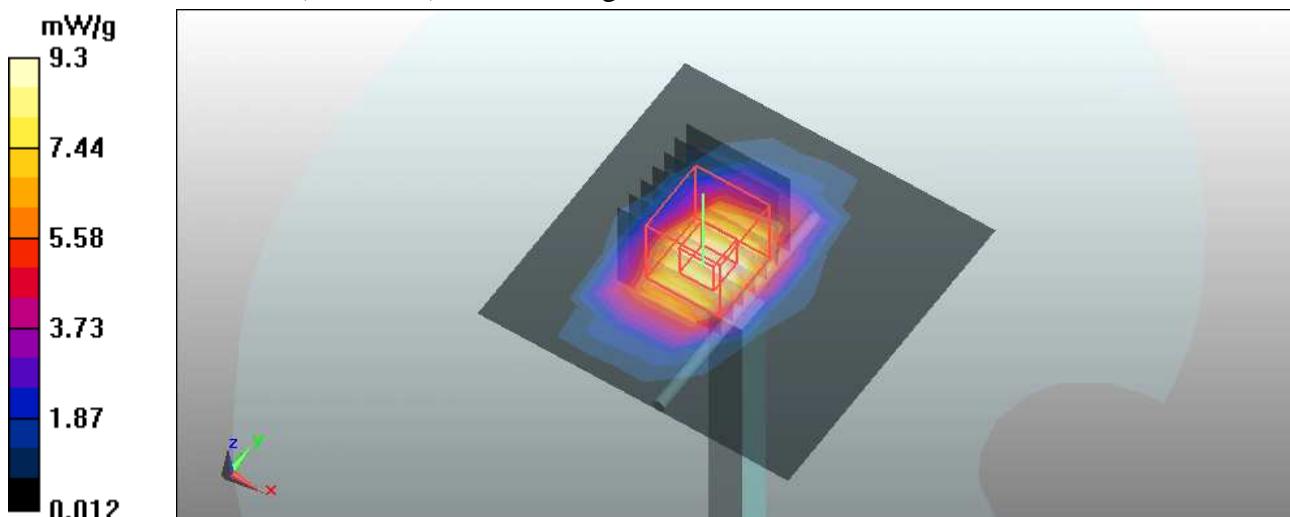

## APPENDIX B: BV ADT SAR MEASUREMENT SYSTEM

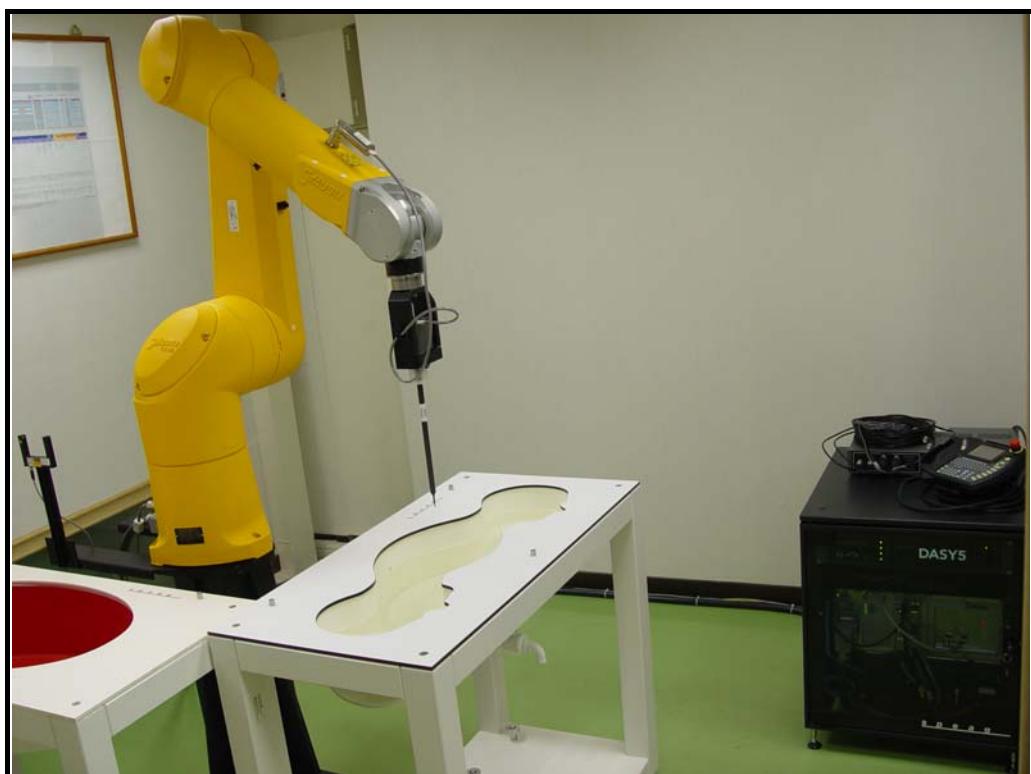

## APPENDIX C: PHOTOGRAPHS OF SYSTEM VALIDATION





A D T

## APPENDIX D: SYSTEM CERTIFICATE & CALIBRATION

### D1: PHANTOM

## Certificate of Conformity / First Article Inspection

Item	SAM Twin Phantom V4.0
Type No	QD 000 P40 C
Series No	TP-1150 and higher
Manufacturer	SPEAG Zeughausstrasse 43 CH-8004 Zürich Switzerland

### Tests

The series production process used allows the limitation to test of first articles.

Complete tests were made on the pre-series Type No. QD 000 P40 AA, Serial No. TP-1001 and on the series first article Type No. QD 000 P40 BA, Serial No. TP-1006. Certain parameters have been retested using further series items (called samples) or are tested at each item.

Test	Requirement	Details	Units tested
Dimensions	Compliant with the geometry according to the CAD model.	IT'IS CAD File (*)	First article, Samples
Material thickness of shell	Compliant with the requirements according to the standards	2mm +/- 0.2mm in flat and specific areas of head section	First article, Samples, TP-1314 ff.
Material thickness at ERP	Compliant with the requirements according to the standards	6mm +/- 0.2mm at ERP	First article, All items
Material parameters	Dielectric parameters for required frequencies	300 MHz – 6 GHz: Relative permittivity < 5, Loss tangent < 0.05	Material samples
Material resistivity	The material has been tested to be compatible with the liquids defined in the standards if handled and cleaned according to the instructions. Observe technical Note for material compatibility.	DEGMBe based simulating liquids	Pre-series, First article, Material samples
Sagging	Compliant with the requirements according to the standards. Sagging of the flat section when filled with tissue simulating liquid.	< 1% typical < 0.8% if filled with 155mm of HSL900 and without DUT below	Prototypes, Sample testing

### Standards

- [1] CENELEC EN 50361
- [2] IEEE Std 1528-2003
- [3] IEC 62209 Part I
- [4] FCC OET Bulletin 65, Supplement C, Edition 01-01

(\*) The IT'IS CAD file is derived from [2] and is also within the tolerance requirements of the shapes of the other documents.

### Conformity

Based on the sample tests above, we certify that this item is in compliance with the uncertainty requirements of SAR measurements specified in standards [1] to [4].

Date 07.07.2005

Signature / Stamp



A D T

## D2: DOSIMETRIC E-FIELD PROBE



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **BV-ADT (Auden)**

Certificate No: **EX3-3504\_Jan10**

## CALIBRATION CERTIFICATE

Object **EX3DV3 - SN:3504**

Calibration procedure(s) **QA CAL-01.v6, QA CAL-14.v3, QA CAL-23.v3 and QA CAL-25.v2  
 Calibration procedure for dosimetric E-field probes**

Calibration date: **January 26, 2010**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	1-Apr-09 (No. 217-01030)	Apr-10
Power sensor E4412A	MY41495277	1-Apr-09 (No. 217-01030)	Apr-10
Power sensor E4412A	MY41498087	1-Apr-09 (No. 217-01030)	Apr-10
Reference 3 dB Attenuator	SN: S5054 (3c)	31-Mar-09 (No. 217-01026)	Mar-10
Reference 20 dB Attenuator	SN: S5086 (20b)	31-Mar-09 (No. 217-01028)	Mar-10
Reference 30 dB Attenuator	SN: S5129 (30b)	31-Mar-09 (No. 217-01027)	Mar-10
Reference Probe ES3DV2	SN: 3013	30-Dec-09 (No. ES3-3013_Dec09)	Dec-10
DAE4	SN: 660	29-Sep-09 (No. DAE4-660_Sep09)	Sep-10
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-09)	In house check: Oct10

Calibrated by:	Name	Function	Signature
	Katja Pokovic	Technical Manager	

Approved by:	Fin Bomholt	R&D Director	

Issued: January 26, 2010

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA  
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

### **Glossary:**

TSL	tissue simulating liquid
NORM $x,y,z$	sensitivity in free space
ConvF	sensitivity in TSL / NORM $x,y,z$
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C	modulation dependent linearization parameters
Polarization $\varphi$	$\varphi$ rotation around probe axis
Polarization $\vartheta$	$\vartheta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

### **Calibration is Performed According to the Following Standards:**

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

### **Methods Applied and Interpretation of Parameters:**

- NORM $x,y,z$ : Assessed for E-field polarization  $\vartheta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). NORM $x,y,z$  are only intermediate values, i.e., the uncertainties of NORM $x,y,z$  does not effect the E<sup>2</sup>-field uncertainty inside TSL (see below ConvF).
- $NORM(f)x,y,z = NORMx,y,z * frequency\_response$  (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCPx,y,z: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- A $x,y,z$ ; B $x,y,z$ ; C $x,y,z$ ; VR $x,y,z$ ; A, B, C are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters:* Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM $x,y,z * ConvF$  whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- Spherical isotropy (3D deviation from isotropy):* in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset:* The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

# Probe EX3DV3

## SN:3504

Manufactured:	December 15, 2003
Last calibrated:	January 21, 2009
Recalibrated:	January 26, 2010

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

## DASY - Parameters of Probe: EX3DV3 SN:3504

### Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ( $\mu$ V/(V/m) <sup>2</sup> ) <sup>A</sup>	0.59	0.62	0.62	$\pm$ 10.1%
DCP (mV) <sup>B</sup>	97.9	95.0	98.0	

### Modulation Calibration Parameters

UID	Communication System Name	PAR		A dB	B dBuV	C	VR mV	Unc <sup>E</sup> (k=2)
10000	CW	0.00	X Y Z	0.00 0.00 0.00	0.00 0.00 0.00	1.00 1.00 1.00	300 300 300	$\pm$ 1.5%

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of NormX,Y,Z do not affect the E<sup>2</sup>-field uncertainty inside TSL (see Pages 5 and 6).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.

<sup>E</sup> Uncertainty is determined using the maximum deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

## DASY - Parameters of Probe: EX3DV3 SN:3504

### Calibration Parameter Determined in Head Tissue Simulating Media

f [MHz]	Validity [MHz] <sup>c</sup>	Permittivity	Conductivity	ConvF X	ConvF Y	ConvF Z	Alpha	Depth	Unc (k=2)
900	± 50 / ± 100	41.5 ± 5%	0.97 ± 5%	9.80	9.80	9.80	0.48	0.73	± 11.0%
1750	± 50 / ± 100	40.1 ± 5%	1.37 ± 5%	8.70	8.70	8.70	0.50	0.67	± 11.0%
1950	± 50 / ± 100	40.0 ± 5%	1.40 ± 5%	8.20	8.20	8.20	0.38	0.75	± 11.0%
2450	± 50 / ± 100	39.2 ± 5%	1.80 ± 5%	7.77	7.77	7.77	0.21	1.06	± 11.0%
2600	± 50 / ± 100	39.0 ± 5%	1.96 ± 5%	7.79	7.79	7.79	0.22	1.16	± 11.0%
5200	± 50 / ± 100	36.0 ± 5%	4.66 ± 5%	4.87	4.87	4.87	0.45	1.70	± 13.1%
5300	± 50 / ± 100	35.9 ± 5%	4.76 ± 5%	4.62	4.62	4.62	0.45	1.70	± 13.1%
5500	± 50 / ± 100	35.6 ± 5%	4.96 ± 5%	4.51	4.51	4.51	0.50	1.70	± 13.1%
5600	± 50 / ± 100	35.5 ± 5%	5.07 ± 5%	4.25	4.25	4.25	0.55	1.70	± 13.1%
5800	± 50 / ± 100	35.3 ± 5%	5.27 ± 5%	4.53	4.53	4.53	0.50	1.70	± 13.1%

<sup>c</sup> The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

## DASY - Parameters of Probe: EX3DV3 SN:3504


### Calibration Parameter Determined in Body Tissue Simulating Media

f [MHz]	Validity [MHz] <sup>c</sup>	Permittivity	Conductivity	ConvF X	ConvF Y	ConvF Z	Alpha	Depth Unc (k=2)
900	± 50 / ± 100	55.0 ± 5%	1.05 ± 5%	9.83	9.83	9.83	0.44	0.76 ± 11.0%
1750	± 50 / ± 100	53.4 ± 5%	1.49 ± 5%	8.64	8.64	8.64	0.44	0.74 ± 11.0%
1950	± 50 / ± 100	53.3 ± 5%	1.52 ± 5%	8.52	8.52	8.52	0.39	0.79 ± 11.0%
2450	± 50 / ± 100	52.7 ± 5%	1.95 ± 5%	7.91	7.91	7.91	0.32	0.86 ± 11.0%
2600	± 50 / ± 100	52.5 ± 5%	2.16 ± 5%	7.80	7.80	7.80	0.27	0.90 ± 11.0%
5200	± 50 / ± 100	49.0 ± 5%	5.30 ± 5%	4.45	4.45	4.45	0.50	1.80 ± 13.1%
5300	± 50 / ± 100	48.5 ± 5%	5.42 ± 5%	4.18	4.18	4.18	0.55	1.80 ± 13.1%
5500	± 50 / ± 100	48.6 ± 5%	5.65 ± 5%	3.91	3.91	3.91	0.60	1.80 ± 13.1%
5600	± 50 / ± 100	48.5 ± 5%	5.77 ± 5%	3.70	3.70	3.70	0.65	1.80 ± 13.1%
5800	± 50 / ± 100	48.2 ± 5%	6.00 ± 5%	3.95	3.95	3.95	0.60	1.75 ± 13.1%

<sup>c</sup> The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.



## Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)

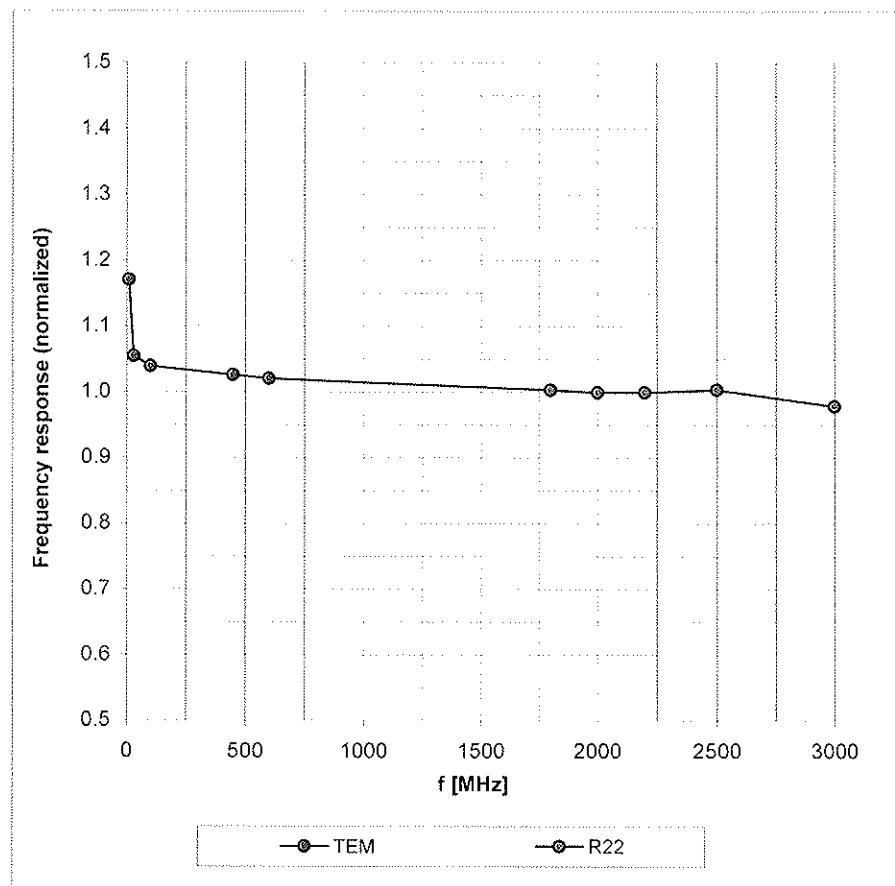

Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  ( $k=2$ )


## Receiving Pattern ( $\phi$ ), $\vartheta = 0^\circ$

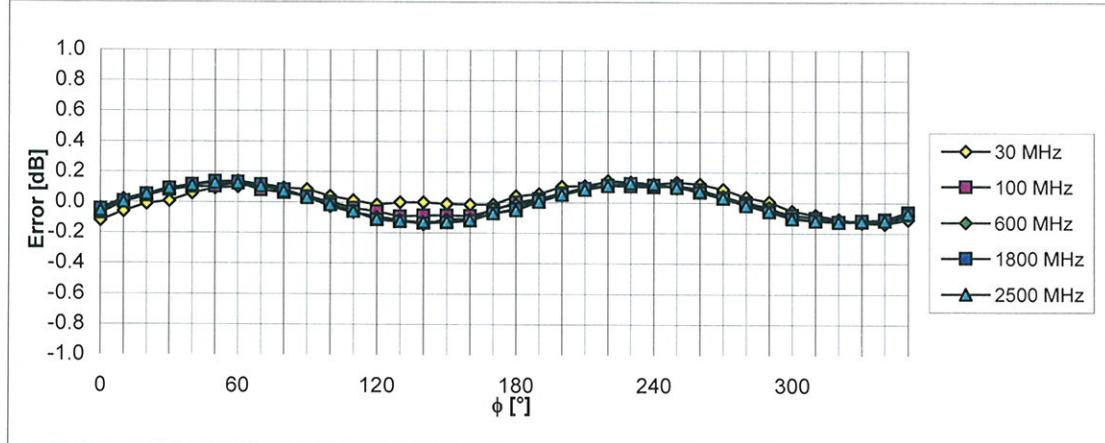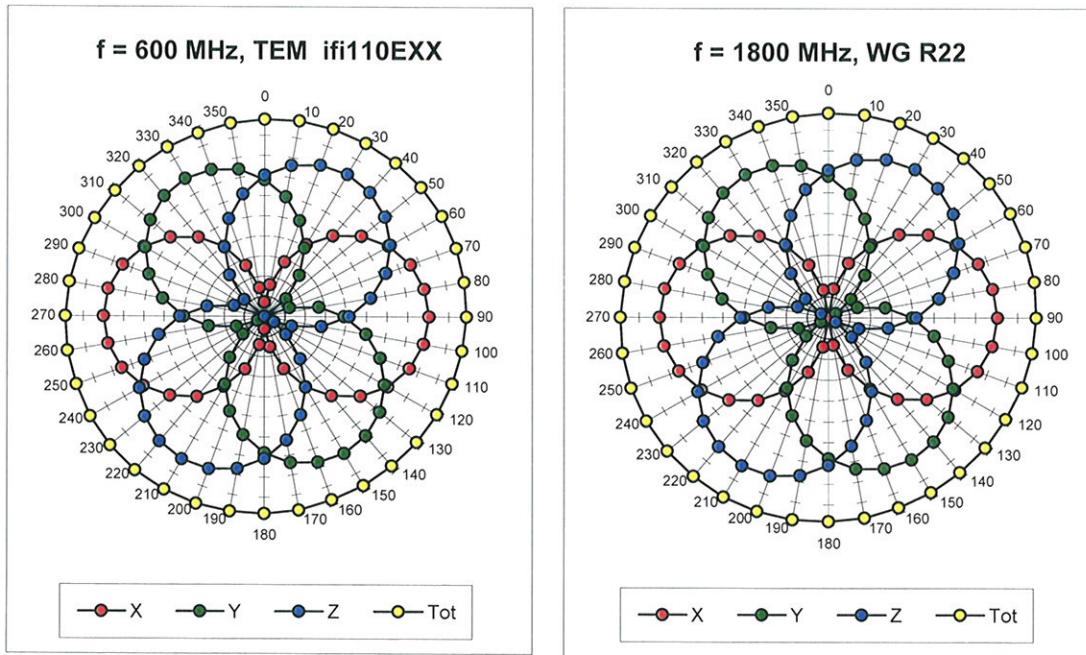

Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  (k=2)


## Dynamic Range $f(\text{SAR}_{\text{head}})$

(Waveguide R22,  $f = 1800$  MHz)

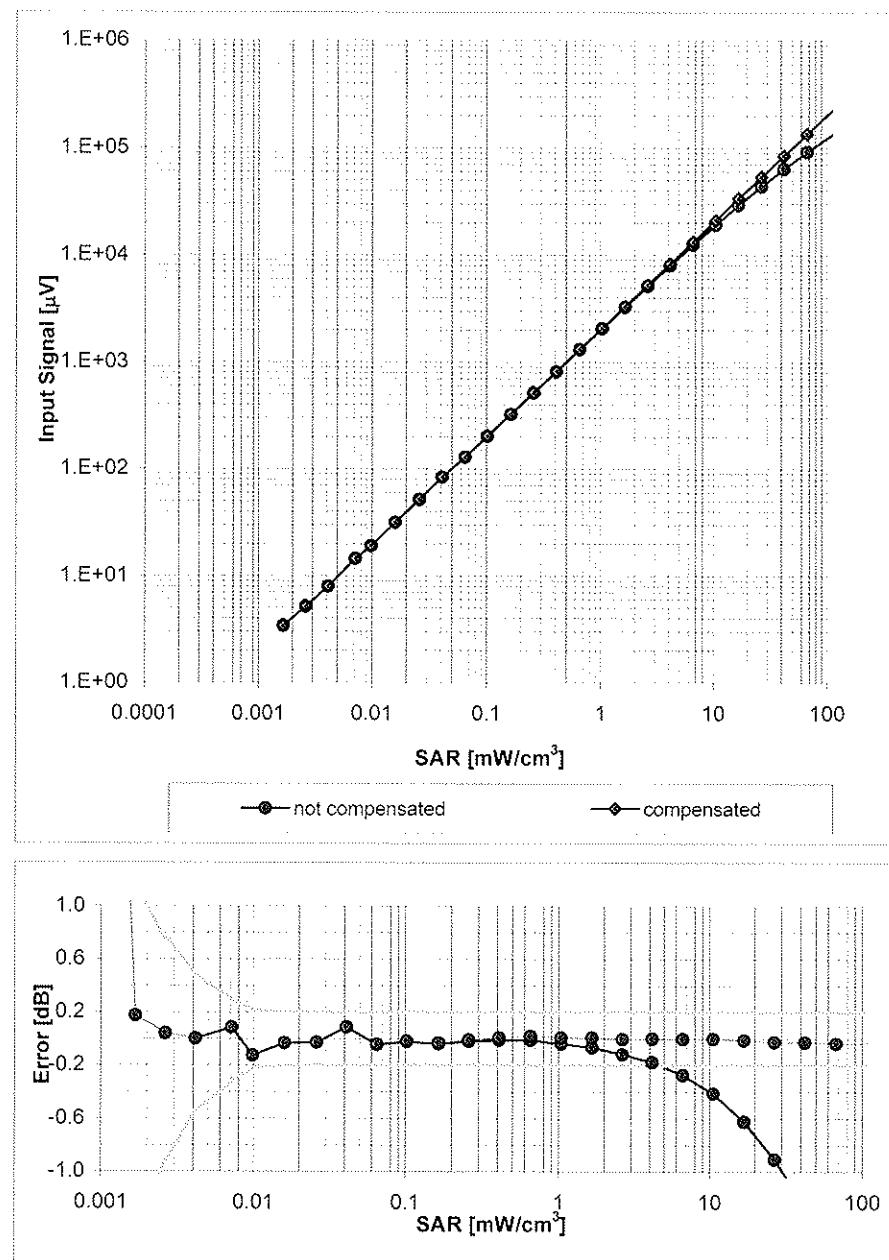


Uncertainty of Linearity Assessment:  $\pm 0.6\%$  ( $k=2$ )

## Conversion Factor Assessment

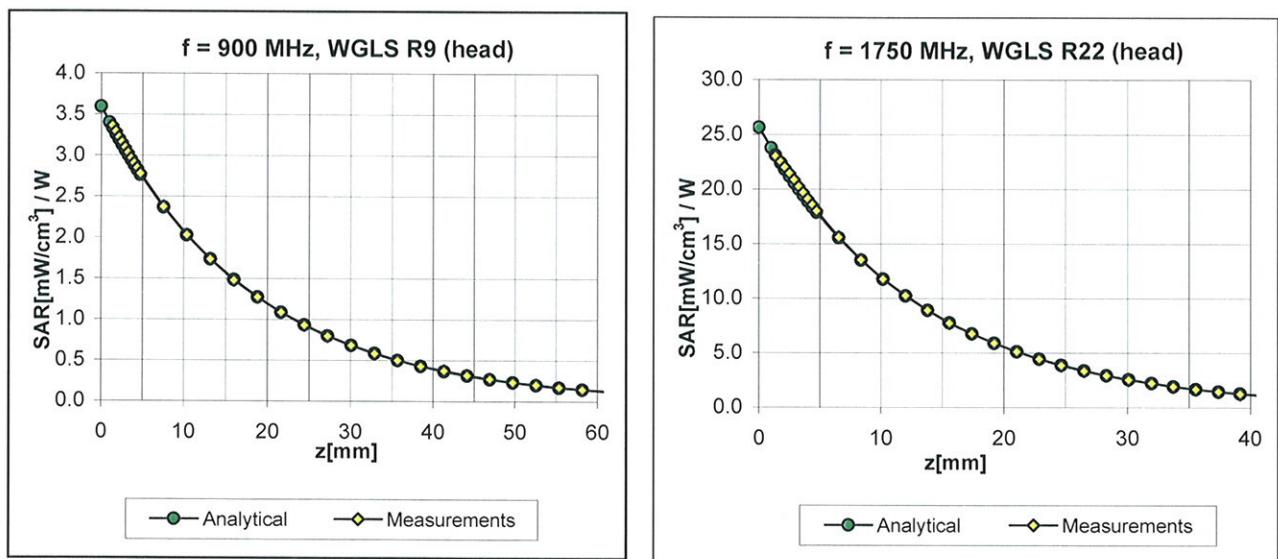

## Deviation from Isotropy in HSL

Error ( $\phi, \theta$ ), f = 900 MHz

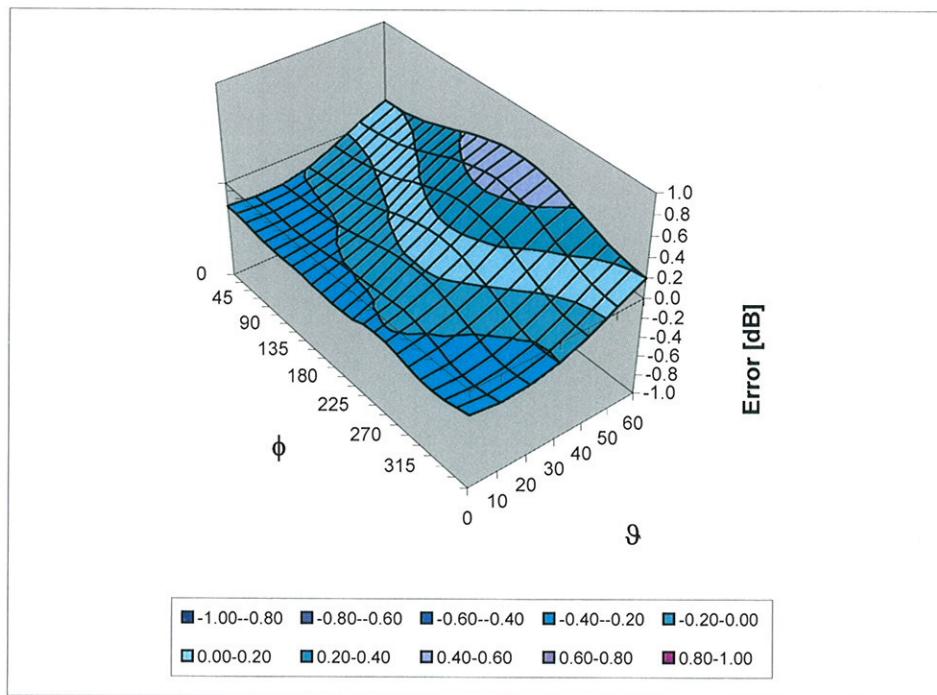

Uncertainty of Spherical Isotropy Assessment:  $\pm 2.6\%$  (k=2)

## Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	Not applicable
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	2 mm