

FCC TEST REPORT (PART 22)

REPORT NO.: RF110302C10-1

MODEL NO.: F-11C

FCC ID: VQK-F11C

RECEIVED: Mar. 02, 2011

TESTED: Mar. 17, 2011

ISSUED: Mar. 22, 2011

APPLICANT: FUJITSU LIMITED

ADDRESS: 1-1, Kamikodanaka 4-chome, Nakahara-ku, Kawasaki

211-8588, Japan

ISSUED BY: Bureau Veritas Consumer Products Services (H.K.)

Ltd., Taoyuan Branch

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou Hsiang,

Taipei Hsien 244, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei Shan

Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This test report consists of 43 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product certification, approval, or endorsement by TAF or any government agency. The test results in the report only apply to the tested sample.





TABLE OF CONTENTS

RELEA	ASE CONTROL RECORD	4
1	CERTIFICATION	5
2	SUMMARY OF TEST RESULTS	6
2.1	MEASUREMENT UNCERTAINTY	6
3	GENERAL INFORMATION	7
3.1	GENERAL DESCRIPTION OF EUT	7
3.2	DESCRIPTION OF TEST MODES	8
3.2.1	CONFIGURATION OF SYSTEM UNDER TEST	8
3.2.2	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	9
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	10
3.4	DESCRIPTION OF SUPPORT UNITS	11
4	TEST TYPES AND RESULTS	12
4.1	OUTPUT POWER MEASUREMENT	12
4.1.1	LIMITS OF OUTPUT POWER MEASUREMENT	12
4.1.2	TEST INSTRUMENTS	13
4.1.3	TEST PROCEDURES	14
4.1.4	TEST SETUP	15
4.1.5	EUT OPERATING CONDITIONS	15
4.1.6	TEST RESULTS	16
4.2	RADIATED EMISSION MEASUREMENT (BELOW 1GHz)	18
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	18
4.2.2	TEST INSTRUMENTS	18
4.2.3	TEST PROCEDURES	19
4.2.4	DEVIATION FROM TEST STANDARD	19
4.2.5	TEST SETUP	20
4.2.6	EUT OPERATING CONDITIONS	20
4.2.7	TEST RESULTS	21
4.3	RADIATED EMISSION MEASUREMENT (ABOVE 1GHz)	27
4.3.1	LIMITS OF RADIATED EMISSION MEASUREMENT	27
4.3.2	TEST INSTRUMENTS	27
4.3.3	TEST PROCEDURES	27
4.3.4	DEVIATION FROM TEST STANDARD	27
4.3.5	TEST SETUP	27
4.3.6	EUT OPERATING CONDITIONS	27
437	TEST RESULTS	28



4.4	CONDUCTED EMISSION MEASUREMENT	36
4.4.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	36
4.4.2	TEST INSTRUMENTS	36
4.4.3	TEST PROCEDURES	37
4.4.4	DEVIATION FROM TEST STANDARD	37
4.4.5	TEST SETUP	38
4.4.6	EUT OPERATING CONDITIONS	38
4.4.7	TEST RESULTS	39
5	PHOTOGRAPHS OF THE TEST CONFIGURATION	41
6	INFORMATION ON THE TESTING LABORATORIES	42
7	APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGE	ES
	TO THE EUT BY THE LAB	43



RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
Original release	N/A	Mar. 22, 2011

Report No.: RF110302C10-1 4 Report Format Version 4.0.0



1 CERTIFICATION

PRODUCT: Mobile phone

MODEL NO.: F-11C

BRAND: FOMA

APPLICANT: FUJITSU LIMITED

TESTED: Mar. 17, 2011

TEST SAMPLE: ENGINEERING SAMPLE

STANDARDS: FCC Part 22, Subpart H

ANSI C63.4-2003

TEST ITEM: Maximum Peak Output Power (Section 2.1046 22.913 (a))

Radiated Spurious Emissions (Section 2.1053 22.917)

AC Power Conducted Emission (Section 15.207)

The above equipment (model: F-11C) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : / th . , DATE: Mar. 22, 2011

Pettie Chen / Specialist

APPROVED BY : , DATE: Mar. 22, 2011

Gary Chang / Assistant Manager

Report No.: RF110302C10-1 5 Report Format Version 4.0.0



2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 22 & Part 2						
STANDARD SECTION TEST TYPE AND LIMIT		RESULT REMARK				
2.1046 Maximum Peak Output Power Limit: max. 7 watts e.r.p peak power		PASS	Meet the requirement of limit. Minimum passing margin is 21.1dBm at 836.4MHz.			
2.1053 22.917 Radiated Spurious Emissions		PASS	Meet the requirement of limit. Minimum passing margin is -27.6dB at 1652.8MHz.			
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -14.93dB at 0.170MHz.			

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY	
Conducted emissions	150kHz~30MHz	2.44 dB	
	30MHz ~ 200MHz	3.19 dB	
Radiated emissions	200MHz ~1000MHz	3.21 dB	
Naciated emissions	1GHz ~ 18GHz	2.26 dB	
	18GHz ~ 40GHz	1.94 dB	

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

EUT	Mobile phone		
MODEL NO.	F-11C		
FCC ID	VQK-F11C		
POWER SUPPLY	3.7Vdc (Li-ion battery)		
POWER SUPPLY	5.4Vdc (Adapter)		
MODULATION TYPE	WCDMA (Band 5) / HSDPA		
OPERATING FREQUENCY	826.4MHz ~ 846.6MHz		
NUMBER OF CHANNEL	102		
ANTENNA TYPE	Monopole antenna with 0dBi gain (EUT open)		
ANTENNATTPE	Monopole antenna with -4.0dBi gain (EUT close)		
DATA CABLE	NA		
I/O PORTS	Refer to user's manual		
ACCESSORY DEVICES	Battery		

NOTE:

- 1. In this report, only included test items of output power, radiated spurious emissions and AC power conducted emissions per client's requests.
- 2. The EUT is a Mobile phone. The test data are separated into following test reports.

	TEST STANDARD	REFERENCE REPORT
RFID	FCC Part 15, Subpart C (Section 15.225, 15.215)	RF110302C10
WCDMA 850	FCC Part 22	RF110302C10-1
PCS 1900	FCC Part 24	RF110302C10-2

3. The EUT uses the following Li-ion battery:

BRAND	Fujitsu Limited	
MODEL	F19	
RATING	3.7Vdc, 830mAh	

4. The following accessories are for support units only.

PRODUCT	BRAND	DESCRIPTION
Adapter	>1\/IX	I/P: 100-240Vac, 50-60Hz, 0.12A O/P: 5.4Vdc, 700mA
USB cable NA		0.8m non-shielded cable without core

5. The following summary may be used to identify the samples referenced in the test summary and any declared hardware or software modifications. Where modifications have been made, conformance has been demonstrated by regression testing declared by the manufacturer.

IMEI	Software Revision	Hardware Revision	Date of Receipt	
355175040002488	R08.1	V2.0.0	2011/03/14	

6. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.




3.2 DESCRIPTION OF TEST MODES

102 channels are provided to this EUT. Therefore, the low, middle and high channels are chosen for testing.

CHANNEL		FREQUENCY	TX MODE	
LOW	4132	826.4 MHz	WCDMA / HSDPA	
MIDDLE	4182	836.4 MHz	WCDMA / HSDPA	
HIGH	4233	846.6 MHz	WCDMA / HSDPA	

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

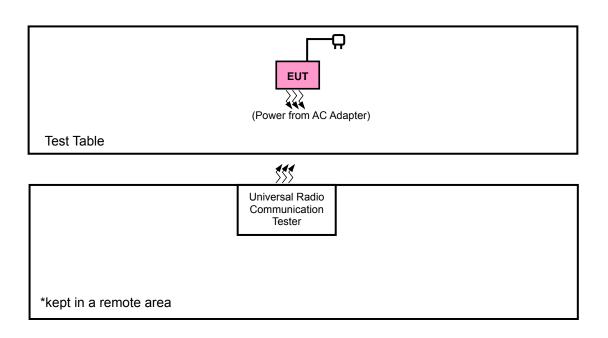



3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE		APPLICA	ABLE TO		DESCRIPTION	
MODE	ОР	RE<1G	RE≥1G	PLC	DESCRIPTION	
-	V	V	V	V	-	

Where

OP: Output Power Measurement **RE≥1G:** Radiated emission above 1GHz

RE<1G: Radiated emission below 1GHz **PLC:** Power Line Conducted Emission

OUTPUT POWER MEASUREMENT:

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	AXIS
4132 to 4233	4132, 4182, 4233	WCDMA	X, Y, Z
4132 to 4233	4182	HSDPA	X, Y, Z

RADIATED EMISSION MEASUREMENT (BELOW 1 GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL TESTED CHANNEL		MODULATION TECHNOLOGY	AXIS
4132 to 4233	4182	WCDMA	X, Y, Z
4132 to 4233	4182	HSDPA	X, Y, Z

RADIATED EMISSION MEASUREMENT (ABOVE 1 GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	NNEL TESTED CHANNEL MODULATION TECH		AXIS
4132 to 4233	4132, 4182, 4233	WCDMA	X, Y, Z
4132 to 4233	4182	HSDPA	X, Y, Z



POWER LINE CONDUCTED EMISSION TEST:

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture), and packet types.

Following channel(s) was (were) selected for the final test as listed below.

AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY
4132 to 4233	4182	WCDMA

TEST CONDITION:

APPLICABLE TO	APPLICABLE TO ENVIRONMENTAL CONDITIONS		TESTED BY
OP	23deg. C, 64%RH, 1010hPa	120Vac, 60Hz	Frank Wang
RE≥1G	23deg. C, 64%RH, 1010hPa	120Vac, 60Hz	Frank Wang
RE<1G	23deg. C, 64%RH, 1010hPa	120Vac, 60Hz	Frank Wang
PLC	25deg. C, 65%RH, 1000hPa	120Vac, 60Hz	Frank Wang

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 22

ANSI C63.4-2003

ANSI/TIA/EIA-603-C 2004

NOTE: All test items have been performed and recorded as per the above standards.



3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	2/3G Acoustic test (Audio conformance test-CMU 200)	R&S	CMU 200	118914	NA
2	ADAPTER	SMK	NA	NA	NA

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	NA

NOTE:

- 1. All power cords of the above support units are non shielded (1.8m).
- 2. Item 2 was supplied from the client.



4 TEST TYPES AND RESULTS

4.1 OUTPUT POWER MEASUREMENT

4.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

The radiated peak output power shall be according to the specific rule Part 22.913 (a) that "Mobile / Portable station are limited to 7 watts e.r.p".



4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESIB7	100033	Jul. 29, 2010	Jul. 28, 2011
Spectrum Analyzer Agilent	E4446A	MY48250266	Aug. 11, 2010	Aug. 10, 2011
BILOG Antenna SCHWARZBECK	VULB9168	9168-160	Apr. 27, 2010	Apr. 26, 2011
HORN Antenna SCHWARZBECK	9120D	9120D-405	Feb. 08, 2011	Feb. 07, 2012
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170243	Dec. 27, 2010	Dec. 26, 2011
Preamplifier Agilent	8447D	2944A10633	Nov. 02, 2010	Nov. 01, 2011
Preamplifier Agilent	8449B	3008A01964	Nov. 02, 2010	Nov. 01, 2011
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	238141/4	May 14, 2010	May 13, 2011
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	12738/6	May 14, 2010	May 13, 2011
Software ADT.	ADT_Radiated_ V7.6.15.9.2	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA	NA
Antenna Tower Controller inn-co GmbH	CO2000	017303	NA	NA
Turn Table ADT.	TT100.	TT93021703	NA	NA
Turn Table Controller ADT.	SC100.	SC93021703	NA	NA

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

- 2. The test was performed in HwaYa Chamber 3.
- 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
- 4. The FCC Site Registration No. is 988962.
- 5. The IC Site Registration No. is IC 7450F-3.




4.1.3 TEST PROCEDURES

- a. The power was measured with R&S Spectrum Analyzer. All measurements were done at 3 channels, 4132, 4182 and 4233 (WCDMA) (low, middle and high operational frequency range.)
- b. The conducted peak output power used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer. The path loss included the splitter loss, cable loss and 20dB pad loss. The spectrum set RB/VB 5MHz (WCDMA), then read peak power value and record to the test. (All transmitted path loss shall be considered in the test report data.)
- c. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- d. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a tx cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step c. Record the power level of S.G
- e. EIRP = Output power level of S.G TX cable loss + Antenna gain of substitution horn.
- f. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, E.R.P power = E.I.P.R power 2.15dBi.



4.1.4 TEST SETUP

EIRP POWER MEASUREMENT:

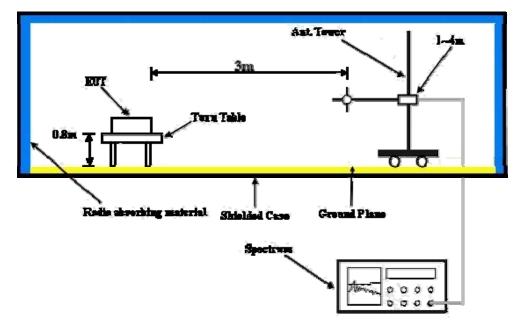

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.5 EUT OPERATING CONDITIONS

- a. The EUT makes a phone call to the communication simulator.
- b. The communication simulator station system controlled an EUT to export maximum output power under transmission mode and specific channel frequency.



4.1.6 TEST RESULTS

FOR WCDMA

X-AXIS

ERP						
CHANNEL NO.	FREQUENCY	S.G VALUE	CORRECTION	OUTPUT POWER		
	(MHz)	(dBm) FACTOR (dB)		dBm	mW	
4132	826.4	28.5	-8.6	19.9	96.6	
4182	836.4	28.9	-8.6	20.3	105.9	
4233	846.6	28.2	-8.7	19.5	88.1	

Y-AXIS

ERP						
CHANNEL NO 1 TO THE TOTAL				ОИТРИТ	UTPUT POWER	
	(MHz)	(dBm)	FACTOR (dB)	dBm	mW	
4132	826.4	29.3	-8.6	20.7	116.1	
4182	836.4	29.7	-8.6	21.1	127.4	
4233	846.6	29.6	-8.7	20.9	121.6	

Z-AXIS

ERP						
CHANNEL NO.	O. FREQUENCY S.G VALUE CORRECTION OUTPUT POW				POWER	
	(MHz)	(dBm) FACTOR (dB)		dBm	mW	
4132	826.4	29.2	-8.6	20.6	113.5	
4182	836.4	29.5	-8.6	20.9	121.6	
4233	846.6	28.7	-8.7	20.0	98.9	

REMARKS: 1. Peak Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).

2. Correction Factor (dB) = Substitution Antenna Gain (dBi) + Cable Loss (dB)



FOR HSDPA

X-AXIS

ERP						
CHANNEL NO.	FREQUENCY	S.G VALUE	CORRECTION	OUTPUT POWER		
	(MHz)	(dBm)	FACTOR (dB)	dBm	mW	
4182	836.4	27.6	-8.6	19.0	78.5	

Y-AXIS

ERP							
CHANNEL NO.	FREQUENCY	S.G VALUE	CORRECTION	OUTPUT POWER			
	(MHz)	(dBm)	FACTOR (dB)	dBm	mW		
4182	836.4	28.8	-8.6	20.2	103.5		

Z-AXIS

Z-AXIO		ERP			
CHANNEL NO.	FREQUENCY	S.G VALUE	CORRECTION	OUTPUT POWER	
	(MHz)	(dBm)	FACTOR (dB)	dBm	mW
4182	836.4	28.6	-8.6	20.0	98.9

REMARKS: 1. Peak Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).

2. Correction Factor (dB) = Substitution Antenna Gain (dBi) + Cable Loss (dB)



4.2 RADIATED EMISSION MEASUREMENT (BELOW 1GHz)

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

In the FCC 24.238(a), On any frequency outside a licensee's frequency block within USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 +10 log (P) dB. The specified minimum attenuation becomes 43dB and the limit of emission equal to –13dBm.

4.2.2 TEST INSTRUMENTS

Same as 4.1.2.



4.2.3 TEST PROCEDURES

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step a. Record the power level of S.G
- c. EIRP = Output power level of S.G TX cable loss + Antenna gain of substitution horn.
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, E.R.P power = E.I.P.R power 2.15dBi.


NOTE: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation



4.2.5 TEST SETUP

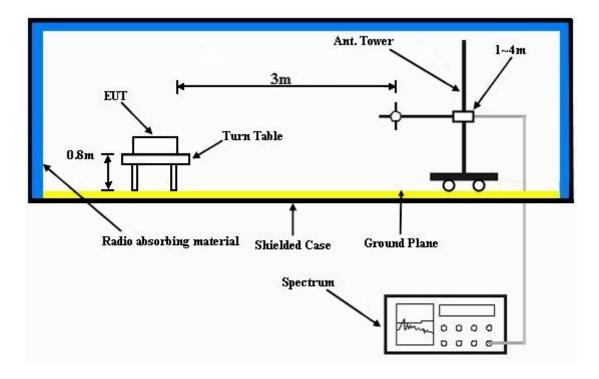

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT OPERATING CONDITIONS

- a. The EUT makes a phone call to the communication simulator.
- b. The communication simulator station system controlled an EUT to export maximum output power under transmission mode and specific channel frequency.



4.2.7 TEST RESULTS

FOR WCDMA

X-AXIS

MOD	E	TX channel 418	32					
	ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)		
1	72.77	36.3	-13.0	-50.5	-7.7	-58.2		
2	133.03	34.6	-13.0	-51.9	-7.7	-59.6		
3	181.62	33.7	-13.0	-53.4	-7.7	-61.1		
4	712.30	35.1	-13.0	-51.7	-7.9	-59.6		
5	817.27	35.7	-13.0	-50.7	-7.9	-58.6		
6	933.91	36.7	-13.0	-50.0	-7.9	-57.9		
	AN	TENNA POLAR	ITY & TEST DIS	STANCE: VERT	TCAL AT 3 M			
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)		
1	41.66	38.9	-13.0	-47.5	-7.7	-55.2		
2	70.82	39.5	-13.0	-47.0	-7.7	-54.7		
3	547.07	32.4	-13.0	-54.5	-7.8	-62.3		
4	681.20	34.2	-13.0	-52.7	-7.8	-60.5		
5	813.39	36.7	-13.0	-49.7	-7.9	-57.6		
6	949.46	37.8	-13.0	-48.5	-7.9	-56.4		



Y-AXIS

MOD	E	TX channel 418	32				
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)	
1	72.77	36.6	-13.0	-49.5	-7.7	-57.2	
2	125.25	35.5	-13.0	-51.2	-7.7	-58.9	
3	181.62	35.4	-13.0	-51.5	-7.7	-59.2	
4	558.74	36.6	-13.0	-49.9	-7.8	-57.7	
5	828.94	36.7	-13.0	-50.1	-7.9	-58.0	
6	947.52	38.2	-13.0	-47.7	-7.9	-55.6	
	AN	TENNA POLAR	ITY & TEST DI	STANCE: VERT	TICAL AT 3 M		
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)	
1	39.72	38.6	-13.0	-48.4	-7.7	-56.1	
2	70.82	39.5	-13.0	-47.7	-7.7	-55.4	
3	646.21	34.3	-13.0	-52.5	-7.8	-60.3	
4	714.25	35.1	-13.0	-51.8	-7.9	-59.7	
5	844.49	36.3	-13.0	-50.6	-7.9	-58.5	
6	959.18	38.8	-13.0	-47.4	-7.9	-55.3	



Z-AXIS

MOD	E	TX channel 418	32				
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)	
1	70.82	36.8	-13.0	-49.6	-7.7	-57.3	
2	127.19	33.8	-13.0	-52.8	-7.7	-60.5	
3	605.39	33.2	-13.0	-52.9	-7.8	-60.7	
4	725.91	35.0	-13.0	-51.4	-7.9	-59.3	
5	830.88	36.4	-13.0	-50.3	-7.9	-58.2	
6	959.18	38.4	-13.0	-48.0	-7.9	-55.9	
	ANT	TENNA POLARI	TY & TEST DIS	STANCE: VERT	TCAL AT 3 M		
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)	
1	41.66	39.0	-13.0	-48.1	-7.7	-55.8	
2	70.82	41.0	-13.0	-46.2	-7.7	-53.9	
3	547.07	35.0	-13.0	-51.6	-7.8	-59.4	
4	729.80	36.4	-13.0	-50.3	-7.9	-58.2	
5	836.71	36.9	-13.0	-49.7	-7.9	-57.6	
6	955.29	38.7	-13.0	-47.4	-7.9	-55.3	



FOR HSDPA

X-AXIS

MOD	E	TX channel 418	32					
	ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)		
1	72.77	36.1	-13.0	-50.8	-7.7	-58.5		
2	133.03	33.1	-13.0	-53.7	-7.7	-61.4		
3	547.07	33.6	-13.0	-53.0	-7.8	-60.8		
4	739.52	34.8	-13.0	-51.8	-7.9	-59.7		
5	840.60	36.2	-13.0	-50.2	-7.9	-58.1		
6	968.90	38.1	-13.0	-48.8	-7.9	-56.7		
	AN	TENNA POLAR	ITY & TEST DI	STANCE: VERT	TICAL AT 3 M			
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)		
1	41.66	38.7	-13.0	-48.2	-7.7	-55.9		
2	70.82	39.1	-13.0	-47.6	-7.7	-55.3		
3	105.81	32.0	-13.0	-54.4	-7.7	-62.1		
4	181.62	29.0	-13.0	-58.1	-7.7	-65.8		
5	867.82	36.8	-13.0	-49.3	-7.9	-57.2		
6	961.12	38.0	-13.0	-48.7	-7.9	-56.6		



Y-AXIS

MOD	E	TX channel 418	32				
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)	
1	72.75	36.3	-13.0	-50.6	-7.7	-58.3	
2	125.20	35.9	-13.0	-50.8	-7.7	-58.5	
3	272.99	30.1	-13.0	-56.3	-7.7	-64.0	
4	558.68	36.3	-13.0	-50.3	-7.8	-58.1	
5	659.82	35.2	-13.0	-51.3	-7.8	-59.1	
6	966.95	38.1	-13.0	-48.5	-7.9	-56.4	
	AN	TENNA POLAR	ITY & TEST DI	STANCE: VERT	TICAL AT 3 M		
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)	
1	70.82	39.2	-13.0	-47.1	-7.7	-54.8	
2	133.03	35.5	-13.0	-51.3	-7.7	-59.0	
3	414.89	28.8	-13.0	-58.2	-7.8	-66.0	
4	702.59	34.6	-13.0	-51.6	-7.9	-59.5	
5	745.35	34.1	-13.0	-52.4	-7.9	-60.3	
6	939.74	38.5	-13.0	-47.8	-7.9	-55.7	



Z-AXIS

MOD	E	TX channel 418	32				
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)	
1	70.56	36.6	-13.0	-50.3	-7.7	-58.0	
2	125.25	32.3	-13.0	-54.5	-7.7	-62.2	
3	479.04	31.0	-13.0	-56.0	-7.8	-63.8	
4	762.85	34.4	-13.0	-52.0	-7.9	-59.9	
5	885.31	36.3	-13.0	-50.3	-7.9	-58.2	
6	992.22	38.5	-13.0	-48.3	-7.9	-56.2	
	AN	TENNA POLAR	ITY & TEST DI	STANCE: VERT	TCAL AT 3 M		
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)	
1	41.60	39.2	-13.0	-47.3	-7.7	-55.0	
2	125.25	30.2	-13.0	-56.5	-7.7	-64.2	
3	560.68	33.0	-13.0	-53.4	-7.8	-61.2	
4	790.06	35.2	-13.0	-51.4	-7.9	-59.3	
5	867.82	36.8	-13.0	-49.6	-7.9	-57.5	
6	943.63	36.9	-13.0	-49.7	-7.9	-57.6	



4.3 RADIATED EMISSION MEASUREMENT (ABOVE 1GHz)

4.3.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Same as 4.2.1.

4.3.2 TEST INSTRUMENTS

Same as 4.2.2.

4.3.3 TEST PROCEDURES

Same as 4.2.3.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP

Same as 4.2.5.

4.3.6 EUT OPERATING CONDITIONS

Same as 4.2.6.



4.3.7 TEST RESULTS

FOR WCDMA

X-AXIS

MOD	E	TX channel 413	TX channel 4132						
	ANTE	NNA POLARIT	Y & TEST DIST	ANCE: HORIZ	ONTAL AT 3 M				
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)			
1	1652.8	53.4	-13.0	-49.8	7.6	-42.2			
2	2479.2	44.4	-13.0	-59.7	8.4	-51.3			
3	3305.6	43.8	-13.0	-61.9	9.9	-52.0			
	ANT	ENNA POLARI	TY & TEST DIS	STANCE: VERT	TCAL AT 3 M				
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)			
1	1652.8	52.1	-13.0	-51.1	7.6	-43.5			
2	2479.2	41.7	-13.0	-62.4	8.4	-54.0			
3	3305.6	42.4	-13.0	-63.3	9.9	-53.4			
MOD	E	TX channel 418	32						
	ANTE	NNA POLARIT	Y & TEST DIST	ANCE: HORIZ	ONTAL AT 3 M				
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)			
1	1672.8	51.3	-13.0	-51.9	7.7	-44.2			
2	2509.2	40.8	-13.0	-63.2	8.4	-54.8			
3	3345.6	42.0	-13.0	-63.7	9.9	-53.8			
	ANT	ENNA POLARI	TY & TEST DIS	STANCE: VERT	TCAL AT 3 M				
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)			
1	1672.8	49.9	-13.0	-53.3	7.7	-45.6			
2	2509.2	40.1	-13.0	-63.9	8.4	-55.5			
3	3345.6	41.8	-13.0	-63.9	9.9	-54.0			



X-AXIS

MOD	E	TX channel 4233						
	ANTE	NNA POLARIT	Y & TEST DIST	ANCE: HORIZO	ONTAL AT 3 M			
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dRm)					
1	1693.2	48.6	-13.0	-55.0	7.9	-47.1		
2	2539.8	40.8	-13.0	-63.5	8.5	-55.0		
3	3386.4	42.9	-13.0	-62.5	9.9	-52.6		
	ANT	ENNA POLARI	TY & TEST DIS	STANCE: VERT	TCAL AT 3 M			
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)		
1	1693.2	48.2	-13.0	-55.4	7.9	-47.5		
2	2539.8	39.3	-13.0	-65.0	8.5	-56.5		
3	3386.4	42.0	-13.0	-63.4	9.9	-53.5		



Y-AXIS

MOD	E	TX channel 4132						
	ANTE	NNA POLARIT	Y & TEST DIST	ANCE: HORIZO	ONTAL AT 3 M			
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)		
1	1652.8	48.9	-13.0	-54.3	7.6	-46.7		
2	2479.2	45.6	-13.0	-58.5	8.4	-50.1		
3	3305.6	42.0	-13.0	-63.7	9.9	-53.8		
	ANT	ENNA POLARI	TY & TEST DIS	STANCE: VERT	TCAL AT 3 M			
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)		
1	1652.8	51.6	-13.0	-51.6	7.6	-44.0		
2	2479.2	44.3	-13.0	-59.8	8.4	-51.4		
3	3305.6	41.5	-13.0	-64.2	9.9	-54.3		
MOD	E	TX channel 418	32					
	ANTE	NNA POLARIT	Y & TEST DIST	ANCE: HORIZ	ONTAL AT 3 M			
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)		
1	1672.8	47.6	-13.0	-55.6	7.7	-47.9		
2	2509.2	43.0	-13.0	-61.0	8.4	-52.6		
3	3345.6	42.9	-13.0	-62.8	9.9	-52.9		
	ANT	ENNA POLARI	TY & TEST DIS	STANCE: VERT	TCAL AT 3 M			
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)		
1	1672.8	49.6	-13.0	-53.6	7.7	-45.9		
2	2509.2	39.3	-13.0	-64.7	8.4	-56.3		
3	3345.6	42.5	-13.0	-63.2	9.9	-53.3		



Y-AXIS

MOD	MODE TX channel 4233							
	ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M							
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)					
1	1693.2	46.4	-13.0	-57.2	7.9	-49.3		
2	2539.8	41.1	-13.0	-63.2	8.5	-54.7		
3	3386.4	41.8	-13.0	-63.6	9.9	-53.7		
	ANT	ENNA POLARI	TY & TEST DIS	STANCE: VERT	TCAL AT 3 M			
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)		
1	1693.2	44.8	-13.0	-58.8	7.9	-50.9		
2	2539.8	40.8	-13.0	-63.5	8.5	-55.0		
3	3386.4	41.3	-13.0	-64.1	9.9	-54.2		



Z-AXIS

MOD	E	TX channel 4132					
	ANTE	NNA POLARIT	Y & TEST DIST	ANCE: HORIZO	ONTAL AT 3 M		
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)	
1	1652.8	47.1	-13.0	-56.1	7.6	-48.5	
2	2479.2	42.3	-13.0	-61.8	8.4	-53.4	
3	3305.6	41.5	-13.0	-64.2	9.9	-54.3	
	ANT	ENNA POLARI	TY & TEST DIS	STANCE: VERT	TCAL AT 3 M		
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)	
1	1652.8	55.0	-13.0	-48.2	7.6	-40.6	
2	2479.2	43.6	-13.0	-60.5	8.4	-52.1	
3	3305.6	41.9 -13.0		-63.8	9.9	-53.9	
MOD	E	TX channel 418	32				
	ANTE	NNA POLARIT	Y & TEST DIST	ANCE: HORIZ	ONTAL AT 3 M		
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)	
1	1672.8	43.6	-13.0	-59.6	7.7	-51.9	
2	2509.2	41.5	-13.0	-62.5	8.4	-54.1	
3	3345.6	40.8	-13.0	-64.9	9.9	-55.0	
	ANT	ENNA POLARI	TY & TEST DIS	STANCE: VERT	TCAL AT 3 M		
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)	
1	1672.8	54.1	-13.0	-49.1	7.7	-41.4	
2	2509.2	41.8	-13.0	-62.2	8.4	-53.8	
3	3345.6	41.5	-13.0	-64.2	9.9	-54.3	



Z-AXIS

MOD	MODE TX channel 4233									
	ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M									
No.	Freq. (MHz)	Emission Level (dBuV) S.G Power Correction Power V. Value (dBm) Factor (dB) (dBm)								
1	1693.2	43.7	-13.0	-59.9	7.9	-52.0				
2	2539.8	39.6	-13.0	-64.7	8.5	-56.2				
3	3386.4	41.0	-13.0	-64.4	9.9	-54.5				
	ANT	ENNA POLARI	TY & TEST DIS	STANCE: VERT	TCAL AT 3 M					
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)				
1	1693.2	50.2	-13.0	-53.4	7.9	-45.5				
2	2539.8	41.2	-13.0	-63.1	8.5	-54.6				
3	3386.4	41.4	-13.0	-64.0	9.9	-54.1				



FOR HSDPA

X-AXIS

MOD	MODE TX channel 4182										
	ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)								
1	1672.8	50.2	-13.0	-53.0	7.7	-45.3					
2	2509.2	39.1	-13.0	-64.9	8.4	-56.5					
3	3345.6	40.8	-13.0	-64.9	9.9	-55.0					
	ANT	ENNA POLARI	TY & TEST DIS	STANCE: VERT	TICAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)					
1	1672.8	47.6	-13.0	-55.6	7.7	-47.9					
2	2509.2	38.8	-13.0	-65.2	8.4	-56.8					
3	3345.6	40.1	-13.0	-65.6	9.9	-55.7					

Y-AXIS

MODE TX channel 4182										
	ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M									
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)				
1	1672.8	46.2	-13.0	-57.0	7.7	-49.3				
2	2509.2	41.3	-13.0	-62.7	8.4	-54.3				
3	3345.6	41.2	-13.0	-64.5	9.9	-54.6				
	ANT	ENNA POLARI	TY & TEST DIS	STANCE: VERT	TCAL AT 3 M					
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)				
1	1672.8	48.1	-13.0	-55.1	7.7	-47.4				
2	2509.2	37.5	-13.0	-66.5	8.4	-58.1				
3	3345.6	41.2	-13.0	-64.5	9.9	-54.6				



Z-AXIS

MOD	MODE TX channel 4182									
	ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M									
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)							
1	1672.8	52.4	-13.0	-50.8	7.7	-43.1				
2	2509.2	40.1	-13.0	-63.9	8.4	-55.5				
3	3345.6	40.2	-13.0	-65.5	9.9	-55.6				
	ANT	ENNA POLARI	TY & TEST DIS	STANCE: VERT	TCAL AT 3 M					
No.	Freq. (MHz)	Emission Level (dBuV)	Limit (dBm)	S.G Power Value (dBm)	Correction Factor (dB)	Power Value (dBm)				
1	1672.8	41.7	-13.0	-61.5	7.7	-53.8				
2	2509.2	40.2	-13.0	-63.8	8.4	-55.4				
3	3345.6	39.3	-13.0	-66.4	9.9	-56.5				



4.4 CONDUCTED EMISSION MEASUREMENT

4.4.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBµV)		
	Quasi-peak	Average	
0.15-0.5	66 to 56	56 to 46	
0.5-5	56	46	
5-30	60	50	

NOTE: 1. The lower limit shall apply at the transition frequencies.

- 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
- 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.4.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION	
Test Receiver ROHDE & SCHWARZ	ESCS30	100289	Nov. 23, 2010	Nov. 22, 2011	
RF signal cable Woken	5D-FB	Cable-HYCO2-01	Dec. 30, 2010	Dec. 29, 2011	
LISN ROHDE & SCHWARZ	ESH2-Z5	100100	Jan. 06, 2011	Jan. 05, 2012	
LISN ROHDE & SCHWARZ	ESH3-Z5	100311	Jul. 08, 2010	Jul. 07, 2011	
V-LISN SCHWARZBECK	NNBL 8226-2	8226-142	Jul. 12, 2010	Jul. 11, 2011	
LISN ROHDE & SCHWARZ	ENV216	100072	Jun. 11, 2010	Jun. 10, 2011	
Software ADT_Cond_ ADT V7.3.7		NA	NA	NA	

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

- 2. The test was performed in HwaYa Shielded Room 2.
- 3. The VCCI Site Registration No. is C-2047.



4.4.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit 20dB) was not recorded.


NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation.



4.4.5 TEST SETUP

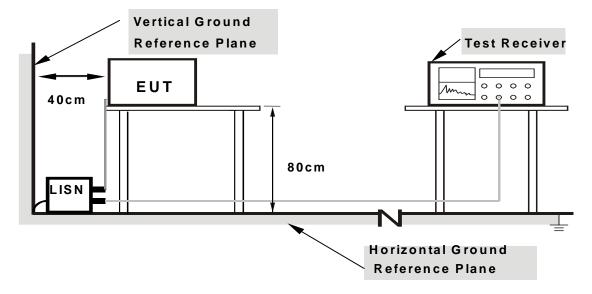

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.4.6 EUT OPERATING CONDITIONS

Set the EUT under transmitting condition.



4.4.7 TEST RESULTS


CONDUCTED WORST CASE DATA:

PHASE	Line 1	6dB BANDWIDTH	9kHz
FHASE	LIIIE I	OUB BANDWIDTH	SKI IZ

No	Freq. Corr.		Freq. Corr. Reading Value			Emission Level		Limit		Margin	
No		Factor	[dB ([dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	
1	0.162	0.15	48.75	-	48.90	ı	65.38	55.38	-16.48	-	
2	0.252	0.16	31.02	-	31.18	ı	61.71	51.71	-30.53	-	
3	0.326	0.16	36.88	-	37.04	ı	59.56	49.56	-22.52	-	
4	0.486	0.17	31.97	-	32.14	ı	56.24	46.24	-24.09	-	
5	0.802	0.18	27.96	-	28.14	-	56.00	46.00	-27.86	-	
6	3.445	0.29	19.35	-	19.64	-	56.00	46.00	-36.36	-	

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.

- 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
- 3. The emission levels of other frequencies were very low against the limit.
- 4. Margin value = Emission level Limit value
- 5. Correction factor = Insertion loss + Cable loss
- 6. Emission Level = Correction Factor + Reading Value.

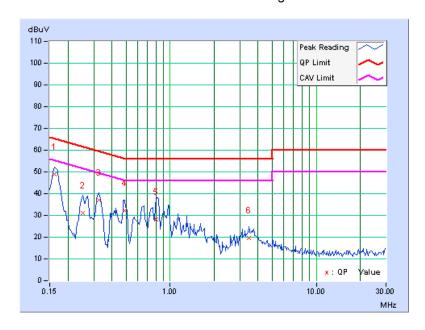




PHASE	Line 2	6dB BANDWIDTH	9kHz
ITIAGE	LITIC Z	OGD DANDWIDTH	JKI IZ

No	Freq. Corr.		Freq. Corr. Reading Value		Emission Level		Limit		Margin	
NO		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.170	0.16	49.89	-	50.05	-	64.98	54.98	-14.93	-
2	0.338	0.18	38.48	-	38.66	-	59.26	49.26	-20.60	-
3	0.505	0.19	35.94	-	36.13	-	56.00	46.00	-19.87	-
4	0.849	0.20	33.52	-	33.72	-	56.00	46.00	-22.28	-
5	1.195	0.21	26.53	-	26.74	-	56.00	46.00	-29.26	-
6	14.059	0.69	20.90	-	21.59	-	60.00	50.00	-38.41	_

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.

- 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
- 3. The emission levels of other frequencies were very low against the limit.
- 4. Margin value = Emission level Limit value
- 5. Correction factor = Insertion loss + Cable loss
- 6. Emission Level = Correction Factor + Reading Value.

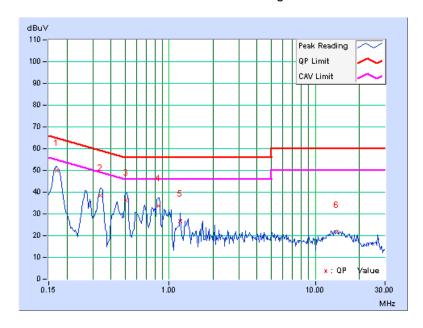



PHOTOGRAPHS OF THE TEST CONFIGURATION Please refer to the attached file (Test Setup Photo).



6 INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5.phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab: Hsin Chu EMC/RF Lab:

Tel: 886-2-26052180 Tel: 886-3-5935343 Fax: 886-2-26051924 Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232 Fax: 886-3-3185050

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



7 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END----