

SAR TEST REPORT

REPORT NO.: SA110302C10 R1

MODEL NO.: F-11C

FCC ID: VQK-F11C

RECEIVED: Mar. 02, 2011

TESTED: Mar. 10 ~ Mar. 11, 2011

ISSUED: Apr. 01, 2011

APPLICANT: FUJITSU LIMITED

ADDRESS: 1-1, Kamikodanaka 4-chome, Nakahara-ku,

Kawasaki 211-8588, Japan

ISSUED BY: Bureau Veritas Consumer Products Services (H.K.)

Ltd., Taoyuan Branch

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou Hsiang,

Taipei Hsien 244, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei

Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This test report consists of 27 pages in total except Appendix. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.





Report No.: SA110302C10 R1 1 Report Format Version 4.0.0 Cancels and replaces the report No.: SA110302C10 dated Mar. 28, 2011



TABLE OF CONTENTS

RELEA	ASE CONTROL RECORD	3
1.	CERTIFICATION	4
2.	GENERAL INFORMATION	5
2.1	GENERAL DESCRIPTION OF EUT	5
2.2	GENERAL DESCRIPTION OF APPLIED STANDARDS	6
2.3	GENERAL INOFRMATION OF THE SAR SYSTEM	7
2.4	TEST EQUIPMENT	10
2.5	GENERAL DESCRIPTION OF THE SPATIAL PEAK SAR EVALUATION	11
2.6	DESCRIPTION OF SUPPORT UNITS	14
3.	DESCRIPTION OF ANTENNA LOCATION	15
4.	RECIPES FOR TISSUE SIMULATING LIQUIDS	16
5.	SYSTEM VALIDATION	20
5.1	TEST PROCEDURE	20
5.2	VALIDATION RESULTS	21
5.3	SYSTEM VALIDATION UNCERTAINTIES	22
6.	TEST RESULTS	23
6.1	TEST PROCEDURES	23
6.2	DESCRIPTION OF TEST CONDITION	24
6.3	MEASURED SAR RESULT	25
6.4	SAR LIMITS	26
7.	INFORMATION ON THE TESTING LABORATORIES	27
APPE	NDIX A: TEST CONFIGURATIONS AND TEST DATA	
APPE	NDIX B: ADT SAR MEASUREMENT SYSTEM	
APPE	NDIX C: PHOTOGRAPHS OF SYSTEM VALIDATION	
APPFI	NDIX D. SYSTEM CERTIFICATE & CALIBRATION	



RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
Original release	NA	Mar. 28, 2011
SA110302C10 R1	Correct conducted output power on page 5.	Apr. 01, 2011

Report No.: SA110302C10 R1 3 Cancels and replaces the report No.: SA110302C10 dated Mar. 28, 2011



1. CERTIFICATION

PRODUCT: Mobile phone

MODEL NO.: F-11C

BRAND: FOMA

APPLICANT: FUJITSU LIMITED

TESTED: Mar. 10 ~ Mar. 11, 2011

TEST SAMPLE: ENGINEERING SAMPLE

STANDARDS: FCC Part 2 (Section 2.1093)

FCC OET Bulletin 65, Supplement C (01-01)

RSS-102 Issue 4 (2010-03)

The above equipment (model: F-11C) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : , DATE : Apr. 01, 2011

Joanna Wang / Senior Specialist

APPROVED BY : , DATE : Apr. 01, 2011

Gary Chang / Assistant Manager

Report No.: SA110302C10 R1 4
Cancels and replaces the report No.: SA110302C10 dated Mar. 28, 2011



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

EUT	Mobile p	Mobile phone			
MODEL NO.	F-11C				
FCC ID	VQK-F1	VQK-F11C			
POWER SUPPLY	3.7Vdc (Li-ion battery)			
FOWER SOFFET	5.4Vdc (Adapter)			
MODULATION TYPE	WCDMA 850: WCDMA (Band 5) / HSDPA PCS 1900: GMSK				
FREQUENCY RANGE	826.4MF	lz ∼ 846.6MHz	z, 1850.2MHz ~ 1909	.8MHz	
	WCDMA 850 band				
	CHAN.	FREQ.	RMC	HSDPA	
	4132	826.4MHz	23.42dBm	22.65dBm	
CHANNEL FREQUENCIES	4182	836.4MHz	23.14dBm	22.23dBm	
UNDER TEST AND ITS	4233	846.6MHz	22.98dBm	22.12dBm	
CONDUCTED OUTPUT			PCS 1900 band		
POWER	CHAN.	FREQ.	GSM	GPRS T1	
	512	1850.2MHz	29.38dBm	29.41dBm	
	661	1880.0MHz	29.41dBm	29.38dBm	
	810	1909.8MHz	29.40dBm	29.42dBm	
MAXIMUM SAR (1g)	HEAD: WCDMA 850 band: 1.080W/kg PCS1900 band: 1.450W/kg				
INIAAINIONI SAR (19)	BODY:	WCDMA 850 band: 0.455W/kg			
	BOD 1.	PCS1900 bar	PCS1900 band: 0.361W/kg		
		850 band:			
	Integral antenna/ Monopole antenna with 0dBi gain (EUT open)				
ANTENNA GAIN	Integral antenna/ Monopole antenna with -4dBi gain (EUT close)				
	PCS 1900 band: Integral antenna/ Monopole antenna with 2dBi gain (EUT open)				
	_		•	• • • •	
DATA CABLE	Integral antenna/ Monopole antenna with -1dBi gain (EUT close) NA				
I/O PORTS	Refer to user's manual				
ACCESSORY DEVICES					
CCESSORY DEVICES Battery					

NOTE:

1. The EUT uses the following Li-ion battery:

	to removing an ion bouncery.
BRAND	Fujitsu Limited
MODEL	F19
RATING	3.7Vdc, 830mAh

Report Format Version 4.0.0



2. The following accessories are for support units only.

PRODUCT BRAND		DESCRIPTION		
Adapter	SIMK	I/P: 100-240Vac, 50-60Hz, 0.12A O/P: 5.4Vdc, 700mA		
USB cable	NA	0.8m non-shielded cable without core		

3. Hardware version: V2.0.04. Software version: R08.1

5. IMEI Code: 355175040001605

6. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

2.2 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to the specifications of the manufacturer, this product must comply with the requirements of the following standards:

FCC Part 2 (2.1093)

FCC OET Bulletin 65, Supplement C (01-01)

RSS-102 Issue 4 (2010-03)

IEEE 1528-2003

All test items have been performed and recorded as per the above standards.



2.3 GENERAL INOFRMATION OF THE SAR SYSTEM

DASY4 (Software 4.7 Build 80) consists of high precision robot, probe alignment sensor, phantom, robot controller, controlled measurement server and near-field probe. The robot includes six axes that can move to the precision position of the DASY4 software defined. The DASY4 software can define the area that is detected by the probe. The robot is connected to controlled box. Controlled measurement server is connected to the controlled robot box. The DAE includes amplifier, signal multiplexing, AD converter, offset measurement and surface detection. It is connected to the Electro-optical coupler (ECO). The ECO performs the conversion form the optical into digital electric signal of the DAE and transfers data to the PC.

EX3DV4 ISOTROPIC E-FIELD PROBE

CONSTRUCTION Symmetrical design with triangular core

Built-in shielding against static charges

PEEK enclosure material (resistant to organic solvents, e.g., DGBE)

FREQUENCY 10 MHz to > 6 GHz

Linearity: ± 0.2 dB (30 MHz to 6 GHz)

DIRECTIVITY ± 0.3 dB in HSL (rotation around probe axis)

± 0.5 dB in tissue material (rotation normal to probe axis)

DYNAMIC RANGE 10 μ W/g to > 100 mW/g

Linearity: \pm 0.2 dB (noise: typically < 1 μ W/g)

DIMENSIONSOverall length: 330 mm (Tip: 20 mm)
Tip diameter: 2.5 mm (Body: 12 mm)

Typical distance from probe tip to dipole centers: 1 mm

APPLICATION High precision dosimetric measurements in any exposure scenario

(e.g., very strong gradient fields). Only probe which enables

compliance testing for frequencies up to 6 GHz with precision of better

30%.

NOTE

- 1. The Probe parameters have been calibrated by the SPEAG. Please reference "APPENDIX D" for the Calibration Certification Report.
- 2. For frequencies above 800MHz, calibration in a rectangular wave-guide is used, because wave-guide size is manageable.
- 3. For frequencies below 800MHz, temperature transfer calibration is used because the wave-guide size becomes relatively large.

Report No.: SA110302C10 R1 7 Report Format Version 4.0.0



TWIN SAM V4.0

CONSTRUCTION The shell corresponds to the specifications of the Specific

Anthropomorphic Mannequin (SAM) phantom defined in IEEE

1528-2003, EN 62209-1 and IEC 62209. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually

teaching three points with the robot.

SHELL THICKNESS 2 ± 0.2mm

FILLING VOLUME Approx. 25liters

Height: 810mm; Length: 1000mm; Width: 500mm **DIMENSIONS**

SYSTEM VALIDATION KITS:

CONSTRUCTION Symmetrical dipole with I/4 balun enables measurement of

feedpoint impedance with NWA matched for use near flat

phantoms filled with brain simulating solutions. Includes distance holder and tripod adaptor

Calibrated SAR value for specified position and input power at **CALIBRATION**

the flat phantom in brain simulating solutions

FREQUENCY 835, 1900MHz

RETURN LOSS > 20dB at specified validation position

POWER CAPABILITY > 100W (f < 1GHz); > 40W (f > 1GHz)

OPTIONS Dipoles for other frequencies or solutions and other calibration

conditions upon request

Report No.: SA110302C10 R1 Report Format Version 4.0.0



DEVICE HOLDER FOR SAM TWIN PHANTOM

CONSTRUCTION

The device holder for the mobile phone device is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles. The holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity ε =3 and loss tangent δ =0.02. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered. The device holder for the portable device makes up of the polyethylene foam. The dielectric parameters of material close to the dielectric parameters of the air.

DATA ACQUISITION ELECTRONICS

CONSTRUCTION

The data acquisition electronics (DAE3) consists of a highly sensitive electrometer grade preamplifier with auto-zeroing, a channel and gain-switching multiplex, a fast 16 bit AD converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock. The mechanical probe is mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection. The input impedance of the DAE3 box is 200MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.

Report No.: SA110302C10 R1 Report Format Version 4.0.0 Cancels and replaces the report No.: SA110302C10 dated Mar. 28, 2011



2.4 TEST EQUIPMENT

FOR SAR MEASURENENT

ITEM	NAME	BRAND	TYPE	SERIES NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
1	SAM Phantom	S&P	QD000 P40 CA	TP-1202	NA	NA
2	Signal Generator	Anritsu	68247B	984703	May 31, 2010	May 30, 2011
3	E-Field Probe	S & P	EX3DV4	3590	Feb. 25, 2011	Feb. 24, 2012
4	DAE	S&P	DAE3	579	Sep. 20, 2010	Sep. 19, 2011
5	Robot Positioner	Staubli Unimation	NA	NA	NA	NA
6	Validation Dipole	S&P	D835V2	4d021	Apr. 29, 2010	Apr. 28, 2011
7	Validation Dipole	S&P	D1900V2	5d022	Jan. 26, 2011	Jan. 25, 2012

NOTE: Before starting, all test equipment shall be warmed up for 30min.

FOR TISSUE PROPERTY

ITEM	NAME	BRAND	TYPE	SERIES NO.		DUE DATE OF CALIBRATION
1	Network Analyzer	Agilent	E5071C	MY46104190	Apr. 06, 2010	Apr. 05, 2011
2	Dielectric Probe	Agilent	85070D	US01440176	NA	NA

NOTE:

- 1. Before starting, all test equipment shall be warmed up for 30min.
- 2. The tolerance (k=1) specified by Agilent for general dielectric measurements, deriving from inaccuracies in the calibration data, analyzer drift, and random errors, are usually ±2.5% and ±5% for measured permittivity and conductivity, respectively. However, the tolerances for the conductivity is smaller for material with large loss tangents, i.e., less than ±2.5% (k=1). It can be substantially smaller if more accurate methods are applied

Report No.: SA110302C10 R1 10 Report Format Version 4.0.0



2.5 GENERAL DESCRIPTION OF THE SPATIAL PEAK SAR EVALUATION

The DASY4 post-processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the micro-volt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters: - Sensitivity Norm_i, a_{i0}, a_{i1}, a_{i2}

- Conversion factor ConvF_i

- Diode compression point dcp_i

Device parameters: - Frequency F

- Crest factor Cf

Media parameters: - Conductivity σ

- Density ρ

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \bullet \frac{cf}{dcp_i}$$

 V_i = compensated signal of channel i (i = x, y, z) U_i = input signal of channel I (i = x, y, z)

Cf =crest factor of exciting field (DASY parameter) dcp_i =diode compression point (DASY parameter)

Report No.: SA110302C10 R1 11 Report Format Version 4.0.0



From the compensated input signals the primary field data for each channel can be evaluated:

E-fieldprobes:
$$E_i = \sqrt{\frac{V_1}{Norm_i \cdot ConvF}}$$

H-fieldprobes:
$$H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

 V_i = compensated signal of channel I (i = x, y, z)

Norm_i = sensor sensitivity of channel i $\mu V/(V/m)2$ for (i = x, y, z)

E-field Probes

ConvF = sensitivity enhancement in solution

a_{ii} = sensor sensitivity factors for H-field probes

F = carrier frequency [GHz]

E_i = electric field strength of channel i in V/m H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1'000}$$

SAR = local specific absorption rate in mW/g

 E_{tot} = total field strength in V/m

 σ = conductivity in [mho/m] or [Siemens/m]

ρ = equivalent tissue density in g/cm3



Note that the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid. The entire evaluation of the spatial peak values is performed within the Post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- 1. The extraction of the measured data (grid and values) from the Zoom Scan
- 2. The calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- 3. The generation of a high-resolution mesh within the measured volume
- 4. The interpolation of all measured values from the measurement grid to the high-resolution grid
- 5. The extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- 6. The calculation of the averaged SAR within masses of 1g and 10g.

The probe is calibrated at the center of the dipole sensors that is located 1 to 2.7mm away from the probe tip. During measurements, the probe stops shortly above the phantom surface, depending on the probe and the surface detecting system. Both distances are included as parameters in the probe configuration file. The software always knows exactly how far away the measured point is from the surface. As the probe cannot directly measure at the surface, the values between the deepest measured point and the surface must be extrapolated. The angle between the probe axis and the surface normal line is less than 30 degree.

Report No.: SA110302C10 R1 Report Format Version 4.0.0



The maximum search is automatically performed after each area scan measurement. It is based on splines in two or three dimensions. The procedure can find the maximum for most SAR distributions even with relatively large grid spacing. After the area scanning measurement, the probe is automatically moved to a position at the interpolated maximum. The following scan can directly use this position for reference, e.g., for a finer resolution grid or the cube evaluations. The 1g and 10g peak evaluations are only available for the predefined cube 7 x 7 x 7 scans. The routines are verified and optimized for the grid dimensions used in these cube measurements. The measured volume of 30 x 30 x 30mm contains about 30g of tissue. The first procedure is an extrapolation (incl. boundary correction) to get the points between the lowest measured plane and the surface. The next step uses 3D interpolation to get all points within the measured volume in a 1mm grid (42875 points). In the last step, a 1g cube is placed numerically into the volume and its averaged SAR is calculated. This cube is the moved around until the highest averaged SAR is found. If the highest SAR is found at the edge of the measured volume, the system will issue a warning: higher SAR values might be found outside of the measured volume. In that case the cube measurement can be repeated, using the new interpolated maximum as the center.

2.6 DESCRIPTION OF SUPPORT UNITS

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.
1	Universal Radio Communication Tester	R&S	CMU200	101372


NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA

NOTE: All power cords of the above support units are non shielded (1.8m).

Report No.: SA110302C10 R1 Report Format Version 4.0.0



3. DESCRIPTION OF ANTENNA LOCATION

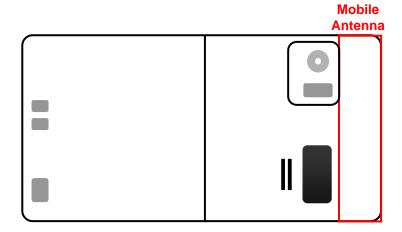

EUT Bottom Side

Report Format Version 4.0.0



4. RECIPES FOR TISSUE SIMULATING LIQUIDS

For the measurement of the field distribution inside the SAM phantom, the phantom must be filled with 25 litters of tissue simulation liquid.

The following are some common ingredients:

• WATER- Deionized water (pure H20), resistivity _16 M - as basis for the liquid

• **SUGAR-** Refined sugar in crystals, as available in food shops - to reduce relative

permittivity

• **SALT-** Pure NaCl - to increase conductivity

• **CELLULOSE-** Hydroxyethyl-cellulose, medium viscosity (75-125mPa.s, 2% in water,

20_C),

CAS # 54290 - to increase viscosity and to keep sugar in solution

• PRESERVATIVE- Preventol D-7 Bayer AG, D-51368 Leverkusen, CAS # 55965-84-9 - to

prevent the spread of bacteria and molds

• **DGMBE-** Diethylenglycol-monobuthyl ether (DGMBE), Fluka Chemie GmbH,

CAS # 112-34-5 - to reduce relative permittivity

THE RECIPES FOR 835MHz SIMULATING LIQUID TABLE

INGREDIENT	HEAD SIMULATING LIQUID 835MHz (HSL-835)	MUSCLE SIMULATING LIQUID 835MHz (MSL-835)
Water	40.28%	50.07%
Cellulose	02.41%	NA
Salt	01.38%	0.94%
Preventtol D-7	00.18%	0.09%
Sugar	57.97%	48.2%
Diala stria Danamastana	f = 835MHz	f= 835MHz
Dielectric Parameters at 22°C	ε= 41.5 ± 5%	ε= 55.0 ± 5%
5.1. 3.2 0	σ= 0.97 ± 5% S/m	σ = 1.05 ± 5% S/m

Report No.: SA110302C10 R1 16 Report Format Version 4.0.0



THE RECIPES FOR 1900MHz SIMULATING LIQUID TABLE

INGREDIENT	HEAD SIMULATING LIQUID 1900MHz (HSL-1900)	MUSCLE SIMULATING LIQUID 1900MHz (MSL-1900)
Water	55.24%	70.16%
DGMBE	44.45%	29.44%
Salt	0.306%	00.39%
Dielectric Parameters at 22°ℂ	f= 1900MHz ε= 40.0 ± 5% σ= 1.40 ± 5% S/m	f= 1900MHz ε= $53.3 \pm 5\%$ σ= $1.52 \pm 5\%$ S/m

Testing the liquids using the Agilent Network Analyzer E5071C and Agilent Dielectric Probe Kit 85070D. The testing procedure is following as

- 1. Turn Network Analyzer on and allow at least 30min. warm up.
- 2. Mount dielectric probe kit so that interconnecting cable to Network Analyzer will not be moved during measurements or calibration.
- 3. Pour de-ionized water and measure water temperature (±1°).
- 4. Set water temperature in Agilent-Software (Calibration Setup).
- 5. Perform calibration.
- 6. Validate calibration with dielectric material of known properties (e.g. polished ceramic slab with >8mm thickness ϵ '=10.0, ϵ "=0.0). If measured parameters do not fit within tolerance, repeat calibration (±0.2 for ϵ ': ±0.1 for ϵ ").
- 7. Conductivity can be calculated from ε'' by $\sigma = \omega \varepsilon_0 \varepsilon'' = \varepsilon'' f [GHz] / 18.$
- 8. Measure liquid shortly after calibration. Repeat calibration every hour.
- 9. Stir the liquid to be measured. Take a sample (~ 50ml) with a syringe from the center of the liquid container.
- 10. Pour the liquid into a small glass flask. Hold the syringe at the bottom of the flask to avoid air bubbles.
- 11. Put the dielectric probe in the glass flask. Check that there are no air bubbles in front of the opening in the dielectric probe kit.
- 12. Perform measurements.
- 13. Adjust medium parameters in DASY4 for the frequencies necessary for the measurements ('Setup Config', select medium (e.g. Brain 900MHz) and press 'Option'-button.
- 14. Select the current medium for the frequency of the validation (e.g. Setup Medium Brain 900MHz).

Report No.: SA110302C10 R1 17 Report Format Version 4.0.0 Cancels and replaces the report No.: SA110302C10 dated Mar. 28, 2011



FOR SIMULATING LIQUID

LIQUID T	YPE	HSL-835			
SIMULAT	ING LIQUID TEMP.		21.2		
TEST DAT	ΓE		Mar. 10,	2011	
TESTED E	ЗҮ		Morrison H	luang	
FREQ. (MHz)	LIQUID PARAMETER	STANDARD VALUE	MEASUREMENT VALUE	ERROR PERCENTAGE (%)	LIMIT(%)
826.4		41.54	42.77	2.96	
835.0	Permitivity	41.50	42.68	2.84	
836.4	(ε)	41.50	42.57	2.58	
846.6		41.50	42.45	2.29	±5
826.4		0.90	0.92	2.22	10
835.0	Conductivity	0.90	0.93	3.33	
836.4	(σ) S/m	0.90	0.94	4.44	
846.6		0.91	0.95	4.40	

LIQUID T	YPE	MSL-835				
SIMULATI	ING LIQUID TEMP.		21.5			
TEST DAT	ΓE		Mar. 10,	2011		
TESTED E	зү		Morrison H	luang		
FREQ. (MHz)	LIQUID PARAMETER	STANDARD MEASUREMENT VALUE		ERROR PERCENTAGE LIMIT((%)		
835.0	Permitivity	55.20	57.09	3.42		
836.4	(ε)	55.20	57.04	3.33	±5	
835.0	Conductivity	0.97	0.99	2.06	10	
836.4	(σ) S/m	0.97	0.99	2.06		

Report No.: SA110302C10 R1 18 Cancels and replaces the report No.: SA110302C10 dated Mar. 28, 2011 Report Format Version 4.0.0



LIQUID T	YPE	HSL-1900					
SIMULATI	ING LIQUID TEMP.		21.5				
TEST DATE			Mar. 11, 2	2011			
TESTED E	ЗҮ		Morrison H	Huang			
FREQ. (MHz)	LIQUID PARAMETER	STANDARD VALUE					
1850.2		40.00	41.68	4.20			
1880.0	Permitivity	40.00	41.61	4.03			
1900.0	(ε)	40.00	41.56	3.90			
1909.8		40.00	41.52	3.80	±5		
1850.2		1.40	1.38	-1.43	10		
1880.0	Conductivity	1.40	1.41	0.71			
1900.0	(σ) S/m	1.40	1.42	1.43			
1909.8		1.40	1.44	2.86			

LIQUID TY	YPE		MSL-1900					
SIMULATI	ING LIQUID TEMP.		21.3					
TEST DAT	ΓE		Mar. 11,	2011				
TESTED E	зү		Morrison H	Huang				
FREQ. (MHz)	LIQUID PARAMETER	STANDARD VALUE	MEASUREMENT VALUE	ERROR PERCENTAGE (%)	LIMIT(%)			
1880.0	Permitivity	53.30	55.17	3.51				
1900.0	(ε)	53.30	55.04	3.26	±5			
1880.0	Conductivity	1.52	1.52	0.00	±5			
1900.0	(σ) S/m	1.52	1.55	1.97				

Report No.: SA110302C10 R1 19 Report Format Version 4.0.0 Cancels and replaces the report No.: SA110302C10 dated Mar. 28, 2011



5. SYSTEM VALIDATION

The system validation was performed in the flat phantom with equipment listed in the following table. Since the SAR value is calculated from the measured electric field, dielectric constant and conductivity of the body tissue and the SAR is proportional to the square of the electric field. So, the SAR value will be also proportional to the RF power input to the system validation dipole under the same test environment. In our system validation test, 250mW RF input power was used.

5.1 TEST PROCEDURE

Before the system performance check, we need only to tell the system which components (probe, medium, and device) are used for the system performance check; the system will take care of all parameters. The dipole must be placed beneath the flat section of the SAM Twin Phantom with the correct distance holder in place. The distance holder should touch the phantom surface with a light pressure at the reference marking (little cross) and be oriented parallel to the long side of the phantom. Accurate positioning is not necessary, since the system will search for the peak SAR location, except that the dipole arms should be parallel to the surface. The device holder for mobile phones can be left in place but should be rotated away from the dipole.

- 1. The "Power Reference Measurement" and "Power Drift Measurement" jobs are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the amplifier output power. If it is too high (above ±0.1 dB), the system performance check should be repeated; some amplifiers have very high drift during warm-up. A stable amplifier gives drift results in the DASY system below ±0.02dB.
- 2. The "Surface Check" job tests the optical surface detection system of the DASY system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above ±0.1mm). In that case it is better to abort the system performance check and stir the liquid.

Report No.: SA110302C10 R1 20 Report Format Version 4.0.0



- 3. The "Area Scan" job measures the SAR above the dipole on a plane parallel to the surface. It is used to locate the approximate location of the peak SAR. The proposed scan uses large grid spacing for faster measurement; due to the symmetric field, the peak detection is reliable. If a finer graphic is desired, the grid spacing can be reduced. Grid spacing and orientation have no influence on the SAR result.
- 4. The "Zoom Scan" job measures the field in a volume around the peak SAR value assessed in the previous "Area Scan" job (for more information see the application note on SAR evaluation).

About the validation dipole positioning uncertainty, the constant and low loss dielectric spacer is used to establish the correct distance between the top surface of the dipole and the bottom surface of the phantom, the error component introduced by the uncertainty of the distance between the liquid (i.e., phantom shell) and the validation dipole in the DASY4 system is less than ±0.1mm.

$$SAR_{tolerance}[\%] = 100 \times (\frac{(a+d)^2}{a^2} - 1)$$

As the closest distance is 10mm, the resulting tolerance SAR_{tolerance}[%] is <2%.

5.2 VALIDATION RESULTS

	SYSTEM VALIDATION TEST OF SIMULATING LIQUID						
FREQUENCY (MHz)	REQUIRED SAR (W/kg)	MEASURED SAR (W/kg)	DEVIATION (%)	SEPARATION DISTANCE	TESTED DATE		
HSL 850	2.37 (1g)	2.26	-4.64	15mm	Mar. 10, 2011		
MSL 850	2.52 (1g)	2.38	-5.56	15mm	Mar. 10, 2011		
HSL 1900	10.40 (1g)	10.00	-3.85	10mm	Mar. 11, 2011		
MSL 1900	10.40 (1g)	9.45	-9.13	10mm	Mar. 11, 2011		
TESTED BY	Morrison Huang.						

NOTE: Please see Appendix for the photo of system validation test.



5.3 SYSTEM VALIDATION UNCERTAINTIES

In the table below, the system validation uncertainty with respect to the analytically assessed SAR value of a dipole source as given in the IEEE 1528 standard is given. This uncertainty is smaller than the expected uncertainty for mobile phone measurements due to the simplified setup and the symmetric field distribution.

Error Description	Tolerance (±%)	Probability Distribution	Divisor	(0	C _i)	Unce	idard rtainty %)	(v _i)
				(1g)	(10g)	(1g)	(10g)	
		Measuremen	t System					
Probe Calibration	5.50	Normal	1	1	1	5.50	5.50	∞
Axial Isotropy	0.25	Rectangular	√3	0.7	0.7	0.10	0.10	∞
Hemispherical Isotropy	1.30	Rectangular	√3	0.7	0.7	0.53	0.53	∞
Boundary effects	1.00	Rectangular	√3	1	1	0.58	0.58	∞
Linearity	0.30	Rectangular	√3	1	1	0.17	0.17	∞
System Detection Limits	1.00	Rectangular	√3	1	1	0.58	0.58	∞
Readout Electronics	0.30	Normal	1	1	1	0.30	0.30	∞
Response Time	0.80	Rectangular	√3	1	1	0.46	0.46	∞
Integration Time	2.60	Rectangular	√3	1	1	1.50	1.50	∞
RF Ambient Noise	3.00	Rectangular	√3	1	1	1.73	1.73	9
RF Ambient Reflections	3.00	Rectangular	√3	1	1	1.73	1.73	9
Probe Positioner	0.40	Rectangular	√3	1	1	0.23	0.23	∞
Probe Positioning	2.90	Rectangular	√3	1	1	1.67	1.67	∞
Max. SAR Eval.	1.00	Rectangular	√3	1	1	0.58	0.58	∞
		Test sample	e related					
Sample positioning	1.90	Normal	1	1	1	1.90	1.90	4
Device holder uncertainty	2.80	Normal	1	1	1	2.80	2.80	4
Output power variation-SAR drift measrurement	4.50	Rectangular	√3	1	1	2.60	2.60	1
		Dipole Re	elated					
Dipole Axis to Liquid Distance	1.60	Rectangular	√3	1	1	0.92	0.92	4
Input Power Drift	1.16	Rectangular	√3	1	1	0.67	0.67	1
	1	Phantom and Tiss	ue parame	ters				
Phantom Uncertainty	4.00	Rectangular	√3	1	1	2.31	2.31	∞
Liquid Conductivity (target)	5.00	Rectangular	√3	0.64	0.43	1.85	1.24	∞
Liquid Conductivity (measurement)	4.44	Normal	1	0.64	0.43	2.84	1.91	9
Liquid Permittivity (target)	5.00	Rectangular	√3	0.6	0.49	1.73	1.41	∞
Liquid Permittivity (measurement)	4.20	Normal	1	0.6	0.49	2.52	2.06	9
Combined Standard Uncertainty							8.90	
Coverage Factor for 95%							Kp=2	
Expanded Uncertainty (K=2)						18.83	17.80	

NOTE: About the system validation uncertainty assessment, please reference the section 7.



6. TEST RESULTS

6.1 TEST PROCEDURES

The EUT makes a phone call to the communication simulator station. Establish the simulation communication configuration rather the actual communication. Then the EUT could continuous the transmission mode. Adjust the PCL of the base station could controlled the EUT to transmitted the maximum output power. The base station also could control the transmission channel. The SAR value was calculated via the 3D spline interpolation algorithm that has been implemented in the software of DASY4 SAR measurement system manufactured and calibrated by SPEAG. According to the IEEE 1528 / EN 62209-1, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- Power reference measurement
- Verification of the power reference measurement
- Area scan
- Zoom scan
- Power reference measurement

The area scan was performed for the highest spatial SAR location. The zoom scan was performed for SAR value averaged over 1g and 10g spatial volumes.

In the zoom scan, the distance between the measurement point at the probe sensor location (geometric center behind the probe tip) and the phantom surface is 3mm and maintained at a constant distance of ± 0.5 mm during a zoom scan to determine peak SAR locations. The distance is 2mm between the first measurement point and the bottom surface of the phantom. The secondary measurement point to the bottom surface of the phantom is with 7mm separation distance.



The measurement time is 0.5s at each point of the zoom scan. The probe boundary effect compensation shall be applied during the SAR test. Because of the tip of the probe to the Phantom surface separated distances are longer than half a tip probe diameter.

In the area scan, the separation distance is 2mm between the each measurement point and the phantom surface. The scan size shall be included the transmission portion of the EUT. The measurement time is the same as the zoom scan. At last the reference power drift shall be less than $\pm 5\%$.

6.2 DESCRIPTION OF TEST CONDITION

TEST DATE	TISSUE TYPE /	TEMPERATURE (°C)		HUMIDITY (%RH)	TESTED BY	
TEST DATE	FREQ.	AIMBENT	LIQUID	HOWIDITT (//KH)	IESIEDBI	
Mar. 10, 2011	HSL835	22.3	21.2	61	Morrison Huang	
Mar. 10, 2011	MSL835	22.5	21.5	61	Morrison Huang	
Mar. 11, 2011	HSL1900	22.2	21.5	59	Morrison Huang	
Mar. 11, 2011	MSL1900	22.7	21.3	59	Morrison Huang	



6.3 MEASURED SAR RESULT

SAR (1g) (W/kg)							
	RIGHT	HEAD	LEFT HEAD				
POSITION	CHEEK (BODY)	TILT	CHEEK	TILT			
	W	CDMA 850					
CH 4132: 826.4MHz	1.080	-	0.466	-			
CH 4182: 836.4MHz	1.040	0.175	0.357	0.217			
CH 4233: 846.6MHz	0.847	-	0.69	-			
	PCS 1900						
CH 512: 1850.2MHz	1.120	-	0.300	-			
CH 661: 1880.0MHz	1.430	0.198	0.322	0.276			
CH 810: 1909.8MHz	1.450	-	0.349	-			

SAR (1g) (W/kg)						
Distance between	EUT and phant	om is 15mm				
POSITION BODY / BODY / BOTTOM FRONT						
W	WCDMA 850					
CH 4182: 836.4MHz 0.455 0.296						
GPRS 1900 TS1						
CH 661: 1880.0MHz 0.334 0.205						
PCS 1900						
CH 661: 1880.0MHz 0.361 0.231						

NOTE:

- 1. In this testing, the limit for General Population Spatial Peak averaged over 1g, 1.6 W/kg, is applied.
- 2. Please see the Appendix A for the data.
- 3. The variation of the EUT conducted power measured before and after SAR testing should not over 5%.
- 4. Body SAR for HSDPA mode is not required since the maximum average output of each RF channel with HSDPA active is less than 1/4 dB higher than that measured without HSDPA using 12.2kbps RMC and maximum SAR for 12.2kbps RMC is less than 75% of the SAR limit.
- 5. SAR test of head cheek position is measured at body position instead of head cheek. Since the cube can not be scanned completely at Right head cheek.
- $6. \ Per\ DA-02-1438A1, when\ 1-g\ SAR\ for\ the\ middle\ channel\ is\ less\ than\ 0.8\ W/kg,\ testing\ for\ the\ other\ channels\ is\ not\ required$



6.4 SAR LIMITS

	SAR (W/kg)			
HUMAN EXPOSURE	(GENERAL POPULATION / UNCONTROLLED EXPOSURE ENVIRONMENT)	(OCCUPATIONAL / CONTROLLED EXPOSURE ENVIRONMENT)		
Spatial Peak (averaged over 1 g)	1.6	8.0		

NOTE: This limits accord to 47 CFR 2.1093 – Safety Limit.



7. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5.phtml. If you have any comments, please feel free to contact us at the following:

 Linko EMC/RF Lab:
 Hsin Chu EMC/RF Lab:

 Tel: 886-2-26052180
 Tel: 886-3-5935343

 Fax: 886-2-26051924
 Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232 Fax: 886-3-3185050

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.

---END---

Report No.: SA110302C10 R1 27 Report Format Version 4.0.0

Product Name: Mobile Phone; Model Number: F-11 C

Liquid Level Photo

Tissue 835MHz D=150mm



Tissue 1900MHz D=150mm



Date/Time: 2011/3/10 18:49:35

Right Head-Cheek-WCDM A850-Ch4182

Communication System: WCDMA850; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL835 Medium parameters used: f = 836.4 MHz; $\sigma = 0.94$ mho/m; $\epsilon r = 42.57$; $\rho = 1000$

kg/m³

Phantom section: Right Section; DUT test position: Cheek; Modulation type: BPSK

DASY4 Configuration:

- Probe: EX3DV4 SN3590; ConvF(10.21, 10.21, 10.21); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position - Middle/Area Scan (7x17x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.426 mW/g

Touch position - Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.12 V/m; Power Drift = -0.189 dB

Peak SAR = 0.476 W/kg

SAR(1 g) = 0.354 mW/g; SAR(10 g) = n.a.

Maximum value of SAR (measured) = 0.421 mW/g


Touch position - Middle/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.12 V/m; Power Drift = -0.189 dB

Peak SAR = 0.497 W/kg

SAR(1 g) = 0.301 mW/g; SAR(10 g) = 0.185 mW/g

Maximum value of SAR (measured) = 0.404 mW/g

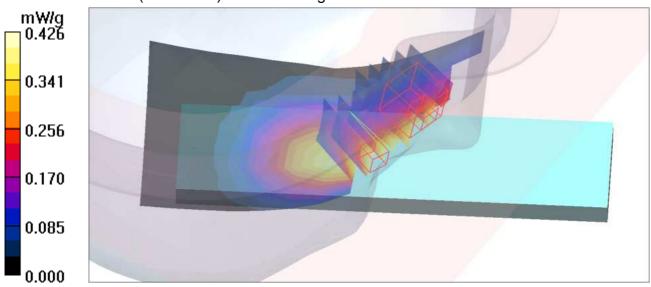

Date/Time: 2011/3/10 21:33:18

M01-Head in Body-WCDM A850-Ch4132

Communication System: WCDMA850; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: HSL835 Medium parameters used : f = 826.4 MHz; σ = 0.92 mho/m; ϵ_r = 42.77; ρ = 1000

kg/m³

Phantom section: Flat Section; DUT test position: Cheek; Modulation type: BPSK

DASY4 Configuration:

- Probe: EX3DV4 SN3590; ConvF(10.21, 10.21, 10.21); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Touch position - Low/Area Scan (17x7x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 1.30 mW/g

Touch position - Low/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.2 V/m; Power Drift = -0.004 dB

Peak SAR = 1.53 W/kg

SAR(1 g) = $\frac{1.08}{1.08}$ mW/g; SAR(10 g) = 0.740 mW/g Maximum value of SAR (measured) = 1.32 mW/g

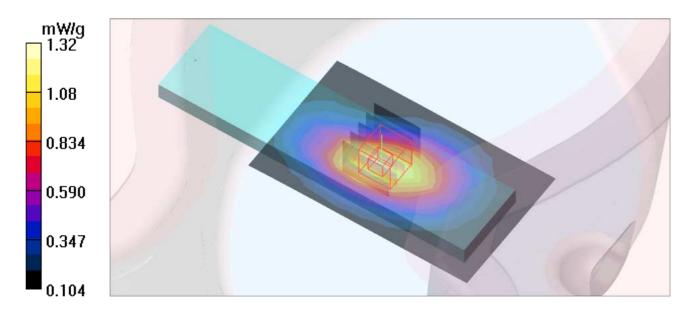

Date/Time: 2011/3/10 21:47:46

M01-Head in Body-WCDM A850-Ch4182

Communication System: WCDMA850; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL835 Medium parameters used: f = 836.4 MHz; $\sigma = 0.94$ mho/m; $\epsilon r = 42.57$; $\rho = 1000$

kg/m³

Phantom section: Flat Section; DUT test position: Cheek; Modulation type: BPSK

DASY4 Configuration:

- Probe: EX3DV4 SN3590; ConvF(10.21, 10.21, 10.21); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position - Middle/Area Scan (17x7x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 1.22 mW/g


Touch position - Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.4 V/m; Power Drift = 0.128 dB

Peak SAR = 1.48 W/kg

SAR(1 g) = $\frac{1.04}{1.04}$ mW/g; SAR(10 g) = 0.711 mW/g

Maximum value of SAR (measured) = 1.27 mW/g

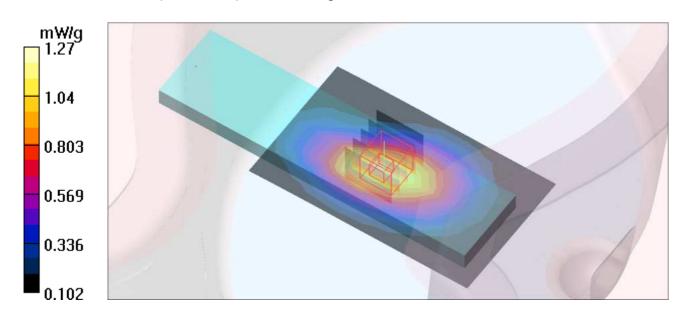

Date/Time: 2011/3/10 22:01:57

M01-Head in Body-WCDM A850-Ch4233

Communication System: WCDMA850; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: HSL835 Medium parameters used: f = 846.6 MHz; $\sigma = 0.95$ mho/m; $\varepsilon_r = 42.45$; $\rho = 1000$

kg/m³

Phantom section: Flat Section: DUT test position: Cheek: Modulation type: BPSK

DASY4 Configuration:

- Probe: EX3DV4 SN3590; ConvF(10.21, 10.21, 10.21); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Touch position - High/Area Scan (17x7x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = $1.03 \,\text{mW/g}$

Touch position - High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.2 V/m; Power Drift = -0.055 dB

Peak SAR = 1.20 W/kg

SAR(1 g) = 0.847 mW/g; SAR(10 g) = 0.582 mW/g

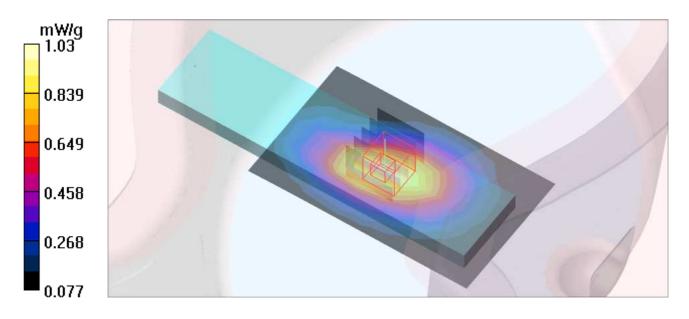

Date/Time: 2011/3/10 19:11:36

M02-Right Head-Tilt-WCDM A850-Ch4182

Communication System: WCDMA850; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL835 Medium parameters used: f = 836.4 MHz; $\sigma = 0.94$ mho/m; $\epsilon r = 42.57$; $\rho = 1000$

kg/m³

Phantom section: Right Section; DUT test position: Tilt; Modulation type: BPSK

DASY4 Configuration:

- Probe: EX3DV4 SN3590; ConvF(10.21, 10.21, 10.21); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Tilt position - Middle/Area Scan (7x17x1): Measurement grid: dx=15mm, dy=15mm


Maximum value of SAR (measured) = 0.201 mW/g

Tilt position - Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.78 V/m; Power Drift = 0.063 dB

Peak SAR = 0.224 W/kg

SAR(1 g) = $\frac{0.175}{mW/g}$; SAR(10 g) = 0.132 mW/g Maximum value of SAR (measured) = 0.202 mW/g

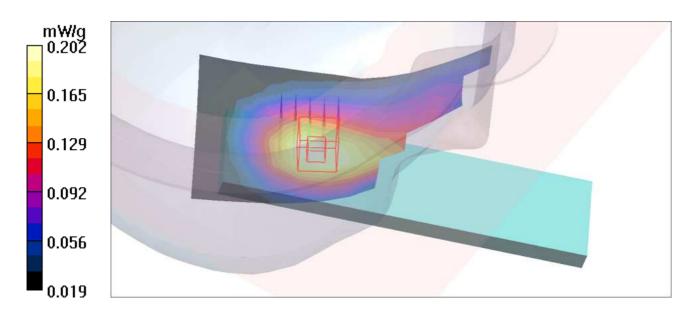

Date/Time: 2011/3/10 19:33:29

M03-Left Head-Cheek-WCDM A850-Ch4132

Communication System: WCDMA850; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: HSL835 Medium parameters used: f = 826.4 MHz; σ = 0.92 mho/m; ϵ_r = 42.77; ρ = 1000

kg/m³

Phantom section: Left Section: DUT test position: Cheek: Modulation type: BPSK

DASY4 Configuration:

- Probe: EX3DV4 SN3590; ConvF(10.21, 10.21, 10.21); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position - Low/Area Scan (7x17x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.571 mW/g


Touch position - Low/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.53 V/m; Power Drift = -0.005 dB

Peak SAR = 0.664 W/kg

SAR(1 g) = 0.466 mW/g; SAR(10 g) = 0.320 mW/g

Maximum value of SAR (measured) = 0.576 mW/g

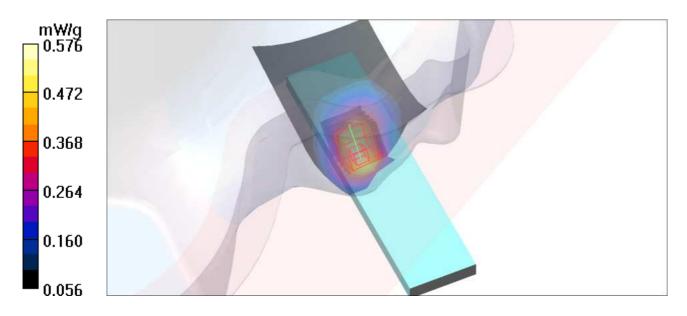

Date/Time: 2011/3/10 19:49:23

M03-Left Head-Cheek-WCDM A850-Ch4182

Communication System: WCDMA850; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL835 Medium parameters used: f = 836.4 MHz; $\sigma = 0.94$ mho/m; $\epsilon r = 42.57$; $\rho = 1000$

kg/m³

Phantom section: Left Section; DUT test position: Cheek; Modulation type: BPSK

DASY4 Configuration:

- Probe: EX3DV4 SN3590; ConvF(10.21, 10.21, 10.21); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position - Middle/Area Scan (7x17x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.439 mW/g


Touch position - Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.14 V/m; Power Drift = 0.178 dB

Peak SAR = 0.511 W/kg

SAR(1 g) = 0.357 mW/g; SAR(10 g) = 0.244 mW/g

Maximum value of SAR (measured) = 0.444 mW/g

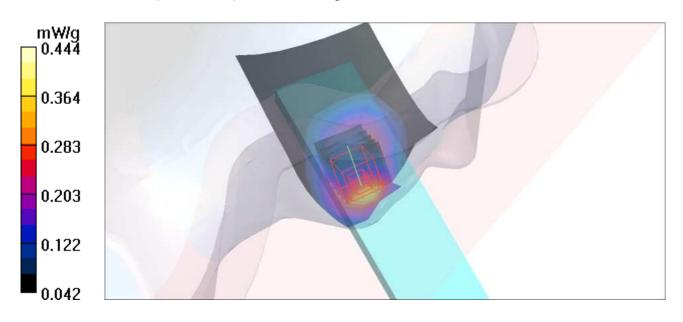

Date/Time: 2011/3/10 20:40:46

M03-Left Head-Cheek-WCDM A850-Ch4233

Communication System: WCDMA850; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: HSL835 Medium parameters used: f = 846.6 MHz; $\sigma = 0.95$ mho/m; $\varepsilon_r = 42.45$; $\rho = 1000$

ka/m³

Phantom section: Left Section: DUT test position: Cheek: Modulation type: BPSK

DASY4 Configuration:

- Probe: EX3DV4 SN3590; ConvF(10.21, 10.21, 10.21); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579: Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position - High/Area Scan (7x17x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.759 mW/g


Touch position - High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.89 V/m; Power Drift = -0.074 dB

Peak SAR = 1.05 W/kg

SAR(1 g) = 0.690 mW/g; SAR(10 g) = 0.447 mW/g

Maximum value of SAR (measured) = 0.861 mW/g

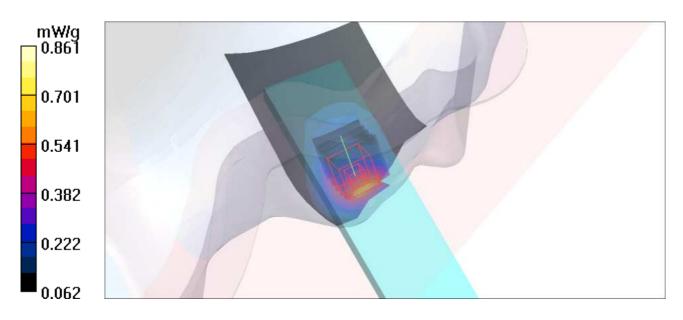

Date/Time: 2011/3/10 20:57:01

M04-Left Head-Tilt-WCDM A850-Ch4182

Communication System: WCDMA850; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL835 Medium parameters used: f = 836.4 MHz; $\sigma = 0.94$ mho/m; $\epsilon r = 42.57$; $\rho = 1000$

kg/m³

Phantom section: Left Section; DUT test position: Tilt; Modulation type: BPSK

DASY4 Configuration:

- Probe: EX3DV4 SN3590; ConvF(10.21, 10.21, 10.21); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Tilt position - Middle/Area Scan (7x17x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.252 mW/g


Tilt position - Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.81 V/m; Power Drift = -0.104 dB

Peak SAR = 0.277 W/kg

SAR(1 g) = 0.217 mW/g; SAR(10 g) = 0.163 mW/g

Maximum value of SAR (measured) = 0.251 mW/g

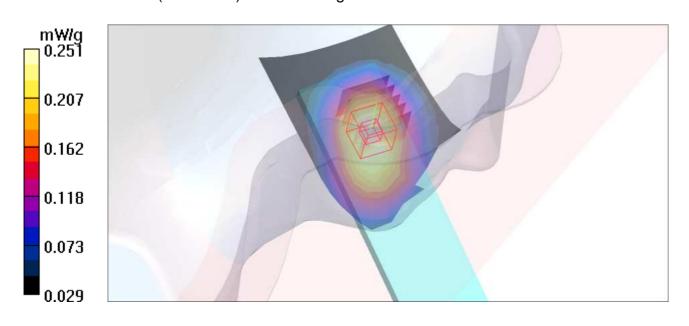

Date/Time: 2011/3/10 16:00:28

M05-Body-WCDM A850-Ch4182

Communication System: WCDMA850 ; Frequency: 836.4 MHz ; Duty Cycle: 1:1 ; Modulation type: BPSK

Medium: MSL835 Medium parameters used: f = 836.4 MHz; $\sigma = 0.99$ mho/m; $\epsilon r = 57.04$; $\rho = 1000$

kg/m³

Phantom section: Flat Section; Separation distance: 15 mm (The bottom side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 SN3590; ConvF(10.32, 10.32, 10.32); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Body Position - Mid Ch4182/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.494 mW/g

Body Position - Mid Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.4 V/m; Power Drift = -0.052 dB

Peak SAR = 0.631 W/kg

SAR(1 g) = 0.455 mW/g; SAR(10 g) = 0.319 mW/g Maximum value of SAR (measured) = 0.549 mW/g

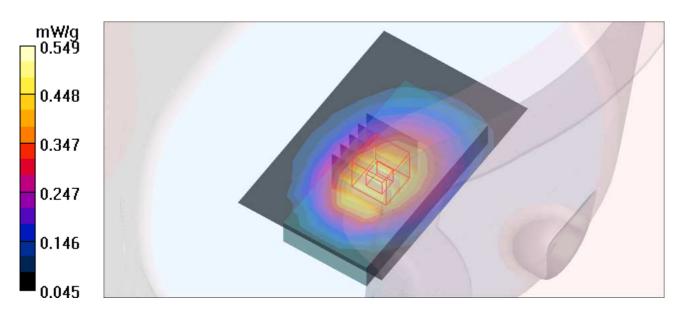

Date/Time: 2011/3/10 16:19:37

M06-Body-WCDM A850-Ch4182

Communication System: WCDMA850 ; Frequency: 836.4 MHz ; Duty Cycle: 1:1 ; Modulation type: BPSK

Medium: MSL835 Medium parameters used: f = 836.4 MHz; $\sigma = 0.99$ mho/m; $\epsilon r = 57.04$; $\rho = 1000$

kg/m³

Phantom section: Flat Section; Separation distance: 15 mm (The front side of the EUT to the

Phantom)

DASY4 Configuration:

- Probe: EX3DV4 SN3590; ConvF(10.32, 10.32, 10.32); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Body Position - Mid Ch4182/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.336 mW/g

Body Position - Mid Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.8 V/m; Power Drift = 0.104 dB

Peak SAR = 0.397 W/kg

SAR(1 g) = 0.296 mW/g; SAR(10 g) = 0.215 mW/g Maximum value of SAR (measured) = 0.350 mW/g

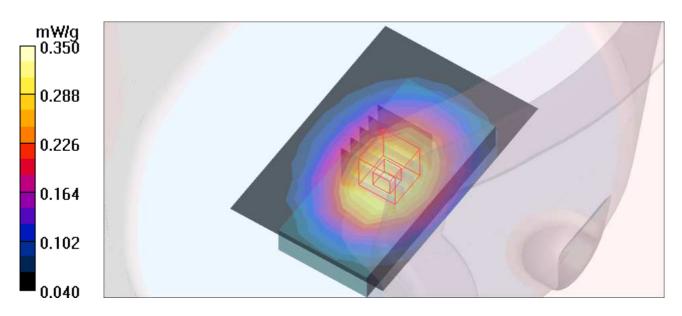

Date/Time: 2011/3/11 15:55:41

Right Head-Cheek-PCS1900-Ch661

Communication System: GSM1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: HSL1900 Medium parameters used: f = 1880 MHz; $\sigma = 1.41$ mho/m; $\varepsilon_r = 41.61$; $\rho = 1000$

ka/m³

Phantom section: Right Section; DUT test position: Cheek; Modulation type: GMSK

DASY4 Configuration:

- Probe: EX3DV4 SN3590; ConvF(8.45, 8.45, 8.45); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579: Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position - Middle/Area Scan (7x17x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.501 mW/g

Touch position - Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.42 V/m; Power Drift = 0.126 dB

Peak SAR = 0.586 W/kg

SAR(1 g) = 0.372 mW/g; SAR(10 g) = 0.228 mW/g


Maximum value of SAR (measured) = 0.472 mW/g

Touch position - Middle/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.42 V/m; Power Drift = 0.126 dB

Peak SAR = 0.494 W/kg

SAR(1 g) = 0.291 mW/g; SAR(10 g) = 0.172 mW/gMaximum value of SAR (measured) = 0.415 mW/g

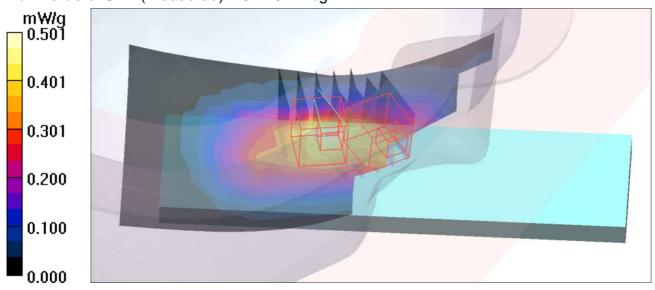

Date/Time: 2011/3/11 16:39:17

M07-Head in Body-PCS1900-Ch512

Communication System: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: HSL1900 Medium parameters used: f = 1850.2 MHz; σ = 1.38 mho/m; ϵ_r = 41.68; ρ = 1000

kg/m³

Phantom section: Flat Section; DUT test position: Cheek; Modulation type: GMSK

DASY4 Configuration:

- Probe: EX3DV4 SN3590; ConvF(8.45, 8.45, 8.45); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position - Low/Area Scan (17x7x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 1.45 mW/g


Touch position - Low/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.3 V/m; Power Drift = 0.062 dB

Peak SAR = 1.88 W/kg

SAR(1 g) = 1.12 mW/g; SAR(10 g) = 0.621 mW/g

Maximum value of SAR (measured) = 1.47 mW/g

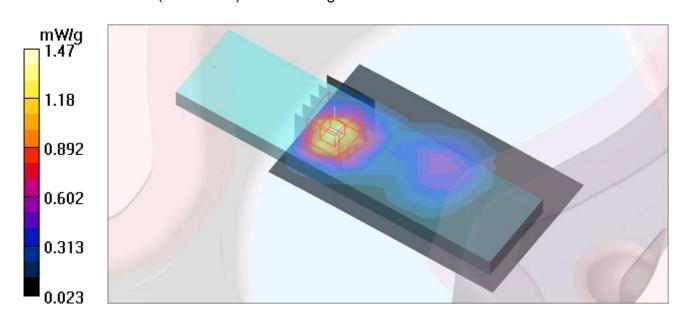

Date/Time: 2011/3/11 16:54:03

M07-Head in Body-PCS1900-Ch661

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: HSL1900 Medium parameters used: f = 1880 MHz; $\sigma = 1.41$ mho/m; $\epsilon r = 41.61$; $\rho = 1000$

kg/m³

Phantom section: Flat Section; DUT test position: Cheek; Modulation type: GMSK

DASY4 Configuration:

- Probe: EX3DV4 SN3590; ConvF(8.45, 8.45, 8.45); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position - Middle/Area Scan (17x7x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 1.84 mW/g


Touch position - Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.7 V/m; Power Drift = 0.108 dB

Peak SAR = 2.43 W/kg

 $SAR(1 g) = \frac{1.43}{1.43} mW/g; SAR(10 g) = 0.791 mW/g$

Maximum value of SAR (measured) = 1.91 mW/g

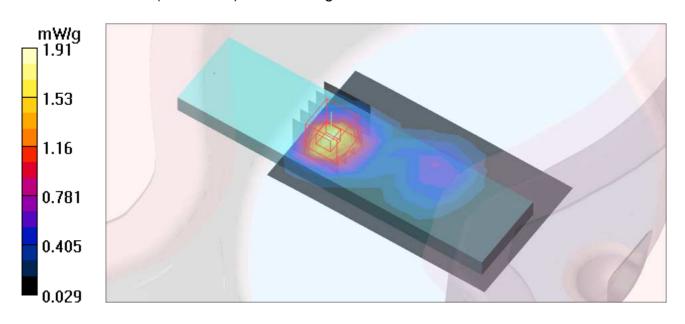

Date/Time: 2011/3/11 17:23:23

M07-Head in Body-PCS1900-Ch810

Communication System: PCS1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: HSL1900 Medium parameters used: f = 1909.8 MHz; $\sigma = 1.44$ mho/m; $\epsilon_r = 41.52$; $\rho = 1000$

kg/m³

Phantom section: Flat Section: DUT test position: Cheek: Modulation type: GMSK

DASY4 Configuration:

- Probe: EX3DV4 SN3590; ConvF(8.45, 8.45, 8.45); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579: Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Touch position - High/Area Scan (17x7x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 1.88 mW/g

Touch position - High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.0 V/m; Power Drift = 0.118 dB

Peak SAR = 2.47 W/kg


SAR(1 g) = 1.45 mW/g; SAR(10 g) = 0.804 mW/gMaximum value of SAR (measured) = 1.91 mW/g

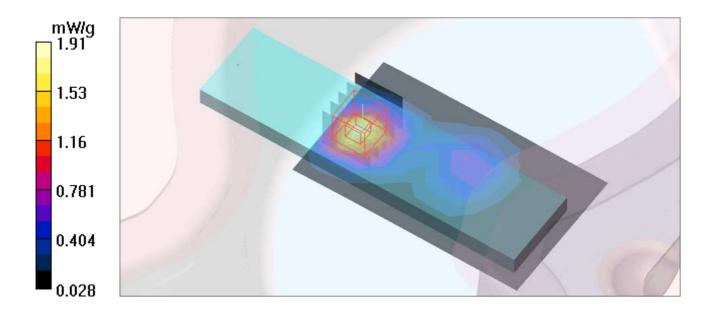



香港商立德國際商品試驗有限公司桃園分公司

Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch

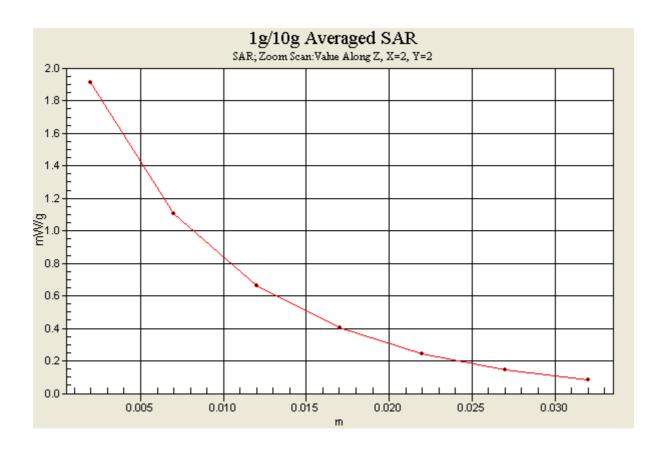

Date/Time: 2011/3/11 16:18:42

M08-Right Head-Tilt-PCS1900-Ch661

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: HSL1900 Medium parameters used: f = 1880 MHz; $\sigma = 1.41$ mho/m; $\epsilon r = 41.61$; $\rho = 1000$

kg/m³

Phantom section: Right Section; DUT test position: Tilt; Modulation type: GMSK

DASY4 Configuration:

- Probe: EX3DV4 SN3590; ConvF(8.45, 8.45, 8.45); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Tilt position - Middle/Area Scan (7x17x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.252 mW/g

Tilt position - Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.64 V/m; Power Drift = -0.089 dB

Peak SAR = 0.302 W/kg

SAR(1 g) = 0.198 mW/g; SAR(10 g) = 0.125 mW/g

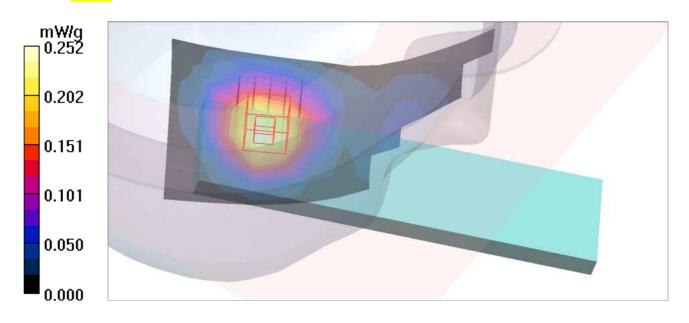

Date/Time: 2011/3/11 17:57:37

M09-Left Head-Cheek-PCS1900-Ch512

Communication System: PCS1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: HSL1900 Medium parameters used: f = 1850.2 MHz; σ = 1.38 mho/m; ϵ_r = 41.68; ρ = 1000

kg/m³

Phantom section: Left Section; DUT test position: Cheek; Modulation type: GMSK

DASY4 Configuration:

- Probe: EX3DV4 SN3590; ConvF(8.45, 8.45, 8.45); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position - Low/Area Scan (7x17x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.326 mW/g

Touch position - Low/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.48 V/m; Power Drift = 0.107 dB

Peak SAR = 0.457 W/kg


SAR(1 g) = 0.300 mW/g; SAR(10 g) = 0.180 mW/g Maximum value of SAR (measured) = 0.380 mW/g

Touch position - Low/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.48 V/m; Power Drift = 0.107 dB

Peak SAR = 0.408 W/kg

SAR(1 g) = 0.255 mW/g; SAR(10 g) = 0.151 mW/g Maximum value of SAR (measured) = 0.336 mW/g

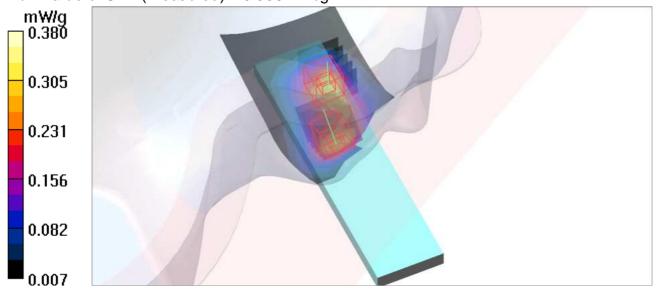

Date/Time: 2011/3/11 18:19:24

M09-Left Head-Cheek-PCS1900-Ch661

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: HSL1900 Medium parameters used: f = 1880 MHz; $\sigma = 1.41$ mho/m; $\epsilon r = 41.61$; $\rho = 1000$

kg/m³

Phantom section: Left Section; DUT test position: Cheek; Modulation type: GMSK

DASY4 Configuration:

- Probe: EX3DV4 SN3590; ConvF(8.45, 8.45, 8.45); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position - Middle/Area Scan (7x17x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.382 mW/g

Touch position - Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.23 V/m; Power Drift = -0.198 dB

Peak SAR = 0.492 W/kg

SAR(1 g) = 0.322 mW/g; SAR(10 g) = 0.191 mW/g


Maximum value of SAR (measured) = 0.416 mW/g

Touch position - Middle/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.23 V/m; Power Drift = -0.198 dB

Peak SAR = 0.481 W/kg

SAR(1 g) = 0.297 mW/g; SAR(10 g) = 0.173 mW/g Maximum value of SAR (measured) = 0.389 mW/g

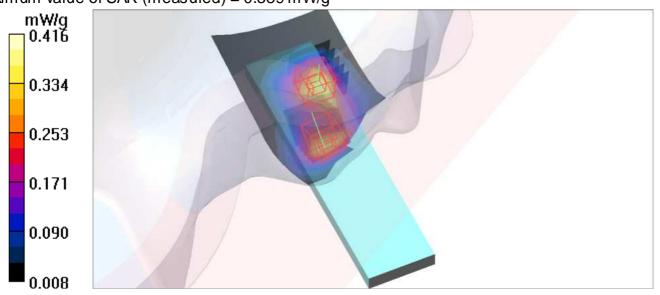

Date/Time: 2011/3/11 18:40:45

M09-Left Head-Cheek-PCS1900-Ch810

Communication System: PCS1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: HSL1900 Medium parameters used : f = 1909.8 MHz; σ = 1.44 mho/m; ϵ_r = 41.52; ρ = 1000

kg/m³

Phantom section: Left Section; DUT test position: Cheek; Modulation type: GMSK

DASY4 Configuration:

- Probe: EX3DV4 SN3590; ConvF(8.45, 8.45, 8.45); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Touch position - High/Area Scan (7x17x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.425 mW/g

Touch position - High/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.47 V/m; Power Drift = 0.014 dB

Peak SAR = 0.570 W/kg

SAR(1 g) = 0.349 mW/g; SAR(10 g) = 0.201 mW/g


.Maximum value of SAR (measured) = 0.455 mW/g

Touch position - High/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.47 V/m; Power Drift = 0.014 dB

Peak SAR = 0.502 W/kg

SAR(1 g) = 0.320 mW/g; SAR(10 g) = 0.189 mW/g

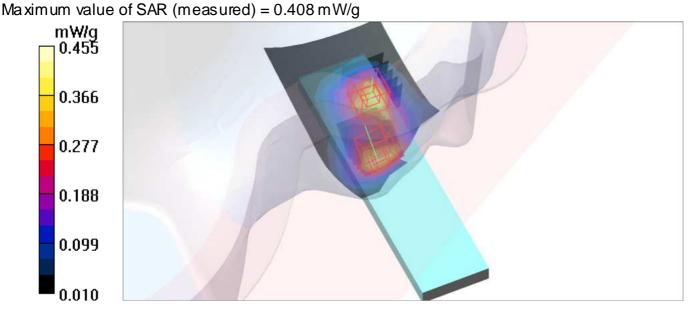

Date/Time: 2011/3/11 19:02:24

M10-Left Head-Tilt-PCS1900-Ch661

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium: HSL1900 Medium parameters used: f = 1880 MHz; σ = 1.41 mho/m; ϵ r = 41.61; ρ = 1000

kg/m³

Phantom section: Left Section; DUT test position: Tilt; Modulation type: GMSK

DASY4 Configuration:

- Probe: EX3DV4 SN3590; ConvF(8.45, 8.45, 8.45); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Tilt position - Middle/Area Scan (7x17x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.338 mW/g

Tilt position - Middle/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.41 V/m; Power Drift = 0.040 dB

Peak SAR = 0.425 W/kg

SAR(1 g) = $\frac{0.276}{0.276}$ mW/g; SAR(10 g) = 0.168 mW/g

Maximum value of SAR (measured) = 0.358 mW/g



Date/Time: 2011/3/11 20:47:30

M11-Body-GPRS1900 TS1-Ch661

Communication System: GPRS1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3; Modulation type: GMSK / UL 1 time slot

Medium: MSL1900 Medium parameters used: f = 1880 MHz; σ = 1.52 mho/m; ϵ r = 55.17; ρ = 1000 kg/m³

Phantom section: Flat Section; Separation distance: 15 mm (The bottom side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 SN3590; ConvF(8.49, 8.49, 8.49); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Body Position - Mid Ch661/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.397 mW/g

Body Position - Mid Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.82 V/m; Power Drift = -0.127 dB

Peak SAR = 0.561 W/kg

SAR(1 g) = 0.334 mW/g; SAR(10 g) = 0.194 mW/g Maximum value of SAR (measured) = 0.450 mW/g

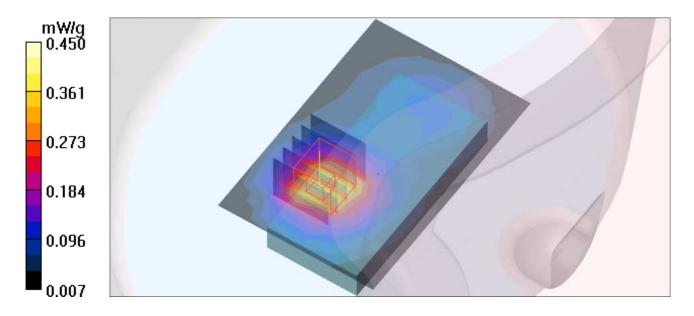

Date/Time: 2011/3/11 21:03:38

M12-Body-GPRS1900 TS1-Ch661

Communication System: GPRS1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3; Modulation type: GMSK / UL 1 time slot

Medium: MSL1900 Medium parameters used: f = 1880 MHz; σ = 1.52 mho/m; ϵ r = 55.17; ρ = 1000 kg/m³

Phantom section: Flat Section; Separation distance: 15 mm (The front side of the EUT to the Phantom)

DASY4 Configuration:

- Probe: EX3DV4 SN3590; ConvF(8.49, 8.49, 8.49); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Body Position - Mid Ch661/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.248 mW/g

Body Position - Mid Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.15 V/m; Power Drift = 0.025 dB

Peak SAR = 0.332 W/kg

SAR(1 g) = $\frac{0.205}{mW/g}$; SAR(10 g) = $0.125 \frac{mW}{g}$ Maximum value of SAR (measured) = $0.270 \frac{mW}{g}$

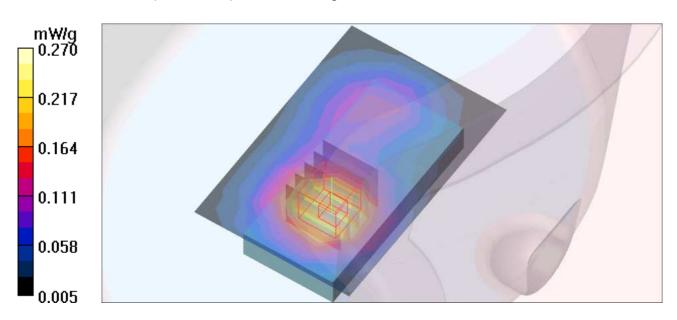

Date/Time: 2011/3/11 21:37:49

M13-Body-PCS1900-Ch661

 $Communication \ System: PCS1900\ ; Frequency: 1880\ MHz\ ; \ Duty\ Cycle: 1:8.3\ ; \ Modulation$

type: GMSK

Medium: MSL1900 Medium parameters used: f = 1880 MHz; $\sigma = 1.52$ mho/m; $\epsilon r = 55.17$; $\rho = 1000$

kg/m³

Phantom section: Flat Section; Separation distance: 15 mm (The bottom side of the EUT to the

Phantom)

DASY4 Configuration:

Probe: EX3DV4 - SN3590; ConvF(8.49, 8.49, 8.49); Calibrated: 2011/2/25

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE3 Sn579; Calibrated: 2010/9/20

Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP 1202

Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


Body Position - Mid Ch661/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.410 mW/g

Body Position - Mid Ch661/Zoom Scan(5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.62 V/m; Power Drift = -0.148 dB

Peak SAR = 0.607 W/kg

SAR(1 g) = 0.361 mW/g; SAR(10 g) = 0.208 mW/g Maximum value of SAR (measured) = 0.484 mW/g

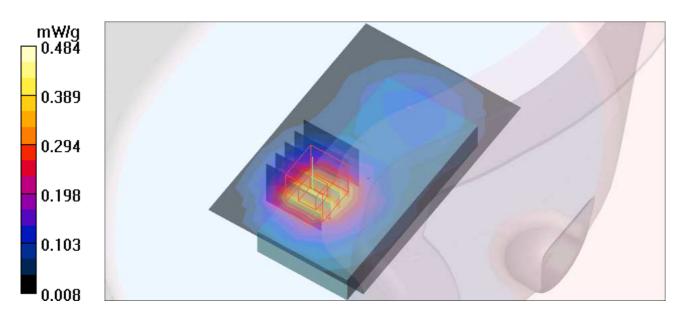

Date/Time: 2011/3/11 09:52:17

M14-Body-PCS1900-Ch661

Communication System: PCS1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3; Modulation

type: GMSK

Medium: MSL1900 Medium parameters used: f = 1880 MHz; $\sigma = 1.52$ mho/m; $\epsilon_r = 55.17$; $\rho = 1000$

kg/m³

Phantom section: Flat Section: Separation distance: 15 mm (The front side of the EUT to the

Phantom)

DASY4 Configuration:

Probe: EX3DV4 - SN3590; ConvF(8.49, 8.49, 8.49); Calibrated: 2011/2/25

- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Position - Mid Ch661/Area Scan (7x10x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.295 mW/g


Body Position - Mid Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.44 V/m; Power Drift = 0.007 dB

Peak SAR = 0.371 W/kg

SAR(1 g) = 0.231 mW/g; SAR(10 g) = 0.142 mW/g

Maximum value of SAR (measured) = $0.303 \,\mathrm{mW/g}$

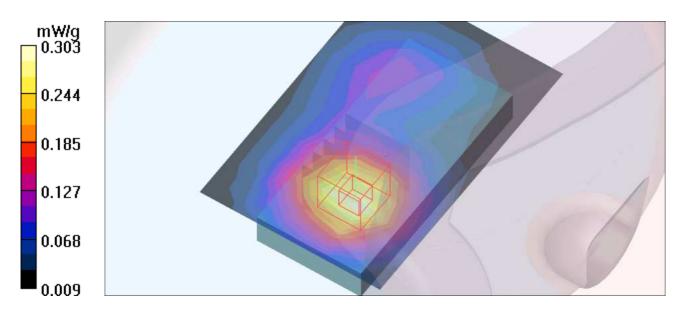

Date/Time: 2011/3/10 17:38:58

SystemPerformanceCheck-D835V2-HSL835 MHz

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d021; Test Frequency: 835 MHz

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1; Modulation type: CW

Medium: HSL835; Medium parameters used: f = 835 MHz; σ = 0.93 mho/m; ϵ_r = 42.68; ρ = 1000 kg/m³;

Liquid level: 150 mm

Phantom section: Flat Section; Separation distance: 15 mm (The feet point of the dipole to the

Phantom)Air temp.: 22.3 degrees; Liquid temp.: 21.2 degrees

DASY4 Configuration:

- Probe: EX3DV4 SN3590; ConvF(10.21, 10.21, 10.21); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


d=15mm, Pin=250mW/Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 2.83 mW/g

d=15mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 55.6 V/m; Power Drift = 0.050 dB

Peak SAR = 3.46 W/kg

SAR(1 g) = $\frac{2.26}{mW/g}$; SAR(10 g) = 1.45 mW/g Maximum value of SAR (measured) = 2.89 mW/g

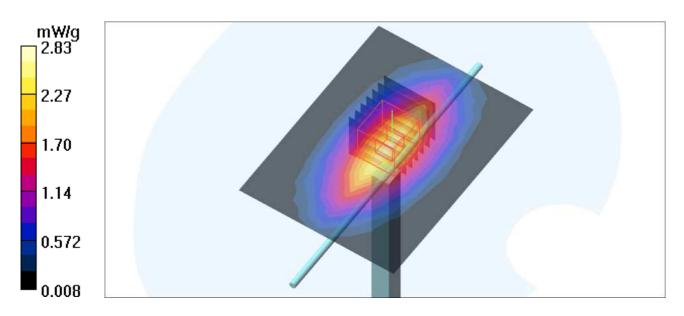

Date/Time: 2011/3/10 14:12:34

SystemPerformanceCheck-D835V2-MSL835 MHz

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d021; Test Frequency: 835 MHz

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1; Modulation type: CW Medium: MSL835;Medium parameters used: f = 835 MHz; $\sigma = 0.99$ mho/m; $\epsilon_r = 57.09$; $\rho = 1000$ kg/m³; Liquid level: 150 mm

Phantom section: Flat Section; Separation distance: 15 mm (The feet point of the dipole to the Phantom) Air temp.: 22.5 degrees; Liquid temp.: 21.5 degrees

DASY4 Configuration:

- Probe: EX3DV4 SN3590; ConvF(10.32, 10.32, 10.32); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


d=15mm, Pin=250mW/Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 3.02 mW/g

d=15mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 55.5 V/m; Power Drift = 0.026 dB

Peak SAR = 3.62 W/kg

SAR(1 g) = $\frac{2.38}{MW/g}$; SAR(10 g) = 1.54 mW/gMaximum value of SAR (measured) = 3.04 mW/g

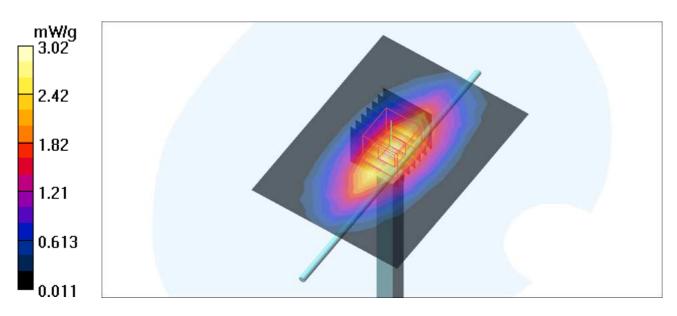

Date/Time: 2011/3/11 15:25:31

SystemPerformanceCheck-D1900V2-HSL1900 MHz

DUT: Dipole 1900 MHz ; Type: D1900V2 ; Serial: D1900V2 - SN:5d022 ; Test Frequency: 1900 MHz

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1; Modulation type: CW Medium: HSL1900; Medium parameters used: f = 1900 MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 41.56$; $\rho = 1000$ kg/m³; Liquid level: 150 mm

Phantom section: Flat Section; Separation distance: 10 mm (The feet point of the dipole to the Phantom) Air temp.: 22.2 degrees; Liquid temp.: 21.5 degrees

DASY4 Configuration:

- Probe: EX3DV4 SN3590; ConvF(8.45, 8.45, 8.45); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


d=10mm, Pin=250mW/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 14.1 mW/g

d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 102.5 V/m; Power Drift = -0.010 dB

Peak SAR = 19.3 W/kg

SAR(1 g) = $\frac{10}{10}$ mW/g; SAR(10 g) = 5.09 mW/g Maximum value of SAR (measured) = 14.7 mW/g

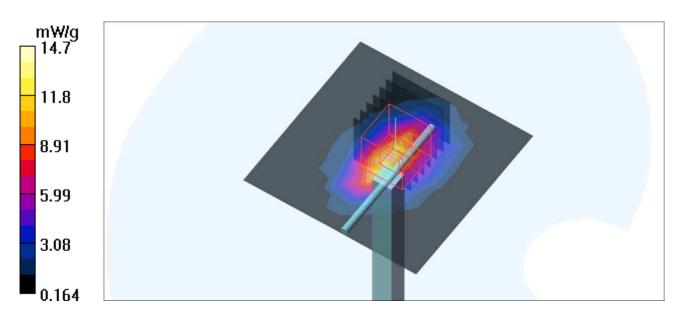

Date/Time: 2011/3/11 20:06:01

SystemPerformanceCheck-D1900V2-MSL1900 MHz

DUT: Dipole 1900 MHz ; Type: D1900V2 ; Serial: D1900V2 - SN:5d022 ; Test Frequency: 1900 MHz

Communication System: CW ; Frequency: 1900 MHz; Duty Cycle: 1:1; Modulation type: CW Medium: MSL1900;Medium parameters used: f = 1900 MHz; σ = 1.55 mho/m; ϵ_r = 55.04; ρ = 1000 kg/m³; Liquid level: 150 mm

Phantom section: Flat Section; Separation distance: 10 mm (The feet point of the dipole to the Phantom) Air temp.: 22.7 degrees; Liquid temp.: 21.3 degrees

DASY4 Configuration:

- Probe: EX3DV4 SN3590; ConvF(8.49, 8.49, 8.49); Calibrated: 2011/2/25
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn579; Calibrated: 2010/9/20
- Phantom: SAM Twin Phantom V4.0; Type: QD 000 P40 CA; Serial: TP 1202
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


d=10mm, Pin=250mW/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 13.9 mW/g

d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 94.7 V/m; Power Drift = 0.014 dB

Peak SAR = 18.0 W/kg

SAR(1 g) = $\frac{9.45}{mW/g}$; SAR(10 g) = 4.77 mW/g Maximum value of SAR (measured) = 14.0 mW/g

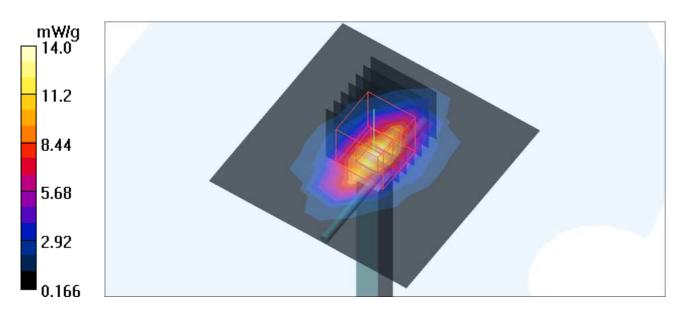



APPENDIX B: BV ADT SAR MEASUREMENT SYSTEM





APPENDIX C: PHOTOGRAPHS OF SYSTEM VALIDATION





APPENDIX D: SYSTEM CERTIFICATE & CALIBRATION

D1: SAM PHANTOM

Schmid & Partner Engineering AG

Zeughausstrasse 43, 8004 Zurich, Switzerland, Phone +41 1 245 97 00, Fax +41 1 245 97 79

Certificate of conformity / First Article Inspection

Item .	SAM Twin Phantom V4.0		
Type No	QD 000 P40 CA		
Series No	TP-1150 and higher	5	
Manufacturer / Origin -	Untersee Composites		
	Hauptstr. 69	•	
•	CH-8559 Fruthwilen	• •	
~	Switzerland		

Tests

The series production process used allows the limitation to test of first articles. Complete tests were made on the pre-series Type No. QD 000 P40 AA, Serial No. TP-1001 and on the series first article Type No. QD 000 P40 BA, Serial No. TP-1006. Certain parameters have been retested using further series units (called samples).

Test	Requirement	Details	Units tested
Shape	Compliance with the geometry according to the CAD model.	IT'IS CAD File (*)	First article, Samples
Material thickness	Compliant with the requirements according to the standards	2mm +/- 0.2mm in specific areas	First article, Samples
Material parameters	Dielectric parameters for required frequencies	200 MHz - 3 GHz Relative permittivity < 5 Loss tangent < 0.05.	Material sample TP 104-5
Material resistivity	The material has been tested to be compatible with the liquids defined in the standards	Liquid type HSL 1800 and others according to the standard.	Pre-series, First article

Standards

- [1] CENELEC EN 50361
- [2] IEEE P1528-200x draft 6.5
- [3] IEC PT 62209 draft 0.9
- (*) The IT'IS CAD file is derived from [2] and is also within the tolerance requirements of the shapes of [1] and [3].

Conformity

Based on the sample tests above, we certify that this item is in compliance with the uncertainty requirements of SAR measurements specified in standard [1] and draft standards [2] and [3].

Date

28.02.2002

Signature / Stamp

Engineering AG

Zeughausstrasse 43, CH-8004 Zurich
Tel. +41 1 245 97 00, Fex +41 1 245 97 79

Schmid & Partner

1. +13 1 245 97 00, Fox +41 12

F. Rambalt



D2: DOSIMETRIC E-FIELD PROBE

Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





Schweizerischer Kalibrierdienst Service suisse d'étalonnage Servizio svizzero di taratura Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA

Multilateral Agreement for the recognition of calibration certificates

Client

BV ADT (Auden)

Certificate No: EX3-3590 Feb11

S

C

S

Accreditation No.: SCS 108

CALIBRATION CERTIFICATE

Object

EX3DV4 - SN:3590

Calibration procedure(s)

QA CAL-01.v7, QA CAL-14.v3, QA CAL-23.v4, QA CAL-25.v3

Calibration procedure for dosimetric E-field probes

Calibration date:

February 25, 2011

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).

The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID Cal Date (Certificate No.)		Scheduled Calibration
Power meter E4419B	GB41293874	01-Apr-10 (No. 217-01136)	Apr-11
Power sensor E4412A	MY41495277	01-Apr-10 (No. 217-01136)	Apr-11
Power sensor E4412A	MY41498087	01-Apr-10 (No. 217-01136)	Apr-11
Reference 3 dB Attenuator	SN: S5054 (3c)	30-Mar-10 (No. 217-01159)	Mar-11
Reference 20 dB Attenuator	SN: S5086 (20b)	30-Mar-10 (No. 217-01161)	Mar-11
Reference 30 dB Attenuator	SN: S5129 (30b)	30-Mar-10 (No. 217-01160)	Mar-11
Reference Probe ES3DV2	SN: 3013	29-Dec-10 (No. ES3-3013_Dec10)	Dec-11
DAE4	SN: 654	23-Apr-10 (No. DAE4-654_Apr10) Apr-11	
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-10)	In house check: Oct-11

Name Function

Calibrated by: Katja Pokovic Technical Manager

Issued: February 25, 2011

Signature

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Niels Kuster

Certificate No: EX3-3590_Feb11

Approved by:

Page 1 of 11

Quality Manager

Calibration Laboratory of

Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





Schweizerischer Kalibrierdienst S Service suisse d'étalonnage C Servizio svizzero di taratura S Swiss Calibration Service

Accreditation No.: SCS 108

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

tissue simulating liquid

sensitivity in free space

diode compression point

sensitivity in TSL / NORMx,y,z

Glossary:

TSL

NORMx,y,z

ConvF

DCP

A, B, C

CF

Polarization φ

φ rotation around probe axis Polarization 9

9 rotation around an axis that is in the plane normal to probe axis (at measurement center),

i.e., 9 = 0 is normal to probe axis

crest factor (1/duty_cycle) of the RF signal

modulation dependent linearization parameters

Calibration is Performed According to the Following Standards:

a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003

b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

Methods Applied and Interpretation of Parameters:

- NORMx,y,z: Assessed for E-field polarization 9 = 0 (f ≤ 900 MHz in TEM-cell; f > 1800 MHz; R22 waveguide). NORMx,y,z are only intermediate values, i.e., the uncertainties of NORMx,y,z does not affect the E²-field uncertainty inside TSL (see below ConvF).
- NORM(f)x,y,z = NORMx,y,z * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCPx,y,z: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- Ax,y,z; Bx,y,z; Cx,y,z are numerical linearization parameters in dB assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media.
- VR: VR is the validity range of the calibration related to the average diode voltage or DAE voltage in mV.
- ConvF and Boundary Effect Parameters: Assessed in flat phantom using E-field (or Temperature Transfer Standard for f ≤ 800 MHz) and inside wavequide using analytical field distributions based on power measurements for f > 800 MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORMx,y,z * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100
- Spherical isotropy (3D deviation from isotropy): in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

Certificate No: EX3-3590_Feb11 Page 2 of 11 EX3DV4 - SN:3590 February 25, 2011

Probe EX3DV4

SN:3590

Manufactured:

March 23, 2009

Calibrated:

February 25, 2011

Calibrated for DASY/EASY Systems

(Note: non-compatible with DASY2 system!)

EX3DV4-SN:3590

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3590

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm (μV/(V/m) ²) ^A	0.51	0.48	0.51	± 10.1 %
DCP (mV) ^B	94.6	95.5	92.8	

Modulation Calibration Parameters

DID	Communication System Name	PAR		A dB	B dB	C dB	VR mV	Unc ^E (k≔2)
10000	CW	0.00	Х	0.00	0.00	1.00	119.0	±2.7 %
			Υ	0.00	0.00	1.00	141.4	
			Z	0.00	0.00	1.00	115.0	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Numerical linearization parameter: uncertainty not required.

^A The uncertainties of NormX,Y,Z do not affect the E²-field uncertainty inside TSL (see Pages 5 and 6).

E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3590

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^c	Relative Permittivity ^F	Conductivity (S/m) ^F	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
835	41.5	0.90	10.21	10.21	10.21	0.56	0.68	± 12.0 %
1640	40.3	1.29	9.25	9.25	9.25	0.68	0.60	± 12.0 %
1750	40.1	1.37	9.03	9.03	9.03	0.79	0.58	± 12.0 %
1950	40.0	1.40	8.45	8.45	8.45	0.55	0.66	± 12.0 %
2300	39.5	1.67	8.14	8.14	8.14	0.40	0.80	± 12.0 %
2450	39.2	1.80	7.73	7.73	7.73	0.29	1.00	± 12.0 %
2600	39.0	1.96	7.53	7.53	7.53	0.28	1.06	± 12.0 %
3500	37.9	2.91	7.55	7.55	7.55	0.36	1.03	± 13.1 %
5200	36.0	4.66	5.51	5.51	5.51	0.30	1.80	± 13.1 %
5300	35.9	4.76	5.17	5.17	5.17	0.30	1.80	± 13.1 %
5500	35.6	4.96	5.00	5.00	5.00	0.40	1.80	± 13.1 %
5600	35.5	5.07	4.52	4.52	4.52	0.50	1.80	± 13.1 %
5800	35.3	5.27	4.53	4.53	4.53	0.50	1.80	± 13.1 %

^c Frequency validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to ± 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

F At frequencies below 3 GHz, the validity of tissue parameters (ε and σ) can be relaxed to ± 10% if liquid compensation formula is applied to

At frequencies below 3 GHz, the validity of tissue parameters (ε and σ) can be relaxed to \pm 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ε and σ) is restricted to \pm 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

DASY/EASY - Parameters of Probe: EX3DV4- SN:3590


Calibration Parameter Determined in Body Tissue Simulating Media

f (MHz) ^c	Relative Permittivity ^F	Conductivity (S/m) F	ConvF X	ConvF Y	ConvF Z	Alpha	Depth (mm)	Unct. (k=2)
835	55.2	0.97	10.32	10.32	10.32	0.38	0.82	± 12.0 %
1640	53.8	1.40	9.72	9.72	9.72	0.51	0.79	± 12.0 %
1750	53.4	1.49	8.77	8.77	8.77	0.37	0.92	± 12.0 %
1950	53.3	1.52	8.49	8.49	8.49	0.60	0.67	± 12.0 %
2300	52.9	1.81	8.08	8.08	8.08	0.30	1.00	± 12.0 %
2450	52.7	1.95	7.91	7.91	7.91	0.42	0.82	± 12.0 %
2600	52.5	2.16	7.78	7.78	7.78	0.25	1.17	± 12.0 %
3500	51.3	3.31	7.14	7.14	7.14	0.43	0.96	± 13.1 %
5200	49.0	5.30	4.81	4.81	4.81	0.50	1.90	± 13.1 %
5300	48.9	5.42	4.56	4.56	4.56	0.50	1.90	± 13.1 %
5500	48.6	5.65	4.32	4.32	4.32	0.50	1.90	± 13.1 %
5600	48.5	5.77	4.01	4.01	4.01	0.60	1.90	± 13.1 %
5800	48.2	6.00	4.55	4.55	4.55	0.50	1.90	± 13.1 %

Frequency validity of \pm 100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to \pm 50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

At frequencies below 3 GHz, the validity of tissue parameters (ϵ and σ) can be relaxed to \pm 10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters (ϵ and σ) is restricted to \pm 5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)

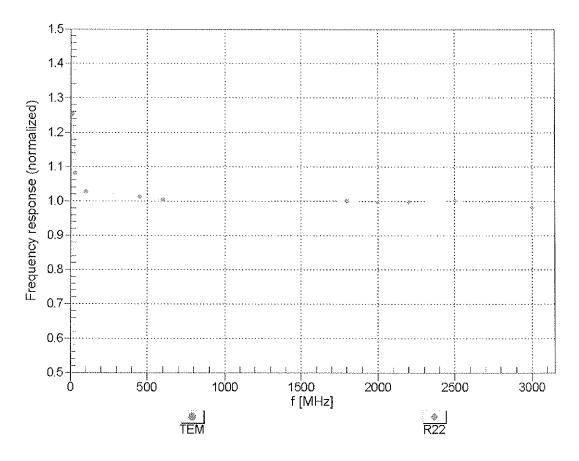



Uncertainty of Frequency Response of E-field: ± 6.3% (k=2)

Receiving Pattern (ϕ), $\vartheta = 0^{\circ}$

f=600 MHz,TEM


f=1800 MHz,R22

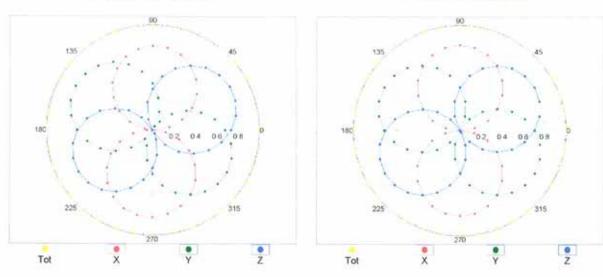


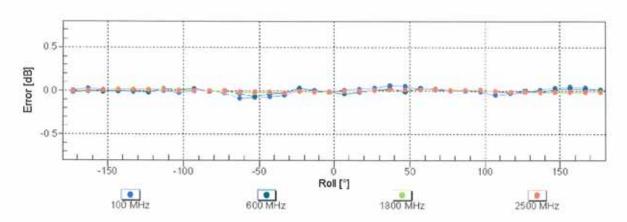

Uncertainty of Axial Isotropy Assessment: ± 0.5% (k=2)


Dynamic Range f(SAR_{head}) (TEM cell , f = 900 MHz)

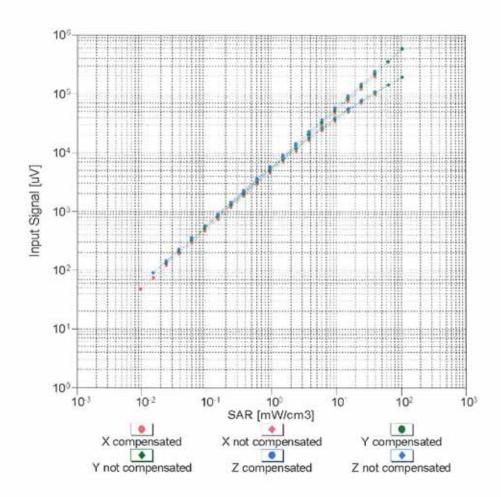

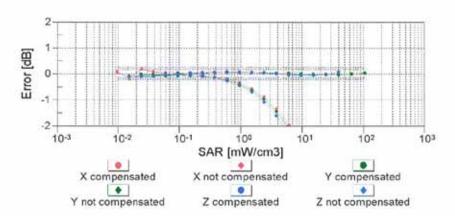


Uncertainty of Linearity Assessment: ± 0.6% (k=2)

Conversion Factor Assessment

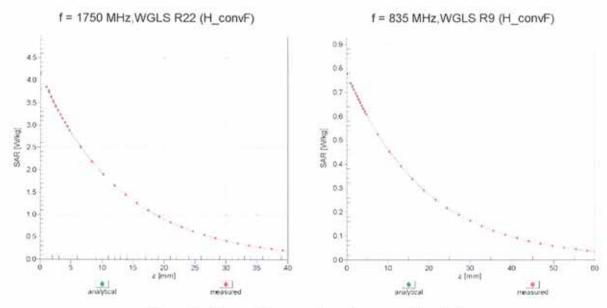

Deviation from Isotropy in Air Error (φ, θ), f = 900 MHz

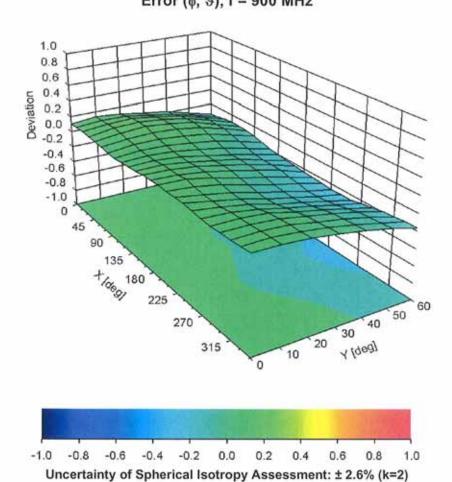

DASY/EASY - Parameters of Probe: EX3DV4 - SN:3590

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	Not applicable
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	2 mm
	1



D3: DAE

Zeughausstrasse 43, 8004 Zurich, Switzerland Phone +41 44 245 9700, Fax +41 44 245 9779 info@speag.com, http://www.speag.com

IMPORTANT NOTICE

USAGE OF THE DAE 3

The DAE unit is a delicate, high precision instrument and requires careful treatment by the user. There are no serviceable parts inside the DAE. Special attention shall be given to the following points:

Battery Exchange: The battery cover of the DAE3 unit is connected to a fragile 3-pin battery connector. Customer is responsible to apply outmost caution not to bend or damage the connector when changing batteries.

Shipping of the DAE: Before shipping the DAE to SPEAG for calibration the customer shall remove the batteries and pack the DAE in an antistatic bag. This antistatic bag shall then be packed into a larger box or container which protects the DAE from impacts transportation. The package shall be marked to indicate that a fragile instrument is inside.

E-Stop Failures: Touch detection may be malfunctioning due to broken magnets in the E-stop. Rough handling of the E-stop may lead to damage of these magnets. Touch and collision errors are often caused by dust and dirt accumulated in the E-stop. To prevent E-stop failure, Customer shall always mount the probe to the DAE carefully and keep the DAE unit in a non-dusty environment if not used for measurements.

Repair: Minor repairs are performed at no extra cost during the annual calibration. However, SPEAG reserves the right to charge for any repair especially if rough unprofessional handling caused the defect.

DASY Configuration Files: Since the exact values of the DAE input resistances, as measured during the calibration procedure of a DAE unit, are not used by the DASY software, a nominal value of 200 MOhm is given in the corresponding configuration file.

Important Note:

Warranty and calibration is void if the DAE unit is disassembled partly or fully by the Customer.

Important Note:

Never attempt to grease or oil the E-stop assembly. Cleaning and readjusting of the Estop assembly is allowed by certified SPEAG personnel only and is part of the annual calibration procedure.

Important Note:

To prevent damage of the DAE probe connector pins, use great care when installing the probe to the DAE. Carefully connect the probe with the connector notch oriented in the mating position. Avoid any rotational movement of the probe body versus the DAE while turning the locking nut of the connector. The same care shall be used when disconnecting the probe from the DAE.

Schmid & Partner Engineering

Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





S Schweizerischer Kalibrierdienst
Service suisse d'étalonnage
Servizio svizzero di taratura
Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Client

BV-ADT (Auden)

Certificate No: DAE3-579_Sep10

Accreditation No.: SCS 108

CALIBRATION CERTIFICATE DAE3 - SD 000 D03 AA - SN: 579 Object QA CAL-06.v22 Calibration procedure(s) Calibration procedure for the data acquisition electronics (DAE) September 20, 2010 Calibration date: This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate. All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%. Calibration Equipment used (M&TE critical for calibration) Primary Standards Cal Date (Certificate No.) Scheduled Calibration Keithley Multimeter Type 2001 SN: 0810278 1-Oct-09 (No: 9055) Oct-10 Secondary Standards ID# Scheduled Check Check Date (in house) SE UMS 006 AB 1004 07-Jun-10 (in house check) Calibrator Box V1.1 In house check: Jun-11 Name Function Signature Calibrated by: Dominique Steffen Technician Approved by: Fin Bombolt R&D Director Issued: September 20, 2010 This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of

Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland





S

S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
Servizio svizzero di taratura

Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Glossary

DAE

data acquisition electronics

Connector angle

information used in DASY system to align probe sensor X to the robot

coordinate system.

Methods Applied and Interpretation of Parameters

- DC Voltage Measurement: Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- Connector angle: The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
 - DC Voltage Measurement Linearity: Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
 - Common mode sensitivity: Influence of a positive or negative common mode voltage on the differential measurement.
 - Channel separation: Influence of a voltage on the neighbor channels not subject to an input voltage.
 - AD Converter Values with inputs shorted: Values on the internal AD converter corresponding to zero input voltage
 - Input Offset Measurement: Output voltage and statistical results over a large number of zero voltage measurements.
 - Input Offset Current: Typical value for information; Maximum channel input offset current, not considering the input resistance.
 - *Input resistance:* Typical value for information: DAE input resistance at the connector, during internal auto-zeroing and during measurement.
 - Low Battery Alarm Voltage: Typical value for information. Below this voltage, a battery alarm signal is generated.
 - Power consumption: Typical value for information. Supply currents in various operating modes.

Certificate No: DAE3-579 Sep10

DC Voltage Measurement

A/D - Converter Resolution nominal

High Range:

1LSB =

6.1μV ,

full range = -100...+300 mV

Low Range:

1LSB =

61nV,

full range = -1.....+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Calibration Factors	X	Y	Z
High Range	404.327 ± 0.1% (k=2)	404.379 ± 0.1% (k=2)	404.160 ± 0.1% (k=2)
Low Range	3.98675 ± 0.7% (k=2)	3.99301 ± 0.7% (k=2)	3.94834 ± 0.7% (k=2)

Connector Angle

Connector Angle to be used in DASY system	358.0 ° ± 1 °

Appendix

1. DC Voltage Linearity

High Range		Reading (μV)	Difference (μV)	Error (%)
Channel X	+ Input	200003.9	0.96	0.00
Channel X	+ Input	20003.19	3.09	0.02
Channel X	- Input	-19994.55	4.75	-0.02
Channel Y	+ Input	199992.4	-0.09	-0.00
Channel Y	+ Input	19999.51	0.41	0.00
Channel Y	- Input	-19997.22	3.18	-0.02
Channel Z	+ Input	200002.0	0.91	0.00
Channel Z	+ Input	20001.93	2.03	0.01
Channel Z	- Input	-19997.58	2.82	-0.01

Low Range		Reading (μV)	Difference (μV)	Error (%)
Channel X	+ Input	2000.0	0.02	0.00
Channel X	+ Input	199.82	0.12	0.06
Channel X	- Input	-200.46	-0.56	0.28
Channel Y	+ Input	2000.3	0.47	0.02
Channel Y	+ Input	199.12	-0.78	-0.39
Channel Y	- Input	-201.36	-1.16	0.58
Channel Z	+ Input	1999.9	-0.07	-0.00
Channel Z	+ Input	199.18	-0.72	-0.36
Channel Z	- Input	-201.47	-1.47	0.73

2. Common mode sensitivity

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

3	Common mode Input Voltage (mV)	High Range Average Reading (μV)	Low Range Average Reading (μV)
Channel X	200	7.07	5.75
	- 200	-4.60	-6.25
Channel Y	200	9.48	9.62
	- 200	-10.39	-10.96
Channel Z	200	8.79	8.42
	- 200	-9.64	-9.80

3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Input Voltage (mV)	Channel X (μV)	Channel Y (μV)	Channel Z (μV)
Channel X	200	-	0.03	0.35
Channel Y	200	1.14	-	2.31
Channel Z	200	2.01	0.80	<u>-</u>

4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	High Range (LSB)	Low Range (LSB)
Channel X	16343	16314
Channel Y	16194	16427
Channel Z	15816	16265

5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Input 10MΩ

	Average (μV)	min. Offset (μV)	max. Offset (μV)	Std. Deviation (μV)
Channel X	-0.70	-1.94	0.80	0.49
Channel Y	-1.55	-2.12	-0.66	0.27
Channel Z	0.57	-0.11	5.61	0.62

6. Input Offset Current

Nominal Input circuitry offset current on all channels: <25fA

7. Input Resistance (Typical values for information)

	Zeroing (kOhm)	Measuring (MOhm)
Channel X	200	200
Channel Y	200	200
Channel Z	200	200

8. Low Battery Alarm Voltage (Typical values for information)

Typical values	Alarm Level (VDC)	
Supply (+ Vcc)	+7.9	
Supply (- Vcc)	-7.6	

9. Power Consumption (Typical values for information)

Typical values	Switched off (mA)	Stand by (mA)	Transmitting (mA)
Supply (+ Vcc)	+0.01	+6	+14
Supply (- Vcc)	0.01	-8	-9



D4: SYSTEM VALIDATION DIPOLE

Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





Schweizerischer Kalibrierdienst Service suisse d'étalonnage Servizio svizzero di taratura Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Client

ADT (Auden)

Accreditation No.: SCS 108

C

Certificate No: D835V2-4d021_Apr10

CALIBRATION CERTIFICATE

Object D835V2 - SN: 4d021

Calibration procedure(s) QA CAL-05.v7

Calibration procedure for dipole validation kits

Calibration date:

April 29, 2010

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).

The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID#	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	06-Oct-09 (No. 217-01086)	Oct-10
Power sensor HP 8481A	US37292783	06-Oct-09 (No. 217-01086)	Oct-10
Reference 20 dB Attenuator	SN: 5086 (20g)	30-Mar-10 (No. 217-01158)	Mar-11
Type-N mismatch combination	SN: 5047.2 / 06327	30-Mar-10 (No. 217-01162)	Mar-11
Reference Probe ES3DV3	SN: 3205	26-Jun-09 (No. ES3-3205_Jun09)	Jun-10
DAE4	SN: 601	02-Mar-10 (No. DAE4-601_Mar10)	Mar-11
Secondary Standards	ID#	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-09)	In house check: Oct-11
RF generator R&S SMT-06	100005	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-09)	In house check: Oct-10
	Name	Function	Signature
200 PROFESSOR (1990)	11220000000000000000000000000000000000		

Calibrated by:

Dimce Iliev Laboratory Technician

Approved by:

Katja Pokovic Technical Manager

Issued: April 29, 2010

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: D835V2-4d021_Apr10

Page 1 of 9

Calibration Laboratory of

Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland





S Schweizerischer Kalibrierdienst
Service suisse d'étalonnage
Servizio svizzero di taratura
Swiss Calibration Service

Accreditation No.: SCS 108

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL tissue simulating liquid

ConvF sensitivity in TSL / NORM x,y,z N/A not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

d) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL: The dipole is mounted with the spacer to position its feed
 point exactly below the center marking of the flat phantom section, with the arms oriented
 parallel to the body axis.
- Feed Point Impedance and Return Loss: These parameters are measured with the dipole
 positioned under the liquid filled phantom. The impedance stated is transformed from the
 measurement at the SMA connector to the feed point. The Return Loss ensures low
 reflected power. No uncertainty required.
- Electrical Delay: One-way delay between the SMA connector and the antenna feed point.
 No uncertainty required.
- SAR measured: SAR measured at the stated antenna input power.
- SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.

Measurement Conditions

DASY system configuration, as far as not given on page 1

DASY Version	DASY5	V5.2
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V4.9	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy , $dz = 5 mm$	
Frequency	835 MHz ± 1 MHz	

Head TSL parameters
The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.90 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	41.8 ± 6 %	0.89 mho/m ± 6 %
Head TSL temperature during test	(22.0 ± 0.2) °C		4.27.20

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.37 mW / g
SAR normalized	normalized to 1W	9.48 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	9.58 mW /g ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.55 mW / g
SAR normalized	normalized to 1W	6.20 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	6.24 mW /g ± 16.5 % (k=2)

Certificate No: D835V2-4d021_Apr10

Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.2	0.97 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	54.9 ± 6 %	0.99 mho/m ± 6 %
Body TSL temperature during test	(22.0 ± 0.2) °C		~ ~ ~ ~

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.52 mW / g
SAR normalized	normalized to 1W	10.1 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	9.91 mW / g ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.65 mW / g
SAR normalized	normalized to 1W	6.60 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	6.52 mW / g ± 16.5 % (k=2)

Certificate No: D835V2-4d021_Apr10

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	51.5 Ω - 2.5 jΩ
Return Loss	- 31.0 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	48.1 Ω - 3.9 jΩ
Return Loss	- 27.1 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.392 ns

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	April 22, 2004

Certificate No: D835V2-4d021_Apr10 Page 5 of 9

DASY5 Validation Report for Head TSL

Date/Time: 21.04.2010 10:38:05

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d021

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL900

Medium parameters used: f = 835 MHz; $\sigma = 0.89$ mho/m; $\varepsilon_r = 41.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

Probe: ES3DV3 - SN3205; ConvF(6.04, 6.04, 6.04); Calibrated: 26.06.2009

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn601; Calibrated: 02.03.2010

Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 57

Pin=250 mW /d=15mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) /Cube 0: Measurement


grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 57.3 V/m; Power Drift = 0.018 dB

Peak SAR (extrapolated) = 3.55 W/kg


SAR(1 g) = 2.37 mW/g; SAR(10 g) = 1.55 mW/g

Maximum value of SAR (measured) = 2.77 mW/g

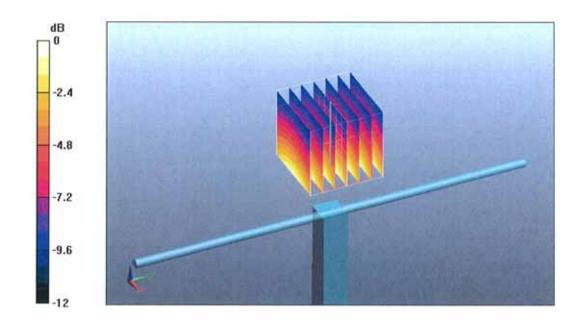

0 dB = 2.77 mW/g

Impedance Measurement Plot for Head TSL

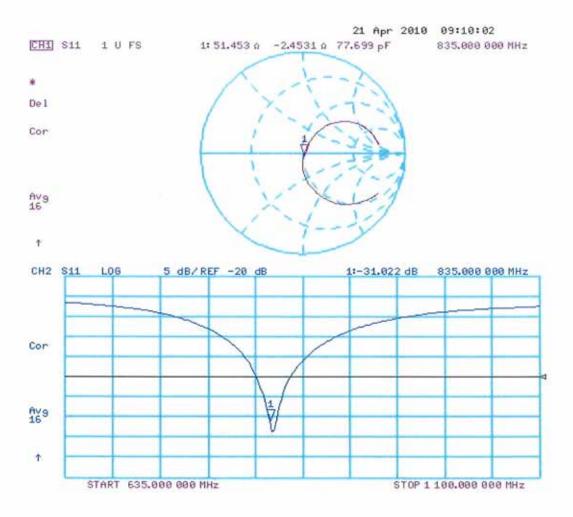

DASY5 Validation Report for Body

Date/Time: 29.04.2010 13:27:42

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d021

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: MSL900

Medium parameters used: f = 835 MHz; $\sigma = 0.99$ mho/m; $\varepsilon_r = 54.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

Probe: ES3DV3 - SN3205; ConvF(5.97, 5.97, 5.97); Calibrated: 26.06.2009

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn601; Calibrated: 02.03.2010

Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001

Measurement SW: DASY5, V5.2 Build 162; SEMCAD X Version 14.0 Build 57

Pin250 mW /d=15mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) /Cube 0: Measurement


grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 56.1 V/m; Power Drift = 0.030 dB

Peak SAR (extrapolated) = 3.73 W/kg


SAR(1 g) = 2.52 mW/g; SAR(10 g) = 1.65 mW/g

Maximum value of SAR (measured) = 2.93 mW/g

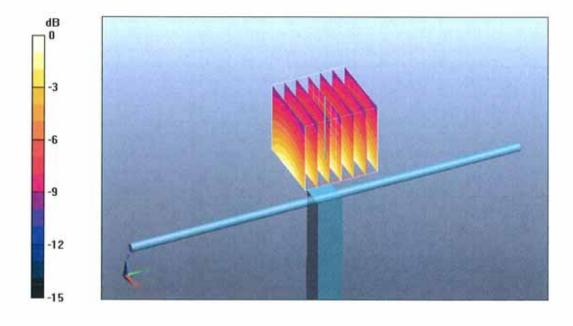

0 dB = 2.93 mW/g

Impedance Measurement Plot for Body TSL

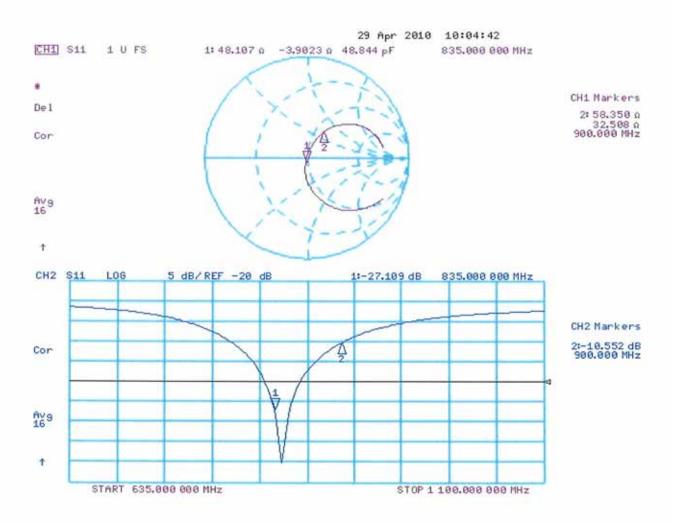

Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





S Schweizerischer Kalibrierdienst
Service suisse d'étalonnage
Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Client

B.V. ADT (Auden)

Certificate No: D1900V2-5d022_Jan11

Accreditation No.: SCS 108

CALIBRATION CERTIFICATE

Object D1900V2 - SN: 5d022

Calibration procedure(s) QA CAL-05.v8

Calibration procedure for dipole validation kits

Calibration date: January 26, 2011

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID#	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	06-Oct-10 (No. 217-01266)	Oct-11
Power sensor HP 8481A	US37292783	06-Oct-10 (No. 217-01266)	Oct-11
Reference 20 dB Attenuator	SN: 5086 (20g)	30-Mar-10 (No. 217-01158)	Mar-11
Type-N mismatch combination	SN: 5047.2 / 06327	30-Mar-10 (No. 217-01162)	Mar-11
Reference Probe ES3DV3	SN: 3205	30-Apr-10 (No. ES3-3205_Apr10)	Apr-11
DAE4	SN: 601	10-Jun-10 (No. DAE4-601_Jun10)	Jun-11
Secondary Standards	ID#	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-09)	In house check: Oct-11
RF generator R&S SMT-06	100005	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-10)	In house check: Oct-11
	Name	Function	Signature
Calibrated by:	Dimce Iliev	Laboratory Technician	D. Eier
Approved by:	Katja Pokovic	Technical Manager	m 1. 1

Issued: January 27, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Calibration Laboratory of

Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland





S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
Servizio svizzero di taratura
Swiss Calibration Service

Accreditation No.: SCS 108

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Glossary:

TSL

tissue simulating liquid

ConvF N/A sensitivity in TSL / NORM x,y,z not applicable or not measured

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

Additional Documentation:

d) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL: The dipole is mounted with the spacer to position its feed
 point exactly below the center marking of the flat phantom section, with the arms oriented
 parallel to the body axis.
- Feed Point Impedance and Return Loss: These parameters are measured with the dipole
 positioned under the liquid filled phantom. The impedance stated is transformed from the
 measurement at the SMA connector to the feed point. The Return Loss ensures low
 reflected power. No uncertainty required.
- Electrical Delay: One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured: SAR measured at the stated antenna input power.
- SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.

Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.6
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V5.0	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1900 MHz ± 1 MHz	

Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.0	1.40 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	38.5 ± 6 %	1.43 mho/m ± 6 %
Head TSL temperature during test	(20.5 ± 0.2) °C		

SAR result with Head TSL

SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	10.4 mW / g
SAR normalized	normalized to 1W	41.6 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	40.9 mW /g ± 17.0 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL	condition	
SAR measured	250 mW input power	5.37 mW / g
SAR normalized	normalized to 1W	21.5 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	21.3 mW /g ± 16.5 % (k=2)

Body TSL parameters
The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.3	1.52 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	52.9 ± 6 %	1.56 mho/m ± 6 %
Body TSL temperature during test	(20.8 ± 0.2) °C		

SAR result with Body TSL

SAR averaged over 1 cm ³ (1 g) of Body TSL	Condition		
SAR measured	250 mW input power	10.4 mW / g	
SAR normalized	normalized to 1W	41.6 mW / g	
SAR for nominal Body TSL parameters	normalized to 1W	40.9 mW / g ± 17.0 % (k=2)	

SAR averaged over 10 cm ³ (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.48 mW / g
SAR normalized	normalized to 1W	21.9 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	21.7 mW / g ± 16.5 % (k=2)

Certificate No: D1900V2-5d022_Jan11

Appendix

Antenna Parameters with Head TSL

Impedance, transformed to feed point	51.5 Ω + 4.0 jΩ
Return Loss	- 27.6 dB

Antenna Parameters with Body TSL

Impedance, transformed to feed point	46.2 Ω + 4.0 jΩ
Return Loss	- 24.9 dB

General Antenna Parameters and Design

Electrical Delay (one direction)	1.193 ns

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data

Manufactured by	SPEAG
Manufactured on	August 29, 2002

DASY5 Validation Report for Head TSL

Date/Time: 24.01.2011 11:20:43

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d022

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL U12 BB

Medium parameters used: f = 1900 MHz; $\sigma = 1.42 \text{ mho/m}$; $\varepsilon_r = 38.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

Probe: ES3DV3 - SN3205; ConvF(5.09, 5.09, 5.09); Calibrated: 30.04.2010

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn601; Calibrated: 10.06.2010

Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001

Measurement SW: DASY52, V52.6.1 Build (408)

Postprocessing SW: SEMCAD X, V14.4.2 Build (2595)

Pin=250 mW /d=10mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) /Cube 0: Measurement


grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 99.002 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 19.131 W/kg


SAR(1 g) = 10.4 mW/g; SAR(10 g) = 5.37 mW/g

Maximum value of SAR (measured) = 12.963 mW/g

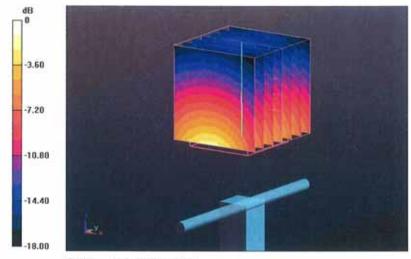

0 dB = 12.960 mW/g

Impedance Measurement Plot for Head TSL

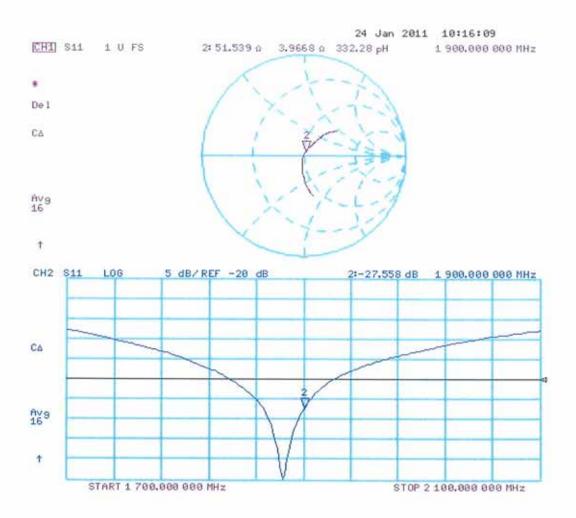

DASY5 Validation Report for Body TSL

Date/Time: 26.01.2011 12:06:07

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d022

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL U12 BB

Medium parameters used: f = 1900 MHz; $\sigma = 1.56 \text{ mho/m}$; $\varepsilon_r = 53.1$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

Probe: ES3DV3 - SN3205; ConvF(4.59, 4.59, 4.59); Calibrated: 30.04.2010

Sensor-Surface: 3mm (Mechanical Surface Detection)

Electronics: DAE4 Sn601; Calibrated: 10.06.2010

Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002

Measurement SW: DASY52, V52.6.1 Build (408)

Postprocessing SW: SEMCAD X, V14.4.2 Build (2595)

Pin=250 mW /d=10mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) /Cube 0: Measurement


grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 96.936 V/m; Power Drift = -0.0021 dB

Peak SAR (extrapolated) = 17.774 W/kg

SAR(1 g) = 10.4 mW/g; SAR(10 g) = 5.48 mW/g

Maximum value of SAR (measured) = 13.186 mW/g

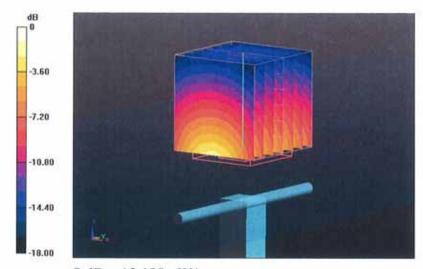

0 dB = 13.190 mW/g

Impedance Measurement Plot for Body TSL

