



---

# TEST REPORT

---

Report No.: SRTC2015-9004(F)-0007

Product Name: GSM/GPRS/EDGE/UMTS Digital Mobile Phone  
with Bluetooth and Wi-Fi

Product Model: Philips S309

Applicant: Shenzhen Sang Fei Consumer Communications Co.,Ltd.

Manufacturer: Shenzhen Sang Fei Consumer Communications Co.,Ltd

Specification: FCC Part 24E, Part 22H, Part 2 (April 22, 2015 edition)

FCC ID: VQRCTS309

The State Radio\_monitoring\_center Testing Center (SRTC)

No.80 Beilishi Road Xicheng District Beijing, China

Tel: 86-10-68009202    Fax: 86-10-680092

## CONTENTS

1. GENERAL INFORMATION .....	2
1.1 Notes of the test report .....	2
1.2 Information about the testing laboratory .....	2
1.3 Applicant's details .....	2
1.4 Manufacturer's details.....	2
1.5 Application details .....	3
1.6 Reference specification .....	3
1.7 Information of EUT .....	3
1.7.1 General information.....	3
1.7.2 Auxiliary equipment details .....	4
2. TEST INFORMATION .....	5
2.1 Summary of the test results .....	5
2.2 Test result .....	6
2.2.1 WCDMA Band II.....	6
2.2.1.1 RF Power Output-FCC Part24.232(b).....	6
2.2.1.2 Effective Isotropic Radiated Power-FCC Part24.232(b) .....	7
2.2.1.3 Occupied Bandwidth-FCC Part2.1049.....	10
2.2.1.4 Emission Bandwidth-FCC Part24.238(b).....	14
2.2.1.5 Spurious Emissions at antenna terminal-FCC Part2.1051/24.238 .....	15
2.2.1.6 Band Edges Compliance-FCC Part24.238(b).....	19
2.2.1.7 Frequency Stability-FCC Part2.1055/24.235 .....	22
2.2.1.8 Radiated Spurious Emissions-FCC Part2.1053/24.238 .....	24
2.2.2 WCDMA Band V .....	28
2.2.2.1 RF Power Output-FCC Part22.913(a).....	28
2.2.2.2 Effective Radiated Power-FCC Part22.913(a).....	29
2.2.2.3 Occupied Bandwidth-FCC Part2.1049.....	32
2.2.2.4 Emission Bandwidth-FCC Part22.917(b) .....	36
2.2.2.5 Spurious Emissions at antenna terminal-FCC Part2.1051/22.917 .....	37
2.2.2.6 Band Edges Compliance-FCC Part22.917(b).....	41
2.2.2.7 Frequency Stability-FCC Part2.1055/22.355 .....	44
2.2.2.8 Radiated Spurious Emissions-FCC Part2.1053/22.917(a) .....	46
2.3. List of test equipments.....	50
Appendix .....	51

## 1. GENERAL INFORMATION

### 1.1 Notes of the test report

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written permission of The State Radio\_monitoring\_center Testing Center (SRTC).

The test results relate only to individual items of the samples which have been tested.

### 1.2 Information about the testing laboratory

Company:	The State Radio_monitoring_center Testing Center (SRTC)
Address:	No.80 Beilishi Road, Xicheng District
City:	Beijing
Country or Region:	P.R.China
Contacted person:	Wang Junfeng
Tel:	+86 10 68009181 +86 10 68009202
Fax:	+86 10 68009195 +86 10 68009205
Email:	wangjf@srrc.org.cn / wangjunfeng@srtc.org.cn

### 1.3 Applicant's details

Company:	Shenzhen Sang Fei Consumer Communications Co.,Ltd.
Address:	11 Science & Technology Rd., Shenzhen Hi-tech Industrial Park, Nanshan District
City:	Shenzhen
Country or Region:	P.R.China
Grantee Code:	VQRCT
Contacted person:	Helen.Lin
Tel:	0755-33308888
Fax:	0755-26614979
Email:	Helen.Lin@sangfei.com

### 1.4 Manufacturer's details

Company:	Shenzhen Sang Fei Consumer Communications Co.,Ltd.
Address:	11 Science & Technology Rd., Shenzhen Hi-tech Industrial Park, Nanshan District
City:	Shenzhen
Country or Region:	P.R.China
Contacted person:	Helen.Lin
Tel:	0755-33308888
Fax:	0755-26614979
Email:	Helen.Lin@sangfei.com

## 1.5 Application details

Date of Receipt of test sample at SRTC:	2015.05.04
Testing Start Date:	2015.05.05
Testing End Date:	2015.05.20

## 1.6 Reference specification

FCC Part 24E, Part22H, Part 2 (April 22, 2015 edition)

## 1.7 Information of EUT

### 1.7.1 General information

Frequency Range	WCDMA Band II: Tx:1850~1910MHz Rx:1930~1990MHz WCDMA Band V: Tx:824~849MHz Rx:869~894MHz
Rated Output Power	WCDMA Band II:24.0dBm WCDMA Band V:24.0dBm
Modulation Type	QPSK
Emission Designator	4M50F9W
Duplex Mode	FDD
Duplex Spacing	WCDMA Band II:80MHz WCDMA Band V:45MHz
Antenna Type	Fixed Internal
Power Supply	Battery or Charger
Rated Power Supply Voltage	3.8V
Extreme Temperature	Lowest: -30°C Highest: +50°C
Extreme Voltage	Minimum: 3.5V Maximum: 4.2V
HW Version	WMCSa
SW Version	Philips_S309_1516_V01T03_AG
IMEI	866636020005538

### 1.7.2 Auxiliary equipment details

The following support equipment was used to exercise the EUT during testing:

Equipment	Battery
Manufacturer	SHENZHEN CYCLELONG POWER-TECH CO.,Ltd.
Model Number	AB1600DWML
Serial Number	----

## 2. TEST INFORMATION

### 2.1 Summary of the test results

No.	Test case	FCC reference	Verdict
1	RF Power Output	22.913(a)/24.232(b)	Pass
2	Effective Radiated Power and Effective Isotropic Radiated Power	22.913(a)/24.232(b)	Pass
3	Occupied Bandwidth	2.1049	Pass
4	Emission Bandwidth	22.917(b)/24.238(b)	Pass
5	Spurious Emissions at antenna terminal	2.1051/22.917/24.238	Pass
6	Band Edges Compliance	22.917(b)/24.238(b)	Pass
7	Frequency Stability	2.1055/22.355/24.235	Pass
8	Radiated Spurious Emissions	2.1053/22.917(a)/24.238	Pass

This Test Report Is Issued by: Ms. Xu Qiaochun 	Checked by: Mr. Li Bin 
Tested by: Mr. Jiang Shuo 	Issued date: 2015.05.21

## 2.2 Test result


### 2.2.1 WCDMA Band II

#### 2.2.1.1 RF Power Output-FCC Part24.232(b)

Ambient condition:

Temperature	Relative humidity	Pressure
23°C	42%	101.9kPa

Test Setup:

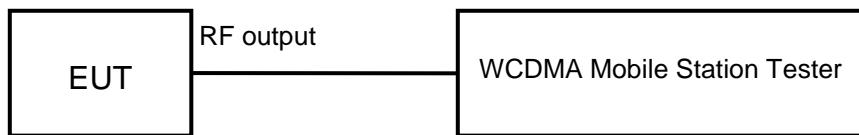

Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. Then the test data can be read at the tester screen. The loss between RF output port of the EUT and the input port of the tester will be taken into consideration.

The measurement will be conducted at three channels No9262, No9400 and No9538 (Bottom, middle and top channels of WCDMA band II)

Limits	
	≤24dBm

Test result:

WCDMA Mode:

Carrier frequency (MHz)	Channel No.	RF Power Output (dBm)
1852.4	9262	22.53
1880.0	9400	22.34
1907.6	9538	22.14

HSDPA/HSUPA Mode:


Carrier frequency (MHz)	Channel No.	RF Power Output (dBm)
1852.4	9262	21.12
1880.0	9400	21.00
1907.6	9538	20.77

### 2.2.1.2 Effective Isotropic Radiated Power-FCC Part24.232(b)


Ambient condition:

Temperature	Relative humidity	Pressure
20.8°C	36.5%	100.9kPa

Test setup:

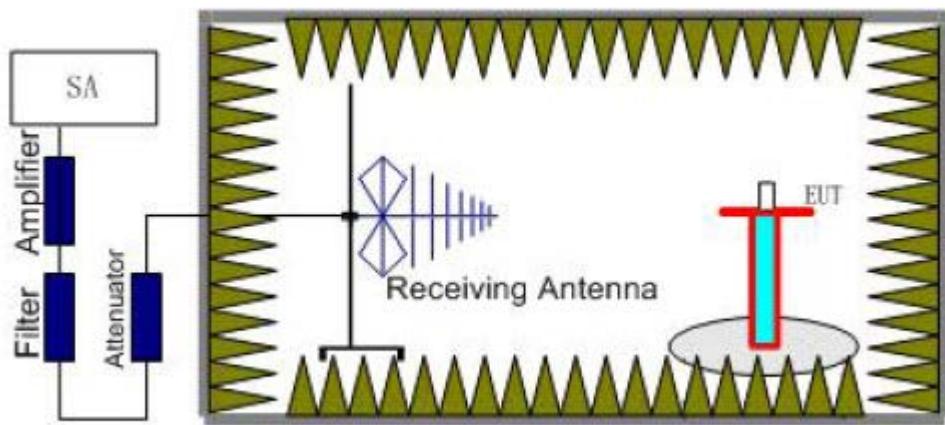

Step 1

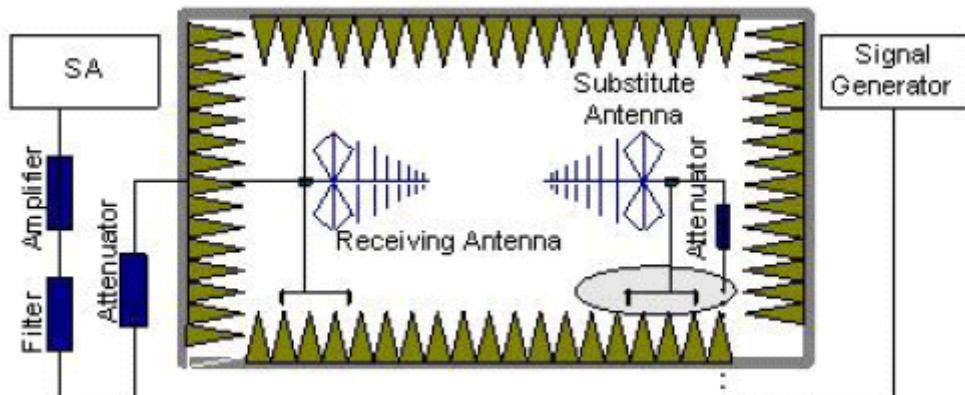

Step 2

### Test procedure:

The measurements procedures in TIA-603C-2004 are used.

#### Step 1:

The measurement is carried out in the fully anechoic chamber. EUT was placed on a 2.4 meters high non-conductive table at a 3 meters test distance from the test receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT. The height of receiving antenna is 2.4m and varies in certain range to find the maximum power value. A radio link shall be established between EUT and Tester. The output power of the cell signal of the tester will be decreased until the output power of the EUT reach a maximum value. A peak detector is used and RBW is set to 3MHz. Then the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turn table shall be rotated from 0 to 360 degrees for detecting the maximum power value on spectrum analyzer or receiver. And the maximum value of the receiver should be recorded as (Pr).

#### Step 2:

A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator. To repeat the same procedure as step1 and the level of signal generator will be adjusted till the same power value on the spectrum analyzer or receiver. The ERP/EIRP of the EUT can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.

A power (Pmea) is applied to the input of the substitution antenna, and adjusts the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (Pmea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

A "reference path loss" should be calculated after test. The attenuation of "reference path loss" is the cable loss between the Signal Source with the Substitution Antenna (Pca) and the Substitution Antenna Gain (Ga).

The measurement results are obtained as described below:

$$\text{Power (EIRP)} = \text{Pmea} + \text{Pca} + \text{Ga}$$

The measurement will be done at three channels No9262, No9400 and No9538 (Bottom, middle and top channels of WCDMA band II).

Limits	≤33dBm
--------	--------

## Test result:

## WCDMA Mode:

Frequency (MHz)	Peak EIRP(dBm)	Pca Cable loss	Ga Antenna Gain (dB)	Pmea (dBm)	Polarization
1852.4	22.8	-5	8.6	19.2	Vertical
1880.0	22.9	-5	8.6	19.3	Vertical
1907.6	22.6	-5	8.6	19.0	Vertical

## HSDPA/HSUPA Mode:


Frequency (MHz)	Peak EIRP(dBm)	Pca Cable loss	Ga Antenna Gain (dB)	Pmea (dBm)	Polarization
1852.4	22.6	-5	8.6	19.0	Vertical
1880.0	22.9	-5	8.6	19.3	Vertical
1907.6	22.7	-5	8.6	19.1	Vertical

### 2.2.1.3 Occupied Bandwidth-FCC Part2.1049

Ambient condition:

Temperature	Relative humidity	Pressure
23°C	42%	101.9kPa

Test Setup:

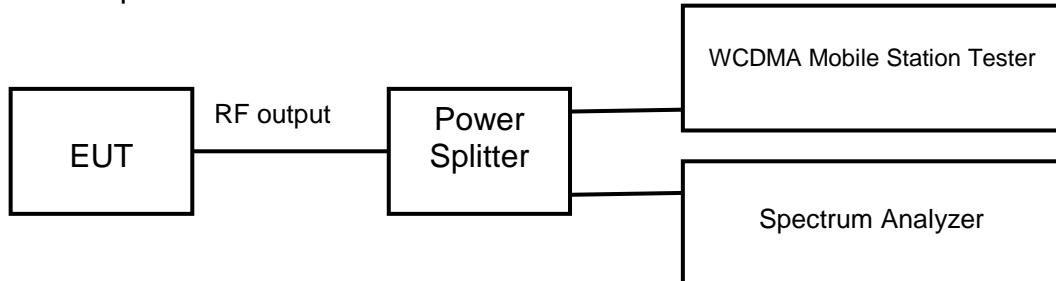

Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. The occupied bandwidth is measured using spectrum analyzer. RBW is set to 51kHz on spectrum analyzer. The bandwidth of 99% power can be read on spectrum analyzer.

The measurement will be conducted at three channels No9262, No9400 and No9538 (Bottom, middle and top channels of WCDMA band II)

Limits: No specific occupied bandwidth requirements in part 2.1049

Test result:


WCDMA Mode:

Carrier frequency (MHz)	Channel No.	Bandwidth of 99% Power (MHz)
1852.4	9262	4.150
1880.0	9400	4.166
1907.6	9538	4.156


HSDPA/HSUPA Mode:

Carrier frequency (MHz)	Channel No.	Bandwidth of 99% Power (MHz)
1852.4	9262	4.153
1880.0	9400	4.158
1907.6	9538	4.157


WCDMA Mode:

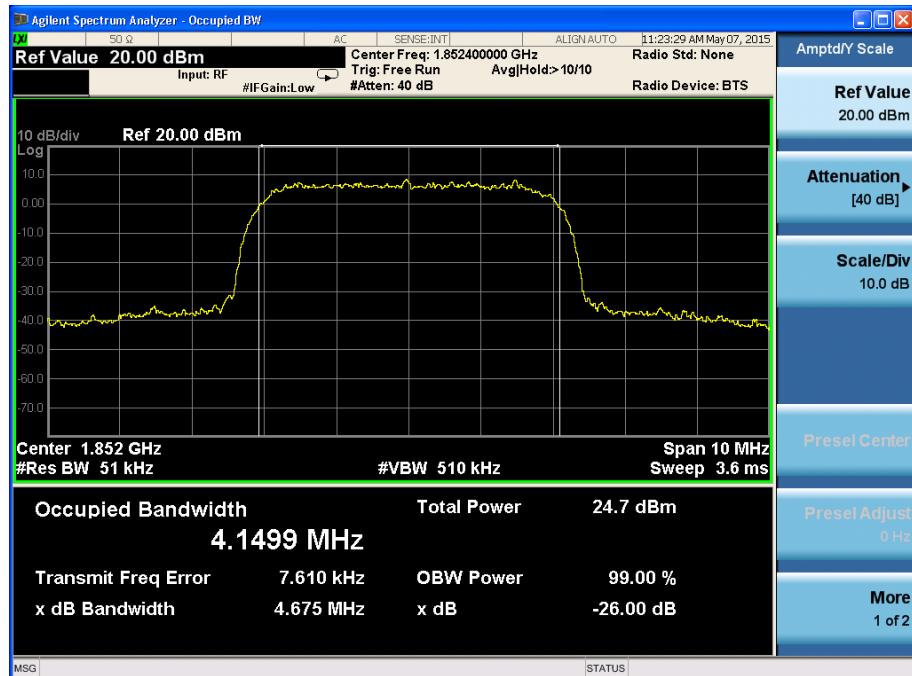

Channel 9262

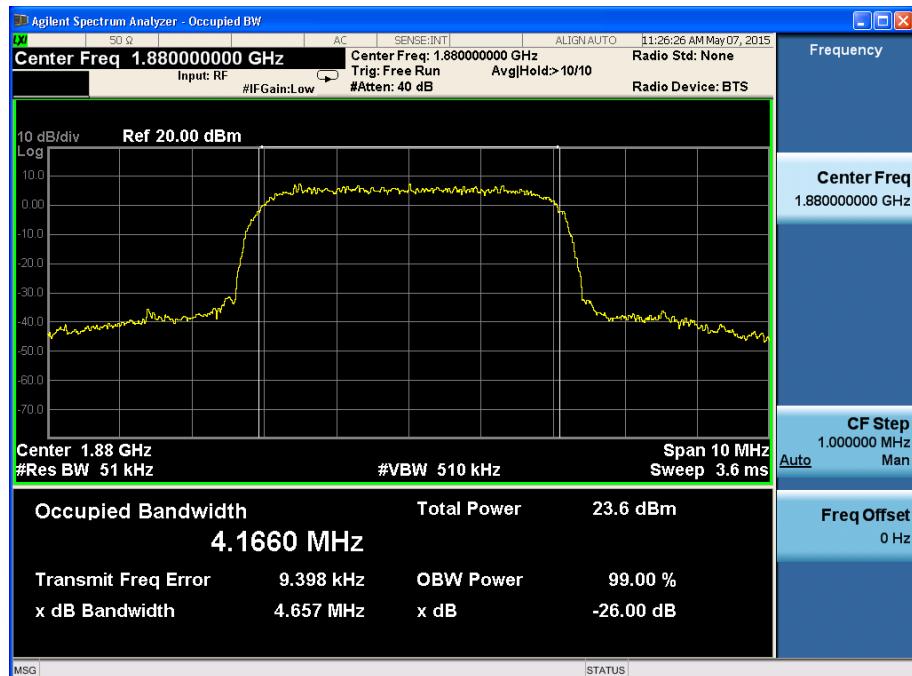


Channel 9400

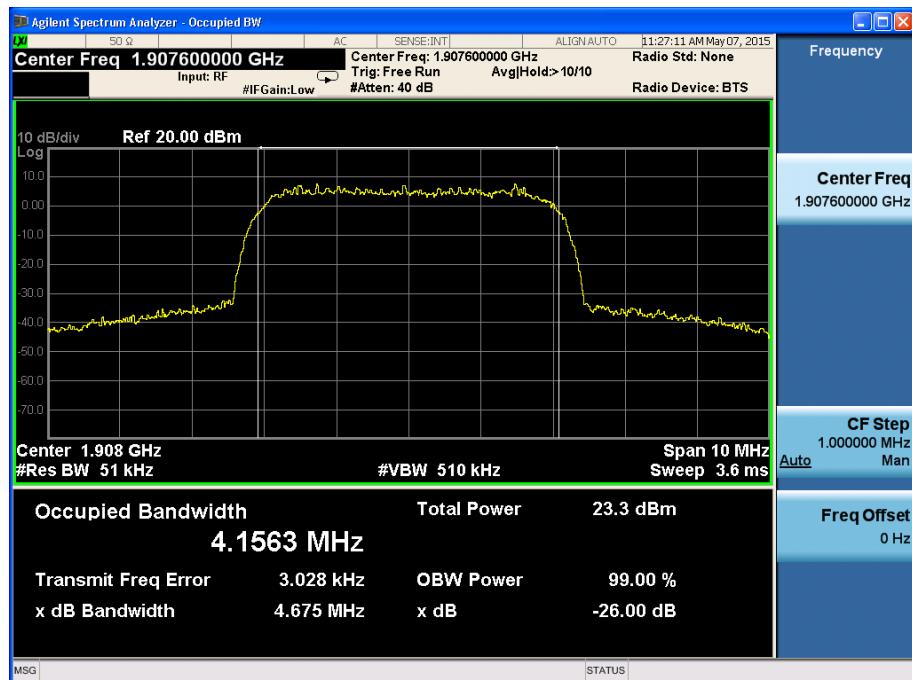


Channel 9538


### HSDPA/HSUPA Mode:

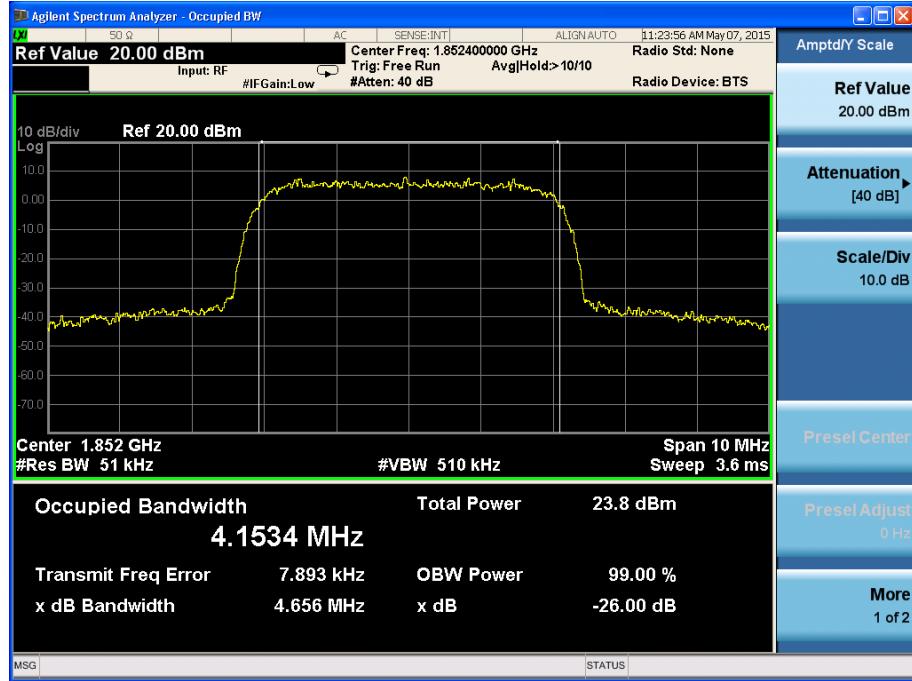

Channel 9262

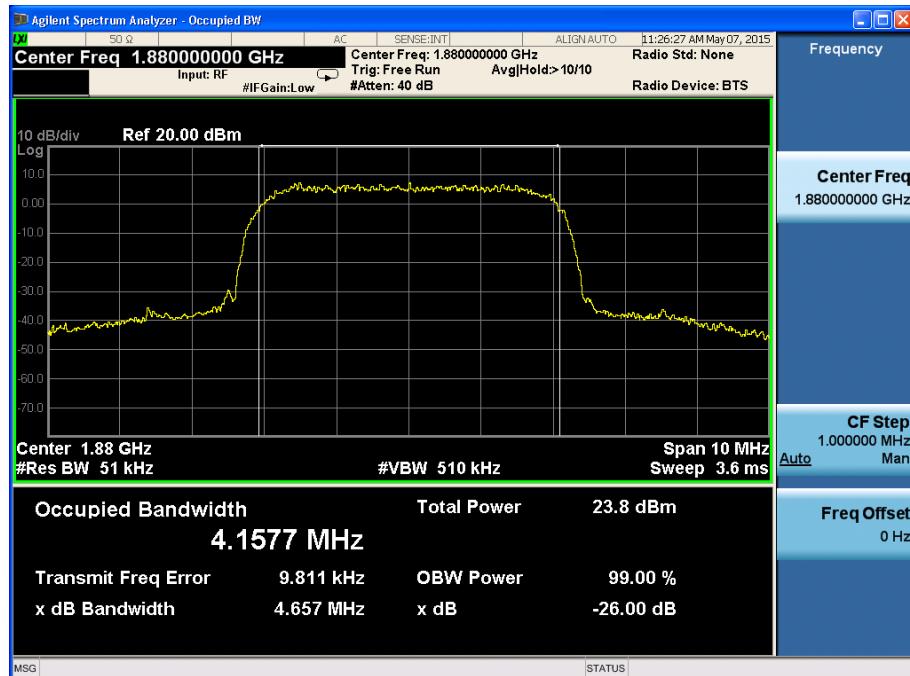

## Channel 9400

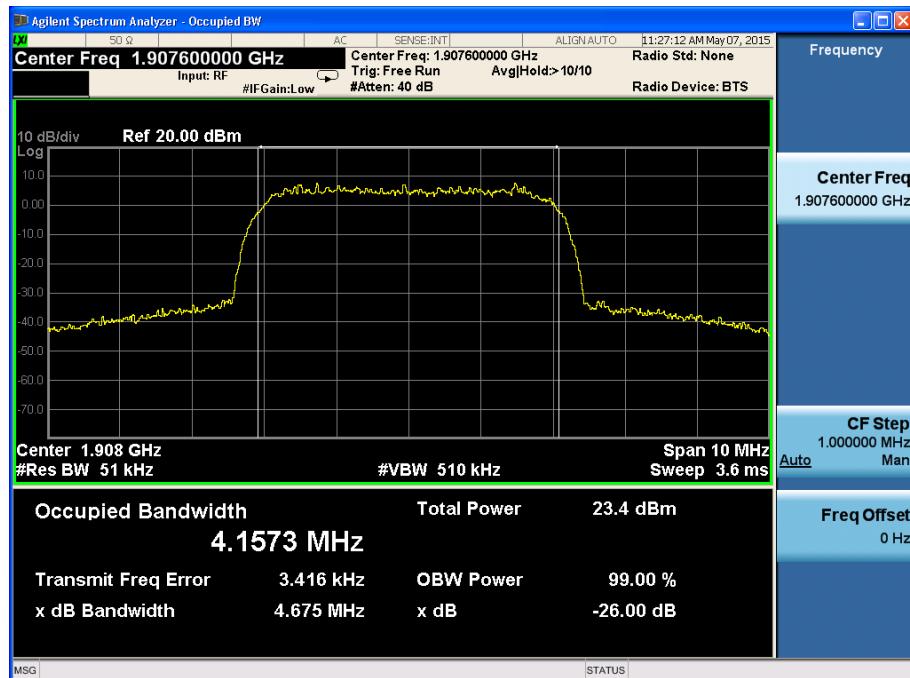


## Channel 9538

### 2.2.1.4 Emission Bandwidth-FCC Part24.238(b)

Ambient condition:

Temperature	Relative humidity	Pressure
23°C	42%	101.9kPa

Test Setup:

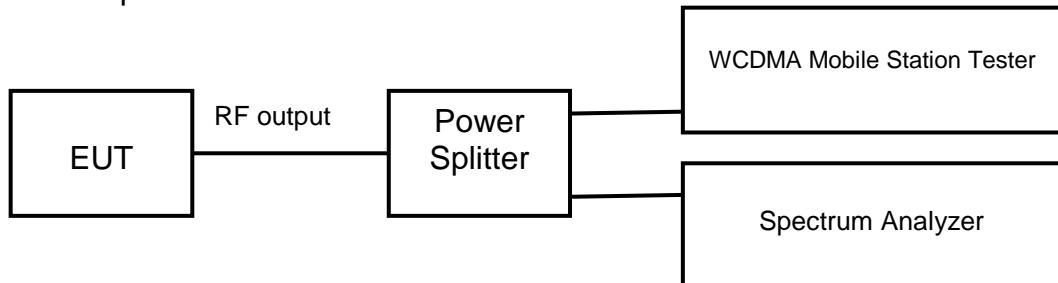

Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. The emission bandwidth is measured using spectrum analyzer. RBW is set to 30kHz on spectrum analyzer. The bandwidth of -26dBc power can be read on spectrum analyzer.

The measurement will be conducted at three channels No9262, No9400 and No9538 (Bottom, middle and top channels of WCDMA band II)

Limits: No specific emission bandwidth requirements in part 24.238(b)

Test result:

WCDMA Mode:

Carrier frequency (MHz)	Channel No.	Bandwidth of -26dBc Power (MHz)
1852.4	9262	4.675
1880.0	9400	4.657
1907.6	9538	4.675

HSDPA/HSUPA Mode:


Carrier frequency (MHz)	Channel No.	Bandwidth of -26dBc Power (MHz)
1852.4	9262	4.656
1880.0	9400	4.657
1907.6	9538	4.675

### 2.2.1.5 Spurious Emissions at antenna terminal-FCC Part2.1051/24.238

Ambient condition:

Temperature	Relative humidity	Pressure
23°C	42%	101.9kPa

Test Setup:

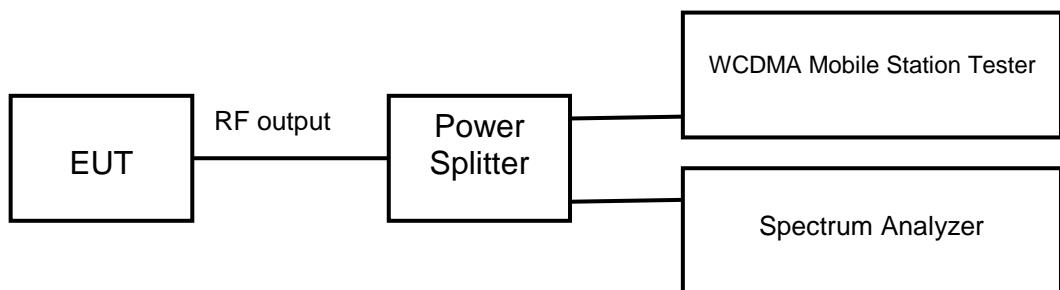

Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. The measurement is carried out using a spectrum analyzer. The spectrum analyzer scans from 30MHz to 20GHz (higher than the 10<sup>th</sup> harmonic of the carrier). The peak detector is used and RBW is set to 1MHz on spectrum analyzer.


The measurement will be conducted at one channel No9400 (middle channel of WCDMA band II)

Limits	≤-13dBm
--------	---------


Test result:

Refer to the following figures.

WCDMA Mode:

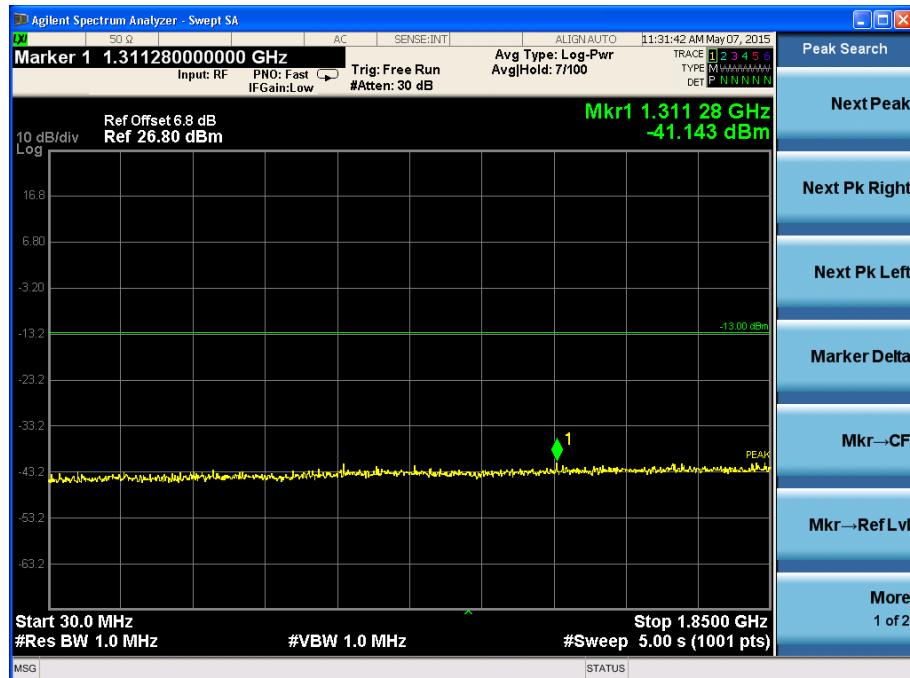

Channel 9400, 30MHz~1850MHz

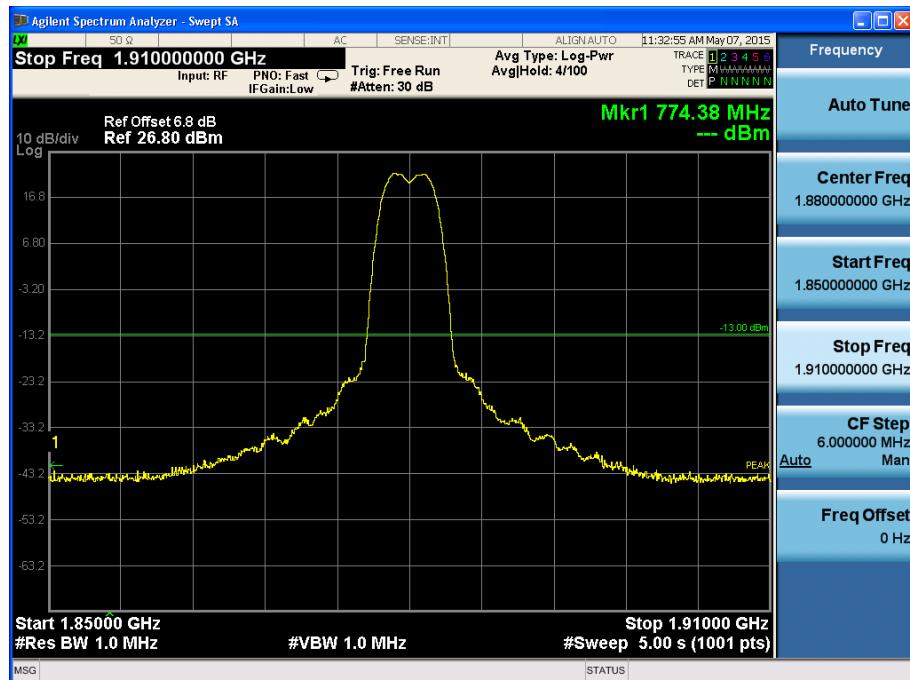


Channel 9400, 1850MHz~1910MHz

Note: The signal beyond the limit is the base station simulator carrier.




Channel 9400, 1910MHz~20GHz

HSDPA/HSUPA Mode:

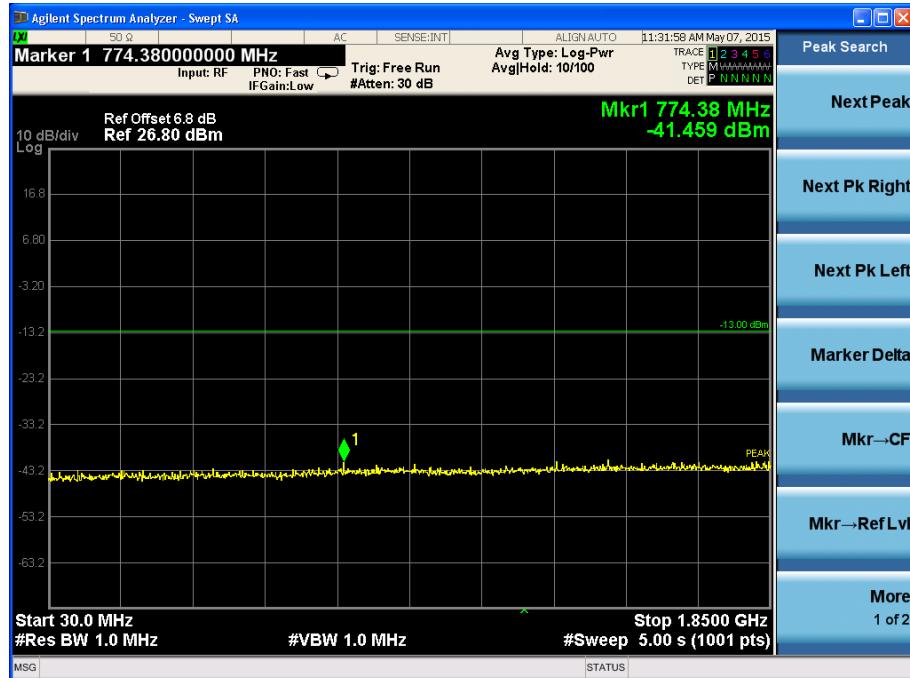

Channel 9400, 30MHz~1850MHz

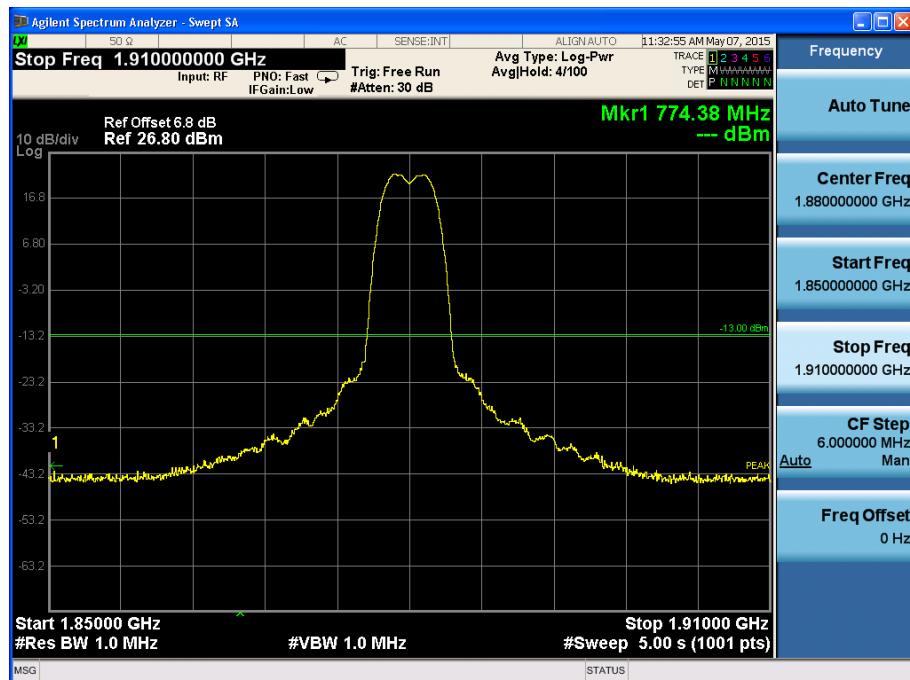

Channel 9400, 1850MHz~1910MHz

Note: The signal beyond the limit is the base station simulator carrier.




Channel 9400, 1910MHz~20GHz

### 2.2.1.6 Band Edges Compliance-FCC Part24.238(b)

Ambient condition:

Temperature	Relative humidity	Pressure
23°C	42%	101.9kPa

Test Setup:

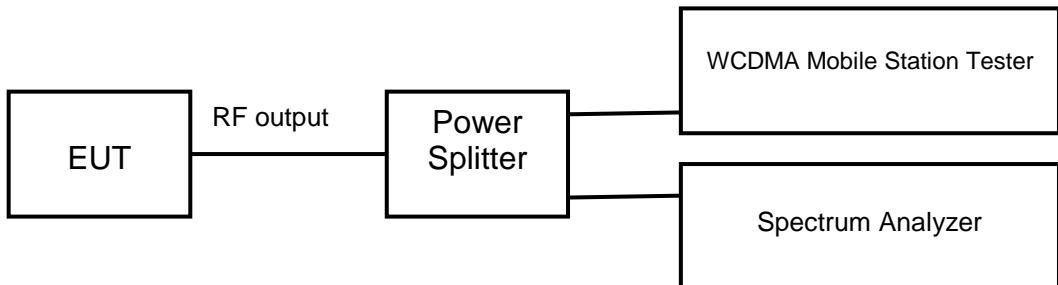

Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. The measurement is carried out using a spectrum analyzer. The peak detector is used and RBW is set to at least 1% of the emission bandwidth on spectrum analyzer.


The measurement will be conducted at two channels No9262 and No9538 (Bottom and top channels of WCDMA band II)

Limits	≤-13dBm
--------	---------

Test result:

Refer to the following figures.

WCDMA Mode:

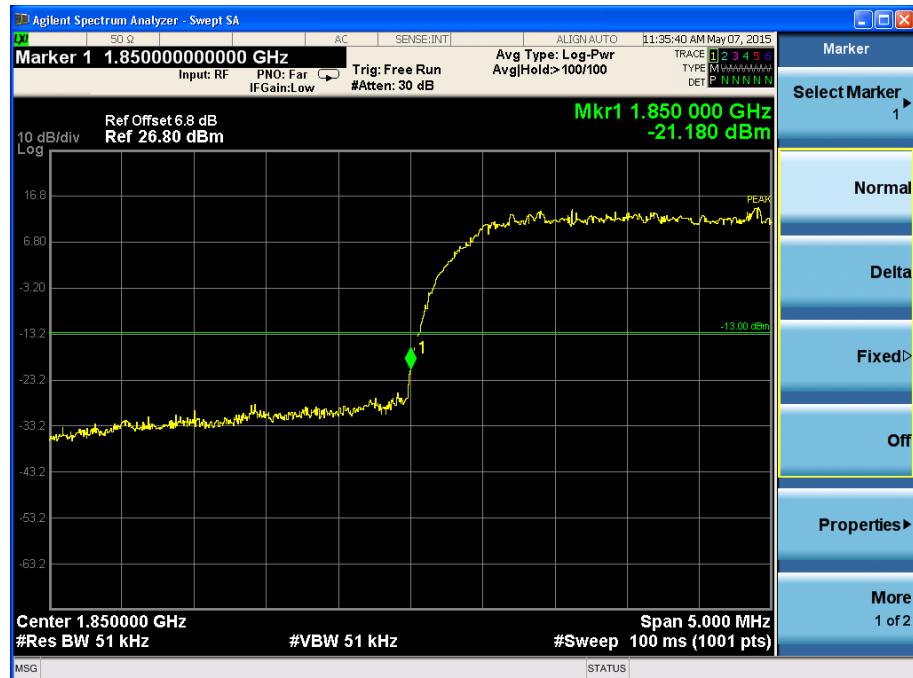


Channel 9262



Channel 9538

HSDPA/HSUPA Mode:

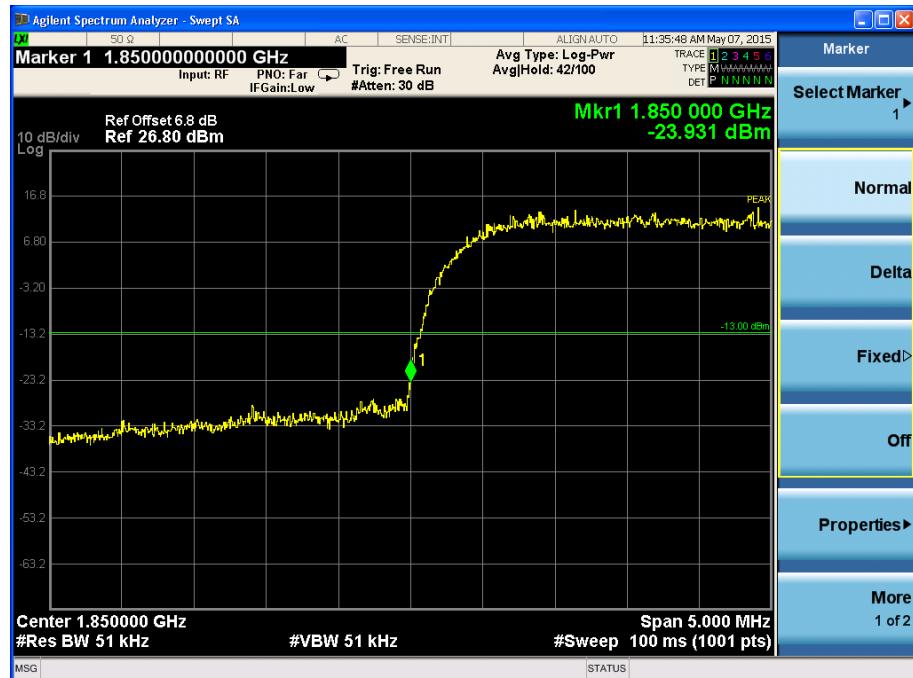

Channel 9262




Channel 9538

### 2.2.1.7 Frequency Stability-FCC Part2.1055/24.235

Ambient condition:

Temperature	Relative humidity	Pressure
23°C	42%	101.9kPa

Test setup:

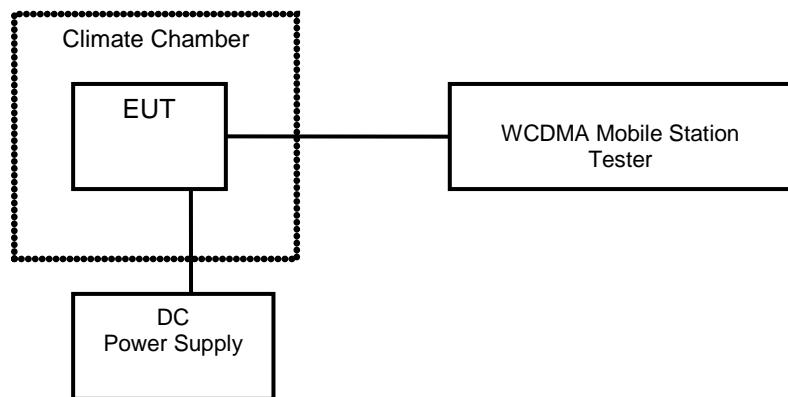

Test Procedure:

A radio link shall be established between EUT and Tester. The tester will sample the transmitter RF output signal and measure its frequency. The temperature inside the climate chamber is varied from -30 to +50°C in 10°C step size, and also the DC power supply voltage to the EUT is varied from LV to HV. The measurement will be conducted at three channels No9262, No9400 and No9538 (Bottom, middle and top channels of WCDMA band II).

Limits: No specific frequency stability requirements in part 2.1055 and part 24.235.

## Test result:

## WCDMA Mode:

Temperature(°C)	Test Result (ppm)@NV		
	Channel 9262	Channel 9400	Channel 9538
-30	0.001	0.002	0.001
-20	0.002	0.002	0.001
-10	0.003	0.003	0.002
0	0.001	0.002	0.003
+10	0.001	0.004	0.004
+20	0.002	0.002	0.002
+30	0.002	0.003	0.002
+40	0.002	0.004	0.001
+50	0.003	0.002	0.002

Voltage	Test Result (ppm)@NT		
	Channel 9262	Channel 9400	Channel 9538
LV	0.002	0.004	0.002
HV	0.004	0.004	0.002

## HSDPA/HSUPA Mode:

Temperature(°C)	Test Result (ppm)@NV		
	Channel 9262	Channel 9400	Channel 9538
-30	0.002	0.001	0.002
-20	0.003	0.003	0.003
-10	0.002	0.001	0.002
0	0.002	0.003	0.001
+10	0.001	0.001	0.002
+20	0.001	0.004	0.001
+30	0.002	0.003	0.002
+40	0.003	0.002	0.003
+50	0.002	0.002	0.002


Voltage	Test Result (ppm)NT		
	Channel 9262	Channel 9400	Channel 9538
LV	0.003	0.002	0.003
HV	0.002	0.003	0.002

### 2.2.1.8 Radiated Spurious Emissions-FCC Part2.1053/24.238


Ambient condition:

Temperature	Relative humidity	Pressure
20.8°C	36.5%	100.9kPa

Test Setup:

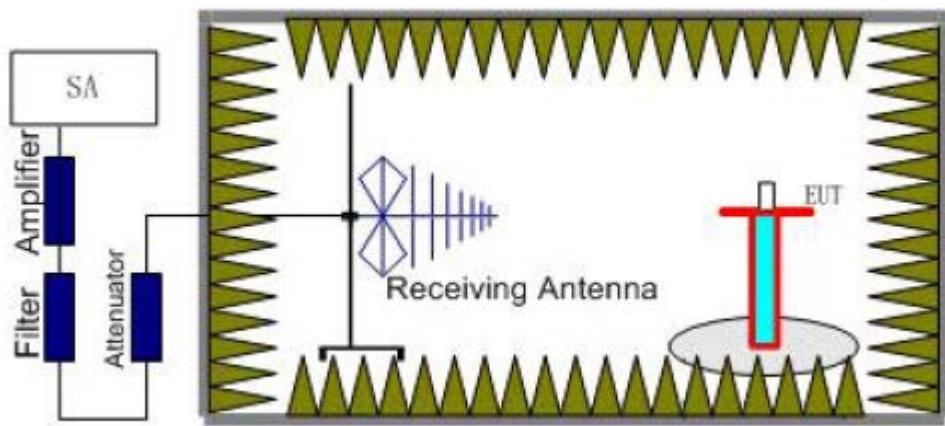

Step 1

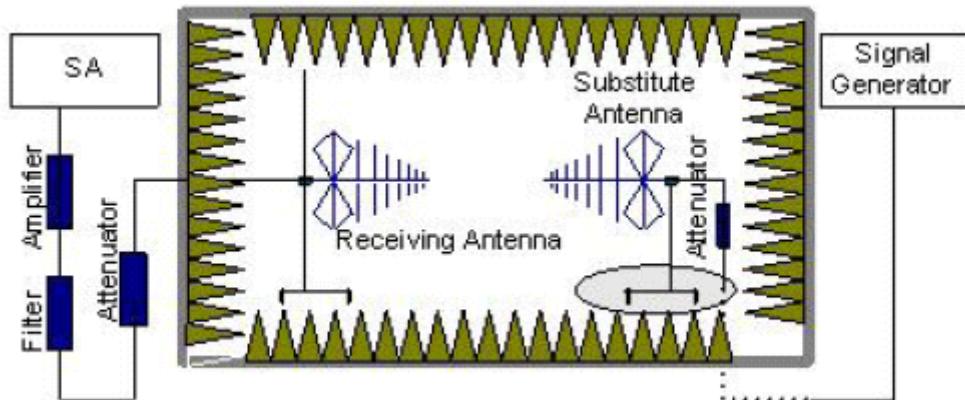

Step 2

### Test procedure:

The measurements procedures in TIA-603C-2004 are used.

The spectrum was scanned from 30MHz to the 10<sup>th</sup> harmonic of the highest frequency generated within the equipment.

#### Step 1:

The measurement is carried out in the fully anechoic chamber. EUT was placed on a 2.4 meter high non-conductive table at a 3 meter test distance from the test receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT. The height of receiving antenna is 2.4m and varies in certain range to find the maximum power value. A radio link shall be established between EUT and Tester. The output power of the cell signal of the tester will be decreased until the output power of the EUT reach a maximum value. The measurement is carried out using a spectrum analyzer or receiver. The spectrum analyzer scans from 30MHz to 20GHz (higher than the 10<sup>th</sup> harmonic of the carrier). The peak detector is used and RBW is set to 1MHz on spectrum analyzer. Then the antenna height and turn table rotation is adjusted till the maximum power value is founded on spectrum analyzer or receiver. A notch filter is necessary in the band near to the carrier frequency. A high pass filter is needed to avoid the distortion of the testing equipment in the band above the carrier frequency.

#### Step 2:

A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.

A power (Pmea) is applied to the input of the substitution antenna, and adjusts the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (Pmea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

A “reference path loss” should be calculated after test. The attenuation of “reference path loss” is the cable loss between the Signal Source with the Substitution Antenna (Pca) and the Substitution Antenna Gain (Ga).

### Calculation procedure:

The data of cable loss and antenna gain has been calibrated in full testing frequency range before the testing.

The power of the Radiated Spurious Emissions is calculated by adding the cable loss and antenna gain. The basic equation with a sample calculation is as followed:

$$\text{Power(EIRP)} = P_{\text{mea}} + P_{\text{ca}} + G_a$$

This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15dB) and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $\text{ERP} = \text{EIRP} - 2.15$  (dB).

Assumed the power of signal source record is -20dBm. A cable loss of -30dB, and an antenna gain of 11dB are added.

$$P = P_{\text{mea}} + P_{\text{ca}} + G_a = (-20\text{dBm}) + (-30\text{dB}) + (11\text{dB}) = -39\text{dBm}$$

The measurement will be done at carrier frequencies that pertain to bottom (Channel 9262), middle (Channel 9400) and top (Channel 9538) channels of WCDMA band II.

Test result:

WCDMA Mode:

Channel 9262

Frequency (MHz)	Power (dBm)	Limited (dBm)	Polarization
2456.62	-44.3	-13	Vertical
2777.16	-43.5	-13	Vertical
3731.94	-43.5	-13	Vertical
6679.00	-42.5	-13	Horizontal
9963.21	-38.9	-13	Vertical
17822.61	-31.3	-13	Vertical

Channel 9400

Frequency (MHz)	Power (dBm)	Limited (dBm)	Polarization
2447.27	-44.8	-13	Vertical
2776.18	-43.7	-13	Vertical
3735.94	-43.7	-13	Vertical
6678.14	-43.2	-13	Vertical
9971.19	-38.9	-13	Vertical
17808.91	-31.3	-13	Vertical

Channel 9538

Frequency (MHz)	Power (dBm)	Limited (dBm)	Polarization
2457.99	-44.8	-13	Vertical
2768.43	-44.1	-13	Vertical
3731.19	-43.5	-13	Vertical
6696.30	-43.0	-13	Vertical
9969.26	-38.6	-13	Horizontal
17818.71	-31.9	-13	Vertical

## HSDPA/HSUPA Mode:

## Channel 9262

Frequency (MHz)	Power (dBm)	Limited (dBm)	Polarization
2451.28	-44.2	-13	Horizontal
2767.65	-43.2	-13	Vertical
3743.09	-43.3	-13	Vertical
6687.01	-42.5	-13	Vertical
9958.95	-38.5	-13	Vertical
17811.73	-31.0	-13	Vertical

## Channel 9400

Frequency (MHz)	Power (dBm)	Limited (dBm)	Polarization
2454.23	-44.7	-13	Vertical
2778.81	-43.6	-13	Vertical
3743.23	-43.8	-13	Vertical
6694.80	-42.5	-13	Vertical
9960.53	-38.5	-13	Vertical
17812.85	-31.4	-13	Vertical

## Channel 9538

Frequency (MHz)	Power (dBm)	Limited (dBm)	Polarization
2448.31	-45.1	-13	Vertical
2778.49	-43.8	-13	Vertical
3742.18	-43.8	-13	Horizontal
6694.95	-42.6	-13	Vertical
9958.47	-39.3	-13	Vertical
17804.70	-31.4	-13	Vertical


## 2.2.2 WCDMA Band V

### 2.2.2.1 RF Power Output-FCC Part22.913(a)

Ambient condition:

Temperature	Relative humidity	Pressure
23°C	42%	101.9kPa

Test Setup:

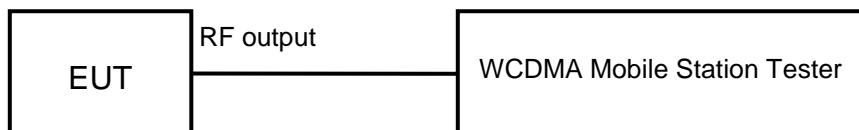

Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. Then the test data can be read at the tester screen. The loss between RF output port of the EUT and the input port of the tester will be taken into consideration.

The measurement will be conducted at three channels No4132, No4183 and No4233 (Bottom, middle and top channels of WCDMA band V)

Limits	≤24dBm
--------	--------

Test result:..

WCDMA Mode:

Carrier frequency (MHz)	Channel No.	RF Power Output (dBm)
826.4	4132	22.35
836.6	4183	22.43
846.6	4233	22.24

HSDPA/HSUPA Mode:


Carrier frequency (MHz)	Channel No.	RF Power Output (dBm)
826.4	4132	21.18
836.6	4183	21.13
846.6	4233	21.10

### 2.2.2.2 Effective Radiated Power-FCC Part22.913(a)


Ambient condition:

Temperature	Relative humidity	Pressure
20.8°C	36.5%	100.9kPa

Test setup:

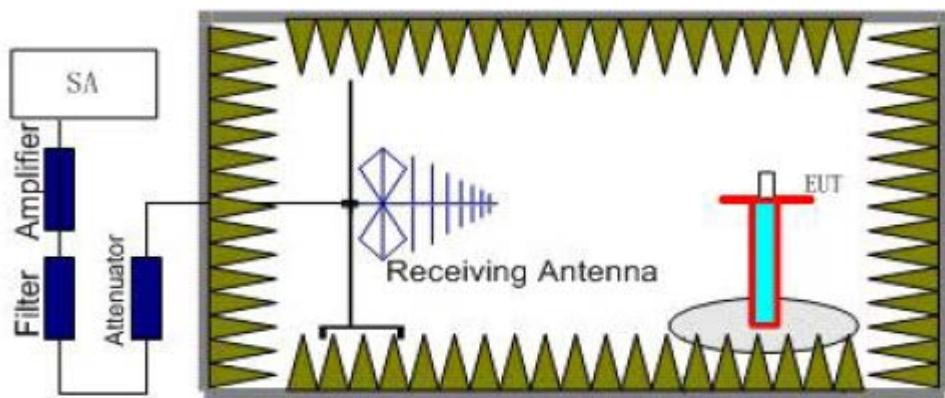

Step 1

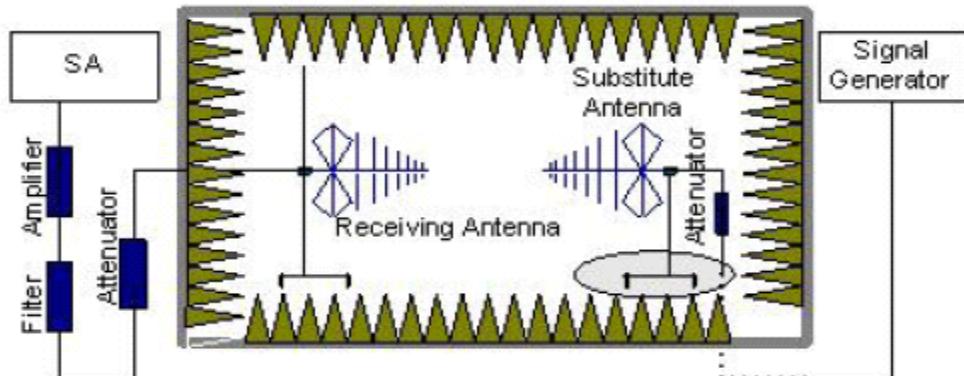

Step 2

**Test procedure:**

The measurements procedures in TIA-603C-2004 are used.

**Step 1:**

The measurement is carried out in the fully anechoic chamber. EUT was placed on a 2.4 meters high non-conductive table at a 3 meters test distance from the test receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT. The height of receiving antenna is 2.4m and varies in certain range to find the maximum power value. A radio link shall be established between EUT and Tester. The output power of the cell signal of the tester will be decreased until the output power of the EUT reach a maximum value. A peak detector is used and RBW is set to 3MHz. Then the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turn table shall be rotated from 0 to 360 degrees for detecting the maximum power value on spectrum analyzer or receiver. And the maximum value of the receiver should be recorded as (Pr).

**Step 2:**

A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator. To repeat the same procedure as step1 and the level of signal generator will be adjusted till the same power value on the spectrum analyzer or receiver. The ERP/EIRP of the EUT can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.

A power (Pmea) is applied to the input of the substitution antenna, and adjusts the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (Pmea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

A "reference path loss" should be calculated after test. The attenuation of "reference path loss" is the cable loss between the Signal Source with the Substitution Antenna (Pca) and the Substitution Antenna Gain (Ga).

The measurement results are obtained as described below:

$$\text{Power (EIRP)} = \text{Pmea} + \text{Pca} + \text{Ga}$$

This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15dB) and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $\text{ERP} = \text{EIRP} - 2.15$  (dB).

The measurement will be done at three channels No4132, No4183 and No4233 (Bottom, middle and top channels of WCDMA band V)

Limits	$\leq 38.5\text{dBm}$
--------	-----------------------

## Test result:

## WCDMA Mode:

Frequency (MHz)	Peak ERP (dBm)	Pca Cable loss (dB)	Ga Antenna Gain (dB)	Pmea (dBm)	Polarization
826.4	23.1	-3.8	8.6	18.3	Vertical
836.6	23.2	-3.8	8.6	18.4	Vertical
846.6	22.9	-3.8	8.6	18.1	Vertical

## HSDPA/HSUPA Mode:


Frequency (MHz)	Peak ERP (dBm)	Pca Cable loss (dB)	Ga Antenna Gain (dB)	Pmea (dBm)	Polarization
826.4	22.9	-3.8	8.6	18.1	Vertical
836.6	22.9	-3.8	8.6	18.1	Vertical
846.6	22.7	-3.8	8.6	17.9	Vertical

### 2.2.2.3 Occupied Bandwidth-FCC Part2.1049

Ambient condition:

Temperature	Relative humidity	Pressure
23°C	42%	101.9kPa

Test Setup:

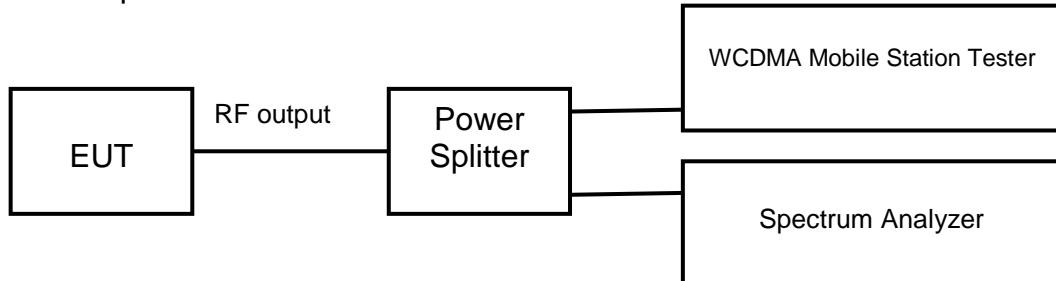

Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. The occupied bandwidth is measured using spectrum analyzer. RBW is set to 30kHz on spectrum analyzer. The bandwidth of 99% power can be read on spectrum analyzer.

The measurement will be conducted at three channels No4132, No4183 and No4233 (Bottom, middle and top channels of WCDMA band V)

Limits: No specific occupied bandwidth requirements in part 2.1049

Test result:

WCDMA Mode:

Carrier frequency (MHz)	Channel No.	Bandwidth of 99% Power (MHz)
826.4	4132	4.140
836.6	4183	4.138
846.6	4233	4.162


HSDPA/HSUPA Mode:

Carrier frequency (MHz)	Channel No.	Bandwidth of 99% Power (MHz)
826.4	4132	4.150
836.6	4183	4.143
846.6	4233	4.156


WCDMA Mode:



Channel 4132

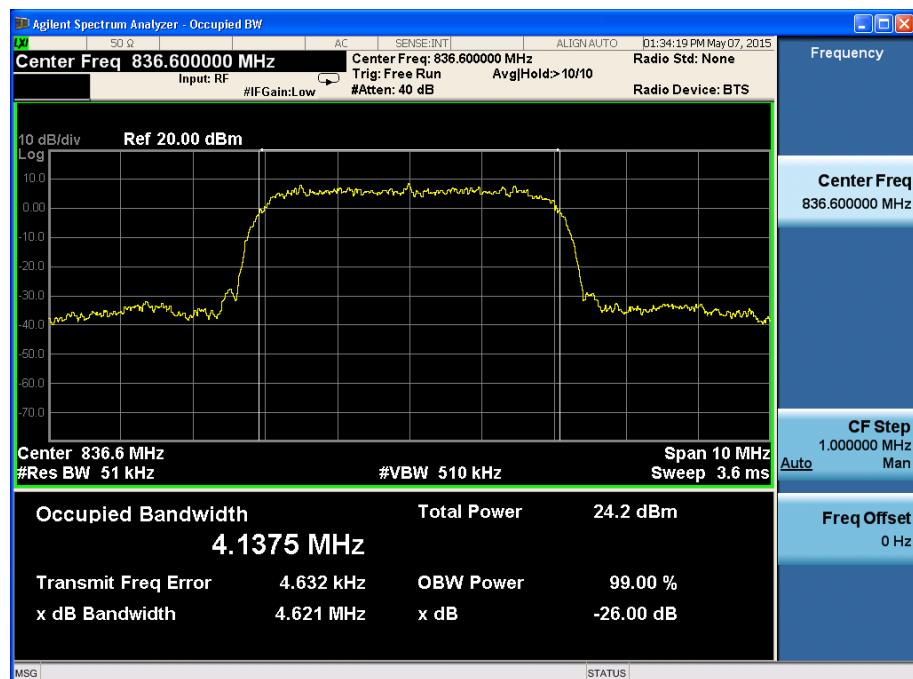


Channel 4183

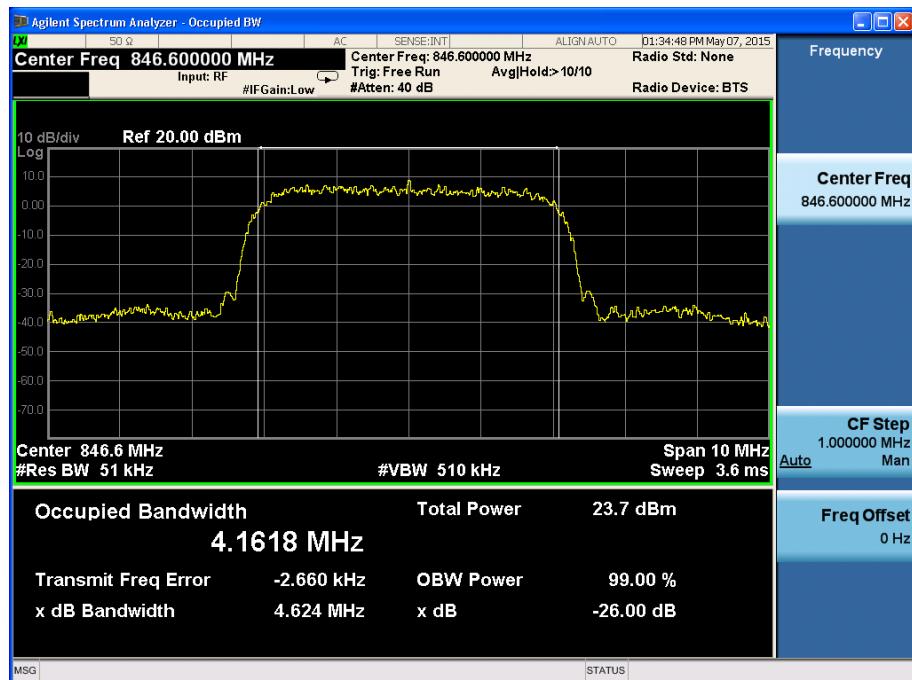


Channel 4233


### HSDPA/HSUPA Mode:

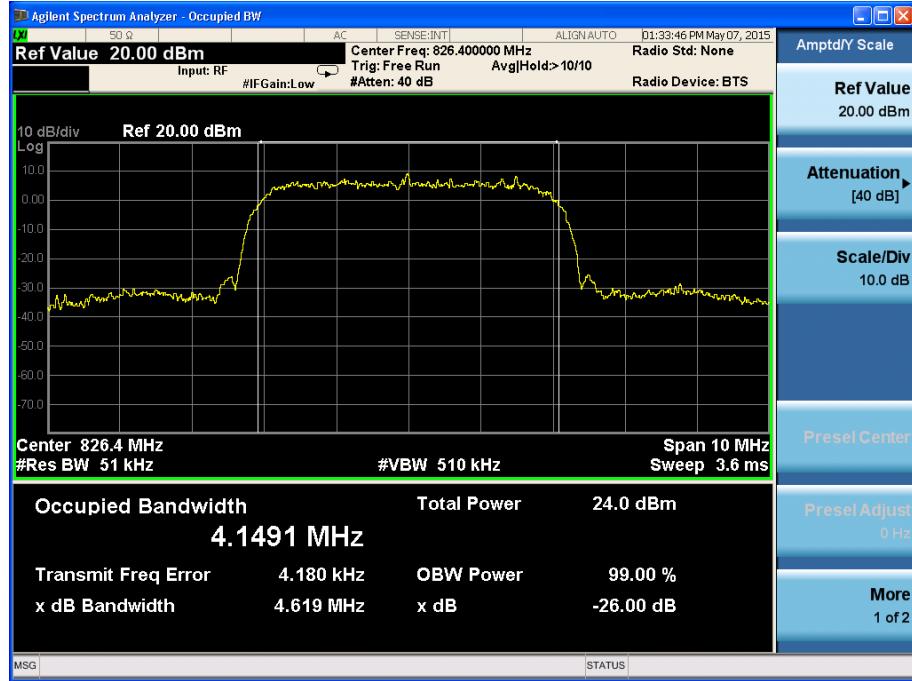

Channel 4132

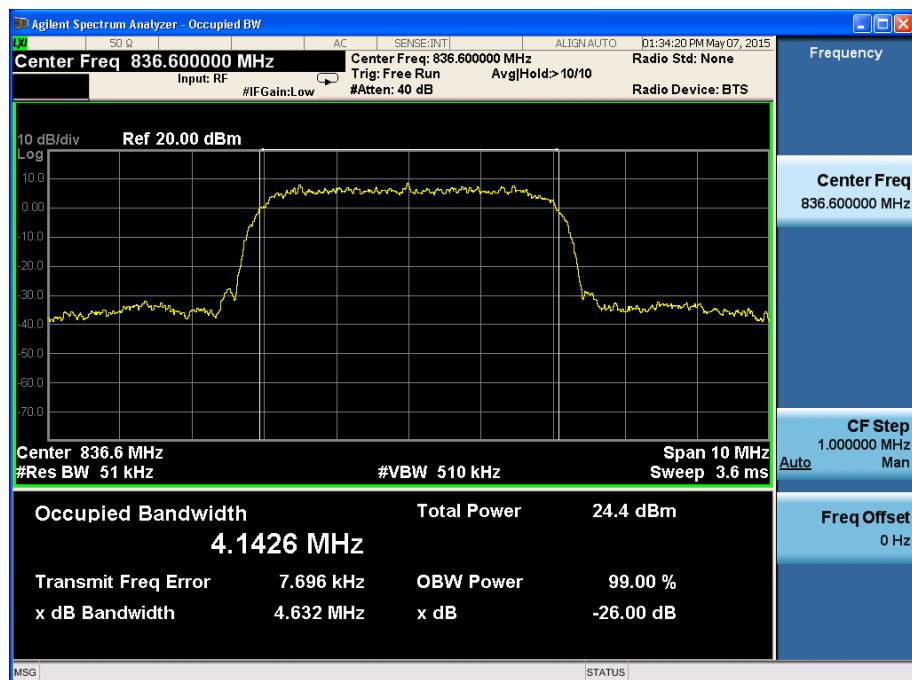

Channel 4183

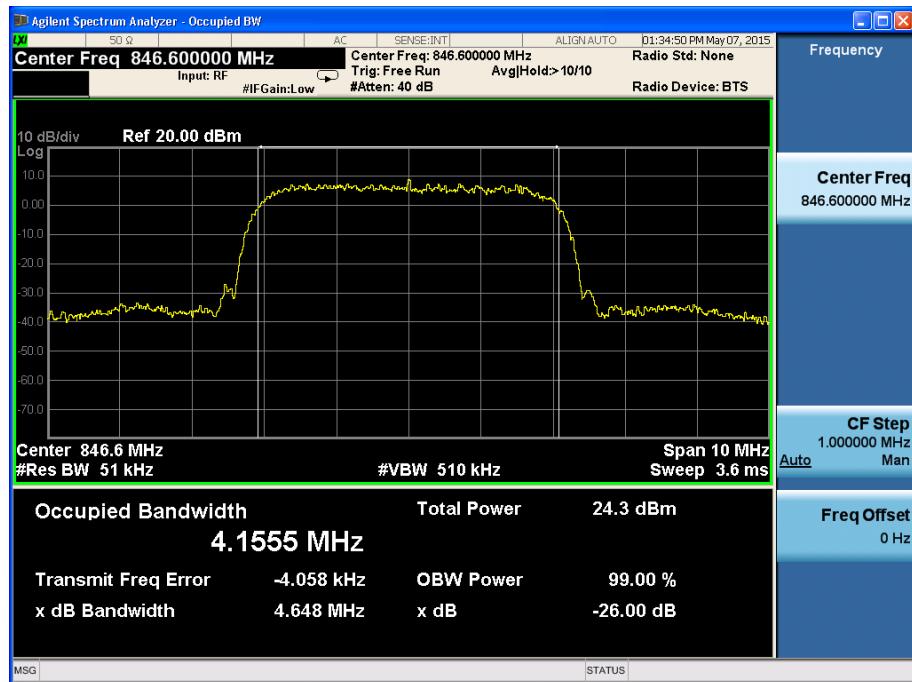


Channel 4233

### 2.2.2.4 Emission Bandwidth-FCC Part22.917(b)

Ambient condition:

Temperature	Relative humidity	Pressure
23°C	42%	101.9kPa

Test Setup:

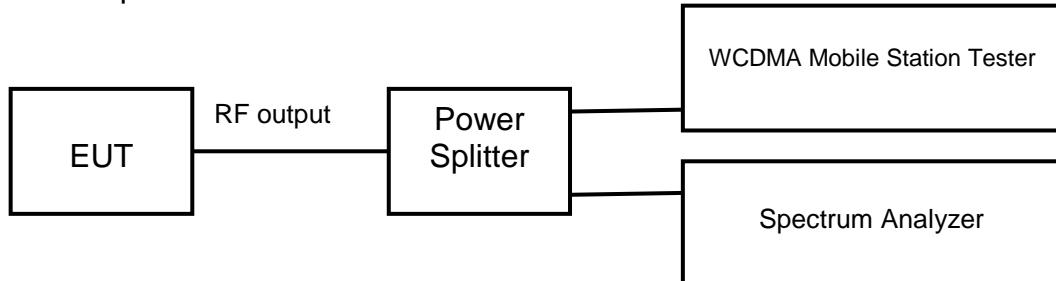

Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. The emission bandwidth is measured using spectrum analyzer. RBW is set to 30kHz on spectrum analyzer. The bandwidth of -26dBc power can be read on spectrum analyzer.

The measurement will be conducted at three channels No9262, No9400 and No9538 (Bottom, middle and top channels of WCDMA band V)

Limits: No specific emission bandwidth requirements in part 22.917(b)

Test result:

WCDMA Mode:

Carrier frequency (MHz)	Channel No.	Bandwidth of -26dBc Power (MHz)
826.4	4132	4.638
836.6	4183	4.621
846.6	4233	4.624

HSDPA/HSUPA Mode:


Carrier frequency (MHz)	Channel No.	Bandwidth of -26dBc Power (MHz)
826.4	4132	4.619
836.6	4183	4.632
846.6	4233	4.648

### 2.2.2.5 Spurious Emissions at antenna terminal-FCC Part2.1051/22.917

Ambient condition:

Temperature	Relative humidity	Pressure
23°C	42%	101.9kPa

Test Setup:

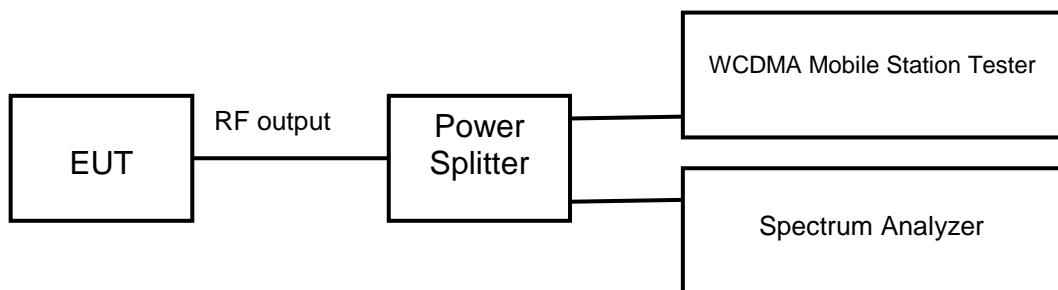

Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. The measurement is carried out using a spectrum analyzer. The spectrum analyzer scans from 30MHz to 9GHz (higher than the 10<sup>th</sup> harmonic of the carrier). The peak detector is used and RBW is set to 1MHz on spectrum analyzer.


The measurement will be conducted at one channel No4183 (middle channel of WCDMA band V)

Limits	≤-13dBm
--------	---------


Test result:

Refer to the following figures.

WCDMA Mode:

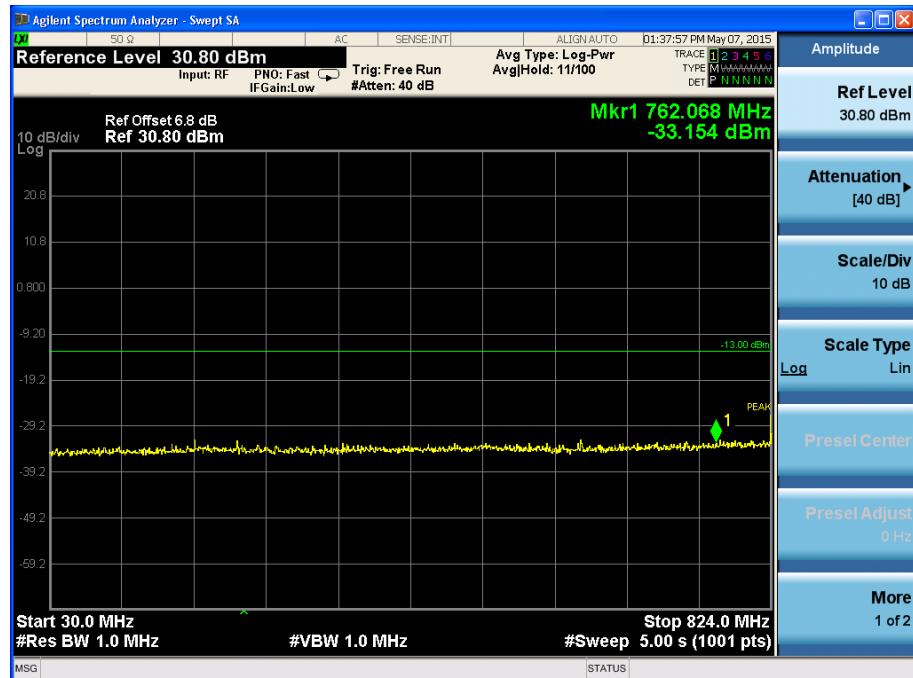

Channel 4183, 30MHz~824MHz

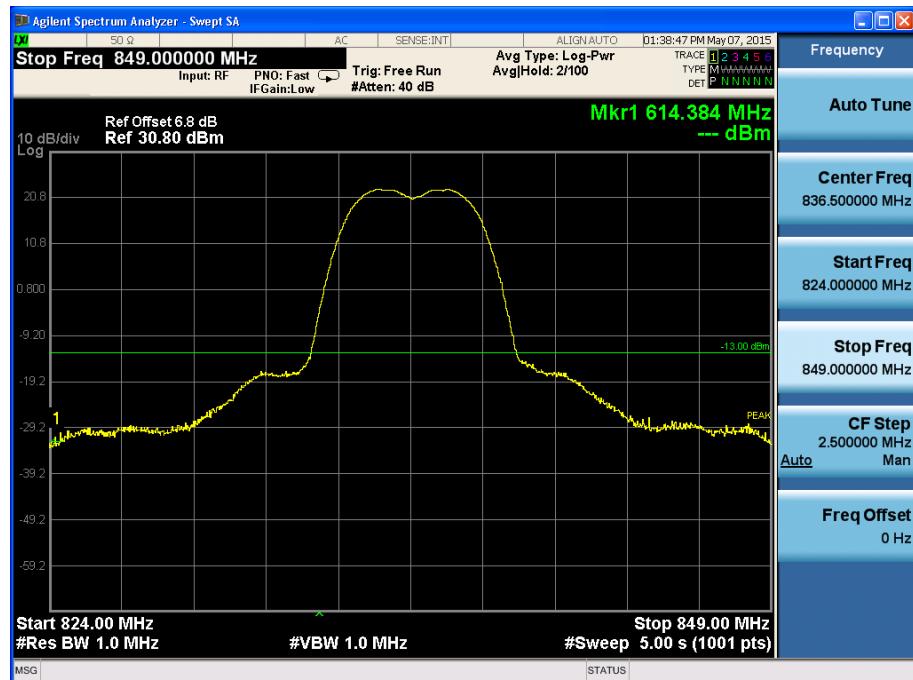


Channel 4183, 824MHz~849MHz

Note: The signal beyond the limit is the base station simulator carrier.




Channel 4183, 849MHz~9GHz

### HSDPA/HSUPA Mode:

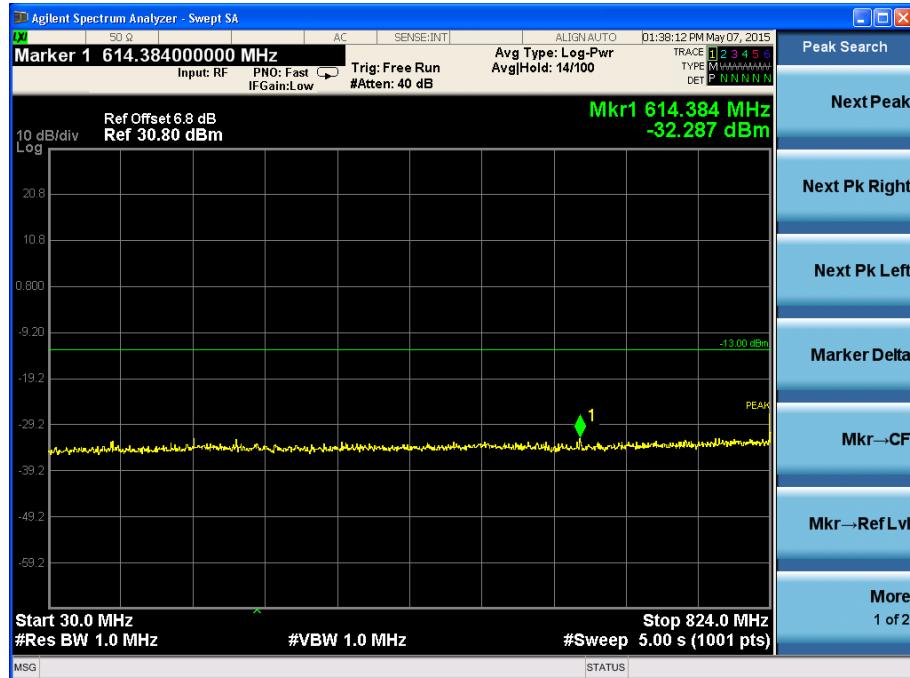


Channel 4183, 30MHz~824MHz

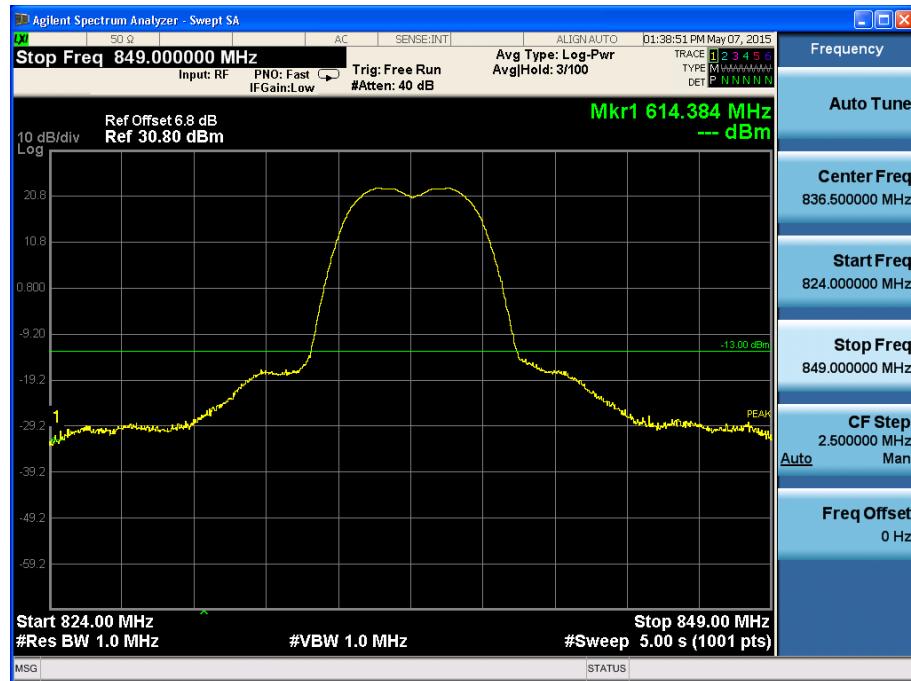

Channel 4183, 824MHz~849MHz

Note: The signal beyond the limit is the base station simulator carrier.

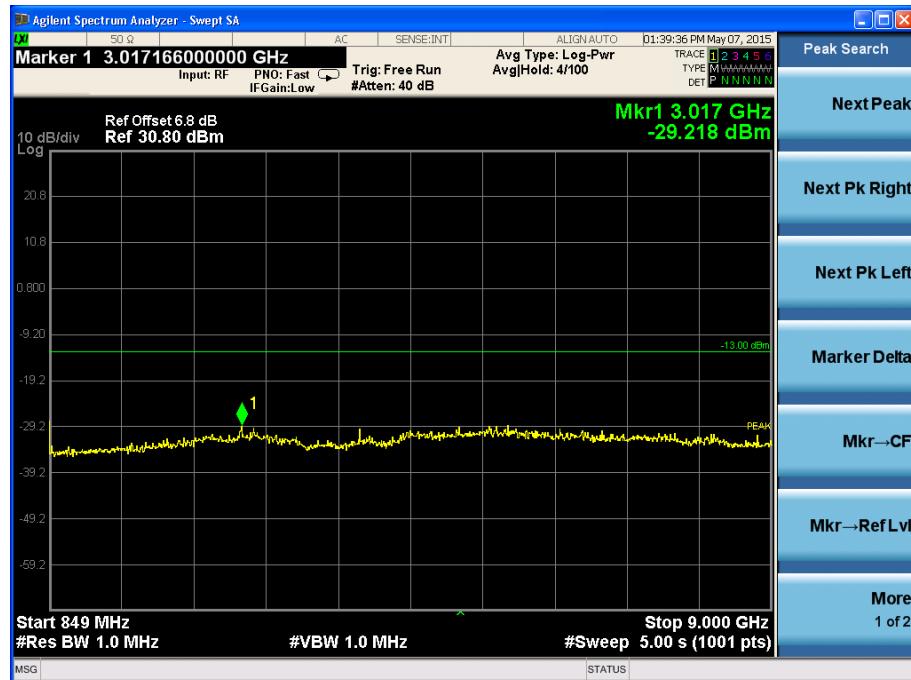


Channel 4183, 849MHz~9GHz

### 2.2.2.6 Band Edges Compliance-FCC Part22.917(b)

Ambient condition:

Temperature	Relative humidity	Pressure
23°C	42%	101.9kPa

Test Setup:

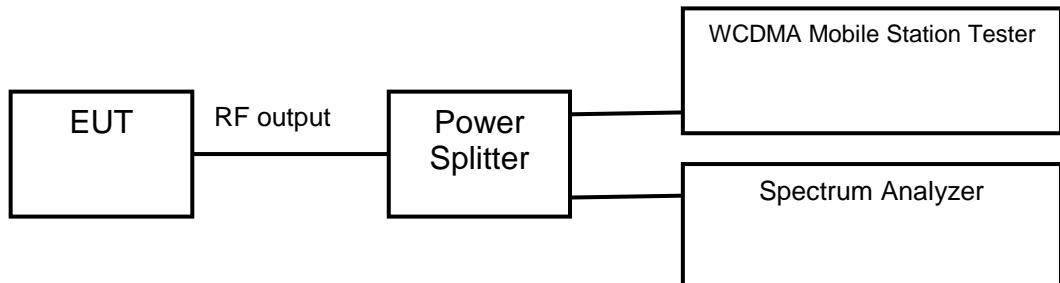

Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. The measurement is carried out using a spectrum analyzer. The peak detector is used and RBW is set to at least 1% of the emission bandwidth on spectrum analyzer.


The measurement will be conducted at two channels No4132 and No4233 (Bottom and top channels of WCDMA band V)

Limits	≤-13dBm
--------	---------

Test result:

Refer to the following figures.

WCDMA Mode:

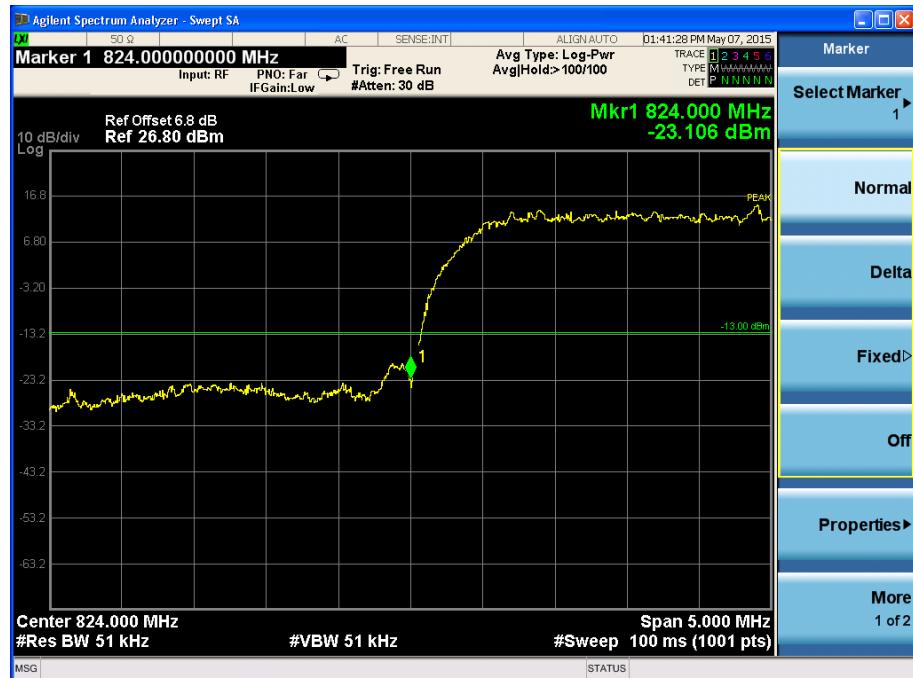


Channel 4132



Channel 4233

HSDPA/HSUPA Mode:

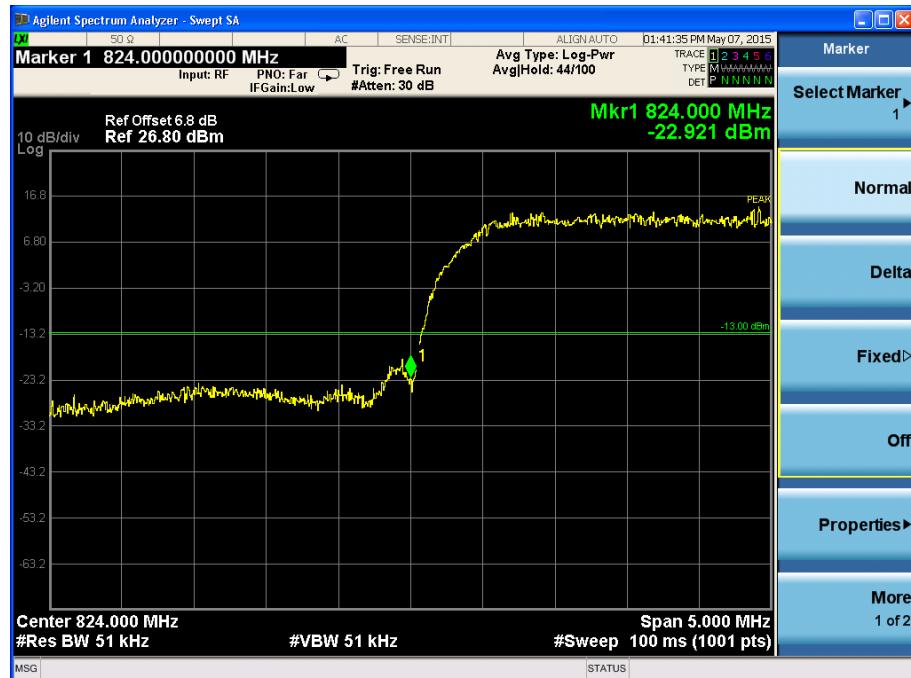

Channel 4132




Channel 4233

### 2.2.2.7 Frequency Stability-FCC Part2.1055/22.355

Ambient condition:

Temperature	Relative humidity	Pressure
23°C	42%	101.9kPa

Test setup:

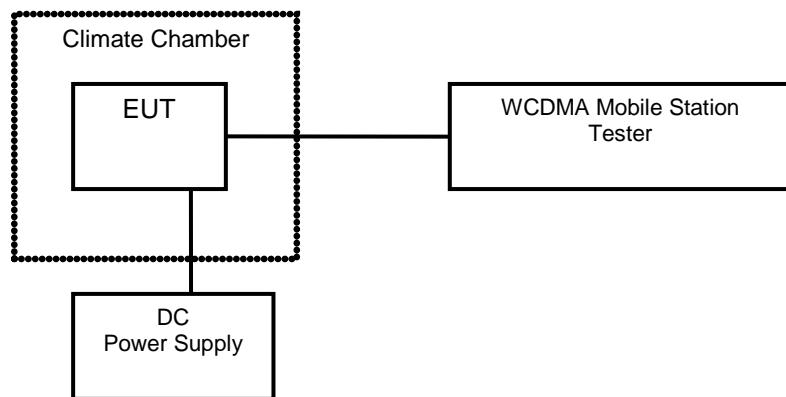

Test Procedure:

A radio link shall be established between EUT and Tester. The tester will sample the transmitter RF output signal and measure its frequency. The temperature inside the climate chamber is varied from -30 to +50°C in 10°C step size, and also the DC power supply voltage to the EUT is varied from LV to HV. The measurement will be conducted at three channels No4132, No4183 and No4233 (Bottom, middle and top channels of WCDMA band V).

Limits: No specific frequency stability requirements in part 2.1055 and part 22.355.

## Test result:

## WCDMA Mode:

Temperature(°C)	Test Result (ppm)@NV		
	Channel 4132	Channel 4183	Channel 4233
-30	0.001	0.002	0.002
-20	0.002	0.001	0.002
-10	0.003	0.002	0.004
0	0.002	0.001	0.001
+10	0.002	0.003	0.002
+20	0.001	0.003	0.001
+30	0.003	0.002	0.003
+40	0.002	0.001	0.001
+50	0.002	0.002	0.002

Voltage	Test Result (ppm)@NT		
	Channel 4132	Channel 4183	Channel 4233
LV	0.002	0.003	0.002
HV	0.003	0.004	0.002

## HSDPA/HSUPA Mode:

Temperature(°C)	Test Result (ppm)@NV		
	Channel 4132	Channel 4183	Channel 4233
-30	0.002	0.003	0.002
-20	0.001	0.003	0.001
-10	0.004	0.002	0.002
0	0.001	0.002	0.003
+10	0.003	0.003	0.003
+20	0.003	0.001	0.005
+30	0.002	0.002	0.002
+40	0.004	0.002	0.004
+50	0.003	0.001	0.002


Voltage	Test Result (ppm)@NT		
	Channel 4132	Channel 4183	Channel 4233
LV	0.002	0.004	0.002
HV	0.003	0.006	0.003

### 2.2.2.8 Radiated Spurious Emissions-FCC Part2.1053/22.917(a)


Ambient condition:

Temperature	Relative humidity	Pressure
20.8°C	36.5%	100.9kPa

Test Setup:

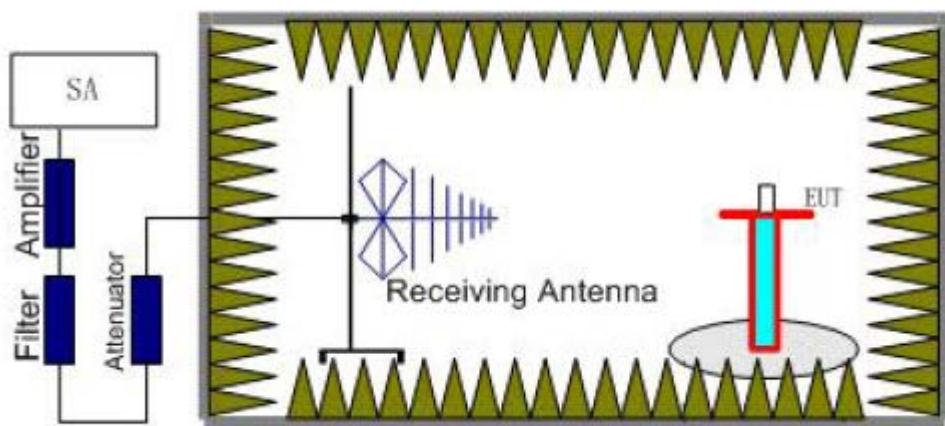

Step 1

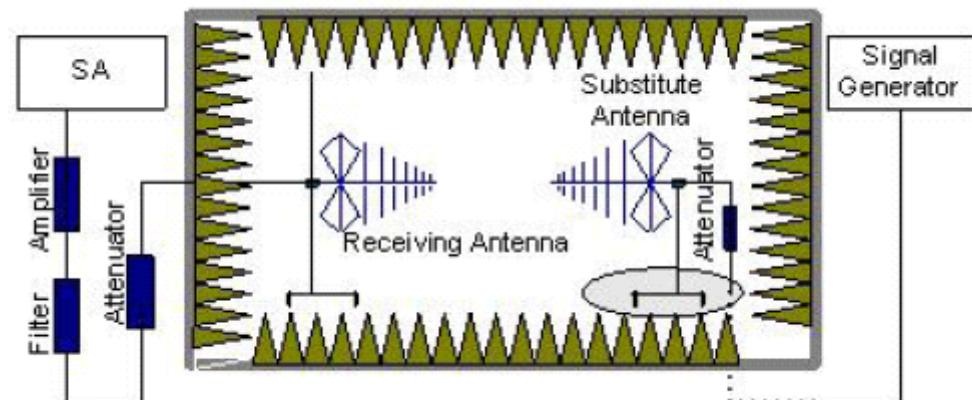

Step 2

### Test procedure:

The measurements procedures in TIA-603C-2004 are used.

The spectrum was scanned from 30MHz to the 10<sup>th</sup> harmonic of the highest frequency generated within the equipment.

#### Step 1:

The measurement is carried out in the fully anechoic chamber. EUT was placed on a 2.4 meter high non-conductive table at a 3 meter test distance from the test receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT. The height of receiving antenna is 2.4m and varies in certain range to find the maximum power value. A radio link shall be established between EUT and Tester. The output power of the cell signal of the tester will be decreased until the output power of the EUT reach a maximum value. The measurement is carried out using a spectrum analyzer or receiver. The spectrum analyzer scans from 30MHz to 20GHz (higher than the 10<sup>th</sup> harmonic of the carrier). The peak detector is used and RBW is set to 1MHz on spectrum analyzer. Then the antenna height and turn table rotation is adjusted till the maximum power value is founded on spectrum analyzer or receiver. A notch filter is necessary in the band near to the carrier frequency. A high pass filter is needed to avoid the distortion of the testing equipment in the band above the carrier frequency.

#### Step 2:

A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.

A power (Pmea) is applied to the input of the substitution antenna, and adjusts the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (Pmea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

A "reference path loss" should be calculated after test. The attenuation of "reference path loss" is the cable loss between the Signal Source with the Substitution Antenna (Pca) and the Substitution Antenna Gain (Ga).

### Calculation procedure:

The data of cable loss and antenna gain has been calibrated in full testing frequency range before the testing.

The power of the Radiated Spurious Emissions is calculated by adding the cable loss and antenna gain. The basic equation with a sample calculation is as followed:

$$\text{Power(EIRP)} = P_{\text{mea}} + P_{\text{ca}} + G_a$$

This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15dB) and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $\text{ERP} = \text{EIRP} - 2.15$  (dB).

Assumed the power of signal source record is -20dBm. A cable loss of -30dB, and an antenna gain of 11dB are added.

$$P = P_{\text{mea}} + P_{\text{ca}} + G_a = (-20\text{dBm}) + (-30\text{dB}) + (11\text{dB}) = -39\text{dBm}$$

The measurement will be done at carrier frequencies that pertain to bottom (Channel 4132), middle (Channel 4183) and top (Channel 4233) channels of WCDMA band V.

Test result:

WCDMA Mode:

Channel 4132

Frequency (MHz)	Power (dBm)	Limited (dBm)	Polarization
1629.66	-51.3	-13	Vertical
1669.24	-50.7	-13	Vertical
2534.26	-44.3	-13	Vertical
2570.60	-43.7	-13	Horizontal
8964.92	-40.1	-13	Vertical
9980.80	-36.2	-13	Vertical

Channel 4183

Frequency (MHz)	Power (dBm)	Limited (dBm)	Polarization
1627.67	-50.9	-13	Vertical
1670.34	-50.2	-13	Horizontal
2534.71	-43.8	-13	Vertical
2560.11	-43.5	-13	Vertical
8965.83	-40.1	-13	Vertical
9986.03	-36.8	-13	Vertical

Channel 4233

Frequency (MHz)	Power (dBm)	Limited (dBm)	Polarization
1617.16	-51.7	-13	Vertical
1673.02	-50.6	-13	Vertical
2527.98	-44.1	-13	Horizontal
2569.03	-43.6	-13	Vertical
8968.27	-40.4	-13	Vertical
9984.65	-35.9	-13	Vertical

## HSDPA/HSUPA Mode:

## Channel 4132

Frequency (MHz)	Power (dBm)	Limited (dBm)	Polarization
1627.05	-51.6	-13	Vertical
1670.30	-50.9	-13	Vertical
2544.00	-43.6	-13	Vertical
2560.25	-43.7	-13	Horizontal
8969.67	-40.8	-13	Vertical
9983.27	-36.1	-13	Vertical

## Channel 4183

Frequency (MHz)	Power (dBm)	Limited (dBm)	Polarization
1624.70	-51.2	-13	Vertical
1680.18	-50.9	-13	Vertical
2543.08	-44.4	-13	Vertical
2574.25	-43.3	-13	Vertical
8972.46	-40.0	-13	Vertical
9988.31	-36.2	-13	Vertical

## Channel 4233

Frequency (MHz)	Power (dBm)	Limited (dBm)	Polarization
1635.29	-51.2	-13	Vertical
1665.06	-50.7	-13	Vertical
2536.15	-44.4	-13	Vertical
2559.62	-43.3	-13	Vertical
8967.31	-40.2	-13	Horizontal
9974.08	-36.2	-13	Vertical

## 2.3. List of test equipments

No.	Name/Model	Manufacturer	S/N	Calibration Due Date
1	E5515C(8960) Mobile Station Tester	Agilent	MY48367401	2015.8
2	N9020A Spectrum Analyzer	Agilent	MY48010771	2015.8
3	DC Power Supply E3645A	Agilent	MY40000740	2015.8
4	Power Splitter 11850C	Agilent	026057	2015.8
5	Temperature chamber SH241	ESPEC	92000390	2015.8
6	12.65m×8.03m×7.50m Fully-Anechoic Chamber	FRANKONIA	-----	-----
7	Turn table Diameter:1m	HD	-----	-----
8	Antenna master FAC(MA4.0)	MATURO	-----	-----
9	HF 906 Double-Ridged Waveguide Horn Antenna	R&S	100030	2015.8
10	HL562 Ultra log antenna	R&S	100016	2015.8
11	3160-09 Receive antenna	SCHWARZ-BECK	002058-002	2015.8
12	ESI 40 EMI test receiver	R&S	100015	2015.8
13	Radio tester	CMU 200	114667	2015.8

## Appendix

### Appendix Test Setup