



---

# TEST REPORT FOR RF TESTING

---

Report No.: SRTC2015-9004(F)-0019

Product Name: GSM/GPRS/EDGE/UMTS/LTE Digital Mobile Phone  
with Bluetooth and WiFi

Product Model: Philips Xenium V526

Applicant: Shenzhen Sang Fei Consumer Communications Co.,Ltd.

Manufacturer: Shenzhen Sang Fei Consumer Communications Co.,Ltd.

Specification: FCC Part 24E, Part 22H, Part 2 (August 20, 2015 edition)

FCC ID: VQRCTV526

The State Radio\_monitoring\_center Testing Center (SRTC)

No.80 Beilishi Road Xicheng District Beijing, China

Tel: 86-10-57996181      Fax: 86-10-57996288

## CONTENTS

<b>1. GENERAL INFORMATION .....</b>	<b>2</b>
1.1 Notes of the test report.....	2
1.2 Information about the testing laboratory .....	2
1.3 Applicant's details .....	2
1.4 Manufacturer's details .....	2
1.5 Test Environment .....	3
<b>2 DESCRIPTION OF THE DEVICE UNDER TEST .....</b>	<b>4</b>
2.1 Final Equipment Build Status.....	4
2.2 Support Equipment.....	5
<b>3 REFERENCE SPECIFICATION .....</b>	<b>6</b>
<b>4 KEY TO NOTES AND RESULT CODES .....</b>	<b>7</b>
<b>5 RESULT SUMMARY .....</b>	<b>8</b>
<b>6 TEST RESULT .....</b>	<b>9</b>
6.1 WCDMA Band II .....	9
6.2 WCDMA Band V .....	31
<b>7 MEASUREMENT UNCERTAINTIES .....</b>	<b>53</b>
<b>8 TEST EQUIPMENTS .....</b>	<b>54</b>
<b>APPENDIX.....</b>	<b>55</b>

## 1. GENERAL INFORMATION

### 1.1 Notes of the test report

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written permission of The State Radio\_monitoring\_center Testing Center (SRTC).

The test results relate only to individual items of the samples which have been tested.

### 1.2 Information about the testing laboratory

Company:	The State Radio_monitoring_center Testing Center (SRTC)
Address:	No.80 Beilishi Road, Xicheng District
City:	Beijing
Country or Region:	P.R.China
Contacted person:	liujia
Tel:	+86 10 5799 6181
Fax:	+86 10 5799 6288
Email:	liujiaf@srtc.org.cn

### 1.3 Applicant's details

Company:	Shenzhen Sang Fei Consumer Communications Co.,Ltd.
Address:	11 Science & Technology Rd., Shenzhen Hi-tech Industrial Park, Nanshan District
City:	Shenzhen
Country or Region:	China
Grantee Code:	VQR
Contacted person:	linda zhang
Tel:	010-68300097
Fax:	010-68300097
Email:	linda.zhang@sangfei.com

### 1.4 Manufacturer's details

Company:	Shenzhen Sang Fei Consumer Communications Co.,Ltd.
Address:	11 Science & Technology Rd., Shenzhen Hi-tech Industrial Park, Nanshan District
City:	Shenzhen
Country or Region:	China
Contacted person:	linda zhang
Tel:	010-68300097
Fax:	010-68300097
Email:	linda.zhang@sangfei.com

## 1.5 Test Environment

Date of Receipt of test sample at SRTC:	2015.10.14
Testing Start Date:	2015.10.28
Testing End Date:	2015.10.29

Environmental Data:	Temperature (°C)	Humidity (%)
Ambient	25	38
Maximum Extreme	55	80
Minimum Extreme	-10	---

Normal Supply Voltage (V d.c.):	3.8
Maximum Extreme Supply Voltage (V d.c.):	4.35
Minimum Extreme Supply Voltage (V d.c.):	3.5

## **2 DESCRIPTION OF THE DEVICE UNDER TEST**

### **2.1 Final Equipment Build Status**

Frequency Range	WCDMA Band II: Tx:1850~1910MHz Rx:1930~1990MHz WCDMA Band V: Tx:824~849MHz Rx:869~894MHz
Rated Output Power	WCDMA Band II:22.5dBm WCDMA Band V:22.5dBm
Modulation Type	QPSK
Emission Designator	4M20F9W
Duplex Mode	FDD
Duplex Spacing	WCDMA Band II:80MHz WCDMA Band V:45MHz
Antenna Type	Fixed Internal
Power Supply	Battery
HW Version	WMCTb
SW Version	Philips_V526_1539_V01_AG_FCC
IMEI	867767020192544

## 2.2 Support Equipment

The following support equipment was used to exercise the DUT during testing:

Equipment	Battery
Manufacturer	Shenzhen cyclelong power-tech Co., ltd
Model Number	AB5000AWML
Serial Number	-----

### **3 REFERENCE SPECIFICATION**

Specification	Version	Title
2.1046	July 7, 1998	Measurements required: RF power output.
2.1049	July 7, 1998	Measurements required: Occupied bandwidth.
2.1051	July 7, 1998	Measurements required: Spurious emissions at antenna terminals.
2.1053	July 7, 1998	Measurements required: Field strength of spurious radiation.
2.1055	Dec. 9, 2003	Measurements required: Frequency stability.
22.355	Oct. 17, 1996	Frequency tolerance.
22.913	Dec. 15, 2004	Effective radiated power limits.
22.917	Dec. 17, 2002	Emission limitations for cellular equipment.
24.232	May 2, 2008	Power and antenna height limits.
24.235	N/A	Frequency stability.
24.238	Dec. 17, 2002	Emission limitations for Broadband PCS equipment.



## **4 KEY TO NOTES AND RESULT CODES**

The following are the definition of the test result.

Code	Meaning
PASS	Test result shows that the requirements of the relevant specification have been met.
FAIL	Test result shows that the requirements of the relevant specification have not been met.
N/T	Test case is not tested.
NTC	Nominal voltage, Normal Temperature
HV	High voltage, Normal Temperature
LV	Low voltage, Normal Temperature
HTHV	high voltage, High Temperature
LTHV	High voltage, Low Temperature
HTLV	Low voltage, High Temperature
LTLV	Low voltage, Low Temperature

## 5 RESULT SUMMARY

No.	Test case	FCC reference	Verdict
1	RF Power Output	22.913(a)/24.232(b)	Pass
2	Effective Radiated Power and Effective Isotropic Radiated Power	22.913(a)/24.232(b)	Pass
3	Occupied Bandwidth	2.1049	Pass
4	Emission Bandwidth	22.917(b)/24.238(b)	Pass
5	Spurious Emissions at antenna terminal	2.1051/22.917/24.238	Pass
6	Band Edges Compliance	22.917(b)/24.238(b)	Pass
7	Frequency Stability	2.1055/22.355/24.235	Pass
8	Radiated Spurious Emissions	2.1053/22.917(a)/24.238	Pass

This Test Report Is Issued by: Ms. Xu Qiaochun  	Checked by: Mr. Li Boyu  
Tested by: Mr. Jiang Shuo  	Issued date:  20151130

## **6 TEST RESULT**

### **6.1 WCDMA Band II**

#### **6.1.1 RF Power Output-FCC Part24.232(b)**

Ambient condition:

Temperature	Relative humidity	Pressure
23°C	42%	101.9kPa

Test Setup:



Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. Then the test data can be read at the tester screen. The loss between RF output port of the EUT and the input port of the tester will be taken into consideration.

The measurement will be conducted at three channels No4132, No4183 and No4233 (Bottom, middle and top channels of WCDMA band II)

Limits	≤24dBm

Test result:

WCDMA Mode:

Carrier frequency (MHz)	Channel No.	RF Power Output (dBm)
1852.4	9262	22.20
1880.0	9400	22.23
1907.6	9538	22.15

## HSDPA/HSUPA Mode:


Carrier frequency (MHz)	Channel No.	RF Power Output (dBm)
1852.4	9262	20.14
1880.0	9400	20.34
1907.6	9538	20.59

## 6.1.2 Effective Radiated Power-FCC Part24.232(b)


Ambient condition:

Temperature	Relative humidity	Pressure
20.8°C	36.5%	100.9kPa

Test setup:

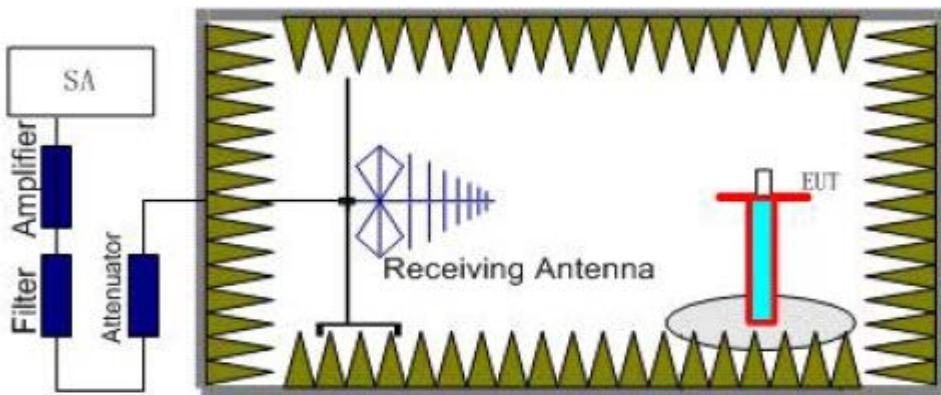

Step 1

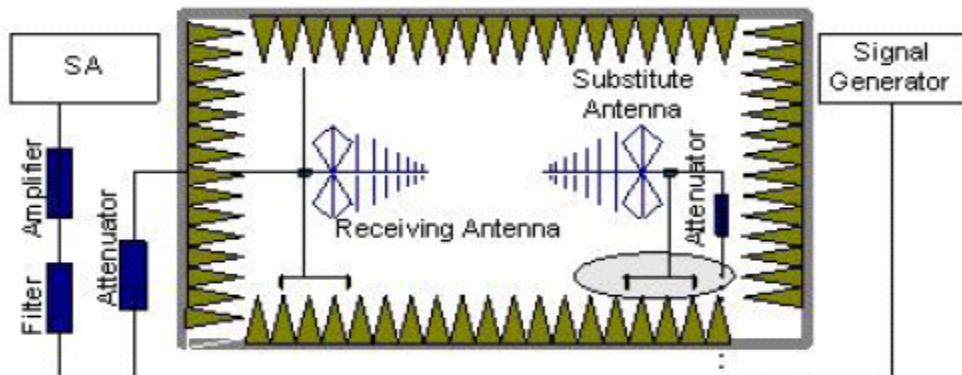

Step 2

Test procedure:

The measurements procedures in TIA-603C-2004 are used.

Step 1:

The measurement is carried out in the fully anechoic chamber. EUT was placed on a 2.4 meters high non-conductive table at a 3 meters test distance from the test receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT. The height of receiving antenna is 2.4m and varies in certain range to find the maximum power value. A radio link shall be established between EUT and Tester. The output power of the cell signal of the tester will be decreased until the output power of the EUT reach a maximum value. A peak detector is used and RBW is set to 3MHz. Then the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turn table shall be rotated from 0 to 360 degrees for detecting the maximum power value on spectrum analyzer or receiver. And the maximum value of the receiver should be recorded as (Pr).

Step 2:

A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator. To repeat the same procedure as step1 and the level of signal generator will be adjusted till the same power value on the spectrum analyzer or receiver. The ERP/EIRP of the EUT can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.

A power (Pmea) is applied to the input of the substitution antenna, and adjusts the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (Pmea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

A “reference path loss” should be calculated after test. The attenuation of “reference path loss” is the cable loss between the Signal Source with the Substitution Antenna (Pca) and the Substitution Antenna Gain (Ga).

The measurement results are obtained as described below:

$$\text{Power (EIRP)} = \text{Pmea} + \text{Pca} + \text{Ga}$$

This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15dB) and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $\text{ERP} = \text{EIRP} - 2.15$  (dB).

The measurement will be done at three channels No4132, No4183 and No4233 (Bottom, middle and top channels of WCDMA band II)

Limits	≤33dBm
--------	--------

## Test result:

## WCDMA Mode:

Frequency (MHz)	Peak EIRP(dBm)	Pca Cable loss	Ga Antenna Gain (dB)	Pmea (dBm)	Polarization
1852.4	22.98	-5	8.6	19.38	Vertical
1880.0	23.41	-5	8.6	19.81	Vertical
1907.6	23.29	-5	8.6	19.69	Vertical

## HSDPA/HSUPA Mode:


Frequency (MHz)	Peak EIRP(dBm)	Pca Cable loss	Ga Antenna Gain (dB)	Pmea (dBm)	Polarization
1852.4	22.87	-5	8.6	19.27	Vertical
1880.0	22.58	-5	8.6	18.98	Vertical
1907.6	22.35	-5	8.6	18.75	Vertical

### 6.1.3 Occupied Bandwidth-FCC Part2.1049

Ambient condition:

Temperature	Relative humidity	Pressure
23°C	42%	101.9kPa

Test Setup:

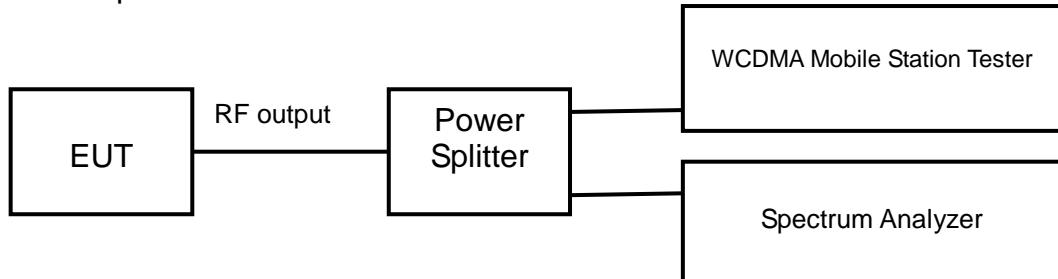

Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. The occupied bandwidth is measured using spectrum analyzer. RBW is set to 30kHz on spectrum analyzer. The bandwidth of 99% power can be read on spectrum analyzer.

The measurement will be conducted at three channels No4132, No4183 and No4233 (Bottom, middle and top channels of WCDMA band II)

Limits: No specific occupied bandwidth requirements in part 2.1049

Test result:


WCDMA Mode:

Carrier frequency (MHz)	Channel No.	Bandwidth of 99% Power (MHz)
1852.4	9262	4.2074
1880.0	9400	4.1994
1907.6	9538	4.2418


HSDPA/HSUPA Mode:

Carrier frequency (MHz)	Channel No.	Bandwidth of 99% Power (MHz)
1852.4	9262	4.2093
1880.0	9400	4.2019
1907.6	9538	4.2333


## WCDMA Mode:

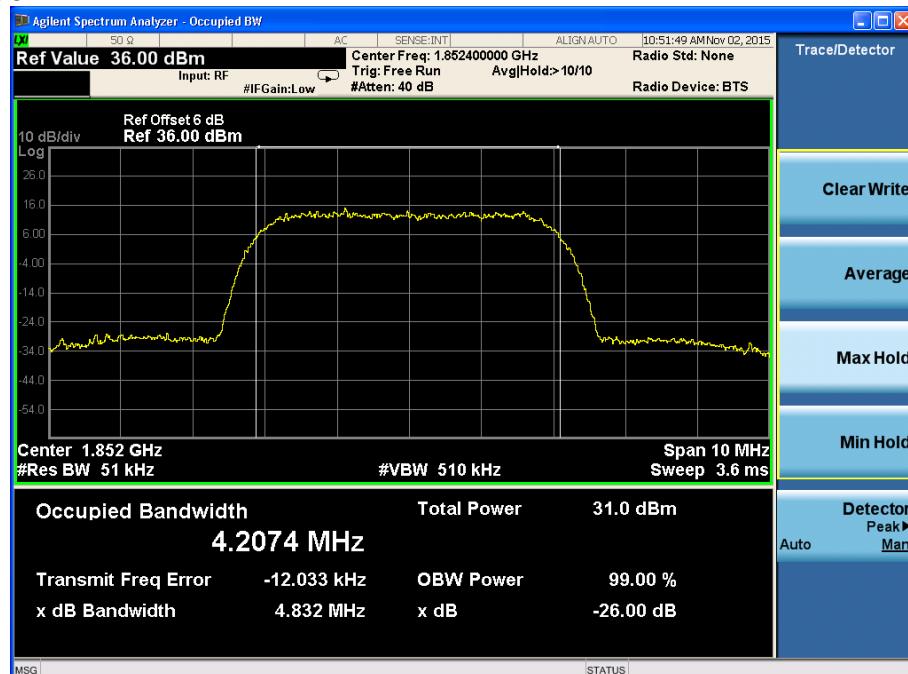

Channel 9262

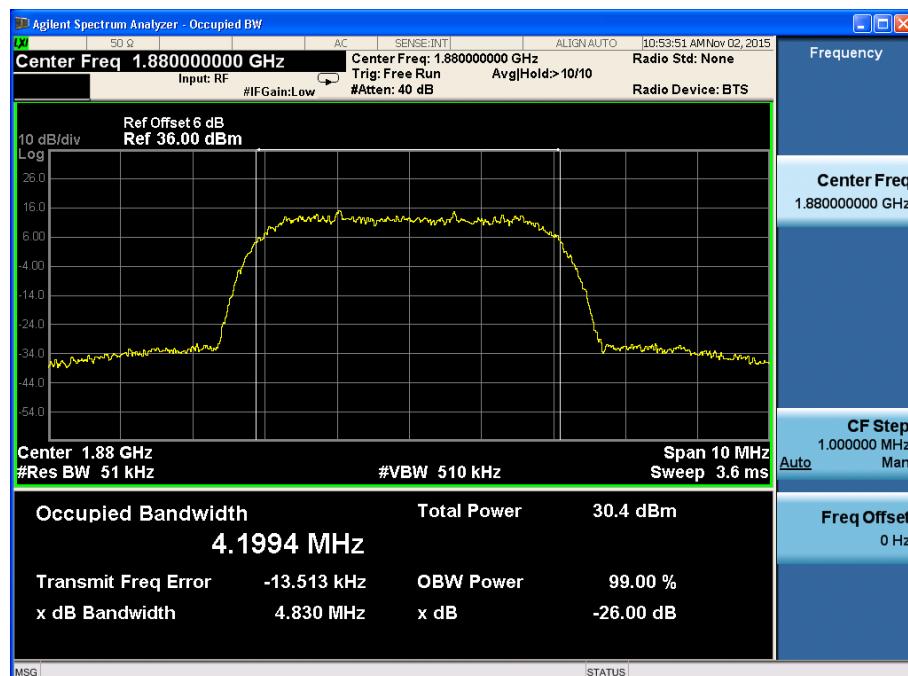


Channel 9400

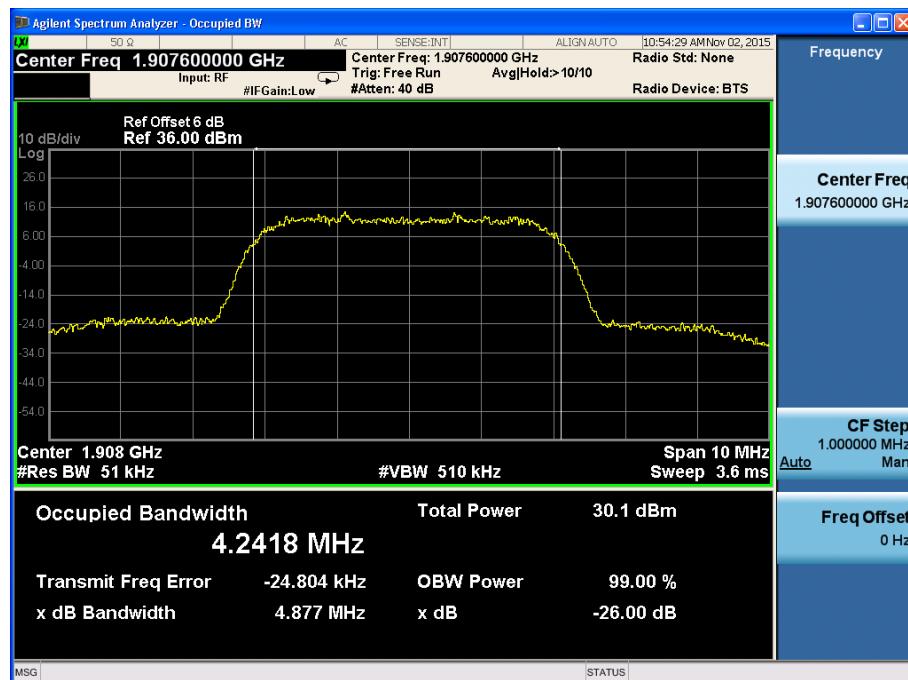


Channel 9538


## HSDPA/HSUPA Mode:

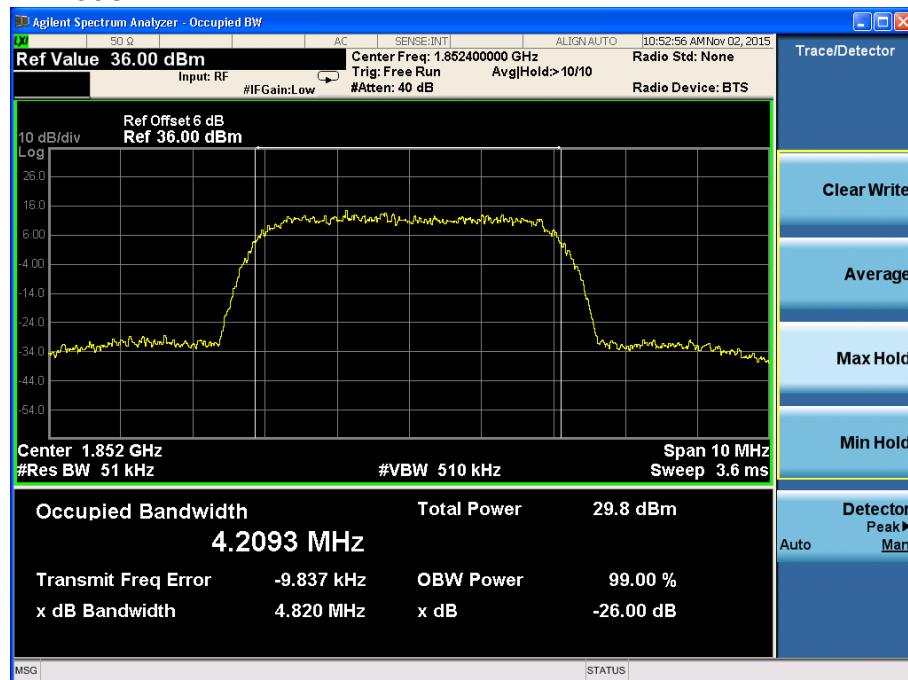

Channel 9262

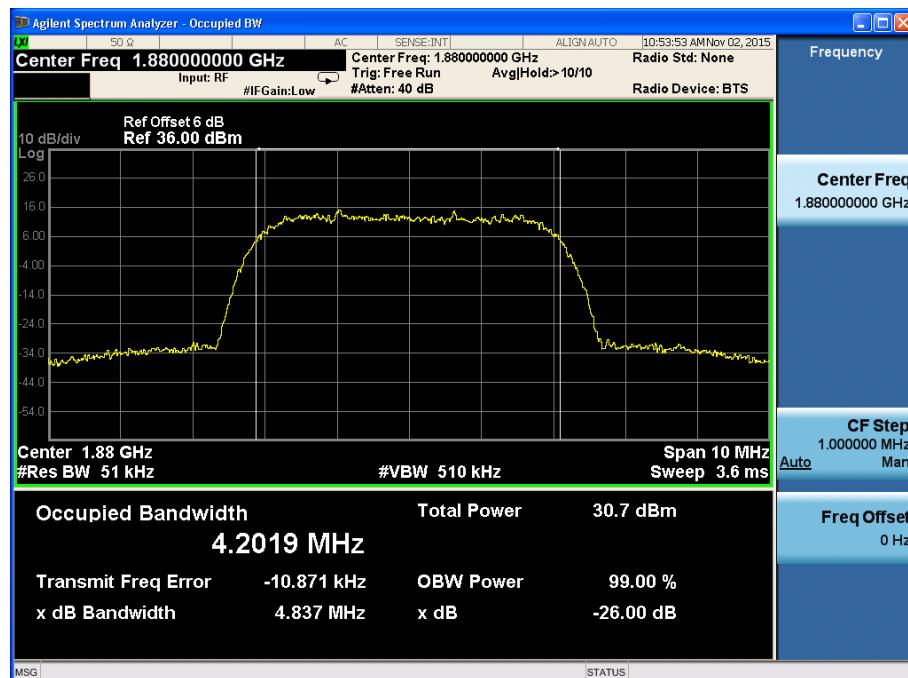

Channel 9400

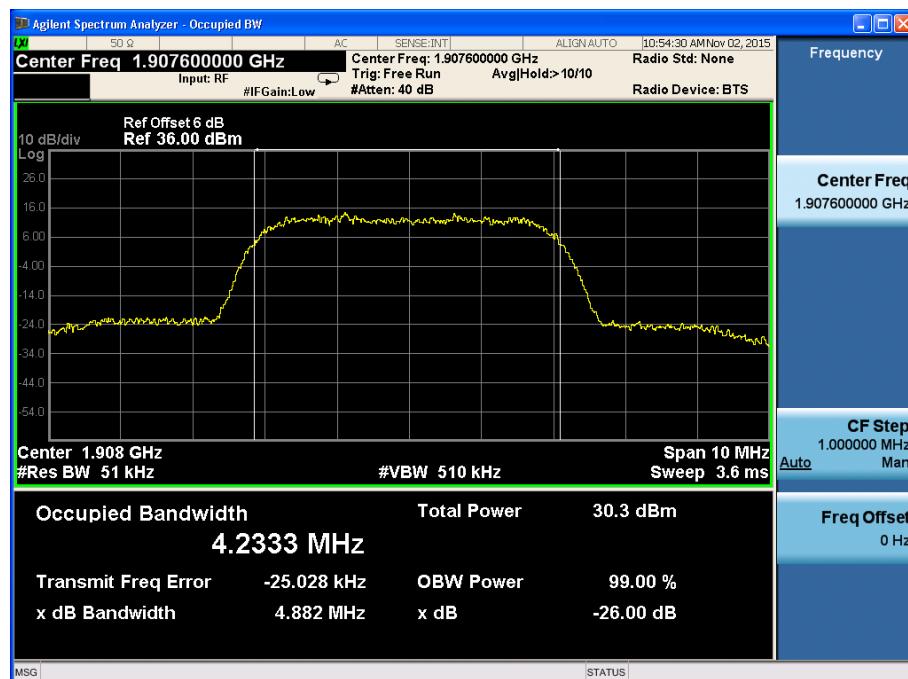


Channel 9538

### 6.1.4 Emission Bandwidth-FCC Part24.238(b)

Ambient condition:

Temperature	Relative humidity	Pressure
23°C	42%	101.9kPa

Test Setup:

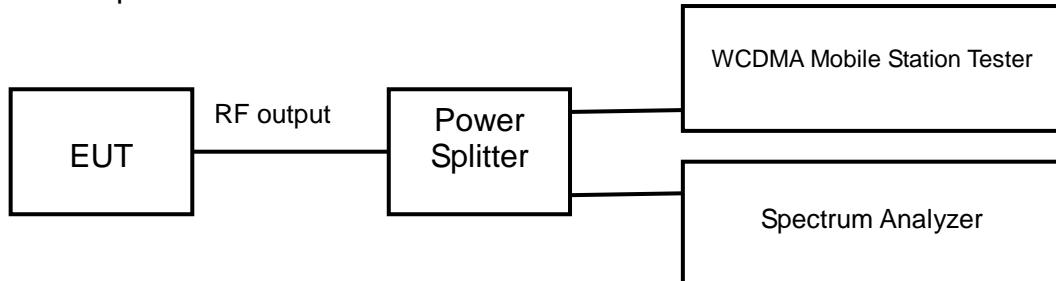

Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. The emission bandwidth is measured using spectrum analyzer. RBW is set to 30kHz on spectrum analyzer. The bandwidth of -26dBc power can be read on spectrum analyzer.

The measurement will be conducted at three channels No9262, No9400 and No9538 (Bottom, middle and top channels of WCDMA band V)

Limits: No specific emission bandwidth requirements in part 22.917(b)

Test result:

WCDMA Mode:

Carrier frequency (MHz)	Channel No.	Bandwidth of -26dBc Power (MHz)
1852.4	9262	4.832
1880.0	9400	4.830
1907.6	9538	4.877

HSDPA/HSUPA Mode:


Carrier frequency (MHz)	Channel No.	Bandwidth of -26dBc Power (MHz)
1852.4	9262	4.820
1880.0	9400	4.837
1907.6	9538	4.882

### 6.1.5 Spurious Emissions at antenna terminal-FCC Part2.1051/24.238

Ambient condition:

Temperature	Relative humidity	Pressure
23°C	42%	101.9kPa

Test Setup:

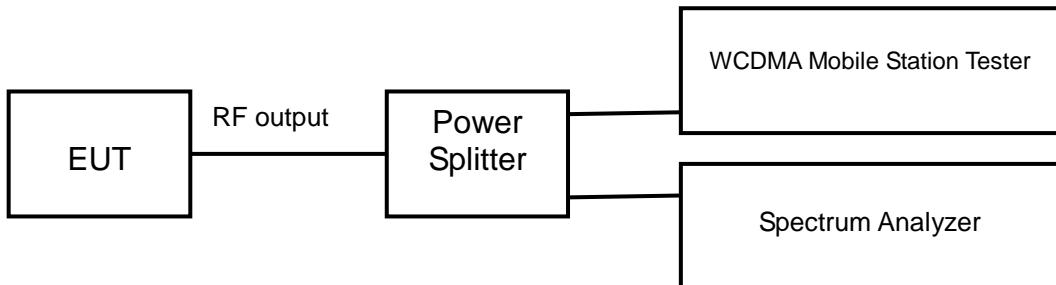

Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. The measurement is carried out using a spectrum analyzer. The spectrum analyzer scans from 30MHz to 9GHz (higher than the 10th harmonic of the carrier). The peak detector is used and RBW is set to 1MHz on spectrum analyzer.


The measurement will be conducted at one channel No4183 (middle channel of WCDMA band V)

Limits	≤-13dBm
--------	---------


Test result:

Refer to the following figures.

WCDMA Mode:

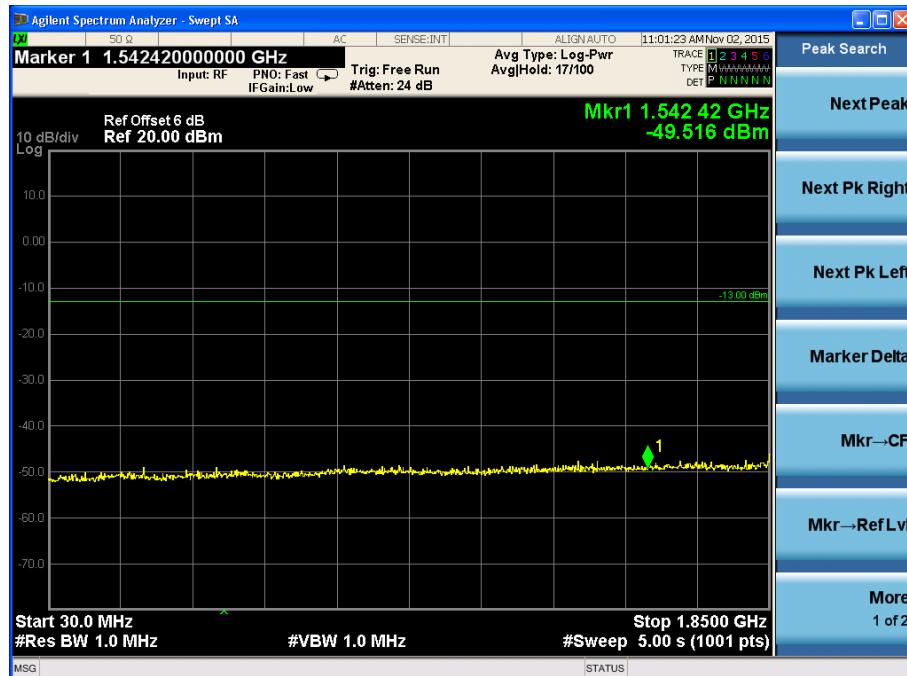


Channel 9400, 30MHz~1850MHz

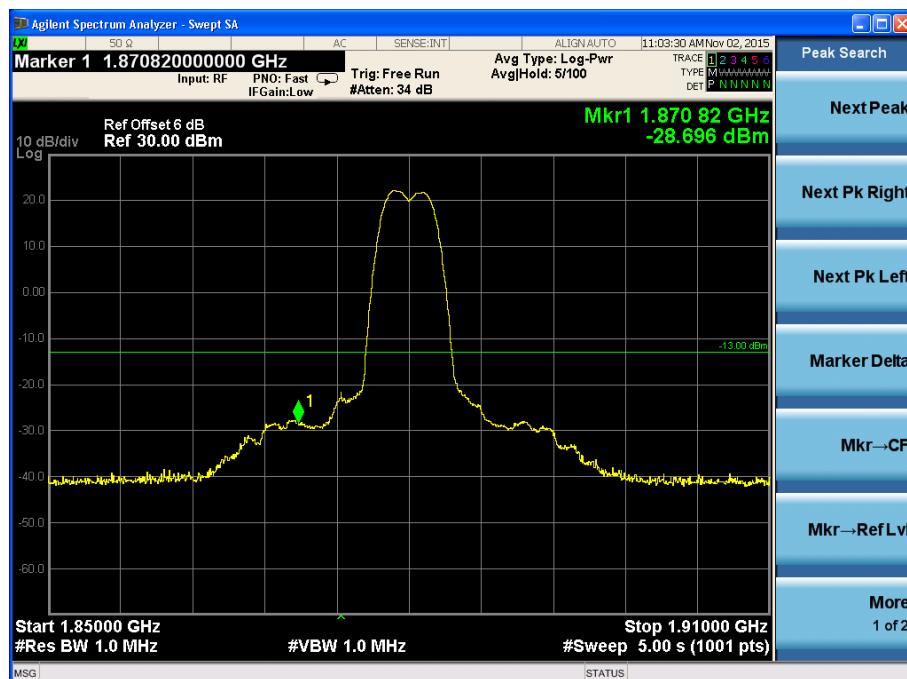


Channel 9400, 1850MHz~1910MHz

Note: The signal beyond the limit is the base station simulator carrier.

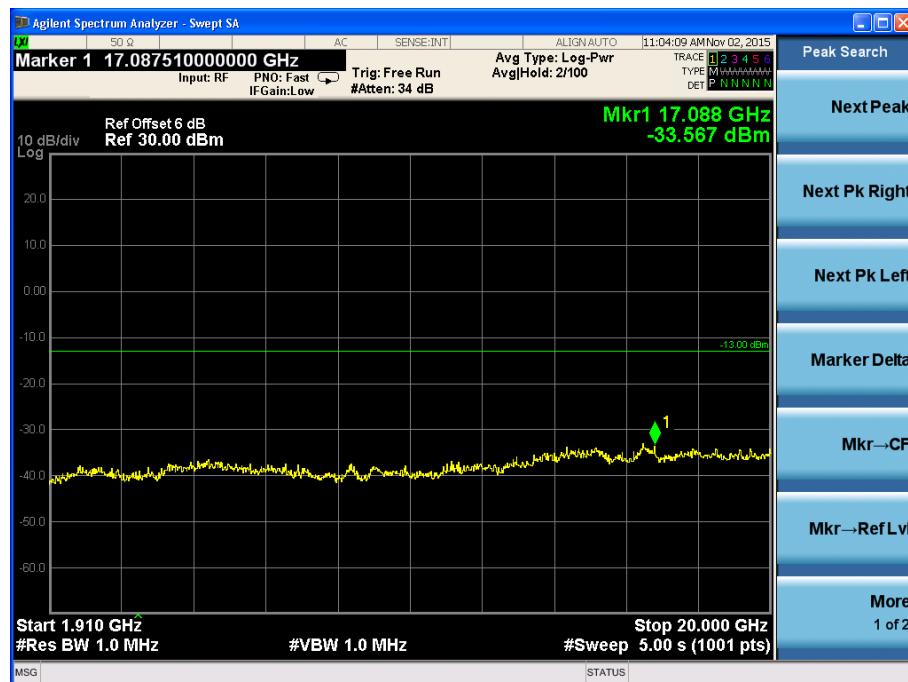


Channel 9400, 1910MHz~20GHz

#### HSDPA/HSUPA Mode:

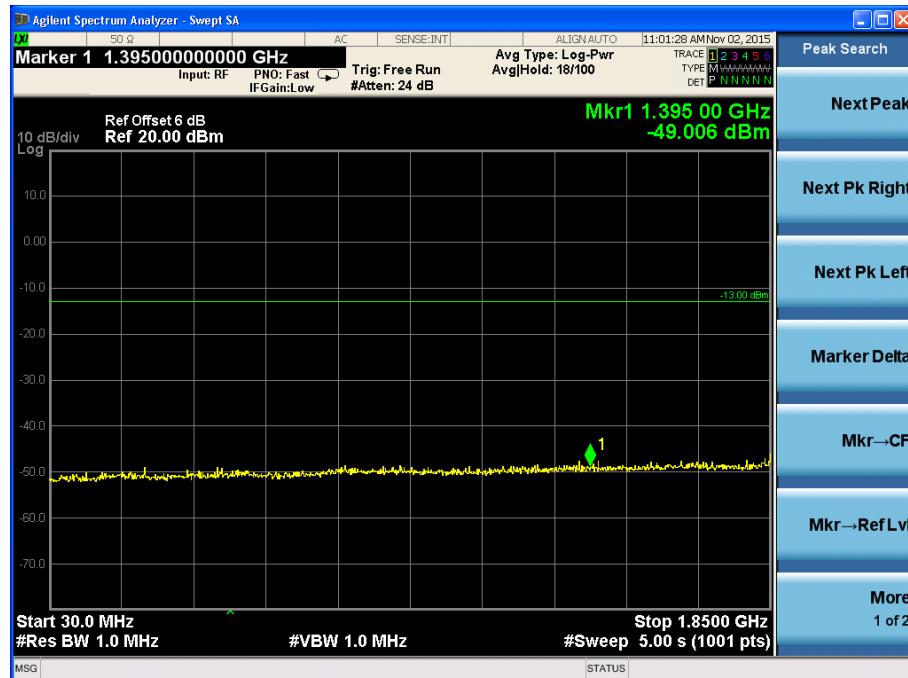

Channel 9400, 30MHz~1850MHz

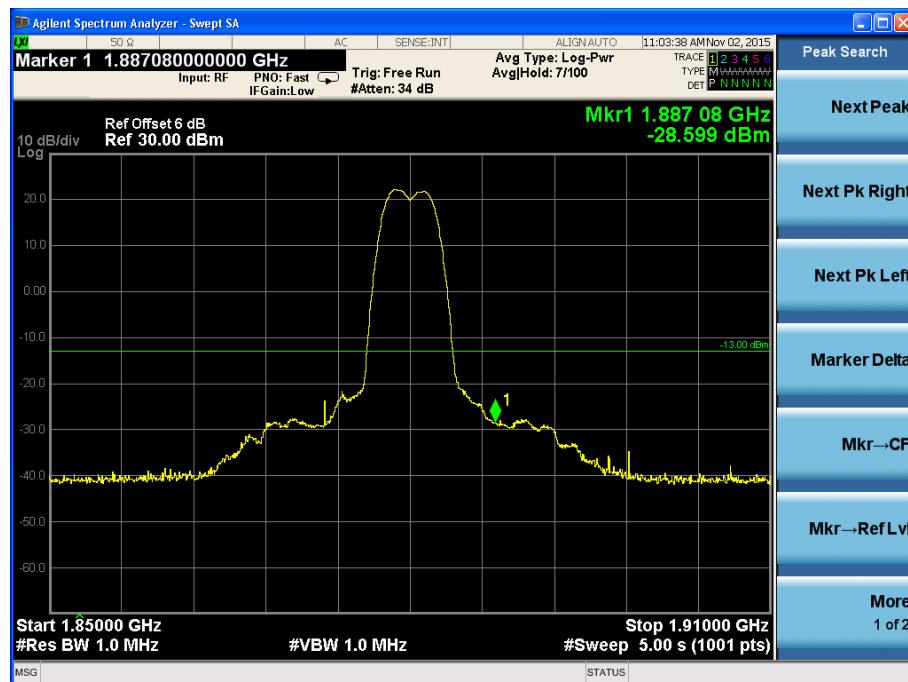

Channel 9400,1850MHz~1910MHz

Note: The signal beyond the limit is the base station simulator carrier.




Channel 9400, 1910MHz~20GHz

### 6.1.6 Band Edges Compliance-FCC Part22.917(b)

Ambient condition:

Temperature	Relative humidity	Pressure
23°C	42%	101.9kPa

Test Setup:

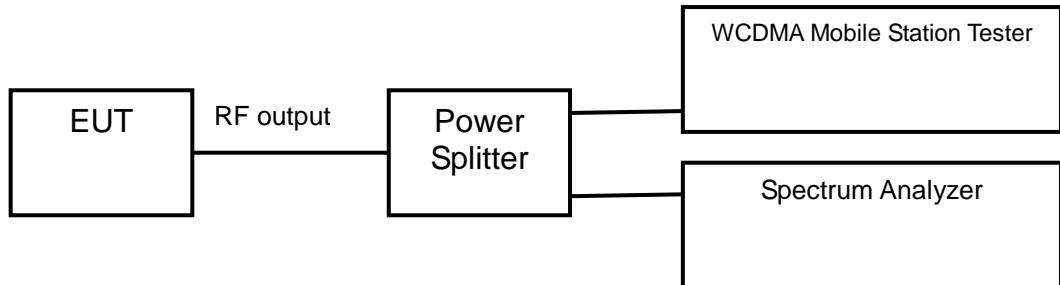

Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. The measurement is carried out using a spectrum analyzer. The peak detector is used and RBW is set to at least 1% of the emission bandwidth on spectrum analyzer.


The measurement will be conducted at two channels No4132 and No4233 (Bottom and top channels of WCDMA band V)

Limits	≤-13dBm
--------	---------


Test result:

Refer to the following figures.

WCDMA Mode:

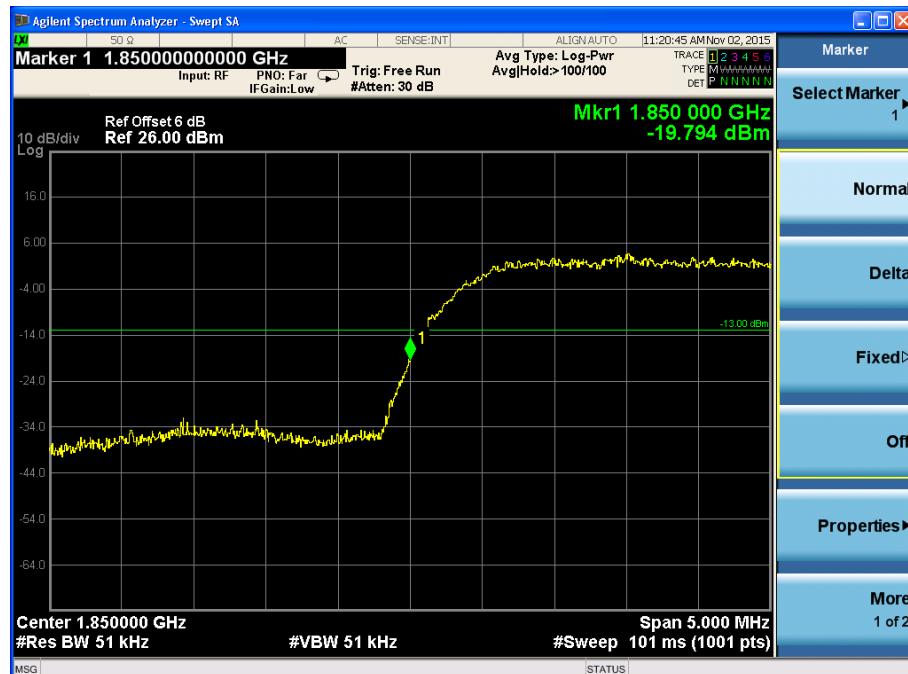


Channel 9262

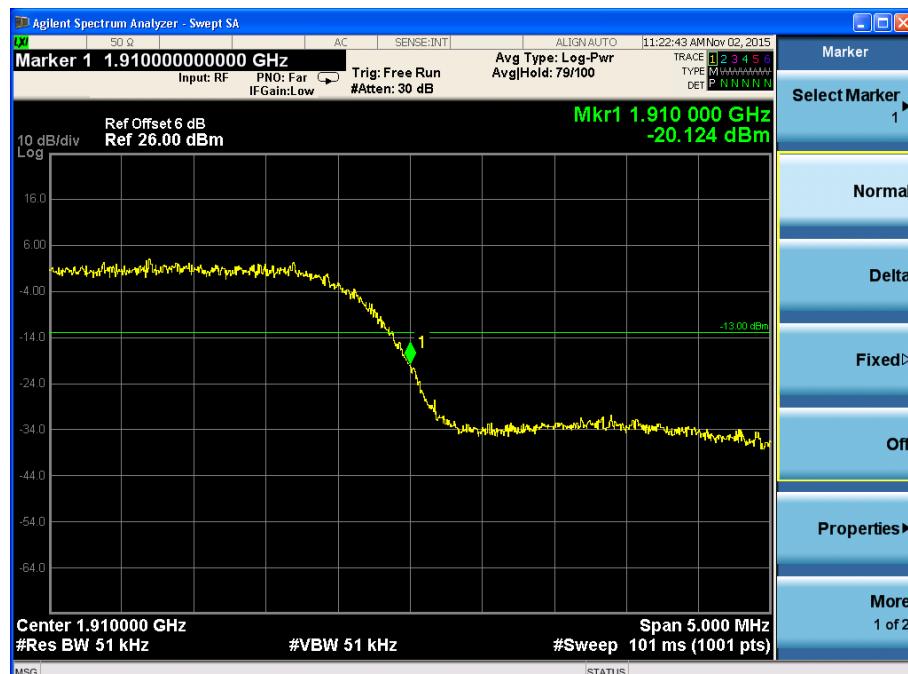

Channel 9538

HSDPA/HSUPA Mode:

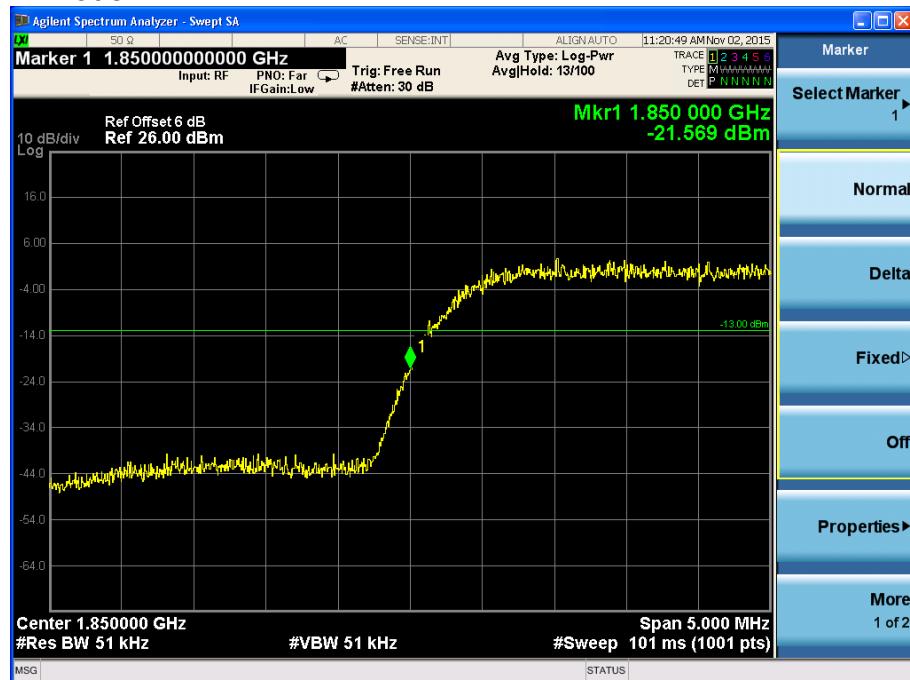

Channel 9262




Channel 9538

### 6.1.7 Frequency Stability-FCC Part2.1055/22.355

Ambient condition:

Temperature	Relative humidity	Pressure
23°C	42%	101.9kPa

Test setup:

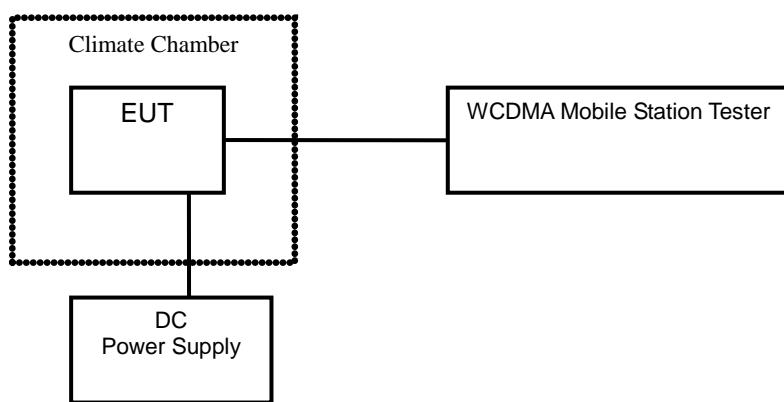

Test Procedure:

A radio link shall be established between EUT and Tester. The tester will sample the transmitter RF output signal and measure its frequency. The temperature inside the climate chamber is varied from -30 to +50°C in 10°C step size, and also the DC power supply voltage to the EUT is varied from LV to HV. The measurement will be conducted at three channels No4132, No4183 and No4233 (Bottom, middle and top channels of WCDMA band V).

Limits: No specific frequency stability requirements in part 2.1055 and part 22.355.

## Test result:

## WCDMA Mode:

Temperature(°C)	Test Result (ppm)@NV		
	Channel 9262	Channel 9400	Channel 9538
-30	0.015	0.017	0.012
-20	0.014	0.011	0.012
-10	0.011	0.013	0.015
0	0.014	0.013	0.013
+10	0.012	0.014	0.014
+20	0.014	0.014	0.013
+30	0.014	0.015	0.014
+40	0.015	0.019	0.015
+50	0.013	0.019	0.014

Voltage	Test Result (ppm)@NT		
	Channel 9262	Channel 9400	Channel 9538
LV	0.013	0.014	0.015
HV	0.013	0.014	0.016

## HSDPA/HSUPA Mode:

Temperature(°C)	Test Result (ppm)@NV		
	Channel 9262	Channel 9400	Channel 9538
-30	0.011	0.012	0.016
-20	0.012	0.013	0.017
-10	0.014	0.015	0.015
0	0.013	0.012	0.015
+10	0.015	0.012	0.015
+20	0.013	0.011	0.013
+30	0.016	0.012	0.013
+40	0.014	0.013	0.013
+50	0.015	0.014	0.014


Voltage	Test Result (ppm)@NT		
	Channel 9262	Channel 9400	Channel 9538
LV	0.013	0.014	0.015
HV	0.013	0.014	0.015

### 6.1.8 Radiated Spurious Emissions-FCC Part2.1053/24.238


Ambient condition:

Temperature	Relative humidity	Pressure
20.8°C	36.5%	100.9kPa

Test Setup:

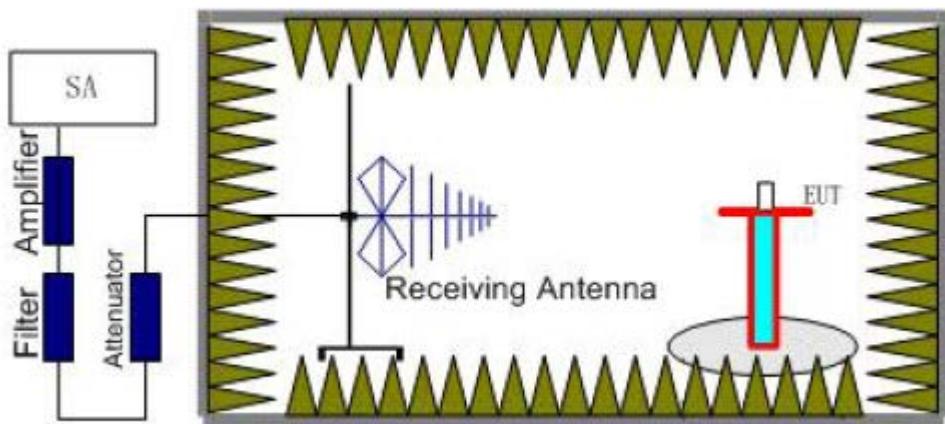

Step 1

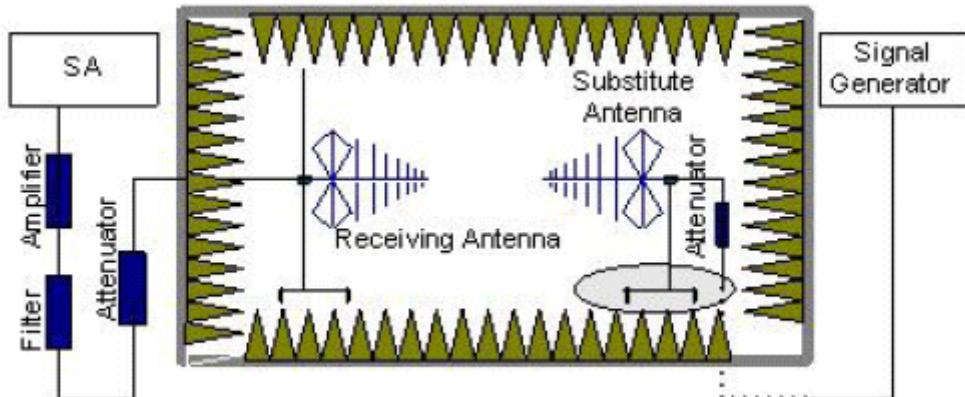

Step 2

#### Test procedure:

The measurements procedures in TIA-603C-2004 are used.

The spectrum was scanned from 30MHz to the 10th harmonic of the highest frequency generated within the equipment.

#### Step 1:

The measurement is carried out in the fully anechoic chamber. EUT was placed on a 2.4 meter high non-conductive table at a 3 meter test distance from the test receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT. The height of receiving antenna is 2.4m and varies in certain range to find the maximum power value. A radio link shall be established between EUT and Tester. The output power of the cell signal of the tester will be decreased until the output power of the EUT reach a maximum value. The measurement is carried out using a spectrum analyzer or receiver. The spectrum analyzer scans from 30MHz to 20GHz (higher than the 10th harmonic of the carrier). The peak detector is used and RBW is set to 1MHz on spectrum analyzer. Then the antenna height and turn table rotation is adjusted till the maximum power value is founded on spectrum analyzer or receiver. A notch filter is necessary in the band near to the carrier frequency. A high pass filter is needed to avoid the distortion of the testing equipment in the band above the carrier frequency.

#### Step 2:

A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.

A power (Pmea) is applied to the input of the substitution antenna, and adjusts the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (Pmea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

A “reference path loss” should be calculated after test. The attenuation of “reference path loss” is the cable loss between the Signal Source with the Substitution Antenna (Pca) and the Substitution Antenna Gain (Ga).

#### Calculation procedure:

The data of cable loss and antenna gain has been calibrated in full testing frequency range before the testing.

The power of the Radiated Spurious Emissions is calculated by adding the cable loss and antenna gain. The basic equation with a sample calculation is as followed:

$$\text{Power(EIRP)} = \text{Pmea} + \text{Pca} + \text{Ga}$$

This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15dB) and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $\text{ERP} = \text{EIRP} - 2.15$  (dB).

Assumed the power of signal source record is -20dBm. A cable loss of -30dB, and an antenna gain of 11dB are added.

$$P = P_{mea} + P_{ca} + G_a = (-20\text{dBm}) + (-30\text{dB}) + (11\text{dB}) = -39\text{dBm}$$

The measurement will be done at carrier frequencies that pertain to bottom (Channel 4133, middle (Channel 4175 and top (Channel 4232) channels of WCDMA band V.

Test result:

WCDMA Mode:

Channel 9662

Frequency (MHz)	Power (dBm)	Limited (dBm)	Polarization
2458.63	-52.86	-13	Vertical
2778.25	-51.29	-13	Vertical
3727.86	-43.72	-13	Vertical
6677.57	-43.08	-13	Horizontal
9960.81	-39.21	-13	Vertical
17822.30	-36.32	-13	Vertical

Channel 9800

Frequency (MHz)	Power (dBm)	Limited (dBm)	Polarization
2454.27	-52.71	-13	Vertical
2775.76	-51.95	-13	Vertical
3728.67	-44.45	-13	Horizontal
6677.96	-43.76	-13	Vertical
9963.79	-39.18	-13	Vertical
17823.53	-35.47	-13	Vertical

Channel 9938

Frequency (MHz)	Power (dBm)	Limited (dBm)	Polarization
2458.00	-53.24	-13	Vertical
2779.15	-51.51	-13	Vertical
3731.34	-44.14	-13	Vertical
6680.27	-43.29	-13	Vertical
9961.16	-38.93	-13	Vertical
17820.62	-36.05	-13	Vertical

## HSDPA/HSUPA Mode:

## Channel 9662

Frequency (MHz)	Power (dBm)	Limited (dBm)	Polarization
2458.73	-52.78	-13	Vertical
2777.52	-51.53	-13	Vertical
3730.69	-44.31	-13	Vertical
6677.67	-43.24	-13	Vertical
9961.11	-39.82	-13	Vertical
17819.83	-36.29	-13	Vertical

## Channel 9800

Frequency (MHz)	Power (dBm)	Limited (dBm)	Polarization
2456.27	-52.44	-13	Vertical
2778.58	-51.45	-13	Horizontal
3730.80	-44.32	-13	Vertical
6677.78	-43.23	-13	Vertical
9960.34	-39.36	-13	Vertical
17822.75	-35.44	-13	Vertical

## Channel 9938

Frequency (MHz)	Power (dBm)	Limited (dBm)	Polarization
2458.51	-53.24	-13	Vertical
2779.86	-51.47	-13	Vertical
3728.59	-44.04	-13	Vertical
6677.51	-43.95	-13	Vertical
9961.25	-39.64	-13	Horizontal
17820.56	-36.39	-13	Vertical


## 6.2 WCDMA Band V

### 6.2.1 RF Power Output-FCC Part22.913(a)

Ambient condition:

Temperature	Relative humidity	Pressure
23°C	42%	101.9kPa

Test Setup:

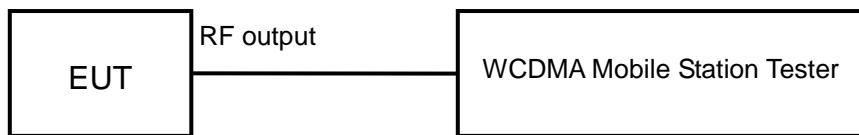

Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. Then the test data can be read at the tester screen. The loss between RF output port of the EUT and the input port of the tester will be taken into consideration.

The measurement will be conducted at three channels No4132, No4183 and No4233 (Bottom, middle and top channels of WCDMA band V)

Limits	≤24dBm
--------	--------

Test result:

WCDMA Mode:

Carrier frequency (MHz)	Channel No.	RF Power Output (dBm)
826.4	4132	22.15
836.6	4183	21.97
846.6	4233	22.43

HSDPA/HSUPA Mode:


Carrier frequency (MHz)	Channel No.	RF Power Output (dBm)
826.4	4132	20.77
836.6	4183	20.98
846.6	4233	20.86

### 6.2.2 Effective Radiated Power-FCC Part22.913(a)


Ambient condition:

Temperature	Relative humidity	Pressure
20.8°C	36.5%	100.9kPa

Test setup:

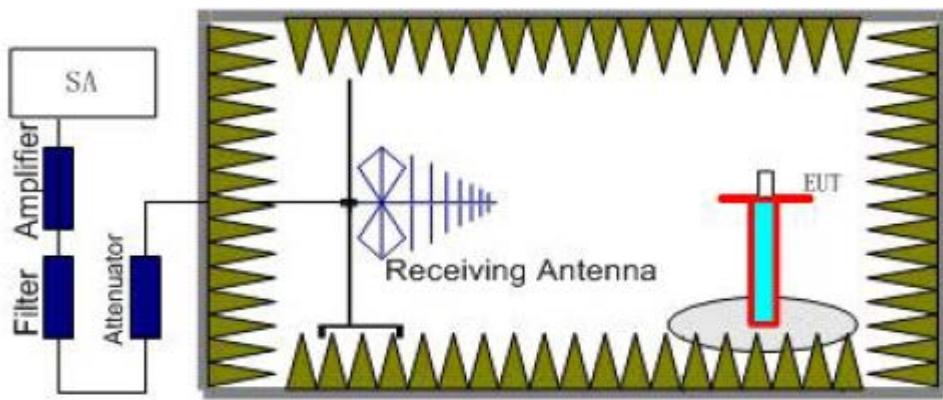

Step 1

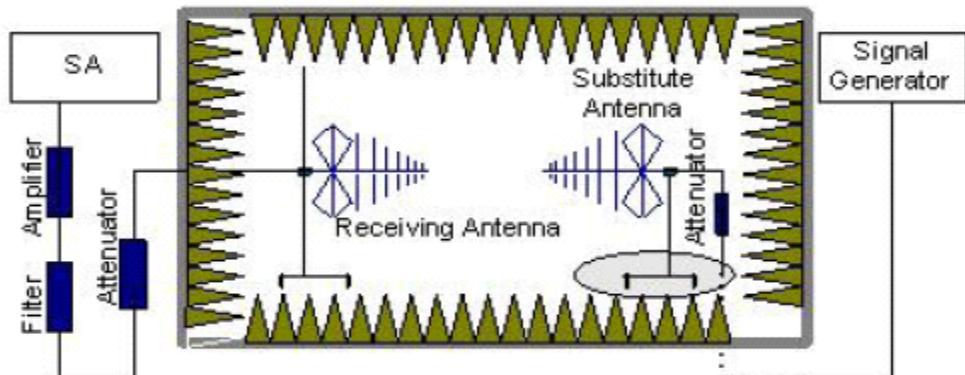

Step 2

Test procedure:

The measurements procedures in TIA-603C-2004 are used.

Step 1:

The measurement is carried out in the fully anechoic chamber. EUT was placed on a 2.4 meters high non-conductive table at a 3 meters test distance from the test receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT. The height of receiving antenna is 2.4m and varies in certain range to find the maximum power value. A radio link shall be established between EUT and Tester. The output power of the cell signal of the tester will be decreased until the output power of the EUT reach a maximum value. A peak detector is used and RBW is set to 3MHz. Then the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turn table shall be rotated from 0 to 360 degrees for detecting the maximum power value on spectrum analyzer or receiver. And the maximum value of the receiver should be recorded as (Pr).

Step 2:

A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator. To repeat the same procedure as step1 and the level of signal generator will be adjusted till the same power value on the spectrum analyzer or receiver. The ERP/EIRP of the EUT can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.

A power (Pmea) is applied to the input of the substitution antenna, and adjusts the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (Pmea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

A “reference path loss” should be calculated after test. The attenuation of “reference path loss” is the cable loss between the Signal Source with the Substitution Antenna (Pca) and the Substitution Antenna Gain (Ga).

The measurement results are obtained as described below:

$$\text{Power (EIRP)} = \text{Pmea} + \text{Pca} + \text{Ga}$$

This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15dB) and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $\text{ERP} = \text{EIRP} - 2.15$  (dB).

The measurement will be done at three channels No4132, No4183 and No4233 (Bottom, middle and top channels of WCDMA band V)

Limits	≤38.5dBm
--------	----------

## Test result:

## WCDMA Mode:

Frequency (MHz)	Peak ERP (dBm)	Pca Cable loss (dB)	Ga Antenna Gain (dB)	Pmea (dBm)	Polarization
826.4	23.04	-3.8	8.6	19.24	Vertical
836.6	23.42	-3.8	8.6	19.62	Vertical
846.6	23.63	-3.8	8.6	19.83	Vertical

## HSDPA/HSUPA Mode:


Frequency (MHz)	Peak ERP (dBm)	Pca Cable loss (dB)	Ga Antenna Gain (dB)	Pmea (dBm)	Polarization
826.4	22.92	-3.8	8.6	19.12	Vertical
836.6	23.17	-3.8	8.6	19.37	Vertical
846.6	23.22	-3.8	8.6	19.42	Vertical

### 6.2.3 Occupied Bandwidth-FCC Part2.1049

Ambient condition:

Temperature	Relative humidity	Pressure
23°C	42%	101.9kPa

Test Setup:

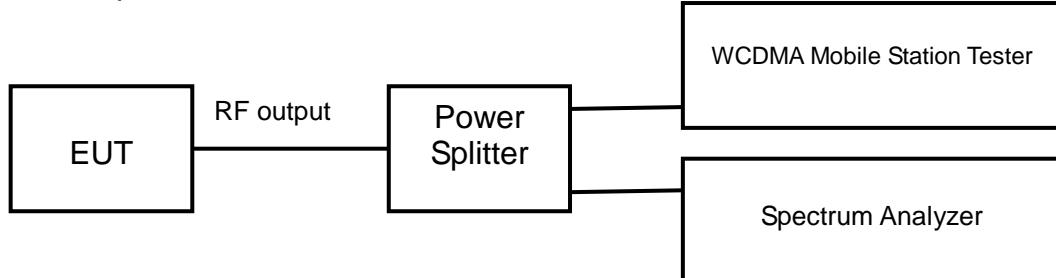

Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. The occupied bandwidth is measured using spectrum analyzer. RBW is set to 30kHz on spectrum analyzer. The bandwidth of 99% power can be read on spectrum analyzer.

The measurement will be conducted at three channels No4132, No4183 and No4233 (Bottom, middle and top channels of WCDMA band V)

Limits: No specific occupied bandwidth requirements in part 2.1049

Test result:


WCDMA Mode:

Carrier frequency (MHz)	Channel No.	Bandwidth of 99% Power (MHz)
826.4	4132	4.2226
836.6	4183	4.1852
846.6	4233	4.2305


HSDPA/HSUPA Mode:

Carrier frequency (MHz)	Channel No.	Bandwidth of 99% Power (MHz)
826.4	4132	4.2214
836.6	4183	4.2121
846.6	4233	4.2321

## WCDMA Mode:

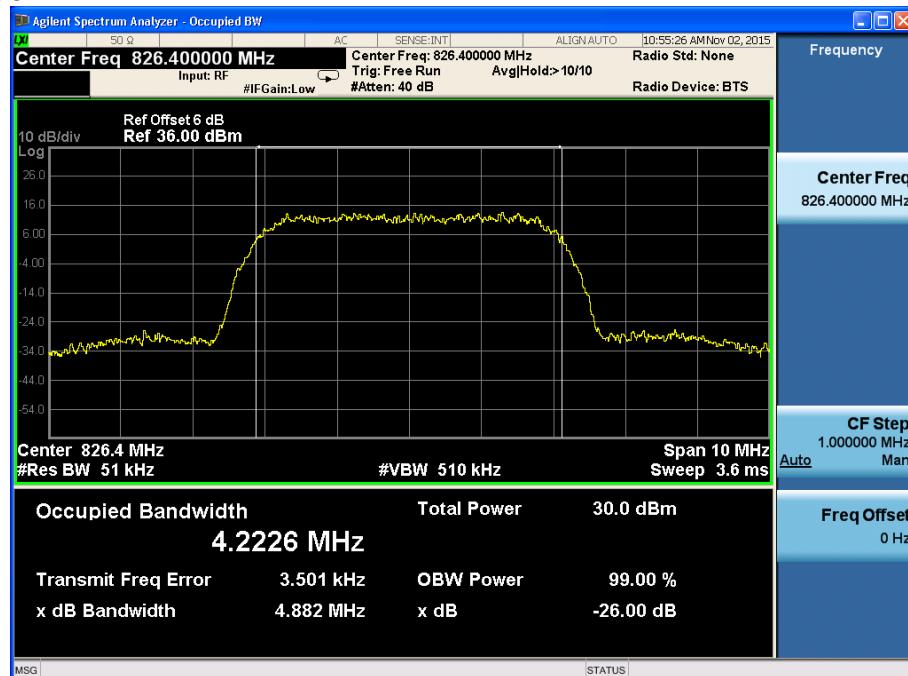

Channel 4132

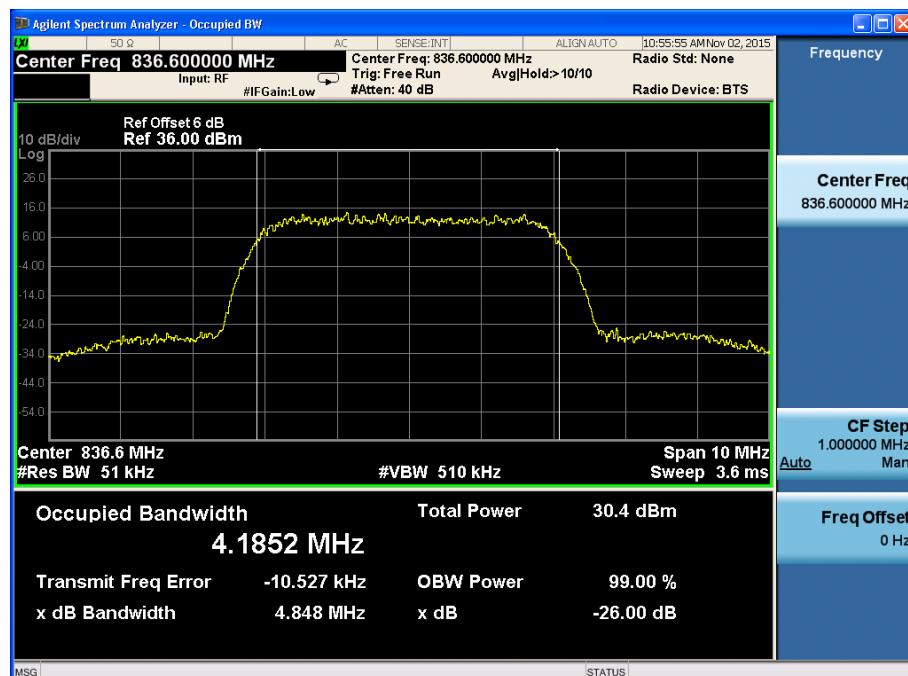


Channel 4183




Channel 4233


## HSDPA/HSUPA Mode:

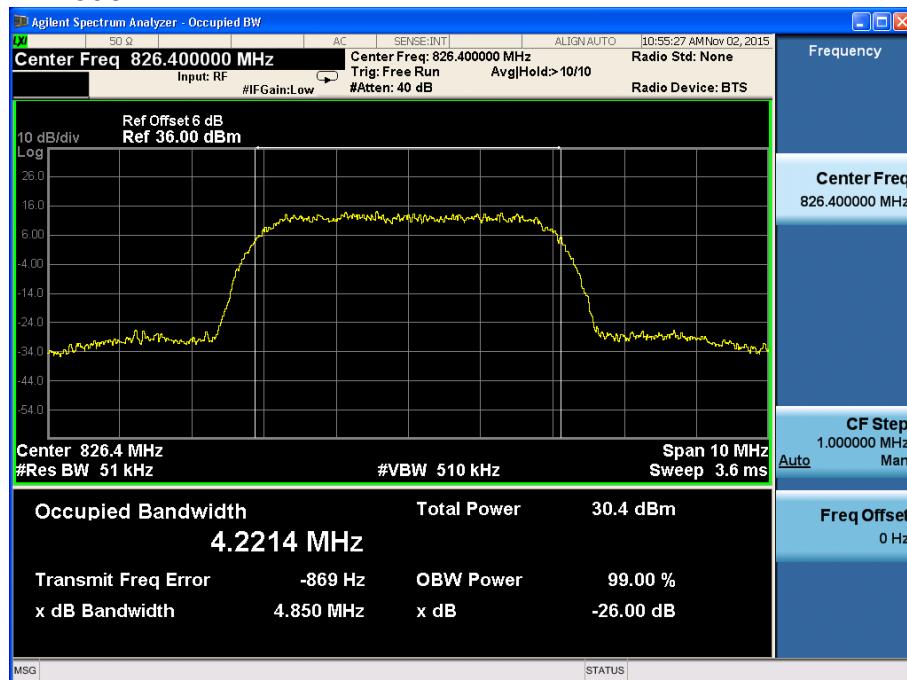

Channel 4132

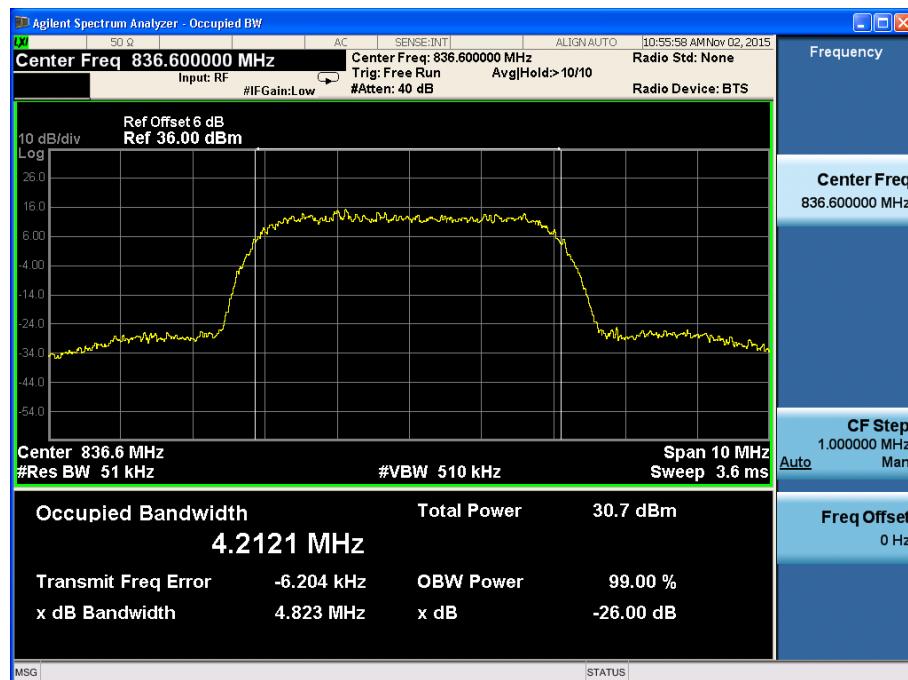

Channel 4183

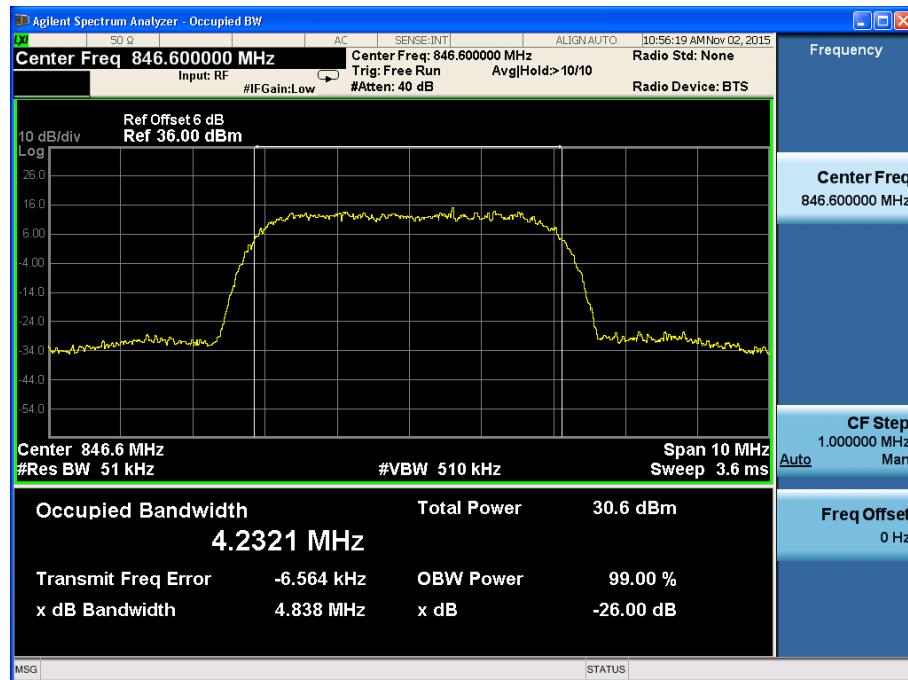


Channel 4233

### 6.2.4 Emission Bandwidth-FCC Part22.917(b)

Ambient condition:

Temperature	Relative humidity	Pressure
23°C	42%	101.9kPa

Test Setup:

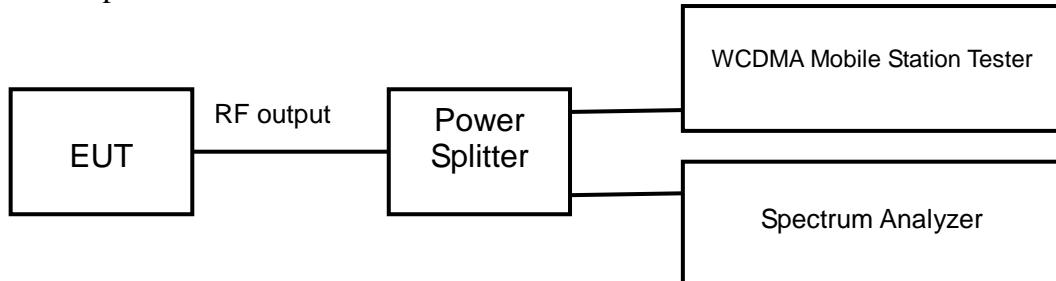

Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. The emission bandwidth is measured using spectrum analyzer. RBW is set to 30kHz on spectrum analyzer. The bandwidth of -26dBc power can be read on spectrum analyzer.

The measurement will be conducted at three channels No9262, No9400 and No9538 (Bottom, middle and top channels of WCDMA band V)

Limits: No specific emission bandwidth requirements in part 22.917(b)

Test result:

WCDMA Mode:

Carrier frequency (MHz)	Channel No.	Bandwidth of -26dBc Power (MHz)
826.4	4132	4.882
836.6	4183	4.848
846.6	4233	4.838

HSDPA/HSUPA Mode:


Carrier frequency (MHz)	Channel No.	Bandwidth of -26dBc Power (MHz)
826.4	4132	4.850
836.6	4183	4.823
846.6	4233	4.838

## 6.2.5 Spurious Emissions at antenna terminal-FCC Part2.1051/22.917

Ambient condition:

Temperature	Relative humidity	Pressure
23°C	42%	101.9kPa

Test Setup:

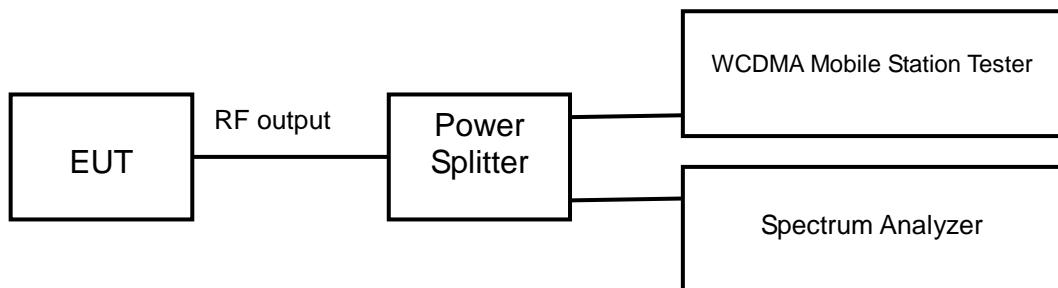

Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. The measurement is carried out using a spectrum analyzer. The spectrum analyzer scans from 30MHz to 9GHz (higher than the 10th harmonic of the carrier). The peak detector is used and RBW is set to 1MHz on spectrum analyzer.


The measurement will be conducted at one channel No4183 (middle channel of WCDMA band V)

Limits	≤-13dBm
--------	---------


Test result:

Refer to the following figures.

WCDMA Mode:

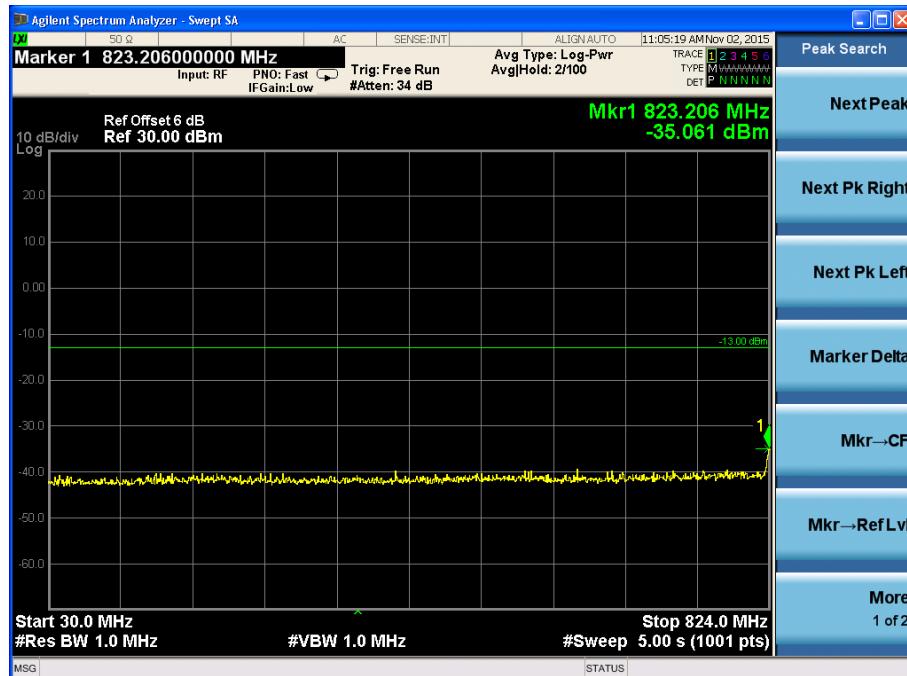

Channel 4183, 30MHz~824MHz

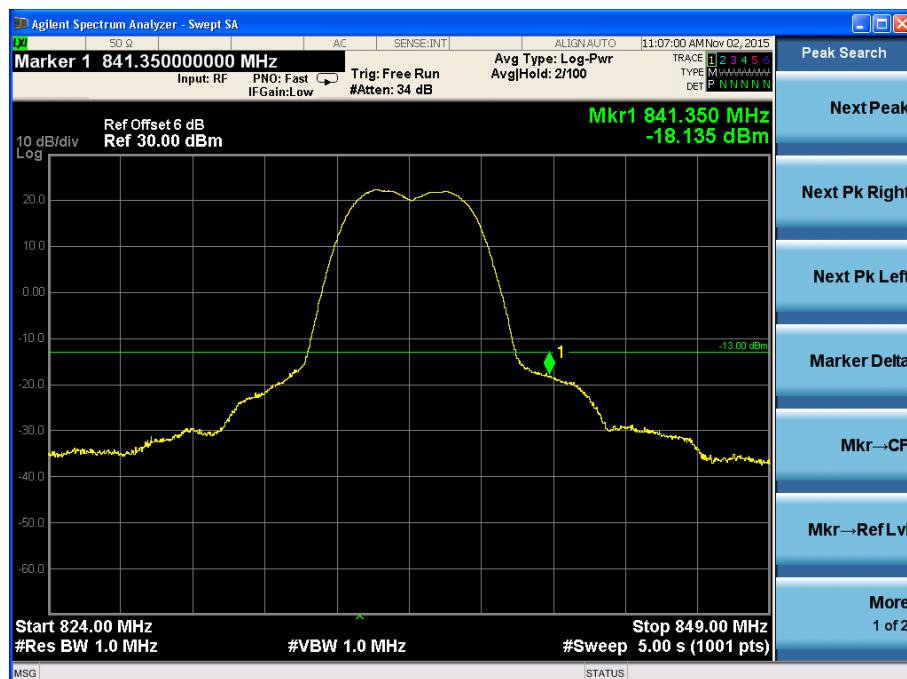


Channel 4183, 824MHz~849MHz

Note: The signal beyond the limit is the base station simulator carrier.




Channel 4183, 849MHz~9GHz

HSDPA/HSUPA Mode:

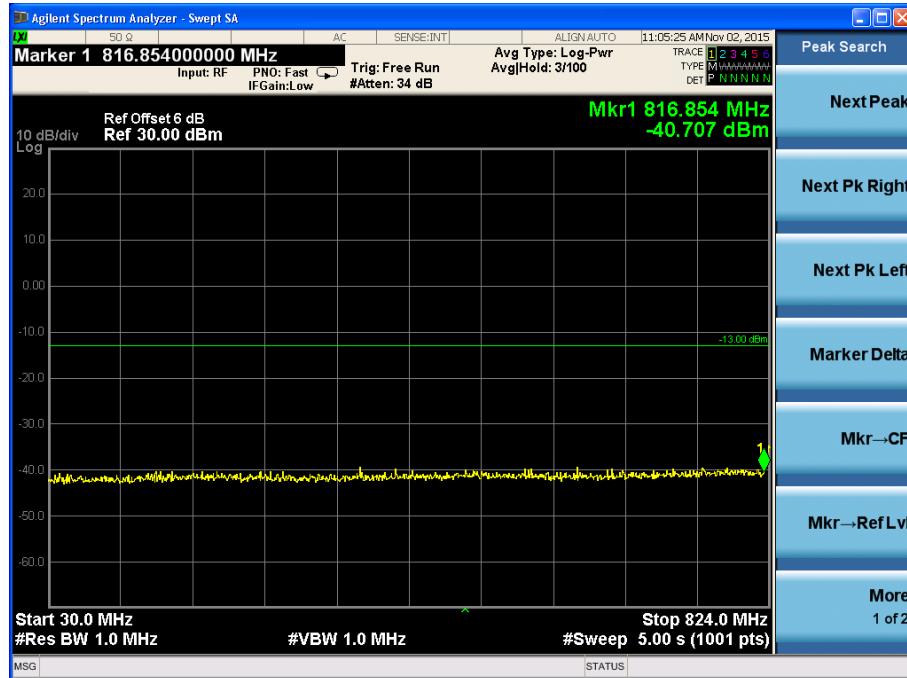


Channel 4183, 30MHz~824MHz

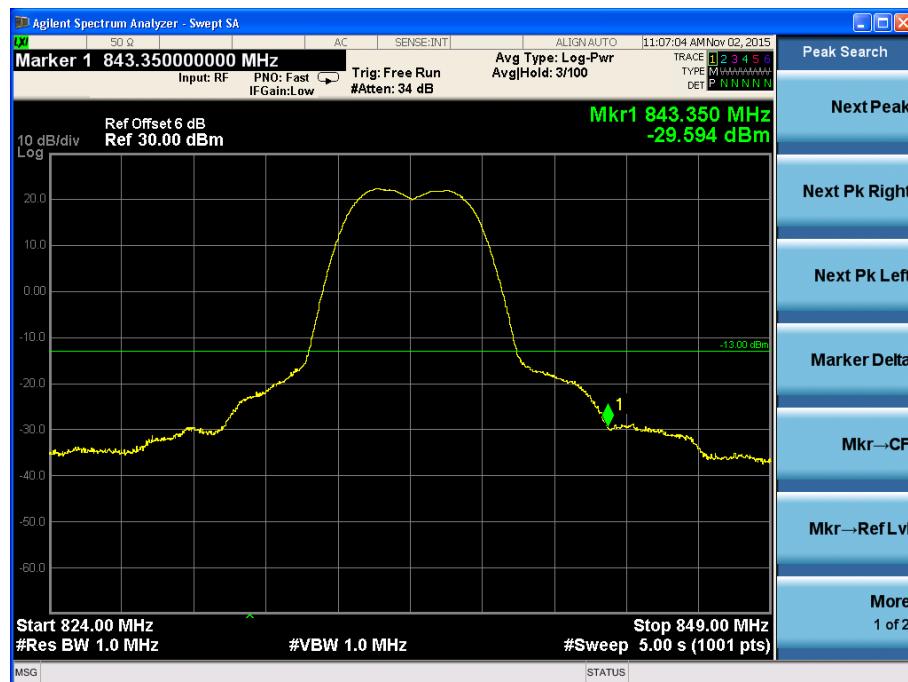

Channel 4183, 824MHz~849MHz

Note: The signal beyond the limit is the base station simulator carrier.

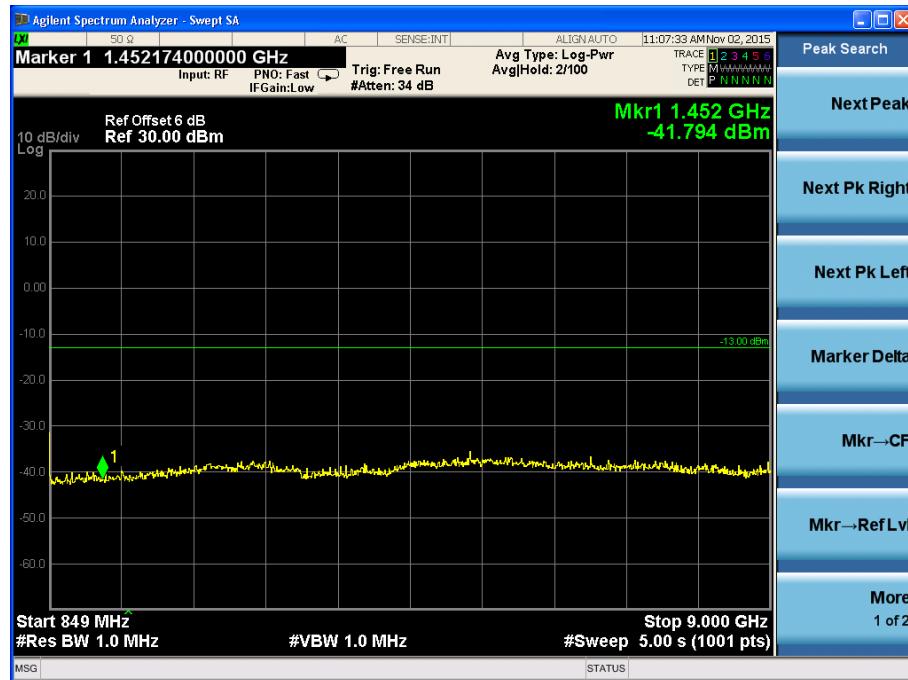


Channel 4183, 849MHz~9GHz

### 6.2.6 Band Edges Compliance-FCC Part22.917(b)

Ambient condition:

Temperature	Relative humidity	Pressure
23°C	42%	101.9kPa

Test Setup:

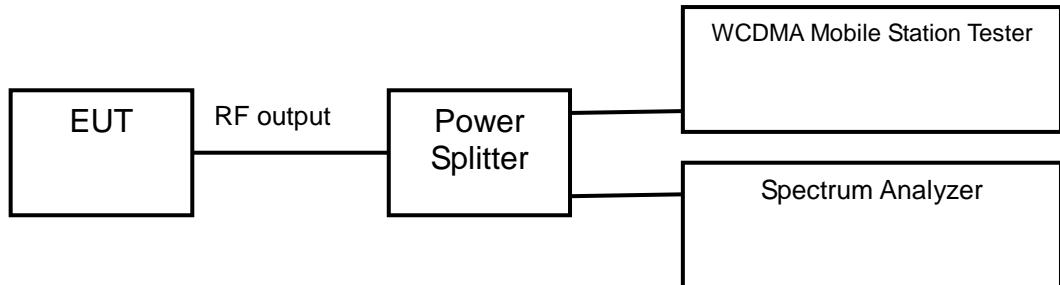

Test procedure:

After a radio link has been established between EUT and Tester, the output power of the cell signal of the testing equipment will be decreased until the output power of the EUT reach a maximum value. The measurement is carried out using a spectrum analyzer. The peak detector is used and RBW is set to at least 1% of the emission bandwidth on spectrum analyzer.


The measurement will be conducted at two channels No4132 and No4233 (Bottom and top channels of WCDMA band V)

Limits	≤-13dBm
--------	---------


Test result:

Refer to the following figures.

WCDMA Mode:

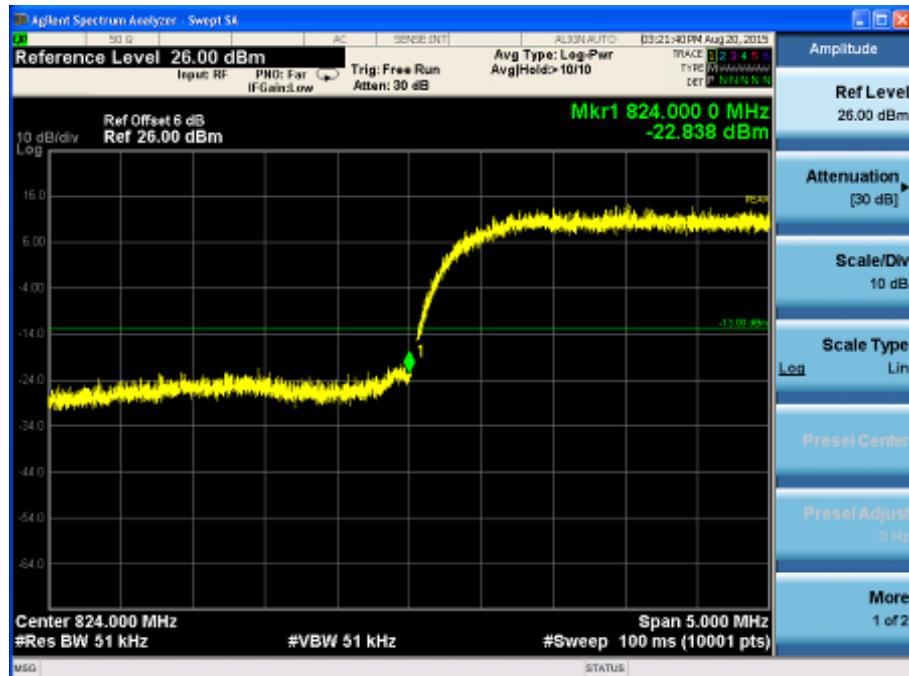


Channel 4132

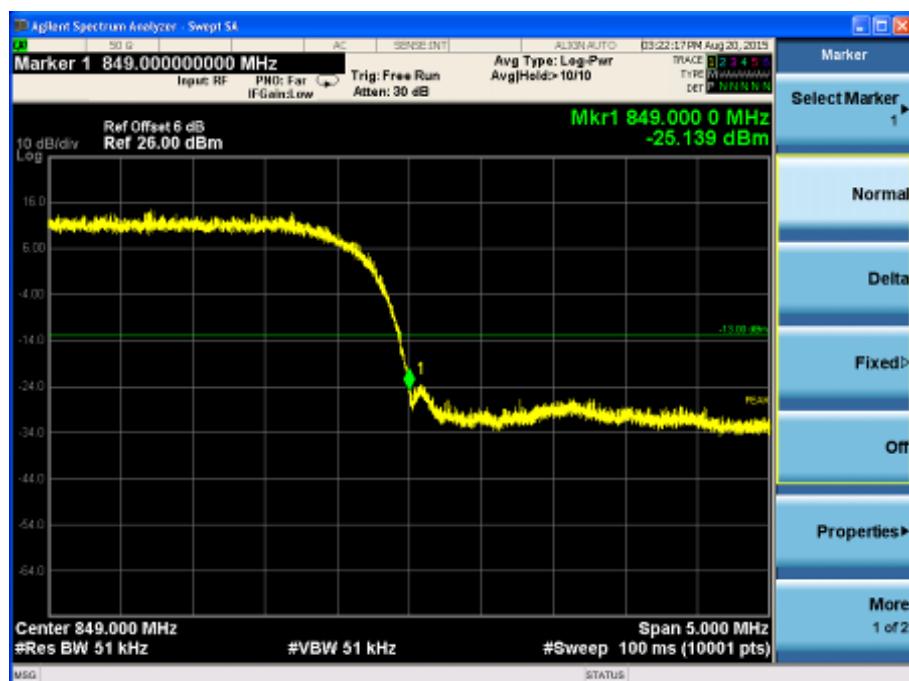


Channel 4233

HSDPA/HSUPA Mode:

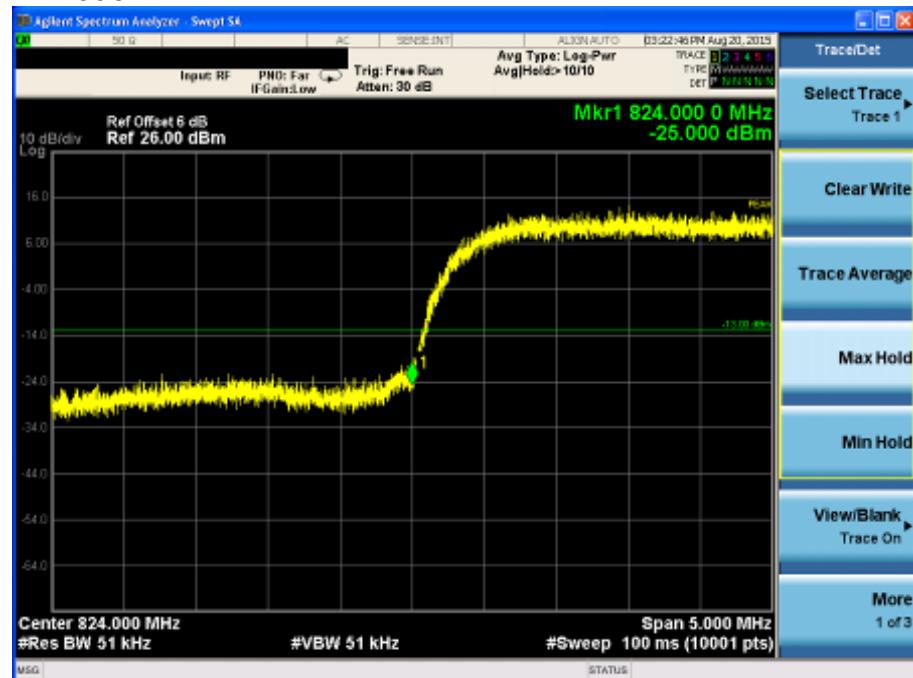

Channel 4132

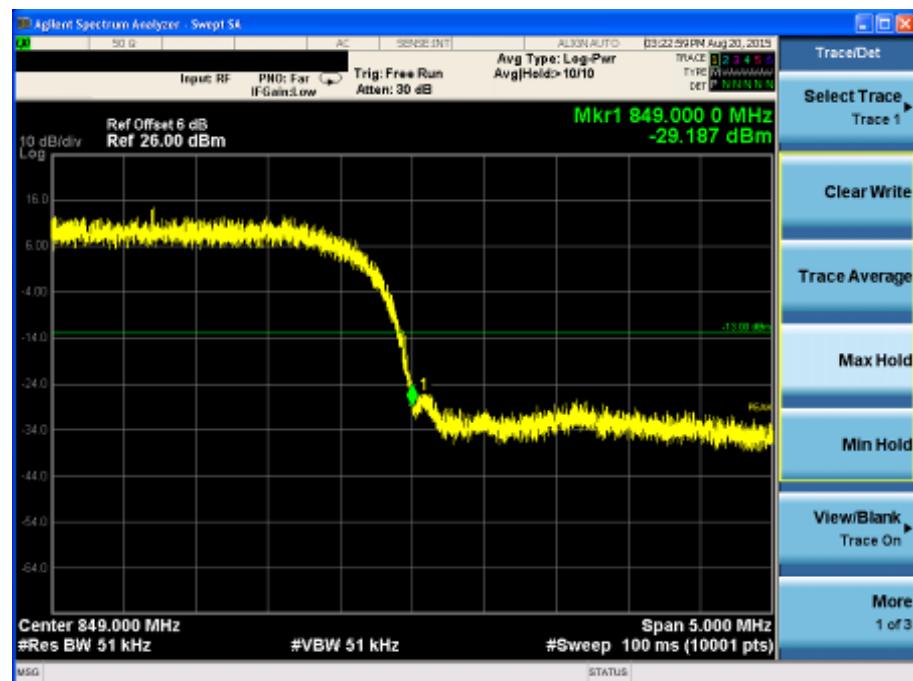


Channel 4233

## 6.2.7 Frequency Stability-FCC Part2.1055/22.355

Ambient condition:

Temperature	Relative humidity	Pressure
23°C	42%	101.9kPa

Test setup:

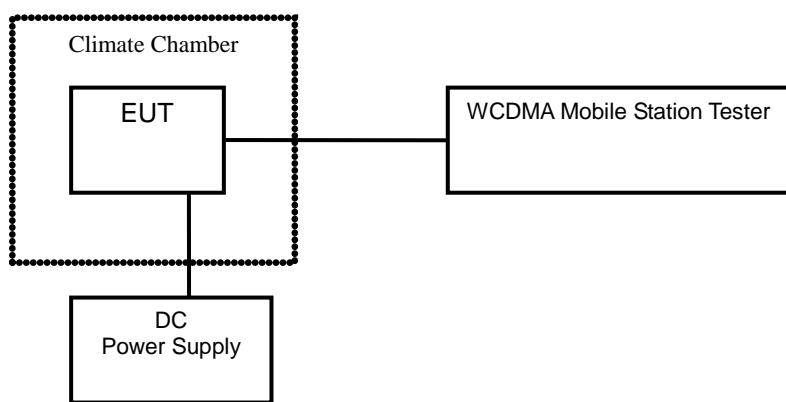

Test Procedure:

A radio link shall be established between EUT and Tester. The tester will sample the transmitter RF output signal and measure its frequency. The temperature inside the climate chamber is varied from -30 to +50°C in 10°C step size, and also the DC power supply voltage to the EUT is varied from LV to HV. The measurement will be conducted at three channels No4132, No4183 and No4233 (Bottom, middle and top channels of WCDMA band V).

Limits: No specific frequency stability requirements in part 2.1055 and part 22.355.

Test result:

WCDMA Mode:

Temperature(°C)	Test Result (ppm)@NV		
	Channel 4132	Channel 4183	Channel 4233
-30	0.015	0.012	0.016
-20	0.015	0.014	0.017
-10	0.016	0.015	0.013
0	0.012	0.013	0.016
+10	0.014	0.012	0.014
+20	0.016	0.015	0.017
+30	0.012	0.013	0.012
+40	0.014	0.012	0.014
+50	0.012	0.011	0.013

Voltage	Test Result (ppm)@NT		
	Channel 4132	Channel 4183	Channel 4233
LV	0.011	0.012	0.011
HV	0.011	0.012	0.011

HSDPA/HSUPA Mode:

Temperature(°C)	Test Result (ppm)@NV		
	Channel 4132	Channel 4183	Channel 4233
-30	0.012	0.012	0.012
-20	0.013	0.014	0.015
-10	0.012	0.013	0.012
0	0.015	0.011	0.014
+10	0.014	0.015	0.017
+20	0.012	0.013	0.015
+30	0.017	0.016	0.014
+40	0.015	0.014	0.016
+50	0.016	0.013	0.013


Voltage	Test Result (ppm)@NT		
	Channel 4132	Channel 4183	Channel 4233
LV	0.012	0.012	0.016
HV	0.012	0.011	0.016

## 6.2.8 Radiated Spurious Emissions-FCC Part2.1053/22.917(a)


Ambient condition:

Temperature	Relative humidity	Pressure
20.8°C	36.5%	100.9kPa

Test Setup:

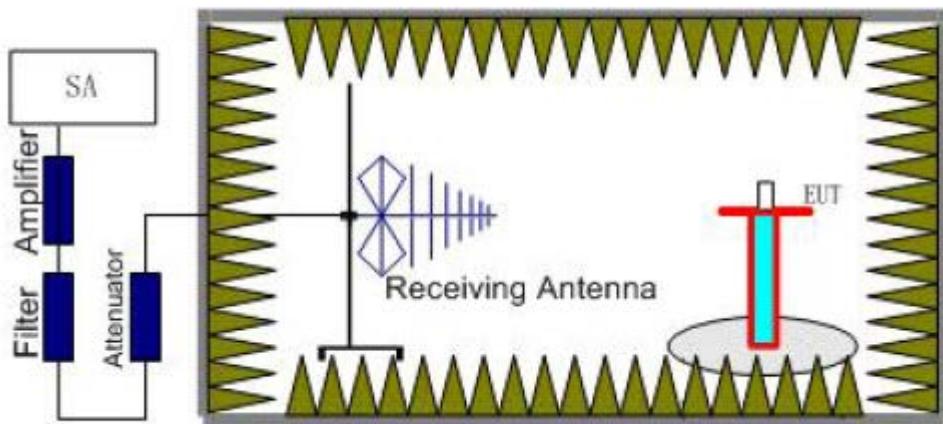

Step 1

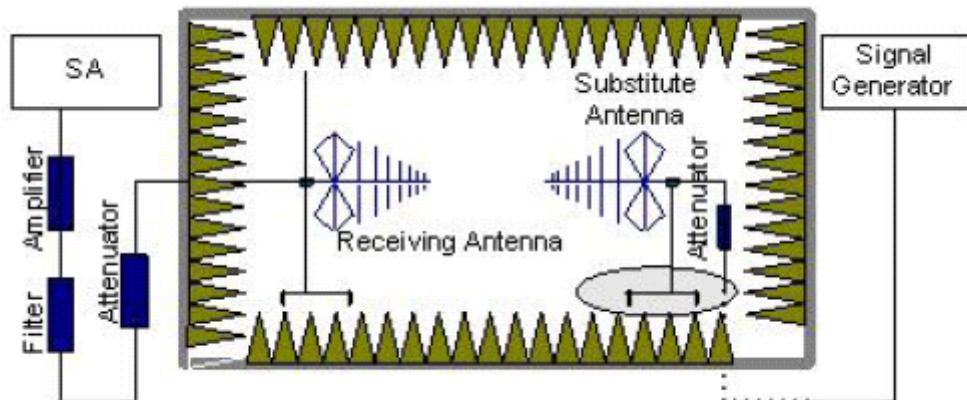

Step 2

Test procedure:

The measurements procedures in TIA-603C-2004 are used.

The spectrum was scanned from 30MHz to the 10th harmonic of the highest frequency generated within the equipment.

Step 1:

The measurement is carried out in the fully anechoic chamber. EUT was placed on a 2.4 meter high non-conductive table at a 3 meter test distance from the test receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT. The height of receiving antenna is 2.4m and varies in certain range to find the maximum power value. A radio link shall be established between EUT and Tester. The output power of the cell signal of the tester will be decreased until the output power of the EUT reach a maximum value. The measurement is carried out using a spectrum analyzer or receiver. The spectrum analyzer scans from 30MHz to 20GHz (higher than the 10th harmonic of the carrier). The peak detector is used and RBW is set to 1MHz on spectrum analyzer. Then the antenna height and turn table rotation is adjusted till the maximum power value is founded on spectrum analyzer or receiver. A notch filter is necessary in the band near to the carrier frequency. A high pass filter is needed to avoid the distortion of the testing equipment in the band above the carrier frequency.

Step 2:

A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.

A power (Pmea) is applied to the input of the substitution antenna, and adjusts the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (Pmea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

A “reference path loss” should be calculated after test. The attenuation of “reference path loss” is the cable loss between the Signal Source with the Substitution Antenna (Pca) and the Substitution Antenna Gain (Ga).

Calculation procedure:

The data of cable loss and antenna gain has been calibrated in full testing frequency range before the testing.

The power of the Radiated Spurious Emissions is calculated by adding the cable loss and antenna gain. The basic equation with a sample calculation is as followed:

$$\text{Power(EIRP)} = \text{Pmea} + \text{Pca} + \text{Ga}$$

This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15dB) and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $\text{ERP} = \text{EIRP} - 2.15$  (dB).

Assumed the power of signal source record is -20dBm. A cable loss of -30dB, and an antenna gain of 11dB are added.

$$P = P_{mea} + P_{ca} + Ga = (-20\text{dBm}) + (-30\text{dB}) + (11\text{dB}) = -39\text{dBm}$$

The measurement will be done at carrier frequencies that pertain to bottom (Channel 4132, middle (Channel 4183 and top (Channel 4233) channels of WCDMA band V.

Test result:

WCDMA Mode:

Channel 4357

Frequency (MHz)	Power (dBm)	Limited (dBm)	Polarization
1649.97	-52.58	-13	Vertical
1669.89	-51.13	-13	Horizontal
2535.42	-44.40	-13	Vertical
2572.13	-43.38	-13	Vertical
8967.07	-39.27	-13	Vertical
9967.73	-36.39	-13	Vertical

Channel 4408

Frequency (MHz)	Power (dBm)	Limited (dBm)	Polarization
1646.12	-53.05	-13	Vertical
1668.89	-51.87	-13	Vertical
2535.70	-44.06	-13	Vertical
2572.96	-43.39	-13	Vertical
8967.54	-39.08	-13	Vertical
9968.36	-35.81	-13	Horizontal

Channel 4458

Frequency (MHz)	Power (dBm)	Limited (dBm)	Polarization
1650.38	-53.04	-13	Vertical
1667.53	-51.70	-13	Vertical
2536.59	-44.57	-13	Vertical
2574.31	-43.03	-13	Vertical
8966.78	-39.51	-13	Vertical
9966.31	-35.58	-13	Vertical

## HSDPA/HSUPA Mode:

## Channel 4357

Frequency (MHz)	Power (dBm)	Limited (dBm)	Polarization
1646.26	-52.51	-13	Vertical
1670.04	-51.67	-13	Vertical
2535.15	-44.45	-13	Vertical
2574.04	-43.43	-13	Vertical
8964.30	-39.85	-13	Vertical
9968.47	-35.58	-13	Vertical

## Channel 4408

Frequency (MHz)	Power (dBm)	Limited (dBm)	Polarization
1646.48	-52.96	-13	Vertical
1666.67	-51.65	-13	Vertical
2536.28	-43.67	-13	Vertical
2575.42	-43.15	-13	Vertical
8966.96	-39.55	-13	Vertical
9967.17	-35.79	-13	Horizontal

## Channel 4458

Frequency (MHz)	Power (dBm)	Limited (dBm)	Polarization
1647.63	-52.63	-13	Horizontal
1666.92	-51.04	-13	Vertical
2534.53	-44.01	-13	Vertical
2575.32	-43.90	-13	Vertical
8963.43	-39.75	-13	Vertical
9970.30	-36.29	-13	Vertical

## **7 MEASUREMENT UNCERTAINTIES**

Items	Uncertainty	
RF Power Output	U=0.6 dB	
Occupied Bandwidth	3kHz	
Spurious Emissions	9kHz~2GHz	U=1.2dB
	2G~3.6GHz	U=1.4dB
	3.6G~8GHz	U=2.2dB
	8G~12.75GHz	U=2.7dB
Band Edges Compliance	1.2dB	
Frequency Stability	U=48 Hz	

## 8 TEST EQUIPMENTS

No.	Name/Model	Manufacturer	S/N	Calibration Due Date
1	E5515C(8960) Mobile Station Tester	Agilent	MY48367401	2016.08.20
2	N9020A Spectrum Analyzer	Agilent	MY48010771	2016.08.20
3	DC Power Supply E3645A	Agilent	MY40000740	2016.08.20
4	Power Splitter 11850C	Agilent	026057	2016.08.20
5	Temperature chamber SH241	ESPEC	92000390	2016.08.20
6	12.65m×8.03m×7.50m Fully-Anechoic Chamber	FRANKONIA	-----	-----
7	Turn table Diameter:1m	HD	-----	-----
8	Antenna master FAC(MA4.0)	MATURO	-----	-----
9	HF 906 Double-Ridged Waveguide Horn Antenna	R&S	100030	2016.08.20
10	HL562 Ultra log antenna	R&S	100016	2016.08.20
11	3160-09 Receive antenna	SCHWARZ-BECK	002058-002	2016.08.20
12	ESI 40 EMI test receiver	R&S	100015	2016.08.20
13	Radio tester	CMU 200	114667	2016.08.20

## APPENDIX

### Appendix Test Setup

---End of Test Report---