

# AMIMON LTD

## WHD RECEIVER MODULE

Model : AMN12310

09 Dec 2008

Report No.: SL08111201-AMN-014(15.247)(AMN12310) PCII  
(This report supersedes NONE)



Modifications made to the product : None

This Test Report is Issued Under the Authority of:


<i>Kent Kim</i>	<i>Bai</i>
Kent Kim Test Engineer	Leslie Bai Engineering Reviewer

This test report may be reproduced in full only.  
Test result presented in this test report is applicable to the representative sample only.

# EMC Test Report

To: FCC Part 15.247 & RSS 210 Annex 8

**SIEMIC, INC.**  
Accessing global markets

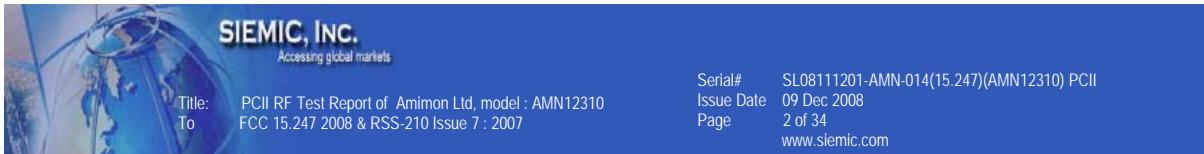

## SIEMIC ACREDITATION DETAILS: A2LA : 2742.01



THE AMERICAN ASSOCIATION FOR  
LABORATORY ACCREDITATION

### ACCREDITED LABORATORY

A2LA has accredited

### SIEMIC LABORATORIES


San Jose, CA

for technical competence in the field of

### Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 *General Requirements for the Competence of Testing and Calibration Laboratories*. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated 18 June 2005).

Presented this 11th day of July 2008.

  
\_\_\_\_\_  
Peter Ahney  
President  
For the Accreditation Council  
Certificate Number 2742.01  
Valid to September 30, 2010



For the tests or types of tests to which this accreditation applies,  
please refer to the laboratory's Electrical Scope of Accreditation.



Title: PCII RF Test Report of Amimon Ltd, model : AMN12310  
To FCC 15.247 2008 & RSS-210 Issue 7 : 2007

Serial# SL08111201-AMN-014(15.247)(AMN12310) PCII  
Issue Date 09 Dec 2008  
Page 3 of 34  
www.siemic.com

**SIEMIC ACREDITATION DETAILS: NVLAP Lab Code: 200729-0**

**United States Department of Commerce  
National Institute of Standards and Technology**



**Certificate of Accreditation to ISO/IEC 17025:1999**

**NVLAP LAB CODE: 200729-0**

**SIEMIC Laboratories**

San Jose, CA

*is recognized by the National Voluntary Laboratory Accreditation Program for conformance with criteria set forth in  
NIST Handbook 150:2001 and all requirements of ISO/IEC 17025:1999.  
Accreditation is granted for specific services, listed on the Scope of Accreditation, for:*

**ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS**


2007-01-01 through 2007-12-31

Effective dates



*Darryl S. Bruce*

For the National Institute of Standards and Technology

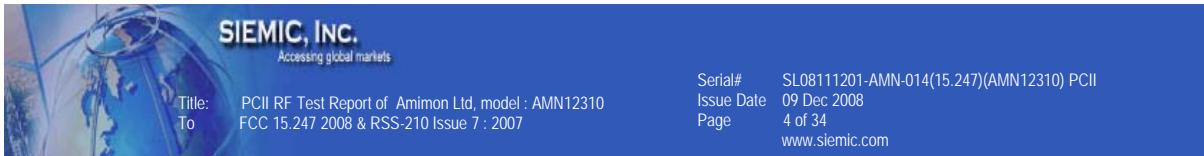

## SIEMIC ACCREDITATION DETAILS: FCC Registration No. 783147

**FEDERAL COMMUNICATIONS COMMISSION**  
**Laboratory Division**  
**7435 Oakland Mills Road**  
**Columbia, MD 21046**

December 20, 2007

Registration Number: 783147

SIEMIC Laboratories  
2206 Ringwood Avenue,  
San Jose, CA 95131

Attention: Leslie Bai

Re: Measurement facility located at San Jose  
3 & 10 meter site  
Date of Renewal: December 20, 2007


Dear Sir or Madam:

Your request for renewal of the registration of the subject measurement facility has been received. The information submitted has been placed in your file and the registration has been renewed. The name of your organization will remain on the list of facilities whose measurement data will be accepted in conjunction with applications for Certification under Parts 15 or 18 of the Commission's Rules. Please note that the file must be updated for any changes made to the facility and the registration must be renewed at least every three years.


Measurement facilities that have indicated that they are available to the public to perform measurement services on a fee basis may be found on the FCC website [www.fcc.gov](http://www.fcc.gov) under E-Filing, OET Equipment Authorization Electronic Filing, Test Firms.

Sincerely,

Phyllis Parrish  
Industry Analyst

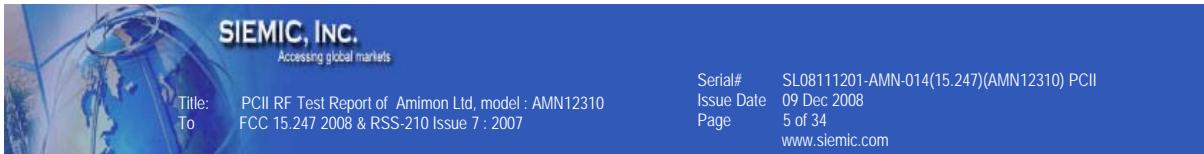

## SIEMIC ACREDITATION DETAILS: Industry of Canada Registration No. 4842-1



May 23rd, 2008

OUR FILE: 46405-4842

Submission No: 126429

Siemic Inc.  
2206 Ringwood Ave.  
San Jose CA 95131  
USA

*Attention:* Leslie Bai

Dear Sir/Madame:

The Bureau has received your application for the registration / renewal of a 3/10m OATS. Be advised that the information received was satisfactory to Industry Canada. The following number(s) is now associated to the site(s) for which registration / renewal was sought (**4842A-1**). Please reference the appropriate site number in the body of test reports containing measurements performed on the site. In addition, please be informed that the Bureau is now utilizing a **new site numbering scheme** in order to simplify the electronic filing process. Our goal is to reduce the number of secondary codes associated to one particular company. The following changes have been made to your record.

- Your primary code is: **4842**

- The company number associated to the site(s) located at the above address is: **4842A**

- The table below is a summary of the changes made to the unique site registration number(s):

New Site Number	Obsolete Site Number	Description of Site	Expiry Date (YYYY-MM-DD)
4842A-1	4842-1	3m Chamber	2010-05-23


Furthermore, to obtain or renew a unique site number, the applicant shall demonstrate that the site has been accredited to ANSI C63.4-2003 or later. A scope of accreditation indicating the accreditation by a recognized accreditation body to ANSI C63.4-2003 shall be accepted. Please indicate in a letter the previous assigned site number if applicable and the type of site (example: 3 meter OATS or 3 meter chamber). If the test facility is not accredited to ANSI C63.4-2003 or later, the test facility shall submit test data demonstrating full compliance with the ANSI standard. The Bureau will evaluate the filing to determine if recognition shall be granted.

The frequency for re-validation of the test site and the information that is required to be filed or retained by the testing party shall comply with the requirements established by the accrediting organization. However, in all cases, test site re-validation shall occur on an interval not to exceed two years. There is no fee or form associated with an OATS filing. OATS submissions are encouraged to be submitted electronically to the Bureau using the following URL:  
[http://strategis.ic.gc.ca/epic/internet/inceb-bhst.nsf/en/h\\_tt00052e.html](http://strategis.ic.gc.ca/epic/internet/inceb-bhst.nsf/en/h_tt00052e.html).

If you have any questions, you may contact the Bureau by e-mail at [certification.bureau@ic.gc.ca](mailto:certification.bureau@ic.gc.ca). Please reference our file and submission number above for all correspondence.

Yours sincerely,

S. Proulx  
Test & Measurement Specialist  
Certification and Engineering Bureau  
3701 Carling Ave., Building 94  
Ottawa, Ontario K2H 8S2

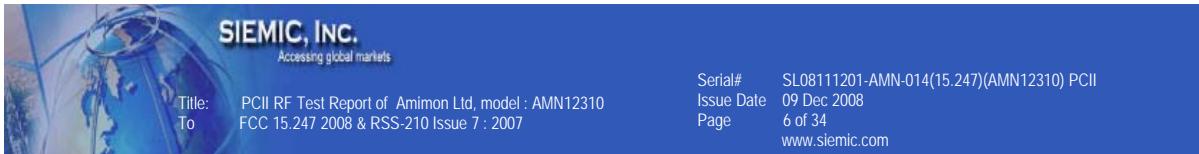

## SIEMIC ACREDITATION DETAILS: Japan VCCI Registration No. 2195



Voluntary Control Council for Interference  
by Information Technology Equipment  
7F NDA Bldg. 2-3-5, Azabudai,  
Minato-Ku, Tokyo, Japan, 106-0041  
Tel+81-3-5575-3138  
Fax+81-3-5575-3137  
<http://www.vcci.or.jp>

February 12, 2004

TO: SIEMIC, INC.

Membership NO: 2195

We confirmed your payment for annual membership fee and admission fee. Thank you very much for your remitting.

Please find enclosed VCCI documents. As admission fee and annual membership fee were confirmed, your company registered as VCCI official member.

From now on, it is possible for your company to submit conformity verification report or/and application for registration of measurement facilities.

Please find necessary forms for your submission from VCCI web-site.  
[www.vcci.or.jp](http://www.vcci.or.jp)

When you submit conformity verification report, please submit to Ms. Yoko Inagaki / [inagaki@vcci.or.jp](mailto:inagaki@vcci.or.jp) and application for registration of measurement facilities, please submit to Mr. Masaru Denda / [denda@vcci.or.jp](mailto:denda@vcci.or.jp)

Their address, phone and fax number are absolutely same as L. Please refer address indicated on top right-hand corner of this page.

If you have any other questions regarding membership, feel free to contact me.  
Thank you very much.

Best Regards,

Naoko Hori (Ms.)  
VCCI  
[hori@vcci.or.jp](mailto:hori@vcci.or.jp)

Enclosure



Title: PCII RF Test Report of Amimon Ltd, model : AMN12310  
To FCC 15.247 2008 & RSS-210 Issue 7 : 2007

Serial# SL08111201-AMN-014(15.247)(AMN12310) PCII  
Issue Date 09 Dec 2008  
Page 7 of 34  
www.siemic.com

## SIEMIC ACREDITATION DETAILS: Japan RF Technologies Accreditation No. MRF050927

**RFT**

# Certificate

This is to certify that the  
Quality Management System  
of

**SIEMIC , Inc.**

2206 Ringwood Avenue  
San Jose, California 95131 U.S.A

has been authorized to carry out Japan Specified Radio Equipment test by  
order and under supervision of RF Technologies Co., Ltd. according to  
Notification No.88 of Radio Law.

An assessment of the laboratory was conducted according to the "Procedure and  
Conditions for Appointments of 2.4GHz Band Low power data communications system  
that Bluetooth and Wireless LAN test with reference to ISO/IEC 17025  
by an RF Technologies Co., Ltd. auditor.

**Audit Report No. MRF050927**



Kazuyuki Sarashina

Auditor

RF Technologies Co., Ltd.



Toshihiro Ikegami

President

RF Technologies Co., Ltd.

Audit Date  
September 27th, 2005

Issued Date  
October 5th, 2005

This Certificate is valid until **September 26<sup>th</sup> 2006 or next schedule audit.**

No:006 Registered Certification Body  
RF Technologies Co., Ltd.  
472, Nippa-cho, Kohoku-ku, Yokohama, 223-0057, Japan





SIEMIC, INC.  
Accessing global markets

Title: PCII RF Test Report of Amimon Ltd, model : AMN12310  
To FCC 15.247 2008 & RSS-210 Issue 7 : 2007

Serial# SL08111201-AMN-014(15.247)(AMN12310) PCII  
Issue Date 09 Dec 2008  
Page 8 of 34  
www.siemic.com

SIEMIC ACREDITATION DETAILS: Korea MIC Lab Code: KR0032

# 시험기관증서

## *Certificate*

*of Designated Testing Laboratory*

지정번호(No.) : KR0032

시험기관명 : (주)현대교정인증기술원  
(Name of Lab.) (Hyundai Calibration & Certification Technologies Co., Ltd)  
주 소 : 경기도 이천시 부발읍 아미리 136-1  
(Address) (B3-1, Ami-ri, Bubal-eup, Ichon-si, Kyunggi-Do, Korea)  
2206 Ringwood Avenue San Jose, CA, USA.

시험분야 및 범위 : 유선(Telecommunication Part)  
(Area & Category) 무선(Radio Communication Part)  
전자파장해(EMI) : 미국지사 포함  
전자파내성(EMS) : 미국지사 포함  
전기안전(Safety)  
전자파흡수율(SAR)

위 기관을 정보통신기기시험기관지정및관리등에관한규칙에  
의해 정보통신기기시험기관으로 지정합니다.


*This is to certify that  
the above mentioned laboratory is designated  
as the testing laboratory in accordance with  
the Regulations on Designation of Testing Laboratory  
for Information and Communication Equipment.*

2005년(Year) 7월(Month) 5일(Date)



전파연구소장

Director General of Radio Research Laboratory  
Ministry of Information and Communication  
Republic of Korea

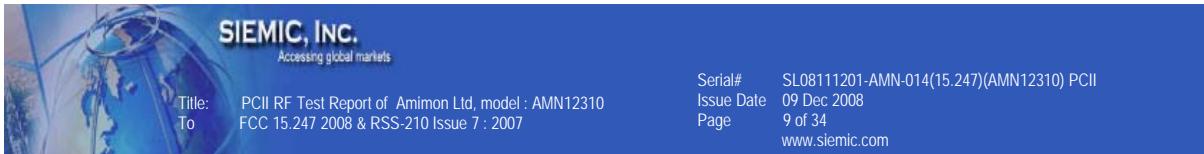

## SIEMIC ACREDITATION DETAILS: Korea CAB ID: US0160

April 17, 2006

Mr. Leslie Bai  
SIEMIC Laboratories  
2206 Ringwood Avenue  
San Jose, CA 95131

Dear Mr. Bai:

I am pleased to inform you that your laboratory has been recognized by the Ministry of Information and Communication's Radio Research Laboratory (RRL) under the Asia Pacific Economic Cooperation (APEC) Mutual Recognition Arrangement (MRA). Your laboratory is now designated to act as a Conformity Assessment Body (CAB) under Appendix B, **Phase I** Procedures, of the APEC Tel MRA. The pertinent information about your laboratory's designation is as follows:

CAB Name: **SIEMIC Laboratories**  
Identification No.: **US0160**  
Scope:

Coverage	Standards	Date of Recognition
Electro Magnetic Interference	1. RRL Notice No. 2005-82: Technical Requirements for Electromagnetic Interference 2. Annex 8(KN-22), RRL Notice No. 2005-131: Conformity Assessment Procedure for Electromagnetic Interference	April 13, 2006
Electro Magnetic Susceptibility	1. RRL Notice No. 2005-130: Technical Requirements for Electromagnetic Susceptibility 2. Annex 1-7(KN-61000-4-2, -4-3, -4-4, -4-5, -4-6, -4-8, -4-11), RRL Notice No. 2005-132: Conformity Assessment Procedure for Electromagnetic Susceptibility	April 13, 2006

You may submit test data to RRL to verify that the equipment to be imported into Korea satisfies the applicable requirements. The designation of your organization will remain in force as long as its accreditation for the designated scope remains valid and comply with the designation requirements.


The names of all recognized CABs will be posted on the NIST website at <http://ts.nist.gov/mra>. If you have any questions please contact Mr. Jagindar (Joe) Dhillon at (301) 975-5521. We appreciate your continued interest in our international conformity assessment activities.

Sincerely,

  
David F. Alderman  
Group Leader, Standards Coordination and Conformity Group

cc: Jagindar Dhillon



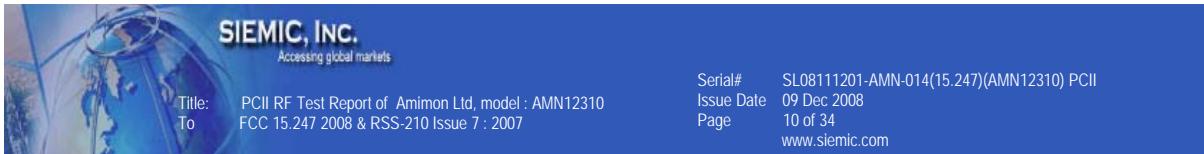

## SIEMIC ACREDITATION DETAILS: Taiwan BSMI Accreditation No. SL2-IN-E-1130R



UNITED STATES DEPARTMENT OF COMMERCE  
National Institute of Standards and Technology  
Gaithersburg, Maryland 20889

May 3, 2006

Mr. Leslie Bai  
SIEMIC Laboratories  
2206 Ringwood Avenue  
San Jose, CA 95131

Dear Mr. Bai:

I am pleased to inform you that your laboratory has been recognized by the Chinese Taipei's Bureau of Standards, Metrology, and Inspection (BSMI) under the Asia Pacific Economic Cooperation (APEC) Mutual Recognition Arrangement (MRA). Your laboratory is now designated to act as a Conformity Assessment Body (CAB) under Appendix B, **Phase I** Procedures, of the APEC Tel MRA. You may submit test data to BSMI to verify that the equipment to be imported into Chinese Taipei satisfies the applicable requirements. The designation of your organization will remain in force as long as its accreditation for the designated scope remains valid and comply with the designation requirements. The pertinent designation information is as follows:

- BSMI number: **SL2-IN-E-1130R** (Must be applied to the test reports)
- U.S Identification No: **US0160**
- Scope of Designation: **CNS 13438**
- Authorized signatory: **Mr. Leslie Bai**

The names of all recognized CABs will be posted on the NIST website at <http://ts.nist.gov/mra>. If you have any questions, please contact Mr. Dhillon at 301-975-5521. We appreciate your continued interest in our international conformity assessment activities.

Sincerely,

David F. Alderman  
Group Leader, Standards Coordination and Conformity Group

cc: Joginder Dhillon

**NIST**

**SIEMIC ACREDITATION DETAILS: Taiwan NCC CAB ID: US0160**



**UNITED STATES DEPARTMENT OF COMMERCE**  
**National Institute of Standards and Technology**  
Gaithersburg, Maryland 20885

August 8, 2006

Mr. Leslie Bai  
SIEMIC Laboratories  
2206 Ringwood Avenue  
San Jose, CA 95131

Dear Mr. Bai:

I am pleased to inform you that SIEMIC Laboratories has been recognized by the Chinese Taipei's National Communications Commission (NCC) under the Asia Pacific Economic Cooperation for Telecommunications and Information, Mutual Recognition Arrangement (APEC Tel MRA). Your laboratory is now designated to act as a Conformity Assessment Body (CAB) under Appendix B, **Phase I** Procedures, of the APEC Tel MRA.

You may submit test data to NCC to verify that the equipment to be imported into Chinese Taipei satisfies their applicable requirements using the following guidelines:

- Your laboratory's assigned 6-digit U.S. identification number is **US0160**. You should reference this number in your correspondence.
- The scope of designation is limited to **LP0002**. Your designation will remain in force as long as your accreditation remains valid for the scope of designation.

If you have any questions please contact Mr. Jogindar Dhillon via email at dhillon@nist.gov or via fax at 301-975-5414. The names of all recognized laboratories will be posted on the NIST website at <http://ts.nist.gov/mra>. We appreciate your continued interest in our international conformity assessment activities.

Sincerely,

David F. Alderman  
Group Leader, Standards Coordination and Conformity Group

cc: Jogindar Dhillon

**NIST**



Title: PCII RF Test Report of Amimon Ltd, model : AMN12310  
To FCC 15.247 2008 & RSS-210 Issue 7 : 2007

Serial# SL08111201-AMN-014(15.247)(AMN12310) PCII  
Issue Date 09 Dec 2008  
Page 12 of 34  
www.siemic.com

## SIEMIC ACREDITATION DETAILS: Mexico NOM Recognition

 <p>CAMARA NACIONAL DE LA INDUSTRIA ELECTRONICA, DE TELECOMUNICACIONES E INFORMATICA</p>	<p><b>Laboratorio Valentín V. Rivero</b></p> <p>México D.F. a 16 de octubre de 2006.</p> <p>LESLIE BAI DIRECTOR OF CERTIFICATION SIEMIC LABORATORIES, INC. ACCESSING GLOBAL MARKETS P R E S E N T E</p> <p>En contestación a su escrito de fecha 5 de septiembre del año en curso, le comento que estamos muy interesados en su intención de firmar un Acuerdo de Reconocimiento Mutuo, para lo cual adjunto a este escrito encontrara el Acuerdo en idioma inglés y español prellenado de los cuales le pido sea revisado y en su caso corregido, para que si esta de acuerdo poder firmarlo para mandarlo con las autoridades Mexicanas para su visto bueno y así poder ejercer dicho acuerdo.</p> <p>Aprovecho este escrito para mencionarle que nuestro intermediario gestor será la empresa Isabel de México, S. A. de C. V., empresa que ha colaborado durante mucho tiempo con nosotros en lo relacionado a la evaluación de la conformidad y que cuenta con amplia experiencia en la gestoría de la certificación de cumplimiento con Normas Oficiales Mexicanas de producto en México.</p> <p>Me despido de usted enviándole un cordial saludo y esperando sus comentarios al Acuerdo que nos ocupa.</p> <p>Atentamente:</p> <p> Ing. Faustino Gómez González Gerente Técnico del Laboratorio de CANIETI.</p> <p>Culiacán 71 Hacienda Condessa C.P. 11000 México, D.F. Tel. 5264-0308 con 12 líneas Fax 5264-0498 www.canieti.org</p>
---	---

**SIEMIC ACREDITATION DETAILS: Hong Kong OFTA Recognition No. D23/16V**



Your Ref 来函檔號 : D23/16 V  
Our Ref 本局檔號 :

Telephone 電話 : (852) 2961 6320  
Fax No 圖文傳真 : (852) 2838 5004  
E-mail 電郵地址 : 20 July 2005

Mr. Leslie Bai  
Director of Certification,  
SIEMIC Laboratories  
2206 Ringwood Avenue  
San Jose, California 95131  
USA

Dear Mr. Bai,

**Application of Recognised Testing Agency (RTA)**

Referring your subemission of 28 June 2005 in relation to the application of RTA, I am pleased to inform you that OFTA has appointed SIEMIC Laboratories (SIEMIC) as a Recognised Testing Agency (RTA) :

Please note that, under the Hong Kong Telecommunications Equipment Evaluation and Certification (HKTEC) Scheme, SIEMIC is authorized to conduct evaluation tests on telecommunications equipment against the following HKTA specifications :

Scope of recognition (HKTA Specifications):

1001, 1002, 1004, 1006, 1007, 1008  
1010, 1015, 1016  
1022, 1026, 1027, 1029  
1030, 1031, 1032, 1033, 1034, 1035, 1039  
1041, 1042, 1043, 1045, 1047, 1048  
2001


You are requested to refer to and comply with the code of practice and guidelines for RTA as given in the Information Note OFTA I 411 "Recognised Testing Agency (RTA) for Conducting Evaluation Test of Telecommunications Equipment", which can be downloaded from OFTA's homepage at <http://www.ofta.gov.hk/tec/information-notes.html>.

If you have any queries, please do not hesitate to contact me.


Yours sincerely,



(K. K. Sin)  
for Director-General  
of Telecommunications

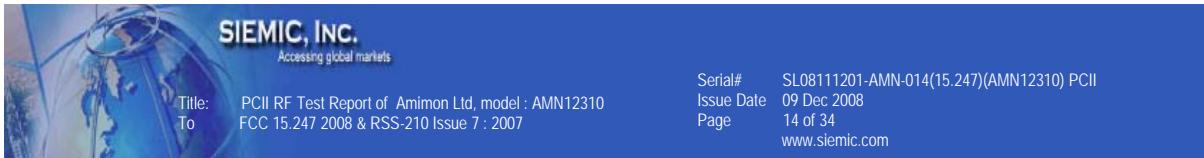


This page has been left blank intentionally.

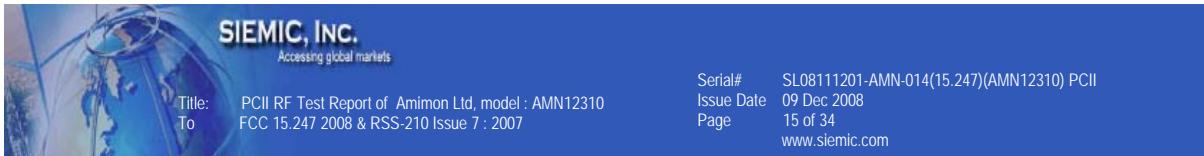

## CONTENTS

1	EXECUTIVE SUMMARY & EUT INFORMATION .....	17
2	TECHNICAL DETAILS .....	18
3	MODIFICATION .....	19
4	TEST SUMMARY .....	20
5	MEASUREMENTS, EXAMINATION AND DERIVED RESULTS .....	21
	ANNEX A. TEST INSTRUMENT & METHOD .....	21
	ANNEX B EUT AND TEST SETUP PHOTOGRAPHS .....	21
	ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT .....	21
	ANNEX D USER MANUAL, BLOCK & CIRCUIT DIAGRAM .....	21

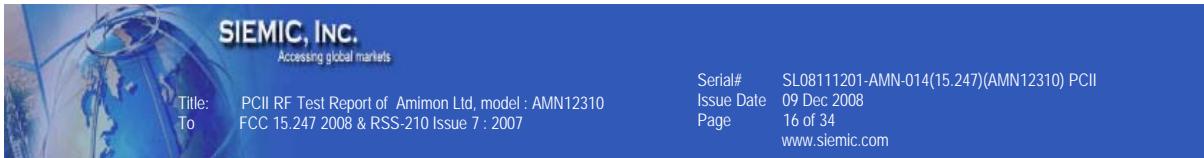

---

This page has been left blank intentionally.

## 1 Executive Summary & EUT information


The purpose of this test programme was to demonstrate compliance of the modified Amimon Ltd, WHDI Receiver Module, model : AMN12310 against the current Stipulated Standards. The WHDI Receiver Module have demonstrated compliance with the FCC 15.247 2008 & RSS-210 Issue 7 : 2007.

### EUT Information

**EUT Description** : WHDI™ - Wireless High Definition Interface - sets new standards for quality wireless high-definition video connectivity. It provides a high-quality, uncompressed wireless link which can support delivery of video data at rates equivalent to up to 1.5Gbps (including uncompressed 1080i and 720p). These equivalent data rates can be delivered on a single 20MHz channel in the 5GHz unlicensed band, conforming to worldwide 5GHz spectrum regulations. Range is beyond 100 feet, through walls, and latency is less than one millisecond. WHDI™ enables a wireless video link that offers the same functionality, cost and quality as a wired link. Practically all of the hundreds of millions of wired connections between video sources and displays today are based on delivery of uncompressed video. In order to replace these wired links, the wireless interface needs to be uncompressed as well.


This module is acting as receiver or uplink unit most of the time, It has 5 receiving Antenna and one Transmit antenna.

<b>Model No</b>	: AMN12310
<b>Serial No</b>	: None
<b>Input Power</b>	: 3.3 Vdc
<b>Classification</b>	: Spread Spectrum System / device
<b>Per Stipulated Test Standard</b>	: Spatial Multiplexing MIMO System

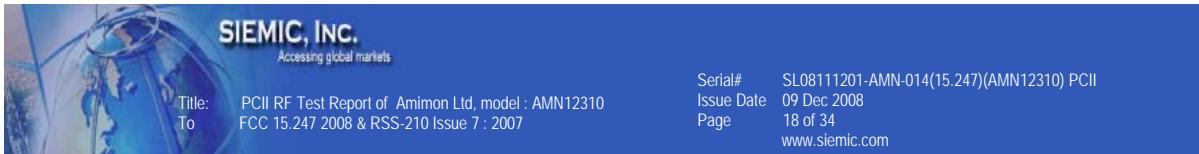


## 2 TECHNICAL DETAILS

Purpose	Compliance testing of WHDI Receiver Module with stipulated standard
Applicant / Client	Amimon Ltd
Manufacturer	Amimon Ltd 2 Maskit St. Herzlia , Israel , 46733
Laboratory performing the tests	SIEMIC Laboratories
Test report reference number	SL08111201-AMN-014(15.247)(AMN12310) PCII
Date EUT received	01 Dec 2008
Standard applied	FCC 15.247 2008 & RSS-210 Issue 7 : 2007
Dates of test (from – to)	01 - 06 Dec 2008
No of Units:	N/A
Equipment Category:	DTS
Trade Name:	Amimon Ltd
Model :	AMN12310
RF Operating Frequency (ies)	5745~5825MHz
Number of Channels :	5
Modulation :	Amimon Proprietary Modulation
FCC ID :	VQSAMN12310
IC ID :	7680A-AMN12310

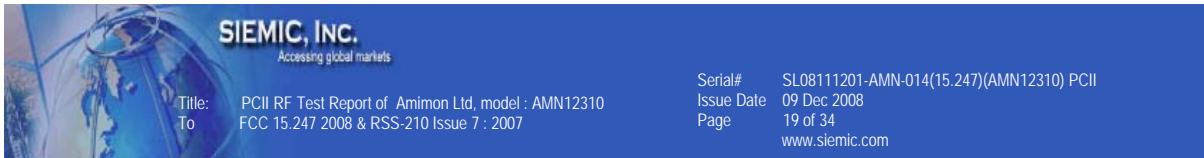

### **3 MODIFICATION**

**NONE**

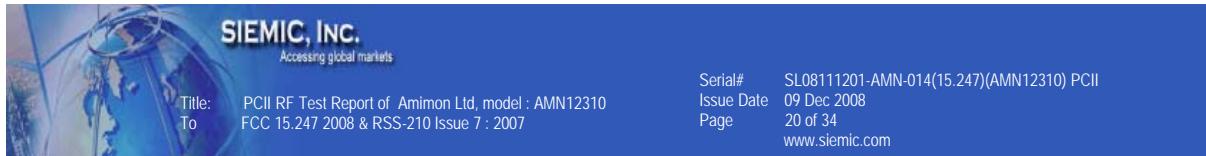

## 4 TEST SUMMARY

The product was tested in accordance with the following specifications. All Testing has been performed according to below product classification:

Spread Spectrum System / device  
Spatial Multiplexing MIMO System

Test Results Summary

Test Standard		Description	Pass / Fail
CFR 47 Part 15.247: 2008	RSS 210 Issue7: 2007		
15.203		Antenna Requirement	N/R - PCII
15.205	RSS210(A8.5)	Restricted Band of Operation	N/R - PCII
15.207(a)	RSSGen(7.2.2)	Conducted Emissions Voltage	N/R - PCII
15.247(a)(1)	RSS210(A8.1)	Channel Separation	N/A
15.247(a)(1)	RSS210(A8.1)	Occupied Bandwidth	N/R - PCII
15.247(a)(2)	RSS210 (A8.2)	6dB Bandwidth	N/R - PCII
15.247(a)(1)	RSS210(A8.1)	Number of Hopping Channels	N/A
15.247(a)(1)	RSS210(A8.1)	Time of Occupancy	N/A
15.247(b)	RSS210(A8.4)	Output Power	N/R - PCII
15.247(c)	RSS210(A8.4)	Antenna Gain > 6 dBi	N/R - PCII
15.247(d)	RSS210(A8.5)	Conducted Spurious Emissions	N/R - PCII
15.209; 15.247(d)	RSS210(A8.5)	Radiated Spurious Emissions	Pass
15.247(e)	RSS210(A8.3)	Power Spectral Density	N/R - PCII
15.247(f)	RSS210(A8.3)	Hybrid System Requirement	N/A
15.247(g)	RSS210(A8.1)	Hopping Capability	N/A
15.247(h)	RSS210(A8.1)	Hopping Coordination Requirement	N/A
15.247(i)	RSSGen(5.5)	Maximum Permissible Exposure	N/R - PCII
	RSSGen(4.8)	Receiver Spurious Emissions	N/A
ANSI C63.4: 2003/ RSS-Gen Issue 2: 2007			
PS: All measurement uncertainties are not taken into consideration for all presented test result.			

N/R - PCII – Testing is not performed , please see original test report.

## **5 MEASUREMENTS, EXAMINATION AND DERIVED RESULTS**

### **5.1 Antenna Requirement**

Requirement(s): 47 CFR §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna requirement must meet at least one of the following:

- a) Antenna must be permanently attached to the device.
- b) Antenna must use a unique type of connector to attach to the device.
- c) Device must be professionally installed. Installer shall be responsible for ensuring that the correct antenna is employed with the device.

The antenna is printed inverted antenna. Antenna gain is 1.9 dBi for 5.8GHz.

PS: The connector is for future option and is not physical connected.



## 5.1 Radiated Spurious Emissions > 1GHz

Test date : 01 ~ Dec 06 2008

Tested By : Kent Kim

Standard Requirement : 47 CFR §15.247(d) & RSS 210 (A8.5)

**Procedures:** Equipment was setup in a semi-anechoic chamber. For measurements above 1 GHz an average measurement was taken with a 10Hz video bandwidth. The EUT was tested at low, mid and high with the highest output power. Investigated up to 10<sup>th</sup> harmonic of the operating frequency.

### Sample Calculation:

EUT Field Strength = Raw Amplitude(dB $\mu$ V/m) – Amplifier Gain(dB) + Antenna Factor(dB) + Cable Loss(dB) + Filter Attenuation(dB, if used)

## Test Result:



@ 5745MHz @3 Meter

Frequency	Reading	Direction	Height	Polar	Antenna Loss	Cable loss	Amplifier	Corrected Reading	15.247	15.247	
GHz	(dBuV/m)	Degree	cm	H / V	(dB)	(dB)	(dB)	(dBuV/m)	Limit (dBuV/m)	Margin	Comments
11.4900	44.12	0	120	V	41.7	7.17	32.7	60.29	74	-13.71	Peak
11.4900	41.33	180	130	H	41.7	7.17	32.7	57.5	74	-16.5	Peak
11.4900	29.7	0	120	V	41.7	7.17	32.7	45.87	54	-8.13	Ave
11.4900	27.4	180	130	H	41.7	7.17	32.7	43.57	54	-10.43	Ave
17.2350	34.6	85	110	V	44.7	10.58	31.56	58.32	74	-15.68	Peak
17.2350	34.5	180	125	H	44.7	10.58	31.56	58.22	74	-15.78	Peak
17.2350	22.5	85	110	V	44.7	10.58	31.56	46.22	54	-7.78	Ave
17.2350	22.8	180	125	H	44.7	10.58	31.56	46.52	54	-7.48	Ave
4.9780	48.1	325	110	V	32.7	4.125	32.49	52.435	74	-21.56	Peak
4.9780	50.87	88	160	H	32.7	4.125	32.49	55.205	74	-18.79	Peak
4.9780	33.78	325	110	V	32.7	4.125	32.49	38.115	54	-15.88	Ave
4.9780	40.34	88	160	H	32.7	4.125	32.49	44.675	54	-9.325	Ave

Emission was scanned up to 40GHz.

@ 5785MHz @3 Meter

Frequency	Reading	Direction	Height	Polar	Antenna Loss	Cable loss	Amplifier	Corrected Reading	15.247	15.247	
GHz	(dBuV/m)	Degree	cm	H / V	(dB)	(dB)	(dB)	(dBuV/m)	Limit (dBuV/m)	Margin	Comments
11.5700	46.90	185.00	100.00	V	41.40	7.42	32.51	63.21	74.00	-10.80	Peak
11.5700	43.20	95.00	120.00	H	41.40	7.42	32.51	59.51	74.00	-14.50	Peak
11.5700	36.78	185.00	100.00	V	41.40	7.42	32.51	53.09	54.00	-0.91	Ave
11.5700	34.87	95.00	155.00	H	41.40	7.42	32.51	51.18	54.00	-2.83	Ave
17.3550	35.50	45.00	100.00	V	44.70	10.58	31.56	59.22	74.00	-14.78	Peak
17.3550	36.30	78.00	120.00	H	44.70	10.58	31.56	60.02	74.00	-13.98	Peak
17.3550	22.76	45.00	100.00	V	44.70	10.58	31.56	46.48	54.00	-7.52	Ave
17.3550	22.66	78.00	120.00	H	44.70	10.58	31.56	46.38	54.00	-7.62	Ave
5.0000	48.65	110.00	115.00	V	33.50	4.32	32.55	53.92	74.00	-20.08	Peak
5.0000	47.87	345.00	140.00	H	33.50	4.32	32.55	53.14	74.00	-20.86	Peak
5.0000	37.65	110.00	115.00	V	33.50	4.32	32.55	42.92	54.00	-11.08	Ave
5.0000	34.53	345.00	140.00	H	33.50	4.32	32.55	39.80	54.00	-14.20	Ave

Emission was scanned up to 40GHz.



@ 5825MHz @3 Meter

Frequency	Reading	Direction	Height	Polar	Antenna Loss	Cable loss	Amplifier	Corrected Reading	15.247	15.247	
GHz	(dBuV/m)	Degree	cm	H / V	(dB)	(dB)	(dB)	(dBuV/m)	Limit (dBuV/m)	Margin	Comments
11.6500	49.30	175.00	135.00	V	41.40	7.42	32.51	65.61	74.00	-8.40	Peak
11.6500	41.14	235.00	130.00	H	41.40	7.42	32.51	57.45	74.00	-16.56	Peak
11.6500	36.88	175.00	135.00	V	41.40	7.42	32.51	53.19	54.00	-0.81	Ave
11.6500	26.73	235.00	130.00	H	41.40	7.42	32.51	43.04	54.00	-10.97	Ave
17.4750	38.10	150.00	110.00	V	44.70	10.58	31.56	61.82	74.00	-12.18	Peak
17.4750	38.80	180.00	135.00	H	44.70	10.58	31.56	62.52	74.00	-11.48	Peak
17.4750	23.87	150.00	110.00	V	44.70	10.58	31.56	47.59	54.00	-6.41	Ave
17.4750	24.01	180.00	135.00	H	44.70	10.58	31.56	47.73	54.00	-6.27	Ave

Emission was scanned up to 40GHz.



## Annex A. TEST INSTRUMENT & METHOD

### Annex A.i. TEST INSTRUMENTATION & GENERAL PROCEDURES

Instrument	Manufacturer	Model	CAL Due Date
Spectrum Analyzer	HP	8564E	04/26/2009
EMI Receiver	Rohde & Schwarz	ESIB 40	4/25/2009
R&S LISN	R&S	ESH2-Z5	04/24/2009
CHASE LISN	Chase	MN2050B	04/24/2009
Antenna(1 ~18GHz)	Emco	3115	01/04/2009
Antenna (30MHz~2GHz)	Sunol Sciences	JB1	01/04/2009
Chamber	Lingren	3m	04/18/2009
Pre-Amplifier(1 ~ 26GHz)	HP	8449	04/24/2009
Horn Antenna (18~40GHz)	Com Power	AH-840	03/19/2010
Microwave Pre-Amp (18~40GHz)	Com Power	PA-840	03/19/2010*

Note: No calibration required.

\* Or Pre-determined used hours, whichever meet first.

## Annex A.ii. CONDUCTED EMISSIONS TEST DESCRIPTION

### Test Set-up

1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table, as shown in Annex B.
2. The power supply for the EUT was fed through a  $50\Omega/50\mu\text{H}$  EUT LISN, connected to filtered mains.
3. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable.
4. All other supporting equipments were powered separately from another main supply.

### Test Method

1. The EUT was switched on and allowed to warm up to its normal operating condition.
2. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver.
3. High peaks, relative to the limit line, were then selected.
4. The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 KHz. For FCC tests, only Quasi-peak measurements were made; while for CISPR/EN tests, both Quasi-peak and Average measurements were made.
5. Steps 2 to 4 were then repeated for the LIVE line (for AC mains) or DC line (for DC power).

### Sample Calculation Example

At 20 MHz

limit =  $250 \mu\text{V} = 47.96 \text{ dB}\mu\text{V}$

Transducer factor of LISN, pulse limiter & cable loss at 20 MHz = 11.20 dB

Q-P reading obtained directly from EMI Receiver =  $40.00 \text{ dB}\mu\text{V}$   
(Calibrated for system losses)

Therefore, Q-P margin =  $47.96 - 40.00 = 7.96$

i.e. **7.96 dB below limit**

### Annex A. iii RADIATED EMISSIONS TEST DESCRIPTION


#### EUT Characterisation

EUT characterisation, over the frequency range from 30MHz to 10<sup>th</sup> Harmonic, was done in order to minimise radiated emissions testing time while still maintaining high confidence in the test results.

The EUT was placed in the chamber, at a height of about 0.8m on a turntable. Its radiated emissions frequency profile was observed, using a spectrum analyzer /receiver with the appropriate broadband antenna placed 3m away from the EUT. Radiated emissions from the EUT were maximised by rotating the turntable manually, changing the antenna polarisation and manipulating the EUT cables while observing the frequency profile on the spectrum analyzer / receiver. Frequency points at which maximum emissions occurred, clock frequencies and operating frequencies were then noted for the formal radiated emissions test at the Open Area Test Site (OATS).

#### Test Set-up

1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m X 1.0m X 0.8m high, non-metallic table.
2. The filtered power supply for the EUT and supporting equipment were tapped from the appropriate power sockets located on the turntable.
3. The relevant broadband antenna was set at the required test distance away from the EUT and supporting equipment boundary.

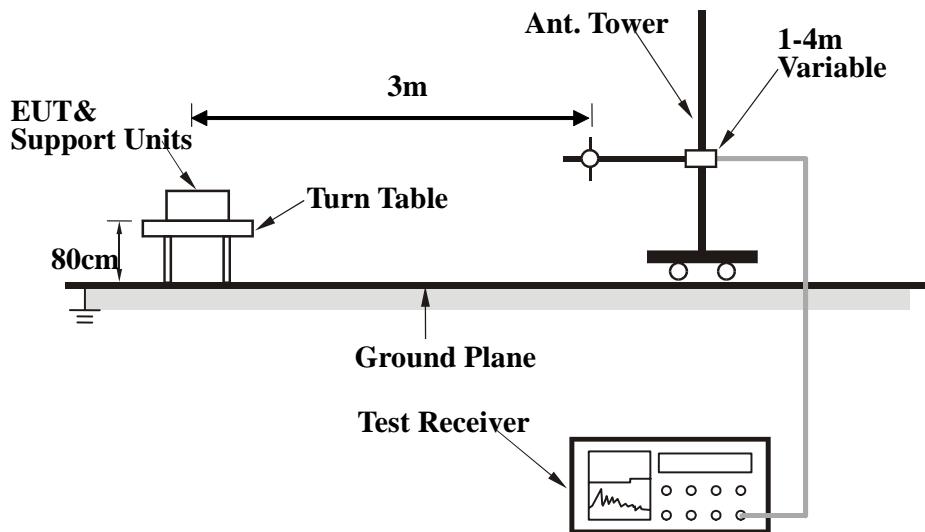

### Test Method

The following procedure was performed to determine the maximum emission axis of EUT:

1. With the receiving antenna is H polarization, rotate the EUT in turns with three orthogonal axes to determine the axis of maximum emission.
2. With the receiving antenna is V polarization, rotate the EUT in turns with three orthogonal axes to determine the axis of maximum emission.
3. Compare the results derived from above two steps. So, the axis of maximum emission from EUT was determined and the configuration was used to perform the final measurement.

### Final Radiated Emission Measurement

1. Setup the configuration according to figure 1. Turn on EUT and make sure that it is in normal function.
2. For emission frequencies measured below 1 GHz, a pre-scan is performed in a shielded chamber to determine the accurate frequencies of higher emissions will be checked on a open test site. As the same purpose, for emission frequencies measured above 1 GHz, a pre-scan also be performed with a 1 meter measuring distance before final test.
3. For emission frequencies measured below and above 1 GHz, set the spectrum analyzer on a 100 kHz and 1 MHz resolution bandwidth respectively for each frequency measured in step 2.
4. The search antenna is to be raised and lowered over a range from 1 to 4 meters in horizontally polarized orientation. Position the highness when the highest value is indicated on spectrum analyzer, then change the orientation of EUT on test table over a range from 0° to 360° with a speed as slow as possible, and keep the azimuth that highest emission is indicated on the spectrum analyzer. Vary the antenna position again and record the highest value as a final reading.
5. Repeat step 4 until all frequencies need to be measured were complete.
6. Repeat step 5 with search antenna in vertical polarized orientations.

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	Peak	100 kHz	100 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	10 Hz

### Sample Calculation Example

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. For the limit is employed average value, therefore the peak value can be transferred to average value by subtracting the duty factor. The basic equation with a sample calculation is as follows:

$$\text{Peak} = \text{Reading} + \text{Corrected Factor}$$

where

$$\text{Corr. Factor} = \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain (if any)}$$

And the average value is

$$\text{Average} = \text{Peak Value} + \text{Duty Factor or}$$

$$\text{Set RBW} = 1\text{MHz}, \text{VBW} = 10\text{Hz}.$$

Note :

If the measured frequencies are fall in the restricted frequency band, the limit employed must be quasi peak value when frequencies are below or equal to 1 GHz. And the measuring instrument is set to quasi peak detector function.




Title: PCII RF Test Report of Amimon Ltd, model : AMN12310  
To FCC 15.247 2008 & RSS-210 Issue 7 : 2007

Serial# SL08111201-AMN-014(15.247)(AMN12310) PCII  
Issue Date 09 Dec 2008  
Page 29 of 34  
www.siemic.com

## Annex B EUT AND TEST SETUP PHOTOGRAPHS

Please see the attachment.

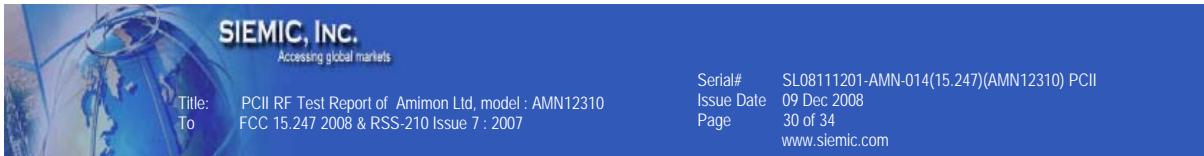

## Annex C. TEST SETUP AND SUPPORTING EQUIPMENT


### EUT TEST CONDITIONS

#### **Annex C. i. SUPPORTING EQUIPMENT DESCRIPTION**


The following is a description of supporting equipment and details of cables used with the EUT.


Equipment Description (Including Brand Name)	Model & Serial Number	Cable Description (List Length, Type & Purpose)
Laptop PC	IBM	Serial to USB Cable : 1 meter.

## Block Configuration Diagram for Radiated Emission

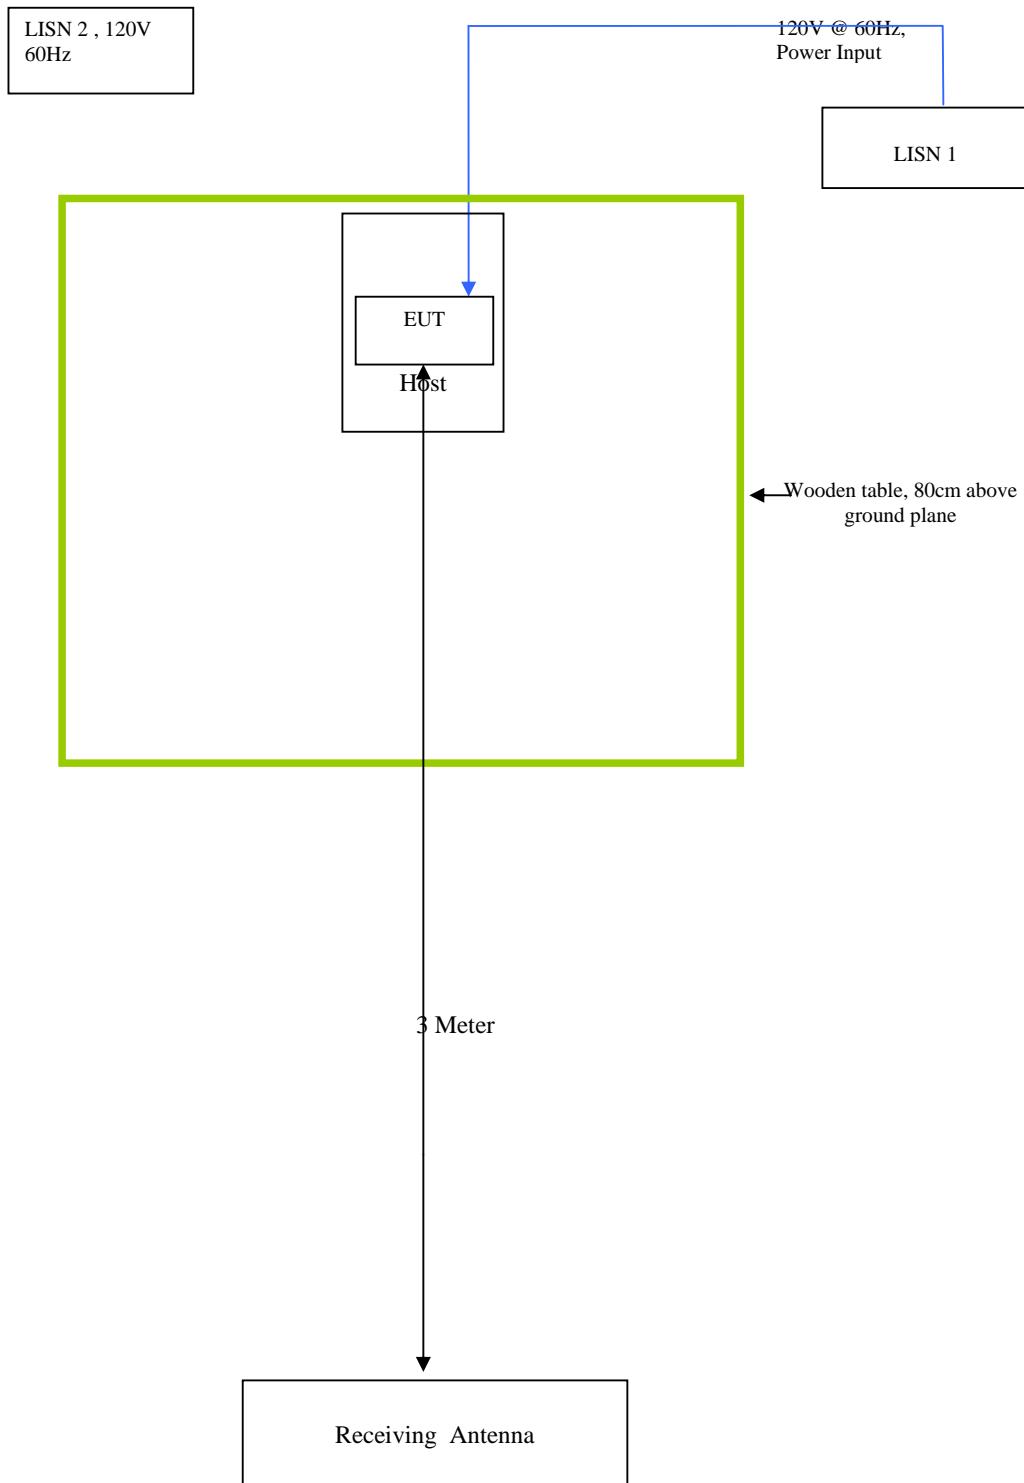

## Block Configuration Diagram for Conducted Emission

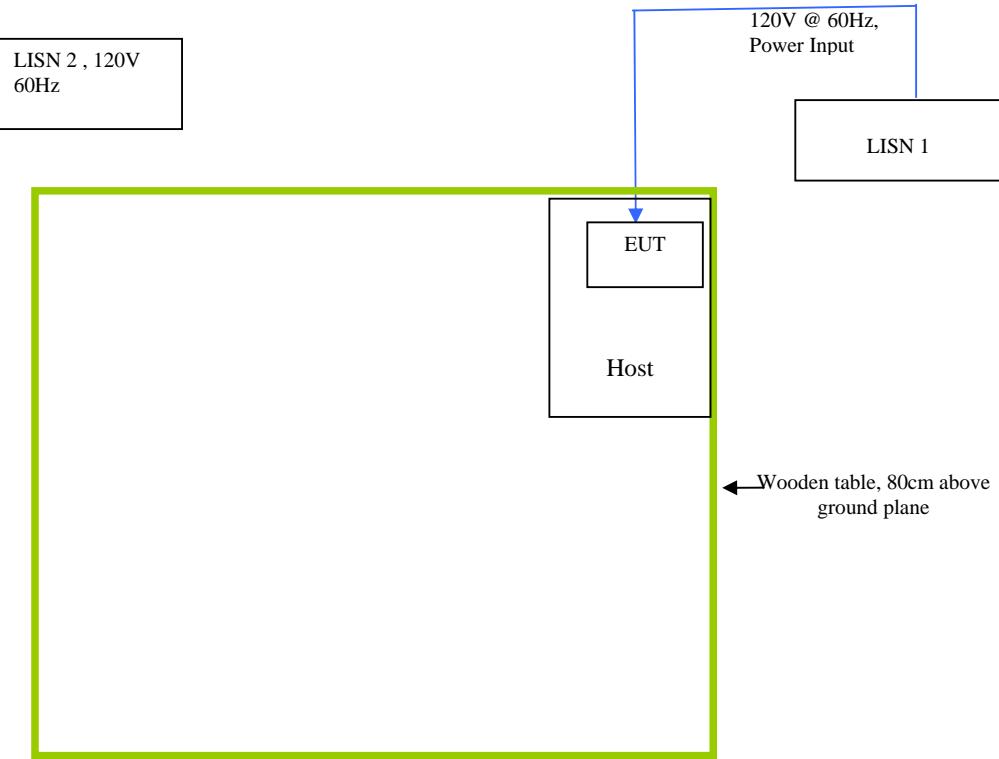


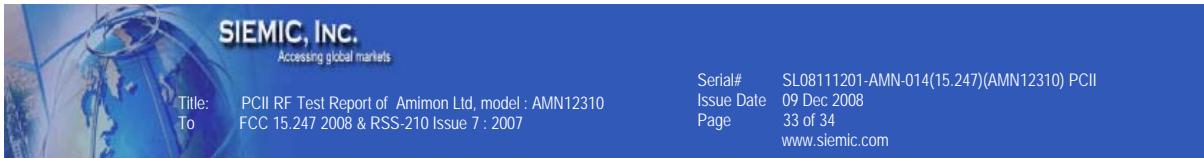

## Annex C.ii. EUT OPERATING CONDITIONS

The following is the description of how the EUT is exercised during testing.

Test	Description Of Operation
Emissions Testing	The EUT was controlled via PC Using manufacturer's program.
Others Testing	TX mode is normal mode with full power.

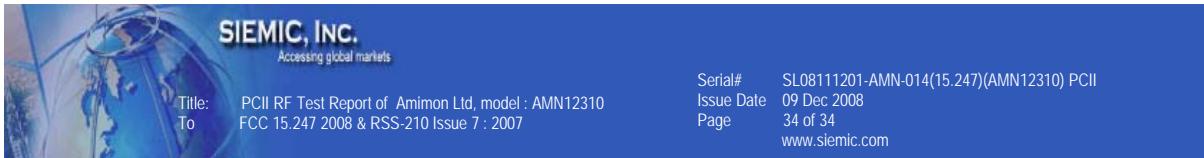

## Annex D USER MANUAL, BLOCK & CIRCUIT DIAGRAM

Please see attachment