



47 CFR PART 15 SUBPART B

TEST REPORT

of

808i Mobile Phone

Model Name: 808i
Brand Name: NEO
Report No.: SZ07090083E01
FCC ID: VRG-NEO808I-07

prepared for

Neo Products Limited
Dubai Media City, Bldg # 4, Off # 31

Shenzhen Electronic Product Quality Testing Center

Morlab Laboratory
3/F, Electronic Testing Building, Shafe Road, Xili,
Nanshan District, Shenzhen, 518057 P. R. China

Tel: +86 755 82146728

Fax: +86 755 821460218



NOTE: This test report can be duplicated completely for the legal use with the approval of the applicant; it shall not be reproduced except in full, without the written approval of Shenzhen Electronic Product Quality Testing Center Morlab Laboratory. Any objections should be raised to us within thirty workdays since the date of issue.

TABLE OF CONTENTS

1. TEST CERTIFICATION	3
2. GENERAL INFORMATION	4
2.1 EUT Description	4
2.2 EUT Function	5
2.3 Test Standards and Results	6
2.4 Facilities and Accreditations	7
2.4.1 Facilities	7
2.4.2 Test Environment Conditions.....	7
3. TEST CONDITIONS SETTING	8
3.1 Test Mode	8
3.1.1 GSM Test Mode	8
3.1.2 USB Test Mode	8
3.2 Test Setup and Equipments List	9
3.2.1 Conducted Emission.....	9
3.2.2 Radiated Emission.....	10
4. 47 CFR PART 15B REQUIREMENTS	11
4.1 Conducted Emission	11
4.1.1 Requirement	11
4.1.2 Test Description	11
4.1.3 Test Result.....	11
4.2 Radiated Emission	15
4.2.1 Requirement	15
4.2.2 Test Description	15
4.2.3 Test Result.....	15

1. TEST CERTIFICATION

Equipment under Test: 808i Mobile Phone

Brand Name: NEO

Model Name: 808i

FCC ID: VRG-NEO808I-07

Applicant: Neo Products Limited

Dubai Media City, Bldg # 4, Off # 31

Manufacturer: NEO Aplus Tec

ChangAn Town, DongGuan City, China 523883

Emission Designator: 300KGXW

Test Standards: 47 CFR Part 15 Subpart B

Test Date(s): October 18, 2007 – October 30, 2007

Test Result: PASS

* We Hereby Certify That:

The equipment under test was tested by Shenzhen Electronic Product Quality Testing Center Morlab Laboratory. The test data, data evaluation, test procedures and equipment configurations shown in this report were made in accordance with the requirement of related FCC rules.

The test results of this report only apply for the tested sample equipment identified above. The test report shall be invalid without all the signatures of the test engineer, the reviewer and the approver.

Tested by: *Luo Biao* Dated: *Oct. 31*

Luo Biao



Reviewed by: *Wei Yanquan* Dated: *Oct. 31*

Wei Yanquan

Approved by: *Shu Luan* Dated: *Oct. 31*

Shu Luan

2. GENERAL INFORMATION

2.1 EUT Description

EUT Type.....: 808i Mobile Phone
Model Name: 808i
Serial No.....: (n.a, marked #1 by test site)
IMEI: 354851002068128
Hardware Version: Z7_01 070331
Software Version: V808I_PINKMIX_LJ_BYD_SP_V03
Note: V808I_XX_YY_ZZ_SP_V03(XX express color, YY express LCD Brand, ZZ express camera Brand)
Modulation Type.....: GMSK
Power Supply.....: Battery
Brand name: TONGDA
Mode no.: 363443
Capacitance: 500mAh
Rated voltage: 3.7V
Charge limited: 4.2V
Manufacturer: SHENZHEN TONGDA ELECTRONICS CO., LCD
Manufacturer Address: ZhengTian District, Jiekou Village, ChangAn Town, DongGuan City, China 523883
Ancillary Equipment: AC Adapter (Charger for Battery)
Model Name: A01S055052E
Brand Name: ANFUNET
Serial No.: (n.a. marked #1 by test site)
Rated Input: ~ 100-240V, 0.1A,50Hz
Rated Output: == 5V, 500mA
Manufacturer: ANFUNET TECHNOLOGIES(SHENZHEN) CO., LTD
Manufacturer Address: 10bidg. B Districe, Changyuan Industry Area, Xili, Shenzhen China
Wire Length: 100cm

Note 1: The EUT is a GSM /GPRS terminal which includes Bluetooth Module; it supports GSM 1900MHz, 1900MHz band is tested in this report.

Note 2: A communication link between the EUT and the Bluetooth Earphone are established at the start of the test, and maintained during the all test in this report.

Note 3: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

2.2 EUT Function

The EUT supports Bluetooth function.

The EUT supports GPRS function, and GPRS Class is 12.

The EUT is equipped with a T-Flash card slot; equipped with a special port which can be connected to the ancillary equipments supplied by the manufacturer e.g. the AC Adapter and the USB Adapter Cable.

The EUT outfits an inner Camera, and the EUT supports PC Web Camera function.



2.3 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart B:

No.	Identity	Document Title
1	47 CFR Part 15 (10-1-05 Edition)	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Result
1	15.107	Conducted Emission	PASS
2	15.109	Radiated Emission	PASS

NOTE:

The tests were performed according to the method of measurements prescribed in ANSI C63.4 2003.

2.4 Facilities and Accreditations

2.4.1 Facilities

Shenzhen Electronic Product Quality Testing Center Morlab Laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L1659.

All measurement facilities used to collect the measurement data are located at Electronic Testing Building, Shahe Road, Xili, Nanshan District, Shenzhen 518055 CHINA. The test site is constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22; the FCC registration number is 741109.

2.4.2 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	20 - 25
Relative Humidity (%):	40 - 60
Atmospheric Pressure (kPa):	96

3. TEST CONDITIONS SETTING

3.1 Test Mode

3.1.1 GSM Test Mode

(1) The first test mode (GSM)

The EUT configuration of the emission tests is EUT + Battery + Charger.

In this test mode, the EUT will be working under the Traffic operating mode and Idle operating mode.

During the measurement of Traffic operating mode, a communication link was established between the EUT and a System Simulator (SS). The EUT operated at GSM 850MHz mid ARFCN (190) and maximum output power (level 5).

(2) The second test mode (GPRS)

The EUT configuration of the emission tests is EUT + Battery + Charger.

In this test mode, a GPRS link was established between the EUT and a System Simulator (SS); date was transmitted between EUT and System Simulator (SS), and maintained during the measurement.

NOTE: These test modes are performed, only the worst cases are recorded in this report.

3.1.2 USB Test Mode

(1) The first test mode (USB)

The EUT configuration of the emission tests is TransFlash Card + EUT + Battery + PC.

In this test mode, the EUT with a TransFlash Card embedded is connected with a PC via a special USB cable supplied by applicant. During the measurement, a communication link was established between the EUT and a System Simulator (SS), simultaneity, the date is transmitting between the PC and the TransFlash Card of the EUT.

(2) The second test mode (PC Web Camera)

The EUT configuration of the emission tests is EUT + Battery + PC.


The EUT supports PC Web Camera function. During the measurement, the EUT was connected with a PC via a special USB cable supplied by applicant, and the EUT working by way of the PC Web Camera.

NOTE: These test modes are performed, only the worst cases are recorded in this report.

3.2 Test Setup and Equipments List

3.2.1 Conducted Emission

A. Test Setup:

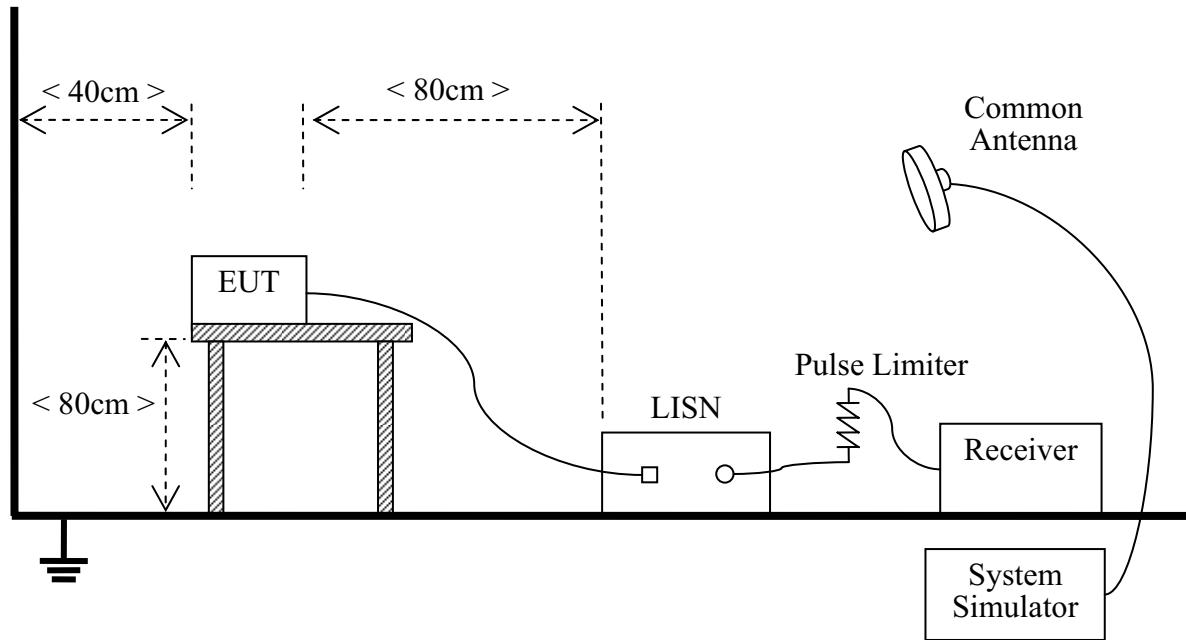


The EUT is placed on a 0.8m high insulating table, which stands on the grounded conducting floor, and keeps 0.4m away from the grounded conducting wall. The EUT is connected to the power mains through a LISN which provides $50\Omega/50\mu\text{H}$ of coupling impedance for the measuring instrument. The Common Antenna is used for the call between the EUT and the System Simulator (SS). A Pulse Limiter is used to protect the measuring instrument. The factors of the whole test system are calibrated to correct the reading.

B. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Receiver	Agilent	E7405A	US44210471	2007.07	1year
LISN	Schwarzbeck	NSLK 8127	812744	2007.08	1year
Pulse Limiter (20dB)	Schwarzbeck	VTSD 9561-D	9391	(n.a.)	(n.a.)
System Simulator	Agilent	E5515C	GB43130131	2007.06	1year
Personal Computer	HP	Pavilion ze2202	CNF5460DNL	(n.a.)	(n.a.)
Bluetooth-Headset	Nokia	HS-36W	(n.a.)	(n.a.)	(n.a.)
T-Flash Card	SanDisk	256MB	(n.a.)	(n.a.)	(n.a.)

3.2.2 Radiated Emission

C. Test Setup:

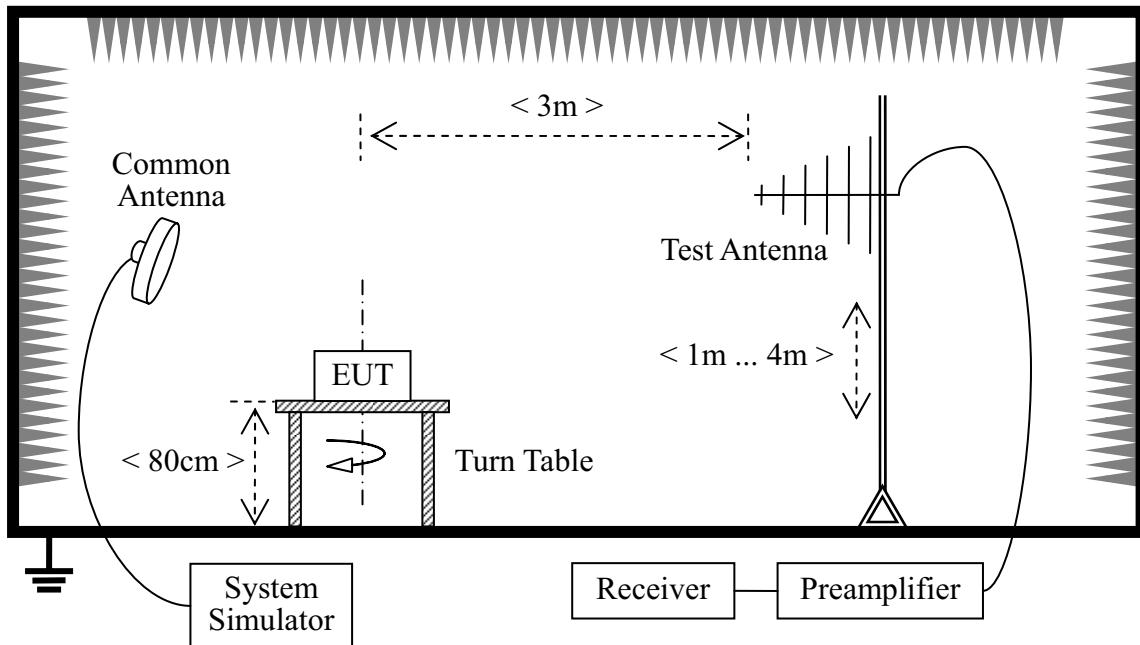

The test is performed in a 3m Semi-Anechoic Chamber; the antenna factor, cable loss and so on of the site (factors) is calculated to correct the reading. The EUT is placed on a 0.8m high insulating Turn Table, and keeps 3m away from the Test Antenna, which is mounted on a variable-height antenna master tower. The Common Antenna is used for the call between the EUT and the System Simulator (SS).

D. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Receiver	Agilent	E7405A	US44210471	2007.07	1year
Full-Anechoic Chamber	Albatross	9m*6m*6m	(n.a.)	2006.08	2year
Test Antenna - Bi-Log	Schwarzbeck	VULB 9163	9163-274	2007.07	1year
Test Antenna - Horn	Schwarzbeck	BBHA 9120C	9120C-384	2007.07	1year
System Simulator	Agilent	E5515C	GB43130131	2007.06	1year
Personal Computer	HP	Pavilion ze2202	CNF5460DNL	(n.a.)	(n.a.)
Bluetooth-Headset	Nokia	HS-36W	(n.a.)	(n.a.)	(n.a.)
T-Flash Card	SanDisk	256MB	(n.a.)	(n.a.)	(n.a.)

4. 47 CFR PART 15B REQUIREMENTS

4.1 Conducted Emission

4.1.1 Requirement

According to FCC section 15.107, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

NOTE:

- a) The limit subjects to the Class B digital device.
- b) The lower limit shall apply at the band edges.
- c) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

4.1.2 Test Description

See section 3.2.1 of this report.

4.1.3 Test Result

The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. All test modes are considered, refer to recorded points and plots below.


4.1.3.1 GSM Test Tode

A. Test Verdict Recorded for Suspicious Points:


No.	@Frequency (MHz)	Measured Emission Level (dB μ V)				Limit (dB μ V)		Verdict
		PK	QP	AV	Phase	QP	AV	
1	0.511	61.0	51.8	37.0	L	56.0	46.0	PASS
2	0.612	57.0	50.8	37.3	L	56.0	46.0	PASS

No.	@Frequency (MHz)	Measured Emission Level (dB μ V)				Limit (dB μ V)		Verdict
		PK	QP	AV	Phase	QP	AV	
3	0.825	56.3	49.5	32.4	L	56.0	46.0	PASS
4	1.064	57.0	49.1	31.9	L	56.0	46.0	PASS
5	1.142	56.4	48.9	32.2	L	56.0	46.0	PASS
6	2.245	55.9	49.1	33.00	L	56.0	46.0	PASS
7	0.422	51.8	48.7	33.7	N	57.4	47.4	PASS
8	0.608	54.4	50.1	33.3	N	56.0	46.0	PASS
9	1.173	52.0	47.6	29.2	N	56.0	46.0	PASS
10	1.236	53.1	48.5	30.2	N	56.0	46.0	PASS
11	1.327	52.3	47.5	29.3	N	56.0	46.0	PASS
12	2.213	53.5	47.0	28.8	N	56.0	46.0	PASS

B. Test Plot:

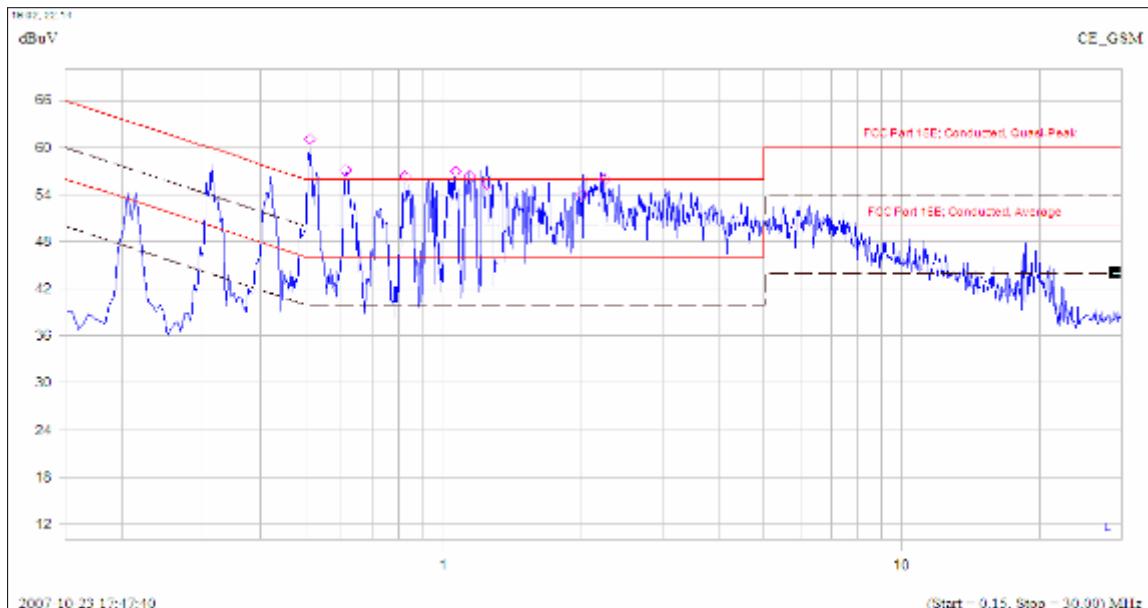

(Plot A: L Phase)

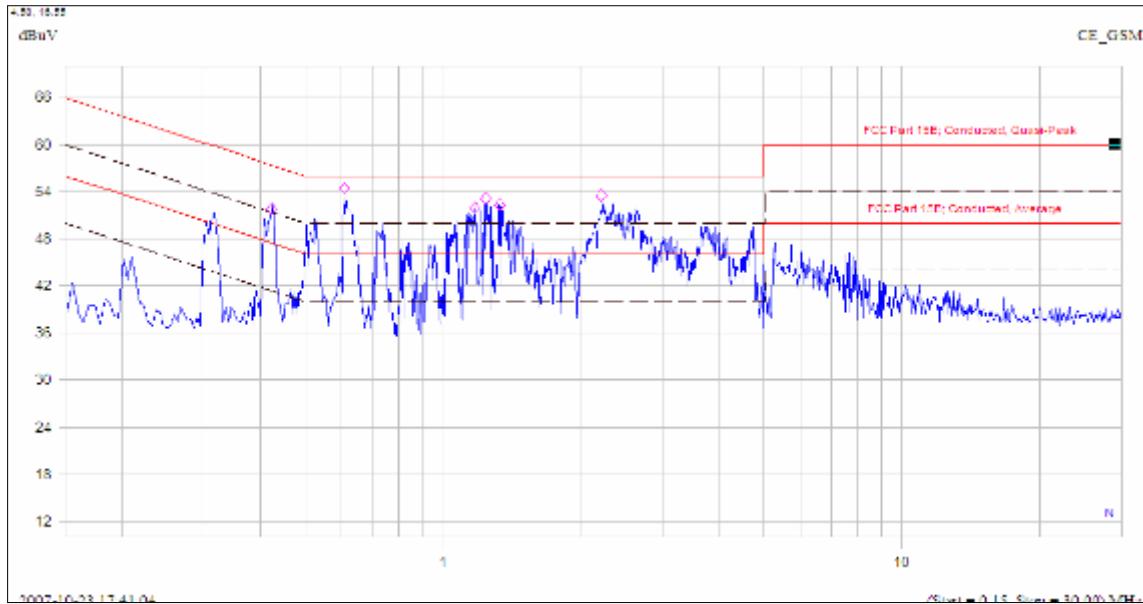


(Plot B: N Phase)

4.1.3.2 USB Test Mode


A. Test Verdict Recorded for Suspicious Points:

No.	@Frequency (MHz)	Measured Emission Level (dBμV)				Limit (dBμV)		Verdict
		PK	QP	AV	Phase	QP	AV	
1	0.151	56.9	49.4	29.5	L	66.0	56.0	PASS
2	0.588	46.7	44.7	36.8	L	56.0	46.0	PASS
3	0.615	50.8	48.4	37.5	L	56.0	46.0	PASS
4	0.651	42.2	39.7	29.1	L	56.0	46.0	PASS
5	0.708	41.6	37.9	33.3	L	56.0	46.0	PASS
6	(n.a)	(n.a)	(n.a)	(n.a)	L	(n.a)	(n.a)	(n.a)
7	0.212	55.4	50.6	43.8	N	63.1	53.1	PASS
8	0.281	49.6	45.6	39.7	N	60.7	50.7	PASS
9	0.472	41.8	37.8	28.7	N	56.5	46.5	PASS
10	0.589	47.0	45.1	36.9	N	56.0	46.0	PASS
11	0.610	50.2	48.5	38.1	N	56.0	46.0	PASS
12	(n.a)	(n.a)	(n.a)	(n.a)	N	(n.a)	(n.a)	(n.a)

B. Test Plot:

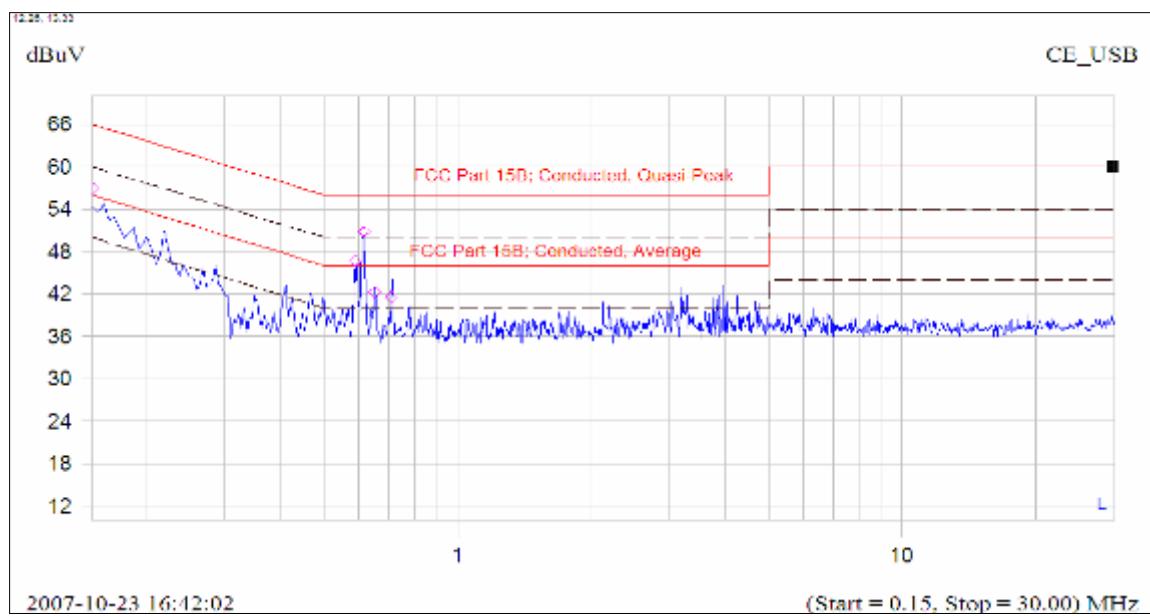

(Plot A: L Phase)

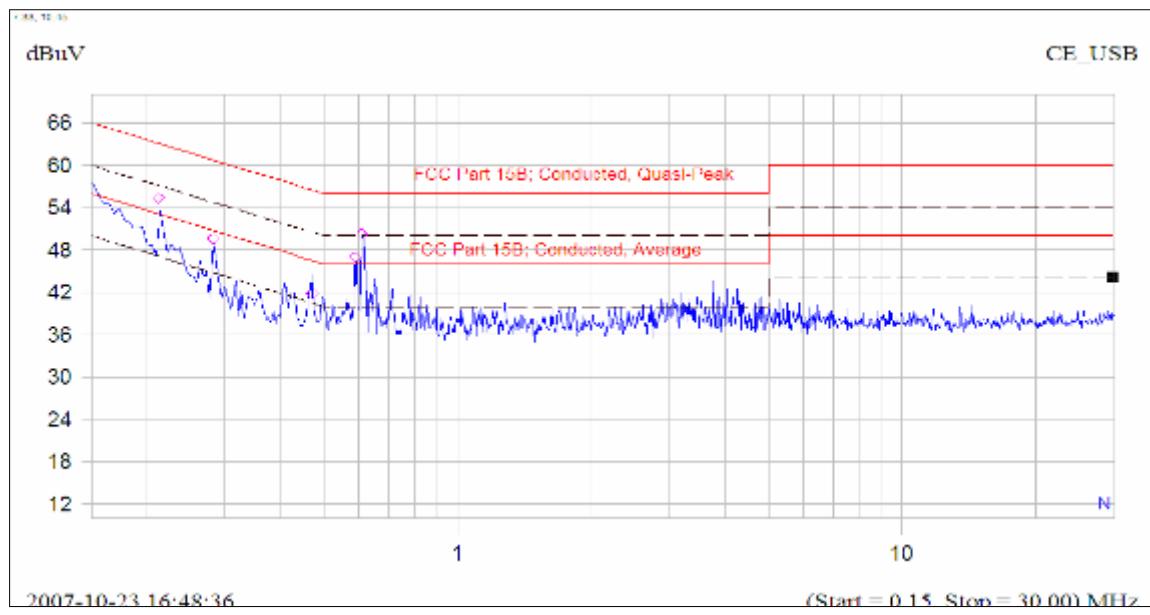

(Plot B: N Phase)

4.2 Radiated Emission

4.2.1 Requirement

According to FCC section 15.109, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency range (MHz)	Field Strength	
	µV/m	dBµV/m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

NOTE:

- a) Field Strength (dBµV/m) = $20 \log_{10} [\text{Field Strength} (\mu\text{V/m})]$.
- b) In the emission tables above, the tighter limit applies at the band edges.

4.2.2 Test Description

See section 3.2.2 of this report.

4.2.3 Test Result

The maximum radiated emission is searched using PK, QP and AV detectors; the emission levels more than the limits, and that have narrow margins from the limits will be re-measured with AV and QP detectors. Both the vertical and the horizontal polarizations of the Test Antenna are considered to perform the tests. All test modes are considered, refer to recorded points and plots below.

4.2.3.1 GSM test mode

A. Test Verdict Recorded for Suspicious Points:


No.	@Frequency (MHz)	Emission Level (dBµV/m)			Quasi-Peak Limit (dBµV/m)	Result
		PK	QP	Antenna Polarization		
1	30 - 88	---	---	Vertical	40	PASS
2	88 - 216	---	---	Vertical	43.5	PASS
3	216 - 960	---	---	Vertical	46	PASS
4	Above 960	---	---	Vertical	54	PASS
5	30 - 88	---	---	Horizontal	40	PASS
6	88 - 216	---	---	Horizontal	43.5	PASS
7	216 - 960	---	---	Horizontal	46	PASS

No.	@Frequency (MHz)	Emission Level (dB μ V/m)			Quasi-Peak Limit (dB μ V/m)	Result
		PK	QP	Antenna Polarization		
8	Above 960	---	---	Horizontal	54	PASS


Note: “---” in the table above means that the emissions are too small to be measured and are at least 10 dB below the limit.

B. Test Plot:

Note: Following is the plots for emission measurement; please note that marked spikes with circle should be ignored because they are MS and SS carrier frequency.

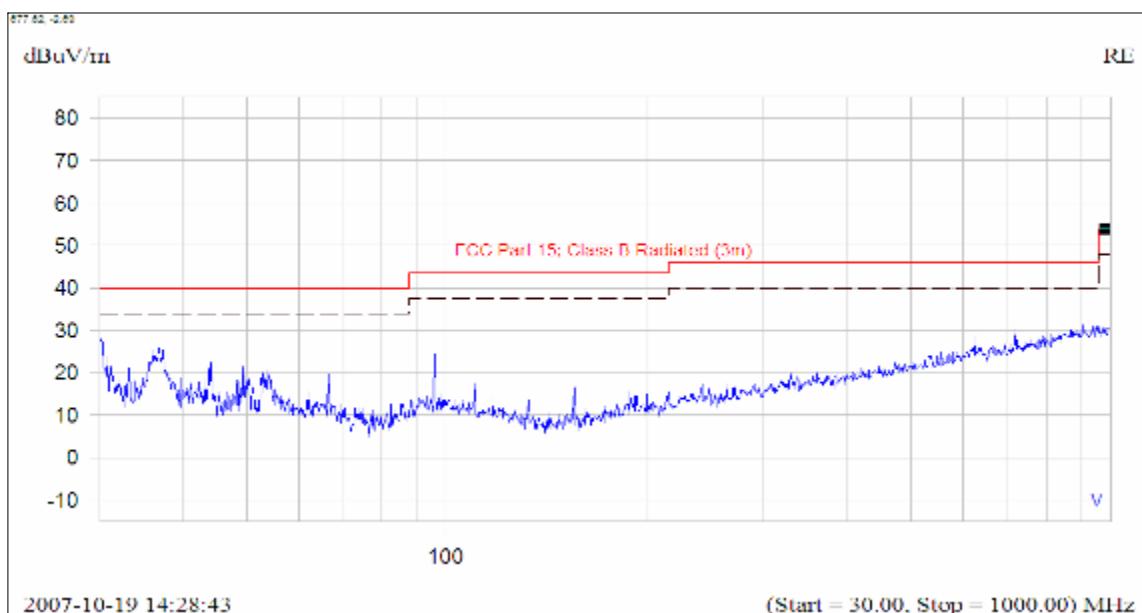

(Plot A: Test Antenna Vertical)

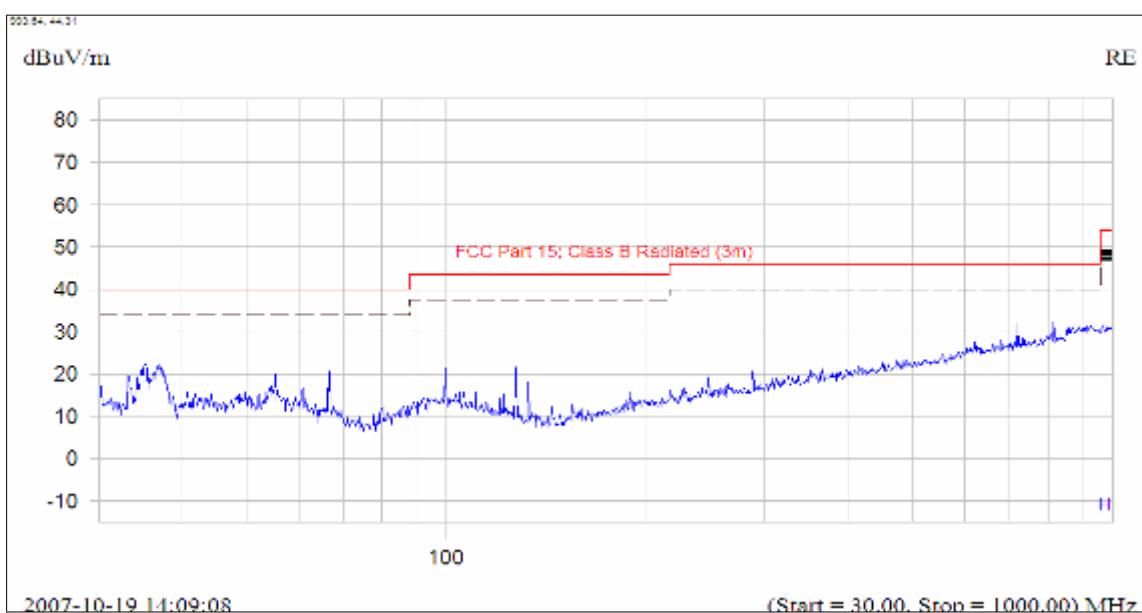

(Plot B: Test Antenna Horizontal)


4.2.3.2 USB Test Mode

A. Test Verdict Recorded for Suspicious Points:

No.	@Frequency (MHz)	Emission Level (dB μ V/m)			Quasi-Peak Limit (dB μ V/m)	Result
		PK	QP	Antenna Polarization		
1	66.525	28.6	---	Vertical	40	PASS
2	179.975	30.6	---	Vertical	43.5	PASS
3	191.975	32.9	---	Vertical	43.5	PASS
4	232.750	31.0	---	Vertical	46	PASS
5	432.100	31.8	---	Vertical	46	PASS
6	565.650	31.8	---	Vertical	46	PASS
7	184.350	36.4	31.6	Horizontal	43.5	PASS
8	191.975	38.0	33.2	Horizontal	43.5	PASS
9	221.225	34.8	---	Horizontal	43.5	PASS
10	232.750	39.9	34.5	Horizontal	46	PASS
11	395.950	35.2	---	Horizontal	46	PASS
12	566.275	38.0	34.2	Horizontal	46	PASS

B. Test Plot:


Note: Following is the plots for emission measurement; please note that marked spikes with circle should be ignored because they are MS and SS carrier frequency.

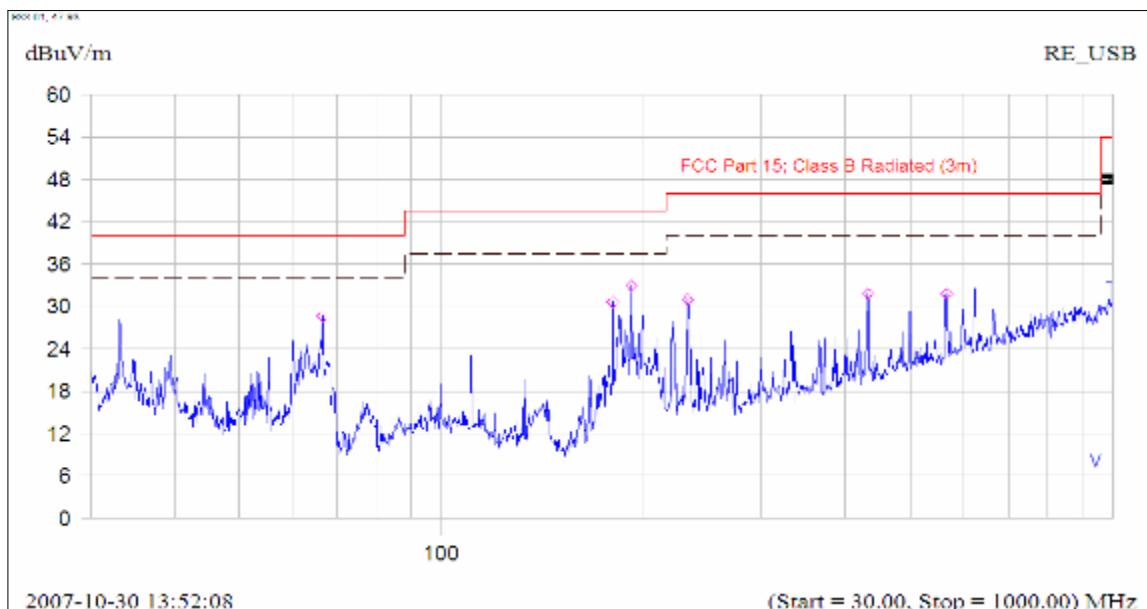

(Plot A: Test Antenna Vertical)



Report No.: SZ07090083E01

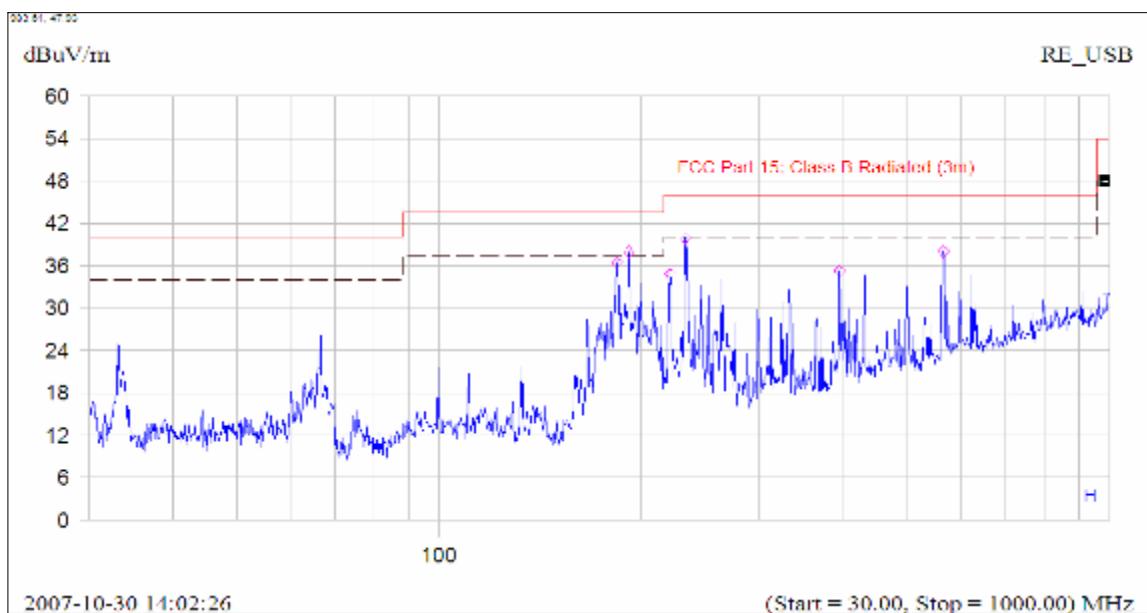

(Plot B: Test Antenna Horizontal)

** END OF REPORT **