

FCC PART 18

EMI MEASUREMENT AND TEST REPORT

For

Leedarson Lighting (Xiamen) Co., Ltd.

Caitang Industrial Zone, Lvling Road, Xiamen, China.

FCC ID: VRZNHSZR13

Sep 18, 2009

Product Name: CFL

Model No: NHSZR13

Sample
Received Date: Aug 22, 2009

Test
Performed Date: Aug 22, 2009

Test Engineer: Paul Tan 

Reviewed By: Chris Zeng 

Prepared By: BEST Test Service (Shenzhen) Co., Ltd.
C, 310-316, Huameiju Business Center, 82 Block,
Baoan District, Shenzhen, 518133, China
Tel: +86-755-28236006
Fax: +86-755-28236249

Note: The test report is specially limited to the above company and the product model only, it may not be duplicated without prior written consent of Best Test Service (Shenzhen) Co., Ltd.

TABLE OF CONTENTS

GENERAL INFORMATION.....	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
OBJECTIVE	3
RELATED SUBMITTAL(S)/GRANT(S)	3
TEST METHODOLOGY	3
TEST FACILITY	3
SYSTEM TEST CONFIGURATION.....	4
JUSTIFICATION	4
SCHEMATICS / BLOCK DIAGRAM.....	4
EQUIPMENT MODIFICATIONS	4
CONFIGURATION OF TEST SYSTEM	4
TEST SETUP BLOCK DIAGRAM	4
CONDUCTED EMISSIONS TEST DATA.....	5
APPLICABLE STANDARD	5
MEASUREMENT UNCERTAINTY	5
EUT SETUP	5
TEST EQUIPMENTS	6
TEST PROCEDURE	6
SUMMARY OF TEST RESULTS	6
CONDUCTED EMISSIONS TEST DATA AND PLOTS	6

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The Leedarson Lighting (Xiamen) Co., Ltd.'s model NHSZR13, or the "EUT" as referred to in this report is CFL, rated input voltage, operation frequency is between 40KHz to 60 KHz. Manufacture: Leedarson Lighting Co., Ltd. Address: Leedarson Industrial Park, Xintai Industrial Zone, Zhangzhou, Fujian, China

Model	NHSZR13	Electrical Power	13W
-------	---------	------------------	-----

The test data was only good for the test sample. It may have deviation for other test sample.

Objective

The following test report is prepared on behalf of Leedarson Lighting (Xiamen) Co., Ltd.. in accordance with Part 2, Subpart J, and Part 18, Subparts A, B, and C of the Federal Communication Commissions rules and regulations.

The objective of the manufacturer is to demonstrate compliance with FCC Part 18 limit requirements for Industrial, Scientific, and Medical Equipment.

Related Submittal(s)/Grant(s)

No Related Submittals.

Test Methodology

All measurements contained in this report were conducted with MP-5 1986, FCC Method of measurements of radio noise emission from Industrial, Scientific and Medical equipments.

Test Facility

All measurement facilities used to collect the data are located at Huatongwei Building , Keji Rd, 12 S, high-Tech Park, Nanshan District, Shenzhen, China.

The sites are constructed in conformance with the requirements of ANSI C63.7/634 and CISPR 22, The site was accredited by FCC (662850), A2LA(2243.01) and CNAL (L1225)

SYSTEM TEST CONFIGURATION

Justification

The EUT was tested under normal mode as used by a common (typical) user.


Schematics / Block Diagram

N/A


Equipment Modifications

No modifications were made by BEST TEST SERVICE (SHENZHEN) CO., LTD. to ensure the EUT to comply with the application limits and requirements.

Configuration of Test System



Test Setup Block Diagram

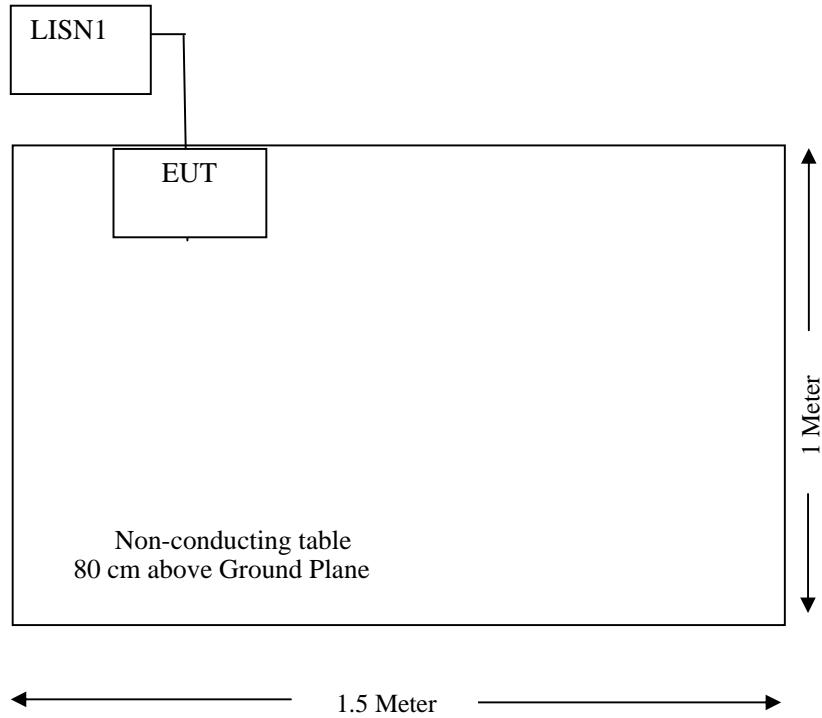

CONDUCTED EMISSIONS TEST DATA

Applicable Standard

For the following equipment, when designed to be connected to the public utility (AC) power line the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies shall not exceed the limits in the following tables. Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal using a 50 μ H/50 ohms line impedance stabilization network (LISN).


Frequency Range (MHz)	Max RF Voltage (uV)	Max RF Voltage (dBuV)
Non-consumer equipment		
0.45 to 1.6	1,000	60.0
1.6 to 30	3,000	69.0
Consumer equipment		
0.45 to 2.51	250	48.0
2.51 to 3.0	3000	69.0
3.0 to 30	250	48.0

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMI. The factors contributing to uncertainties are EMI Test Receiver, cable loss, and LISN.

Based on NIS 81, The Treatment of Uncertainty in EMI Measurements, and the best estimate of the uncertainty of any conducted emissions measurement at BEST TEST SERVICE (SHENZHEN) CO., LTD. is ± 2.0 dB.

EUT Setup

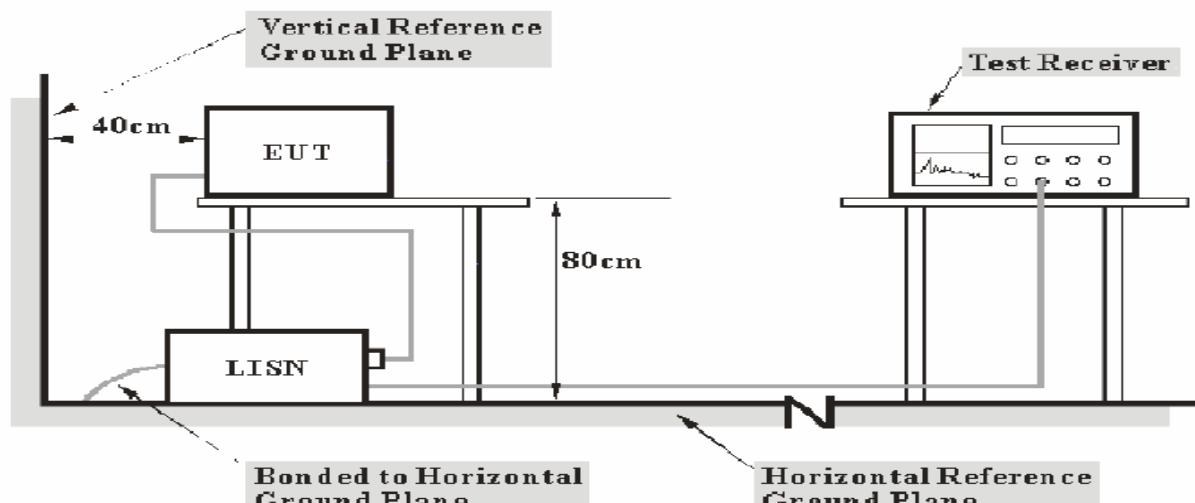

Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMIN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with MP-5 measurement procedure. The specification used was the FCC Part 18 limits.

The EUT was connected to the power cord extension and placed on the left of the back edge on the test table.

The power cord extension was connected with 120 VAC/60 Hz power source.

Test Equipments

Manufacturer	Description	Model	Serial Number	Cal. Date	Cal. Due. Date
ROHDE & SCHWARZ	EMI TEST RECEIVER	ESCS30	100038	2009-08-05	20010-08-05
ROHDE & SCHWARZ	L.I.S.N	ESH2-Z5	100028	2009-08-05	20010-08-05
ROHDE & SCHWARZ	Pulse Limiter	ESHSZ2	100044	2009-08-05	20010-08-05

Statement of traceability: BEST attests that all calibrations have been performed per the CNAL /A2LA requirements, traceable to NIM China

Test Procedure

During the conducted emission test, the power cord of the power cord extension was connected to the auxiliary outlet of the first LISN.

Maximizing procedure was performed on the six (6) highest emissions to ensure that the EUT is compliant with all installation combination.

All data was recorded in the peak detection mode. Quasi-peak readings were only performed when an emission was found to be marginal (within 4 dB μ V of specification limits). Quasi-peak readings are distinguished with a "Qp".

The EUT was tested under the normal modes during the final qualification test to represent the worst-case results.

Summary of Test Results

Pass

The EUT complied with the FCC 18 Conducted margin for industry, scientific and medical device.


Conducted Emissions Test Data and Plots

BEST TEST SERVICE SHENZHEN CO., LTD**Voltage Mains Test FCC Part 18**

EUT: CFL M/N:NHSZR13
Manufacturer: LEEDARSON
Operating Condition: ON
Test Site: 3# SHIELDED ROOM
Operator: David
Test Specification: AC 120V/60Hz
Comment:
Start of Test: 08/22/2009

SCAN TABLE: "Voltage (9K-30M) OP"

Short Description: 150K-30M Voltage

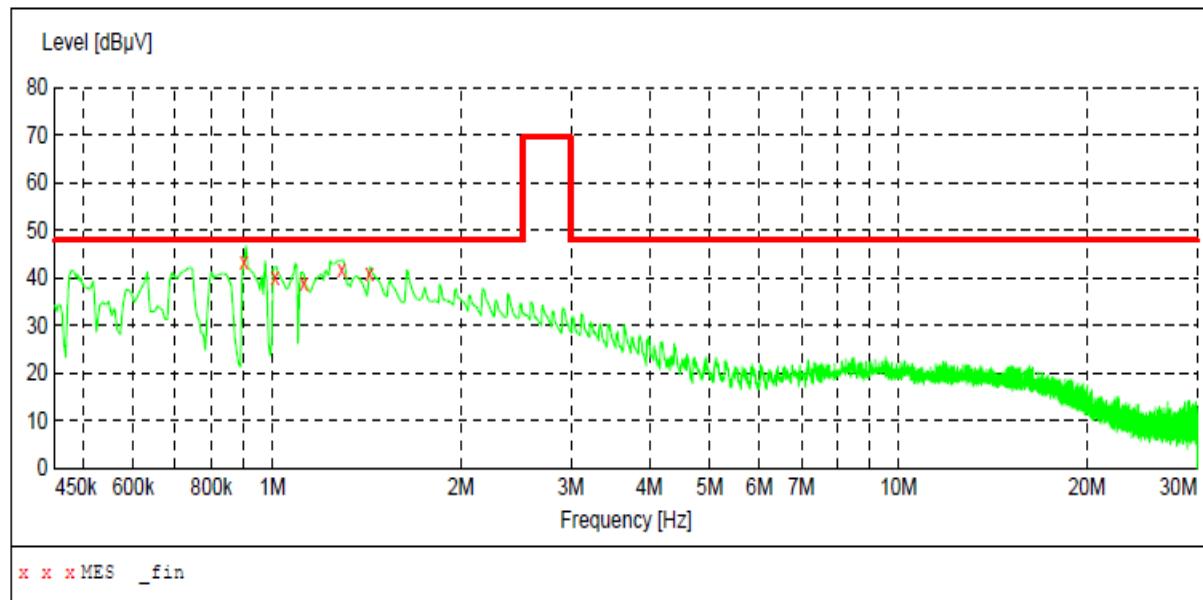**MEASUREMENT RESULT:**


Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.902000	43.30	10.1	48	4.7	QP	L1	GND
1.010000	40.30	10.2	48	7.7	QP	L1	GND
1.124000	38.80	10.2	48	9.2	QP	L1	GND
1.292000	41.90	10.2	48	6.1	QP	L1	GND
1.430000	41.10	10.2	48	6.9	QP	L1	GND

BEST TEST SERVICE SHENZHEN CO., LTD**Voltage Mains Test FCC Part 18**

EUT: CFL M/N:NHSZR13
Manufacturer: LEEDARSON
Operating Condition: ON
Test Site: 3# SHIELDED ROOM
Operator: David
Test Specification: AC 120V/60Hz
Comment:
Start of Test: 08/22/2009

SCAN TABLE: "Voltage (9K-30M) OP"

Short Description: 150K-30M Voltage

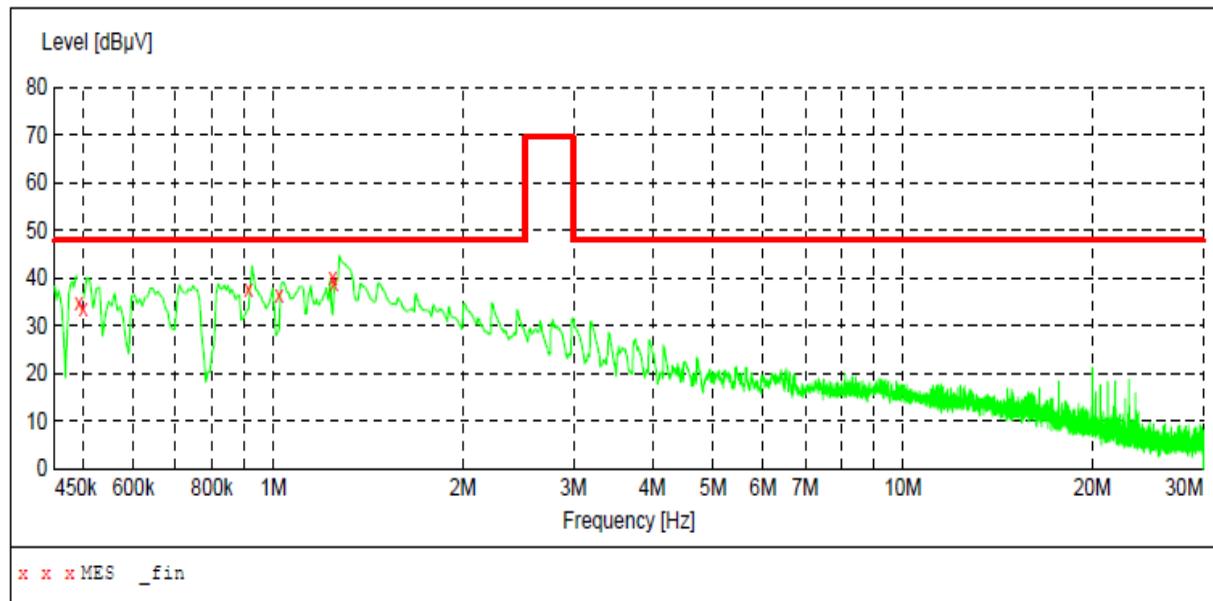**MEASUREMENT RESULT:**

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.492000	34.90	10.1	48	13.1	QP	N	GND
0.500000	33.60	10.1	48	14.4	QP	N	GND
0.914000	37.80	10.1	48	10.2	QP	N	GND
1.022000	36.60	10.2	48	11.4	QP	N	GND
1.244000	40.10	10.2	48	7.9	QP	N	GND
1.250000	38.80	10.2	48	9.2	QP	N	GND