



M. Flom Associates, Inc. - Global Compliance Center
3356 North San Marcos Place, Suite 107, Chandler, Arizona 85225-7176
www.mflom.com general@mflom.com (480) 926-3100, FAX: 926-3598

Date: December 9, 1999

Federal Communications Commission
Via: Electronic Filing

Attention: Authorization & Evaluation Division

FCC Rules: 22, 90

Gentlemen:

On behalf of the Applicant, enclosed please find Application Form 731, Engineering Test Report and all pertinent documentation, the whole for approval of the referenced equipment as shown.

Filing fees are attached.

We trust the same is in order. Should you need any further information, kindly contact the writer who is authorized to act as agent.

Sincerely yours,

Morton Flom, P. Eng.

enclosure(s)
cc: Applicant
MF/cvr

LIST OF EXHIBITS
(FCC CERTIFICATION (TRANSMITTERS) - REVISED 9/28/98)

BY APPLICANT:

1. LETTER OF AUTHORIZATION
2. IDENTIFICATION DRAWINGS, 2.1033(c) (11)
 - LABEL
 - LOCATION OF LABEL
 - COMPLIANCE STATEMENT
 - LOCATION OF COMPLIANCE STATEMENT
3. PHOTOGRAPHS, 2.1033(c) (12)
4. DOCUMENTATION: 2.1033(c)
 - (3) USER MANUAL
 - (9) TUNE UP INFO
 - (10) SCHEMATIC DIAGRAM
 - (10) CIRCUIT DESCRIPTION
5. PART 90.203(e) & (g) ATTESTATION

BY M.F.A. INC.

- A. TESTIMONIAL & STATEMENT OF CERTIFICATION
- B. STATEMENT OF QUALIFICATIONS



M. Flom Associates, Inc. - Global Compliance Center
3356 North San Marcos Place, Suite 107, Chandler, Arizona 85225-7176
www.mflom.com general@mflom.com (480) 926-3100, FAX: 926-3598

Sub-part
2.1033(c) :

EQUIPMENT IDENTIFICATION

For the following equipment:

NAMEPLATE DRAWING

ATTACHED, EXHIBIT 1.


LOCATION

AS PER LABEL DRAWING(S)

DATE OF REPORT

December 9, 1999

SUPERVISED BY:


Morton Flom, P. Eng.

THE APPLICANT HAS BEEN CAUTIONED AS TO THE FOLLOWING:

15.21 INFORMATION TO USER.

The users manual or instruction manual for an intentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

15.27(a) SPECIAL ACCESSORIES.

Equipment marketed to a consumer must be capable of complying with the necessary regulations in the configuration in which the equipment is marketed. Where special accessories, such as shielded cables and/or special connectors are required to enable an unintentional or intentional radiator to comply with the emission limits in this part, the equipment must be marketed with, i.e. shipped and sold with, those special accessories. However, in lieu of shipping or packaging the special accessories with the unintentional or intentional radiator, the responsible party may employ other methods of ensuring that the special accessories are provided to the consumer, without additional charge.

Information detailing any alternative method used to supply the special accessories for a grant of equipment authorization or retained in the verification records, as appropriate. The party responsible for the equipment, as detailed in § 2.909 of this chapter, shall ensure that these special accessories are provided with the equipment. The instruction manual for such devices shall include appropriate instructions on the first page of text concerned with the installation of the device that these special accessories must be used with the device. It is the responsibility of the user to use the needed special accessories supplied with the equipment.

TABLE OF CONTENTS

<u>RULE</u>	<u>DESCRIPTION</u>	<u>PAGE</u>
	Test Report	1
2.1033(c)	General Information Required	2
2.1033(c) (14)	Rule Summary	5
	Standard Test Conditions and Engineering Practices	6
2.1046(a)	Carrier Output Power (Conducted)	7
2.1051	Unwanted Emissions (Transmitter Conducted)	9
2.1053(a)	Field Strength of Spurious Radiation	13
2.1049(c) (1)	Emission Masks (Occupied Bandwidth)	16
2.1047(a)	Audio Low Pass Filter (Voice Input)	21
2.1047(a)	Audio Frequency Response	24
2.1047(b)	Modulation Limiting	26
2.1055(a) (1)	Frequency Stability (Temperature Variation)	28
2.1055(b) (1)	Frequency Stability (Voltage Variation)	31
2.202(g)	Necessary Bandwidth and Emission Bandwidth	32

PAGE NO.

1 of 32.

Required information per ISO/IEC Guide 25-1990, paragraph 13.2:

a)

TEST REPORT

b) Laboratory: M. Flom Associates, Inc.
(FCC: 31040/SIT) 3356 N. San Marcos Place, Suite 107
(Canada: IC 2044) Chandler, AZ 85224

c) Report Number: d99c0031

e) Test Item:

Description: VHF FM Transceiver

f) EUT Condition: Not required unless specified in individual tests.

g) Report Date: December 9, 1999
EUT Received: November 1, 1999

h, j, k): As indicated in individual tests.

i) Sampling method: No sampling procedure used.

l) Uncertainty: In accordance with MFA internal quality manual.

m) Supervised by:



Morton Flom, P. Eng.

n) Results: The results presented in this report relate only to the item tested.

o) Reproduction: This report must not be reproduced, except in full, without written permission from this laboratory.

PAGE NO.

2 of 32.

LIST OF GENERAL INFORMATION REQUIRED FOR CERTIFICATION

IN ACCORDANCE WITH FCC RULES AND REGULATIONS,
VOLUME II, PART 2 AND TO

22, 90

Sub-part 2.1033

1. NAME OF MANUFACTURER

2. ADDRESS OF MANUFACTURER

3. NAME OF IMPORTER

4. ADDRESS OF IMPORTER

5. NAME OF DISTRIBUTOR

6. ADDRESS OF DISTRIBUTOR

7. NAME OF MODEL

8. NAME OF MANUFACTURER OF EQUIPMENT

9. ADDRESS OF MANUFACTURER OF EQUIPMENT

10. NAME OF MANUFACTURER OF EQUIPMENT

11. ADDRESS OF MANUFACTURER OF EQUIPMENT

12. NAME OF MANUFACTURER OF EQUIPMENT

13. ADDRESS OF MANUFACTURER OF EQUIPMENT

14. NAME OF MANUFACTURER OF EQUIPMENT

15. ADDRESS OF MANUFACTURER OF EQUIPMENT

16. NAME OF MANUFACTURER OF EQUIPMENT

17. ADDRESS OF MANUFACTURER OF EQUIPMENT

18. NAME OF MANUFACTURER OF EQUIPMENT

19. ADDRESS OF MANUFACTURER OF EQUIPMENT

20. NAME OF MANUFACTURER OF EQUIPMENT

21. ADDRESS OF MANUFACTURER OF EQUIPMENT

22. NAME OF MANUFACTURER OF EQUIPMENT

23. ADDRESS OF MANUFACTURER OF EQUIPMENT

24. NAME OF MANUFACTURER OF EQUIPMENT

25. ADDRESS OF MANUFACTURER OF EQUIPMENT

26. NAME OF MANUFACTURER OF EQUIPMENT

27. ADDRESS OF MANUFACTURER OF EQUIPMENT

28. NAME OF MANUFACTURER OF EQUIPMENT

29. ADDRESS OF MANUFACTURER OF EQUIPMENT

30. NAME OF MANUFACTURER OF EQUIPMENT

31. ADDRESS OF MANUFACTURER OF EQUIPMENT

32. NAME OF MANUFACTURER OF EQUIPMENT

33. ADDRESS OF MANUFACTURER OF EQUIPMENT

34. NAME OF MANUFACTURER OF EQUIPMENT

35. ADDRESS OF MANUFACTURER OF EQUIPMENT

36. NAME OF MANUFACTURER OF EQUIPMENT

37. ADDRESS OF MANUFACTURER OF EQUIPMENT

38. NAME OF MANUFACTURER OF EQUIPMENT

39. ADDRESS OF MANUFACTURER OF EQUIPMENT

40. NAME OF MANUFACTURER OF EQUIPMENT

41. ADDRESS OF MANUFACTURER OF EQUIPMENT

42. NAME OF MANUFACTURER OF EQUIPMENT

43. ADDRESS OF MANUFACTURER OF EQUIPMENT

44. NAME OF MANUFACTURER OF EQUIPMENT

45. ADDRESS OF MANUFACTURER OF EQUIPMENT

46. NAME OF MANUFACTURER OF EQUIPMENT

47. ADDRESS OF MANUFACTURER OF EQUIPMENT

48. NAME OF MANUFACTURER OF EQUIPMENT

49. ADDRESS OF MANUFACTURER OF EQUIPMENT

50. NAME OF MANUFACTURER OF EQUIPMENT

51. ADDRESS OF MANUFACTURER OF EQUIPMENT

52. NAME OF MANUFACTURER OF EQUIPMENT

53. ADDRESS OF MANUFACTURER OF EQUIPMENT

M. Flom Associates, Inc. is accredited by the American Association for Laboratory Accreditation (A2LA) as shown in the scope below.

 THE AMERICAN ASSOCIATION FOR LABORATORY ACCREDITATION ACCREDITED LABORATORY A2LA has accredited M. FLOM ASSOCIATES, INC. Chandler, AZ for technical competence in the field of Electrical (EMC) Testing <p>The accreditation covers the specific tests and types of tests listed on the agreed scope of accreditation. This laboratory meets the requirements of ISO/IEC Guide 25-1990 "General Requirements for the Competence of Calibration and Testing Laboratories" (equivalent to relevant requirements of the ISO 9000 series of standards) and any additional program requirements in the identified field of testing.</p> <p>Presented this 24th day of November, 1998.</p> <p>  <i>Peter Flom</i> President For the Accreditation Council Certificate Number 1008.01 Valid to December 31, 2000 </p> <p>For tests or types of tests to which this accreditation applies, please refer to the laboratory's Electrical (EMC) Scope of Accreditation</p>	 American Association for Laboratory Accreditation SCOPE OF ACCREDITATION TO ISO/IEC GUIDE 25-1990 AND EN 45001 <p>M. FLOM ASSOCIATES, INC. Electronic Testing Laboratory 3356 North San Marcos Place, Suite 107 Chandler, AZ 85224-3731 Morton Flom Phone: 602 926 3100</p> <p>ELECTRICAL (EMC)</p> <table border="0"> <tr> <td>Valid to: December 31, 2000</td> <td>Certificate Number: 1008-01</td> </tr> <tr> <td colspan="2">In recognition of the successful completion of the A2LA evaluation process, accreditation is granted to this laboratory to perform the following <u>electromagnetic compatibility tests</u>:</td> </tr> <tr> <td>Test</td> <td>Standard(s)</td> </tr> <tr> <td>RF Emissions</td> <td>FCC Part 15 (Subparts B and C) using ANSI C63.4-1992; CISPR 11; CISPR 13; CISPR 14; CISPR 22; EN 55011; EN 55013; EN 55014; EN 55022; EN 50081-1; EN 50081-2; FCC Part 18; ICES-003; AS/NZS 1044; AS/NZS 1053; AS/NZS 1548; AS/NZS 4251.1</td> </tr> <tr> <td>RF Immunity</td> <td>EN 50082-1; EN 50082-2; AS/NZS 4251.1</td> </tr> <tr> <td>Radiated Susceptibility</td> <td>EN 61000-4-3; EN 50140; EN 50204; IEC 1000-4-3; IEC 801-3</td> </tr> <tr> <td>ESD</td> <td>EN 61000-4-2; IEC 1000-4-2; IEC 801-2</td> </tr> <tr> <td>BFT</td> <td>EN 61000-4-4; IEC 1000-4-4; IEC 801-4</td> </tr> <tr> <td>Surge</td> <td>EN 61000-4-5; IEC 50142; IEC 1000-4-5; IEC 801-5</td> </tr> <tr> <td>47 CFR (FCC)</td> <td>2, 21, 22, 23, 24, 74, 80, 87, 90, 95, 97</td> </tr> </table> <p> <i>Peter Flom</i> 5301 Buckeystown Pike, Suite 350 • Frederick, MD 21704-5307 • Phone: 301 644 3200 • Fax: 301 662 2974 </p>	Valid to: December 31, 2000	Certificate Number: 1008-01	In recognition of the successful completion of the A2LA evaluation process, accreditation is granted to this laboratory to perform the following <u>electromagnetic compatibility tests</u> :		Test	Standard(s)	RF Emissions	FCC Part 15 (Subparts B and C) using ANSI C63.4-1992; CISPR 11; CISPR 13; CISPR 14; CISPR 22; EN 55011; EN 55013; EN 55014; EN 55022; EN 50081-1; EN 50081-2; FCC Part 18; ICES-003; AS/NZS 1044; AS/NZS 1053; AS/NZS 1548; AS/NZS 4251.1	RF Immunity	EN 50082-1; EN 50082-2; AS/NZS 4251.1	Radiated Susceptibility	EN 61000-4-3; EN 50140; EN 50204; IEC 1000-4-3; IEC 801-3	ESD	EN 61000-4-2; IEC 1000-4-2; IEC 801-2	BFT	EN 61000-4-4; IEC 1000-4-4; IEC 801-4	Surge	EN 61000-4-5; IEC 50142; IEC 1000-4-5; IEC 801-5	47 CFR (FCC)	2, 21, 22, 23, 24, 74, 80, 87, 90, 95, 97
Valid to: December 31, 2000	Certificate Number: 1008-01																				
In recognition of the successful completion of the A2LA evaluation process, accreditation is granted to this laboratory to perform the following <u>electromagnetic compatibility tests</u> :																					
Test	Standard(s)																				
RF Emissions	FCC Part 15 (Subparts B and C) using ANSI C63.4-1992; CISPR 11; CISPR 13; CISPR 14; CISPR 22; EN 55011; EN 55013; EN 55014; EN 55022; EN 50081-1; EN 50081-2; FCC Part 18; ICES-003; AS/NZS 1044; AS/NZS 1053; AS/NZS 1548; AS/NZS 4251.1																				
RF Immunity	EN 50082-1; EN 50082-2; AS/NZS 4251.1																				
Radiated Susceptibility	EN 61000-4-3; EN 50140; EN 50204; IEC 1000-4-3; IEC 801-3																				
ESD	EN 61000-4-2; IEC 1000-4-2; IEC 801-2																				
BFT	EN 61000-4-4; IEC 1000-4-4; IEC 801-4																				
Surge	EN 61000-4-5; IEC 50142; IEC 1000-4-5; IEC 801-5																				
47 CFR (FCC)	2, 21, 22, 23, 24, 74, 80, 87, 90, 95, 97																				

"This laboratory is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this report have been determined in accordance with the laboratory's terms of accreditation unless stated otherwise in the report."

Should this report contain any data for tests for which we are not accredited, or which have been undertaken by a subcontractor that is not A2LA accredited, such data would not be covered by this laboratory's A2LA accreditation.

Subpart 2.1033 (continued)

(c) (8) : VOLTAGES & CURRENTS IN ALL ELEMENTS IN FINAL R. F. STAGE,
INCLUDING FINAL TRANSISTOR OR SOLID STATE DEVICE:

COLLECTOR CURRENT, A = per manual
COLLECTOR VOLTAGE, Vdc = per manual
SUPPLY VOLTAGE, Vdc = 7.5

(c) (9) : TUNE-UP PROCEDURE:

PLEASE SEE ATTACHED EXHIBITS

(c) (10) : CIRCUIT DIAGRAM/CIRCUIT DESCRIPTION:

Including description of circuitry & devices provided for determining and stabilizing frequency, for suppression of spurious radiation, for limiting modulation and limiting power.

PLEASE SEE ATTACHED EXHIBITS

(c) (11) : LABEL INFORMATION:

PLEASE SEE ATTACHED EXHIBITS

(c) (12) : PHOTOGRAPHS:

PLEASE SEE ATTACHED EXHIBITS

(c) (13) : DIGITAL MODULATION DESCRIPTION:

 ATTACHED EXHIBITS
 X N/A

(c) (14) : TEST AND MEASUREMENT DATA:

FOLLOWS

Sub-part

2.1033(c) (14) :

TEST AND MEASUREMENT DATA

All tests and measurement data shown were performed in accordance with FCC Rules and Regulations, Volume II; Part 2, Sub-part J, Sections 2.947, 2.1033(c), 2.1041, 2.1046, 2.1047, 2.1079, 2.1051, 2.1053, 2.1055, 2.1057 and the following individual Parts:

- 21 - Domestic Public Fixed Radio Services
- 22 - Public Mobile Services
- 22 Subpart H - Cellular Radiotelephone Service
- 22.901(d) - Alternative technologies and auxiliary services
- 23 - International Fixed Public Radiocommunication services
- 24 - Personal Communications Services
- 74 Subpart H - Low Power Auxiliary Stations
- 80 - Stations in the Maritime Services
- 80 Subpart E - General Technical Standards
- 80 Subpart F - Equipment Authorization for Compulsory Ships
- 80 Subpart K - Private Coast Stations and Marine Utility Stations
- 80 Subpart S - Compulsory Radiotelephone Installations for Small Passenger Boats
- 80 Subpart T - Radiotelephone Installation Required for Vessels on the Great Lakes
- 80 Subpart U - Radiotelephone Installations Required by the Bridge-to-Bridge Act
- 80 Subpart V - Emergency Position Indicating Radio beacons (EPIRB'S)
- 80 Subpart W - Global Maritime Distress and Safety System (GMDSS)
- 80 Subpart X - Voluntary Radio Installations
- 87 - Aviation Services
- 90 - Private Land Mobile Radio Services
- 94 - Private Operational-Fixed Microwave Service
- 95 Subpart A - General Mobile Radio Service (GMRS)
- 95 Subpart C - Radio Control (R/C) Radio Service
- 95 Subpart D - Citizens Band (CB) Radio Service
- 95 Subpart E - Family Radio Service
- 95 Subpart F - Interactive Video and Data Service (IVDS)
- 97 - Amateur Radio Service
- 101 - Fixed Microwave Services

STANDARD TEST CONDITIONS
and
ENGINEERING PRACTICES

Except as noted herein, the following conditions and procedures were observed during the testing:

In accordance with ANSI C63.4-1992, section 6.1.9, and unless otherwise indicated in the specific measurement results, the ambient temperature of the actual EUT was maintained within the range of 10° to 40°C (50° to 104 °F) unless the particular equipment requirements specify testing over a different temperature range. Also, unless otherwise indicated, the humidity levels were in the range of 10% to 90% relative humidity.

Prior to testing, the EUT was tuned up in accordance with the manufacturer's alignment procedures. All external gain controls were maintained at the position of maximum and/or optimum gain throughout the testing.

Measurement results, unless otherwise noted, are worst case measurements.

PAGE NO. 7 of 32.

NAME OF TEST: Carrier Output Power (Conducted)

SPECIFICATION: 47 CFR 2.1046(a)

GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.1

TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE

1. The EUT was connected to a resistive coaxial attenuator of normal load impedance, and the unmodulated output power was measured by means of an R. F. Power Meter.
2. Measurement accuracy is $\pm 3\%$.

MEASUREMENT RESULTS
(Worst case)

FREQUENCY OF CARRIER, MHz = 33.5, 29.8, 36.9

<u>POWER SETTING</u>	<u>R. F. POWER, WATTS</u>
Low	1
High	6


SUPERVISED BY:



Morton Flom, P. Eng.

TRANSMITTER POWER CONDUCTED MEASUREMENTS

TEST 1: R. F. POWER OUTPUT
TEST 2: FREQUENCY STABILITY

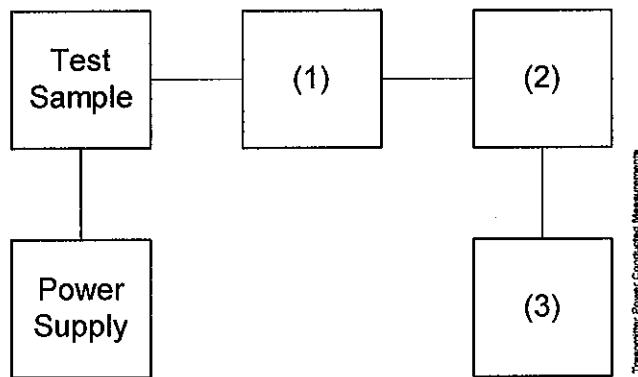

Asset Description (as applicable)	s/n
(1) COAXIAL ATTENUATOR	
i00122 Narda 766-10	7802
i00123 Narda 766-10	7802A
i00069 Bird 8329 (30 dB)	1006
i00113 Sierra 661A-3D	1059
(2) POWER METERS	
i00014 HP 435A	1733A05836
i00039 HP 436A	2709A26776
i00020 HP 8901A POWER MODE	2105A01087
(3) FREQUENCY COUNTER	
i00042 HP 5383A	1628A00959
i00019 HP 5334B	2704A00347
i00020 HP 8901A FREQUENCY MODE	2105A01087


PAGE NO. 9 of 32.
NAME OF TEST: Unwanted Emissions (Transmitter Conducted)
SPECIFICATION: 47 CFR 2.1051
GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.13
TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE

1. The emissions were measured for the worst case as follows:
 - (a): within a band of frequencies defined by the carrier frequency plus and minus one channel.
 - (b): from the lowest frequency generated in the EUT and to at least the 10th harmonic of the carrier frequency, or 40 GHz, whichever is lower.
2. The magnitude of spurious emissions that are attenuated more than 20 dB below the permissible value need not be specified.
3. MEASUREMENT RESULTS: ATTACHED FOR WORST CASE


FREQUENCY OF CARRIER, MHz = 33.5, 29.8, 36.9
SPECTRUM SEARCHED, GHz = 0 to $10 \times F_c$
MAXIMUM RESPONSE, Hz = 3160
ALL OTHER EMISSIONS = = 20 dB BELOW LIMIT
LIMIT(S), dBc
- (43+10xLOG P) = -43 (1 Watt)
- (43+10xLOG P) = -50.8 (6 Watts)

SUPERVISED BY:


Morton Flom, P. Eng.

TRANSMITTER SPURIOUS EMISSION

TEST A. OCCUPIED BANDWIDTH (IN-BAND SPURIOUS)
 TEST B. OUT-OF-BAND SPURIOUS

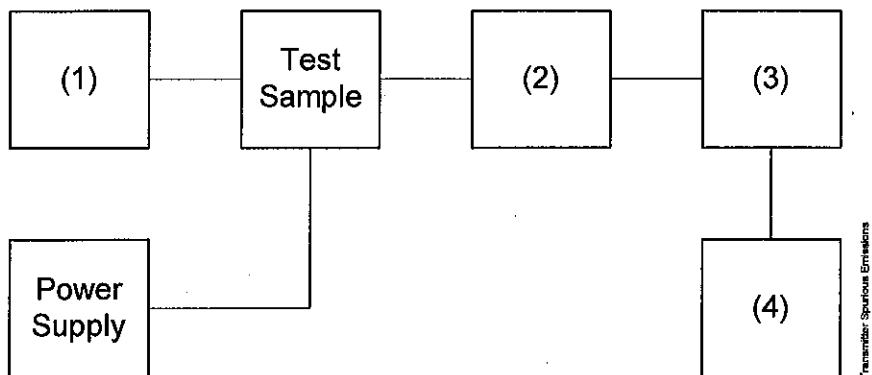

Asset Description (as applicable)	s/n
<u>(1) AUDIO OSCILLATOR/GENERATOR</u>	
i00010 HP 204D	1105A04683
i00017 HP 8903A	2216A01753
i00012 HP 3312A	1432A11250
<u>(2) COAXIAL ATTENUATOR</u>	
i00122 Narda 766-10	7802
i00123 Narda 766-10	7802A
i00069 Bird 8329 (30 dB)	1006
i00113 Sierra 661A-3D	1059
<u>(3) FILTERS; NOTCH, HP, LP, BP</u>	
i00126 Eagle TNF-1	100-250
i00125 Eagle TNF-1	50-60
i00124 Eagle TNF-1	250-850
<u>(4) SPECTRUM ANALYZER</u>	
i00048 HP 8566B	2511A01467
i00029 HP 8563E	3213A00104

PAGE NO.

11 of 32.

NAME OF TEST: Unwanted Emissions (Transmitter Conducted)
g99c0174: 1999-Dec-08 Wed 12:01:00
STATE: 1:Low Power

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	LEVEL, dBm	LEVEL, dBc	MARGIN, dB
29.800000	59.660000	-27.9	-57.9	-14.9
33.500000	67.004000	-33.8	-63.8	-20.8
36.900000	73.788000	-45.5	-75.5	-32.5
29.800000	89.416000	-30.7	-60.7	-17.7
33.500000	100.497000	-36.4	-66.4	-23.4
36.900000	110.708000	-42.9	-72.9	-29.9
29.800000	119.217000	-49.3	-79.3	-36.3
33.500000	134.003000	-54.3	-84.3	-41.3
36.900000	147.776000	-54.5	-84.5	-41.5
29.800000	149.468000	-54.7	-84.7	-41.7
33.500000	167.740000	-54.4	-84.4	-41.4
29.800000	179.150000	-55	-85	-42
36.900000	184.973000	-53.7	-83.7	-40.7
33.500000	200.516000	-55.1	-85.1	-42.1
29.800000	208.514000	-55	-85	-42
36.900000	221.559000	-53.7	-83.7	-40.7
33.500000	234.194000	-53.7	-83.7	-40.7
29.800000	238.533000	-54.8	-84.8	-41.8
36.900000	258.207000	-54.9	-84.9	-41.9
29.800000	267.791000	-54.7	-84.7	-41.7
33.500000	268.034000	-54.2	-84.2	-41.2
36.900000	295.435000	-54.1	-84.1	-41.1
29.800000	298.194000	-54	-84	-41
33.500000	301.053000	-54.7	-84.7	-41.7
29.800000	328.037000	-54.9	-84.9	-41.9
36.900000	332.349000	-54.7	-84.7	-41.7
33.500000	335.304000	-55	-85	-42
29.800000	357.163000	-54.3	-84.3	-41.3
36.900000	368.592000	-54.9	-84.9	-41.9
33.500000	368.981000	-54.5	-84.5	-41.5
29.800000	387.668000	-54.7	-84.7	-41.7
33.500000	401.857000	-54.6	-84.6	-41.6
36.900000	405.742000	-55.4	-85.4	-42.4
29.800000	417.026000	-54.3	-84.3	-41.3
33.500000	435.223000	-55.2	-85.2	-42.2
36.900000	442.419000	-54	-84	-41
29.800000	447.278000	-53	-83	-40
33.500000	469.333000	-53.8	-83.8	-40.8
36.900000	479.851000	-54.5	-84.5	-41.5
33.500000	502.711000	-53.5	-83.5	-40.5
36.900000	516.684000	-53.3	-83.3	-40.3
36.900000	553.228000	-54.2	-84.2	-41.2


NAME OF TEST: Unwanted Emissions (Transmitter Conducted)
 g99c0173: 1999-Dec-08 Wed 11:51:00
 STATE: 2:High Power

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	LEVEL, dBm	LEVEL, dBc	MARGIN, dB
29.800000	59.612000	-24.2	-61.9	-11.2
33.500000	67.018000	-41.7	-79.4	-28.7
36.900000	73.788000	-38.4	-76.1	-25.4
29.800000	89.418000	-22.4	-60.1	-9.4
33.500000	100.513000	-29.4	-67.1	-16.4
36.900000	110.714000	-36.4	-74.1	-23.4
29.800000	119.234000	-42	-79.7	-29
33.500000	134.017000	-43.6	-81.3	-30.6
36.900000	147.639000	-44.5	-82.2	-31.5
29.800000	148.604000	-44.8	-82.5	-31.8
33.500000	167.201000	-44.5	-82.2	-31.5
29.800000	178.549000	-44.7	-82.4	-31.7
36.900000	184.179000	-44.2	-81.9	-31.2
33.500000	200.770000	-44.4	-82.1	-31.4
29.800000	208.715000	-44.7	-82.4	-31.7
36.900000	221.798000	-44.3	-82	-31.3
33.500000	234.686000	-43.6	-81.3	-30.6
29.800000	238.123000	-44.1	-81.8	-31.1
36.900000	258.610000	-44.4	-82.1	-31.4
33.500000	267.898000	-44.7	-82.4	-31.7
29.800000	268.300000	-44.1	-81.8	-31.1
36.900000	295.149000	-44.1	-81.8	-31.1
29.800000	297.757000	-44.4	-82.1	-31.4
33.500000	301.125000	-44.6	-82.3	-31.6
29.800000	328.022000	-44.5	-82.2	-31.5
36.900000	332.402000	-43.6	-81.3	-30.6
33.500000	334.657000	-41.8	-79.5	-28.8
29.800000	357.955000	-44	-81.7	-31
33.500000	368.848000	-44.7	-82.4	-31.7
36.900000	369.339000	-44.6	-82.3	-31.6
29.800000	387.321000	-44.8	-82.5	-31.8
33.500000	401.682000	-44.1	-81.8	-31.1
36.900000	406.287000	-43.2	-80.9	-30.2
29.800000	417.198000	-44.4	-82.1	-31.4
33.500000	435.418000	-45.4	-83.1	-32.4
36.900000	442.660000	-44.8	-82.5	-31.8
29.800000	446.616000	-44.6	-82.3	-31.6
33.500000	468.993000	-44.2	-81.9	-31.2
36.900000	479.884000	-44.4	-82.1	-31.4
33.500000	502.740000	-45.6	-83.3	-32.6
36.900000	516.529000	-44.4	-82.1	-31.4
36.900000	553.332000	-44.1	-81.8	-31.1

PAGE NO. 13 of 32.
NAME OF TEST: Field Strength of Spurious Radiation
SPECIFICATION: 47 CFR 2.1053(a)
GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.12
TEST EQUIPMENT: As per attached page

MEASUREMENT PROCEDURE

1. A description of the measurement facilities was filed with the FCC and was found to be in compliance with the requirements of Section 2.948, by letter from the FCC dated March 3, 1997, FILE 31040/SIT. All pertinent changes will be reported to the Commission by up-date prior to March 2000.
2. At first, in order to locate all spurious frequencies and approximate amplitudes, and to determine proper equipment functioning, the test sample was set up at a distance of three meters from the test instrument. Valid spurious signals were determined by switching the power on and off.
3. In the field, the test sample was placed on a wooden turntable above ground at three (or thirty) meters away from the search antenna. Excess power leads were coiled near the power supply. The cables were oriented in order to obtain the maximum response. At each emission frequency, the turntable was rotated and the search antennas were raised and lowered vertically.
4. The emission was observed with both a vertically polarized and a horizontally polarized search antenna and the worst case was used.
6. The field strength of each emission within 20 dB of the limit was recorded and corrected with the appropriate cable and transducer factors.
7. The worst case for all channels is shown.
8. Measurement results: ATTACHED FOR WORST CASE

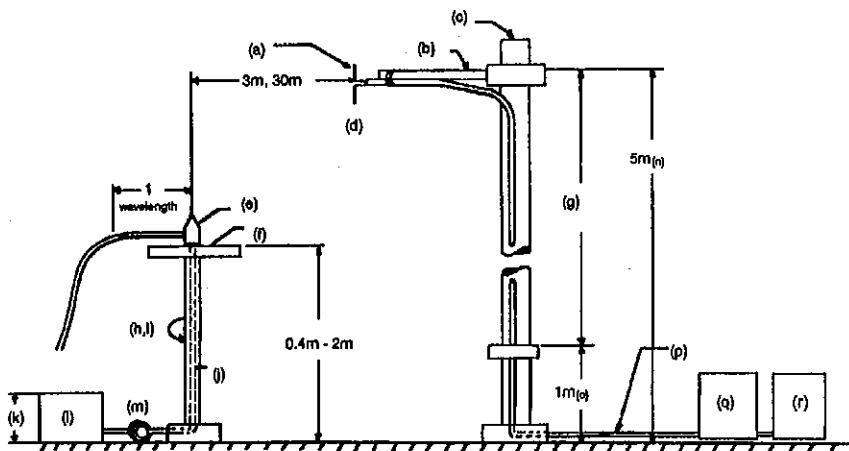RADIATED TEST SETUP

NOTES:

- (a) Search Antenna - Rotatable on boom
- (b) Non-metallic boom
- (c) Non-metallic mast
- (d) Adjustable horizontally
- (e) Equipment Under Test
- (f) Turntable
- (g) Boom adjustable in height.
- (h) External control cables routed horizontally at least one wavelength.
- (i) Rotatable
- (j) Cables routed through hollow turntable center
- (k) 30 cm or less
- (l) External power source
- (m) 10 cm diameter coil of excess cable
- (n) 25 cm (V), 1 m-7 m (V, H)
- (o) 25 cm from bottom end of 'V', 1m normally
- (p) Calibrated Cable at least 10m in length
- (q) Amplifier (optional)
- (r) Spectrum Analyzer

Asset Description (as applicable)	s/n	Cycle	Last Cal
--------------------------------------	-----	-------	----------

Per ANSI C63.4-1992, 10.1.4

TRANSDUCER

i00088	EMCO 3109-B 25MHz-300MHz	2336	12 mo.	Sep-99
i00065	EMCO 3301-B Active Monopole	2635	12 mo.	Sep-99
i00089	Aprel 2001 200MHz-1GHz	001500	12 mo.	Sep-99
i00103	EMCO 3115 1GHz-18GHz	9208-3925	12 mo.	Sep-99

AMPLIFIER

i00028	HP 8449A	2749A00121	12 mo.	Mar-99
--------	----------	------------	--------	--------

SPECTRUM ANALYZER

i00029	HP 8563E	3213A00104	12 mo.	Aug-99
i00033	HP 85462A	3625A00357	12 mo.	May-99
i00048	HP 8566B	2511AD1467	6 mo.	May-99

PAGE NO.

15 of 32.

NAME OF TEST: Field Strength of Spurious Radiation

g99b0352: 1999-Nov-09 Tue 10:01:00

STATE: 2:High Power

FREQUENCY TUNED, MHz	FREQUENCY EMISSION, MHz	METER, dBuV	CF, dB	ERP, dBm	MARGIN, dB
33.500000	66.999300	48.91	0.59	-47.9	-17.4
33.500000	100.499800	27.28	1.96	-68.1	-37.7
33.500000	134.000600	9.1	-7.76	-96	-65.6
33.500000	167.500600	6.72	5.16	-85.5	-55
33.500000	201.000600	5.87	7.15	-84.4	-53.9
33.500000	234.500600	3.3	8.73	-85.3	-54.9
33.500000	268.000600	5.64	13.25	-78.5	-48
33.500000	301.500600	12.47	7.8	-77.1	-46.6
33.500000	335.000600	9.58	9.85	-77.9	-47.5

PAGE NO. 16 of 32.

NAME OF TEST: Emission Masks (Occupied Bandwidth)

SPECIFICATION: 47 CFR 2.1049(c)(1)

GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.11

TEST EQUIPMENT: As per previous page


MEASUREMENT PROCEDURE

1. The EUT and test equipment were set up as shown on the following page, with the Spectrum Analyzer connected.
2. For EUTs supporting audio modulation, the audio signal generator was adjusted to the frequency of maximum response and with output level set for ± 2.5 kHz deviation (or 50% modulation). With level constant, the signal level was increased 16 dB.
3. For EUTs supporting digital modulation, the digital modulation mode was operated to its maximum extent.
4. The Occupied Bandwidth was measured with the Spectrum Analyzer controls set as shown on the test results.
5. MEASUREMENT RESULTS: ATTACHED

PAGE NO.:

17 of 32.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
g99c0167: 1999-Dec-08 Wed 10:50:00
STATE: 1:Low Power

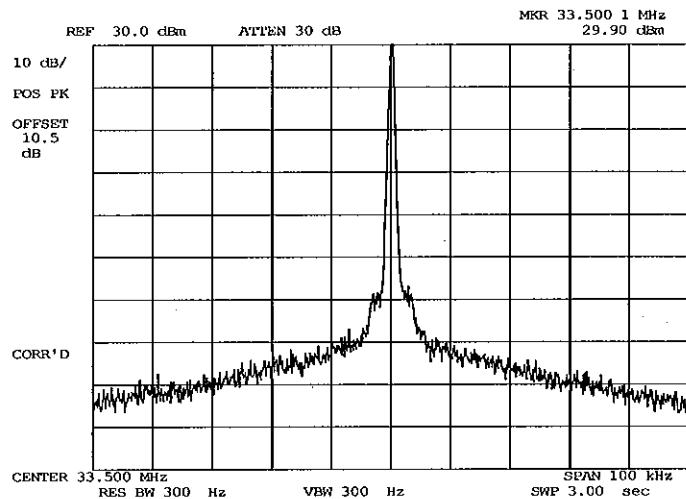

POWER:

LOW

MODULATION:

NONE

SUPERVISED BY:


M. Flom, P. Eng.

Morton Flom, P. Eng.

PAGE NO.

18 of 32.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
g99c0169: 1999-Dec-08 Wed 10:52:00
STATE: 1:Low Power

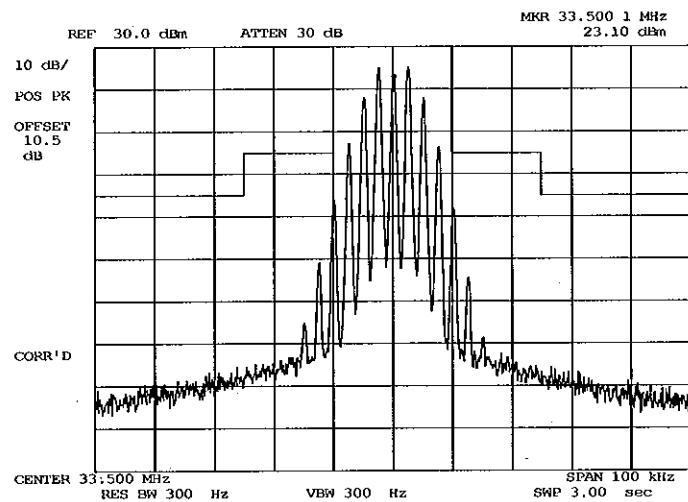

POWER:
MODULATION:

LOW
VOICE: 2500 Hz SINE WAVE
MASK: B, VHF/UHF 25kHz,
w/LPF


SUPERVISED BY:


Morton Flom, P. Eng.

PAGE NO.

19 of 32.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
g99c0166: 1999-Dec-08 Wed 10:47:00
STATE: 2:High Power

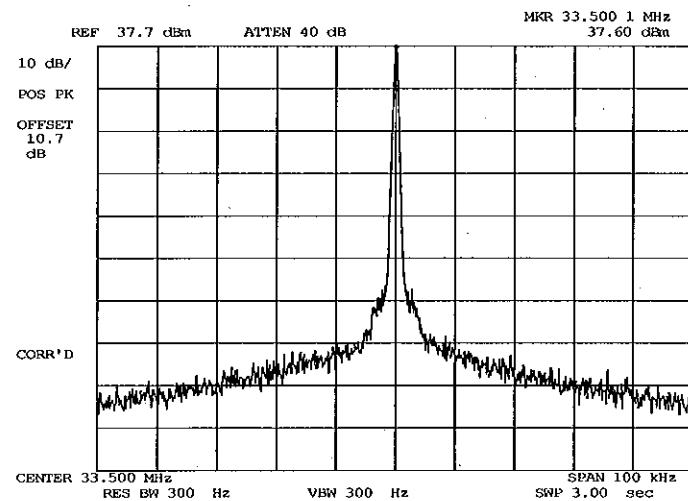

POWER: HIGH
MODULATION: NONE

SUPERVISED BY:


M. Flom, P. Eng.

Morton Flom, P. Eng.

PAGE NO.

20 of 32.

NAME OF TEST: Emission Masks (Occupied Bandwidth)
g99c0171: 1999-Dec-08 Wed 11:42:00
STATE: 2:High Power

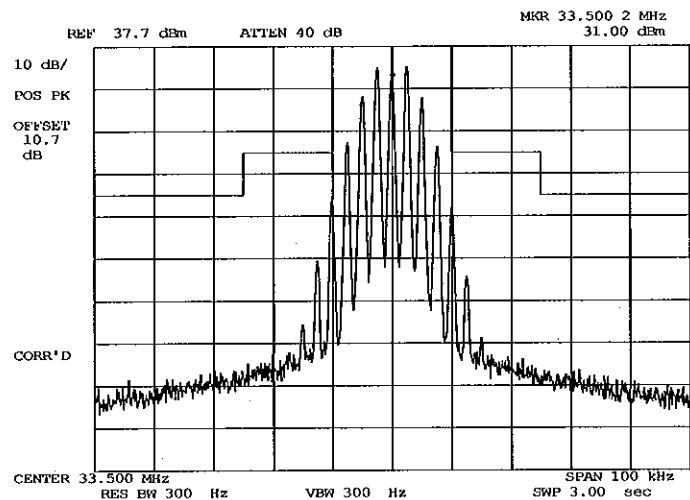

POWER:
MODULATION:

HIGH
VOICE: 2500 Hz SINE WAVE
MASK: B, VHF/UHF 25kHz,
w/LPF

SUPERVISED BY:


Morton Flom, P. Eng.

PAGE NO.

21 of 32.

NAME OF TEST:

Audio Low Pass Filter (Voice Input)

SPECIFICATION:

47 CFR 2.1047(a)

GUIDE:

ANSI/TIA/EIA-603-1992, Paragraph 2.2.15

TEST EQUIPMENT:


As per attached page

MEASUREMENT PROCEDURE

1. The EUT and test equipment were set up such that the audio input was connected at the input to the modulation limiter, and the modulated stage.
2. The audio output was connected at the output to the modulated stage.
3. MEASUREMENT RESULTS: ATTACHED

TRANSMITTER TEST SET-UP

- TEST A. MODULATION CAPABILITY/DISTORTION
- TEST B. AUDIO FREQUENCY RESPONSE
- TEST C. HUM AND NOISE LEVEL
- TEST D. RESPONSE OF LOW PASS FILTER
- TEST E. MODULATION LIMITING

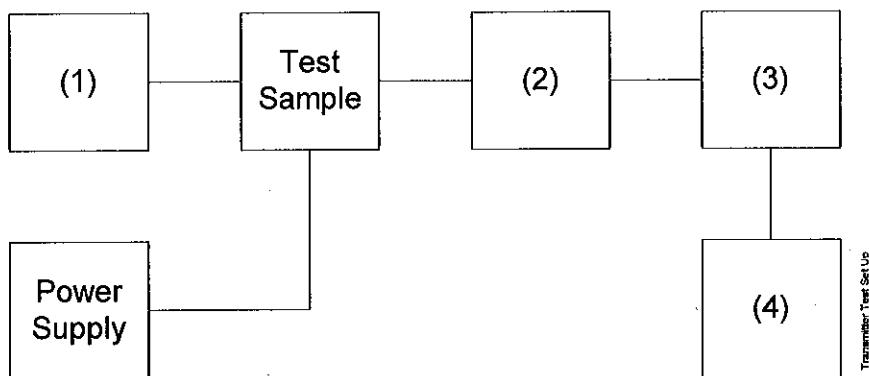


Asset Description (as applicable)	s/n
(1) <u>Audio Oscillator</u>	
i00010 HP 204D	1105A04683
i00017 HP 8903A	2216A01753
i00118 HP 33120A	US36002064
(2) <u>COAXIAL ATTENUATOR</u>	
i00122 NARDA 766-10	7802
i00123 NARDA 766-10	7802A
i00113 SIERRA 661A-3D	1059
i00069 BIRD 8329 (30 dB)	10066
(3) <u>MODULATION ANALYZER</u>	
i00020 HP 8901A	2105A01087
(4) <u>AUDIO ANALYZER</u>	
i00017 HP 8903A	2216A01753

PAGE NO.

23 of 32.

NAME OF TEST: Audio Low Pass Filter (Voice Input)
g99b0350: 1999-Nov-18 Thu 09:03:00
STATE: 0:General

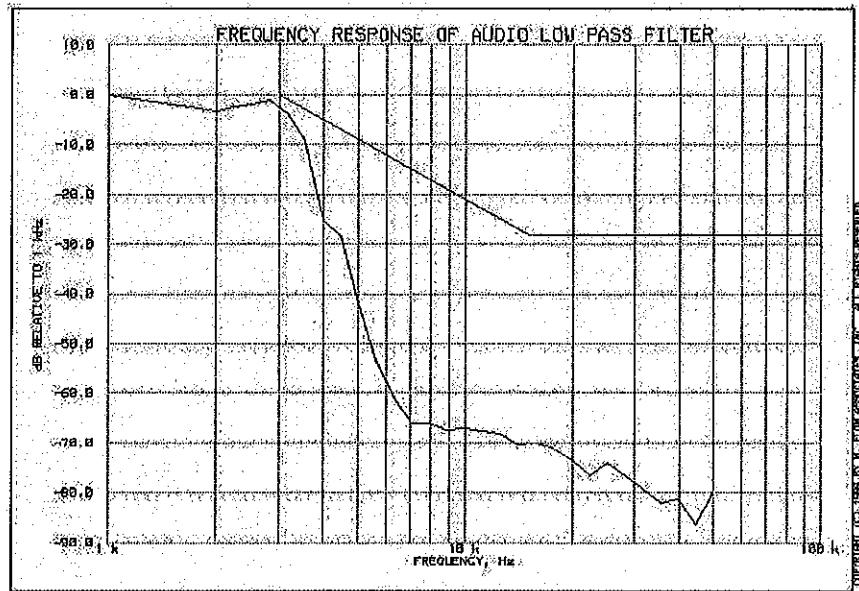

SUPERVISED BY:


Morton Flom, P. Eng.

PAGE NO. 24 of 32.

NAME OF TEST: Audio Frequency Response

SPECIFICATION: 47 CFR 2.1047(a)

GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.6

TEST EQUIPMENT: As per previous page


MEASUREMENT PROCEDURE

1. The EUT and test equipment were set up as shown on the following page.
2. The audio signal generator was connected to the audio input circuit/microphone of the EUT.
3. The audio signal input was adjusted to obtain 20% modulation at 1 kHz, and this point was taken as the 0 dB reference level.
4. With input levels held constant and below limiting at all frequencies, the audio signal generator was varied from 100 Hz to 50 kHz.
5. The response in dB relative to 1 kHz was then measured, using the HP 8901A Modulation Analyzer.
6. MEASUREMENT RESULTS: ATTACHED

PAGE NO.

25 of 32.

NAME OF TEST: Audio Frequency Response
g99b0348: 1999-Nov-18 Thu 08:59:00
STATE: 0:General

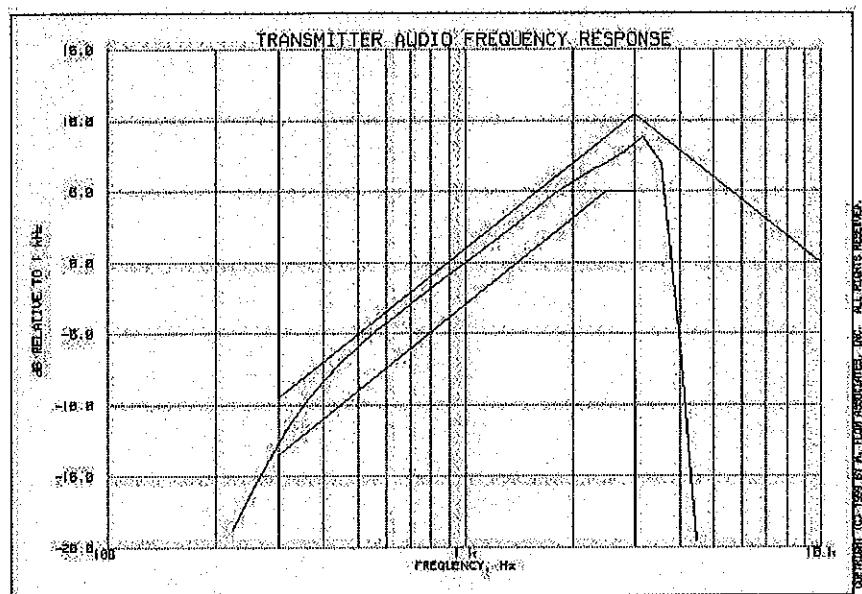

Frequency of Maximum Audio Response, Hz = 3160

Additional points:

FREQUENCY, Hz	LEVEL, dB
300	-12.71
20000	-33.62
30000	-33.18
50000	-33.91

SUPERVISED BY:


Morton Flom, P. Eng.

PAGE NO.

26 of 32.

NAME OF TEST:

Modulation Limiting

SPECIFICATION:

47 CFR 2.1047(b)

GUIDE:

ANSI/TIA/EIA-603-1992, Paragraph 2.2.3

TEST EQUIPMENT:

As per previous page

MEASUREMENT PROCEDURE

1. The signal generator was connected to the input of the EUT as for "Frequency Response of the Modulating Circuit."
2. The modulation response was measured for each of three frequencies (one of which was the frequency of maximum response), and the input voltage was varied and was observed on an HP 8901A Modulation Analyzer.
3. The input level was varied from 30% modulation (± 1.5 kHz deviation) to at least 20 dB higher than the saturation point.
4. Measurements were performed for both negative and positive modulation and the respective results were recorded.


5. MEASUREMENT RESULTS: ATTACHED

PAGE NO.


27 of 32.

NAME OF TEST: Modulation Limiting
g99b0351: 1999-Nov-18 Thu 09:07:00
STATE: 0:General

Positive
Peaks:

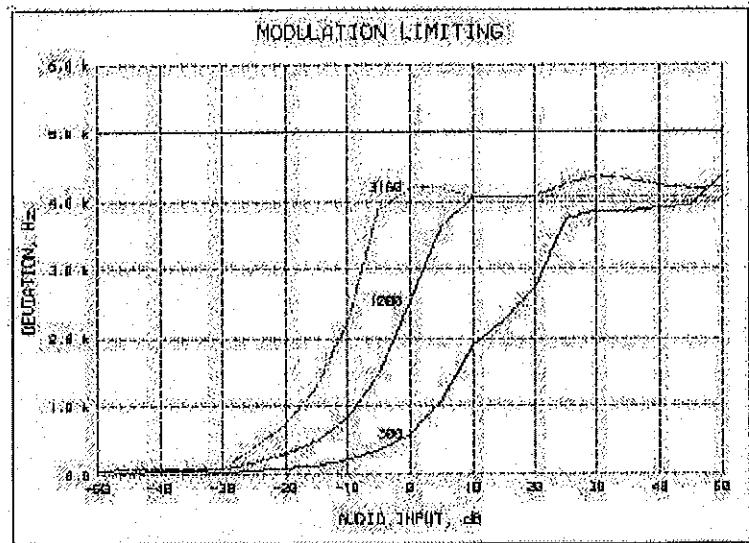

Negative
Peaks:

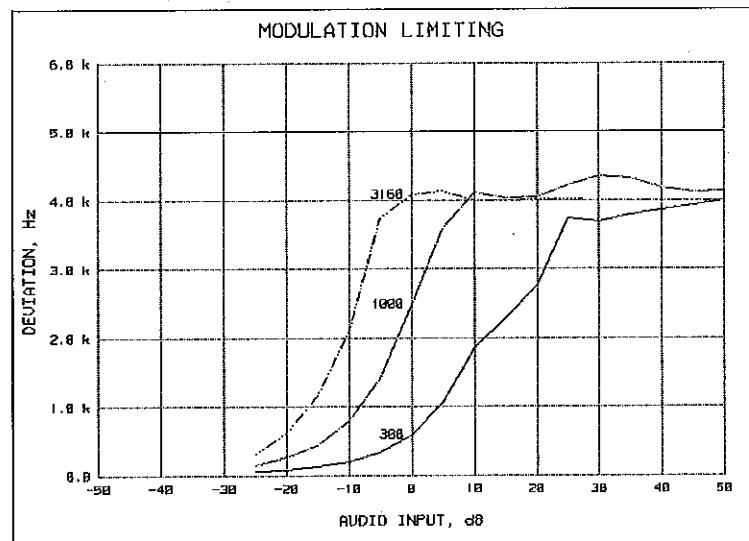

M. Flom, P. Eng.

SUPERVISED BY:

Morton Flom, P. Eng.

PAGE NO. 28 of 32.

NAME OF TEST: Frequency Stability (Temperature Variation)

SPECIFICATION: 47 CFR 2.1055(a)(1)

GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.2

TEST CONDITIONS: As Indicated


TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE

1. The EUT and test equipment were set up as shown on the following page.
2. With all power removed, the temperature was decreased to -30°C and permitted to stabilize for three hours. Power was applied and the maximum change in frequency was noted within one minute.
3. With power OFF, the temperature was raised in 10°C steps. The sample was permitted to stabilize at each step for at least one-half hour. Power was applied and the maximum frequency change was noted within one minute.
4. The temperature tests were performed for the worst case.
5. MEASUREMENT RESULTS: ATTACHED

TRANSMITTER TEST SET-UP

TEST A. OPERATIONAL STABILITY
 TEST B. CARRIER FREQUENCY STABILITY
 TEST C. OPERATIONAL PERFORMANCE STABILITY
 TEST D. HUMIDITY
 TEST E. VIBRATION
 TEST F. ENVIRONMENTAL TEMPERATURE
 TEST G. FREQUENCY STABILITY: TEMPERATURE VARIATION
 TEST H. FREQUENCY STABILITY: VOLTAGE VARIATION

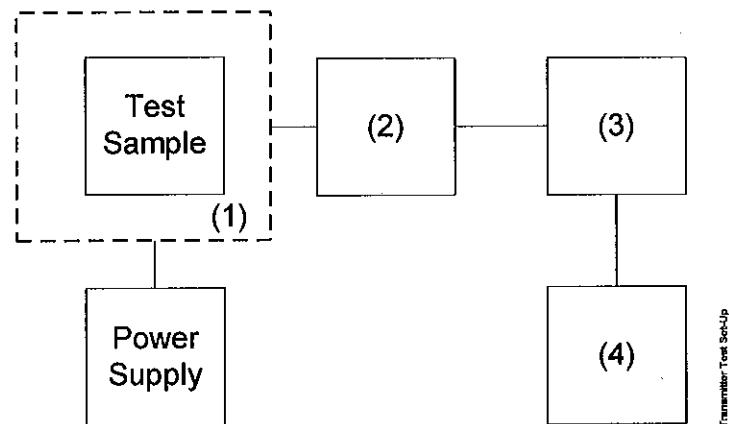


Asset	Description (as applicable)	s/n
(1)	<u>TEMPERATURE, HUMIDITY, VIBRATION</u>	
i00027	Tenny Temp. Chamber	9083-765-234
i00	Weber Humidity Chamber	
i00	L.A.B. RVH 18-100	
(2)	<u>COAXIAL ATTENUATOR</u>	
i00122	NARDA 766-10	7802
i00123	NARDA 766-10	7802A
i00113	SIERRA 661A-3D	1059
i00069	BIRD 8329 (30 dB)	10066
(3)	<u>R.F. POWER</u>	
i00014	HP 435A POWER METER	1733A05839
i00039	HP 436A POWER METER	2709A26776
i00020	HP 8901A POWER MODE	2105A01087
(4)	<u>FREQUENCY COUNTER</u>	
i00042	HP 5383A	1628A00959
i00019	HP 5334B	2704A00347
i00020	HP 8901A	2105A01087

PAGE NO.

30 of 32.

NAME OF TEST: Frequency Stability (Temperature Variation)
g99c0165: 1999-Dec-08 Wed 14:55:00
STATE: 0:General

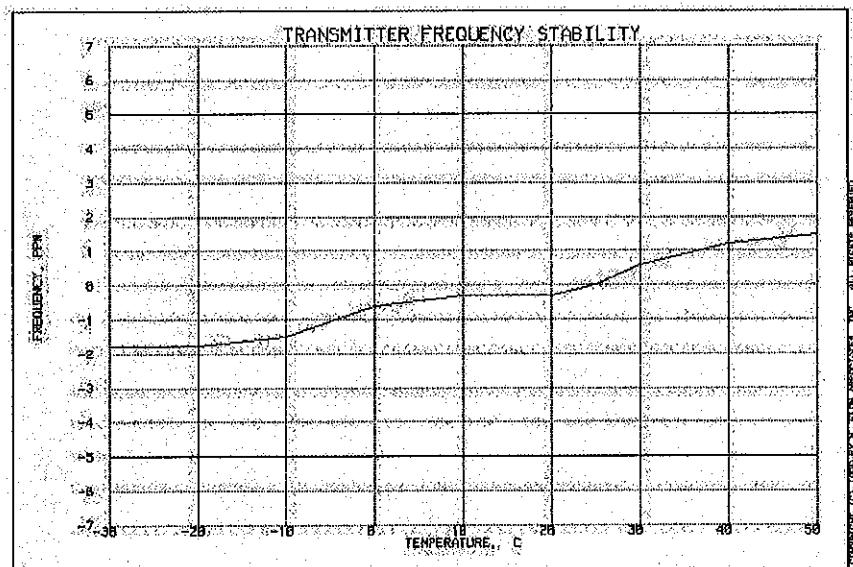

SUPERVISED BY:


Morton Flom, P. Eng.

PAGE NO. 31 of 32.
NAME OF TEST: Frequency Stability (Voltage Variation)
SPECIFICATION: 47 CFR 2.1055(b) (1)
GUIDE: ANSI/TIA/EIA-603-1992, Paragraph 2.2.2
TEST EQUIPMENT: As per previous page

MEASUREMENT PROCEDURE

1. The EUT was placed in a temperature chamber at $25\pm 5^{\circ}\text{C}$ and connected as for "Frequency Stability - Temperature Variation" test.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.

RESULTS: Frequency Stability (Voltage Variation)
g99b0355: 1999-Nov-18 Thu 09:14:34
STATE: 0:General

LIMIT, ppm = 5
LIMIT, Hz = 168
BATTERY END POINT (Voltage) = 6.5

% of STV	Voltage	Frequency, MHz	Change, Hz	Change, ppm
85	6.37	33.500000	0	0.00
100	7.5	33.500000	0	0.00
115	8.62	33.500000	0	0.00
87	6.5	33.500000	0	0.00

SUPERVISED BY:


Morton Flom, P. Eng.

PAGE NO. 32 of 32.

NAME OF TEST: Necessary Bandwidth and Emission Bandwidth

SPECIFICATION: 47 CFR 2.202(g)

MODULATION = 16K0F3E

NECESSARY BANDWIDTH CALCULATION:

MAXIMUM MODULATION (M), kHz	= 3
MAXIMUM DEVIATION (D), kHz	= 5
CONSTANT FACTOR (K)	= 1
NECESSARY BANDWIDTH (B _N), kHz	= (2 x M) + (2 x D x K)
	= 16.0

SUPERVISED BY:



Morton Flom, P. Eng.

TESTIMONIAL
AND
STATEMENT OF CERTIFICATION

THIS IS TO CERTIFY THAT:

1. THAT the application was prepared either by, or under the direct supervision of, the undersigned.
2. THAT the technical data supplied with the application was taken under my direction and supervision.
3. THAT the data was obtained on representative units, randomly selected.
4. THAT, to the best of my knowledge and belief, the facts set forth in the application and accompanying technical data are true and correct.

CERTIFYING ENGINEER:



Morton Flom, P. Eng.