





Issued to

Goodbetterbest Limited

For

EX-05 MILITARY STYLE HEADSET CRISP&DEEP WIRED STEREO HEADPHONES

Model Name:

EX5XB3-11

Trade Name:

N/A

FCC ID:

VS9-5X11

Brand Name:

Gioteck

Standard:

47 CFR Part 15 Subpart B

Test date:

October 30, 2011 - November 8, 2011

Issue date:

November 30, 2011


Shenzhen Morlab ogy Co., Ltd.

Tested by Xiao Xiong

Xiao Xiong

Date >011. 11.30

Date



IEEE 1725















The report refers only to the sample tested and does not apply to the bulk. This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen MORLAB Communication Technology Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the Shenzhen MORLAB Telecommunication Co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen MORLAB Telecommunication Co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report. In the event of the improper use of the report, Shenzhen MORLAB Telecommunication Co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.






	TABLE OF CONTENTS				
1.	GENERAL INFORMATION				
1.1	EUT Description	3			
1.2	Test Standards and Results	4			
1.3	Facilities and Accreditations	5			
1.3.1	Facilities	5			
1.3.2	Test Environment Conditions	5			
1.3.3	Measurement Uncertainty	5			
2.	TEST CONDITIONS SETTING	6			
2.1	Test Mode	6			
2.2	Test Setup and Equipments List	7			
2.2.1	Radiated Emission.	7			
3.	47 CFR PART 15B REQUIREMENTS	9			
3.1	Radiated Emission	9			
3.1.1	Requirement	9			
3.1.2	Test Description	9			
3.1.3	Test Result	10			
ANN	EX A PHOTOS OF THE EUT	12			
ANN	EX B PHOTOS OF TEST SETUP	17			

Change History				
Issue Date Reason for change				
1.0 November 30, 2011		First edition		



1. GENERAL INFORMATION

1.1 EUT Description

EUT Type..... Headset

Serial No. (n.a., marked #1 by test site)

Hardware Version N/A Software Version N/A

Applicant...... Goodbetterbest Limited

Suites 103-107 Devonshire Business Centre Works Road Letchworth

Herts SG6 1GJ United Kingdom

Manufacturer Goodbetterbest Limited

Suites 103-107 Devonshire Business Centre Works Road Letchworth

Herts SG6 1GJ United Kingdom

NOTE:

1. The EUT is a Headset. During the test, the EUT was connected with a XBOX 360 and a TV, and it's was working normally.

2. For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.



1.2 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart B:

No.	Identity	Document Title	
1	47 CFR Part 15	Radio Frequency Devices	
	(10-1-09 Edition)		

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Result
2	15.109	Radiated Emission	PASS

NOTE: The tests were performed according to the method of measurements prescribed in ANSI C63.4 2009.



1.3 Facilities and Accreditations

1.3.1 Facilities

Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L3572.

All measurement facilities used to collect the measurement data are located at 3/F, Electronic Testing Building, Shahe Road, Xili, Nanshan District, Shenzhen, 518055 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22; the FCC registration number is 741109.

1.3.2 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 - 60
Atmospheric Pressure (kPa):	86 -106

1.3.3 Measurement Uncertainty

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO.

Uncertainty of Conducted Emission:	±1.8dB
Uncertainty of Radiated Emission:	±3.1dB






2. TEST CONDITIONS SETTING

2.1 Test Mode

During the measurement, The EUT was working normally, its configuration of the emission tests is $\underline{EUT + XBOX + TV}$.

The EUT was connected with the XBOX via the USB connector and the RCA pass through connectors. Through the AV cable supplied with XBOX 360 console, the XBOX was connected with a TV. The figure as follow:

In addition, there was a Microphone which was connected with the EUT via the XBOX Live Chat Input port .

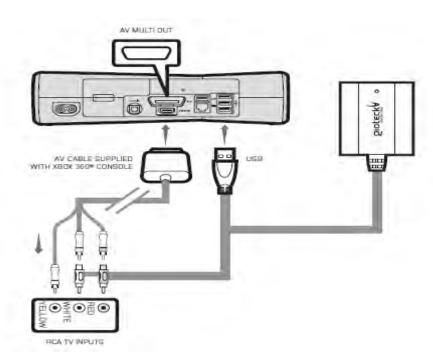




2.2 Test Setup and Equipments List

2.2.1 Radiated Emission

A. Test Procedure

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz.For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3m meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

B. Test Setup:

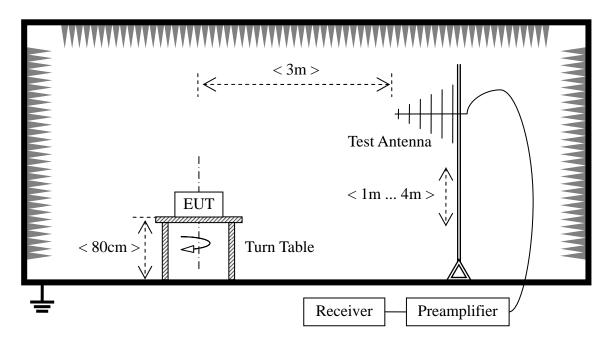

The test is performed in a 3m Semi-Anechoic Chamber; the antenna factor, cable loss and so on of the



site (factors) is calculated to correct the reading. The EUT is placed on a 0.8m high insulating Turn Table, and keeps 3m away from the Test Antenna, which is mounted on a variable-height antenna master tower.

C. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal.
				Date
Receiver	Agilent	E7405A	US44210471	2011.05
Semi-Anechoic Chamber	Albatross	9m*6m*6m	(n.a.)	2011.05
Test Antenna - Bi-Log	Schwarzbeck	VULB 9163	9163-274	2011.05
Test Antenna - Horn	Schwarzbeck	BBHA 9120C	9120C-384	2011.05
Test Antenna - Monopole	Schwarzbeck	VAMP 9243	9243236	2011.05
Personal Computer	IBM	IBM_T20	(n.a)	(n.a.)

3. 47 CFR PART 15B REQUIREMENTS

3.1 Radiated Emission

3.1.1 Requirement

According to FCC section 15.109, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency Field Strength		Field Strength Limitation at 3m Measurement Dist		
range (MHz)	$\mu V/m$	Dist	(uV/m)	(dBuV/m)
0.009 - 0.490	2400/F(KHz)	300m	10000* 2400/F(KHz)	20log 2400/F(KHz) + 80
0.490 - 1.705	2400/F(KHz)	30m	100* 2400/F(KHz)	20log 2400/F(KHz) + 40
1.705 - 30.00	30	30m	100*30	20log 30 + 40
30.0 - 88.0	100	3m	100	20log 100
88.0 - 216.0	150	3m	150	20log 150
216.0 - 960.0	200	3m	200	20log 200
Above 960.0	500	3m	500	20log 500

As shown in FCC section 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector. When average radiated emission measurements are specified in this part, including emission measurements below 1000MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

Note:

- 1) The tighter limit shall apply at the boundary between two frequency range.
- 2) Limitation expressed in dBuV/m is calculated by 20log Emission Level(uV/m).
- 3) If measurement is made at 3m distance, then F.S Limitation at 3m distance is adjusted by using the formula of Ld1 = Ld2 * $(d2/d1)^2$.

Example:

F.S Limit at 30m distance is 30uV/m, then F.S Limitation at 3m distance is adjusted as $Ld1 = L1 = 30uV/m * (10)^2 = 100 * 30uV/m$

3.1.2 Test Description

See section 2.2.1 of this report.




3.1.3 Test Result

The maximum radiated emission is searched using PK, QP and AV detectors; the emission levels more than the limits, and that have narrow margins from the limits will be re-measured with AV and QP detectors. Both the vertical and the horizontal polarizations of the Test Antenna are considered to perform the tests. All test modes are considered, refer to recorded points and plots below.

3.1.3.1 Test Mode


A. Test Plots and Suspicious Points:

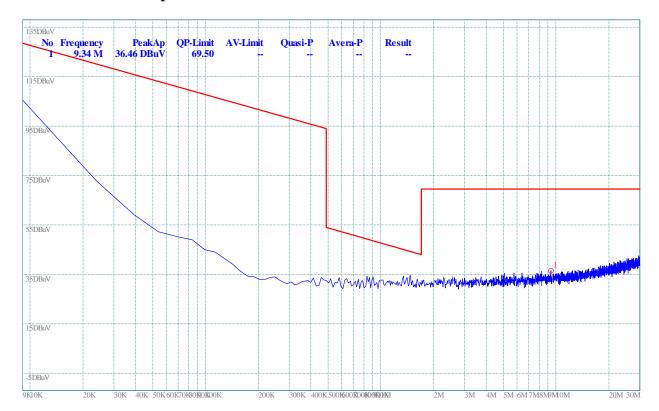

(Plot A: 9K - 30M)






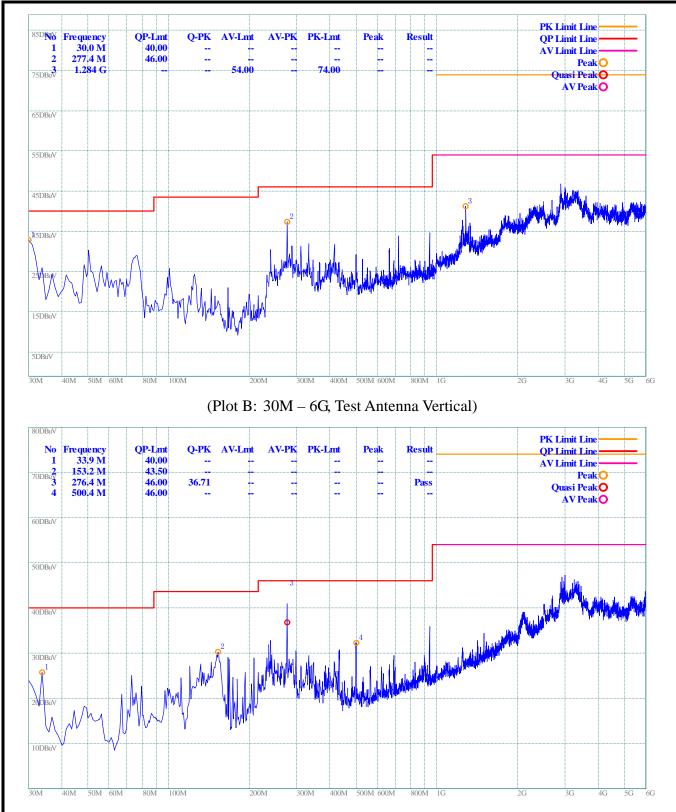

(Plot C: 30M – 6G, Test Antenna Horizontal)

Test Result:PASS






ANNEX A Photos of the EUT

1. Appearance of the EUT:





















2. Inside of the EUT:



















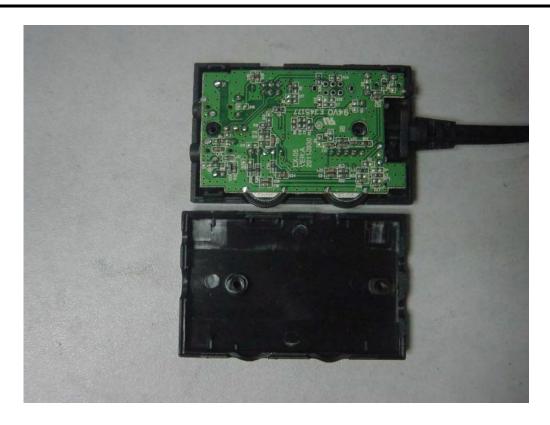

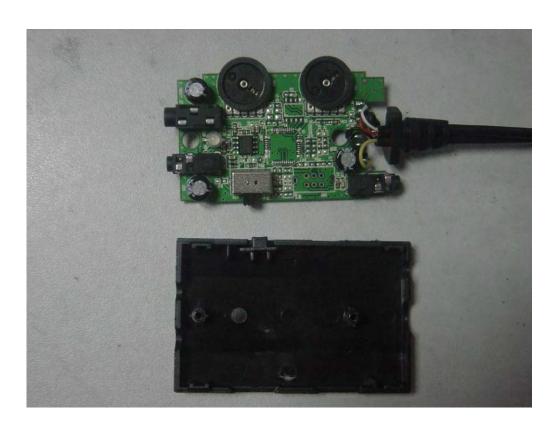





ANNEX B Photos of Test Setup

1. Radiated Field Strength Measurement



** END OF REPORT **