

FCC TEST REPORT

(Part 15, Subpart E)



Applicant:	Juniper Systems, Inc.
Address:	1132 W 1700 N Logan, UT 84321 USA

Manufacturer or Supplier:	Juniper Systems, Inc.
Address:	1132 W 1700 N Logan, UT 84321 USA
Product:	Archer4
Brand Name:	Juniper Systems
Model Name:	AR4
FCC ID:	VSFAR4
Date of tests:	Jan. 05, 2024 ~ May. 15, 2024

The tests have been carried out according to the requirements of the following standard:

☒ **FCC Part 15, Subpart E, Section 15.407**

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Prepared by Simon Wang Engineer / Mobile Department	Approved by Luke Lu Manager / Mobile Department
 Date: May. 15, 2024	 Date: May. 15, 2024

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1 SUMMARY OF TEST RESULTS	5
1.1 MEASUREMENT UNCERTAINTY	6
2 GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 DESCRIPTION OF TEST MODES	10
2.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	13
2.3 DUTY CYCLE OF TEST SIGNAL	18
2.4 DESCRIPTION OF SUPPORT UNITS	19
2.4.1 CONFIGURATION OF SYSTEM UNDER TEST	20
2.5 GENERAL DESCRIPTION OF APPLIED STANDARDS	21
3 TEST TYPES AND RESULTS	22
3.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT	22
3.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT	22
3.1.2 LIMITS OF UNWANTED EMISSION	22
3.1.3 TEST INSTRUMENTS	23
3.1.4 TEST PROCEDURES	24
3.1.5 DEVIATION FROM TEST STANDARD	25
3.1.6 TEST SETUP	26
3.1.7 EUT OPERATING CONDITION	27
3.1.8 TEST RESULTS	28
3.2 CONDUCTED EMISSION MEASUREMENT	218
3.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	218
3.2.2 TEST INSTRUMENTS	218
3.2.3 TEST PROCEDURES	218
3.2.4 DEVIATION FROM TEST STANDARD	219
3.2.5 TEST SETUP	219
3.2.6 EUT OPERATING CONDITIONS	219
3.2.7 TEST RESULTS	220
3.3 MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT	222
3.3.1 LIMITS OF MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT	222
3.3.2 TEST SETUP	223
3.3.3 TEST INSTRUMENTS	224



3.3.4	TEST PROCEDURE	225
3.3.5	DEVIATION FROM TEST STANDARD	226
3.3.6	EUT OPERATING CONDITIONS	226
3.3.7	TEST RESULTS	227
3.4	MAXIMUM POWER SPECTRAL DENSITY MEASUREMENT	228
3.4.1	LIMITS OF MAXIMUM POWER SPECTRAL DENSITY MEASUREMENT	228
3.4.2	TEST SETUP	228
3.4.3	TEST INSTRUMENTS	228
3.4.4	TEST PROCEDURES	229
3.4.5	DEVIATION FROM TEST STANDARD	229
3.4.6	EUT OPERATING CONDITIONS	229
3.4.7	TEST RESULTS	230
3.5	AUTOMATICALLY DISCONTINUE TRANSMISSION	231
3.5.1	LIMIT OF AUTOMATICALLY DISCONTINUE TRANSMISSION	231
3.5.2	TEST INSTRUMENTS	231
3.5.3	TEST RESULT	231
3.6	ANTENNA REQUIREMENTS	232
3.6.1	STANDARD APPLICABLE	232
3.6.2	ANTENNA CONNECTED CONSTRUCTION	232
3.6.3	ANTENNA GAIN	232
4	PHOTOGRAPHS OF THE TEST CONFIGURATION	233
5	MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	234



Test Report No.: W7L-231218W001RF03

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
W7L-231218W001RF03	Original release	May. 15, 2024

1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART E		
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT
15.407(b)(9)	AC Power Conducted Emission	Compliance
15.407(b) (1/2/3/4/5)	Radiated Emission & Band Edge Measurement	Compliance
15.407(a/1/2/3)	Maximum conducted output Power	Compliance
15.407(a/1/2/3)	Peak Power Spectral Density	Compliance
15.407(a)(2)(12)	26 dB Bandwidth	Compliance
15.407(e)	6 dB Bandwidth	Compliance
15.203	Antenna Requirement	Compliance

NOTE:

1. Except the data of RSE and Band Edge Measurement, other data please refer to Appendix C.
2. Preliminary Investigation scans were completed to compare Full RU Tone modes and Single User Tone modes. It was found that SU modes were the worst case over Full RU-Tone mode in every instance, and the physical waveforms of SU mode and FULL RU-Tone are the same, and both FULL RU-Tone mode have lower power than SU mode. Therefore, only SU mode was report as it is representative of Full RU-Tone worst case scenario.
3. RLAN 5G supports SISO&MIMO mode, the whole testing has assessed the MIMO mode by referring to their maximum conducted power. and the 802.11ax HE40/80/160MHz RU26T/52T/106T/242T modes are cover by the 11ax HE20MHz modes, the 802.11ax HE80/160MHz RU484T modes are cover by the 11ax HE40MHz modes, the 802.11ax HE160MHz RU996T modes are cover by the 11ax HE80MHz modes.
4. For 802.11n HT20/ ac VHT20 and 802.11n HT40 / ac VHT40 mode, the whole testing is assessed only 802.11n HT20/ HT40 by referring to their higher conducted power.
5. Only the worse data was reported.

1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	UNCERTAINTY
AC Power Conducted emissions	±2.70dB
Radiated emissions (9KHz~30MHz)	±2.68dB
Radiated emissions (30MHz~1GHz)	±4.98dB
Radiated emissions (1GHz ~6GHz)	±4.70dB
Radiated emissions (6GHz ~18GHz)	±4.60dB
Radiated emissions (18GHz ~40GHz)	±4.12dB
Conducted emissions	±4.01dB
Occupied Channel Bandwidth	±43.58KHz
Conducted Output power	±2.06dB
Power Spectral Density	±0.85 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.



2 GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Archer4
BRAND NAME	Juniper Systems
MODEL NAME	AR4
NOMINAL VOLTAGE	12Vdc(adapter or host equipment) 3.8Vdc (Li-ion, battery)
MODULATION	OFDM, OFDMA
TRANSFER RATE	802.11a: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps 802.11n: up to 300.0Mbps 802.11ac: up to 1732Mbps 802.11ax: up to 2402Mbps
OPERATING FREQUENCY	5180 ~ 5240MHz, 5260 ~ 5320MHz, 5500 ~ 5720MHz, 5745 ~ 5825MHz
NUMBER OF CHANNEL	5180 ~ 5240MHz: 4 for 802.11a, 802.11n/ac/ax (20MHz)/ 802.11ax(20M RU 26/52/106/242) 2 for 802.11n/ac/ax (40MHz)/ 802.11ax(40M RU 484) 1 for 802.11ac/ax (80MHz)/ 802.11ax(80MRU996) 1 for 802.11ac/ax (160MHz)/ 802.11ax(160MRU996) 5260 ~ 5320MHz: 4 for 802.11a, 802.11n/ac/ax (20MHz)/ 802.11ax(20M RU 26/52/106/242) 2 for 802.11n/ac/ax (40MHz)/ 802.11ax(40M RU 484) 1 for 802.11ac/ax (80MHz)/ 802.11ax(80M RU 996) 5500 ~ 5720MHz: 12 for 802.11a, 802.11n/ac/ax (20MHz)/ 802.11ax(20M RU 26/52/106/242) 6 for 802.11n/ac/ax (40MHz)/ 802.11ax(40M RU 484) 3 for 802.11ac/ax (80MHz)/ 802.11ax(80M RU 996) 1 for 802.11ac/ax (160MHz)/ 802.11ax(160MRU996) 5745 ~ 5825MHz: 5 for 802.11a, 802.11n/ac/ax (20MHz)/ 802.11ax(20M RU 26/52/106/242) 2 for 802.11n/ac/ax (40MHz)/ 802.11ax(40M RU 484) 1 for 802.11ac/ax (80MHz)/ 802.11ax(80MRU 996)



MAX. OUTPUT POWER	54.39mW for 5180 ~ 5240MHz 52.75mW for 5260 ~ 5320MHz 53.56mW for 5500 ~ 5720MHz 54.4mW for 5745 ~ 5825MHz
ANTENNA TYPE	PIFA Antenna
ANTENNA GAIN	ANT 6: -2.96dBi for 5180 ~ 5240MHz -3.77dBi for 5260 ~ 5320MHz -1.48dBi for 5500 ~ 5720MHz -1.71dBi for 5745 ~ 5825MHz ANT 8: 2.03dBi for 5180 ~ 5240MHz 1.61dBi for 5260 ~ 5320MHz 2.74dBi for 5500 ~ 5720MHz 1.77dBi for 5745 ~ 5825MHz
HW VERSION	DVT2
SW VERSION	JH_U_000.00.040.00_USERDEBUG_PCAT
I/O PORTS	Refer to user's manual
CABLE SUPPLIED	USB cable: with shielded cable, w/o ferrite core, 1.0 meter

NOTE:

- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- The EUT incorporates a MIMO function. Physically, the EUT provides two completed transmitter and two receiver.

MODULATION MODE	TX FUNCTION
802.11a	2TX/2RX
802.11n/802.11ac/ax (20MHz)	2TX/2RX
802.11n/802.11ac/ax (40MHz)	2TX/2RX
802.11ac/ax (80MHz)	2TX/2RX
802.11ax (20MHz RU 26/52/106/242)	2TX/2RX
802.11ax (40MHz RU 484)	2TX/2RX
802.11ax (80MHz RU 996)	2TX/2RX
802.11ax (160MHz RU 996)	2TX/2RX

- For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.

**Test Report No.: W7L-231218W001RF03**

4. Antenna gain and EUT conducted cable loss are provided by the customer, and the laboratory will record the results based on these items that involve these two parameters.

5. List of Accessory:

ACCESSORIES	BRAND	MANUFACTURER	MODEL	SPECIFICATION
AC Adapter	Juniper	SHENZHEN MERRYKING ELECTRONICS CO.,LTD.	MK-PQ181EX	I/P: 100-240Vac, 0.5A, O/P: 12.0Vdc, 1.5A
Battery 1	CHOLIPOW	SHENZHEN CHOLIPOWER TECHNOLOGY CO.,LTD	CLP983	Capacity: 3.8Vdc, 4500mAh
Battery 2	CHOLIPOW	SHENZHEN CHOLIPOWER TECHNOLOGY CO.,LTD	CLP984	Capacity: 3.8Vdc, 8300mAh
Battery 3	GUANGWEI	SHENZHEN GUANGWEI ELECTRONIC TECHNOLOGY CO.,LTD	GW300	Capacity: 3.7Vdc, 300mAh
USB Cable	Keli	KELI TECHNOLOGY DEVELOPMENT CO.,LTD	KLC-5243	Signal Line,1.0meter
LCD Panel	KOTL	JIN LONG MACHINERY&ELECTRONICS (Hangzhou) CO., LTD.	304-T0662A-001-A2	6.26inch TFT, 1080(H)*2280(V) resolution

2.2 DESCRIPTION OF TEST MODES

FOR 5180 ~ 5240MHz

4 channels are provided for 802.11a, 802.11n, 802.11ac/ax (20MHz)/ 802.11ax (20MHz RU 26/52/106/242):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
36	5180 MHz	44	5220 MHz
40	5200 MHz	48	5240 MHz

2 channels are provided for 802.11n, 802.11ac/ax (40MHz)/ 802.11ax (40MHz RU 484):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
38	5190 MHz	46	5230 MHz

1 channel is provided for 802.11ac/ax (80MHz)/ 802.11ax (80MHz RU 996):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
42	5210 MHz		

1 channel is provided for 802.11ac/ax (160MHz)/ 802.11ax (160MHz RU 996):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
50	5250 MHz		

FOR 5260 ~ 5320MHz

4 channels are provided for 802.11a, 802.11n, 802.11ac/ax (20MHz)/ 802.11ax (20MHz RU 26/52/106/242):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
52	5260 MHz	60	5300 MHz
56	5280 MHz	64	5320 MHz

2 channels are provided for 802.11n, 802.11ac/ax (40MHz)/ 802.11ax (40MHz RU 484):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
54	5270 MHz	62	5310 MHz

1 channel is provided for 802.11ac/ax (80MHz)/ 802.11ax (80MHz RU 996):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
58	5290 MHz		

**FOR 5500 ~ 5720MHz**

12 channels are provided for 802.11a, 802.11n, 802.11ac/ax (20MHz)/ 802.11ax (20MHz RU 26/52/106/242):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
100	5500 MHz	124	5620MHz
104	5520 MHz	128	5640MHz
108	5540 MHz	132	5660 MHz
112	5560 MHz	136	5680 MHz
116	5580 MHz	140	5700 MHz
120	5600 MHz	144	5720 MHz

6 channels are provided for 802.11n, 802.11ac/ax (40MHz)/ 802.11ax (40MHz RU 484):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
102	5510 MHz	126	5630MHz
110	5550 MHz	134	5670 MHz
118	5590 MHz	142	5710 MHz

3 channel is provided for 802.11ac/ax (80MHz)/ 802.11ax (80MHz RU 996):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
106	5530 MHz	122	5610 MHz
138	5690 MHz		

FOR 5745 ~ 5825MHz

5 channels are provided for 802.11a, 802.11n, 802.11ac/ax (20MHz)/ 802.11ax (20MHz RU 26/52/106/242):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
149	5745 MHz	161	5805 MHz
153	5765 MHz	165	5825 MHz
157	5785 MHz		

3 channels are provided for 802.11n, 802.11ac/ax (40MHz)/ 802.11ax (40MHz RU 484):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
142	5710 MHz	159	5795 MHz
151	5755 MHz		

2 channel is provided for 802.11ac/ax (80MHz)/ 802.11ax (80MHz RU 996):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
138	5690 MHz	155	5775 MHz



2.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE $\geq$ 1G	RE<1G	PLC	APCM	
A	√	√	√	-	Powered by Adapter with wifi(5G) link
B	-	-	-	√	Powered by Battery with wifi(5G) link
C	-	-	-	-	Powered by USB with wifi(5G) link

Where

RE $\geq$ 1G: Radiated Emission above 1GHz**RE<1G:** Radiated Emission below 1GHz**PLC:** Power Line Conducted Emission**APCM:** Antenna Port Conducted Measurement**NOTE:**The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **X-plane**.**NOTE:** “-” means no effect**RADIATED EMISSION TEST (BELOW 1GHz):**

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ The following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
A	802.11ax (160MHz)	5180-5240	50	50	OFDM	MCS0



RADIATED EMISSION TEST (ABOVE 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ The following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
A	802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	6.0
A	802.11n/ax (20MHz)/ 802.11ax (20MHz RU 26/52/106)		36 to 48	36, 40, 48	OFDM, OFDMA	MCS0
A	802.11n/ax (40MHz)		38 to 46	38, 46	OFDM, OFDMA	MCS0
A	802.11ac/ax (80MHz)		42	42	OFDM, OFDMA	MCS0
A	802.11ac/ax (160MHz)		50	50	OFDM, OFDMA	MCS0
A	802.11a	5260-5320	52 to 64	52, 60, 64	OFDM	6.0
A	802.11n/ax (20MHz)/ 802.11ax (20MHz RU 26/52/106)		52 to 64	52, 60, 64	OFDM, OFDMA	MCS0
A	802.11n/ax (40MHz)		54 to 62	54, 62	OFDM, OFDMA	MCS0
A	802.11ac/ax (80MHz)		58	58	OFDM, OFDMA	MCS0
A	802.11a	5500-5720	100 to 144	100, 116, 140, 144	OFDM	6.0
A	802.11n/ax (20MHz)/ 802.11ax (20MHz RU 26/52/106)		100 to 144	100, 116, 140, 144	OFDM, OFDMA	MCS0
A	802.11n/ax (40MHz)		102 to 142	102, 110, 134, 142	OFDM, OFDMA	MCS0
A	802.11ac/ax (80MHz)		106 to 138	106, 122, 138	OFDM, OFDMA	MCS0
A	802.11ac/ax (160MHz)		114	114	OFDM, OFDMA	MCS0
A	802.11a	5745-5825	149 to 165	149, 157, 165	OFDM	6.0
A	802.11n/ax (20MHz)/ 802.11ax (20MHz RU 26/52/106)		149 to 165	149, 157, 165	OFDM, OFDMA	MCS0
A	802.11n/ax (40MHz)		151 to 159	151, 159	OFDM, OFDMA	MCS0
A	802.11ac/ax (80MHz)		155	155	OFDM, OFDMA	MCS0

**POWER LINE CONDUCTED EMISSION TEST:**

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ The following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
A	802.11ac/ax (160MHz)	5180-5240	50	50	OFDM	MCS0

BANDEDGE MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ The following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
A	802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	6.0
A	802.11n/ax (20MHz)/ 802.11ax (20MHz RU 26/52/106)		36 to 48	36, 40, 48	OFDM, OFDMA	MCS0
A	802.11n/ax (40MHz)		38 to 46	38, 46	OFDM, OFDMA	MCS0
A	802.11ac/ax (80MHz)		42	42	OFDM, OFDMA	MCS0
A	802.11ac/ax (160MHz)		50	50	OFDM, OFDMA	MCS0
A	802.11a	5260-5320	52 to 64	52, 60, 64	OFDM	6.0
A	802.11n/ax (20MHz)/ 802.11ax (20MHz RU 26/52/106)		52 to 64	52, 60, 64	OFDM, OFDMA	MCS0
A	802.11n/ax (40MHz)		54 to 62	54, 62	OFDM, OFDMA	MCS0
A	802.11ac/ax (80MHz)		58	58	OFDM, OFDMA	MCS0
A	802.11a	5500-5720	100 to 144	100, 116, 140, 144	OFDM	6.0
A	802.11n/ax (20MHz)/ 802.11ax (20MHz RU 26/52/106)		100 to 144	100, 116, 140, 144	OFDM, OFDMA	MCS0
A	802.11n/ax (40MHz)		102 to 142	102, 110, 134, 142	OFDM, OFDMA	MCS0
A	802.11ac/ax (80MHz)		106 to 138	106, 122, 138	OFDM, OFDMA	MCS0
A	802.11ac/ax (160MHz)		114	114	OFDM, OFDMA	MCS0
A	802.11a	5745-5825	149 to 165	149, 157, 165	OFDM	6.0
A	802.11n/ax (20MHz)/ 802.11ax (20MHz RU 26/52/106)		149 to 165	149, 157, 165	OFDM, OFDMA	MCS0



A	802.11n/ax (40MHz)		151 to 159	151, 159	OFDM, OFDMA	MCS0
A	802.11ac/ax (80MHz)		155	155	OFDM, OFDMA	MCS0

ANTENNA PORT CONDUCTED MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ The following channel(s) was (were) selected for the final test as listed below.
- ☒ Only the power test item is tested for the FULL RU(802.11ax RU 242/484/996/2*996), the remaining test items are configured as follows.

EUT CONFIGURE MODE	MODE	FREQ. BAND (MHz)	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
A	802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	6.0
A	802.11n/ax (20MHz)/ 802.11ax (20MHz RU 26/52/106)		36 to 48	36, 40, 48	OFDM, OFDMA	MCS0
A	802.11n/ax (40MHz)		38 to 46	38, 46	OFDM, OFDMA	MCS0
A	802.11ac/ax (80MHz)		42	42	OFDM, OFDMA	MCS0
A	802.11ac/ax (160MHz)		50	50	OFDM, OFDMA	MCS0
A	802.11a	5260-5320	52 to 64	52, 60, 64	OFDM	6.0
A	802.11n/ax (20MHz)/ 802.11ax (20MHz RU 26/52/106)		52 to 64	52, 60, 64	OFDM, OFDMA	MCS0
A	802.11n/ax (40MHz)		54 to 62	54, 62	OFDM, OFDMA	MCS0
A	802.11ac/ax (80MHz)		58	58	OFDM, OFDMA	MCS0
A	802.11a	5500-5720	100 to 144	100, 116, 140, 144	OFDM	6.0
A	802.11n/ax (20MHz)/ 802.11ax (20MHz RU 26/52/106)		100 to 144	100, 116, 140, 144	OFDM, OFDMA	MCS0
A	802.11n/ax (40MHz)		102 to 142	102, 110, 134, 142	OFDM, OFDMA	MCS0
A	802.11ac/ax (80MHz)		106 to 138	106, 122, 138	OFDM, OFDMA	MCS0
A	802.11ac/ax (160MHz)		114	114	OFDM, OFDMA	MCS0
A	802.11a	5745-5825	149 to 165	149, 157, 165	OFDM	6.0
A	802.11n/ax (20MHz)/ 802.11ax (20MHz RU 26/52/106)		149 to 165	149, 157, 165	OFDM, OFDMA	MCS0
A	802.11n/ax (40MHz)		151 to 159	151, 159	OFDM, OFDMA	MCS0
A	802.11ac/ax (80MHz)		155	155	OFDM, OFDMA	MCS0



Test Report No.: W7L-231218W001RF03

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE<1G	23deg. C, 70%RH	DC 12.0V By Adapter	Jace Hu
RE≥1G	23deg. C, 70%RH	DC 12.0V By Adapter	Jace Hu
PLC	25deg. C, 52%RH	DC 12.0V By Adapter	James Fu
APCM	25deg. C, 60%RH	DC 3.8V By Battery	James Fu



Test Report No.: W7L-231218W001RF03

2.3 DUTY CYCLE OF TEST SIGNAL

Please Refer to Appendix C Of this test report.




2.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Desktop	Lenovo	M73 SFF	PC04GRQV	N/A
2	Desktop	Lenovo	M73 SFF	PC06CS27	N/A
3	Laptop	Lenovo	ThinkpadL440	R90FTFKN	N/A
4	DC source	Kikusui/JP	PMX18-5A	0000001	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	AC Line: Unshielded, Detachable 1.5m
2	AC Line: Unshielded, Detachable 1.5m
3	AC Line: Unshielded, Detachable 1.5m
4	DC Line: Unshielded, Detachable 1.0m

2.4.1 CONFIGURATION OF SYSTEM UNDER TEST

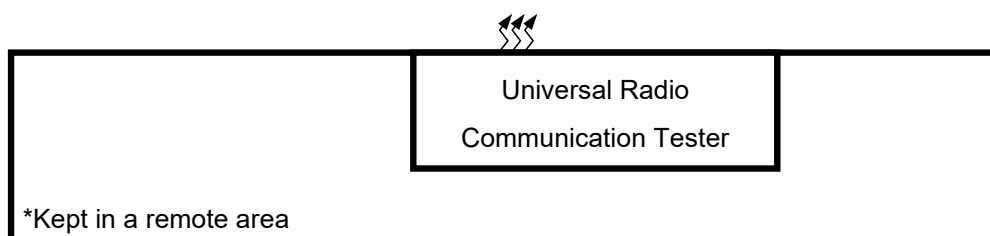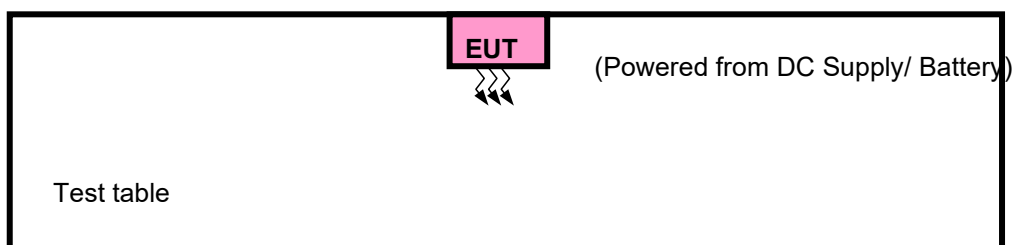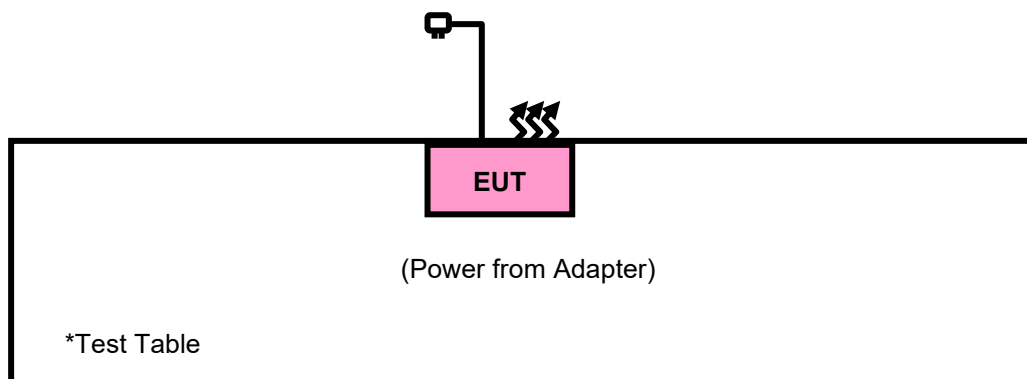

2.5 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart E (15.407)

KDB 789033 D02 General U-NII Test Procedures New Rules v02r01

ANSI C63.10-2020

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (Certification). The test report has been issued separately.

3 TEST TYPES AND RESULTS

3.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT

3.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

3.1.2 LIMITS OF UNWANTED EMISSION

RESTRICTED BANDS	APPLICABLE TO	LIMIT	
	789033 D02 General UNII Test Procedures New Rules v02r01	FIELD STRENGTH AT 3m (dBµV/m)	
		PK : 74	AV : 54
OUT OF THE RESTRICTED BANDS	APPLICABLE TO	EIRP LIMIT (dBm/MHz)	EQUIVALENT FIELD STRENGTH AT 3m (dBµV/m)
	15.407(b)(1)	PK : -27	PK : 68.2
	15.407(b)(2)		
	15.407(b)(3)		
	15.407(b)(4)	See note 2 (FCC 16-24)	

NOTE: The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000 \sqrt{30P}}{3} \mu\text{V/m, where } P \text{ is the eirp (Watts).}$$

2. All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

3.1.3 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	Euroshieldpn-CT0001143-1216	Nov. 14,23	Nov. 13,26
Bilog Antenna	ETS-LINDGREN	3143B	00161965	Feb. 19,23	Feb. 18,24
Bilog Antenna	ETS-LINDGREN	3143B	00161965	Feb. 18,24	Feb. 17,25
Horn Antenna	ETS-LINDGREN	3117	00168692	Feb. 19,23	Feb. 18,24
Horn Antenna	ETS-LINDGREN	3117	00168692	Feb. 18,24	Feb. 17,25
Horn Antenna (18GHz-40GHz)	N/A	QWH-SL-18-40-K-SG/QMS-00361	15433	Sep.04, 23	Sep.03, 24
Test Software	E3	V 9.160323	N/A	N/A	N/A
Test Software	JS1120-3	3.2.06	N/A	N/A	N/A
10dB Attenuator	JFW/USA	50HF-010-SMA	N/A	May. 06,23	May. 05,24
10dB Attenuator	JFW/USA	50HF-010-SMA	N/A	May. 05,24	May. 04,25
MXE EMI Receiver	KEYSIGHT	N9038A-544	MY54450026	Mar. 28,23	Mar. 27,24
MXE EMI Receiver	KEYSIGHT	N9038A-544	MY54450026	Mar. 27,24	Mar. 26,25
Signal Pre-Amplifier	EMSI	EMC 9135	980249	May. 06,23	May. 05,24
Signal Pre-Amplifier	EMSI	EMC 9135	980249	May. 05,24	May. 04,25
Signal Pre-Amplifier	EMSI	EMC 012645B	980257	May.10,23	May.09,24
Signal Pre-Amplifier	EMSI	EMC 012645B	980257	May.09,24	May.08,25
Signal Pre-Amplifier	EMSI	EMC 184045B	980259	Feb. 18,23	Feb. 17,24
Signal Pre-Amplifier	EMSI	EMC 184045B	980259	Feb. 17,24	Feb. 16,25
DC Source	Kikusui/JP	PMX18-5A	0000001	Aug. 12,23	Aug. 11,24
Power Meter	Anritsu	ML2495A	1506002	Feb. 15,23	Feb. 14,24
Power Meter	Anritsu	ML2495A	1506002	Feb. 14,24	Feb. 13,25
Power Sensor	Anritsu	MA2411B	1339352	Feb. 15,23	Feb. 14,24
Power Sensor	Anritsu	MA2411B	1339352	Feb. 14,24	Feb. 13,25
Loop Antenna	Schwarzbeck	FMZB 1519B	00173	Sep.03,23	Sep.02,24

- NOTE:**
1. The calibration interval of the above test instruments is 12 months or 36 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
 2. The test was performed in 3m Chamber.
 3. The FCC Site Registration No. is 525120; The Designation No. is CN1171.

3.1.4 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3-meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise, the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average (Duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor ($10 \log(1/\text{duty cycle})$).
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
5. All modes of operation were investigated, and the worst-case emissions are reported.




Test Report No.: W7L-231218W001RF03

3.1.5 DEVIATION FROM TEST STANDARD


No deviation.

3.1.6 TEST SETUP


<Frequency Range 9KHz~30MHz >

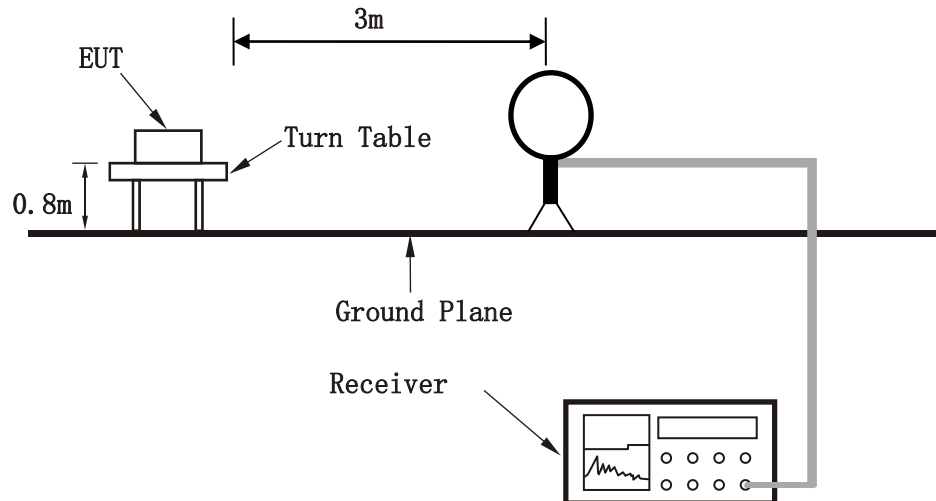

< Frequency Range 30MHz~1GHz >

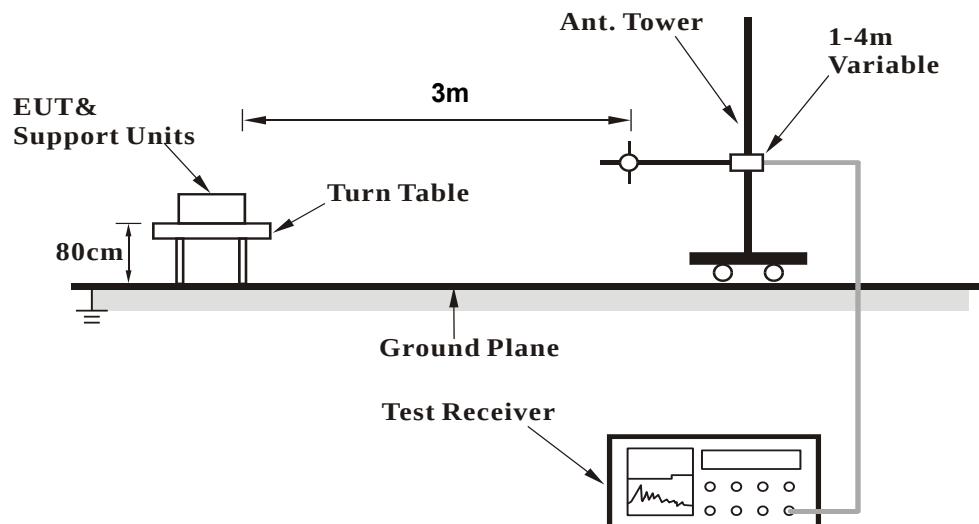

<Frequency Range above 1GHz>

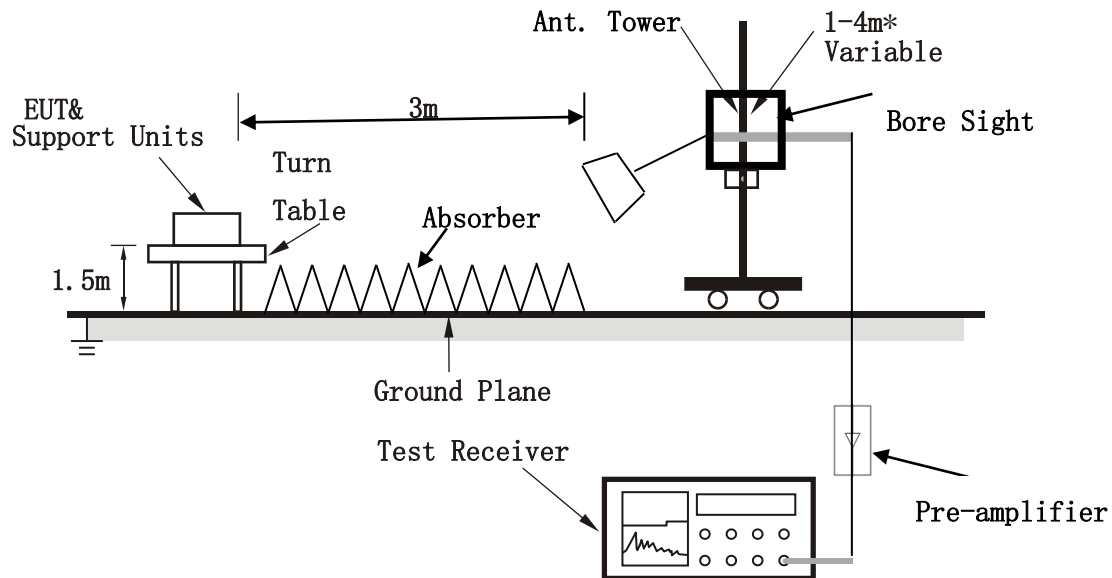

Note: Above 1G is a directional antenna

Depends on the EUT height and the antenna 3dB beamwidth both, refer to section 7.3 of CISPR 16-2-3.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.1.7 EUT OPERATING CONDITION

- Set the EUT under full load condition and placed them on a testing table.
- Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- The necessary accessories enable the EUT in full functions.



3.1.8 TEST RESULTS

NOTE : The 9K~30MHz amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

30 MHz – 1GHz data:

Band 1


802.11ax (160MHz):

CHANNEL	TX Channel 50	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
61.040	31.85	55.47	40.00	-8.15	7.36	6.31	37.29	100	360	QP
156.100	33.00	51.38	43.50	-10.50	11.63	6.79	36.80	100	360	QP
194.900	23.93	42.93	43.50	-19.57	10.68	6.96	36.64	100	360	QP
283.170	35.71	51.00	46.00	-10.29	14.06	7.26	36.61	100	360	QP
443.220	23.59	35.17	46.00	-22.41	17.62	7.73	36.93	100	360	QP
509.180	24.66	34.92	46.00	-21.34	18.85	7.97	37.08	100	360	QP

REMARKS:

1. Emission level (dBuV/m) = Read level (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

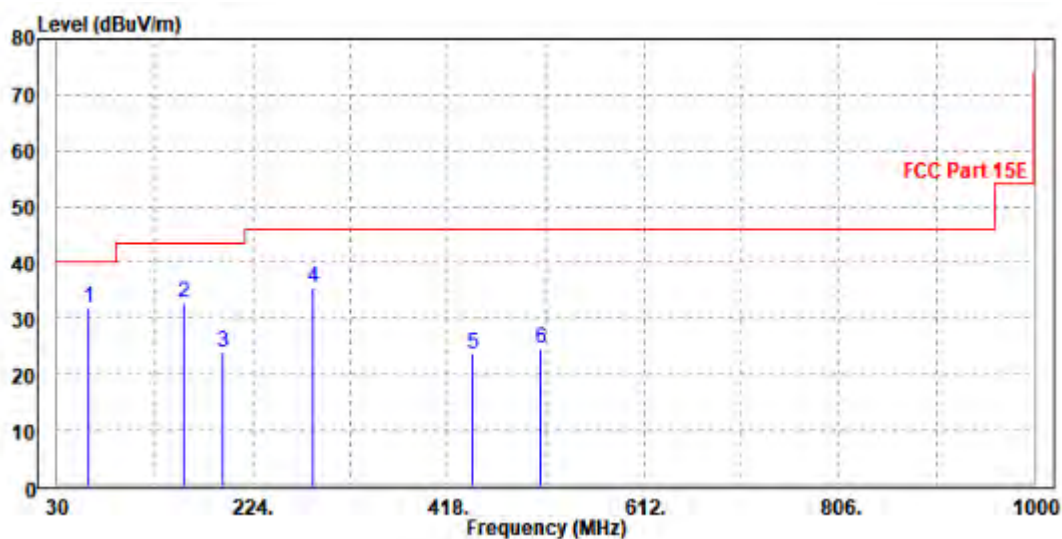




CHANNEL	Channel 50	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
30.970	29.57	40.56	40.00	-10.43	20.24	6.14	37.37	100	0	QP
62.980	35.58	58.93	40.00	-4.42	7.58	6.32	37.25	100	0	QP
155.130	33.34	50.21	43.50	-10.16	13.14	6.79	36.80	100	0	QP
194.900	24.78	41.73	43.50	-18.72	12.73	6.96	36.64	100	0	QP
284.140	29.23	44.16	46.00	-16.77	14.41	7.27	36.61	100	0	QP
486.870	25.98	35.87	46.00	-20.02	19.25	7.90	37.04	100	0	QP

REMARKS:

1. Emission level (dBuV/m) = Read level (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

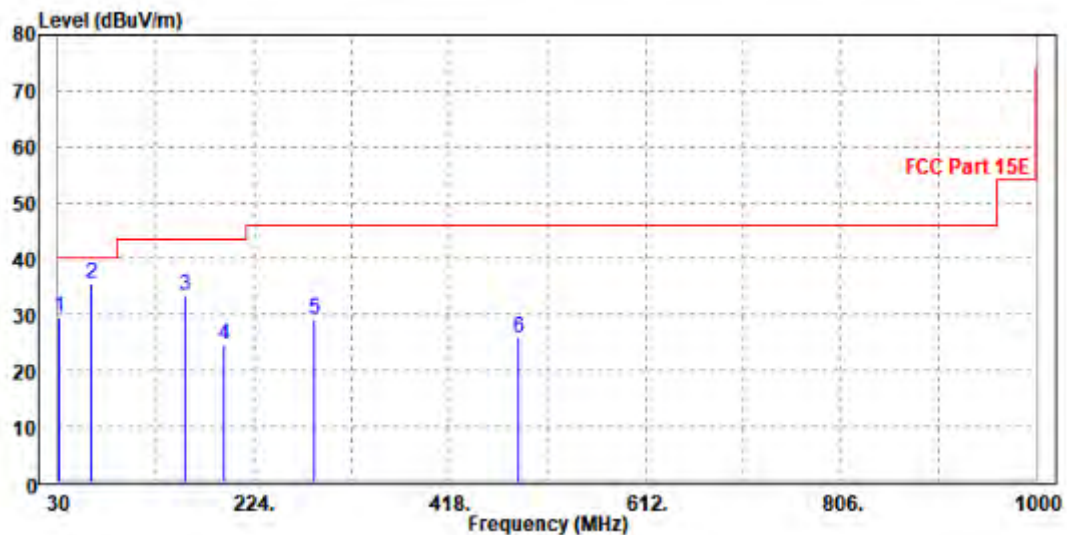



Test Report No.: W7L-231218W001RF03

ABOVE 1GHz WORST-CASE DATA:

Note: For higher frequency, the emission is too low to be detected.

Band 1

802.11a

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	53.87	54.96	74.00	-20.13	34.26	11.17	46.52	100	85	Peak
5150	48.02	49.11	54.00	-5.98	34.26	11.17	46.52	100	85	Average
5180	106.11	107.17	/	/	34.27	11.20	46.53	100	85	Peak
5180	98.52	99.58	/	/	34.27	11.20	46.53	100	85	Average
5350	52.39	53.24	74.00	-21.61	34.34	11.39	46.58	100	85	Peak
5350	47.01	47.86	54.00	-6.99	34.34	11.39	46.58	100	85	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	52.85	53.78	74.00	-21.15	34.42	11.17	46.52	100	0	Peak
5150	47.28	48.21	54.00	-6.72	34.42	11.17	46.52	100	0	Average
5180	102.50	103.39	/	/	34.44	11.20	46.53	100	0	Peak
5180	95.51	96.40	/	/	34.44	11.20	46.53	100	0	Average
5350	52.78	53.39	74.00	-21.22	34.58	11.39	46.58	100	0	Peak
5350	46.53	47.14	54.00	-7.47	34.58	11.39	46.58	100	0	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5180MHz: Fundamental frequency.

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	52.36	53.45	74.00	-21.64	34.26	11.17	46.52	100	85	Peak
5150	47.00	48.09	54.00	-7.00	34.26	11.17	46.52	100	85	Average
5200	105.78	106.82	/	/	34.28	11.22	46.54	100	85	Peak
5200	98.74	99.78	/	/	34.28	11.22	46.54	100	85	Average
5350	52.11	52.96	74.00	-21.89	34.34	11.39	46.58	100	85	Peak
5350	47.10	47.95	54.00	-6.90	34.34	11.39	46.58	100	85	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	52.48	53.41	74.00	-21.52	34.42	11.17	46.52	100	0	Peak
5150	46.64	47.57	54.00	-7.36	34.42	11.17	46.52	100	0	Average
5200	102.23	103.09	/	/	34.46	11.22	46.54	100	0	Peak
5200	95.35	96.21	/	/	34.46	11.22	46.54	100	0	Average
5350	53.10	53.71	74.00	-20.90	34.58	11.39	46.58	100	0	Peak
5350	46.72	47.33	54.00	-7.28	34.58	11.39	46.58	100	0	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5200MHz: Fundamental frequency.

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	53.84	54.93	74.00	-20.16	34.26	11.17	46.52	100	80	Peak
5150	46.87	47.96	54.00	-7.13	34.26	11.17	46.52	100	80	Average
5240	105.19	106.17	/	/	34.30	11.27	46.55	100	80	Peak
5240	98.05	99.03	/	/	34.30	11.27	46.55	100	80	Average
5350	53.84	54.69	74.00	-20.16	34.34	11.39	46.58	100	80	Peak
5350	47.39	48.24	54.00	-6.61	34.34	11.39	46.58	100	80	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	54.21	55.14	74.00	-19.79	34.42	11.17	46.52	100	105	Peak
5150	46.70	47.63	54.00	-7.30	34.42	11.17	46.52	100	105	Average
5240	102.29	103.08	/	/	34.49	11.27	46.55	100	105	Peak
5240	95.99	96.78	/	/	34.49	11.27	46.55	100	105	Average
5350	53.48	54.09	74.00	-20.52	34.58	11.39	46.58	100	105	Peak
5350	47.17	47.78	54.00	-6.83	34.58	11.39	46.58	100	105	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5240MHz: Fundamental frequency.



Test Report No.: W7L-231218W001RF03

802.11n (20MHz)

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	54.58	55.67	74.00	-19.42	34.26	11.17	46.52	100	95	Peak
5150	48.95	50.04	54.00	-5.05	34.26	11.17	46.52	100	95	Average
5180	108.04	109.10	/	/	34.27	11.20	46.53	100	95	Peak
5180	100.39	101.45	/	/	34.27	11.20	46.53	100	95	Average
5350	52.79	53.64	74.00	-21.21	34.34	11.39	46.58	100	95	Peak
5350	46.54	47.39	54.00	-7.46	34.34	11.39	46.58	100	95	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	53.35	54.28	74.00	-20.65	34.42	11.17	46.52	100	0	Peak
5150	48.23	49.16	54.00	-5.77	34.42	11.17	46.52	100	0	Average
5180	104.05	104.94	/	/	34.44	11.20	46.53	100	0	Peak
5180	96.46	97.35	/	/	34.44	11.20	46.53	100	0	Average
5350	53.07	53.68	74.00	-20.93	34.58	11.39	46.58	100	0	Peak
5350	46.93	47.54	54.00	-7.07	34.58	11.39	46.58	100	0	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5180MHz: Fundamental frequency.



**BUREAU
VERITAS**

Test Report No.: W7L-231218W001RF03

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	53.49	54.58	74.00	-20.51	34.26	11.17	46.52	100	95	Peak
5150	47.71	48.80	54.00	-6.29	34.26	11.17	46.52	100	95	Average
5200	108.19	109.23	/	/	34.28	11.22	46.54	100	95	Peak
5200	100.15	101.19	/	/	34.28	11.22	46.54	100	95	Average
5350	54.17	55.02	74.00	-19.83	34.34	11.39	46.58	100	95	Peak
5350	47.44	48.29	54.00	-6.56	34.34	11.39	46.58	100	95	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	53.25	54.18	74.00	-20.75	34.42	11.17	46.52	100	0	Peak
5150	47.46	48.39	54.00	-6.54	34.42	11.17	46.52	100	0	Average
5200	103.79	104.65	/	/	34.46	11.22	46.54	100	0	Peak
5200	96.51	97.37	/	/	34.46	11.22	46.54	100	0	Average
5350	53.56	54.17	74.00	-20.44	34.58	11.39	46.58	100	0	Peak
5350	47.64	48.25	54.00	-6.36	34.58	11.39	46.58	100	0	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5200MHz: Fundamental frequency.

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	53.08	54.17	74.00	-20.92	34.26	11.17	46.52	100	95	Peak
5150	47.80	48.89	54.00	-6.20	34.26	11.17	46.52	100	95	Average
5240	107.36	108.34	/	/	34.30	11.27	46.55	100	95	Peak
5240	99.87	100.85	/	/	34.30	11.27	46.55	100	95	Average
5350	52.49	53.34	74.00	-21.51	34.34	11.39	46.58	100	95	Peak
5350	47.29	48.14	54.00	-6.71	34.34	11.39	46.58	100	95	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	53.04	53.97	74.00	-20.96	34.42	11.17	46.52	100	105	Peak
5150	47.41	48.34	54.00	-6.59	34.42	11.17	46.52	100	105	Average
5240	103.69	104.48	/	/	34.49	11.27	46.55	100	105	Peak
5240	97.19	97.98	/	/	34.49	11.27	46.55	100	105	Average
5350	53.69	54.30	74.00	-20.31	34.58	11.39	46.58	100	105	Peak
5350	47.88	48.49	54.00	-6.12	34.58	11.39	46.58	100	105	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5240MHz: Fundamental frequency.



**BUREAU
VERITAS**

Test Report No.: W7L-231218W001RF03

802.11n (40MHz)

CHANNEL	TX Channel 38	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	54.76	55.85	74.00	-19.24	34.26	11.17	46.52	100	95	Peak
5150	50.76	51.85	54.00	-3.24	34.26	11.17	46.52	100	95	Average
5190	98.28	99.32	/	/	34.28	11.21	46.53	100	95	Peak
5190	94.61	95.65	/	/	34.28	11.21	46.53	100	95	Average
5350	52.56	53.41	74.00	-21.44	34.34	11.39	46.58	100	95	Peak
5350	47.28	48.13	54.00	-6.72	34.34	11.39	46.58	100	95	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	53.57	54.50	74.00	-20.43	34.42	11.17	46.52	100	0	Peak
5150	48.09	49.02	54.00	-5.91	34.42	11.17	46.52	100	0	Average
5190	96.32	97.19	/	/	34.45	11.21	46.53	100	0	Peak
5190	91.68	92.55	/	/	34.45	11.21	46.53	100	0	Average
5350	51.42	52.03	74.00	-22.58	34.58	11.39	46.58	100	0	Peak
5350	47.46	48.07	54.00	-6.54	34.58	11.39	46.58	100	0	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5190MHz: Fundamental frequency.

CHANNEL	TX Channel 46	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	52.56	53.65	74.00	-21.44	34.26	11.17	46.52	100	95	Peak
5150	47.26	48.35	54.00	-6.74	34.26	11.17	46.52	100	95	Average
5230	99.94	100.93	/	/	34.29	11.26	46.54	100	95	Peak
5230	94.84	95.83	/	/	34.29	11.26	46.54	100	95	Average
5350	52.80	53.65	74.00	-21.20	34.34	11.39	46.58	100	95	Peak
5350	47.34	48.19	54.00	-6.66	34.34	11.39	46.58	100	95	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	52.63	53.56	74.00	-21.37	34.42	11.17	46.52	100	0	Peak
5150	46.61	47.54	54.00	-7.39	34.42	11.17	46.52	100	0	Average
5230	97.50	98.30	/	/	34.48	11.26	46.54	100	0	Peak
5230	91.47	92.27	/	/	34.48	11.26	46.54	100	0	Average
5350	51.57	52.18	74.00	-22.43	34.58	11.39	46.58	100	0	Peak
5350	47.24	47.85	54.00	-6.76	34.58	11.39	46.58	100	0	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5230MHz: Fundamental frequency.



802.11ax (20MHz)

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	56.36	57.45	74.00	-17.64	34.26	11.17	46.52	100	95	Peak
5150	50.63	51.72	54.00	-3.37	34.26	11.17	46.52	100	95	Average
5180	108.70	109.76	/	/	34.27	11.20	46.53	100	95	Peak
5180	100.66	101.72	/	/	34.27	11.20	46.53	100	95	Average
5350	53.39	54.24	74.00	-20.61	34.34	11.39	46.58	100	95	Peak
5350	47.09	47.94	54.00	-6.91	34.34	11.39	46.58	100	95	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	53.90	54.83	74.00	-20.10	34.42	11.17	46.52	100	0	Peak
5150	48.00	48.93	54.00	-6.00	34.42	11.17	46.52	100	0	Average
5180	105.92	106.81	/	/	34.44	11.20	46.53	100	0	Peak
5180	96.72	97.61	/	/	34.44	11.20	46.53	100	0	Average
5350	53.41	54.02	74.00	-20.59	34.58	11.39	46.58	100	0	Peak
5350	47.28	47.89	54.00	-6.72	34.58	11.39	46.58	100	0	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5180MHz: Fundamental frequency.

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	53.65	54.74	74.00	-20.35	34.26	11.17	46.52	100	95	Peak
5150	47.99	49.08	54.00	-6.01	34.26	11.17	46.52	100	95	Average
5200	108.60	109.64	/	/	34.28	11.22	46.54	100	95	Peak
5200	100.52	101.56	/	/	34.28	11.22	46.54	100	95	Average
5350	53.76	54.61	74.00	-20.24	34.34	11.39	46.58	100	95	Peak
5350	47.50	48.35	54.00	-6.50	34.34	11.39	46.58	100	95	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	53.19	54.12	74.00	-20.81	34.42	11.17	46.52	100	0	Peak
5150	47.85	48.78	54.00	-6.15	34.42	11.17	46.52	100	0	Average
5200	106.39	107.25	/	/	34.46	11.22	46.54	100	0	Peak
5200	96.43	97.29	/	/	34.46	11.22	46.54	100	0	Average
5350	53.77	54.38	74.00	-20.23	34.58	11.39	46.58	100	0	Peak
5350	47.14	47.75	54.00	-6.86	34.58	11.39	46.58	100	0	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5200MHz: Fundamental frequency.

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	53.20	54.29	74.00	-20.80	34.26	11.17	46.52	100	95	Peak
5150	47.27	48.36	54.00	-6.73	34.26	11.17	46.52	100	95	Average
5240	108.27	109.25	/	/	34.30	11.27	46.55	100	95	Peak
5240	98.42	99.40	/	/	34.30	11.27	46.55	100	95	Average
5350	51.56	52.41	74.00	-22.44	34.34	11.39	46.58	100	95	Peak
5350	47.83	48.68	54.00	-6.17	34.34	11.39	46.58	100	95	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	52.61	53.54	74.00	-21.39	34.42	11.17	46.52	100	105	Peak
5150	46.83	47.76	54.00	-7.17	34.42	11.17	46.52	100	105	Average
5240	105.66	106.45	/	/	34.49	11.27	46.55	100	105	Peak
5240	97.35	98.14	/	/	34.49	11.27	46.55	100	105	Average
5350	54.97	55.58	74.00	-19.03	34.58	11.39	46.58	100	105	Peak
5350	47.90	48.51	54.00	-6.10	34.58	11.39	46.58	100	105	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5240MHz: Fundamental frequency.



802.11ax (40MHz)

CHANNEL	TX Channel 38	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	55.36	56.45	74.00	-18.64	34.26	11.17	46.52	100	85	Peak
5150	50.84	51.93	54.00	-3.16	34.26	11.17	46.52	100	85	Average
5190	101.41	102.45	/	/	34.28	11.21	46.53	100	85	Peak
5190	94.10	95.14	/	/	34.28	11.21	46.53	100	85	Average
5350	52.41	53.26	74.00	-21.59	34.34	11.39	46.58	100	85	Peak
5350	47.67	48.52	54.00	-6.33	34.34	11.39	46.58	100	85	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	52.20	53.13	74.00	-21.80	34.42	11.17	46.52	100	0	Peak
5150	48.13	49.06	54.00	-5.87	34.42	11.17	46.52	100	0	Average
5190	99.77	100.64	/	/	34.45	11.21	46.53	100	0	Peak
5190	92.67	93.54	/	/	34.45	11.21	46.53	100	0	Average
5350	51.69	52.30	74.00	-22.31	34.58	11.39	46.58	100	0	Peak
5350	47.03	47.64	54.00	-6.97	34.58	11.39	46.58	100	0	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5190MHz: Fundamental frequency.

CHANNEL	TX Channel 46	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	53.54	54.63	74.00	-20.46	34.26	11.17	46.52	100	85	Peak
5150	47.27	48.36	54.00	-6.73	34.26	11.17	46.52	100	85	Average
5230	104.39	105.38	/	/	34.29	11.26	46.54	100	85	Peak
5230	96.23	97.22	/	/	34.29	11.26	46.54	100	85	Average
5350	52.36	53.21	74.00	-21.64	34.34	11.39	46.58	100	85	Peak
5350	47.58	48.43	54.00	-6.42	34.34	11.39	46.58	100	85	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	53.15	54.08	74.00	-20.85	34.42	11.17	46.52	100	105	Peak
5150	47.96	48.89	54.00	-6.04	34.42	11.17	46.52	100	105	Average
5230	101.92	102.72	/	/	34.48	11.26	46.54	100	105	Peak
5230	95.13	95.93	/	/	34.48	11.26	46.54	100	105	Average
5350	52.26	52.87	74.00	-21.74	34.58	11.39	46.58	100	105	Peak
5350	48.09	48.70	54.00	-5.91	34.58	11.39	46.58	100	105	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5230MHz: Fundamental frequency.



802.11ax (80MHz)

CHANNEL	TX Channel 42	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	53.00	54.09	74.00	-21.00	34.26	11.17	46.52	100	90	Peak
5150	49.78	50.87	54.00	-4.22	34.26	11.17	46.52	100	90	Average
5210	97.20	98.22	/	/	34.28	11.24	46.54	100	90	Peak
5210	91.51	92.53	/	/	34.28	11.24	46.54	100	90	Average
5350	51.84	52.69	74.00	-22.16	34.34	11.39	46.58	100	90	Peak
5350	46.27	47.12	54.00	-7.73	34.34	11.39	46.58	100	90	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	51.79	52.72	74.00	-22.21	34.42	11.17	46.52	100	0	Peak
5150	47.26	48.19	54.00	-6.74	34.42	11.17	46.52	100	0	Average
5210	95.31	96.14	/	/	34.47	11.24	46.54	100	0	Peak
5210	89.45	90.28	/	/	34.47	11.24	46.54	100	0	Average
5350	51.66	52.27	74.00	-22.34	34.58	11.39	46.58	100	0	Peak
5350	46.90	47.51	54.00	-7.10	34.58	11.39	46.58	100	0	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5210MHz: Fundamental frequency.



Test Report No.: W7L-231218W001RF03

802.11ac (80MHz)

CHANNEL	TX Channel 42	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	54.39	55.48	74.00	-19.61	34.26	11.17	46.52	100	80	Peak
5150	49.98	51.07	54.00	-4.02	34.26	11.17	46.52	100	80	Average
5210	95.33	96.35	/	/	34.28	11.24	46.54	100	80	Peak
5210	90.71	91.73	/	/	34.28	11.24	46.54	100	80	Average
5350	52.74	53.59	74.00	-21.26	34.34	11.39	46.58	100	80	Peak
5350	47.12	47.97	54.00	-6.88	34.34	11.39	46.58	100	80	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	52.13	53.06	74.00	-21.87	34.42	11.17	46.52	100	0	Peak
5150	47.93	48.86	54.00	-6.07	34.42	11.17	46.52	100	0	Average
5210	92.59	93.42	/	/	34.47	11.24	46.54	100	0	Peak
5210	88.18	89.01	/	/	34.47	11.24	46.54	100	0	Average
5350	52.51	53.12	74.00	-21.49	34.58	11.39	46.58	100	0	Peak
5350	46.90	47.51	54.00	-7.10	34.58	11.39	46.58	100	0	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5210MHz: Fundamental frequency.



Test Report No.: W7L-231218W001RF03

802.11ac (160MHz)

CHANNEL	TX Channel 50	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	55.16	56.25	74.00	-18.84	34.26	11.17	46.52	100	90	Peak
5150	50.48	51.57	54.00	-3.52	34.26	11.17	46.52	100	90	Average
5250	91.34	92.31	/	/	34.30	11.28	46.55	100	90	Peak
5250	85.90	86.87	/	/	34.30	11.28	46.55	100	90	Average
5350	52.25	53.10	74.00	-21.75	34.34	11.39	46.58	100	90	Peak
5350	49.91	50.76	54.00	-4.09	34.34	11.39	46.58	100	90	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	52.06	52.99	74.00	-21.94	34.42	11.17	46.52	100	105	Peak
5150	48.58	49.51	54.00	-5.42	34.42	11.17	46.52	100	105	Average
5250	89.93	90.70	/	/	34.50	11.28	46.55	100	105	Peak
5250	84.96	85.73	/	/	34.50	11.28	46.55	100	105	Average
5350	53.06	53.67	74.00	-20.94	34.58	11.39	46.58	100	105	Peak
5350	48.53	49.14	54.00	-5.47	34.58	11.39	46.58	100	105	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5250MHz: Fundamental frequency.




802.11ax (160MHz)

Worst case harmonic:

CHANNEL	TX Channel 50	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	10503.000	52.38	44.19	74.00	-21.62	8.19	Peak	Horizontal
2	10503.000	44.78	36.59	54.00	-9.22	8.19	Average	Horizontal
3	PK15750.000	57.42	41.27	74.00	-16.58	16.15	Peak	Horizontal
4	PP15750.000	48.67	32.52	54.00	-5.33	16.15	Average	Horizontal

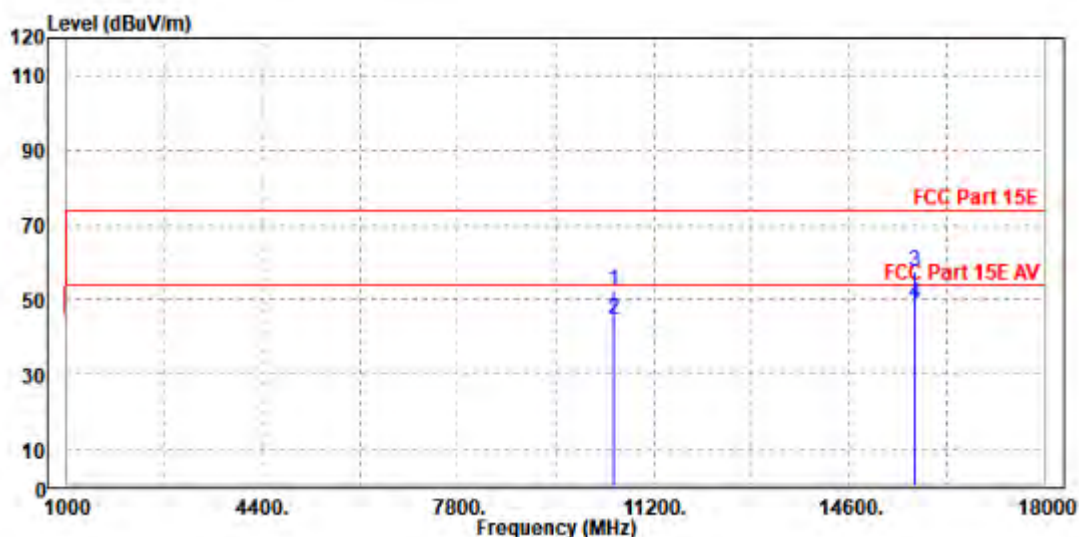



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	10500.000	52.74	44.35	74.00	-21.26	8.39	Peak	Vertical
2	10500.000	45.08	36.69	54.00	-8.92	8.39	Average	Vertical
3	PK15756.000	58.26	41.74	74.00	-15.74	16.52	Peak	Vertical
4	PP15756.000	50.17	33.65	54.00	-3.83	16.52	Average	Vertical

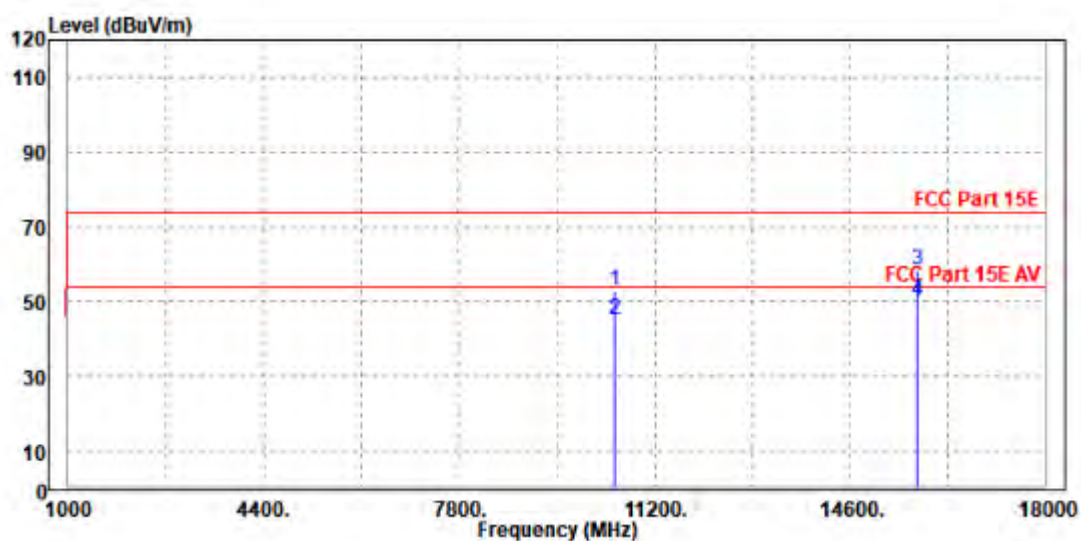

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5250MHz: Fundamental frequency.
3. For frequency above 18GHz, the emission was tested 20db below the limit so the data not recorded in the sheet.



**BUREAU
VERITAS**

Test Report No.: W7L-231218W001RF03

5G WIFI-RU

802.11ax (20MHz) (RU26):

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	53.04	54.13	74.00	-20.96	34.26	11.17	46.52	100	95	Peak
5150	45.82	46.91	54.00	-8.18	34.26	11.17	46.52	100	95	Average
5180	108.49	109.55	/	/	34.27	11.20	46.53	100	95	Peak
5180	99.03	100.09	/	/	34.27	11.20	46.53	100	95	Average
5350	52.41	53.26	74.00	-21.59	34.34	11.39	46.58	100	95	Peak
5350	45.68	46.53	54.00	-8.32	34.34	11.39	46.58	100	95	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	52.94	53.87	74.00	-21.06	34.42	11.17	46.52	100	15	Peak
5150	45.61	46.54	54.00	-8.39	34.42	11.17	46.52	100	15	Average
5180	107.23	108.12	/	/	34.44	11.20	46.53	100	15	Peak
5180	98.61	99.50	/	/	34.44	11.20	46.53	100	15	Average
5350	53.58	54.19	74.00	-20.42	34.58	11.39	46.58	100	15	Peak
5350	46.24	46.85	54.00	-7.76	34.58	11.39	46.58	100	15	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5180MHz: Fundamental frequency.

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	54.21	55.30	74.00	-19.79	34.26	11.17	46.52	100	95	Peak
5150	45.22	46.31	54.00	-8.78	34.26	11.17	46.52	100	95	Average
5200	107.80	108.84	/	/	34.28	11.22	46.54	100	95	Peak
5200	98.26	99.30	/	/	34.28	11.22	46.54	100	95	Average
5350	53.23	54.08	74.00	-20.77	34.34	11.39	46.58	100	95	Peak
5350	45.35	46.20	54.00	-8.65	34.34	11.39	46.58	100	95	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	52.76	53.69	74.00	-21.24	34.42	11.17	46.52	100	15	Peak
5150	45.55	46.48	54.00	-8.45	34.42	11.17	46.52	100	15	Average
5200	105.29	106.15	/	/	34.46	11.22	46.54	100	15	Peak
5200	95.11	95.97	/	/	34.46	11.22	46.54	100	15	Average
5350	52.88	53.49	74.00	-21.12	34.58	11.39	46.58	100	15	Peak
5350	45.98	46.59	54.00	-8.02	34.58	11.39	46.58	100	15	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5200MHz: Fundamental frequency.

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	52.37	53.46	74.00	-21.63	34.26	11.17	46.52	100	95	Peak
5150	45.14	46.23	54.00	-8.86	34.26	11.17	46.52	100	95	Average
5240	107.43	108.41	/	/	34.30	11.27	46.55	100	95	Peak
5240	98.19	99.17	/	/	34.30	11.27	46.55	100	95	Average
5350	52.84	53.69	74.00	-21.16	34.34	11.39	46.58	100	95	Peak
5350	45.31	46.16	54.00	-8.69	34.34	11.39	46.58	100	95	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	54.66	55.59	74.00	-19.34	34.42	11.17	46.52	100	30	Peak
5150	45.17	46.10	54.00	-8.83	34.42	11.17	46.52	100	30	Average
5240	105.02	105.81	/	/	34.49	11.27	46.55	100	30	Peak
5240	94.08	94.87	/	/	34.49	11.27	46.55	100	30	Average
5350	53.88	54.49	74.00	-20.12	34.58	11.39	46.58	100	30	Peak
5350	45.74	46.35	54.00	-8.26	34.58	11.39	46.58	100	30	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5240MHz: Fundamental frequency.



Test Report No.: W7L-231218W001RF03

802.11ax (20MHz) (RU52):

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	53.09	54.18	74.00	-20.91	34.26	11.17	46.52	100	95	Peak
5150	48.76	49.85	54.00	-5.24	34.26	11.17	46.52	100	95	Average
5180	106.83	107.89	/	/	34.27	11.20	46.53	100	95	Peak
5180	97.46	98.52	/	/	34.27	11.20	46.53	100	95	Average
5350	53.50	54.35	74.00	-20.50	34.34	11.39	46.58	100	95	Peak
5350	45.68	46.53	54.00	-8.32	34.34	11.39	46.58	100	95	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	54.70	55.63	74.00	-19.30	34.42	11.17	46.52	100	15	Peak
5150	46.63	47.56	54.00	-7.37	34.42	11.17	46.52	100	15	Average
5180	104.66	105.55	/	/	34.44	11.20	46.53	100	15	Peak
5180	95.48	96.37	/	/	34.44	11.20	46.53	100	15	Average
5350	53.79	54.40	74.00	-20.21	34.58	11.39	46.58	100	15	Peak
5350	46.49	47.10	54.00	-7.51	34.58	11.39	46.58	100	15	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5180MHz: Fundamental frequency.

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	52.53	53.62	74.00	-21.47	34.26	11.17	46.52	100	95	Peak
5150	45.86	46.95	54.00	-8.14	34.26	11.17	46.52	100	95	Average
5200	104.17	105.21	/	/	34.28	11.22	46.54	100	95	Peak
5200	95.30	96.34	/	/	34.28	11.22	46.54	100	95	Average
5350	53.71	54.56	74.00	-20.29	34.34	11.39	46.58	100	95	Peak
5350	46.00	46.85	54.00	-8.00	34.34	11.39	46.58	100	95	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	51.74	52.67	74.00	-22.26	34.42	11.17	46.52	100	100	Peak
5150	45.61	46.54	54.00	-8.39	34.42	11.17	46.52	100	100	Average
5200	104.23	105.09	/	/	34.46	11.22	46.54	100	100	Peak
5200	94.00	94.86	/	/	34.46	11.22	46.54	100	100	Average
5350	52.62	53.23	74.00	-21.38	34.58	11.39	46.58	100	100	Peak
5350	45.69	46.30	54.00	-8.31	34.58	11.39	46.58	100	100	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5200MHz: Fundamental frequency.

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	52.54	53.63	74.00	-21.46	34.26	11.17	46.52	100	20	Peak
5150	45.16	46.25	54.00	-8.84	34.26	11.17	46.52	100	20	Average
5240	105.23	106.21	/	/	34.30	11.27	46.55	100	20	Peak
5240	94.60	95.58	/	/	34.30	11.27	46.55	100	20	Average
5350	52.81	53.66	74.00	-21.19	34.34	11.39	46.58	100	20	Peak
5350	47.28	48.13	54.00	-6.72	34.34	11.39	46.58	100	20	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	51.88	52.81	74.00	-22.12	34.42	11.17	46.52	100	100	Peak
5150	45.57	46.50	54.00	-8.43	34.42	11.17	46.52	100	100	Average
5240	104.17	104.96	/	/	34.49	11.27	46.55	100	100	Peak
5240	93.79	94.58	/	/	34.49	11.27	46.55	100	100	Average
5350	53.65	54.26	74.00	-20.35	34.58	11.39	46.58	100	100	Peak
5350	47.55	48.16	54.00	-6.45	34.58	11.39	46.58	100	100	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5240MHz: Fundamental frequency.



Test Report No.: W7L-231218W001RF03

802.11ax (20MHz) (RU106):

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	53.72	54.81	74.00	-20.28	34.26	11.17	46.52	100	85	Peak
5150	47.48	48.57	54.00	-6.52	34.26	11.17	46.52	100	85	Average
5180	104.05	105.11	/	/	34.27	11.20	46.53	100	85	Peak
5180	93.51	94.57	/	/	34.27	11.20	46.53	100	85	Average
5350	51.99	52.84	74.00	-22.01	34.34	11.39	46.58	100	85	Peak
5350	45.69	46.54	54.00	-8.31	34.34	11.39	46.58	100	85	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	51.62	52.55	74.00	-22.38	34.42	11.17	46.52	100	15	Peak
5150	47.57	48.50	54.00	-6.43	34.42	11.17	46.52	100	15	Average
5180	101.60	102.49	/	/	34.44	11.20	46.53	100	15	Peak
5180	90.35	91.24	/	/	34.44	11.20	46.53	100	15	Average
5350	52.40	53.01	74.00	-21.60	34.58	11.39	46.58	100	15	Peak
5350	46.77	47.38	54.00	-7.23	34.58	11.39	46.58	100	15	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5180MHz: Fundamental frequency.

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	52.86	53.95	74.00	-21.14	34.26	11.17	46.52	100	85	Peak
5150	47.56	48.65	54.00	-6.44	34.26	11.17	46.52	100	85	Average
5200	103.06	104.10	/	/	34.28	11.22	46.54	100	85	Peak
5200	93.55	94.59	/	/	34.28	11.22	46.54	100	85	Average
5350	53.71	54.56	74.00	-20.29	34.34	11.39	46.58	100	85	Peak
5350	45.45	46.30	54.00	-8.55	34.34	11.39	46.58	100	85	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	52.68	53.61	74.00	-21.32	34.42	11.17	46.52	100	15	Peak
5150	46.10	47.03	54.00	-7.90	34.42	11.17	46.52	100	15	Average
5200	100.47	101.33	/	/	34.46	11.22	46.54	100	15	Peak
5200	90.82	91.68	/	/	34.46	11.22	46.54	100	15	Average
5350	52.24	52.85	74.00	-21.76	34.58	11.39	46.58	100	15	Peak
5350	46.33	46.94	54.00	-7.67	34.58	11.39	46.58	100	15	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5200MHz: Fundamental frequency.

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	51.60	52.69	74.00	-22.40	34.26	11.17	46.52	100	85	Peak
5150	45.11	46.20	54.00	-8.89	34.26	11.17	46.52	100	85	Average
5240	104.95	105.93	/	/	34.30	11.27	46.55	100	85	Peak
5240	93.87	94.85	/	/	34.30	11.27	46.55	100	85	Average
5350	54.38	55.23	74.00	-19.62	34.34	11.39	46.58	100	85	Peak
5350	45.73	46.58	54.00	-8.27	34.34	11.39	46.58	100	85	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	52.33	53.26	74.00	-21.67	34.42	11.17	46.52	100	15	Peak
5150	45.13	46.06	54.00	-8.87	34.42	11.17	46.52	100	15	Average
5240	101.44	102.23	/	/	34.49	11.27	46.55	100	15	Peak
5240	90.24	91.03	/	/	34.49	11.27	46.55	100	15	Average
5350	53.55	54.16	74.00	-20.45	34.58	11.39	46.58	100	15	Peak
5350	47.49	48.10	54.00	-6.51	34.58	11.39	46.58	100	15	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5240MHz: Fundamental frequency.



Test Report No.: W7L-231218W001RF03

802.11ax (20MHz) (RU242):

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	59.98	61.07	74.00	-14.02	34.26	11.17	46.52	100	90	Peak
5150	50.75	51.84	54.00	-3.25	34.26	11.17	46.52	100	90	Average
5180	106.33	107.39	/	/	34.27	11.20	46.53	100	90	Peak
5180	96.78	97.84	/	/	34.27	11.20	46.53	100	90	Average
5350	51.64	52.49	74.00	-22.36	34.34	11.39	46.58	100	90	Peak
5350	45.45	46.30	54.00	-8.55	34.34	11.39	46.58	100	90	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	56.31	57.24	74.00	-17.69	34.42	11.17	46.52	100	15	Peak
5150	50.53	51.46	54.00	-3.47	34.42	11.17	46.52	100	15	Average
5180	104.96	105.85	/	/	34.44	11.20	46.53	100	15	Peak
5180	95.98	96.87	/	/	34.44	11.20	46.53	100	15	Average
5350	53.04	53.65	74.00	-20.96	34.58	11.39	46.58	100	15	Peak
5350	45.82	46.43	54.00	-8.18	34.58	11.39	46.58	100	15	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5180MHz: Fundamental frequency.

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	53.51	54.60	74.00	-20.49	34.26	11.17	46.52	100	90	Peak
5150	47.14	48.23	54.00	-6.86	34.26	11.17	46.52	100	90	Average
5200	105.20	106.24	/	/	34.28	11.22	46.54	100	90	Peak
5200	94.23	95.27	/	/	34.28	11.22	46.54	100	90	Average
5350	55.47	56.32	74.00	-18.53	34.34	11.39	46.58	100	90	Peak
5350	48.02	48.87	54.00	-5.98	34.34	11.39	46.58	100	90	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	53.33	54.26	74.00	-20.67	34.42	11.17	46.52	100	25	Peak
5150	46.50	47.43	54.00	-7.50	34.42	11.17	46.52	100	25	Average
5200	103.81	104.67	/	/	34.46	11.22	46.54	100	25	Peak
5200	92.83	93.69	/	/	34.46	11.22	46.54	100	25	Average
5350	53.91	54.52	74.00	-20.09	34.58	11.39	46.58	100	25	Peak
5350	46.65	47.26	54.00	-7.35	34.58	11.39	46.58	100	25	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5200MHz: Fundamental frequency.

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	50.53	51.62	74.00	-23.47	34.26	11.17	46.52	115	95	Peak
5150	45.32	46.41	54.00	-8.68	34.26	11.17	46.52	115	95	Average
5240	105.85	106.83	/	/	34.30	11.27	46.55	115	95	Peak
5240	97.94	98.92	/	/	34.30	11.27	46.55	115	95	Average
5350	51.41	52.26	74.00	-22.59	34.34	11.39	46.58	115	95	Peak
5350	44.98	45.83	54.00	-9.02	34.34	11.39	46.58	115	95	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	53.75	54.68	74.00	-20.25	34.42	11.17	46.52	100	100	Peak
5150	45.45	46.38	54.00	-8.55	34.42	11.17	46.52	100	100	Average
5240	102.82	103.61	/	/	34.49	11.27	46.55	100	100	Peak
5240	95.59	96.38	/	/	34.49	11.27	46.55	100	100	Average
5350	53.20	53.81	74.00	-20.80	34.58	11.39	46.58	100	100	Peak
5350	45.37	45.98	54.00	-8.63	34.58	11.39	46.58	100	100	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5240MHz: Fundamental frequency.



**BUREAU
VERITAS**

Test Report No.: W7L-231218W001RF03

802.11ax (40MHz) (RU484):

CHANNEL	TX Channel 38	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	57.13	58.22	74.00	-16.87	34.26	11.17	46.52	100	80	Peak
5150	49.27	50.36	54.00	-4.73	34.26	11.17	46.52	100	80	Average
5190	102.57	103.61	/	/	34.28	11.21	46.53	100	80	Peak
5190	92.15	93.19	/	/	34.28	11.21	46.53	100	80	Average
5350	51.39	52.24	74.00	-22.61	34.34	11.39	46.58	100	80	Peak
5350	45.25	46.10	54.00	-8.75	34.34	11.39	46.58	100	80	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	51.74	52.67	74.00	-22.26	34.42	11.17	46.52	100	350	Peak
5150	46.75	47.68	54.00	-7.25	34.42	11.17	46.52	100	350	Average
5190	101.37	102.24	/	/	34.45	11.21	46.53	100	350	Peak
5190	91.52	92.39	/	/	34.45	11.21	46.53	100	350	Average
5350	50.58	51.19	74.00	-23.42	34.58	11.39	46.58	100	350	Peak
5350	45.56	46.17	54.00	-8.44	34.58	11.39	46.58	100	350	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5190MHz: Fundamental frequency.

CHANNEL	TX Channel 46	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	51.51	52.60	74.00	-22.49	34.26	11.17	46.52	100	80	Peak
5150	45.81	46.90	54.00	-8.19	34.26	11.17	46.52	100	80	Average
5230	101.67	102.66	/	/	34.29	11.26	46.54	100	80	Peak
5230	91.43	92.42	/	/	34.29	11.26	46.54	100	80	Average
5350	51.63	52.48	74.00	-22.37	34.34	11.39	46.58	100	80	Peak
5350	45.33	46.18	54.00	-8.67	34.34	11.39	46.58	100	80	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	52.34	53.27	74.00	-21.66	34.42	11.17	46.52	100	345	Peak
5150	45.58	46.51	54.00	-8.42	34.42	11.17	46.52	100	345	Average
5230	101.52	102.32	/	/	34.48	11.26	46.54	100	345	Peak
5230	92.63	93.43	/	/	34.48	11.26	46.54	100	345	Average
5350	52.08	52.69	74.00	-21.92	34.58	11.39	46.58	100	345	Peak
5350	45.67	46.28	54.00	-8.33	34.58	11.39	46.58	100	345	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5230MHz: Fundamental frequency.



Test Report No.: W7L-231218W001RF03

802.11ax (80MHz) (RU996):

CHANNEL	TX Channel 42	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	52.58	53.67	74.00	-21.42	34.26	11.17	46.52	100	80	Peak
5150	46.54	47.63	54.00	-7.46	34.26	11.17	46.52	100	80	Average
5210	95.69	96.71	/	/	34.28	11.24	46.54	100	80	Peak
5210	86.53	87.55	/	/	34.28	11.24	46.54	100	80	Average
5350	51.28	52.13	74.00	-22.72	34.34	11.39	46.58	100	80	Peak
5350	45.34	46.19	54.00	-8.66	34.34	11.39	46.58	100	80	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	53.13	54.06	74.00	-20.87	34.42	11.17	46.52	100	15	Peak
5150	46.19	47.12	54.00	-7.81	34.42	11.17	46.52	100	15	Average
5210	94.71	95.54	/	/	34.47	11.24	46.54	100	15	Peak
5210	86.04	86.87	/	/	34.47	11.24	46.54	100	15	Average
5350	51.52	52.13	74.00	-22.48	34.58	11.39	46.58	100	15	Peak
5350	45.65	46.26	54.00	-8.35	34.58	11.39	46.58	100	15	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5210MHz: Fundamental frequency.



**BUREAU
VERITAS**

Test Report No.: W7L-231218W001RF03

802.11ax (160MHz) (RU996):

CHANNEL	TX Channel 50	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	55.20	56.29	74.00	-18.80	34.26	11.17	46.52	100	80	Peak
5150	48.80	49.89	54.00	-5.20	34.26	11.17	46.52	100	80	Average
5250	91.70	92.67	/	/	34.30	11.28	46.55	100	80	Peak
5250	83.23	84.20	/	/	34.30	11.28	46.55	100	80	Average
5350	53.26	54.11	74.00	-20.74	34.34	11.39	46.58	100	80	Peak
5350	47.60	48.45	54.00	-6.40	34.34	11.39	46.58	100	80	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	52.13	53.06	74.00	-21.87	34.42	11.17	46.52	100	355	Peak
5150	46.53	47.46	54.00	-7.47	34.42	11.17	46.52	100	355	Average
5250	90.01	90.78	/	/	34.50	11.28	46.55	100	355	Peak
5250	81.27	82.04	/	/	34.50	11.28	46.55	100	355	Average
5350	53.24	53.85	74.00	-20.76	34.58	11.39	46.58	100	355	Peak
5350	46.62	47.23	54.00	-7.38	34.58	11.39	46.58	100	355	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5250MHz: Fundamental frequency.


802.11ax (20MHz) (RU242):

Worst case harmonic:

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M


	Freq	Level	Read	Limit	Over			
	MHz	dBuV/m	Level	Line	Limit	Factor	Remark	Pol/Phase
			dBuV	dBuV/m	dB	dB/m		
1	10360.000	52.60	44.45	74.00	-21.40	8.15	Peak	Horizontal
2	10360.000	45.43	37.28	54.00	-8.57	8.15	Average	Horizontal
3	PK15535.000	56.31	40.36	74.00	-17.69	15.95	Peak	Horizontal
4	PP15535.000	48.23	32.28	54.00	-5.77	15.95	Average	Horizontal

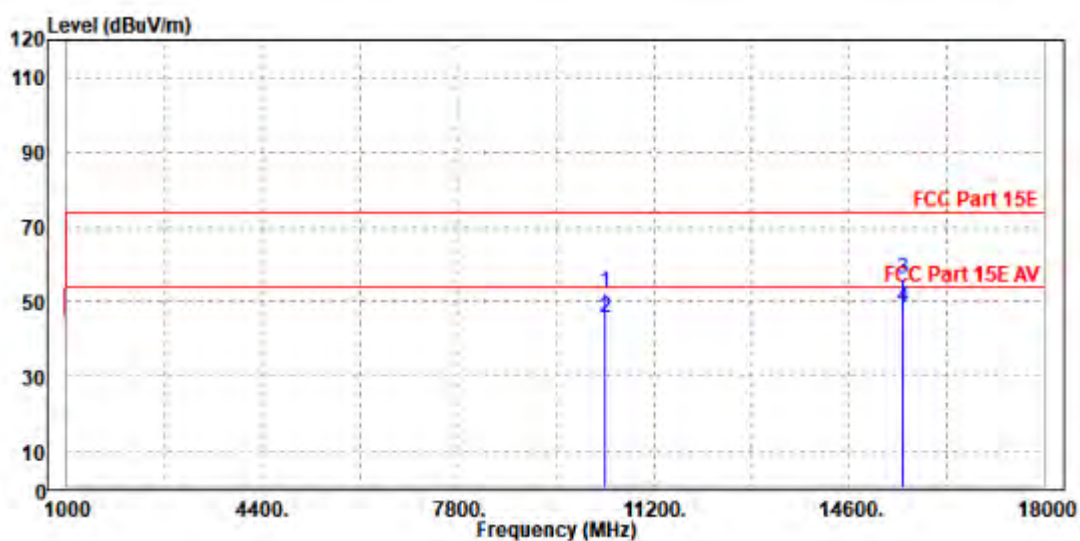



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

	Freq	Level	Read Level	Limit Line	Over- Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	10367.000	52.38	44.03	74.00	-21.62	8.35	Peak	Vertical
2	10367.000	45.14	36.79	54.00	-8.86	8.35	Average	Vertical
3	PK15540.000	56.93	40.83	74.00	-17.07	16.10	Peak	Vertical
4	PP15540.000	48.99	32.89	54.00	-5.01	16.10	Average	Vertical

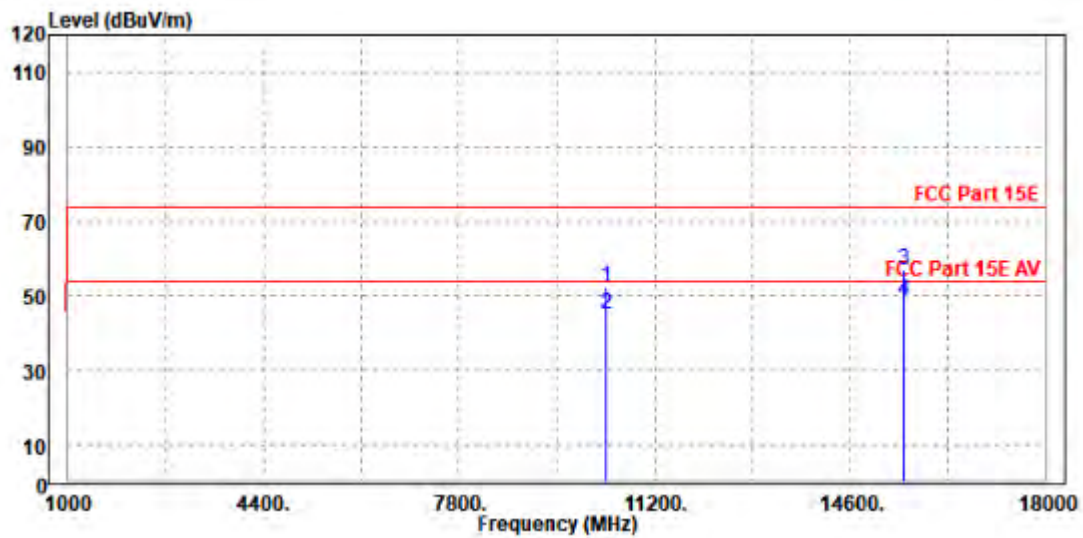

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5180MHz: Fundamental frequency.
3. For frequency above 18GHz, the emission was tested 20db below the limit so the data not recorded in the sheet.



**BUREAU
VERITAS**

Test Report No.: W7L-231218W001RF03

Band 2

802.11a

CHANNEL	TX Channel 52	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	52.44	53.53	74.00	-21.56	34.26	11.17	46.52	100	85	Peak
5150	47.61	48.70	54.00	-6.39	34.26	11.17	46.52	100	85	Average
5260	105.56	106.52	/	/	34.30	11.29	46.55	100	85	Peak
5260	97.38	98.34	/	/	34.30	11.29	46.55	100	85	Average
5350	53.97	54.82	74.00	-20.03	34.34	11.39	46.58	100	85	Peak
5350	47.67	48.52	54.00	-6.33	34.34	11.39	46.58	100	85	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	53.37	54.30	74.00	-20.63	34.42	11.17	46.52	100	105	Peak
5150	47.70	48.63	54.00	-6.30	34.42	11.17	46.52	100	105	Average
5260	102.76	103.51	/	/	34.51	11.29	46.55	100	105	Peak
5260	94.89	95.64	/	/	34.51	11.29	46.55	100	105	Average
5350	53.60	54.21	74.00	-20.40	34.58	11.39	46.58	100	105	Peak
5350	47.20	47.81	54.00	-6.80	34.58	11.39	46.58	100	105	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5260MHz: Fundamental frequency.

CHANNEL	TX Channel 60	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	53.62	54.71	74.00	-20.38	34.26	11.17	46.52	100	85	Peak
5150	47.15	48.24	54.00	-6.85	34.26	11.17	46.52	100	85	Average
5300	106.23	107.13	/	/	34.32	11.34	46.56	100	85	Peak
5300	97.74	98.64	/	/	34.32	11.34	46.56	100	85	Average
5350	52.22	53.07	74.00	-21.78	34.34	11.39	46.58	100	85	Peak
5350	46.84	47.69	54.00	-7.16	34.34	11.39	46.58	100	85	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	54.13	55.06	74.00	-19.87	34.42	11.17	46.52	100	105	Peak
5150	47.53	48.46	54.00	-6.47	34.42	11.17	46.52	100	105	Average
5300	102.36	103.04	/	/	34.54	11.34	46.56	100	105	Peak
5300	95.07	95.75	/	/	34.54	11.34	46.56	100	105	Average
5350	54.32	54.93	74.00	-19.68	34.58	11.39	46.58	100	105	Peak
5350	47.34	47.95	54.00	-6.66	34.58	11.39	46.58	100	105	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5300MHz: Fundamental frequency.



**BUREAU
VERITAS**

Test Report No.: W7L-231218W001RF03

CHANNEL	TX Channel 64	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	52.09	53.18	74.00	-21.91	34.26	11.17	46.52	100	85	Peak
5150	47.12	48.21	54.00	-6.88	34.26	11.17	46.52	100	85	Average
5320	106.36	107.24	/	/	34.33	11.36	46.57	100	85	Peak
5320	97.30	98.18	/	/	34.33	11.36	46.57	100	85	Average
5350	53.78	54.63	74.00	-20.22	34.34	11.39	46.58	100	85	Peak
5350	48.89	49.74	54.00	-5.11	34.34	11.39	46.58	100	85	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	52.33	53.26	74.00	-21.67	34.42	11.17	46.52	100	105	Peak
5150	47.26	48.19	54.00	-6.74	34.42	11.17	46.52	100	105	Average
5320	103.55	104.20	/	/	34.56	11.36	46.57	100	105	Peak
5320	95.58	96.23	/	/	34.56	11.36	46.57	100	105	Average
5350	52.04	52.65	74.00	-21.96	34.58	11.39	46.58	100	105	Peak
5350	47.63	48.24	54.00	-6.37	34.58	11.39	46.58	100	105	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5320MHz: Fundamental frequency.



**BUREAU
VERITAS**

Test Report No.: W7L-231218W001RF03

802.11n (20MHz)

CHANNEL	TX Channel 52	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	54.21	55.30	74.00	-19.79	34.26	11.17	46.52	100	85	Peak
5150	47.43	48.52	54.00	-6.57	34.26	11.17	46.52	100	85	Average
5260	106.88	107.84	/	/	34.30	11.29	46.55	100	85	Peak
5260	98.23	99.19	/	/	34.30	11.29	46.55	100	85	Average
5350	52.33	53.18	74.00	-21.67	34.34	11.39	46.58	100	85	Peak
5350	47.31	48.16	54.00	-6.69	34.34	11.39	46.58	100	85	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	55.44	56.37	74.00	-18.56	34.42	11.17	46.52	100	105	Peak
5150	48.26	49.19	54.00	-5.74	34.42	11.17	46.52	100	105	Average
5260	103.78	104.53	/	/	34.51	11.29	46.55	100	105	Peak
5260	95.92	96.67	/	/	34.51	11.29	46.55	100	105	Average
5350	53.19	53.80	74.00	-20.81	34.58	11.39	46.58	100	105	Peak
5350	47.93	48.54	54.00	-6.07	34.58	11.39	46.58	100	105	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5260MHz: Fundamental frequency.

CHANNEL	TX Channel 60	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	51.44	52.53	74.00	-22.56	34.26	11.17	46.52	100	85	Peak
5150	47.26	48.35	54.00	-6.74	34.26	11.17	46.52	100	85	Average
5300	106.11	107.01	/	/	34.32	11.34	46.56	100	85	Peak
5300	98.61	99.51	/	/	34.32	11.34	46.56	100	85	Average
5350	52.47	53.32	74.00	-21.53	34.34	11.39	46.58	100	85	Peak
5350	47.56	48.41	54.00	-6.44	34.34	11.39	46.58	100	85	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	51.88	52.81	74.00	-22.12	34.42	11.17	46.52	100	105	Peak
5150	47.67	48.60	54.00	-6.33	34.42	11.17	46.52	100	105	Average
5300	102.43	103.11	/	/	34.54	11.34	46.56	100	105	Peak
5300	95.86	96.54	/	/	34.54	11.34	46.56	100	105	Average
5350	53.60	54.21	74.00	-20.40	34.58	11.39	46.58	100	105	Peak
5350	47.57	48.18	54.00	-6.43	34.58	11.39	46.58	100	105	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5300MHz: Fundamental frequency.

CHANNEL	TX Channel 64	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	52.53	53.62	74.00	-21.47	34.26	11.17	46.52	100	85	Peak
5150	47.76	48.85	54.00	-6.24	34.26	11.17	46.52	100	85	Average
5320	105.95	106.83	/	/	34.33	11.36	46.57	100	85	Peak
5320	98.79	99.67	/	/	34.33	11.36	46.57	100	85	Average
5350	54.38	55.23	74.00	-19.62	34.34	11.39	46.58	100	85	Peak
5350	49.66	50.51	54.00	-4.34	34.34	11.39	46.58	100	85	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	52.42	53.35	74.00	-21.58	34.42	11.17	46.52	100	105	Peak
5150	47.32	48.25	54.00	-6.68	34.42	11.17	46.52	100	105	Average
5320	103.47	104.12	/	/	34.56	11.36	46.57	100	105	Peak
5320	96.53	97.18	/	/	34.56	11.36	46.57	100	105	Average
5350	53.88	54.49	74.00	-20.12	34.58	11.39	46.58	100	105	Peak
5350	48.76	49.37	54.00	-5.24	34.58	11.39	46.58	100	105	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5320MHz: Fundamental frequency.



**BUREAU
VERITAS**

Test Report No.: W7L-231218W001RF03

802.11n (40MHz)

CHANNEL	TX Channel 54	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	51.63	52.72	74.00	-22.37	34.26	11.17	46.52	100	80	Peak
5150	46.83	47.92	54.00	-7.17	34.26	11.17	46.52	100	80	Average
5270	99.35	100.30	/	/	34.31	11.30	46.56	100	80	Peak
5270	93.75	94.70	/	/	34.31	11.30	46.56	100	80	Average
5350	52.94	53.79	74.00	-21.06	34.34	11.39	46.58	100	80	Peak
5350	47.24	48.09	54.00	-6.76	34.34	11.39	46.58	100	80	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	52.96	53.89	74.00	-21.04	34.42	11.17	46.52	100	105	Peak
5150	47.72	48.65	54.00	-6.28	34.42	11.17	46.52	100	105	Average
5270	97.90	98.64	/	/	34.52	11.30	46.56	100	105	Peak
5270	91.83	92.57	/	/	34.52	11.30	46.56	100	105	Average
5350	52.55	53.16	74.00	-21.45	34.58	11.39	46.58	100	105	Peak
5350	47.91	48.52	54.00	-6.09	34.58	11.39	46.58	100	105	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5270MHz: Fundamental frequency.

CHANNEL	TX Channel 62	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	51.83	52.92	74.00	-22.17	34.26	11.17	46.52	100	80	Peak
5150	47.77	48.86	54.00	-6.23	34.26	11.17	46.52	100	80	Average
5310	100.56	101.46	/	/	34.32	11.35	46.57	100	80	Peak
5310	95.10	96.00	/	/	34.32	11.35	46.57	100	80	Average
5350	55.33	56.18	74.00	-18.67	34.34	11.39	46.58	100	80	Peak
5350	50.23	51.08	54.00	-3.77	34.34	11.39	46.58	100	80	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	52.75	53.68	74.00	-21.25	34.42	11.17	46.52	100	105	Peak
5150	47.61	48.54	54.00	-6.39	34.42	11.17	46.52	100	105	Average
5310	96.92	97.59	/	/	34.55	11.35	46.57	100	105	Peak
5310	92.03	92.70	/	/	34.55	11.35	46.57	100	105	Average
5350	53.99	54.60	74.00	-20.01	34.58	11.39	46.58	100	105	Peak
5350	48.78	49.39	54.00	-5.22	34.58	11.39	46.58	100	105	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5310MHz: Fundamental frequency.



**BUREAU
VERITAS**

Test Report No.: W7L-231218W001RF03

802.11ax (20MHz)

CHANNEL	TX Channel 52	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	52.05	53.14	74.00	-21.95	34.26	11.17	46.52	100	80	Peak
5150	47.89	48.98	54.00	-6.11	34.26	11.17	46.52	100	80	Average
5260	108.56	109.52	/	/	34.30	11.29	46.55	100	80	Peak
5260	99.57	100.53	/	/	34.30	11.29	46.55	100	80	Average
5350	51.79	52.64	74.00	-22.21	34.34	11.39	46.58	100	80	Peak
5350	46.77	47.62	54.00	-7.23	34.34	11.39	46.58	100	80	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	52.27	53.20	74.00	-21.73	34.42	11.17	46.52	100	105	Peak
5150	47.09	48.02	54.00	-6.91	34.42	11.17	46.52	100	105	Average
5260	105.86	106.61	/	/	34.51	11.29	46.55	100	105	Peak
5260	96.71	97.46	/	/	34.51	11.29	46.55	100	105	Average
5350	52.03	52.64	74.00	-21.97	34.58	11.39	46.58	100	105	Peak
5350	47.34	47.95	54.00	-6.66	34.58	11.39	46.58	100	105	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5260MHz: Fundamental frequency.

CHANNEL	TX Channel 60	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	53.77	54.86	74.00	-20.23	34.26	11.17	46.52	100	80	Peak
5150	47.16	48.25	54.00	-6.84	34.26	11.17	46.52	100	80	Average
5300	108.08	108.98	/	/	34.32	11.34	46.56	100	80	Peak
5300	98.50	99.40	/	/	34.32	11.34	46.56	100	80	Average
5350	53.11	53.96	74.00	-20.89	34.34	11.39	46.58	100	80	Peak
5350	47.49	48.34	54.00	-6.51	34.34	11.39	46.58	100	80	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	52.97	53.90	74.00	-21.03	34.42	11.17	46.52	100	105	Peak
5150	47.37	48.30	54.00	-6.63	34.42	11.17	46.52	100	105	Average
5300	105.88	106.56	/	/	34.54	11.34	46.56	100	105	Peak
5300	96.16	96.84	/	/	34.54	11.34	46.56	100	105	Average
5350	53.42	54.03	74.00	-20.58	34.58	11.39	46.58	100	105	Peak
5350	47.59	48.20	54.00	-6.41	34.58	11.39	46.58	100	105	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5300MHz: Fundamental frequency.

CHANNEL	TX Channel 64	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	53.51	54.60	74.00	-20.49	34.26	11.17	46.52	100	80	Peak
5150	46.94	48.03	54.00	-7.06	34.26	11.17	46.52	100	80	Average
5320	108.71	109.59	/	/	34.33	11.36	46.57	100	80	Peak
5320	99.40	100.28	/	/	34.33	11.36	46.57	100	80	Average
5350	57.11	57.96	74.00	-16.89	34.34	11.39	46.58	100	80	Peak
5350	50.68	51.53	54.00	-3.32	34.34	11.39	46.58	100	80	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	51.87	52.80	74.00	-22.13	34.42	11.17	46.52	100	105	Peak
5150	47.34	48.27	54.00	-6.66	34.42	11.17	46.52	100	105	Average
5320	105.56	106.21	/	/	34.56	11.36	46.57	100	105	Peak
5320	96.60	97.25	/	/	34.56	11.36	46.57	100	105	Average
5350	55.95	56.56	74.00	-18.05	34.58	11.39	46.58	100	105	Peak
5350	49.68	50.29	54.00	-4.32	34.58	11.39	46.58	100	105	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5320MHz: Fundamental frequency.



802.11ax (40MHz)

CHANNEL	TX Channel 54	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	53.00	54.09	74.00	-21.00	34.26	11.17	46.52	100	80	Peak
5150	48.28	49.37	54.00	-5.72	34.26	11.17	46.52	100	80	Average
5270	103.28	104.23	/	/	34.31	11.30	46.56	100	80	Peak
5270	95.32	96.27	/	/	34.31	11.30	46.56	100	80	Average
5350	53.79	54.64	74.00	-20.21	34.34	11.39	46.58	100	80	Peak
5350	47.53	48.38	54.00	-6.47	34.34	11.39	46.58	100	80	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	51.14	52.07	74.00	-22.86	34.42	11.17	46.52	100	105	Peak
5150	48.72	49.65	54.00	-5.28	34.42	11.17	46.52	100	105	Average
5270	101.80	102.54	/	/	34.52	11.30	46.56	100	105	Peak
5270	93.45	94.19	/	/	34.52	11.30	46.56	100	105	Average
5350	51.58	52.19	74.00	-22.42	34.58	11.39	46.58	100	105	Peak
5350	47.31	47.92	54.00	-6.69	34.58	11.39	46.58	100	105	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5270MHz: Fundamental frequency.

CHANNEL	TX Channel 62	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	52.09	53.18	74.00	-21.91	34.26	11.17	46.52	100	85	Peak
5150	47.11	48.20	54.00	-6.89	34.26	11.17	46.52	100	85	Average
5310	100.38	101.28	/	/	34.32	11.35	46.57	100	85	Peak
5310	94.66	95.56	/	/	34.32	11.35	46.57	100	85	Average
5350	54.51	55.36	74.00	-19.49	34.34	11.39	46.58	100	85	Peak
5350	50.99	51.84	54.00	-3.01	34.34	11.39	46.58	100	85	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	52.34	53.27	74.00	-21.66	34.42	11.17	46.52	100	100	Peak
5150	47.37	48.30	54.00	-6.63	34.42	11.17	46.52	100	100	Average
5310	98.01	98.68	/	/	34.55	11.35	46.57	100	100	Peak
5310	92.60	93.27	/	/	34.55	11.35	46.57	100	100	Average
5350	54.45	55.06	74.00	-19.55	34.58	11.39	46.58	100	100	Peak
5350	50.23	50.84	54.00	-3.77	34.58	11.39	46.58	100	100	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5310MHz: Fundamental frequency.



**BUREAU
VERITAS**

Test Report No.: W7L-231218W001RF03

802.11ax (80MHz)

CHANNEL	TX Channel 58	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	49.97	51.06	74.00	-24.03	34.26	11.17	46.52	100	80	Peak
5150	48.37	49.46	54.00	-5.63	34.26	11.17	46.52	100	80	Average
5290	97.74	98.66	/	/	34.32	11.32	46.56	100	80	Peak
5290	90.57	91.49	/	/	34.32	11.32	46.56	100	80	Average
5350	52.11	52.96	74.00	-21.89	34.34	11.39	46.58	100	80	Peak
5350	48.03	48.88	54.00	-5.97	34.34	11.39	46.58	100	80	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	52.01	52.94	74.00	-21.99	34.42	11.17	46.52	100	105	Peak
5150	48.29	49.22	54.00	-5.71	34.42	11.17	46.52	100	105	Average
5290	93.93	94.64	/	/	34.53	11.32	46.56	100	105	Peak
5290	87.69	88.40	/	/	34.53	11.32	46.56	100	105	Average
5350	54.50	55.11	74.00	-19.50	34.58	11.39	46.58	100	105	Peak
5350	48.56	49.17	54.00	-5.44	34.58	11.39	46.58	100	105	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5290MHz: Fundamental frequency.



**BUREAU
VERITAS**

Test Report No.: W7L-231218W001RF03

802.11ac (80MHz)

CHANNEL	TX Channel 58	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	47.15	48.24	74.00	-26.85	34.26	11.17	46.52	100	80	Peak
5150	47.53	48.62	54.00	-6.47	34.26	11.17	46.52	100	80	Average
5290	94.54	95.46	/	/	34.32	11.32	46.56	100	80	Peak
5290	90.57	91.49	/	/	34.32	11.32	46.56	100	80	Average
5350	53.01	53.86	74.00	-20.99	34.34	11.39	46.58	100	80	Peak
5350	48.74	49.59	54.00	-5.26	34.34	11.39	46.58	100	80	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	52.02	52.95	74.00	-21.98	34.42	11.17	46.52	100	105	Peak
5150	48.13	49.06	54.00	-5.87	34.42	11.17	46.52	100	105	Average
5290	92.60	93.31	/	/	34.53	11.32	46.56	100	105	Peak
5290	87.39	88.10	/	/	34.53	11.32	46.56	100	105	Average
5350	53.62	54.23	74.00	-20.38	34.58	11.39	46.58	100	105	Peak
5350	48.85	49.46	54.00	-5.15	34.58	11.39	46.58	100	105	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5290MHz: Fundamental frequency.




802.11ax (40MHz)

Worst case harmonic:

CHANNEL	TX Channel 62	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M


	Freq	Level	Read Level	Limit	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	10622.000	53.50	45.29	74.00	-20.50	8.21	Peak	Horizontal
2	10622.000	45.44	37.23	54.00	-8.56	8.21	Average	Horizontal
3	PK15930.000	56.00	39.68	74.00	-18.00	16.32	Peak	Horizontal
4	PP15930.000	48.50	32.18	54.00	-5.50	16.32	Average	Horizontal

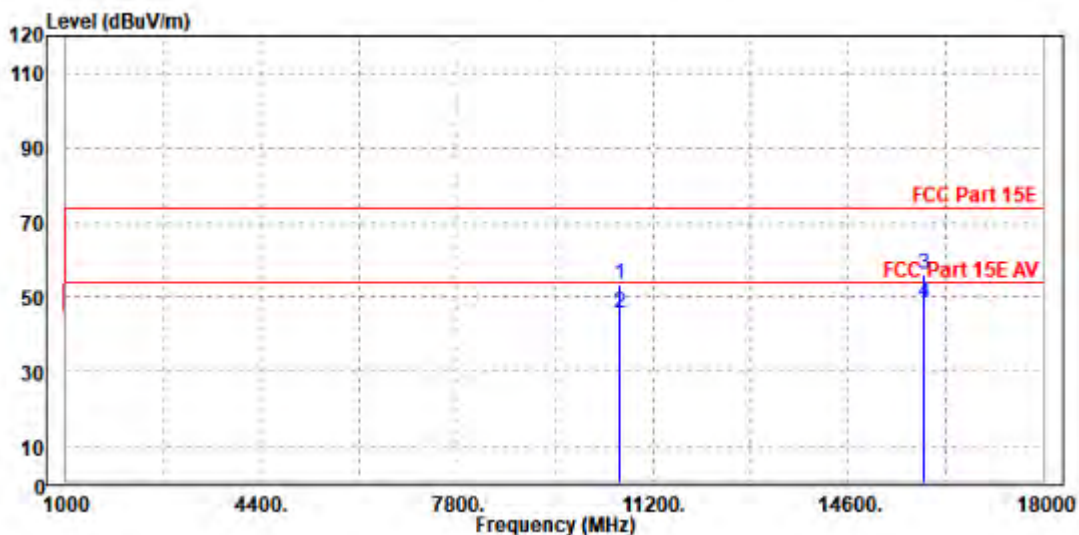



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	10620.000	53.58	45.17	74.00	-20.42	8.41	Peak	Vertical
2	10620.000	45.07	36.66	54.00	-8.93	8.41	Average	Vertical
3	PK15926.000	56.25	39.40	74.00	-17.75	16.85	Peak	Vertical
4	PP15926.000	50.17	33.32	54.00	-3.83	16.85	Average	Vertical

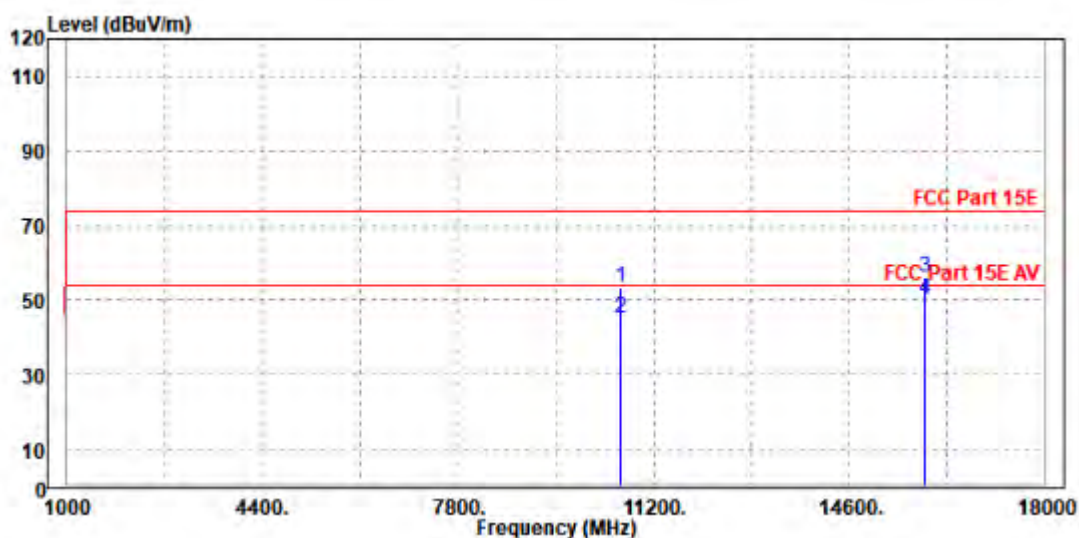

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5310MHz: Fundamental frequency.
3. For frequency above 18GHz, the emission was tested 20db below the limit so the data not recorded in the sheet.



5G WIFI-RU

802.11ax (20MHz) (RU26):

CHANNEL	TX Channel 52	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	51.64	52.73	74.00	-22.36	34.26	11.17	46.52	100	85	Peak
5150	45.57	46.66	54.00	-8.43	34.26	11.17	46.52	100	85	Average
5180	106.77	107.73	/	/	34.30	11.29	46.55	100	85	Peak
5180	99.47	100.43	/	/	34.30	11.29	46.55	100	85	Average
5350	51.36	52.21	74.00	-22.64	34.34	11.39	46.58	100	85	Peak
5350	45.37	46.22	54.00	-8.63	34.34	11.39	46.58	100	85	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	52.12	53.05	74.00	-21.88	34.42	11.17	46.52	100	25	Peak
5150	45.87	46.80	54.00	-8.13	34.42	11.17	46.52	100	25	Average
5260	102.40	103.15	/	/	34.51	11.29	46.55	100	25	Peak
5260	94.24	94.99	/	/	34.51	11.29	46.55	100	25	Average
5350	51.88	52.49	74.00	-22.12	34.58	11.39	46.58	100	25	Peak
5350	45.68	46.29	54.00	-8.32	34.58	11.39	46.58	100	25	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5260MHz: Fundamental frequency.

CHANNEL	TX Channel 60	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	52.45	53.54	74.00	-21.55	34.26	11.17	46.52	100	75	Peak
5150	45.43	46.52	54.00	-8.57	34.26	11.17	46.52	100	75	Average
5300	104.52	105.42	/	/	34.32	11.34	46.56	100	75	Peak
5300	96.60	97.50	/	/	34.32	11.34	46.56	100	75	Average
5350	50.58	51.43	74.00	-23.42	34.34	11.39	46.58	100	75	Peak
5350	45.54	46.39	54.00	-8.46	34.34	11.39	46.58	100	75	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	51.69	52.62	74.00	-22.31	34.42	11.17	46.52	100	100	Peak
5150	45.62	46.55	54.00	-8.38	34.42	11.17	46.52	100	100	Average
5300	103.05	103.73	/	/	34.54	11.34	46.56	100	100	Peak
5300	94.98	95.66	/	/	34.54	11.34	46.56	100	100	Average
5350	51.02	51.63	74.00	-22.98	34.58	11.39	46.58	100	100	Peak
5350	45.78	46.39	54.00	-8.22	34.58	11.39	46.58	100	100	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5300MHz: Fundamental frequency.

CHANNEL	TX Channel 64	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	51.05	52.14	74.00	-22.95	34.26	11.17	46.52	100	85	Peak
5150	45.45	46.54	54.00	-8.55	34.26	11.17	46.52	100	85	Average
5320	106.02	106.90	/	/	34.33	11.36	46.57	100	85	Peak
5320	96.86	97.74	/	/	34.33	11.36	46.57	100	85	Average
5350	53.05	53.90	74.00	-20.95	34.34	11.39	46.58	100	85	Peak
5350	45.69	46.54	54.00	-8.31	34.34	11.39	46.58	100	85	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	50.07	51.00	74.00	-23.93	34.42	11.17	46.52	100	270	Peak
5150	45.72	46.65	54.00	-8.28	34.42	11.17	46.52	100	270	Average
5320	105.18	105.83	/	/	34.56	11.36	46.57	100	270	Peak
5320	96.73	97.38	/	/	34.56	11.36	46.57	100	270	Average
5350	52.59	53.20	74.00	-21.41	34.58	11.39	46.58	100	270	Peak
5350	45.91	46.52	54.00	-8.09	34.58	11.39	46.58	100	270	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5320MHz: Fundamental frequency.



**BUREAU
VERITAS**

Test Report No.: W7L-231218W001RF03

802.11ax (20MHz) (RU52):

CHANNEL	TX Channel 52	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	54.19	55.28	74.00	-19.81	34.26	11.17	46.52	100	85	Peak
5150	45.63	46.72	54.00	-8.37	34.26	11.17	46.52	100	85	Average
5260	106.03	106.99	/	/	34.30	11.29	46.55	100	85	Peak
5260	96.89	97.85	/	/	34.30	11.29	46.55	100	85	Average
5350	50.36	51.21	74.00	-23.64	34.34	11.39	46.58	100	85	Peak
5350	45.59	46.44	54.00	-8.41	34.34	11.39	46.58	100	85	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	53.14	54.07	74.00	-20.86	34.42	11.17	46.52	100	275	Peak
5150	45.85	46.78	54.00	-8.15	34.42	11.17	46.52	100	275	Average
5260	101.47	102.22	/	/	34.51	11.29	46.55	100	275	Peak
5260	92.17	92.92	/	/	34.51	11.29	46.55	100	275	Average
5350	53.22	53.83	74.00	-20.78	34.58	11.39	46.58	100	275	Peak
5350	45.83	46.44	54.00	-8.17	34.58	11.39	46.58	100	275	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5260MHz: Fundamental frequency.

CHANNEL	TX Channel 60	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	52.47	53.56	74.00	-21.53	34.26	11.17	46.52	100	85	Peak
5150	45.57	46.66	54.00	-8.43	34.26	11.17	46.52	100	85	Average
5300	104.33	105.23	/	/	34.32	11.34	46.56	100	85	Peak
5300	96.02	96.92	/	/	34.32	11.34	46.56	100	85	Average
5350	51.09	51.94	74.00	-22.91	34.34	11.39	46.58	100	85	Peak
5350	45.52	46.37	54.00	-8.48	34.34	11.39	46.58	100	85	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	53.65	54.58	74.00	-20.35	34.42	11.17	46.52	100	115	Peak
5150	45.75	46.68	54.00	-8.25	34.42	11.17	46.52	100	115	Average
5300	101.62	102.30	/	/	34.54	11.34	46.56	100	115	Peak
5300	92.83	93.51	/	/	34.54	11.34	46.56	100	115	Average
5350	51.17	51.78	74.00	-22.83	34.58	11.39	46.58	100	115	Peak
5350	45.67	46.28	54.00	-8.33	34.58	11.39	46.58	100	115	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5300MHz: Fundamental frequency.

CHANNEL	TX Channel 64	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	51.97	53.06	74.00	-22.03	34.26	11.17	46.52	100	80	Peak
5150	45.34	46.43	54.00	-8.66	34.26	11.17	46.52	100	80	Average
5320	103.42	104.30	/	/	34.33	11.36	46.57	100	80	Peak
5320	95.79	96.67	/	/	34.33	11.36	46.57	100	80	Average
5350	51.23	52.08	74.00	-22.77	34.34	11.39	46.58	100	80	Peak
5350	45.51	46.36	54.00	-8.49	34.34	11.39	46.58	100	80	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	51.49	52.42	74.00	-22.51	34.42	11.17	46.52	100	260	Peak
5150	45.60	46.53	54.00	-8.40	34.42	11.17	46.52	100	260	Average
5320	102.71	103.36	/	/	34.56	11.36	46.57	100	260	Peak
5320	94.38	95.03	/	/	34.56	11.36	46.57	100	260	Average
5350	50.92	51.53	74.00	-23.08	34.58	11.39	46.58	100	260	Peak
5350	45.51	46.12	54.00	-8.49	34.58	11.39	46.58	100	260	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5320MHz: Fundamental frequency.



Test Report No.: W7L-231218W001RF03

802.11ax (20MHz) (RU106):

CHANNEL	TX Channel 52	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	52.06	53.15	74.00	-21.94	34.26	11.17	46.52	100	90	Peak
5150	45.41	46.50	54.00	-8.59	34.26	11.17	46.52	100	90	Average
5260	103.34	104.30	/	/	34.30	11.29	46.55	100	90	Peak
5260	93.70	94.66	/	/	34.30	11.29	46.55	100	90	Average
5350	51.64	52.49	74.00	-22.36	34.34	11.39	46.58	100	90	Peak
5350	45.41	46.26	54.00	-8.59	34.34	11.39	46.58	100	90	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	51.07	52.00	74.00	-22.93	34.42	11.17	46.52	100	355	Peak
5150	45.40	46.33	54.00	-8.60	34.42	11.17	46.52	100	355	Average
5260	100.44	101.19	/	/	34.51	11.29	46.55	100	355	Peak
5260	90.63	91.38	/	/	34.51	11.29	46.55	100	355	Average
5350	52.53	53.14	74.00	-21.47	34.58	11.39	46.58	100	355	Peak
5350	45.56	46.17	54.00	-8.44	34.58	11.39	46.58	100	355	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5260MHz: Fundamental frequency.

CHANNEL	TX Channel 60	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	51.02	52.11	74.00	-22.98	34.26	11.17	46.52	100	85	Peak
5150	45.30	46.39	54.00	-8.70	34.26	11.17	46.52	100	85	Average
5300	103.39	104.29	/	/	34.32	11.34	46.56	100	85	Peak
5300	93.42	94.32	/	/	34.32	11.34	46.56	100	85	Average
5350	52.12	52.97	74.00	-21.88	34.34	11.39	46.58	100	85	Peak
5350	45.31	46.16	54.00	-8.69	34.34	11.39	46.58	100	85	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	51.78	52.71	74.00	-22.22	34.42	11.17	46.52	100	260	Peak
5150	45.64	46.57	54.00	-8.36	34.42	11.17	46.52	100	260	Average
5300	99.01	99.69	/	/	34.54	11.34	46.56	100	260	Peak
5300	91.09	91.77	/	/	34.54	11.34	46.56	100	260	Average
5350	51.86	52.47	74.00	-22.14	34.58	11.39	46.58	100	260	Peak
5350	45.76	46.37	54.00	-8.24	34.58	11.39	46.58	100	260	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5300MHz: Fundamental frequency.

CHANNEL	TX Channel 64	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	53.59	54.68	74.00	-20.41	34.26	11.17	46.52	100	80	Peak
5150	45.50	46.59	54.00	-8.50	34.26	11.17	46.52	100	80	Average
5320	101.58	102.46	/	/	34.33	11.36	46.57	100	80	Peak
5320	92.73	93.61	/	/	34.33	11.36	46.57	100	80	Average
5350	53.20	54.05	74.00	-20.80	34.34	11.39	46.58	100	80	Peak
5350	45.33	46.18	54.00	-8.67	34.34	11.39	46.58	100	80	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	52.00	52.93	74.00	-22.00	34.42	11.17	46.52	100	270	Peak
5150	45.51	46.44	54.00	-8.49	34.42	11.17	46.52	100	270	Average
5320	99.77	100.42	/	/	34.56	11.36	46.57	100	270	Peak
5320	89.70	90.35	/	/	34.56	11.36	46.57	100	270	Average
5350	52.61	53.22	74.00	-21.39	34.58	11.39	46.58	100	270	Peak
5350	45.58	46.19	54.00	-8.42	34.58	11.39	46.58	100	270	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5320MHz: Fundamental frequency.



Test Report No.: W7L-231218W001RF03

802.11ax (20MHz) (RU242):

CHANNEL	TX Channel 52	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	50.96	52.05	74.00	-23.04	34.26	11.17	46.52	100	90	Peak
5150	45.27	46.36	54.00	-8.73	34.26	11.17	46.52	100	90	Average
5260	104.79	105.75	/	/	34.30	11.29	46.55	100	90	Peak
5260	96.40	97.36	/	/	34.30	11.29	46.55	100	90	Average
5350	54.36	55.21	74.00	-19.64	34.34	11.39	46.58	100	90	Peak
5350	45.22	46.07	54.00	-8.78	34.34	11.39	46.58	100	90	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	52.29	53.22	74.00	-21.71	34.42	11.17	46.52	100	35	Peak
5150	45.48	46.41	54.00	-8.52	34.42	11.17	46.52	100	35	Average
5260	102.67	103.42	/	/	34.51	11.29	46.55	100	35	Peak
5260	94.04	94.79	/	/	34.51	11.29	46.55	100	35	Average
5350	52.65	53.26	74.00	-21.35	34.58	11.39	46.58	100	35	Peak
5350	45.54	46.15	54.00	-8.46	34.58	11.39	46.58	100	35	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5260MHz: Fundamental frequency.

CHANNEL	TX Channel 60	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	52.56	53.65	74.00	-21.44	34.26	11.17	46.52	100	85	Peak
5150	45.48	46.57	54.00	-8.52	34.26	11.17	46.52	100	85	Average
5300	104.42	105.32	/	/	34.32	11.34	46.56	100	85	Peak
5300	96.85	97.75	/	/	34.32	11.34	46.56	100	85	Average
5350	51.59	52.44	74.00	-22.41	34.34	11.39	46.58	100	85	Peak
5350	45.98	46.83	54.00	-8.02	34.34	11.39	46.58	100	85	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	51.62	52.55	74.00	-22.38	34.42	11.17	46.52	100	110	Peak
5150	45.76	46.69	54.00	-8.24	34.42	11.17	46.52	100	110	Average
5300	102.75	103.43	/	/	34.54	11.34	46.56	100	110	Peak
5300	93.20	93.88	/	/	34.54	11.34	46.56	100	110	Average
5350	52.32	52.93	74.00	-21.68	34.58	11.39	46.58	100	110	Peak
5350	45.64	46.25	54.00	-8.36	34.58	11.39	46.58	100	110	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5300MHz: Fundamental frequency.

CHANNEL	TX Channel 64	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	51.68	52.77	74.00	-22.32	34.26	11.17	46.52	100	80	Peak
5150	45.39	46.48	54.00	-8.61	34.26	11.17	46.52	100	80	Average
5320	105.08	105.96	/	/	34.33	11.36	46.57	100	80	Peak
5320	95.71	96.59	/	/	34.33	11.36	46.57	100	80	Average
5350	54.77	55.62	74.00	-19.23	34.34	11.39	46.58	100	80	Peak
5350	47.75	48.60	54.00	-6.25	34.34	11.39	46.58	100	80	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	50.16	51.09	74.00	-23.84	34.42	11.17	46.52	100	345	Peak
5150	45.72	46.65	54.00	-8.28	34.42	11.17	46.52	100	345	Average
5320	102.95	103.60	/	/	34.56	11.36	46.57	100	345	Peak
5320	94.85	95.50	/	/	34.56	11.36	46.57	100	345	Average
5350	55.29	55.90	74.00	-18.71	34.58	11.39	46.58	100	345	Peak
5350	47.35	47.96	54.00	-6.65	34.58	11.39	46.58	100	345	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5320MHz: Fundamental frequency.



Test Report No.: W7L-231218W001RF03

802.11ax (40MHz) (RU484):

CHANNEL	TX Channel 54	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	52.58	53.67	74.00	-21.42	34.26	11.17	46.52	100	70	Peak
5150	45.72	46.81	54.00	-8.28	34.26	11.17	46.52	100	70	Average
5270	101.70	102.65	/	/	34.31	11.30	46.56	100	70	Peak
5270	93.81	94.76	/	/	34.31	11.30	46.56	100	70	Average
5350	53.49	54.34	74.00	-20.51	34.34	11.39	46.58	100	70	Peak
5350	45.62	46.47	54.00	-8.38	34.34	11.39	46.58	100	70	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	51.67	52.60	74.00	-22.33	34.42	11.17	46.52	100	250	Peak
5150	45.51	46.44	54.00	-8.49	34.42	11.17	46.52	100	250	Average
5270	99.41	100.15	/	/	34.52	11.30	46.56	100	250	Peak
5270	91.20	91.94	/	/	34.52	11.30	46.56	100	250	Average
5350	51.89	52.50	74.00	-22.11	34.58	11.39	46.58	100	250	Peak
5350	45.71	46.32	54.00	-8.29	34.58	11.39	46.58	100	250	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5270MHz: Fundamental frequency.

CHANNEL	TX Channel 62	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	52.92	54.01	74.00	-21.08	34.26	11.17	46.52	100	80	Peak
5150	45.64	46.73	54.00	-8.36	34.26	11.17	46.52	100	80	Average
5310	101.89	102.79	/	/	34.32	11.35	46.57	100	80	Peak
5310	92.34	93.24	/	/	34.32	11.35	46.57	100	80	Average
5350	54.58	55.43	74.00	-19.42	34.34	11.39	46.58	100	80	Peak
5350	50.51	51.36	54.00	-3.49	34.34	11.39	46.58	100	80	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	52.13	53.06	74.00	-21.87	34.42	11.17	46.52	100	355	Peak
5150	45.71	46.64	54.00	-8.29	34.42	11.17	46.52	100	355	Average
5310	100.69	101.36	/	/	34.55	11.35	46.57	100	355	Peak
5310	91.94	92.61	/	/	34.55	11.35	46.57	100	355	Average
5350	55.69	56.30	74.00	-18.31	34.58	11.39	46.58	100	355	Peak
5350	48.00	48.61	54.00	-6.00	34.58	11.39	46.58	100	355	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5310MHz: Fundamental frequency.



**BUREAU
VERITAS**

Test Report No.: W7L-231218W001RF03

802.11ax (80MHz) (RU996):

CHANNEL	TX Channel 58	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	51.59	52.68	74.00	-22.41	34.26	11.17	46.52	100	80	Peak
5150	45.75	46.84	54.00	-8.25	34.26	11.17	46.52	100	80	Average
5290	95.40	96.32	/	/	34.32	11.32	46.56	100	80	Peak
5290	88.06	88.98	/	/	34.32	11.32	46.56	100	80	Average
5350	52.97	53.82	74.00	-21.03	34.34	11.39	46.58	100	80	Peak
5350	46.19	47.04	54.00	-7.81	34.34	11.39	46.58	100	80	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5150	49.34	50.27	74.00	-24.66	34.42	11.17	46.52	100	345	Peak
5150	45.93	46.86	54.00	-8.07	34.42	11.17	46.52	100	345	Average
5290	93.87	94.58	/	/	34.53	11.32	46.56	100	345	Peak
5290	86.18	86.89	/	/	34.53	11.32	46.56	100	345	Average
5350	51.65	52.26	74.00	-22.35	34.58	11.39	46.58	100	345	Peak
5350	46.19	46.80	54.00	-7.81	34.58	11.39	46.58	100	345	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5290MHz: Fundamental frequency.



Test Report No.: W7L-231218W001RF03


802.11ax (40MHz) (RU484):

Worst case harmonic:

CHANNEL	TX Channel 62	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	10622.000	53.17	44.96	74.00	-20.83	8.21	Peak	Horizontal
2	10622.000	45.63	37.42	54.00	-8.37	8.21	Average	Horizontal
3	PK15930.000	56.20	39.88	74.00	-17.80	16.32	Peak	Horizontal
4	PP15930.000	49.67	33.35	54.00	-4.33	16.32	Average	Horizontal

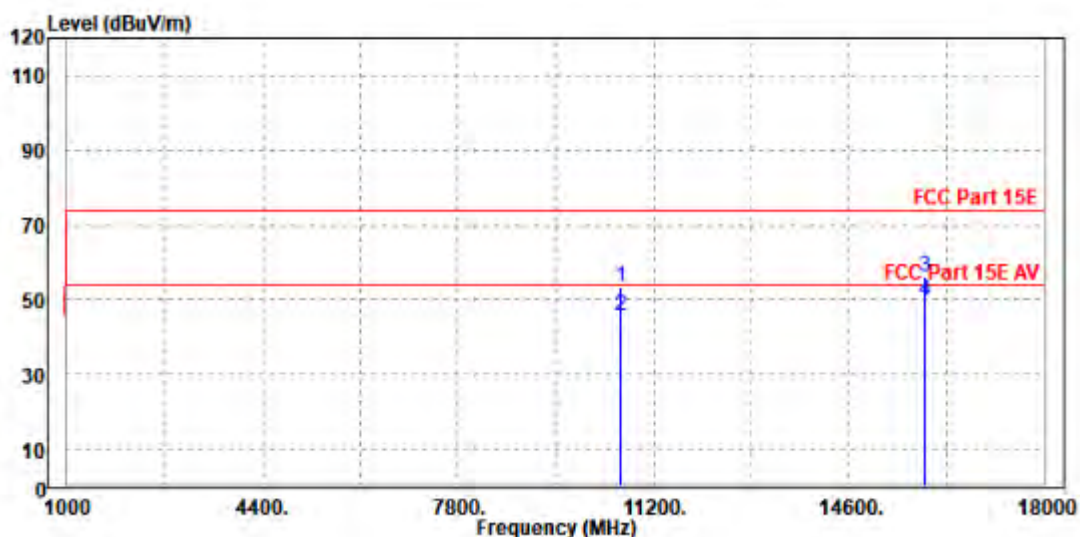



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	10620.000	52.60	44.19	74.00	-21.40	8.41	Peak	Vertical
2	10620.000	45.27	36.86	54.00	-8.73	8.41	Average	Vertical
3	PK15926.000	56.82	39.97	74.00	-17.18	16.85	Peak	Vertical
4	PP15926.000	49.09	32.24	54.00	-4.91	16.85	Average	Vertical

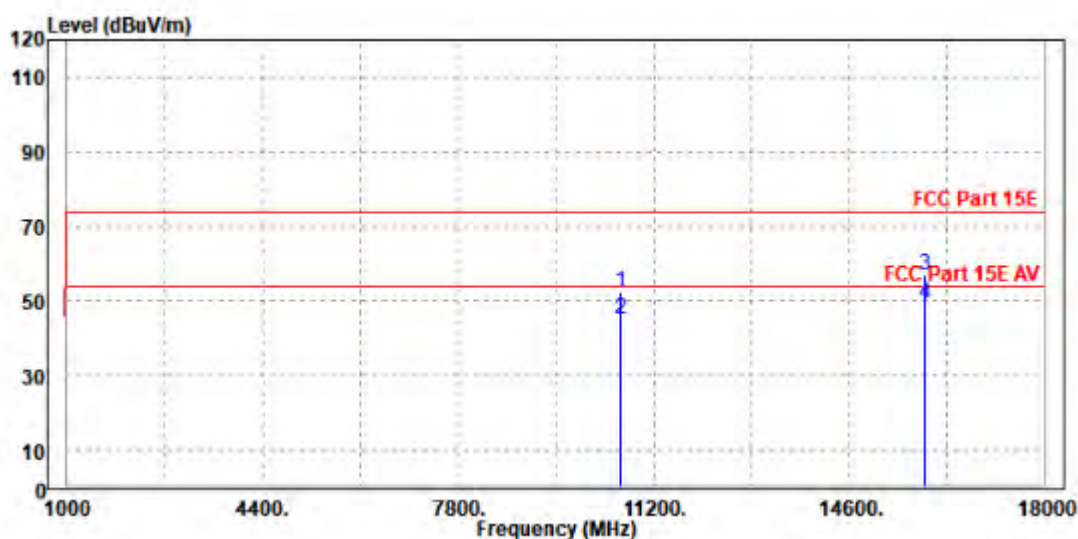

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5310MHz: Fundamental frequency.
3. For frequency above 18GHz, the emission was tested 20db below the limit so the data not recorded in the sheet.



Test Report No.: W7L-231218W001RF03

Band 3

802.11a

CHANNEL	TX Channel 100	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	56.57	57.28	74	-17.43	34.38	11.52	46.61	100	80	Peak
5460	48.86	49.57	54	-5.14	34.38	11.52	46.61	100	80	Average
5470	60.39	61.08	68.2	-7.81	34.39	11.53	46.61	100	80	Peak
5500	99.51	100.17	/	/	34.4	11.56	46.62	100	80	Peak
5500	92.4	93.06	/	/	34.4	11.56	46.62	100	80	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	53.16	53.58	74	-20.84	34.67	11.52	46.61	100	260	Peak
5460	47.8	48.22	54	-6.2	34.67	11.52	46.61	100	260	Average
5470	57.16	57.56	68.2	-11.04	34.68	11.53	46.61	100	260	Peak
5500	103.04	103.4	/	/	34.7	11.56	46.62	100	260	Peak
5500	96.01	96.37	/	/	34.7	11.56	46.62	100	260	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5500MHz: Fundamental frequency.
3. #: Out of restricted band.

CHANNEL	TX Channel 116	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	55.39	55.81	74	-18.61	34.67	11.52	46.61	100	265	Peak
5460	48.49	48.91	54	-5.51	34.67	11.52	46.61	100	265	Average
5470	54.16	54.56	68.2	-14.04	34.68	11.53	46.61	100	265	Peak
5580	103.84	104.06	/	/	34.83	11.59	46.64	100	265	Peak
5580	96.77	96.99	/	/	34.83	11.59	46.64	100	265	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	55.55	56.26	74	-18.45	34.38	11.52	46.61	100	85	Peak
5460	48.16	48.87	54	-5.84	34.38	11.52	46.61	100	85	Average
5470	54.49	55.18	68.2	-13.71	34.39	11.53	46.61	100	85	Peak
5580	101.17	101.68	/	/	34.54	11.59	46.64	100	85	Peak
5580	93.89	94.4	/	/	34.54	11.59	46.64	100	85	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5580MHz: Fundamental frequency.
- #: Out of restricted band.



**BUREAU
VERITAS**

Test Report No.: W7L-231218W001RF03

CHANNEL	TX Channel 140	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5700	102.94	103.22	/	/	34.76	11.64	46.68	100	85	Peak
5700	94.89	95.17	/	/	34.76	11.64	46.68	100	85	Average
5725	59.44	59.66	68.2	-8.76	34.81	11.65	46.68	100	85	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5700	102.18	102.2	/	/	35.02	11.64	46.68	100	260	Peak
5700	95.96	95.98	/	/	35.02	11.64	46.68	100	260	Average
5725	55.42	55.39	68.2	-12.78	35.06	11.65	46.68	100	260	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5700MHz: Fundamental frequency.
3. #: Out of restricted band.



**BUREAU
VERITAS**

Test Report No.: W7L-231218W001RF03

CHANNEL	TX Channel 144	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5470	53.61	54.3	68.2	-14.59	34.39	11.53	46.61	100	85	Peak
5720	101.13	101.37	/	/	34.8	11.64	46.68	100	85	Peak
5720	94.89	95.13	/	/	34.8	11.64	46.68	100	85	Average
5850	54.62	54.62	68.2	-13.58	35.03	11.69	46.72	100	85	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5470	54.4	54.8	68.2	-13.8	34.68	11.53	46.61	100	260	Peak
5720	102.58	102.57	/	/	35.05	11.64	46.68	100	260	Peak
5720	96.71	96.7	/	/	35.05	11.64	46.68	100	260	Average
5850	55.26	55.03	68.2	-12.94	35.26	11.69	46.72	100	260	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5720MHz: Fundamental frequency.
3. #: Out of restricted band.



**BUREAU
VERITAS**

Test Report No.: W7L-231218W001RF03

802.11n (20MHz)

CHANNEL	TX Channel 100	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	56.93	57.64	74	-17.07	34.38	11.52	46.61	100	70	Peak
5460	48.72	49.43	54	-5.28	34.38	11.52	46.61	100	70	Average
5470	63.42	64.11	68.2	-4.78	34.39	11.53	46.61	100	70	Peak
5500	105.21	105.87	/	/	34.4	11.56	46.62	100	70	Peak
5500	97.81	98.47	/	/	34.4	11.56	46.62	100	70	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	54.93	55.35	74	-19.07	34.67	11.52	46.61	100	260	Peak
5460	48.21	48.63	54	-5.79	34.67	11.52	46.61	100	260	Average
5470	56.07	56.47	68.2	-12.13	34.68	11.53	46.61	100	260	Peak
5500	103.11	103.47	/	/	34.7	11.56	46.62	100	260	Peak
5500	96.32	96.68	/	/	34.7	11.56	46.62	100	260	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5500MHz: Fundamental frequency.
3. #: Out of restricted band.

CHANNEL	TX Channel 116	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	54.42	55.13	74	-19.58	34.38	11.52	46.61	100	85	Peak
5460	47.96	48.67	54	-6.04	34.38	11.52	46.61	100	85	Average
5470	52.49	53.18	68.2	-15.71	34.39	11.53	46.61	100	85	Peak
5580	103.87	104.38	/	/	34.54	11.59	46.64	100	85	Peak
5580	96.2	96.71	/	/	34.54	11.59	46.64	100	85	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	53.74	54.16	74	-20.26	34.67	11.52	46.61	100	255	Peak
5460	47.03	47.45	54	-6.97	34.67	11.52	46.61	100	255	Average
5470	53.83	54.23	68.2	-14.37	34.68	11.53	46.61	100	255	Peak
5580	105.4	105.62	/	/	34.83	11.59	46.64	100	255	Peak
5580	97.79	98.01	/	/	34.83	11.59	46.64	100	255	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5580MHz: Fundamental frequency.
- #: Out of restricted band.



**BUREAU
VERITAS**

Test Report No.: W7L-231218W001RF03

CHANNEL	TX Channel 140	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5700	102.53	102.81	/	/	34.76	11.64	46.68	100	85	Peak
5700	95.86	96.14	/	/	34.76	11.64	46.68	100	85	Average
5725	61.95	62.17	68.2	-6.25	34.81	11.65	46.68	100	85	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5700	101.37	101.39	/	/	35.02	11.64	46.68	100	285	Peak
5700	95.36	95.38	/	/	35.02	11.64	46.68	100	285	Average
5725	55.58	55.55	68.2	-12.62	35.06	11.65	46.68	100	285	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5700MHz: Fundamental frequency.
3. #: Out of restricted band.



CHANNEL	TX Channel 144	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5470	54.51	55.2	68.2	-13.69	34.39	11.53	46.61	100	85	Peak
5720	102.2	102.44	/	/	34.8	11.64	46.68	100	85	Average
5720	96.07	96.31	/	/	34.8	11.64	46.68	100	85	Peak
5850	56.11	56.11	68.2	-12.09	35.03	11.69	46.72	100	85	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5470	55.5	55.9	68.2	-12.7	34.68	11.53	46.61	100	260	Peak
5720	103.38	103.37	/	/	35.05	11.64	46.68	100	260	Average
5720	98.22	98.21	/	/	35.05	11.64	46.68	100	260	Peak
5850	55.82	55.59	68.2	-12.38	35.26	11.69	46.72	100	260	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5720MHz: Fundamental frequency.
3. #: Out of restricted band.

802.11n (40MHz)

CHANNEL	TX Channel 102	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	54.5	55.21	74	-19.5	34.38	11.52	46.61	100	70	Peak
5460	50.12	50.83	54	-3.88	34.38	11.52	46.61	100	70	Average
5470	54.43	55.12	68.2	-13.77	34.39	11.53	46.61	100	70	Peak
5510	96.98	97.62	/	/	34.42	11.56	46.62	100	70	Peak
5510	92.84	93.48	/	/	34.42	11.56	46.62	100	70	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	53.14	53.56	74	-20.86	34.67	11.52	46.61	100	270	Peak
5460	48.41	48.83	54	-5.59	34.67	11.52	46.61	100	270	Average
5470	53.98	54.38	68.2	-14.22	34.68	11.53	46.61	100	270	Peak
5510	96.94	97.28	/	/	34.72	11.56	46.62	100	270	Peak
5510	92.9	93.24	/	/	34.72	11.56	46.62	100	270	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5510MHz: Fundamental frequency.
3. #: Out of restricted band.

CHANNEL	TX Channel 110	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	51.94	52.65	74	-22.06	34.38	11.52	46.61	100	70	Peak
5460	48.09	48.8	54	-5.91	34.38	11.52	46.61	100	70	Average
5470	51.33	52.02	68.2	-16.87	34.39	11.53	46.61	100	70	Peak
5550	97.02	97.58	/	/	34.49	11.58	46.63	100	70	Peak
5550	93.15	93.71	/	/	34.49	11.58	46.63	100	70	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	49.93	50.35	74	-24.07	34.67	11.52	46.61	100	260	Peak
5460	48.95	49.37	54	-5.05	34.67	11.52	46.61	100	260	Average
5470	51.73	52.13	68.2	-16.47	34.68	11.53	46.61	100	260	Peak
5550	97.97	98.24	/	/	34.78	11.58	46.63	100	260	Peak
5550	93.6	93.87	/	/	34.78	11.58	46.63	100	260	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5500MHz: Fundamental frequency.
3. #: Out of restricted band.

CHANNEL	TX Channel 134	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5670	95.59	95.93	/	/	34.71	11.62	46.67	100	85	Peak
5670	91.99	92.33	/	/	34.71	11.62	46.67	100	85	Average
5725	53.58	53.8	68.2	-14.62	34.81	11.65	46.68	100	85	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5670	97.59	97.67	/	/	34.97	11.62	46.67	100	255	Peak
5670	94.14	94.22	/	/	34.97	11.62	46.67	100	255	Average
5725	52.62	52.59	68.2	-15.58	35.06	11.65	46.68	100	255	Peak

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5670MHz: Fundamental frequency.
- #: Out of restricted band.



CHANNEL	TX Channel 142	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5470	51.37	52.06	68.2	-16.83	34.39	11.53	46.61	100	75	Peak
5710	95	95.26	/	/	34.78	11.64	46.68	100	75	Peak
5710	91.74	92	/	/	34.78	11.64	46.68	100	75	Average
5850	52.12	52.12	68.2	-16.08	35.03	11.69	46.72	100	75	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5470	52.24	52.64	68.2	-15.96	34.68	11.53	46.61	100	260	Peak
5710	96.71	96.71	/	/	35.04	11.64	46.68	100	260	Peak
5710	93.17	93.17	/	/	35.04	11.64	46.68	100	260	Average
5850	52.87	52.64	68.2	-15.33	35.26	11.69	46.72	100	260	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5710MHz: Fundamental frequency.
3. #: Out of restricted band.

802.11ax (20MHz)

CHANNEL	TX Channel 100	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	54.63	55.34	74	-19.37	34.38	11.52	46.61	100	70	Peak
5460	49.75	50.46	54	-4.25	34.38	11.52	46.61	100	70	Average
5470	63.04	63.73	68.2	-5.16	34.39	11.53	46.61	100	70	Peak
5500	105.64	106.3	/	/	34.4	11.56	46.62	100	70	Peak
5500	97.05	97.71	/	/	34.4	11.56	46.62	100	70	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	52.4	52.82	74	-21.6	34.67	11.52	46.61	100	260	Peak
5460	47.41	47.83	54	-6.59	34.67	11.52	46.61	100	260	Average
5470	57.43	57.83	68.2	-10.77	34.68	11.53	46.61	100	260	Peak
5500	105.29	105.65	/	/	34.7	11.56	46.62	100	260	Peak
5500	96.16	96.52	/	/	34.7	11.56	46.62	100	260	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5500MHz: Fundamental frequency.
3. #: Out of restricted band.

CHANNEL	TX Channel 116	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	51.75	52.46	74	-22.25	34.38	11.52	46.61	100	70	Peak
5460	47.32	48.03	54	-6.68	34.38	11.52	46.61	100	70	Average
5470	51.69	52.38	68.2	-16.51	34.39	11.53	46.61	100	70	Peak
5580	105.33	105.84	/	/	34.54	11.59	46.64	100	70	Peak
5580	96.69	97.2	/	/	34.54	11.59	46.64	100	70	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	53.63	54.05	74	-20.37	34.67	11.52	46.61	100	260	Peak
5460	47.42	47.84	54	-6.58	34.67	11.52	46.61	100	260	Average
5470	52.97	53.37	68.2	-15.23	34.68	11.53	46.61	100	260	Peak
5580	104.99	105.21	/	/	34.83	11.59	46.64	100	260	Peak
5580	96.31	96.53	/	/	34.83	11.59	46.64	100	260	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5580MHz: Fundamental frequency.
3. #: Out of restricted band.



CHANNEL	TX Channel 140	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5700	105.33	105.61	/	/	34.76	11.64	46.68	100	85	Peak
5700	95.65	95.93	/	/	34.76	11.64	46.68	100	85	Average
5725	63.36	63.58	68.2	-4.84	34.81	11.65	46.68	100	85	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5700	105.09	105.11	/	/	35.02	11.64	46.68	100	260	Peak
5700	95.18	95.2	/	/	35.02	11.64	46.68	100	260	Average
5725	60.25	60.22	68.2	-7.95	35.06	11.65	46.68	100	260	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5700MHz: Fundamental frequency.
3. #: Out of restricted band.



**BUREAU
VERITAS**

Test Report No.: W7L-231218W001RF03

CHANNEL	TX Channel 144	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5470	53.83	54.52	68.2	-14.37	34.39	11.53	46.61	100	85	Peak
5720	104.53	104.77	/	/	34.8	11.64	46.68	100	85	Peak
5720	95.47	95.71	/	/	34.8	11.64	46.68	100	85	Average
5850	54.72	54.72	68.2	-13.48	35.03	11.69	46.72	100	85	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5470	54.23	54.63	68.2	-13.97	34.68	11.53	46.61	100	260	Peak
5720	105.72	105.71	/	/	35.05	11.64	46.68	100	260	Peak
5720	96.47	96.46	/	/	35.05	11.64	46.68	100	260	Average
5850	53.53	53.3	68.2	-14.67	35.26	11.69	46.72	100	260	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5720MHz: Fundamental frequency.
3. #: Out of restricted band.

802.11ax (40MHz)

CHANNEL	TX Channel 102	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	56.42	57.13	74	-17.58	34.38	11.52	46.61	100	70	Peak
5460	50.61	51.32	54	-3.39	34.38	11.52	46.61	100	70	Average
5470	57.86	58.55	68.2	-10.34	34.39	11.53	46.61	100	70	Peak
5510	97.61	98.25	/	/	34.42	11.56	46.62	100	70	Peak
5510	93.16	93.8	/	/	34.42	11.56	46.62	100	70	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	52.48	52.9	74	-21.52	34.67	11.52	46.61	100	260	Peak
5460	48.08	48.5	54	-5.92	34.67	11.52	46.61	100	260	Average
5470	54.38	54.78	68.2	-13.82	34.68	11.53	46.61	100	260	Peak
5510	98.69	99.03	/	/	34.72	11.56	46.62	100	260	Peak
5510	93.9	94.24	/	/	34.72	11.56	46.62	100	260	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5510MHz: Fundamental frequency.
3. #: Out of restricted band.

CHANNEL	TX Channel 110	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	52.35	53.06	74	-21.65	34.38	11.52	46.61	100	70	Peak
5460	47.59	48.3	54	-6.41	34.38	11.52	46.61	100	70	Average
5470	53.9	54.59	68.2	-14.3	34.39	11.53	46.61	100	70	Peak
5550	98.88	99.44	/	/	34.49	11.58	46.63	100	70	Peak
5550	95.23	95.79	/	/	34.49	11.58	46.63	100	70	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	52.16	52.58	74	-21.84	34.67	11.52	46.61	100	260	Peak
5460	48.04	48.46	54	-5.96	34.67	11.52	46.61	100	260	Average
5470	52.04	52.44	68.2	-16.16	34.68	11.53	46.61	100	260	Peak
5550	101.25	101.52	/	/	34.78	11.58	46.63	100	260	Peak
5550	95.25	95.52	/	/	34.78	11.58	46.63	100	260	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5500MHz: Fundamental frequency.
3. #: Out of restricted band.



**BUREAU
VERITAS**

Test Report No.: W7L-231218W001RF03

CHANNEL	TX Channel 134	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5670	99.37	99.71	/	/	34.71	11.62	46.67	100	70	Peak
5670	94.83	95.17	/	/	34.71	11.62	46.67	100	70	Average
5725	56.4	56.62	68.2	-11.8	34.81	11.65	46.68	100	70	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5670	100.45	100.53	/	/	34.97	11.62	46.67	100	260	Peak
5670	95.78	95.86	/	/	34.97	11.62	46.67	100	260	Average
5725	56.93	56.9	68.2	-11.27	35.06	11.65	46.68	100	260	Peak

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5670MHz: Fundamental frequency.
- #: Out of restricted band.



**BUREAU
VERITAS**

Test Report No.: W7L-231218W001RF03

CHANNEL	TX Channel 142	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5470	51.59	52.28	68.2	-16.61	34.39	11.53	46.61	100	70	Peak
5710	99.69	99.95	/	/	34.78	11.64	46.68	100	70	Peak
5710	94.49	94.75	/	/	34.78	11.64	46.68	100	70	Average
5850	51.96	51.96	68.2	-16.24	35.03	11.69	46.72	100	70	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5470	52.44	52.84	68.2	-15.76	34.68	11.53	46.61	100	260	Peak
5710	101	101	/	/	35.04	11.64	46.68	100	260	Peak
5710	95.28	95.28	/	/	35.04	11.64	46.68	100	260	Average
5850	52.96	52.73	68.2	-15.24	35.26	11.69	46.72	100	260	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5710MHz: Fundamental frequency.
3. #: Out of restricted band.



802.11ax (80MHz)

CHANNEL	TX Channel 106	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	53.14	53.85	74	-20.86	34.38	11.52	46.61	100	70	Peak
5460	48.15	48.86	54	-5.85	34.38	11.52	46.61	100	70	Average
5470	52.41	53.1	68.2	-15.79	34.39	11.53	46.61	100	70	Peak
5530	91.81	92.42	/	/	34.45	11.57	46.63	100	70	Peak
5530	87.56	88.17	/	/	34.45	11.57	46.63	100	70	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	52.54	52.96	74	-21.46	34.67	11.52	46.61	100	265	Peak
5460	48.31	48.73	54	-5.69	34.67	11.52	46.61	100	265	Average
5470	51.95	52.35	68.2	-16.25	34.68	11.53	46.61	100	265	Peak
5530	94.45	94.76	/	/	34.75	11.57	46.63	100	265	Peak
5530	89.2	89.51	/	/	34.75	11.57	46.63	100	265	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5530MHz: Fundamental frequency.
3. #: Out of restricted band.

CHANNEL	TX Channel 122	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	52.45	53.16	74	-21.55	34.38	11.52	46.61	100	70	Peak
5460	47.65	48.36	54	-6.35	34.38	11.52	46.61	100	70	Average
5470	51.8	52.49	68.2	-16.4	34.39	11.53	46.61	100	70	Peak
5610	91.91	92.36	/	/	34.6	11.6	46.65	100	70	Peak
5610	88.11	88.56	/	/	34.6	11.6	46.65	100	70	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	51.86	52.28	74	-22.14	34.67	11.52	46.61	100	265	Peak
5460	48.1	48.52	54	-5.9	34.67	11.52	46.61	100	265	Average
5470	50.91	51.31	68.2	-17.29	34.68	11.53	46.61	100	265	Peak
5610	93.51	93.68	/	/	34.88	11.6	46.65	100	265	Peak
5610	89.77	89.94	/	/	34.88	11.6	46.65	100	265	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5610MHz: Fundamental frequency.
3. #: Out of restricted band.

CHANNEL	TX Channel 138	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5470	52.9	53.59	68.2	-15.3	34.39	11.53	46.61	100	70	Peak
5690	92.38	92.68	/	/	34.74	11.63	46.67	100	70	Peak
5690	88.11	88.41	/	/	34.74	11.63	46.67	100	70	Average
5850	52.85	52.85	68.2	-15.35	35.03	11.69	46.72	100	70	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5470	52.75	53.15	68.2	-15.45	34.68	11.53	46.61	100	265	Peak
5690	93.67	93.71	/	/	35	11.63	46.67	100	265	Average
5690	88.71	88.75	/	/	35	11.63	46.67	100	265	Peak
5850	52.72	52.49	68.2	-15.48	35.26	11.69	46.72	100	265	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5690MHz: Fundamental frequency.
3. #: Out of restricted band.



802.11ac(80MHz)

CHANNEL	TX Channel 106	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	53.36	54.07	74	-20.64	34.38	11.52	46.61	100	75	Peak
5460	49.3	50.01	54	-4.7	34.38	11.52	46.61	100	75	Average
5470	53.15	53.84	68.2	-15.05	34.39	11.53	46.61	100	75	Peak
5530	91.19	91.8	/	/	34.45	11.57	46.63	100	75	Peak
5530	87.09	87.7	/	/	34.45	11.57	46.63	100	75	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	55.4	55.82	74	-18.6	34.67	11.52	46.61	100	255	Peak
5460	49.34	49.76	54	-4.66	34.67	11.52	46.61	100	255	Average
5470	51.25	51.65	68.2	-16.95	34.68	11.53	46.61	100	255	Peak
5530	93.85	94.16	/	/	34.75	11.57	46.63	100	255	Peak
5530	90.86	91.17	/	/	34.75	11.57	46.63	100	255	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5530MHz: Fundamental frequency.
3. #: Out of restricted band.

CHANNEL	TX Channel 122	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	52.75	53.46	74	-21.25	34.38	11.52	46.61	100	75	Peak
5460	47.57	48.28	54	-6.43	34.38	11.52	46.61	100	75	Average
5470	50.46	51.15	68.2	-17.74	34.39	11.53	46.61	100	75	Peak
5610	90.48	90.93	/	/	34.6	11.6	46.65	100	75	Peak
5610	87.92	88.37	/	/	34.6	11.6	46.65	100	75	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	52.66	53.08	74	-21.34	34.67	11.52	46.61	100	255	Peak
5460	48.69	49.11	54	-5.31	34.67	11.52	46.61	100	255	Average
5470	52.07	52.47	68.2	-16.13	34.68	11.53	46.61	100	255	Peak
5610	94.14	94.31	/	/	34.88	11.6	46.65	100	255	Peak
5610	91.59	91.76	/	/	34.88	11.6	46.65	100	255	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5610MHz: Fundamental frequency.
3. #: Out of restricted band.

CHANNEL	TX Channel 138	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5470	51.72	52.41	68.2	-16.48	34.39	11.53	46.61	100	70	Peak
5690	89.43	89.73	/	/	34.74	11.63	46.67	100	70	Peak
5690	87.35	87.65	/	/	34.74	11.63	46.67	100	70	Average
5850	53.08	53.08	68.2	-15.12	35.03	11.69	46.72	100	70	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5470	51.91	52.31	68.2	-16.29	34.68	11.53	46.61	100	260	Peak
5690	91.69	91.73	/	/	35	11.63	46.67	100	260	Average
5690	89.51	89.55	/	/	35	11.63	46.67	100	260	Peak
5850	53.85	53.62	68.2	-14.35	35.26	11.69	46.72	100	260	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5690MHz: Fundamental frequency.
3. #: Out of restricted band.




802.11ax (40MHz)

Worst case harmonic:

CHANNEL	TX Channel 102	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	11013.000	51.71	43.44	74.00	-22.29	8.27	Peak	Horizontal
2	11013.000	40.19	31.92	54.00	-13.81	8.27	Average	Horizontal
3	PK16530.000	57.51	40.86	74.00	-16.49	16.65	Peak	Horizontal
4	PP16530.000	48.51	31.86	54.00	-5.49	16.65	Average	Horizontal

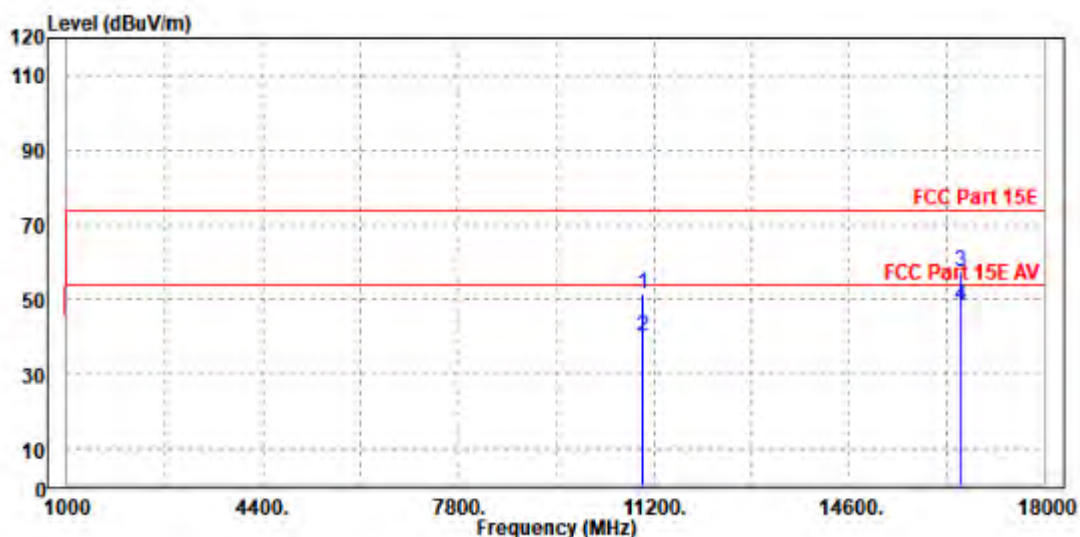



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	11020.000	51.86	43.37	74.00	-22.14	8.49	Peak	Vertical
2	11020.000	45.78	37.29	54.00	-8.22	8.49	Average	Vertical
3	PK16530.000	56.43	39.74	74.00	-17.57	16.69	Peak	Vertical
4	PP16530.000	48.97	32.28	54.00	-5.03	16.69	Average	Vertical

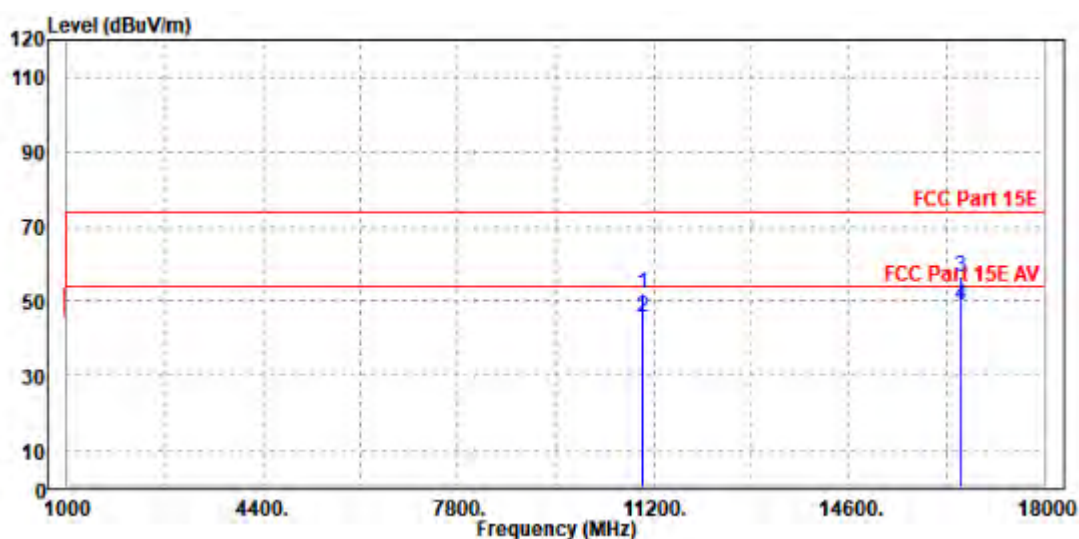

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5510MHz: Fundamental frequency.
- For frequency above 18GHz, the emission was tested 20db below the limit so the data not recorded in the sheet.



5G WIFI-RU

802.11ax (20MHz) (RU26):

CHANNEL	TX Channel 100	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	51.09	51.8	74	-22.91	34.38	11.52	46.61	100	5	Peak
5460	45.56	46.27	54	-8.44	34.38	11.52	46.61	100	5	Average
5470	52.57	53.26	68.2	-15.63	34.39	11.53	46.61	100	5	Peak
5500	101.48	102.14	/	/	34.4	11.56	46.62	100	5	Peak
5500	94.16	94.82	/	/	34.4	11.56	46.62	100	5	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	51.93	52.35	74	-22.07	34.67	11.52	46.61	100	135	Peak
5460	45.55	45.97	54	-8.45	34.67	11.52	46.61	100	135	Average
5470	52.01	52.41	68.2	-16.19	34.68	11.53	46.61	100	135	Peak
5500	102.12	102.48	/	/	34.7	11.56	46.62	100	135	Peak
5500	94.74	95.1	/	/	34.7	11.56	46.62	100	135	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5500MHz: Fundamental frequency.
3. #: Out of restricted band.

CHANNEL	TX Channel 116	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	51.69	52.4	74	-22.31	34.38	11.52	46.61	100	5	Peak
5460	45.59	46.3	54	-8.41	34.38	11.52	46.61	100	5	Average
5470	52.46	53.15	68.2	-15.74	34.39	11.53	46.61	100	5	Peak
5580	102.57	103.08	/	/	34.54	11.59	46.64	100	5	Peak
5580	93.95	94.46	/	/	34.54	11.59	46.64	100	5	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	52.38	52.8	74	-21.62	34.67	11.52	46.61	100	285	Peak
5460	45.15	45.57	54	-8.85	34.67	11.52	46.61	100	285	Average
5470	53.44	53.84	68.2	-14.76	34.68	11.53	46.61	100	285	Peak
5580	104.79	105.01	/	/	34.83	11.59	46.64	100	285	Peak
5580	95.07	95.29	/	/	34.83	11.59	46.64	100	285	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5580MHz: Fundamental frequency.
3. #: Out of restricted band.



**BUREAU
VERITAS**

Test Report No.: W7L-231218W001RF03

CHANNEL	TX Channel 140	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5700	104.87	105.15	/	/	34.76	11.64	46.68	100	80	Peak
5700	95.08	95.36	/	/	34.76	11.64	46.68	100	80	Average
5725	52.63	52.85	68.2	-15.57	34.81	11.65	46.68	100	80	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5700	104.72	104.74	/	/	35.02	11.64	46.68	100	280	Peak
5700	94.33	94.35	/	/	35.02	11.64	46.68	100	280	Average
5725	54.1	54.07	68.2	-14.1	35.06	11.65	46.68	100	280	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5700MHz: Fundamental frequency.
3. #: Out of restricted band.



**BUREAU
VERITAS**

Test Report No.: W7L-231218W001RF03

CHANNEL	TX Channel 144	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5470	52.59	53.28	68.2	-15.61	34.39	11.53	46.61	100	80	Peak
5720	104.05	104.29	/	/	34.8	11.64	46.68	100	80	Peak
5720	95.96	96.2	/	/	34.8	11.64	46.68	100	80	Average
5850	53.54	53.54	68.2	-14.66	35.03	11.69	46.72	100	80	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5470	52.67	53.07	68.2	-15.53	34.68	11.53	46.61	100	280	Peak
5720	103.4	103.39	/	/	35.05	11.64	46.68	100	280	Peak
5720	93.57	93.56	/	/	35.05	11.64	46.68	100	280	Average
5850	52.72	52.49	68.2	-15.48	35.26	11.69	46.72	100	280	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5720MHz: Fundamental frequency.
3. #: Out of restricted band.



802.11ax (20MHz) (RU52):

CHANNEL	TX Channel 100	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	53.45	54.16	74	-20.55	34.38	11.52	46.61	100	5	Peak
5460	45.82	46.53	54	-8.18	34.38	11.52	46.61	100	5	Average
5470	52.78	53.47	68.2	-15.42	34.39	11.53	46.61	100	5	Peak
5500	101.66	102.32	/	/	34.4	11.56	46.62	100	5	Peak
5500	91.44	92.1	/	/	34.4	11.56	46.62	100	5	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	53.18	53.6	74	-20.82	34.67	11.52	46.61	100	135	Peak
5460	45.94	46.36	54	-8.06	34.67	11.52	46.61	100	135	Average
5470	53.61	54.01	68.2	-14.59	34.68	11.53	46.61	100	135	Peak
5500	102.32	102.68	/	/	34.7	11.56	46.62	100	135	Peak
5500	91.49	91.85	/	/	34.7	11.56	46.62	100	135	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5500MHz: Fundamental frequency.
3. #: Out of restricted band.

CHANNEL	TX Channel 116	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	53.05	53.76	74	-20.95	34.38	11.52	46.61	100	25	Peak
5460	44.7	45.41	54	-9.3	34.38	11.52	46.61	100	25	Average
5470	52.43	53.12	68.2	-15.77	34.39	11.53	46.61	100	25	Peak
5580	102.75	103.26	/	/	34.54	11.59	46.64	100	25	Peak
5580	93.55	94.06	/	/	34.54	11.59	46.64	100	25	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	52.78	53.2	74	-21.22	34.67	11.52	46.61	100	280	Peak
5460	45.27	45.69	54	-8.73	34.67	11.52	46.61	100	280	Average
5470	53.6	54	68.2	-14.6	34.68	11.53	46.61	100	280	Peak
5580	102.53	102.75	/	/	34.83	11.59	46.64	100	280	Peak
5580	92.98	93.2	/	/	34.83	11.59	46.64	100	280	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5580MHz: Fundamental frequency.
3. #: Out of restricted band.



CHANNEL	TX Channel 140	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5700	104.01	104.29	/	/	34.76	11.64	46.68	100	25	Peak
5700	93.28	93.56	/	/	34.76	11.64	46.68	100	25	Average
5725	52.6	52.82	68.2	-15.6	34.81	11.65	46.68	100	25	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5700	103.26	103.28	/	/	35.02	11.64	46.68	100	265	Peak
5700	92.2	92.22	/	/	35.02	11.64	46.68	100	265	Average
5725	53.98	53.95	68.2	-14.22	35.06	11.65	46.68	100	265	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5700MHz: Fundamental frequency.
3. #: Out of restricted band.



**BUREAU
VERITAS**

Test Report No.: W7L-231218W001RF03

CHANNEL	TX Channel 144	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5470	52.79	53.48	68.2	-15.41	34.39	11.53	46.61	100	80	Peak
5720	102.93	103.17	/	/	34.8	11.64	46.68	100	80	Peak
5720	90.94	91.18	/	/	34.8	11.64	46.68	100	80	Average
5850	54.28	54.28	68.2	-13.92	35.03	11.69	46.72	100	80	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5470	53.19	53.59	68.2	-15.01	34.68	11.53	46.61	100	265	Peak
5720	104.07	104.06	/	/	35.05	11.64	46.68	100	265	Peak
5720	93.65	93.64	/	/	35.05	11.64	46.68	100	265	Average
5850	52.88	52.65	68.2	-15.32	35.26	11.69	46.72	100	265	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5720MHz: Fundamental frequency.
3. #: Out of restricted band.



802.11ax (20MHz) (RU106):

CHANNEL	TX Channel 100	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	52.18	52.89	74	-21.82	34.38	11.52	46.61	100	360	Peak
5460	45.32	46.03	54	-8.68	34.38	11.52	46.61	100	360	Average
5470	52.62	53.31	68.2	-15.58	34.39	11.53	46.61	100	360	Peak
5500	98.7	99.36	/	/	34.4	11.56	46.62	100	360	Peak
5500	88.6	89.26	/	/	34.4	11.56	46.62	100	360	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	52.75	53.17	74	-21.25	34.67	11.52	46.61	100	265	Peak
5460	45.03	45.45	54	-8.97	34.67	11.52	46.61	100	265	Average
5470	53.01	53.41	68.2	-15.19	34.68	11.53	46.61	100	265	Peak
5500	99.44	99.8	/	/	34.7	11.56	46.62	100	265	Peak
5500	90.68	91.04	/	/	34.7	11.56	46.62	100	265	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5500MHz: Fundamental frequency.
3. #: Out of restricted band.



**BUREAU
VERITAS**

Test Report No.: W7L-231218W001RF03

CHANNEL	TX Channel 116	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	51.98	52.69	74	-22.02	34.38	11.52	46.61	100	25	Peak
5460	44.78	45.49	54	-9.22	34.38	11.52	46.61	100	25	Average
5470	53.14	53.83	68.2	-15.06	34.39	11.53	46.61	100	25	Peak
5580	100.88	101.39	/	/	34.54	11.59	46.64	100	25	Peak
5580	90.49	91	/	/	34.54	11.59	46.64	100	25	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	53.18	53.6	74	-20.82	34.67	11.52	46.61	100	265	Peak
5460	45.22	45.64	54	-8.78	34.67	11.52	46.61	100	265	Average
5470	53.94	54.34	68.2	-14.26	34.68	11.53	46.61	100	265	Peak
5580	101.33	101.55	/	/	34.83	11.59	46.64	100	265	Peak
5580	91.89	92.11	/	/	34.83	11.59	46.64	100	265	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5580MHz: Fundamental frequency.
3. #: Out of restricted band.



**BUREAU
VERITAS**

Test Report No.: W7L-231218W001RF03

CHANNEL	TX Channel 140	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5700	100.46	100.74	/	/	34.76	11.64	46.68	100	25	Peak
5700	90.92	91.2	/	/	34.76	11.64	46.68	100	25	Average
5725	53.89	54.11	68.2	-14.31	34.81	11.65	46.68	100	25	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5700	101.8	101.82	/	/	35.02	11.64	46.68	100	265	Peak
5700	93.17	93.19	/	/	35.02	11.64	46.68	100	265	Average
5725	53.47	53.44	68.2	-14.73	35.06	11.65	46.68	100	265	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5700MHz: Fundamental frequency.
3. #: Out of restricted band.



**BUREAU
VERITAS**

Test Report No.: W7L-231218W001RF03

CHANNEL	TX Channel 144	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5470	52.91	53.6	68.2	-15.29	34.39	11.53	46.61	100	25	Peak
5720	101.04	101.28	/	/	34.8	11.64	46.68	100	25	Peak
5720	90.14	90.38	/	/	34.8	11.64	46.68	100	25	Average
5850	52.92	52.92	68.2	-15.28	35.03	11.69	46.72	100	25	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5470	52.92	53.32	68.2	-15.28	34.68	11.53	46.61	100	265	Peak
5720	100.02	100.01	/	/	35.05	11.64	46.68	100	265	Peak
5720	90.68	90.67	/	/	35.05	11.64	46.68	100	265	Average
5850	53.17	52.94	68.2	-15.03	35.26	11.69	46.72	100	265	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5720MHz: Fundamental frequency.
3. #: Out of restricted band.

802.11ax (20MHz) (RU242):

CHANNEL	TX Channel 100	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	52.56	53.27	74	-21.44	34.38	11.52	46.61	100	25	Peak
5460	45.98	46.69	54	-8.02	34.38	11.52	46.61	100	25	Average
5470	55.57	56.26	68.2	-12.63	34.39	11.53	46.61	100	25	Peak
5500	103.5	104.16	/	/	34.4	11.56	46.62	100	25	Peak
5500	94.31	94.97	/	/	34.4	11.56	46.62	100	25	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	54.16	54.58	74	-19.84	34.67	11.52	46.61	100	260	Peak
5460	45.38	45.8	54	-8.62	34.67	11.52	46.61	100	260	Average
5470	52.59	52.99	68.2	-15.61	34.68	11.53	46.61	100	260	Peak
5500	103.33	103.69	/	/	34.7	11.56	46.62	100	260	Peak
5500	93.18	93.54	/	/	34.7	11.56	46.62	100	260	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5500MHz: Fundamental frequency.
3. #: Out of restricted band.

CHANNEL	TX Channel 116	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	51.64	52.06	74	-22.36	34.67	11.52	46.61	100	260	Peak
5460	45.25	45.67	54	-8.75	34.67	11.52	46.61	100	260	Average
5470	54.71	55.11	68.2	-13.49	34.68	11.53	46.61	100	260	Peak
5580	105.23	105.45	/	/	34.83	11.59	46.64	100	260	Peak
5580	94.56	94.78	/	/	34.83	11.59	46.64	100	260	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	51.64	52.06	74	-22.36	34.67	11.52	46.61	100	260	Peak
5460	45.25	45.67	54	-8.75	34.67	11.52	46.61	100	260	Average
5470	54.71	55.11	68.2	-13.49	34.68	11.53	46.61	100	260	Peak
5580	105.23	105.45	/	/	34.83	11.59	46.64	100	260	Peak
5580	94.56	94.78	/	/	34.83	11.59	46.64	100	260	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5580MHz: Fundamental frequency.
3. #: Out of restricted band.



CHANNEL	TX Channel 140	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5700	101.08	101.36	/	/	34.76	11.64	46.68	100	25	Peak
5700	92.18	92.46	/	/	34.76	11.64	46.68	100	25	Average
5725	64.8	65.02	68.2	-3.4	34.81	11.65	46.68	100	25	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5700	100.84	100.86	/	/	35.02	11.64	46.68	100	265	Peak
5700	90.52	90.54	/	/	35.02	11.64	46.68	100	265	Average
5725	56.05	56.02	68.2	-12.15	35.06	11.65	46.68	100	265	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5700MHz: Fundamental frequency.
3. #: Out of restricted band.



CHANNEL	TX Channel 144	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5470	52.36	53.05	68.2	-15.84	34.39	11.53	46.61	100	25	Peak
5720	103.33	103.57	/	/	34.8	11.64	46.68	100	25	Peak
5720	91.94	92.18	/	/	34.8	11.64	46.68	100	25	Average
5850	53.19	53.19	68.2	-15.01	35.03	11.69	46.72	100	25	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5470	53.53	53.93	68.2	-14.67	34.68	11.53	46.61	100	265	Peak
5720	103.57	103.56	/	/	35.05	11.64	46.68	100	265	Peak
5720	92.24	92.23	/	/	35.05	11.64	46.68	100	265	Average
5850	52.72	52.49	68.2	-15.48	35.26	11.69	46.72	100	265	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5720MHz: Fundamental frequency.
3. #: Out of restricted band.



802.11ax (40MHz) (RU484):

CHANNEL	TX Channel 102	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	55.74	56.45	74	-18.26	34.38	11.52	46.61	100	25	Peak
5460	50.79	51.5	54	-3.21	34.38	11.52	46.61	100	25	Average
5470	58.8	59.49	68.2	-9.4	34.39	11.53	46.61	100	25	Peak
5510	100.64	101.28	/	/	34.42	11.56	46.62	100	25	Peak
5510	92.4	93.04	/	/	34.42	11.56	46.62	100	25	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	53.83	54.25	74	-20.17	34.67	11.52	46.61	100	265	Peak
5460	50.31	50.73	54	-3.69	34.67	11.52	46.61	100	265	Average
5470	56.83	57.23	68.2	-11.37	34.68	11.53	46.61	100	265	Peak
5510	98.46	98.8	/	/	34.72	11.56	46.62	100	265	Peak
5510	89.62	89.96	/	/	34.72	11.56	46.62	100	265	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5510MHz: Fundamental frequency.
3. #: Out of restricted band.

CHANNEL	TX Channel 110	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	51.87	52.58	74	-22.13	34.38	11.52	46.61	100	25	Peak
5460	44.96	45.67	54	-9.04	34.38	11.52	46.61	100	25	Average
5470	52.95	53.64	68.2	-15.25	34.39	11.53	46.61	100	25	Peak
5550	99.12	99.68	/	/	34.49	11.58	46.63	100	25	Peak
5550	92.19	92.75	/	/	34.49	11.58	46.63	100	25	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	51.53	51.95	74	-22.47	34.67	11.52	46.61	100	265	Peak
5460	45.41	45.83	54	-8.59	34.67	11.52	46.61	100	265	Average
5470	51.91	52.31	68.2	-16.29	34.68	11.53	46.61	100	265	Peak
5550	99.13	99.4	/	/	34.78	11.58	46.63	100	265	Peak
5550	92.76	93.03	/	/	34.78	11.58	46.63	100	265	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5500MHz: Fundamental frequency.
3. #: Out of restricted band.

CHANNEL	TX Channel 134	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5670	99.44	99.78	/	/	34.71	11.62	46.67	100	25	Peak
5670	92.82	93.16	/	/	34.71	11.62	46.67	100	25	Average
5725	53.39	53.61	68.2	-14.81	34.81	11.65	46.68	100	25	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5670	100.52	100.6	/	/	34.97	11.62	46.67	100	265	Peak
5670	93.21	93.29	/	/	34.97	11.62	46.67	100	265	Average
5725	53.98	53.95	68.2	-14.22	35.06	11.65	46.68	100	265	Peak

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5670MHz: Fundamental frequency.
- #: Out of restricted band.



CHANNEL	TX Channel 142	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5470	52.98	53.67	68.2	-15.22	34.39	11.53	46.61	100	25	Peak
5710	100.15	100.41	/	/	34.78	11.64	46.68	100	25	Peak
5710	90.8	91.06	/	/	34.78	11.64	46.68	100	25	Average
5850	54.13	54.13	68.2	-14.07	35.03	11.69	46.72	100	25	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5470	52.46	52.86	68.2	-15.74	34.68	11.53	46.61	100	265	Peak
5710	99.86	99.86	/	/	35.04	11.64	46.68	100	265	Peak
5710	92.46	92.46	/	/	35.04	11.64	46.68	100	265	Average
5850	53.44	53.21	68.2	-14.76	35.26	11.69	46.72	100	265	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5710MHz: Fundamental frequency.
3. #: Out of restricted band.

802.11ax (80MHz) (RU996):

CHANNEL	TX Channel 106	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	52.04	52.75	74	-21.96	34.38	11.52	46.61	100	30	Peak
5460	45.14	45.85	54	-8.86	34.38	11.52	46.61	100	30	Average
5470	51.95	52.64	68.2	-16.25	34.39	11.53	46.61	100	30	Peak
5530	92.69	93.3	/	/	34.45	11.57	46.63	100	30	Peak
5530	83.69	84.3	/	/	34.45	11.57	46.63	100	30	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	52.3	52.72	74	-21.7	34.67	11.52	46.61	100	265	Peak
5460	45.21	45.63	54	-8.79	34.67	11.52	46.61	100	265	Average
5470	52.75	53.15	68.2	-15.45	34.68	11.53	46.61	100	265	Peak
5530	93.67	93.98	/	/	34.75	11.57	46.63	100	265	Peak
5530	83.95	84.26	/	/	34.75	11.57	46.63	100	265	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5530MHz: Fundamental frequency.
3. #: Out of restricted band.

CHANNEL	TX Channel 122	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	50.91	51.62	74	-23.09	34.38	11.52	46.61	100	25	Peak
5460	44.31	45.02	54	-9.69	34.38	11.52	46.61	100	25	Average
5470	51.63	52.32	68.2	-16.57	34.39	11.53	46.61	100	25	Peak
5610	92.8	93.25	/	/	34.6	11.6	46.65	100	25	Peak
5610	85.46	85.91	/	/	34.6	11.6	46.65	100	25	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	51.7	52.12	74	-22.3	34.67	11.52	46.61	100	265	Peak
5460	44.82	45.24	54	-9.18	34.67	11.52	46.61	100	265	Average
5470	52.04	52.44	68.2	-16.16	34.68	11.53	46.61	100	265	Peak
5610	93.93	94.1	/	/	34.88	11.6	46.65	100	265	Peak
5610	86.2	86.37	/	/	34.88	11.6	46.65	100	265	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5610MHz: Fundamental frequency.
- #: Out of restricted band.



CHANNEL	TX Channel 138	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5470	51.79	52.48	68.2	-16.41	34.39	11.53	46.61	100	25	Peak
5690	92.94	93.24	/	/	34.74	11.63	46.67	100	25	Peak
5690	84.27	84.57	/	/	34.74	11.63	46.67	100	25	Average
5850	53.54	53.54	68.2	-14.66	35.03	11.69	46.72	100	25	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5470	52.76	53.16	68.2	-15.44	34.68	11.53	46.61	100	265	Peak
5690	91.81	91.85	/	/	35	11.63	46.67	100	265	Peak
5690	83.61	83.65	/	/	35	11.63	46.67	100	265	Average
5850	53.49	53.26	68.2	-14.71	35.26	11.69	46.72	100	265	Peak

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5690MHz: Fundamental frequency.
3. #: Out of restricted band.



802.11ax (160MHz) (RU996):

CHANNEL	TX Channel 114	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	52.23	52.94	74	-21.77	34.38	11.52	46.61	100	25	Peak
5460	44.66	45.37	54	-9.34	34.38	11.52	46.61	100	25	Average
5470	52.97	53.66	68.2	-15.23	34.39	11.53	46.61	100	25	Peak
5570	88.62	89.14	/	/	34.53	11.59	46.64	100	25	Peak
5570	81.83	82.35	/	/	34.53	11.59	46.64	100	25	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5460	52.91	53.33	74	-21.09	34.67	11.52	46.61	100	265	Peak
5460	46.82	47.24	54	-7.18	34.67	11.52	46.61	100	265	Average
5470	53.85	54.25	68.2	-14.35	34.68	11.53	46.61	100	265	Peak
5570	89.43	89.67	/	/	34.81	11.59	46.64	100	265	Peak
5570	82.11	82.35	/	/	34.81	11.59	46.64	100	265	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5690MHz: Fundamental frequency.
3. #: Out of restricted band.




802.11ax (40MHz) (RU484):

Worst case harmonic:

CHANNEL	TX Channel 102	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	11020.000	52.32	44.02	74.00	-21.68	8.30	Peak	Horizontal
2	11020.000	45.38	37.08	54.00	-8.62	8.30	Average	Horizontal
3	PK16538.000	58.35	41.69	74.00	-15.65	16.66	Peak	Horizontal
4	PP16538.000	48.94	32.28	54.00	-5.06	16.66	Average	Horizontal

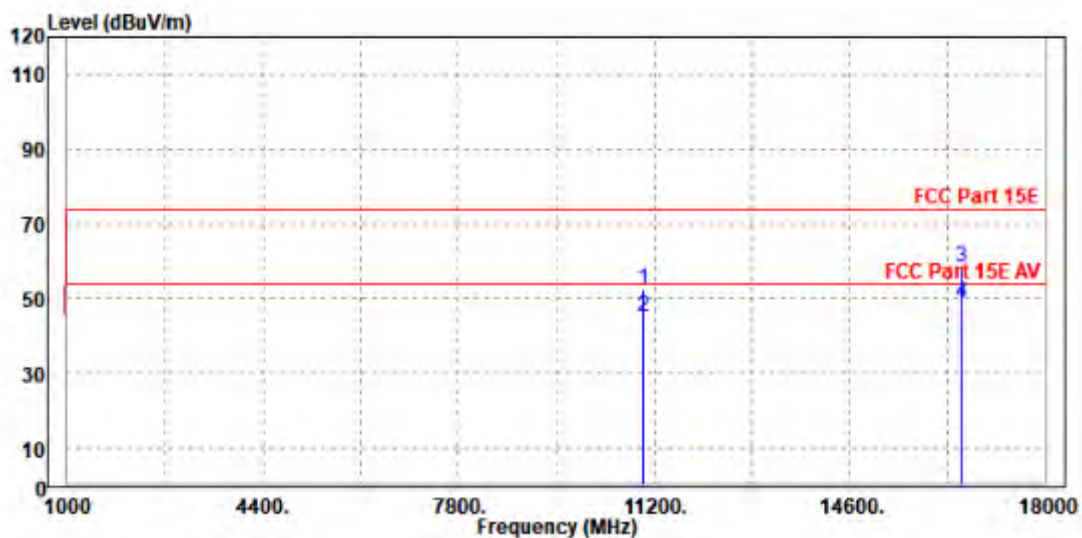

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	11013.000	52.50	44.03	74.00	-21.50	8.47	Peak	Vertical
2	11013.000	45.14	36.67	54.00	-8.86	8.47	Average	Vertical
3	PK16530.000	56.89	40.20	74.00	-17.11	16.69	Peak	Vertical
4	PP16530.000	48.55	31.86	54.00	-5.45	16.69	Average	Vertical

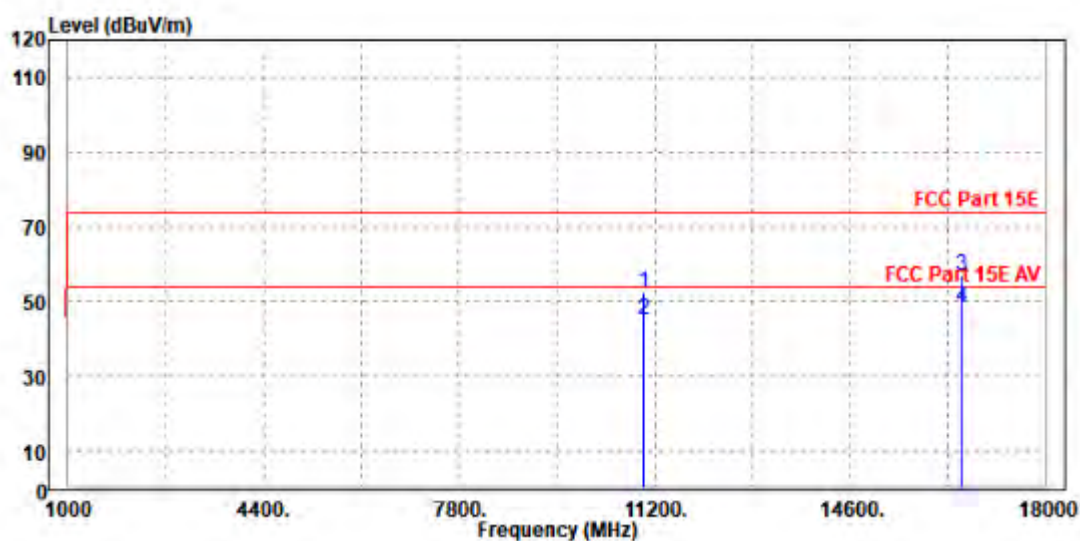

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5510MHz: Fundamental frequency.
3. For frequency above 18GHz, the emission was tested 20db below the limit so the data not recorded in the sheet.

Band 4:

802.11a

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5745	101.66	101.86	/	/	34.84	11.65	46.69	100	85	Peak
5745	94.95	95.15	/	/	34.84	11.65	46.69	100	85	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5745	102.28	102.23	/	/	35.09	11.65	46.69	100	260	Peak
5745	96.91	96.86	/	/	35.09	11.65	46.69	100	260	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5745MHz: Fundamental frequency.




OOBE DATA

802.11a

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5633.125	58.21	58.62	68.2	-9.99	34.64	11.61	46.66	100	360	Peak
6011.225	59.1	58.78	68.2	-9.1	35.31	11.77	46.76	100	360	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5570.9	58.14	58.38	68.2	-10.06	34.81	11.59	46.64	100	0	Peak
6021.675	58.01	57.48	68.2	-10.19	35.51	11.78	46.76	100	0	Peak

CH 149

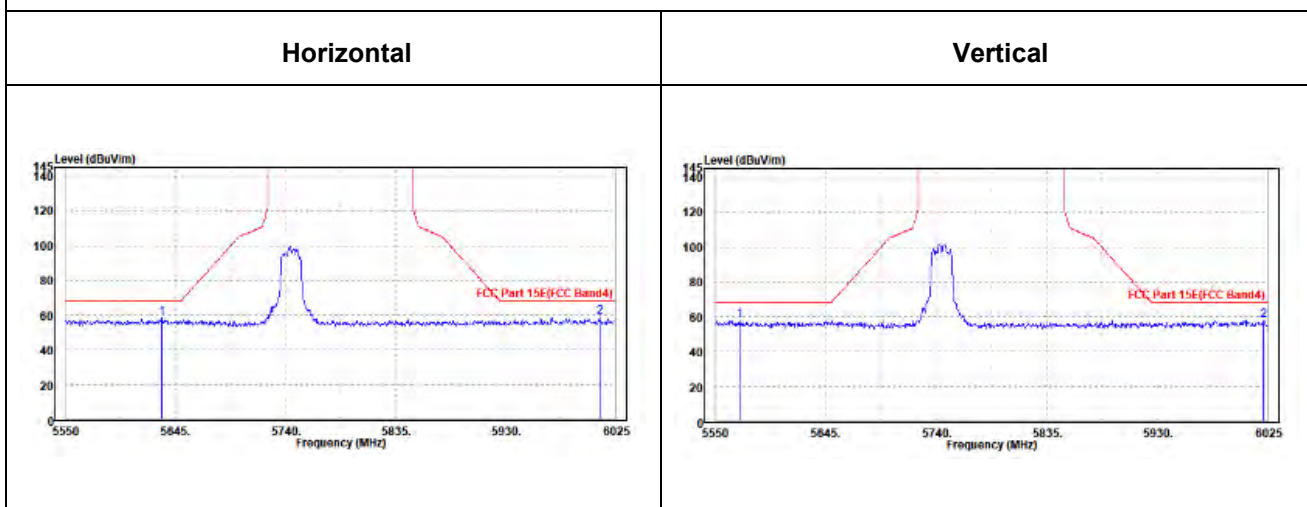



**BUREAU
VERITAS**

Test Report No.: W7L-231218W001RF03

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5785	100.46	100.58	/	/	34.91	11.67	46.7	100	85	Peak
5785	94.84	94.96	/	/	34.91	11.67	46.7	100	85	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5785	101.32	101.19	/	/	35.16	11.67	46.7	100	260	Peak
5785	95.59	95.46	/	/	35.16	11.67	46.7	100	260	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5785MHz: Fundamental frequency.




OOBE DATA

802.11a

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5565.2	57.16	57.7	68.2	-11.04	34.52	11.58	46.64	100	0	Peak
5990.325	58.22	57.95	68.2	-9.98	35.28	11.75	46.76	100	0	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5576.6	58.31	58.54	68.2	-9.89	34.82	11.59	46.64	100	360	Peak
5960.4	59.14	58.72	68.2	-9.06	35.44	11.73	46.75	100	360	Peak

CH 157

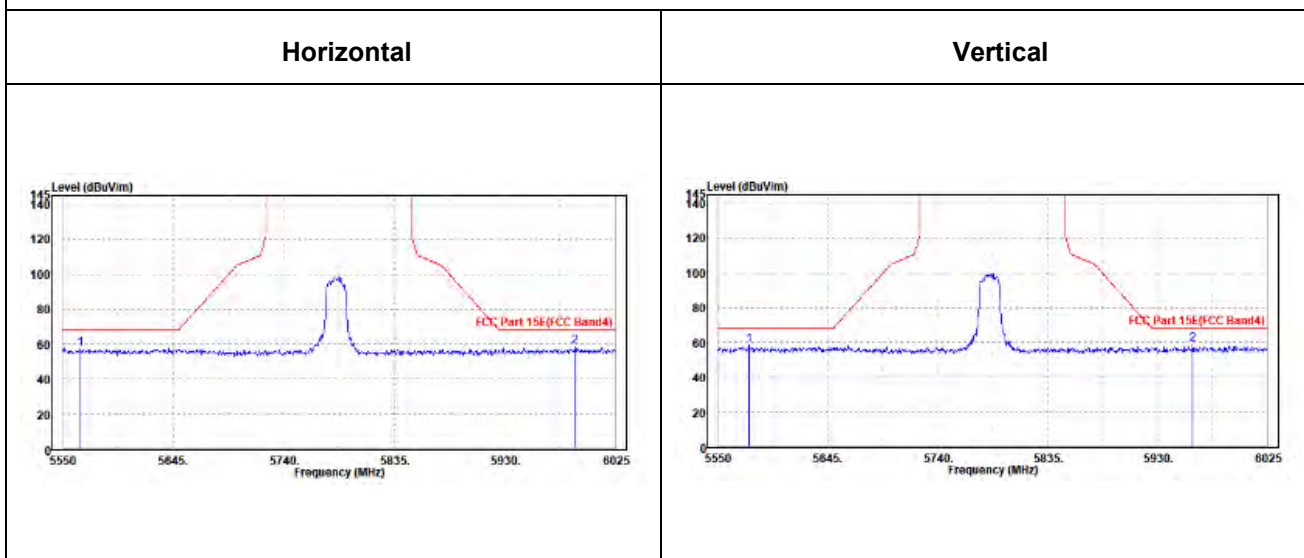



CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5825	101.19	101.23	/	/	34.99	11.68	46.71	100	85	Peak
5825	94.59	94.63	/	/	34.99	11.68	46.71	100	85	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5825	102.27	102.08	/	/	35.22	11.68	46.71	100	260	Peak
5825	96.57	96.38	/	/	35.22	11.68	46.71	100	260	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5825MHz: Fundamental frequency.




OUBE DATA

802.11a

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5568.525	58.01	58.54	68.2	-10.19	34.52	11.59	46.64	100	360	Peak
5995.55	58.93	58.65	68.2	-9.27	35.29	11.75	46.76	100	360	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5553.325	57.94	58.2	68.2	-10.26	34.79	11.58	46.63	100	0	Peak
5946.15	57.79	57.39	68.2	-10.41	35.41	11.73	46.74	100	0	Peak

CH 165

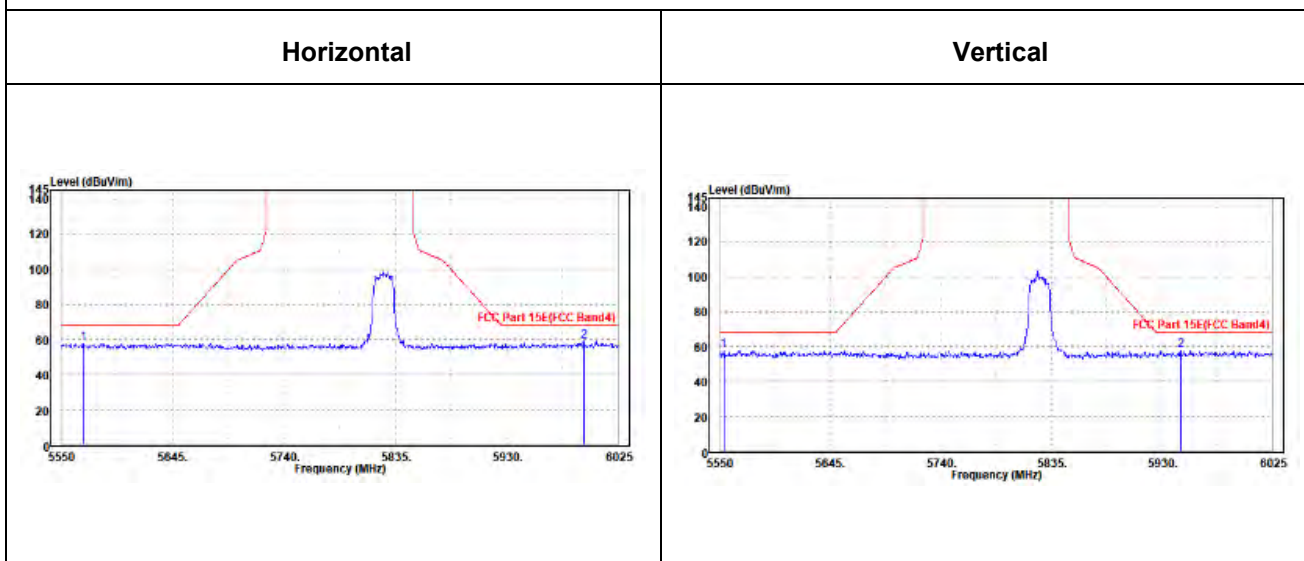



802.11n (20MHz)

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5745	103.44	103.64	/	/	34.84	11.65	46.69	100	85	Peak
5745	96.35	96.55	/	/	34.84	11.65	46.69	100	85	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5745	103.6	103.55	/	/	35.09	11.65	46.69	100	260	Peak
5745	97.32	97.27	/	/	35.09	11.65	46.69	100	260	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5745MHz: Fundamental frequency.




OOBE DATA

802.11n (20MHZ)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5583.725	57.73	58.23	68.2	-10.47	34.55	11.59	46.64	100	0	Peak
6010.275	57.7	57.39	68.2	-10.5	35.31	11.76	46.76	100	0	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5564.725	58.33	58.59	68.2	-9.87	34.8	11.58	46.64	100	360	Peak
5992.225	58.57	58.09	68.2	-9.63	35.49	11.75	46.76	100	360	Peak

CH 149

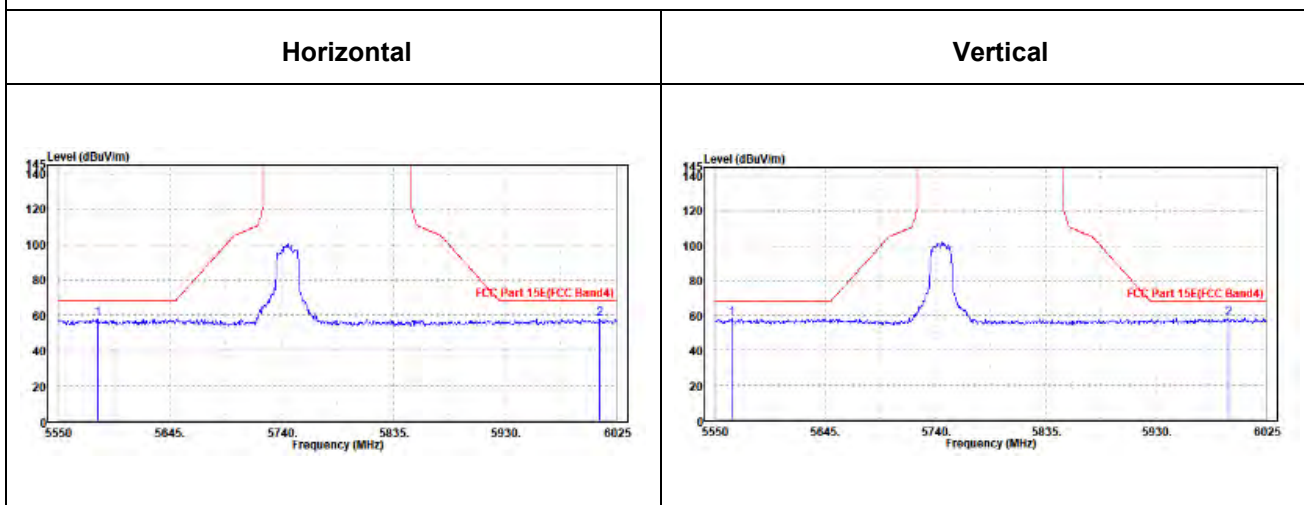



**BUREAU
VERITAS**

Test Report No.: W7L-231218W001RF03

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5785	102.99	103.11	/	/	34.91	11.67	46.7	100	85	Peak
5785	96.5	96.62	/	/	34.91	11.67	46.7	100	85	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5785	102.43	102.3	/	/	35.16	11.67	46.7	100	260	Peak
5785	96.54	96.41	/	/	35.16	11.67	46.7	100	260	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5785MHz: Fundamental frequency.




Oobe Data

802.11n (20MHz)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV /m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5572.325	57.73	58.25	68.2	-10.47	34.53	11.59	46.64	100	360	Peak
5991.75	57.41	57.13	68.2	-10.79	35.29	11.75	46.76	100	360	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV /m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5558.075	59.29	59.56	68.2	-8.91	34.79	11.58	46.64	100	0	Peak
6002.675	57.98	57.49	68.2	-10.22	35.5	11.75	46.76	100	0	Peak

CH 157

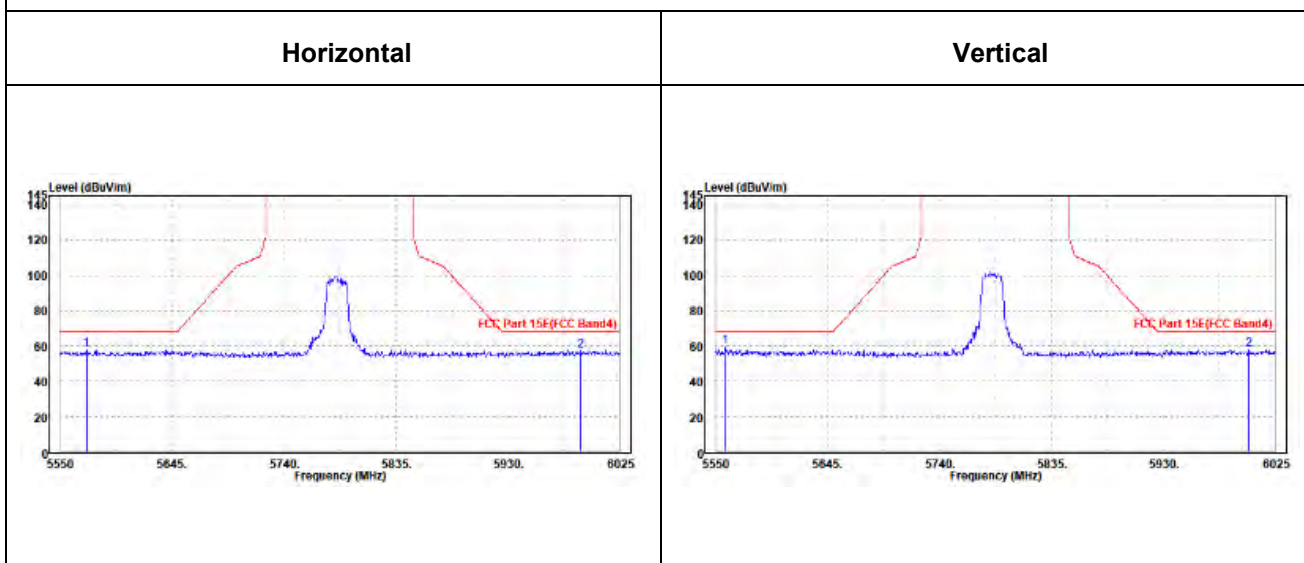



CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5825	100.77	100.81	/	/	34.99	11.68	46.71	100	85	Peak
5825	94.98	95.02	/	/	34.99	11.68	46.71	100	85	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5825	102.71	102.52	/	/	35.22	11.68	46.71	100	260	Peak
5825	96.57	96.38	/	/	35.22	11.68	46.71	100	260	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5825MHz: Fundamental frequency.




OOBE DATA

802.11n (20MHz)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5622.675	58.17	58.59	68.2	-10.03	34.62	11.61	46.65	100	0	Peak
6001.25	57.89	57.6	68.2	-10.31	35.3	11.75	46.76	100	0	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5552.375	58.11	58.38	68.2	-10.09	34.78	11.58	46.63	100	360	Peak
5943.775	57.9	57.5	68.2	-10.3	35.41	11.73	46.74	100	360	Peak

CH 165

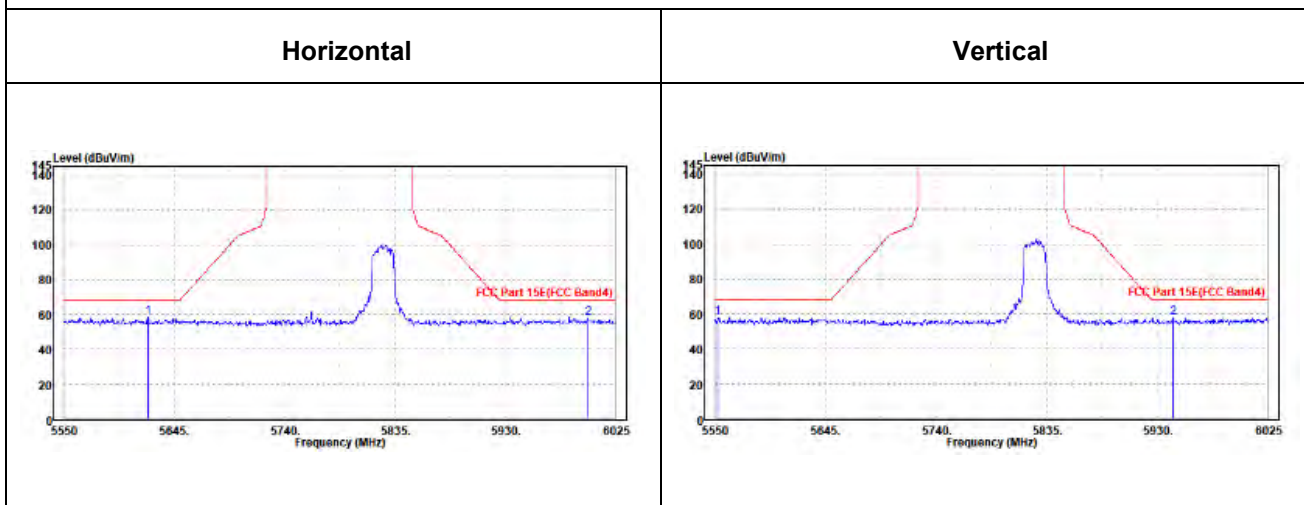



802.11n (40MHz)

CHANNEL	TX Channel 151	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5755	96.61	96.78	/	/	34.86	11.66	46.69	100	85	Peak
5755	92.11	92.28	/	/	34.86	11.66	46.69	100	85	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5755	96.98	96.9	/	/	35.11	11.66	46.69	100	260	Peak
5755	93.28	93.2	/	/	35.11	11.66	46.69	100	260	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5755MHz: Fundamental frequency.




OOBE DATA

802.11n (40MHZ)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5606.525	57.99	58.45	68.2	-10.21	34.59	11.6	46.65	100	0	Peak
5973.7	58.1	57.86	68.2	-10.1	35.25	11.74	46.75	100	0	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5623.15	57.83	57.97	68.2	-10.37	34.9	11.61	46.65	100	360	Peak
6001.725	58.65	58.16	68.2	-9.55	35.5	11.75	46.76	100	360	Peak

CH 151

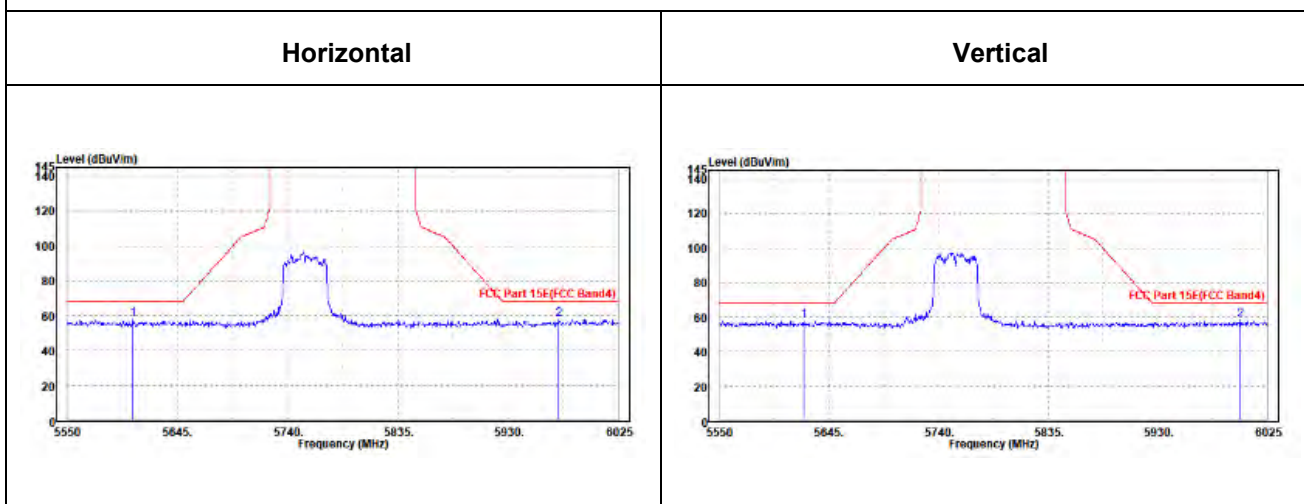



**BUREAU
VERITAS**

Test Report No.: W7L-231218W001RF03

CHANNEL	TX Channel 159	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5795	95.1	95.2	/	/	34.93	11.67	46.7	100	85	Peak
5795	91.14	91.24	/	/	34.93	11.67	46.7	100	85	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5795	96.7	96.56	/	/	35.17	11.67	46.7	100	260	Peak
5795	92.28	92.14	/	/	35.17	11.67	46.7	100	260	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5795MHz: Fundamental frequency.




Oobe Data

802.11n (40MHz)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5570.9	58.79	59.31	68.2	-9.41	34.53	11.59	46.64	100	360	Peak
5993.175	58.52	58.24	68.2	-9.68	35.29	11.75	46.76	100	360	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5571.85	57.29	57.53	68.2	-10.91	34.81	11.59	46.64	100	0	Peak
5972.275	58.99	58.54	68.2	-9.21	35.46	11.74	46.75	100	0	Peak

CH 159

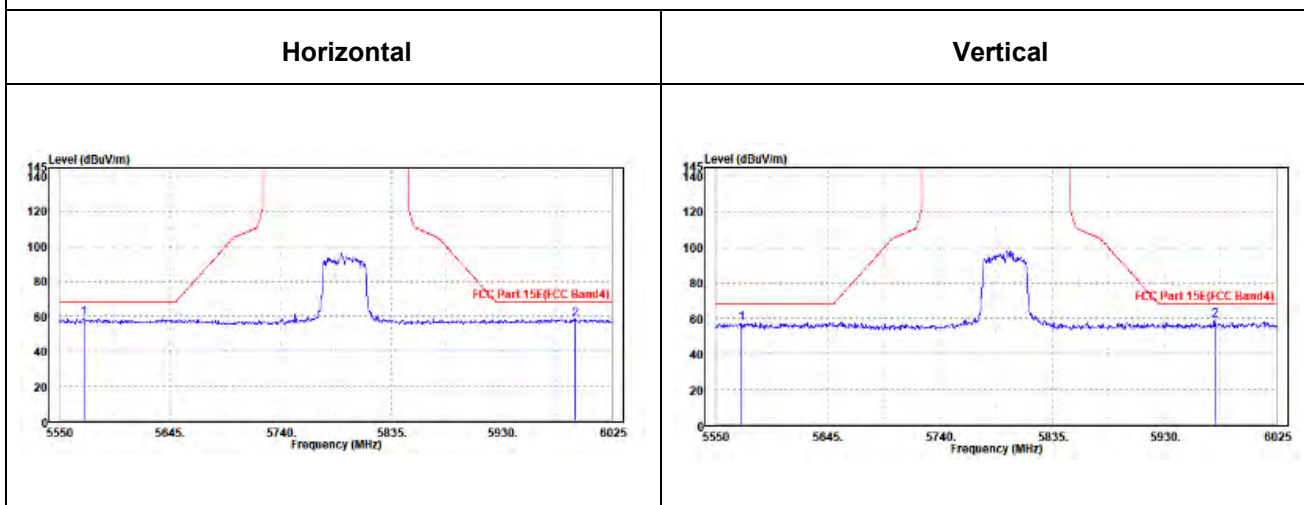



802.11ac (80MHz)

CHANNEL	TX Channel 155	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5775	91.39	91.53	/	/	34.9	11.66	46.7	100	85	Peak
5775	85.81	85.95	/	/	34.9	11.66	46.7	100	85	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5775	91.96	91.86	/	/	35.14	11.66	46.7	100	260	Peak
5775	86.45	86.35	/	/	35.14	11.66	46.7	100	260	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5775MHz: Fundamental frequency.




OOBE DATA

802.11ac (80MHZ)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5573.75	57.6	58.12	68.2	-10.6	34.53	11.59	46.64	100	0	Peak
5939.5	58.52	58.34	68.2	-9.68	35.19	11.73	46.74	100	0	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5572.8	58.29	58.52	68.2	-9.91	34.82	11.59	46.64	100	360	Peak
6001.25	58.98	58.49	68.2	-9.22	35.5	11.75	46.76	100	360	Peak

CH 155

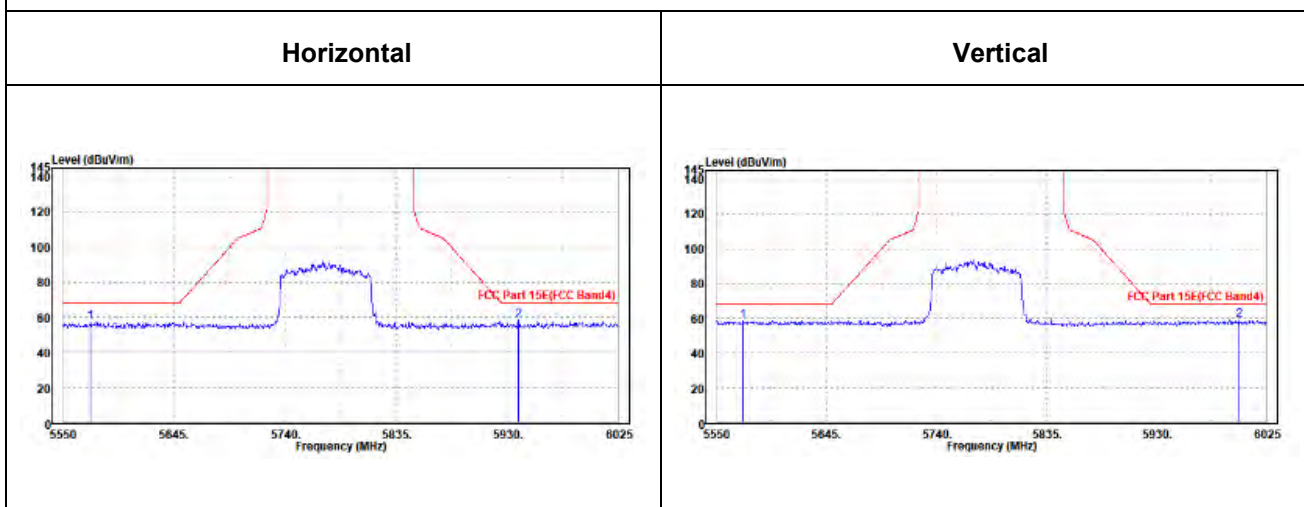



802.11ax (20MHz)

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5745	104.74	104.94	/	/	34.84	11.65	46.69	100	85	Peak
5745	95.94	96.14	/	/	34.84	11.65	46.69	100	85	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5745	104.8	104.75	/	/	35.09	11.65	46.69	100	260	Peak
5745	96.83	96.78	/	/	35.09	11.65	46.69	100	260	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5745MHz: Fundamental frequency.




OOBE DATA

802.11ax (20MHz)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5581.825	57.32	57.82	68.2	-10.88	34.55	11.59	46.64	100	360	Peak
5980.35	57.13	56.88	68.2	-11.07	35.26	11.74	46.75	100	360	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5558.55	58.21	58.48	68.2	-9.99	34.79	11.58	46.64	100	0	Peak
5942.35	57.62	57.22	68.2	-10.58	35.41	11.73	46.74	100	0	Peak

CH 149

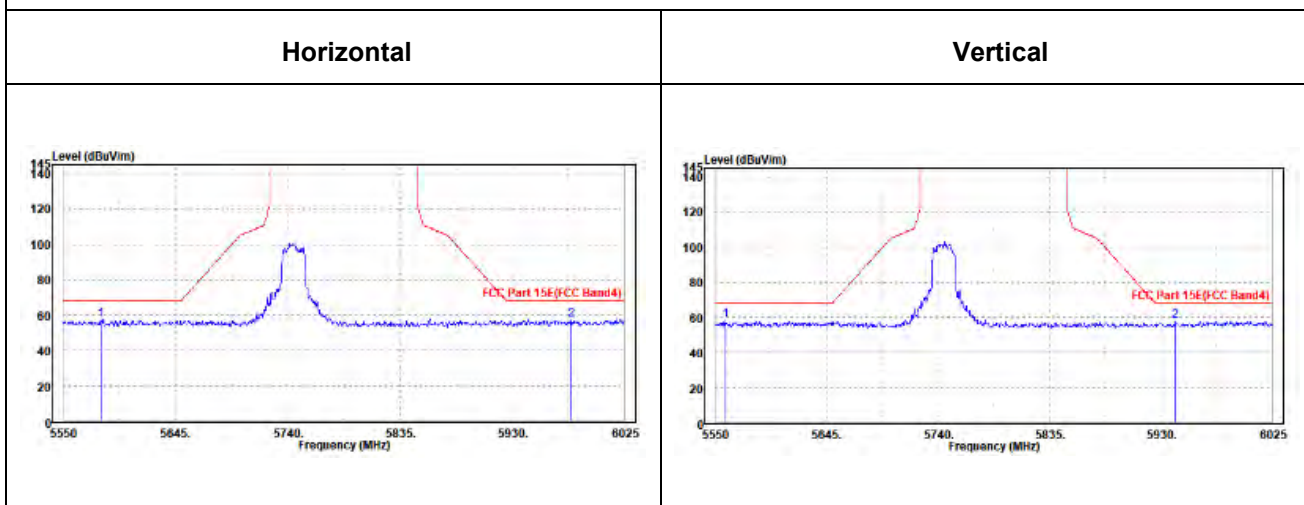



**BUREAU
VERITAS**

Test Report No.: W7L-231218W001RF03

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5785	104.82	104.94	/	/	34.91	11.67	46.7	100	85	Peak
5785	95.72	95.84	/	/	34.91	11.67	46.7	100	85	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5785	105.42	105.29	/	/	35.16	11.67	46.7	100	260	Peak
5785	96.59	96.46	/	/	35.16	11.67	46.7	100	260	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5785MHz: Fundamental frequency.




OOBE DATA

802.11ax (20MHZ)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV /m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5578.5	57.55	58.06	68.2	-10.65	34.54	11.59	46.64	100	0	Peak
6022.15	57.74	57.41	68.2	-10.46	35.31	11.78	46.76	100	0	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV /m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5553.325	58.47	58.73	68.2	-9.73	34.79	11.58	46.63	100	360	Peak
5976.55	57.96	57.51	68.2	-10.24	35.46	11.74	46.75	100	360	Peak

CH 157

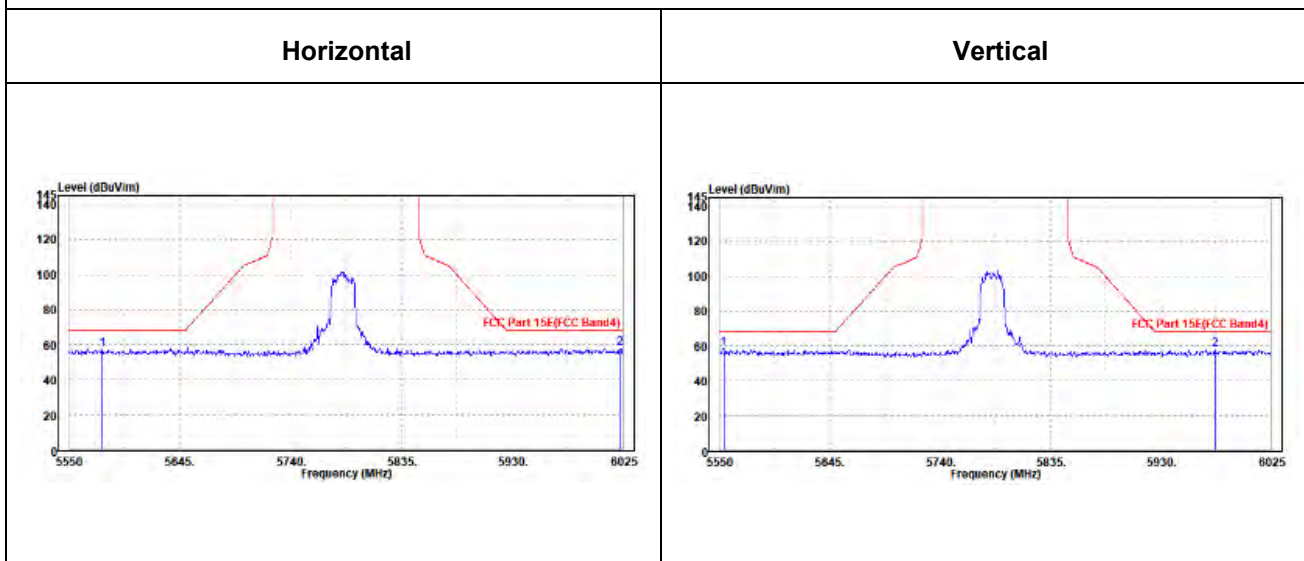



CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5825	103.6	103.64	/	/	34.99	11.68	46.71	100	85	Peak
5825	95.92	95.96	/	/	34.99	11.68	46.71	100	85	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5825	105.39	105.2	/	/	35.22	11.68	46.71	100	260	Peak
5825	96.73	96.54	/	/	35.22	11.68	46.71	100	260	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5825MHz: Fundamental frequency.




OOBE DATA

802.11ax (20MHZ)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5558.55	57.21	57.76	68.2	-10.99	34.51	11.58	46.64	100	360	Peak
5964.2	57.51	57.28	68.2	-10.69	35.24	11.74	46.75	100	360	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5574.225	56.98	57.21	68.2	-11.22	34.82	11.59	46.64	100	0	Peak
6004.575	58.18	57.68	68.2	-10.02	35.5	11.76	46.76	100	0	Peak

CH 165

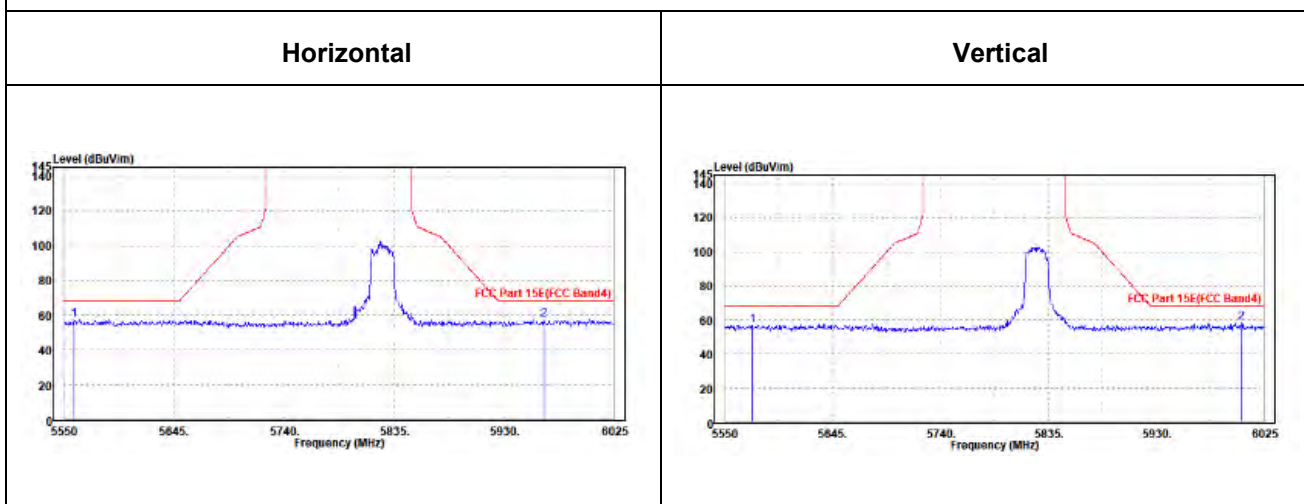



802.11ax (40MHz)

CHANNEL	TX Channel 151	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5755	98.38	98.55	/	/	34.86	11.66	46.69	100	85	Peak
5755	93.08	93.25	/	/	34.86	11.66	46.69	100	85	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5755	100.44	100.36	/	/	35.11	11.66	46.69	100	260	Peak
5755	94.93	94.85	/	/	35.11	11.66	46.69	100	260	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5755MHz: Fundamental frequency.




OOBE DATA

802.11ax (40MHZ)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5612.225	56.91	57.36	68.2	-11.29	34.6	11.6	46.65	100	0	Peak
5977.025	57.74	57.49	68.2	-10.46	35.26	11.74	46.75	100	0	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5628.85	58.35	58.49	68.2	-9.85	34.91	11.61	46.66	100	360	Peak
5972.75	57.88	57.43	68.2	-10.32	35.46	11.74	46.75	100	360	Peak

CH 151

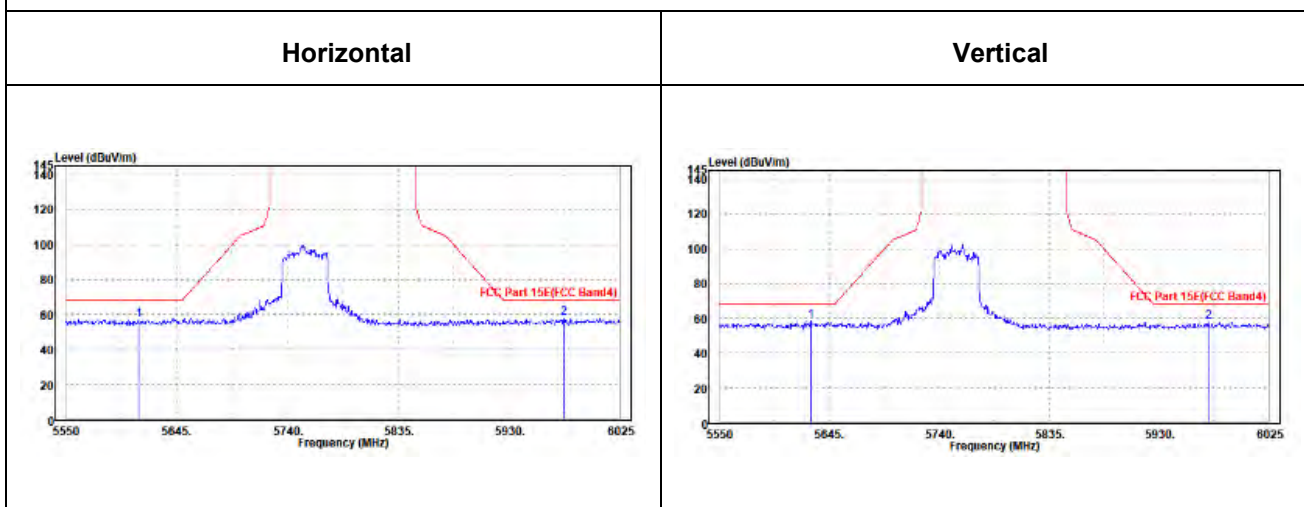



**BUREAU
VERITAS**

Test Report No.: W7L-231218W001RF03

CHANNEL	TX Channel 159	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5795	100.13	100.23	/	/	34.93	11.67	46.7	100	85	Peak
5795	95.1	95.2	/	/	34.93	11.67	46.7	100	85	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5795	101.89	101.75	/	/	35.17	11.67	46.7	100	0	Peak
5795	96.49	96.35	/	/	35.17	11.67	46.7	100	0	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5795MHz: Fundamental frequency.




OOBE DATA

802.11ax (40MHZ)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5556.175	57.54	58.1	68.2	-10.66	34.5	11.58	46.64	100	360	Peak
5965.15	58.23	58	68.2	-9.97	35.24	11.74	46.75	100	360	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5574.225	57.74	57.97	68.2	-10.46	34.82	11.59	46.64	100	0	Peak
5957.55	58	57.59	68.2	-10.2	35.43	11.73	46.75	100	0	Peak

CH 159

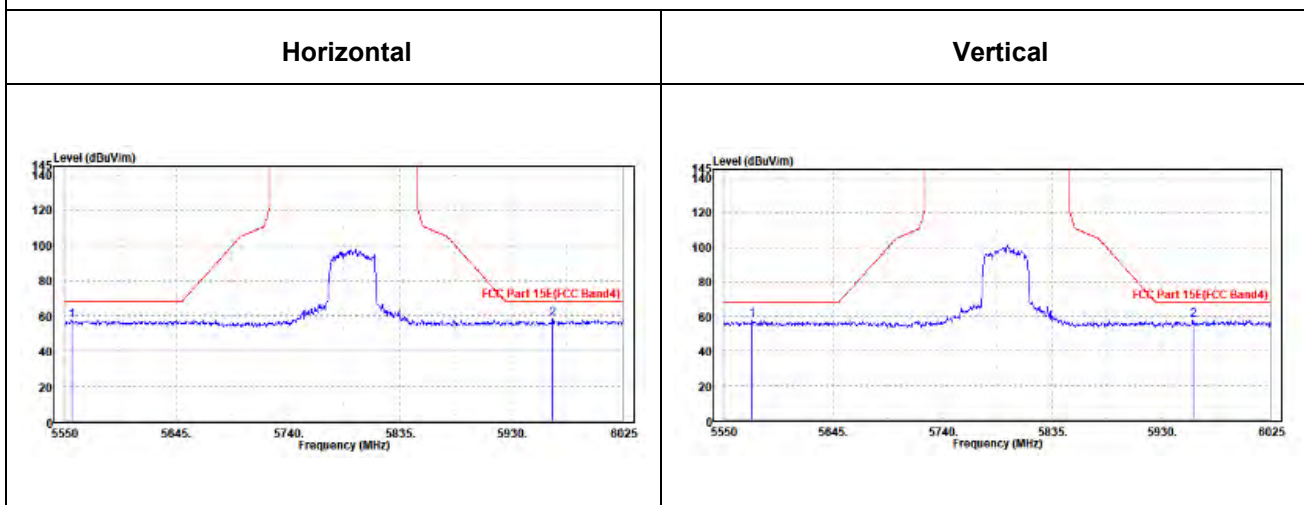



802.11ax (80MHz)

CHANNEL	TX Channel 155	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5775	90.46	90.6	/	/	34.9	11.66	46.7	100	85	Peak
5775	84.93	85.07	/	/	34.9	11.66	46.7	100	85	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5775	92.46	92.36	/	/	35.14	11.66	46.7	100	0	Peak
5775	86.64	86.54	/	/	35.14	11.66	46.7	100	0	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5775MHz: Fundamental frequency.




OOBE DATA

802.11ax (80MHZ)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5608.9	57.47	57.92	68.2	-10.73	34.6	11.6	46.65	100	360	Peak
5998.4	58.64	58.35	68.2	-9.56	35.3	11.75	46.76	100	360	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5571.85	57.74	57.98	68.2	-10.46	34.81	11.59	46.64	100	0	Peak
5938.075	58.02	57.63	68.2	-10.18	35.4	11.73	46.74	100	0	Peak

CH 155

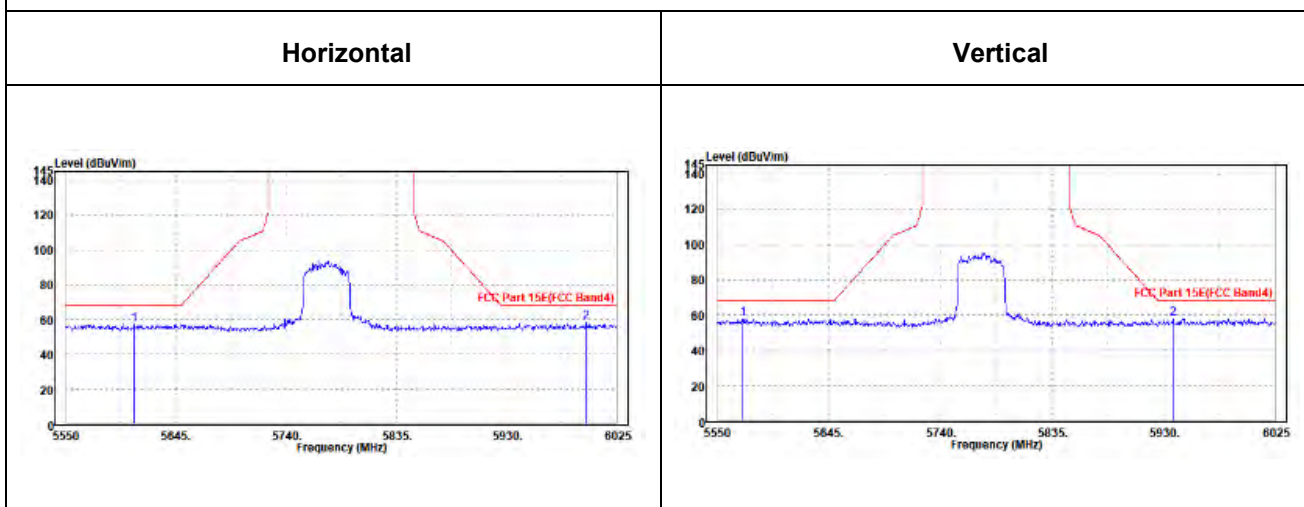




802.11n (20MHz)

Worst case harmonic:

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	11574.000	53.58	42.69	74.00	-20.42	10.89	Peak	Horizontal
2	11574.000	47.29	36.40	54.00	-6.71	10.89	Average	Horizontal
3	PK17355.000	57.36	40.69	74.00	-16.64	16.67	Peak	Horizontal
4	PP17355.000	48.29	31.62	54.00	-5.71	16.67	Average	Horizontal

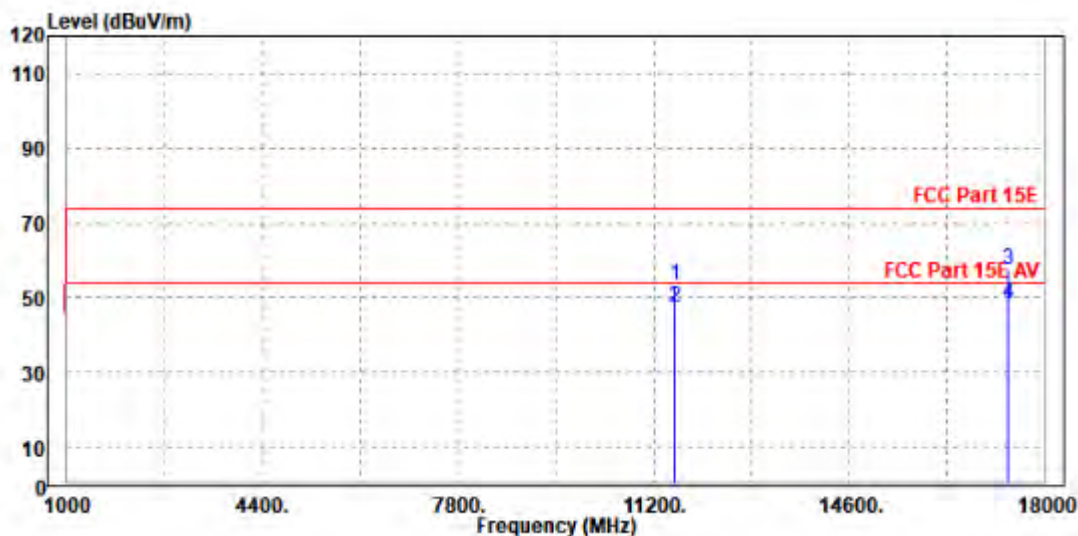



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	11570.000	53.90	42.93	74.00	-20.10	10.97	Peak	Vertical
2	11570.000	47.36	36.39	54.00	-6.64	10.97	Average	Vertical
3	PK17354.000	57.70	40.92	74.00	-16.30	16.78	Peak	Vertical
4	PP17354.000	48.61	31.83	54.00	-5.39	16.78	Average	Vertical

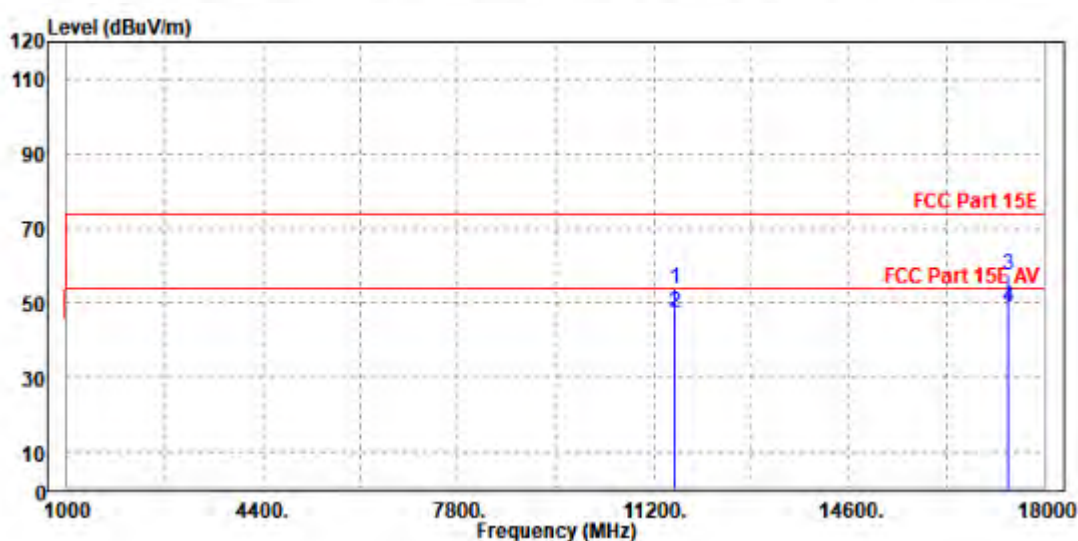

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5785MHz: Fundamental frequency.
3. For frequency above 18GHz, the emission was tested 20db below the limit so the data not recorded in the sheet.



5G WIFI-RU

802.11ax (20MHz) (RU26):

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5745	103.56	103.76	/	/	34.84	11.65	46.69	100	85	Peak
5745	94.17	94.37	/	/	34.84	11.65	46.69	100	85	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5745	106.62	106.57	/	/	35.09	11.65	46.69	100	145	Peak
5745	97.03	96.98	/	/	35.09	11.65	46.69	100	145	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5745MHz: Fundamental frequency.



**BUREAU
VERITAS**

Test Report No.: W7L-231218W001RF03


Oobe Data

802.11ax (20MHz) (RU26):


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5620.3	57.78	58.2	68.2	-10.42	34.62	11.61	46.65	100	0	Peak
6015.025	57.86	57.54	68.2	-10.34	35.31	11.77	46.76	100	0	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5570.425	57.02	57.26	68.2	-11.18	34.81	11.59	46.64	100	360	Peak
5967.05	58.04	57.6	68.2	-10.16	35.45	11.74	46.75	100	360	Peak

CH 149

Horizontal

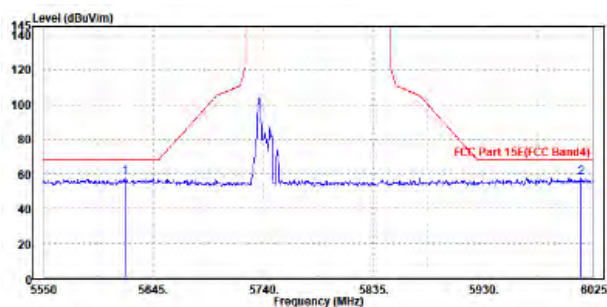

Vertical

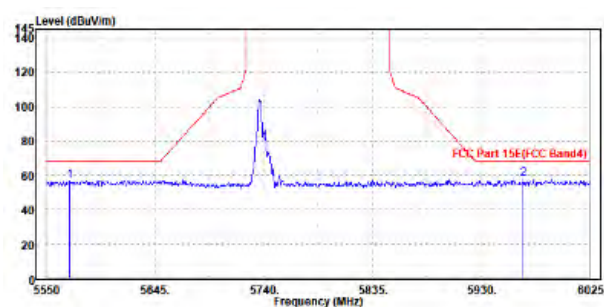



CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5785	103.74	103.86	/	/	34.91	11.67	46.7	100	90	Peak
5785	94.14	94.26	/	/	34.91	11.67	46.7	100	90	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5785	106.23	106.35	/	/	34.91	11.67	46.7	100	145	Peak
5785	96.65	96.77	/	/	34.91	11.67	46.7	100	145	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5785MHz: Fundamental frequency.




OOBE DATA

802.11ax (20MHz) (RU26):


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV /m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5579.45	57.18	57.69	68.2	-11.02	34.54	11.59	46.64	100	360	Peak
5998.4	57.9	57.61	68.2	-10.3	35.3	11.75	46.76	100	360	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV /m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5560.45	57.55	57.81	68.2	-10.65	34.8	11.58	46.64	100	0	Peak
5951.375	57.87	57.47	68.2	-10.33	35.42	11.73	46.75	100	0	Peak

CH 157

Horizontal

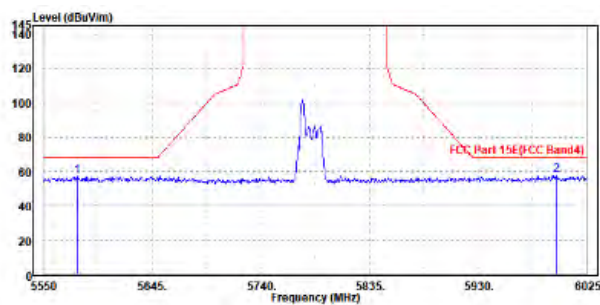

Vertical

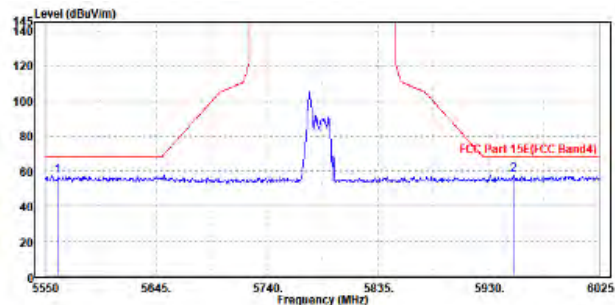



CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5825	104.29	104.33	/	/	34.99	11.68	46.71	100	85	Peak
5825	95.22	95.26	/	/	34.99	11.68	46.71	100	85	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5825	106.08	105.89	/	/	35.22	11.68	46.71	100	145	Peak
5825	94.01	93.82	/	/	35.22	11.68	46.71	100	145	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5825MHz: Fundamental frequency.




OOBE DATA

802.11ax (20MHz) (RU26):


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5621.25	56.87	57.29	68.2	-11.33	34.62	11.61	46.65	100	0	Peak
5999.825	57.31	57.02	68.2	-10.89	35.3	11.75	46.76	100	0	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5624.1	58.03	58.17	68.2	-10.17	34.9	11.61	46.65	100	360	Peak
6005.05	58.73	58.23	68.2	-9.47	35.5	11.76	46.76	100	360	Peak

CH 165

Horizontal

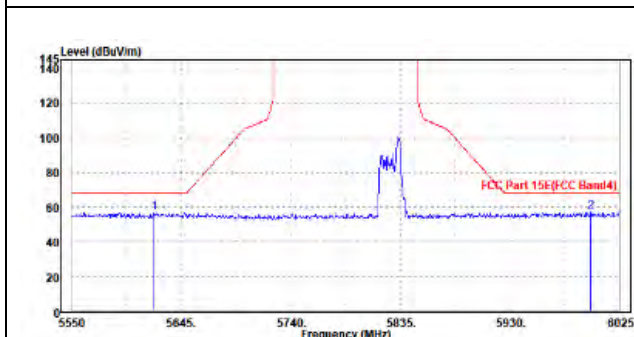

Vertical

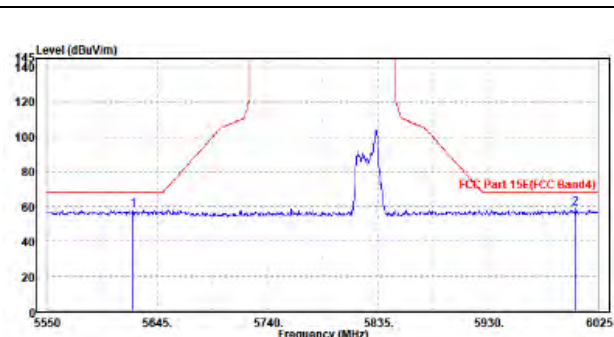



802.11ax (20MHz) (RU52):

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5745	100.65	100.85	/	/	34.84	11.65	46.69	100	85	Peak
5745	90.83	91.03	/	/	34.84	11.65	46.69	100	85	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5745	103.07	103.27	/	/	34.84	11.65	46.69	100	145	Peak
5745	92.46	92.66	/	/	34.84	11.65	46.69	100	145	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5745MHz: Fundamental frequency.




OOBE DATA

802.11ax (20MHz) (RU52):


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5622.675	58.09	58.51	68.2	-10.11	34.62	11.61	46.65	100	360	Peak
5970.375	56.83	56.59	68.2	-11.37	35.25	11.74	46.75	100	360	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5563.3	58.61	58.87	68.2	-9.59	34.8	11.58	46.64	100	0	Peak
6017.875	58.99	58.46	68.2	-9.21	35.51	11.78	46.76	100	0	Peak

CH 149

Horizontal

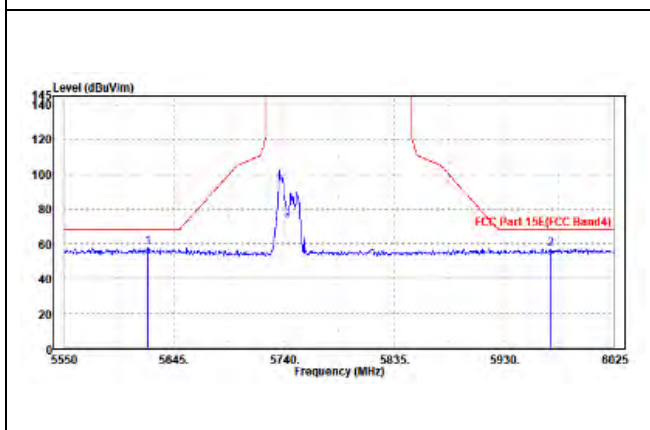

Vertical

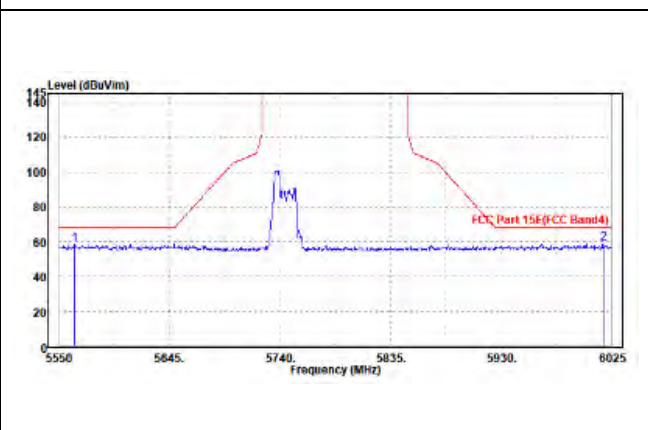



**BUREAU
VERITAS**

Test Report No.: W7L-231218W001RF03

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5785	101.64	101.76	/	/	34.91	11.67	46.7	100	90	Peak
5785	91.96	92.08	/	/	34.91	11.67	46.7	100	90	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5785	105.29	105.16	/	/	35.16	11.67	46.7	100	260	Peak
5785	95.03	94.9	/	/	35.16	11.67	46.7	100	260	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5785MHz: Fundamental frequency.




OOBE DATA

802.11ax (20MHz) (RU52):


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV /m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5641.2	57.81	58.21	68.2	-10.39	34.65	11.61	46.66	100	360	Peak
5986.525	57.23	56.97	68.2	-10.97	35.28	11.74	46.76	100	360	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV /m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5586.1	58.07	58.28	68.2	-10.13	34.84	11.59	46.64	100	0	Peak
6017.875	57.25	56.72	68.2	-10.95	35.51	11.78	46.76	100	0	Peak

CH 157

Horizontal

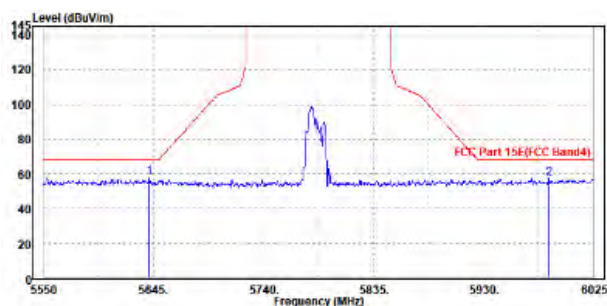

Vertical

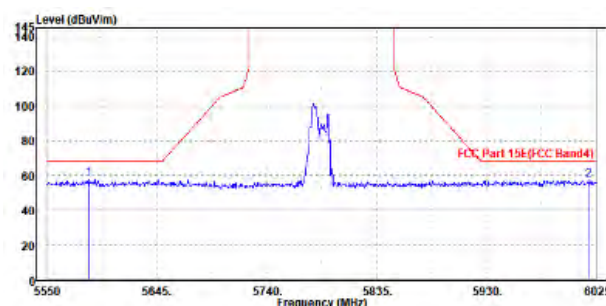



**BUREAU
VERITAS**

Test Report No.: W7L-231218W001RF03

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5825	100.14	100.18	/	/	34.99	11.68	46.71	100	25	Peak
5825	91	91.04	/	/	34.99	11.68	46.71	100	25	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5825	101.55	101.36	/	/	35.22	11.68	46.71	100	35	Peak
5825	93.3	93.11	/	/	35.22	11.68	46.71	100	35	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5825MHz: Fundamental frequency.




OUBE DATA

802.11ax (20MHz) (RU52):


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5560.925	56.63	57.18	68.2	-11.57	34.51	11.58	46.64	100	0	Peak
5999.35	57.1	56.81	68.2	-11.1	35.3	11.75	46.76	100	0	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5629.8	57.19	57.33	68.2	-11.01	34.91	11.61	46.66	100	360	Peak
6003.15	57.48	56.99	68.2	-10.72	35.5	11.75	46.76	100	360	Peak

CH 165

Horizontal

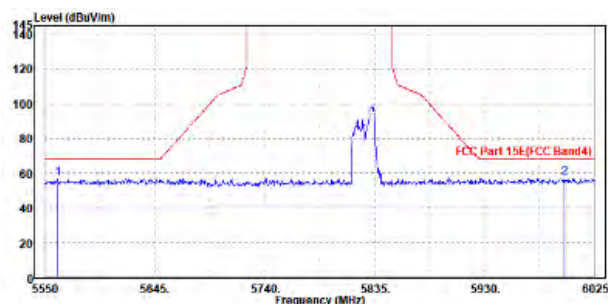

Vertical

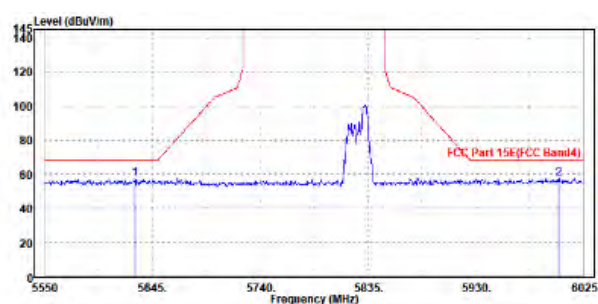



802.11ax (20MHz) (RU106):

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5745	96.4	96.6	/	/	34.84	11.65	46.69	100	45	Peak
5745	88.26	88.46	/	/	34.84	11.65	46.69	100	45	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5745	99.57	99.52	/	/	35.09	11.65	46.69	100	255	Peak
5745	91.8	91.75	/	/	35.09	11.65	46.69	100	255	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5745MHz: Fundamental frequency.




OBE DATA

802.11ax (20MHz) (RU106):


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5638.35	56.95	57.35	68.2	-11.25	34.65	11.61	46.66	100	360	Peak
5995.075	57.6	57.32	68.2	-10.6	35.29	11.75	46.76	100	360	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5584.2	57.45	57.67	68.2	-10.75	34.83	11.59	46.64	100	0	Peak
6017.4	58.2	57.67	68.2	-10	35.51	11.78	46.76	100	0	Peak

CH 149

Horizontal

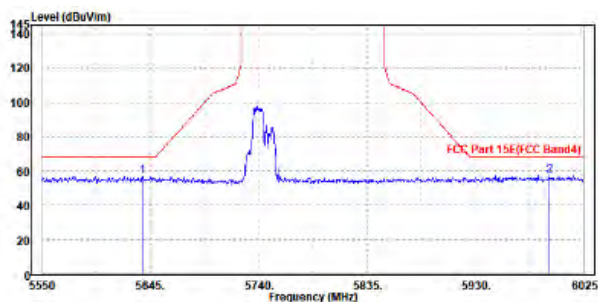

Vertical

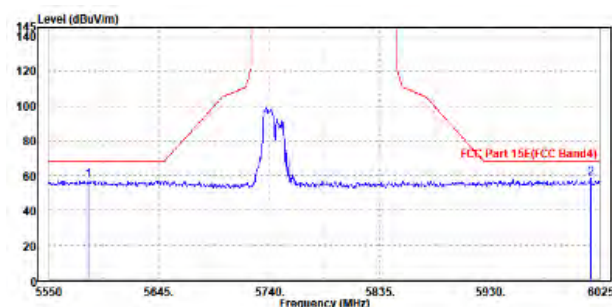



**BUREAU
VERITAS**

Test Report No.: W7L-231218W001RF03

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5785	95.9	96.02	/	/	34.91	11.67	46.7	100	90	Peak
5785	89.29	89.41	/	/	34.91	11.67	46.7	100	90	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5785	100.47	100.34	/	/	35.16	11.67	46.7	100	255	Peak
5785	92.82	92.69	/	/	35.16	11.67	46.7	100	255	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5785MHz: Fundamental frequency.




OUBE DATA

802.11ax (20MHz) (RU106):


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV /m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5621.725	57.43	57.85	68.2	-10.77	34.62	11.61	46.65	100	0	Peak
6004.1	57.89	57.59	68.2	-10.31	35.3	11.76	46.76	100	0	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV /m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5624.1	57.68	57.82	68.2	-10.52	34.9	11.61	46.65	100	360	Peak
5952.8	59.28	58.88	68.2	-8.92	35.42	11.73	46.75	100	360	Peak

CH 157

Horizontal

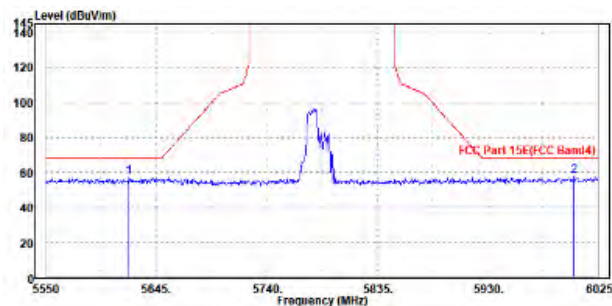

Vertical

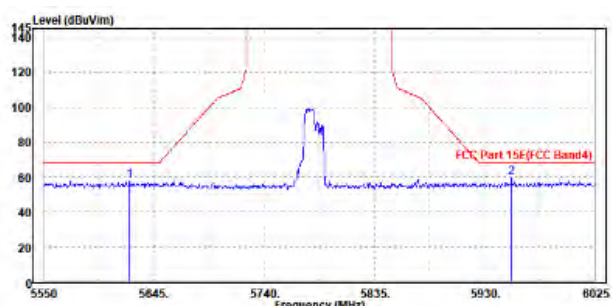



**BUREAU
VERITAS**

Test Report No.: W7L-231218W001RF03

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5825	97.11	97.15	/	/	34.99	11.68	46.71	100	95	Peak
5825	88.55	88.59	/	/	34.99	11.68	46.71	100	95	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5825	100.58	100.39	/	/	35.22	11.68	46.71	100	255	Peak
5825	91.88	91.69	/	/	35.22	11.68	46.71	100	255	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5825MHz: Fundamental frequency.




OOBE DATA

802.11ax (20MHz) (RU106):


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5645	57.28	57.66	68.2	-10.92	34.66	11.62	46.66	100	360	Peak
5938.075	57.44	57.26	68.2	-10.76	35.19	11.73	46.74	100	360	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5616.975	56.95	57.11	68.2	-11.25	34.89	11.6	46.65	100	0	Peak
5941.4	56.99	56.59	68.2	-11.21	35.41	11.73	46.74	100	0	Peak

CH 165

Horizontal

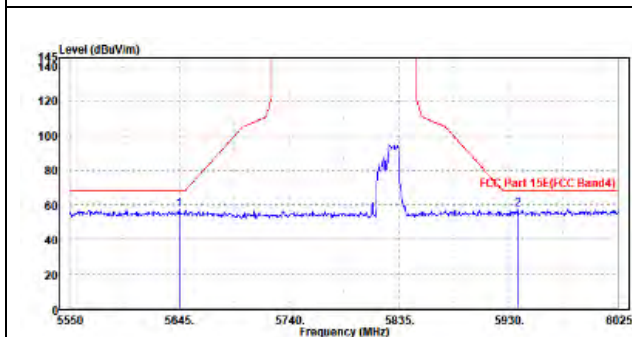

Vertical

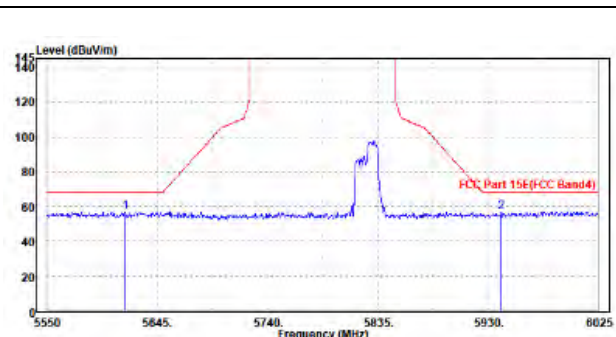



802.11ax (20MHz) (RU242):

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5745	101.03	101.23	/	/	34.84	11.65	46.69	100	75	Peak
5745	93.24	93.44	/	/	34.84	11.65	46.69	100	75	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5745	101.64	101.59	/	/	35.09	11.65	46.69	100	25	Peak
5745	92.93	92.88	/	/	35.09	11.65	46.69	100	25	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5745MHz: Fundamental frequency.




OOBE DATA

802.11ax (20MHz) (RU242):


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5599.875	57.22	57.69	68.2	-10.98	34.58	11.6	46.65	100	0	Peak
5939.5	57.21	57.03	68.2	-10.99	35.19	11.73	46.74	100	0	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5586.575	57.2	57.41	68.2	-11	34.84	11.59	46.64	100	360	Peak
5989.375	57.99	57.52	68.2	-10.21	35.48	11.75	46.76	100	360	Peak

CH 149

Horizontal

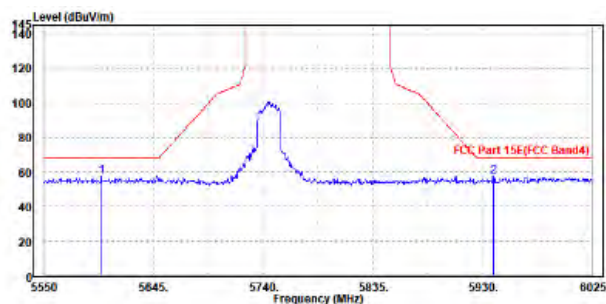

Vertical

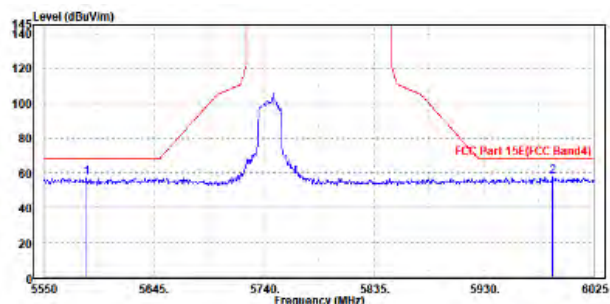



**BUREAU
VERITAS**

Test Report No.: W7L-231218W001RF03

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5785	100.23	100.35	/	/	34.91	11.67	46.7	100	80	Peak
5785	93.81	93.93	/	/	34.91	11.67	46.7	100	80	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5785	101.8	101.67	/	/	35.16	11.67	46.7	100	30	Peak
5785	94.39	94.26	/	/	35.16	11.67	46.7	100	30	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5785MHz: Fundamental frequency.




OOBE DATA

802.11ax (20MHz) (RU242):


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV /m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5554.275	56.91	57.47	68.2	-11.29	34.5	11.58	46.64	100	0	Peak
5959.45	57.17	56.96	68.2	-11.03	35.23	11.73	46.75	100	0	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV /m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5618.875	57.43	57.58	68.2	-10.77	34.89	11.61	46.65	100	360	Peak
5940.45	57.26	56.87	68.2	-10.94	35.4	11.73	46.74	100	360	Peak

CH 157

Horizontal

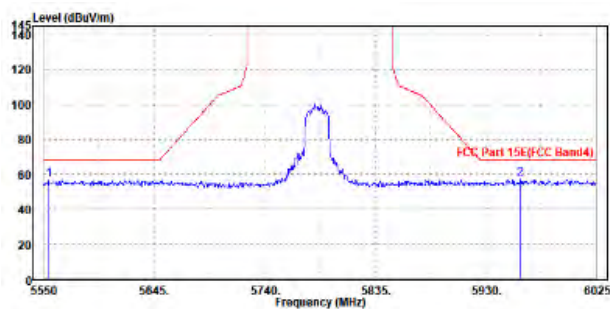

Vertical

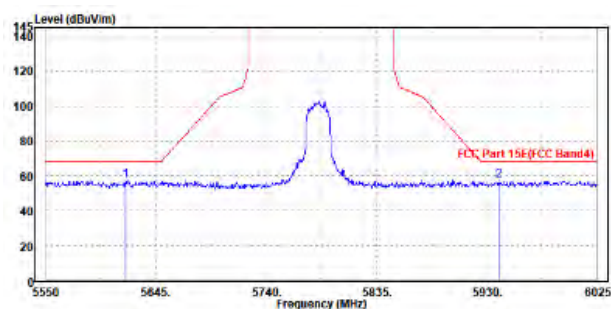



CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5825	101.24	101.28	/	/	34.99	11.68	46.71	100	105	Peak
5825	93.56	93.6	/	/	34.99	11.68	46.71	100	105	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5825	102.86	102.67	/	/	35.22	11.68	46.71	100	255	Peak
5825	95.32	95.13	/	/	35.22	11.68	46.71	100	255	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5825MHz: Fundamental frequency.




OOBE DATA

802.11ax (20MHz) (RU242):


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5574.225	56.89	57.41	68.2	-11.31	34.53	11.59	46.64	100	360	Peak
5985.575	57.47	57.22	68.2	-10.73	35.27	11.74	46.76	100	360	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5607.95	57.53	57.71	68.2	-10.67	34.87	11.6	46.65	100	0	Peak
5992.225	57.09	56.61	68.2	-11.11	35.49	11.75	46.76	100	0	Peak

CH 165

Horizontal

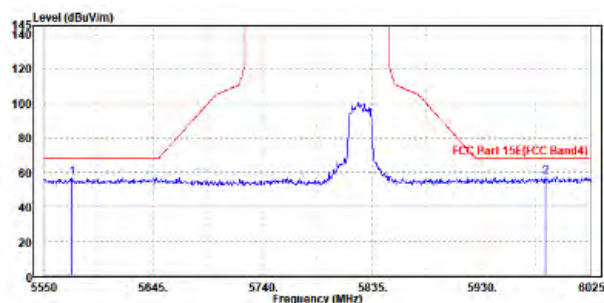

Vertical

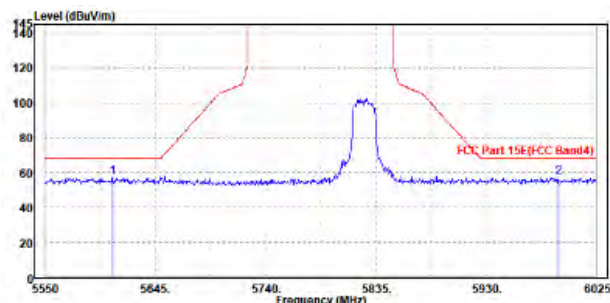



802.11ax (40MHz) (RU484):

CHANNEL	TX Channel 151	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5755	98.61	98.78	/	/	34.86	11.66	46.69	100	80	Peak
5755	91.53	91.7	/	/	34.86	11.66	46.69	100	80	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5755	99.82	99.74	/	/	35.11	11.66	46.69	100	265	Peak
5755	91.5	91.42	/	/	35.11	11.66	46.69	100	265	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5755MHz: Fundamental frequency.




Oobe Data

802.11ax (40MHz) (RU484):


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5644.05	58.89	59.28	68.2	-9.31	34.66	11.61	46.66	100	360	Peak
5974.65	57.75	57.51	68.2	-10.45	35.25	11.74	46.75	100	360	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5635.025	57.15	57.28	68.2	-11.05	34.92	11.61	46.66	100	0	Peak
5996.025	58.5	58.02	68.2	-9.7	35.49	11.75	46.76	100	0	Peak

CH 151

Horizontal

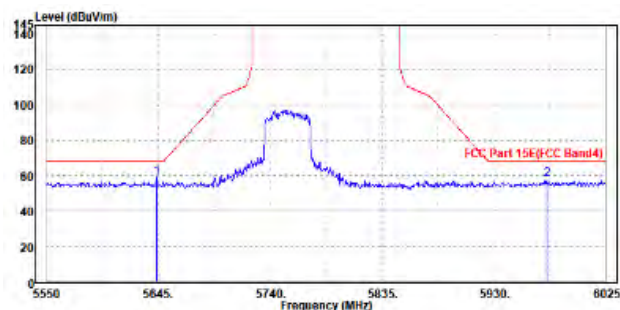

Vertical

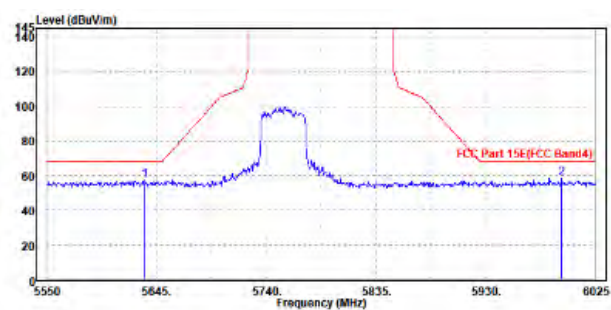



**BUREAU
VERITAS**

Test Report No.: W7L-231218W001RF03

CHANNEL	TX Channel 159	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5795	98.46	98.56	/	/	34.93	11.67	46.7	100	80	Peak
5795	90.93	91.03	/	/	34.93	11.67	46.7	100	80	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5795	100.86	100.72	/	/	35.17	11.67	46.7	100	265	Peak
5795	92.33	92.19	/	/	35.17	11.67	46.7	100	265	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 5795MHz: Fundamental frequency.




Oobe Data

802.11ax (40MHz) (RU484):


ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5632.175	57.89	58.3	68.2	-10.31	34.64	11.61	46.66	100	0	Peak
5957.075	58.63	58.43	68.2	-9.57	35.22	11.73	46.75	100	0	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5590.85	57.41	57.62	68.2	-10.79	34.85	11.59	46.65	100	360	Peak
5986.05	57.78	57.32	68.2	-10.42	35.48	11.74	46.76	100	360	Peak

CH 159

Horizontal

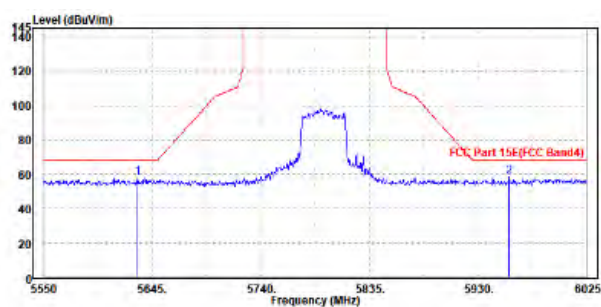

Vertical

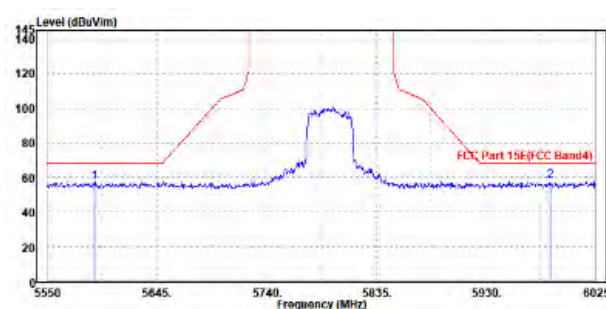



802.11ax (80MHz) (RU996):

CHANNEL	TX Channel 155	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5775	93.12	93.26	/	/	34.9	11.66	46.7	100	80	Peak
5775	86.21	86.35	/	/	34.9	11.66	46.7	100	80	Average
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5775	94.02	93.92	/	/	35.14	11.66	46.7	100	260	Peak
5775	86.83	86.73	/	/	35.14	11.66	46.7	100	260	Average

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5775MHz: Fundamental frequency.




OOBE DATA

802.11ax (80MHz) (RU996):

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5566.15	59.51	60.04	68.2	-8.69	34.52	11.59	46.64	100	360	Peak
5999.35	59.83	59.54	68.2	-8.37	35.3	11.75	46.76	100	360	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
5563.3	58.78	59.04	68.2	-9.42	34.8	11.58	46.64	100	360	Peak
6017.4	59.93	59.4	68.2	-8.27	35.51	11.78	46.76	100	360	Peak

CH 155

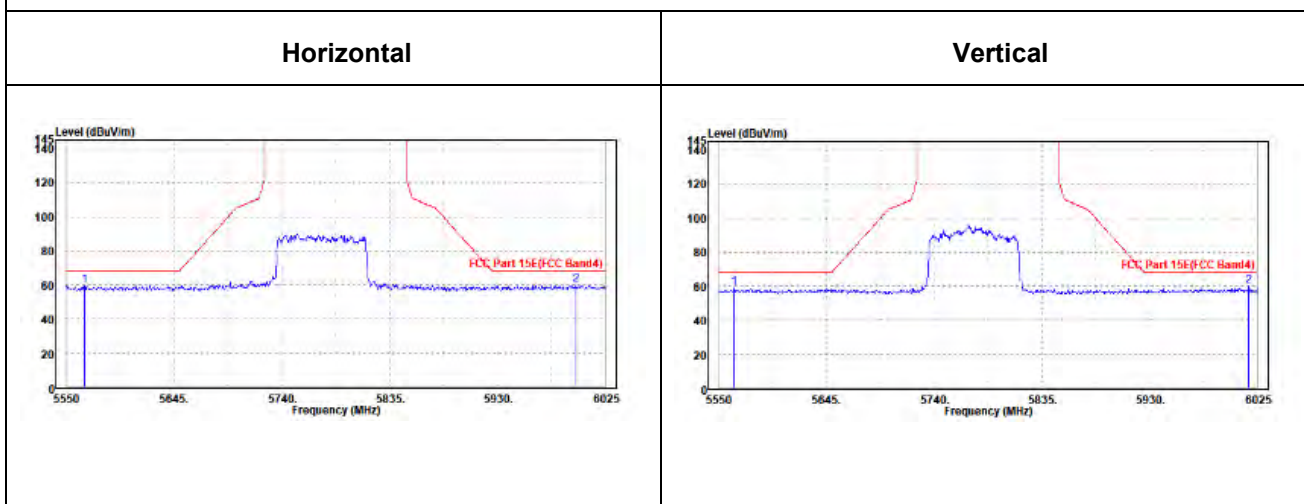




802.11ax (80MHz) (RU996):

Worst case harmonic:

CHANNEL	TX Channel 155	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	11557.000	53.78	43.05	74.00	-20.22	10.73	Peak	Horizontal
2	11557.000	47.52	36.79	54.00	-6.48	10.73	Average	Horizontal
3	PK17325.000	56.98	40.29	74.00	-17.02	16.69	Peak	Horizontal
4	PP17325.000	48.67	31.98	54.00	-5.33	16.69	Average	Horizontal

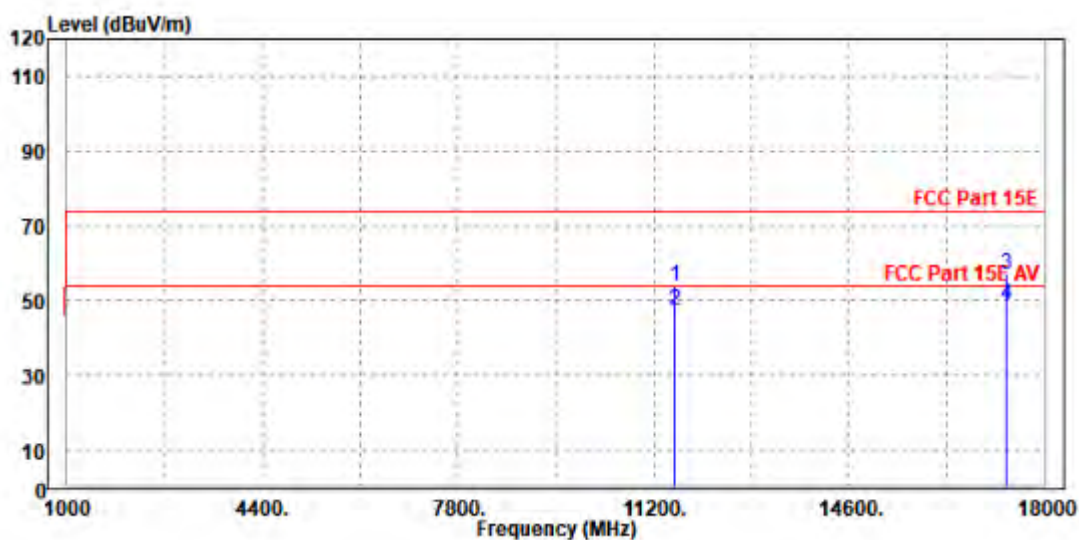



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	11550.000	53.96	43.20	74.00	-20.04	10.76	Peak	Vertical
2	11550.000	42.62	31.86	54.00	-11.38	10.76	Average	Vertical
3	PK17320.000	57.04	40.19	74.00	-16.96	16.85	Peak	Vertical
4	PP17320.000	49.26	32.41	54.00	-4.74	16.85	Average	Vertical

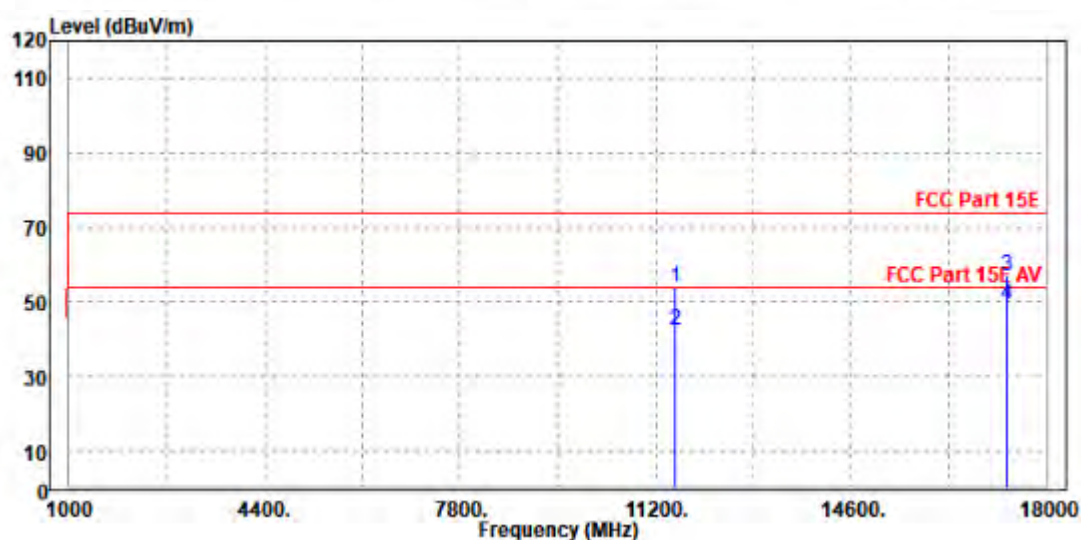

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 5775MHz: Fundamental frequency.
3. For frequency above 18GHz, the emission was tested 20db below the limit so the data not recorded in the sheet.

3.2 CONDUCTED EMISSION MEASUREMENT

3.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

3.2.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR3	101900	Feb. 15,23	Feb. 14,24
EMI Test Receiver	Rohde&Schwarz	ESR3	101900	Feb. 14,24	Feb. 13,25
EMC32 test software	Rohde&Schwarz	EMC32	NA	NA	NA
LISN network	Rohde&Schwarz	ENV216	101922	Mar. 11,23	Mar. 10,24
LISN network	Rohde&Schwarz	ENV216	101922	Mar. 10,24	Mar. 09,25

NOTE:

1. The test was performed in CE shielded room.
2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to CEPREI/CHINA, GREGT/CHINA and NIM/CHINA.

3.2.3 TEST PROCEDURES


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

3.2.4 DEVIATION FROM TEST STANDARD

No deviation.

3.2.5 TEST SETUP

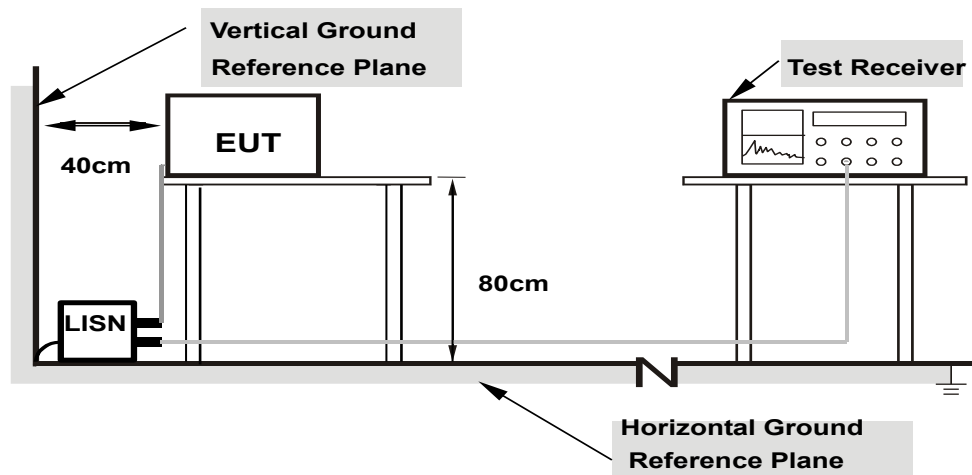

**Note: 1.Support units were connected to second LISN.
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80
from other units and other metal planes**

For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.2.6 EUT OPERATING CONDITIONS

Same as 3.1.7.

3.2.7 TEST RESULTS


CONDUCTED WORST-CASE DATA:

Frequency Range	150KHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120Vac, 60Hz	Environmental Conditions	26deg. C, 51%RH
Tested By	Carl Xie		

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.150000	---	25.17	56.00	30.83	L1	ON	9.8
0.150000	43.74	---	66.00	22.26	L1	ON	9.8
0.424000	---	34.49	47.37	12.88	L1	ON	9.8
0.424000	41.20	---	57.37	16.17	L1	ON	9.8
0.696000	---	22.32	46.00	23.68	L1	ON	9.8
0.696000	32.00	---	56.00	24.00	L1	ON	9.8
1.224000	---	23.02	46.00	22.98	L1	ON	9.8
1.224000	31.00	---	56.00	25.00	L1	ON	9.8
1.408000	---	22.17	46.00	23.83	L1	ON	9.8
1.408000	29.24	---	56.00	26.76	L1	ON	9.8
2.684000	---	18.36	46.00	27.64	L1	ON	9.9
2.684000	25.64	---	56.00	30.36	L1	ON	9.9

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Limit value - Emission level
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

Full Spectrum

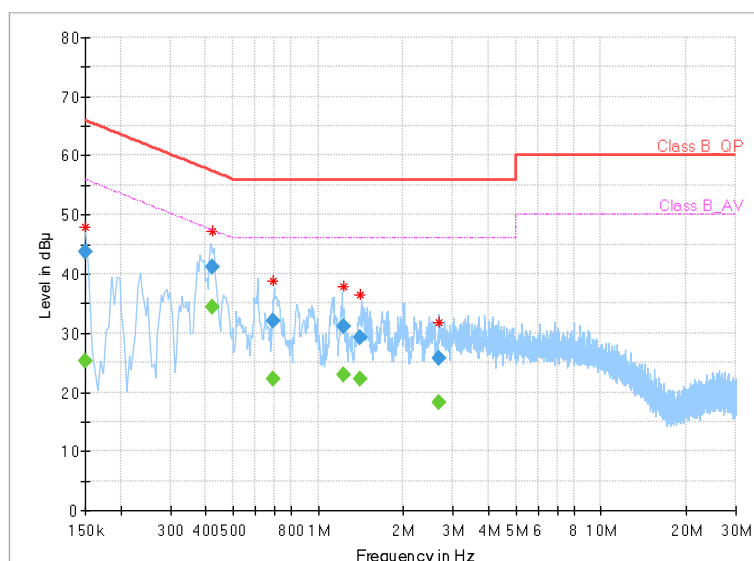




Frequency Range	150KHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120Vac, 60Hz	Environmental Conditions	26deg. C, 51%RH
Tested By	Carl Xie		

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.404000	---	44.09	47.77	3.68	N	ON	9.6
0.404000	49.46	---	57.77	8.31	N	ON	9.6
0.558000	---	25.28	46.00	20.72	N	ON	9.7
0.558000	32.26	---	56.00	23.74	N	ON	9.7
0.716000	---	31.85	46.00	14.15	N	ON	9.7
0.716000	38.76	---	56.00	17.24	N	ON	9.7
0.936000	---	28.95	46.00	17.05	N	ON	9.7
0.936000	35.93	---	56.00	20.07	N	ON	9.7
1.348000	---	24.36	46.00	21.64	N	ON	9.7
1.348000	31.12	---	56.00	24.88	N	ON	9.7
2.692000	---	23.40	46.00	22.60	N	ON	9.8
2.692000	31.10	---	56.00	24.90	N	ON	9.8

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Limit value - Emission level
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

Full Spectrum

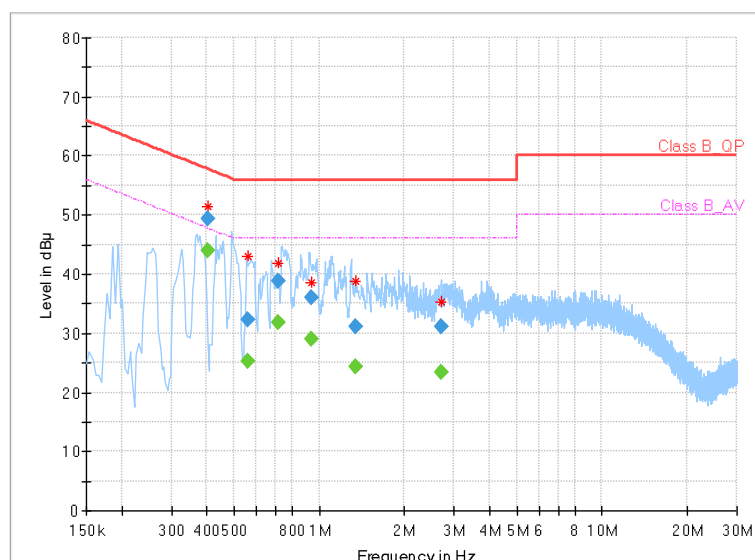

3.3 MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT

3.3.1 LIMITS OF MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT


Operation Band	EUT Category		LIMIT
U-NII-1		Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p $\leq$ 125mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon)
		Fixed point-to-point Access Point	1 Watt (30 dBm)
	B	Indoor Access Point	1 Watt (30 dBm)
	√	Client devices	250mW (24 dBm)
U-NII-2A	√		250mW (24 dBm) or 11 dBm+10 log B*
U-NII-2C	√		250mW (24 dBm) or 11 dBm+10 log B*
U-NII-3	√		1 Watt (30 dBm)

NOTE: Where B is the 26dB emission bandwidth in MHz.


3.3.2 TEST SETUP

FOR POWER OUTPUT MEASUREMENT

802.11a, 802.11n/ac/ax (20MHz), 802.11 n/ac/ax (40MHz) ,802.11 ac/ax (160MHz) TEST CONFIGURATION

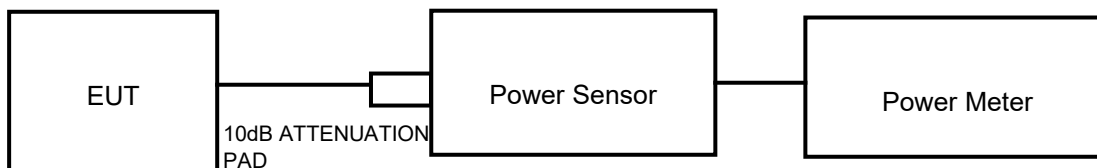

FOR 26dB BANDWIDTH



3.3.3 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Power Meter	ANRITSU	ML2495A	1506002	Feb. 15,23	Feb. 14,24
Power Meter	ANRITSU	ML2495A	1506002	Feb. 14,24	Feb. 13,25
EXA Signal Analyzer	KEYSIGHT	N9010A-526	MY54510523	Feb. 15,23	Feb. 14,24
EXA Signal Analyzer	KEYSIGHT	N9010A-526	MY54510523	Feb. 14,24	Feb. 13,25
EXA Signal Analyzer	KEYSIGHT	N9010A-544	MY54510355	May.10,23	May.09,24
EXA Signal Analyzer	KEYSIGHT	N9010A-544	MY54510355	May.09,24	May.08,25
Power Sensor	ANRITSU	MA2411B	1339352	Feb. 15,23	Feb. 14,24
Power Sensor	ANRITSU	MA2411B	1339352	Feb. 14,24	Feb. 13,25

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
2. The test was performed in RF Oven room.

3.3.4 TEST PROCEDURE

FOR POWER MEASUREMENT

For 802.11a, 802.11n/ac/ax (20MHz), 802.11 n/ac/ax (40MHz) ,802.11 ac/ax (160MHz)

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

FOR 99 PERCENT OCCUPIED BANDWIDTH

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW $\geq 3 \cdot$ RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

FOR 26dB BANDWIDTH

- 1) Set RBW = approximately 1% of the emission bandwidth.
- 2) Set the VBW > RBW.
- 3) Detector = Peak.
- 4) Trace mode = max hold.
- 5) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.



FOR 6dB BANDWIDTH

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) ≥ 3 RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

3.3.5 DEVIATION FROM TEST STANDARD

No deviation.

3.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.



Test Report No.: W7L-231218W001RF03

3.3.7 TEST RESULTS


Please Refer to Appendix C Of this test report.

3.4 MAXIMUM POWER SPECTRAL DENSITY MEASUREMENT

3.4.1 LIMITS OF MAXIMUM POWER SPECTRAL DENSITY MEASUREMENT

Operation Band	EUT Category		LIMIT
U-NII-1		Outdoor Access Point	17dBm/ MHz
		Fixed point-to-point Access Point	
		Indoor Access Point	
	√	Client devices	11dBm/ MHz
U-NII-2A	√		11dBm/ MHz
U-NII-2C	√		11dBm/ MHz
U-NII-3	√		30dBm/ 500kHz

3.4.2 TEST SETUP



3.4.3 TEST INSTRUMENTS

Refer to section 3.3.3 to get information of above instrument.

3.4.4 TEST PROCEDURES

Using method SA-2(Band1/2/3)

- 1) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- 2) Set RBW = 1 MHz, Set VBW $\geq$ 3 MHz, Detector = RMS
- 3) Set Channel power measure = 1MHz
- 4) Sweep time = auto, trigger set to "free run".
- 5) Trace average at least 100 traces in power averaging mode.
- 6) Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission).
- 7) Record the max value

Using method SA-2 (Band4)

- 1) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- 2) Set RBW = 300 kHz, Set VBW $\geq$ 1 MHz, Detector = RMS
- 3) Set Channel power measure = 1MHz
- 4) Sweep time = auto, trigger set to "free run".
- 5) Trace average at least 100 traces in power averaging mode.
- 6) Add $10 \log(500\text{kHz}/\text{RBW})$ to the test result. $10 \log(500\text{kHz}/300\text{KHZ}) = 2.22\text{dBm}$
- 7) Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission).
- 8) Record the max value

3.4.5 DEVIATION FROM TEST STANDARD

No deviation.

3.4.6 EUT OPERATING CONDITIONS

Same as 3.1.7.



Test Report No.: W7L-231218W001RF03

3.4.7 TEST RESULTS

Please Refer to Appendix C Of this test report.

3.5 AUTOMATICALLY DISCONTINUE TRANSMISSION

3.5.1 LIMIT OF AUTOMATICALLY DISCONTINUE TRANSMISSION

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information, or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.

3.5.2 TEST INSTRUMENTS

Refer to section 3.3.3 to get information of above instrument.

3.5.3 TEST RESULT

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

3.6 ANTENNA REQUIREMENTS

3.6.1 STANDARD APPLICABLE

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmits power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.6.2 ANTENNA CONNECTED CONSTRUCTION

An embedded-in antenna design is used.

3.6.3 ANTENNA GAIN

According to FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

Directional gain=GANT +Array Gain, where Array Gain is as follows.

For power spectral density (PSD) measurements on all devices,

Array Gain= 10 log(NANT/ Nss) dB;

For power measurements on IEEE 802.11 devices, Array Gain = 0 dB for NANT≤ 4;

The EUT supports Cyclic Delay Diversity (CDD) mode,

For power measurements, the directional GANT is set equal to the antenna having the highest gain as following formulas.

Directional Gain = Max.Gain + Array Gain.

For PSD measurements, the directional GANT is calculation is following F)2)f)ii of KDB 662911 D01 v02r01.

The directional gain is calculated as following table.

	Band	Ant 1 (dBi)	Ant 2 (dBi)	DG For Power (dBi)	DG For PSD (dBi)	Power Limit Reduction (dB)	PSD Limit Reduction (dB)
5GHz	U-NII 1	-2.96	2.03	2.03	2.9	0	0
	U-NII 2A	-3.77	1.61	1.61	2.34	0	0
	U-NII 2C	-1.48	2.74	2.74	3.89	0	0
	U-NII 3	-1.71	1.77	1.77	3.21	0	0

NOTE :DG= directional gain, Power Limit Reduction = DG For Power Gain -6dbi<0

PSD Limit Reduction = DG For PSD – 6dBi<0. Therefore, it is not necessary to reduce maximum peak output power and PSD limit.



Test Report No.: W7L-231218W001RF03

4 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).

5 MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

--END--