

# FCC Test Report

Product Name	WIFI Module
Model No	RF-WKD
FCC ID.	VTV-RFWKD

Applicant	TSC Auto ID Technology Co., Ltd.
Address	9F., No. 95, Minquan Rd. Xindian Dist. New Taipei City 23141, Taiwan

Date of Receipt	Dec. 11, 2014
Issue Date	Jan. 15, 2015
Report No.	14C0347R-RFUSP37V00
Report Version	V1.0



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of QuiTek Corporation.

# Test Report

Issue Date: Jan. 15, 2015

Report No.: 14C0347R-RFUSP37V00

**QuiTek**

Product Name	WIFI Module
Applicant	TSC Auto ID Technology Co., Ltd.
Address	9F., No. 95, Minquan Rd. Xindian Dist. New Taipei City 23141, Taiwan
Manufacturer	TSC Auto ID Technology Co., Ltd.
Model No.	RF-WKD
EUT Rated Voltage	DC 3.3V
EUT Test Voltage	AC 120V/60Hz
Trade Name	TSC
Applicable Standard	FCC CFR Title 47 Part 15 Subpart C: 2014 ANSI C63.10: 2009 KDB 558074 D01 DTS Meas Guidance v03r02
Test Result	Complied

Documented By :

Jinn Chen

( Senior Adm. Specialist / Jinn Chen )

Tested By :

Nova Chu

( Assistant Engineer / Nova Chu )

Approved By :



( Director / Vincent Lin )

---

## TABLE OF CONTENTS

Description	Page
<b>1. GENERAL INFORMATION .....</b>	<b>5</b>
1.1. EUT Description.....	5
1.2. Operational Description .....	7
1.3. Tested System Details.....	8
1.4. Configuration of Tested System .....	8
1.5. EUT Exercise Software .....	8
1.6. Test Facility .....	9
<b>2. Conducted Emission.....</b>	<b>10</b>
2.1. Test Equipment.....	10
2.2. Test Setup .....	10
2.3. Limits .....	11
2.4. Test Procedure .....	11
2.5. Uncertainty .....	11
2.6. Test Result of Conducted Emission.....	12
<b>3. Maximum Conducted Power.....</b>	<b>14</b>
3.1. Test Equipment.....	14
3.2. Test Setup .....	14
3.3. Limits .....	14
3.4. Test Procedure .....	14
3.5. Uncertainty .....	14
3.6. Test Result of Maximum Conducted Power.....	15
<b>4. Radiated Emission.....</b>	<b>19</b>
4.1. Test Equipment.....	19
4.2. Test Setup .....	19
4.3. Limits .....	20
4.4. Test Procedure .....	21
4.5. Uncertainty .....	21
4.6. Test Result of Radiated Emission.....	22
<b>5. RF Antenna conducted test.....</b>	<b>38</b>
5.1. Test Equipment.....	38
5.2. Test Setup .....	38
5.3. Limits .....	38
5.4. Test Procedure .....	39
5.5. Uncertainty .....	39
5.6. Test Result of RF antenna conducted test.....	40
<b>6. Band Edge .....</b>	<b>46</b>
6.1. Test Equipment.....	46
6.2. Test Setup .....	47
6.3. Limits .....	48
6.4. Test Procedure .....	48
6.5. Uncertainty .....	48
6.6. Test Result of Band Edge .....	49

---

---

<b>7.</b>	<b>Occupied Bandwidth .....</b>	<b>71</b>
7.1.	Test Equipment.....	71
7.2.	Test Setup .....	71
7.3.	Limits .....	71
7.4.	Test Procedure .....	71
7.5.	Uncertainty .....	71
7.6.	Test Result of Occupied Bandwidth .....	72
<b>8.</b>	<b>Power Density .....</b>	<b>84</b>
8.1.	Test Equipment.....	84
8.2.	Test Setup .....	84
8.3.	Limits .....	84
8.4.	Test Procedure .....	84
8.5.	Uncertainty .....	84
8.6.	Test Result of Power Density .....	85
<b>9.</b>	<b>EMI Reduction Method During Compliance Testing .....</b>	<b>97</b>

Attachment 1: EUT Test Photographs

Attachment 2: EUT Detailed Photographs

## 1. GENERAL INFORMATION

### 1.1. EUT Description

Product Name	WIFI Module
Trade Name	TSC
Model No.	RF-WKD
FCC ID.	VTV-RFWKD
Frequency Range	802.11b/g/n-20MHz:2412-2462MHz,802.11n-40MHz:2422-2452MHz
Number of Channels	802.11b/g/n-20MHz: 11, n-40MHz: 7
Data Speed	802.11b: 1-11Mbps, 802.11a/g: 6-54Mbps, 802.11n: up to 300Mbps
Type of Modulation	802.11b:DSSS, DBPSK, DQPSK, CCK 802.11g/n: OFDM, BPSK, QPSK, 16QAM, 64QAM
Antenna Type	PIFA Antenna
Antenna Gain	Refer to the table “Antenna List”
Channel Control	Auto

#### Antenna List

No.	Manufacturer	Part No.	Antenna Type	Peak Gain
1	TSC	P393B-70B140R(Main) P393B-70-82-L(Aux)	PIFA Antenna	3.2dBi for 2.4GHz

Note: The antenna of EUT is conform to FCC 15.203

## 802.11b/g/n-20MHz Center Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 01:	2412 MHz	Channel 02:	2417 MHz	Channel 03:	2422 MHz	Channel 04:	2427 MHz
Channel 05:	2432 MHz	Channel 06:	2437 MHz	Channel 07:	2442 MHz	Channel 08:	2447 MHz
Channel 09:	2452 MHz	Channel 10:	2457 MHz	Channel 11:	2462 MHz		

## 802.11n-40MHz (2.4G Band) Center Working Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 1:	2422 MHz	Channel 2:	2427 MHz	Channel 3:	2432 MHz	Channel 4:	2437 MHz
Channel 5:	2442 MHz	Channel 6:	2447 MHz	Channel 7:	2452 MHz		

## Note:

1. This device is a WIFI Module with a built-in WLAN transceiver.
2. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.
3. Lowest and highest data rates are tested in each mode. Only worst case is shown in the report.  
(802.11b is 1Mbps 、 802.11g is 6Mbps 、 802.11n(20M-BW) is 14.4Mbps and, 802.11n(40M-BW) is 30Mbps).
4. At result of pretests, module supports dual-channel transmission, only the worst case is shown in the report. (802.11b is chain A, 802.11g is chain B, 802.11n is chain A + chain B)
5. These tests are conducted on a sample for the purpose of demonstrating compliance of 802.11b/g/n transmitter with Part 15 Subpart C Paragraph 15.247 of spread spectrum devices.
6. The radiation measurements are performed in X, Y, Z axis positioning. Only the worst case is shown in the report.

Test Mode:	Mode 1: Transmit (802.11b 1Mbps)
	Mode 2: Transmit (802.11g 6Mbps)
	Mode 4: Transmit - 802.11n-20BW_14.4Mbps(2.4G Band)
	Mode 5: Transmit - 802.11n-40BW_30Mbps(2.4G Band)


### 1.3. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product	Manufacturer	Model No.	Serial No.	Power Cord
(1) Notebook PC	DELL	PPT	N/A	Non-Shielded, 0.8m
(2) Test Fixture	Logitech	N/A	N/A	N/A
(3) USB to LAN Adapter	Aibo	CA-USB-RJ45B	G0X01JHA	N/A

Signal Cable Type		Signal cable Description
A	Sign Cable	Non-Shielded, 0.15m, with two ferrite cores bonded.
B	USB Cable	Non-Shielded, 0.2m
C	RS232 to USB Cable	Shielded, 1.7m
D	LAN Cable	Non-Shielded, 1.4m

### 1.4. Configuration of Tested System

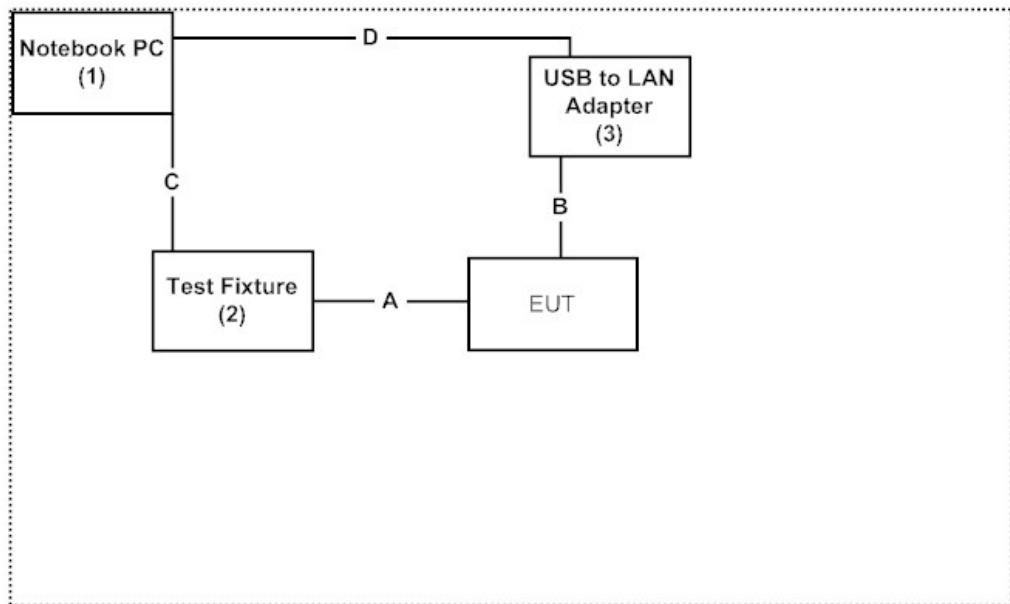

### 1.5. EUT Exercise Software

- (1) Setup the EUT as shown on Section 1.4
- (2) Execute “ART2-GUI 2.3” program on the Notebook PC.
- (3) Configure the test mode, the test channel, and the data rate.
- (4) Start the continuous transmission.
- (5) Verify that the EUT works properly.

## 1.6. Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	50-65
Barometric pressure (mbar)	860-1060	950-1000

The related certificate for our laboratories about the test site and management system can be downloaded from QuieTek Corporation's Web Site : <http://www.quietek.com/tw/ctg/cts/accreditations.htm>

The address and introduction of QuieTek Corporation's laboratories can be founded in our Web site : <http://www.quietek.com/>

FCC Accreditation Number: TW1014

## 2. Conducted Emission


### 2.1. Test Equipment

	Equipment	Manufacturer	Model No. / Serial No.	Last Cal.	Remark
X	Test Receiver	R & S	ESCS 30 / 825442/018	Sep., 2014	
X	Artificial Mains Network	R & S	ENV4200 / 848411/10	Feb., 2014	Peripherals
X	LISN	R & S	ESH3-Z5 / 825562/002	Feb., 2014	EUT
	DC LISN	Schwarzbeck	8226 / 176	Mar, 2014	EUT
X	Pulse Limiter	R & S	ESH3-Z2 / 357.8810.52	Feb., 2014	
	No.1 Shielded Room				

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked by "X" are used to measure the final test results.

### 2.2. Test Setup

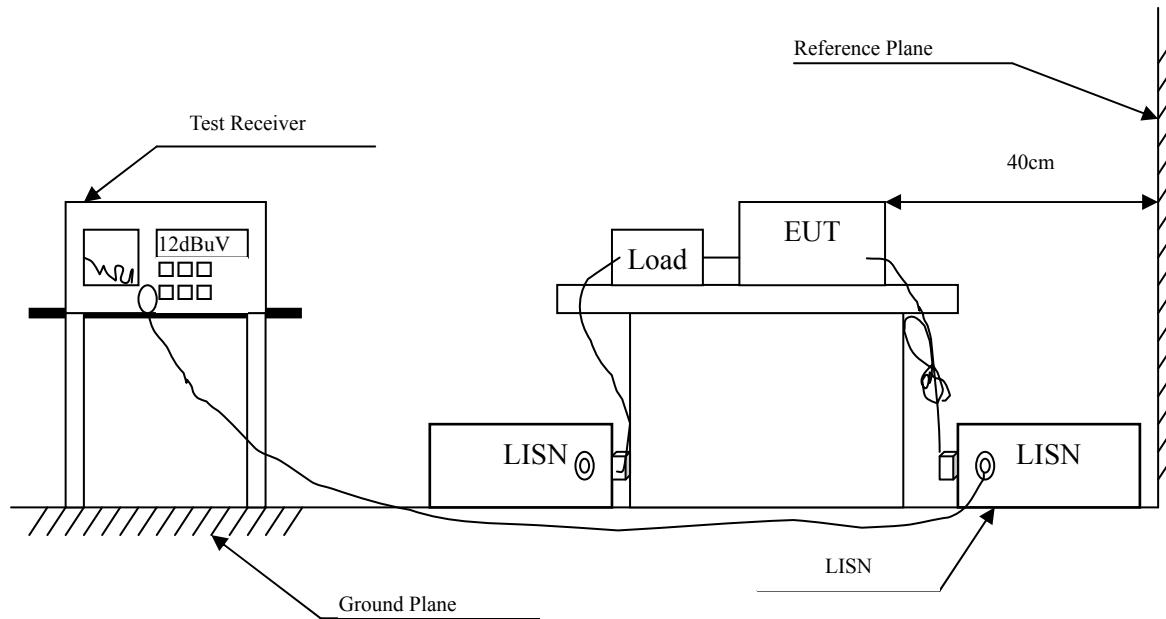

### 2.3. Limits

<b>FCC Part 15 Subpart C Paragraph 15.207 (dBuV) Limit</b>		
Frequency MHz	Limits	
	QP	AVG
0.15 - 0.50	66-56	56-46
0.50-5.0	56	46
5.0 - 30	60	50

### 2.4. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2009 on conducted measurement.

Conducted emissions were invested over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

### 2.5. Uncertainty

± 2.26 dB

**2.6. Test Result of Conducted Emission**

Product : WIFI Module  
Test Item : Conducted Emission Test  
Power Line : Line 1  
Test Mode : Mode 5: Transmit - 802.11n-40BW\_30Mbps(2.4G Band) (2437MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV	Margin dB	Limit dBuV
Line 1					
Quasi-Peak					
0.170	9.743	34.220	43.964	-21.465	65.429
0.216	9.739	30.030	39.769	-24.345	64.114
0.334	9.745	27.380	37.125	-23.618	60.743
0.490	9.752	32.180	41.932	-14.354	56.286
0.779	9.765	28.600	38.365	-17.635	56.000
7.920	9.910	27.320	37.230	-22.770	60.000
Average					
0.170	9.743	18.800	28.544	-26.885	55.429
0.216	9.739	22.700	32.439	-21.675	54.114
0.334	9.745	24.340	34.085	-16.658	50.743
0.490	9.752	24.580	34.332	-11.954	46.286
0.779	9.765	20.320	30.085	-15.915	46.000
7.920	9.910	21.530	31.440	-18.560	50.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. “■” means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : WIFI Module  
Test Item : Conducted Emission Test  
Power Line : Line 2  
Test Mode : Mode 5: Transmit - 802.11n-40BW\_30Mbps(2.4G Band) (2437MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV	dB	dBuV
Line 2					
Quasi-Peak					
0.173	9.747	31.650	41.397	-23.946	65.343
0.509	9.753	33.100	42.853	-13.147	56.000
0.771	9.775	28.660	38.435	-17.565	56.000
1.974	9.839	19.840	29.679	-26.321	56.000
6.685	9.900	23.990	33.890	-26.110	60.000
20.920	10.100	24.460	34.560	-25.440	60.000
Average					
0.173	9.747	12.100	21.847	-33.496	55.343
0.509	9.753	21.120	30.873	-15.127	46.000
0.771	9.775	18.660	28.435	-17.565	46.000
1.974	9.839	6.030	15.869	-30.131	46.000
6.685	9.900	16.290	26.190	-23.810	50.000
20.920	10.100	19.050	29.150	-20.850	50.000

## Note:

1. All Reading Levels are Quasi-Peak and average value.
2. “ ” means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

### 3. Maximum Conducted Power


#### 3.1. Test Equipment

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X	Power Meter	Anritsu	ML2495A/6K00003357	May, 2014
X	Power Sensor	Anritsu	MA2411B/0738448	Jun, 2014
	Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2014
	Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2014
	Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2014

Note:

1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with “X” are used to measure the final test results.

#### 3.2. Test Setup

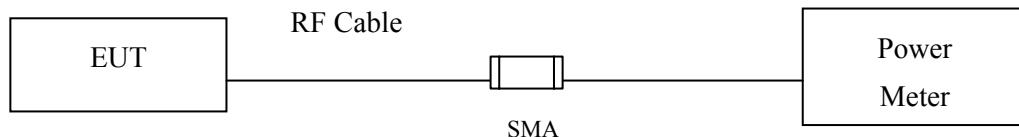

#### 3.3. Limits

The maximum average power shall be less 1 Watt. (Section 15.247 (b)(3))

#### 3.4. Test Procedure

The EUT was tested according to DTS test procedure of KDB 558074 for compliance to FCC 47CFR 15.247 requirements. The maximum peak conducted output power using KDB 558074 D01 DTS Meas Guidance v03r02 section 9.1.2 PKPM1 Peak power meter method.

#### 3.5. Uncertainty

± 1.27 dB

**3.6. Test Result of Maximum Conducted Power**

Product : WIFI Module  
Test Item : Maximum Conducted Power  
Test Site : No.3 OATS  
Test Mode : Mode 1: Transmit (802.11b 1Mbps)

**CHAIN A**

Channel No	Frequency (MHz)	Average Power For different Data Rate (Mbps)				Peak Power	Required Limit	Result
		1	2	5.5	11			
		Measurement Level (dBm)						
01	2412	15.01	--	--	--	16.97	<30dBm	Pass
06	2437	15.92	15.84	15.76	15.69	17.78	<30dBm	Pass
11	2462	15.44	--	--	--	17.38	<30dBm	Pass

Note: Peak Power Output Value =Reading value on power meter + cable loss

**CHAIN B**

Channel No	Frequency (MHz)	Average Power For different Data Rate (Mbps)				Peak Power	Required Limit	Result
		1	2	5.5	11			
		Measurement Level (dBm)						
01	2412	14.56	--	--	--	16.67	<30dBm	Pass
06	2437	14.57	14.51	14.43	14.34	16.5	<30dBm	Pass
11	2462	13.93	--	--	--	16.02	<30dBm	Pass

Note: Peak Power Output Value =Reading value on power meter + cable loss

Product : WIFI Module  
 Test Item : Maximum Conducted Power  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit (802.11g 6Mbps)

**CHAIN A**

Channel No	Frequency (MHz)	Average Power For different Data Rate (Mbps)								Peak Power	Required Limit	Result
		6	9	12	18	24	36	48	54			
		Measurement Level (dBm)										
01	2412	14.75	--	--	--	--	--	--	--	20.7	<30dBm	Pass
06	2437	15.96	15.89	15.81	15.75	15.67	15.6	15.52	15.44	21.27	<30dBm	Pass
11	2462	15.95	--	--	--	--	--	--	--	21.25	<30dBm	Pass

Note: Peak Power Output Value =Reading value on power meter + cable loss

**CHAIN B**

Channel No	Frequency (MHz)	Average Power For different Data Rate (Mbps)								Peak Power	Required Limit	Result
		6	9	12	18	24	36	48	54			
		Measurement Level (dBm)										
01	2412	15.39	--	--	--	--	--	--	--	20.78	<30dBm	Pass
06	2437	15.01	14.92	14.83	14.76	14.7	14.63	14.54	14.47	20.51	<30dBm	Pass
11	2462	14.26	--	--	--	--	--	--	--	20.12	<30dBm	Pass

Note: Peak Power Output Value =Reading value on power meter + cable loss

Product : WIFI Module  
 Test Item : Maximum Conducted Power  
 Test Site : No.3 OATS  
 Test Mode : Mode 4: Transmit - 802.11n-20BW\_14.4Mbps(2.4G Band)

**CHAIN A**

Channel No	Frequency (MHz)	Average Power For different Data Rate (Mbps)								Peak Power
		14.4	28.9	43.3	57.8	86.7	115.6	130	144.4	
		Measurement Level (dBm)								
01	2412	14.01	--	--	--	--	--	--	--	20.28
06	2437	14.65	14.58	14.51	14.43	14.36	14.29	14.22	14.18	20.61
11	2462	14.5	--	--	--	--	--	--	--	20.53

Note: Peak Power Output Value =Reading value on power meter + cable loss

**CHAIN B**

Channel No	Frequency (MHz)	Average Power For different Data Rate (Mbps)								Peak Power
		14.4	28.9	43.3	57.8	86.7	115.6	130	144.4	
		Measurement Level (dBm)								
01	2412	13.36	--	--	--	--	--	--	--	19.84
06	2437	13.32	13.24	13.17	13.1	13.03	12.97	12.92	12.85	19.81
11	2462	12.78	--	--	--	--	--	--	--	19.32

Note: Peak Power Output Value =Reading value on power meter + cable loss

**CHAIN A+B**

Channel	Frequency (MHz)	Data Rata (Mbps)	Chain A Power (dBm)	Chain B Power (dBm)	Chain A+B Power (dBm)	Limit (dBm)	Result
1	2412	14.4	20.28	19.84	23.08	<30dBm	Pass
6	2437	14.4	20.61	19.81	23.24	<30dBm	Pass
11	2462	14.4	20.53	19.32	22.98	<30dBm	Pass

Note: Peak Power Output Value (dBm) =  $10 \times \log (\text{Chain A (mW)} + \text{Chain B (mW)})$

Product : WIFI Module  
 Test Item : Maximum Conducted Power  
 Test Site : No.3 OATS  
 Test Mode : Mode 5: Transmit - 802.11n-40BW\_30Mbps(2.4G Band)

**CHAIN A**

Channel No	Frequency (MHz)	Average Power For different Data Rate (Mbps)								Peak Power
		30	60	90	120	180	240	270	300	
		Measurement Level (dBm)								
3	2422	11.24	--	--	--	--	--	--	--	19.78
6	2437	14.49	14.41	14.34	14.28	14.21	14.15	14.09	14.02	20.91
9	2452	13.09	--	--	--	--	--	--	--	20.37

Note: Peak Power Output Value =Reading value on power meter + cable loss

**CHAIN B**

Channel No	Frequency (MHz)	Average Power For different Data Rate (Mbps)								Peak Power
		30	60	90	120	180	240	270	300	
		Measurement Level (dBm)								
3	2422	10.4	--	--	--	--	--	--	--	18.79
6	2437	13.26	13.19	13.11	13.04	12.97	12.9	12.83	12.76	20.01
9	2452	11.83	--	--	--	--	--	--	--	19.17

Note: Peak Power Output Value =Reading value on power meter + cable loss

**CHAIN A+B**

Channel	Frequency (MHz)	Data Rata (Mbps)	Chain A Power (dBm)	Chain B Power (dBm)	Chain A+B Power (dBm)	Limit (dBm)	Result
3	2422	30	19.78	18.79	22.32	<30dBm	Pass
6	2437	30	20.91	20.01	23.49	<30dBm	Pass
9	2452	30	20.37	19.17	22.82	<30dBm	Pass

Note: Peak Power Output Value (dBm) =  $10 \times \log (\text{Chain A (mW)} + \text{Chain B (mW)})$

## 4. Radiated Emission

### 4.1. Test Equipment


The following test equipments are used during the radiated emission test:

Test Site	Equipment		Manufacturer	Model No./Serial No.	Last Cal.
☒ Site # 3	X	Loop Antenna	Teseq	HLA6120 / 26739	Jul., 2014
	X	Bilog Antenna	Schaffner Chase	CBL6112B/2673	Sep., 2014
	X	Horn Antenna	Schwarzbeck	BBHA9120D/D305	Sep., 2014
	X	Horn Antenna	Schwarzbeck	BBHA9170/208	Jul., 2014
	X	Pre-Amplifier	Agilent	8447D/2944A09549	Sep., 2014
	X	Spectrum Analyzer	Agilent	E4407B / US39440758	May, 2014
	X	Test Receiver	R & S	ESCS 30/ 825442/018	Sep., 2014
	X	Coaxial Cable	QuiTek	QTK-CABLE/ CAB5	Feb., 2014
	X	Controller	QuiTek	QTK-CONTROLLER/ CTRL3	N/A
	X	Coaxial Switch	Anritsu	MP59B/6200265729	N/A


Note: 1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.  
 2. The test instruments marked with "X" are used to measure the final test results.

### 4.2. Test Setup

Radiated Emission Below 1GHz

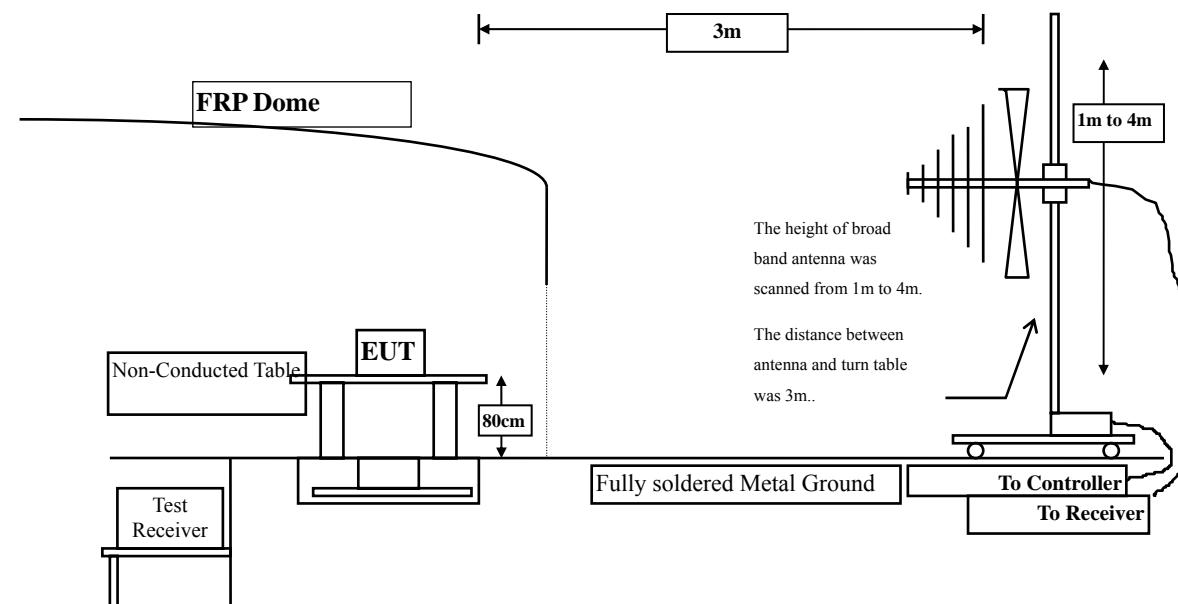

## Radiated Emission Above 1GHz

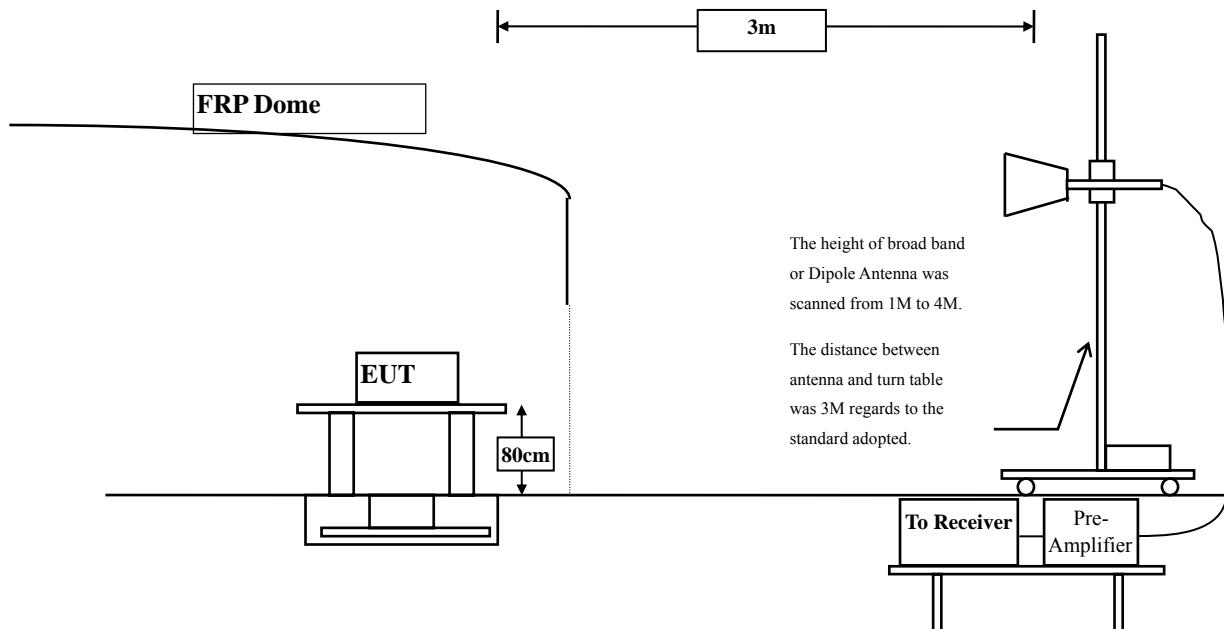

#### 4.3. Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 30dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209(a) Limits		
Frequency MHz	Field strength (microvolts/meter)	Measurement distance (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remarks: E field strength (dBuV/m) = 20 log E field strength (uV/m)

#### **4.4. Test Procedure**

The EUT was setup according to ANSI C63.10: 2009 and tested according to DTS test procedure of KDB558074 for compliance to FCC 47CFR 15.247 requirements.

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned between 1 meter and 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10: 2009 on radiated measurement.

The resolution bandwidth below 30MHz setting on the field strength meter is 9kHz and 30MHz~1GHz is 120kHz and above 1GHz is 1MHz.

Radiated emission measurements below 30MHz are made using Loop Antenna and 30MHz~1GHz are made using broadband Bilog antenna and above 1GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna.

The worst radiated emission is measured in the Open Area Test Site on the Final Measurement.

The measurement frequency range from 9KHz - 10th Harmonic of fundamental was investigated.

#### **4.5. Uncertainty**

± 3.9 dB above 1GHz

± 3.8 dB below 1GHz

**4.6. Test Result of Radiated Emission**

Product : WIFI Module  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2412MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
4824.000	2.428	53.430	55.859	-18.141	74.000
7236.000	9.177	39.620	48.797	-25.203	74.000
9648.000	10.019	40.550	50.570	-23.430	74.000
<b>Average Detector:</b>					
4824.000	2.428	51.140	53.569	-0.431	54.000
<b>Vertical</b>					
<b>Peak Detector:</b>					
4824.000	2.836	53.570	56.407	-17.593	74.000
7236.000	9.676	40.550	50.226	-23.774	74.000
9648.000	10.556	39.630	50.187	-23.813	74.000
<b>Average Detector:</b>					
4824.000	2.836	50.550	53.387	-0.613	54.000

**Note:**

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : WIFI Module  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2437 MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
4874.000	2.076	53.690	55.767	-18.233	74.000
7311.000	9.512	40.360	49.872	-24.128	74.000
9748.000	9.630	39.630	49.260	-24.740	74.000
<b>Average Detector:</b>					
4874.000	2.076	51.520	53.597	-0.403	54.000
<b>Vertical</b>					
<b>Peak Detector:</b>					
4874.000	2.532	53.850	56.382	-17.618	74.000
7311.000	10.089	40.590	50.679	-23.321	74.000
9748.000	10.266	40.520	50.787	-23.213	74.000
<b>Average Detector:</b>					
4874.000	2.532	51.020	53.552	-0.448	54.000

**Note:**

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : WIFI Module  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2462 MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
4924.000	2.191	53.850	56.041	-17.959	74.000
7386.000	10.373	39.260	49.634	-24.366	74.000
9848.000	9.964	39.620	49.584	-24.416	74.000
<b>Average Detector:</b>					
4924.000	2.191	51.520	53.711	-0.289	54.000
<b>Vertical</b>					
<b>Peak Detector:</b>					
4924.000	2.805	53.630	56.435	-17.565	74.000
7386.000	11.180	40.230	51.410	-22.590	74.000
9848.000	10.801	40.030	50.831	-23.169	74.000
<b>Average Detector:</b>					
4924.000	2.805	51.010	53.815	-0.185	54.000

**Note:**

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : WIFI Module  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2412MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m

**Horizontal****Peak Detector:**

4824.000	3.261	46.260	49.521	-24.479	74.000
7236.000	10.650	37.230	47.880	-26.120	74.000
9648.000	13.337	37.120	50.456	-23.544	74.000

**Average****Detector:**

--

**Vertical****Peak Detector:**

4824.000	6.421	47.020	53.441	-20.559	74.000
7236.000	11.495	37.520	49.015	-24.985	74.000
9648.000	13.807	37.110	50.916	-23.084	74.000

**Average****Detector:**

--

**Note:**

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : WIFI Module  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2437 MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m

**Horizontal****Peak Detector:**

4874.000	3.038	45.120	48.157	-25.843	74.000
7311.000	11.795	37.590	49.384	-24.616	74.000
9748.000	12.635	37.030	49.665	-24.335	74.000

**Average****Detector:**

--

**Vertical****Peak Detector:**

4874.000	5.812	47.620	53.431	-20.569	74.000
7311.000	12.630	36.850	49.479	-24.521	74.000
9748.000	13.126	37.060	50.186	-23.814	74.000

**Average****Detector:**

--

**Note:**

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : WIFI Module  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2462 MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
------------------	-------------------------	--------------------------	--------------------------------	--------------	-----------------

**Horizontal****Peak Detector:**

4924.000	2.858	45.590	48.447	-25.553	74.000
7386.000	12.127	36.960	49.088	-24.912	74.000
9748.000	12.635	37.230	49.865	-24.135	74.000

**Average****Detector:**

--

**Vertical****Peak Detector:**

4924.000	5.521	44.030	49.550	-24.450	74.000
7386.000	13.254	37.120	50.374	-23.626	74.000
9848.000	13.367	37.360	50.727	-23.273	74.000

**Average****Detector:**

--

**Note:**

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : WIFI Module  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 4: Transmit - 802.11n-20BW\_14.4Mbps(2.4G Band) (2412MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m

**Horizontal****Peak Detector:**

4824.000	3.261	40.230	43.491	-30.509	74.000
7236.000	10.650	37.120	47.770	-26.230	74.000
9648.000	13.337	36.990	50.326	-23.674	74.000

**Average****Detector:**

--

**Vertical****Peak Detector:**

4824.000	6.421	42.660	49.081	-24.919	74.000
7236.000	11.495	37.030	48.525	-25.475	74.000
9648.000	13.807	37.210	51.016	-22.984	74.000

**Average****Detector:**

--

**Note:**

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : WIFI Module  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 4: Transmit - 802.11n-20BW\_14.4Mbps(2.4G Band) (2437 MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m

**Horizontal****Peak Detector:**

4874.000	3.038	41.260	44.297	-29.703	74.000
7311.000	11.795	37.260	49.054	-24.946	74.000
9748.000	12.635	37.230	49.865	-24.135	74.000

**Average****Detector:**

--

**Vertical****Peak Detector:**

4874.000	5.812	42.850	48.661	-25.339	74.000
7311.000	12.630	37.520	50.149	-23.851	74.000
9748.000	13.126	37.690	50.816	-23.184	74.000

**Average****Detector:**

--

**Note:**

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : WIFI Module  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 4: Transmit - 802.11n-20BW\_14.4Mbps(2.4G Band) (2462 MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
------------------	-------------------------	--------------------------	--------------------------------	--------------	-----------------

**Horizontal****Peak Detector:**

4924.000	2.858	42.630	45.487	-28.513	74.000
7386.000	12.127	37.590	49.718	-24.282	74.000
9848.000	12.852	38.030	50.883	-23.117	74.000

**Average****Detector:**

--

**Vertical****Peak Detector:**

4924.000	5.521	42.550	48.070	-25.930	74.000
7386.000	13.254	37.160	50.414	-23.586	74.000
9848.000	13.367	37.560	50.927	-23.073	74.000

**Average****Detector:**

--

**Note:**

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : WIFI Module  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 5: Transmit - 802.11n-40BW\_30Mbps(2.4G Band) (2422MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m

**Horizontal****Peak Detector:**

4844.000	3.171	42.590	45.761	-28.239	74.000
7266.000	11.162	37.150	48.312	-25.688	74.000
9688.000	12.964	37.230	50.195	-23.805	74.000

**Average****Detector:**

--

**Vertical****Peak Detector:**

4844.000	6.178	42.590	48.768	-25.232	74.000
7266.000	11.982	38.120	50.102	-23.898	74.000
9688.000	13.507	36.590	50.098	-23.902	74.000

**Average****Detector:**

--

--

**Note:**

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : WIFI Module  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 5: Transmit - 802.11n-40BW\_30Mbps(2.4G Band) (2437 MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m

**Horizontal****Peak Detector:**

4874.000	3.038	42.260	45.297	-28.703	74.000
7311.000	11.795	37.230	49.024	-24.976	74.000
9748.000	12.635	37.030	49.665	-24.335	74.000

**Average****Detector:**

--

**Vertical****Peak Detector:**

4874.000	5.812	42.560	48.371	-25.629	74.000
7311.000	12.630	37.030	49.659	-24.341	74.000
9748.000	13.126	37.030	50.156	-23.844	74.000

**Average****Detector:**

--

**Note:**

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : WIFI Module  
Test Item : Harmonic Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 5: Transmit - 802.11n-40BW\_30Mbps(2.4G Band) (2452 MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
------------------	-------------------------	--------------------------	--------------------------------	--------------	-----------------

**Horizontal****Peak Detector:**

4904.000	2.914	40.260	43.175	-30.825	74.000
7356.000	11.995	37.260	49.254	-24.746	74.000
9808.000	12.475	37.030	49.505	-24.495	74.000

**Average****Detector:**

--

**Vertical****Peak Detector:**

4904.000	5.530	42.660	48.191	-25.809	74.000
7356.000	13.005	37.120	50.124	-23.876	74.000
9808.000	12.901	37.230	50.131	-23.869	74.000

**Average****Detector:**

--

**Note:**

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : WIFI Module  
Test Item : General Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2437 MHz)

Frequency MHz	Correct Factor	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
<b>Horizontal</b>					
107.600	-7.597	34.490	26.893	-16.607	43.500
225.940	-9.647	44.883	35.236	-10.764	46.000
365.620	0.382	33.763	34.145	-11.855	46.000
600.360	3.472	26.384	29.856	-16.144	46.000
800.180	6.417	24.940	31.357	-14.643	46.000
951.500	6.993	24.981	31.974	-14.026	46.000
<b>Vertical</b>					
43.580	-10.919	41.976	31.057	-8.943	40.000
262.800	-4.944	33.778	28.834	-17.166	46.000
511.120	0.783	23.826	24.609	-21.391	46.000
689.600	2.302	22.662	24.964	-21.036	46.000
817.640	2.966	23.702	26.668	-19.332	46.000
920.460	3.272	23.924	27.196	-18.804	46.000

## Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : WIFI Module  
Test Item : General Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2437 MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m
<b>Horizontal</b>					
119.240	-7.291	35.094	27.804	-15.696	43.500
225.940	-9.647	42.339	32.692	-13.308	46.000
365.620	0.382	34.781	35.163	-10.837	46.000
526.640	3.112	26.350	29.462	-16.538	46.000
701.240	2.759	27.530	30.289	-15.711	46.000
879.720	6.618	23.824	30.442	-15.558	46.000
<b>Vertical</b>					
43.580	-10.919	42.949	32.030	-7.970	40.000
177.440	-1.248	28.006	26.758	-16.742	43.500
373.380	0.043	25.261	25.304	-20.696	46.000
538.280	1.996	24.180	26.176	-19.824	46.000
782.720	2.757	26.346	29.103	-16.897	46.000
930.160	3.830	23.777	27.607	-18.393	46.000

**Note:**

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : WIFI Module  
Test Item : General Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 4: Transmit - 802.11n-20BW\_14.4Mbps(2.4G Band) (2437 MHz)

Frequency	Correct	Reading	Measurement	Margin	Limit
	Factor	Level	Level		
MHz	dB	dBuV	dBuV/m	dB	dBuV/m
<b>Horizontal</b>					
107.600	-7.597	33.823	26.226	-17.274	43.500
225.940	-9.647	42.540	32.893	-13.107	46.000
373.380	0.873	30.741	31.614	-14.386	46.000
575.140	3.025	25.616	28.641	-17.359	46.000
701.240	2.759	28.049	30.808	-15.192	46.000
897.180	5.487	23.367	28.854	-17.146	46.000
<b>Vertical</b>					
43.580	-10.919	41.447	30.528	-9.472	40.000
175.500	-1.842	28.100	26.258	-17.242	43.500
363.680	0.079	24.772	24.851	-21.149	46.000
536.340	1.609	25.519	27.128	-18.872	46.000
771.080	2.766	24.031	26.798	-19.202	46.000
930.160	3.830	23.422	27.252	-18.748	46.000

## Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

Product : WIFI Module  
Test Item : General Radiated Emission Data  
Test Site : No.3 OATS  
Test Mode : Mode 5: Transmit - 802.11n-40BW\_30Mbps(2.4G Band) (2437 MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m
<b>Horizontal</b>					
159.980	-10.030	39.087	29.056	-14.444	43.500
264.740	-5.501	34.376	28.876	-17.124	46.000
433.520	0.841	26.825	27.666	-18.334	46.000
633.340	1.530	28.323	29.853	-16.147	46.000
800.180	6.417	26.726	33.143	-12.857	46.000
930.160	7.530	23.045	30.575	-15.425	46.000
<b>Vertical</b>					
43.580	-10.919	42.493	31.574	-8.426	40.000
192.960	-5.655	31.358	25.703	-17.797	43.500
379.200	0.881	24.831	25.712	-20.288	46.000
596.480	0.907	23.416	24.323	-21.677	46.000
757.500	2.487	23.961	26.448	-19.552	46.000
901.060	1.858	22.760	24.618	-21.382	46.000

**Note:**

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.

## 5. RF Antenna conducted test


### 5.1. Test Equipment

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X	Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2014
	Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2014
X	Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2014

Note: 1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.  
2. The test instruments marked with "X" are used to measure the final test results.

### 5.2. Test Setup

#### RF antenna Conducted Measurement:

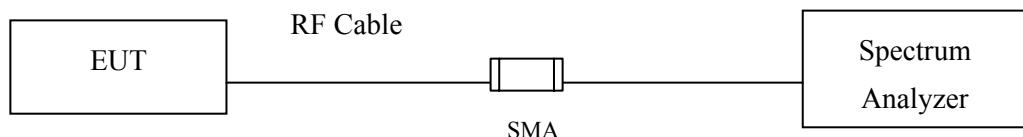

### 5.3. Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

#### **5.4. Test Procedure**

The EUT was tested according to DTS test procedure of KDB558074 for compliance to FCC 47CFR 15.247 requirements.

Set RBW = 100 kHz, Set VBW > RBW, scan up through 10th harmonic.

#### **5.5. Uncertainty**


The measurement uncertainty

Conducted is defined as  $\pm 1.27\text{dB}$


## 5.6. Test Result of RF antenna conducted test

Product : WIFI Module  
Test Item : RF antenna conducted test  
Test Site : No.3 OATS  
Test Mode : Mode 1: Transmit (802.11b 1Mbps)


**Channel 01 (2412MHz) 30MHz-25GHz**

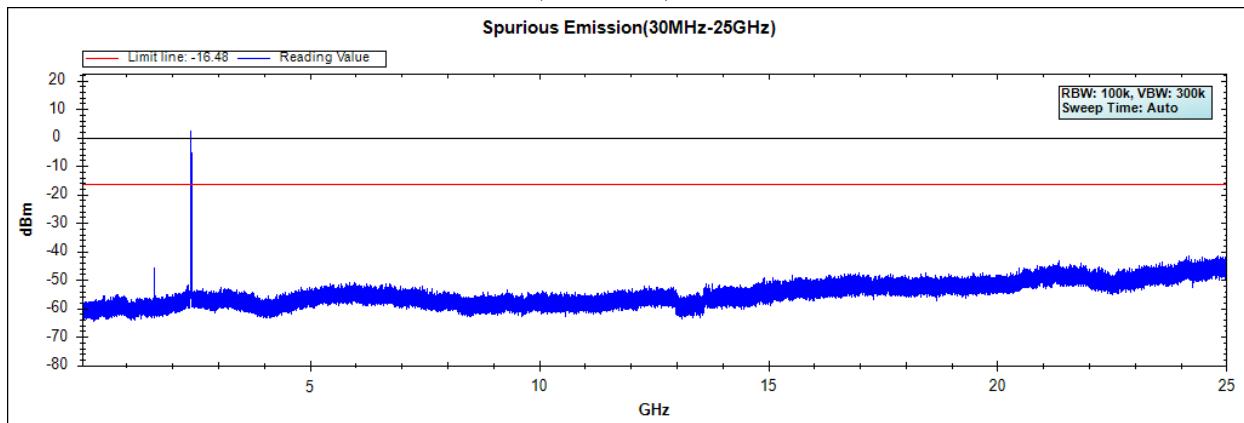

**Channel 06 (2437MHz) 30MHz -25GHz**

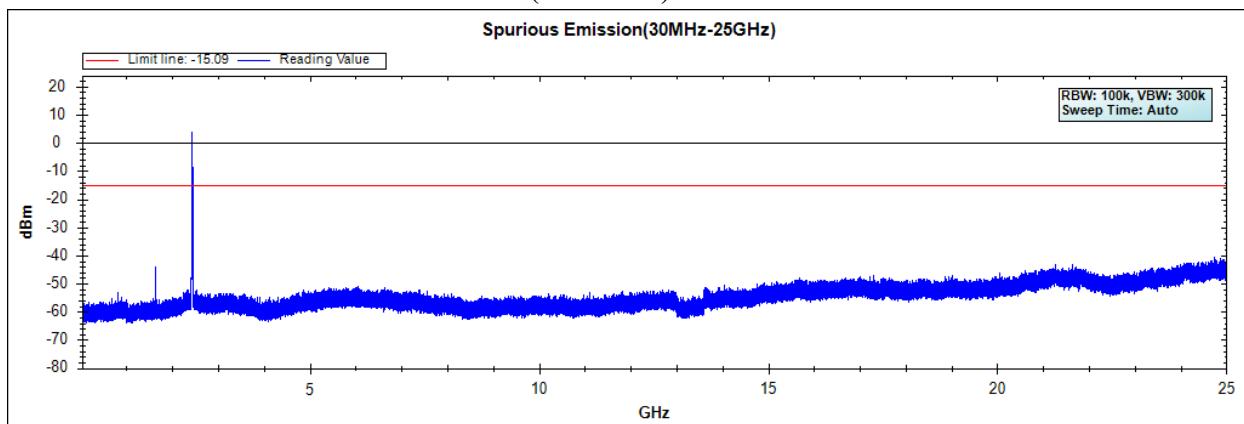


**Channel 11 (2462MHz) 30MHz -25GHz**

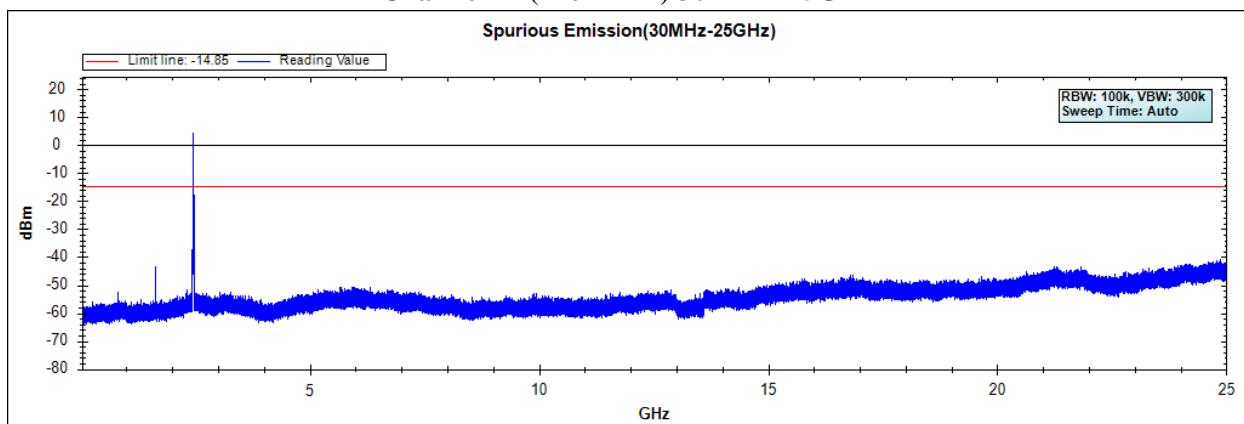


Note: The above test pattern is synthesized by multiple of the frequency range.

Product : WIFI Module  
Test Item : RF Antenna Conducted Spurious  
Test Site : No.3 OATS  
Test Mode : Mode 2: Transmit (802.11g 6Mbps)


### Channel 01 (2412MHz) 30MHz -25GHz

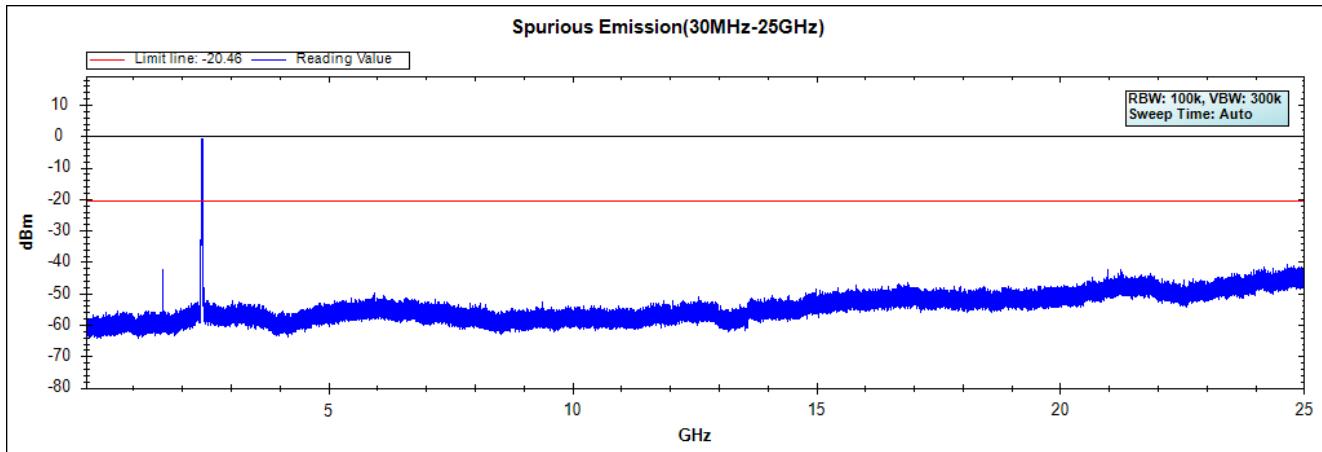

### Channel 06 (2437MHz) 30MHz -25GHz



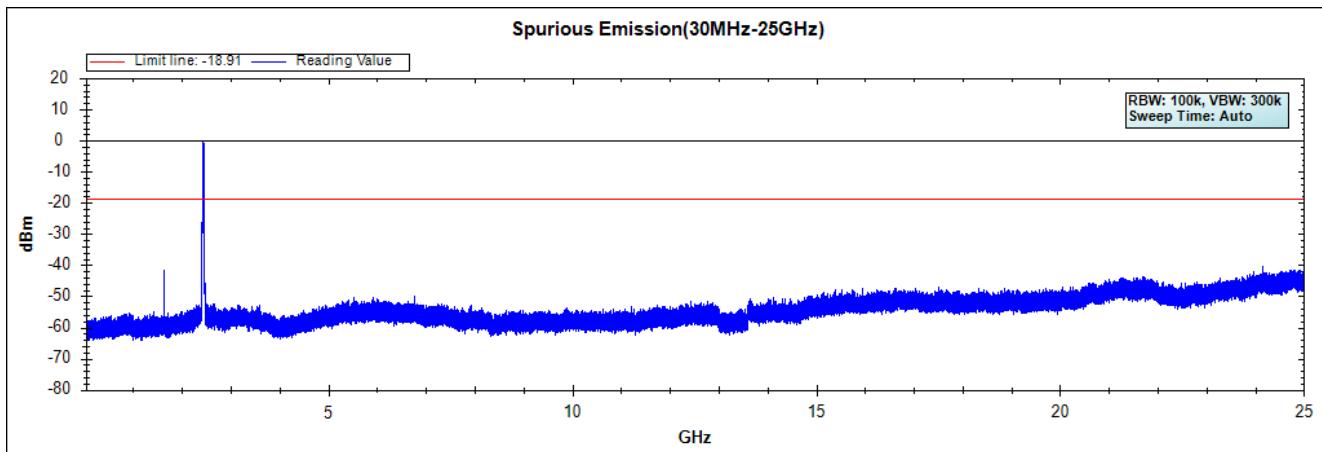


### Channel 11 (2462MHz) 30MHz -25GHz



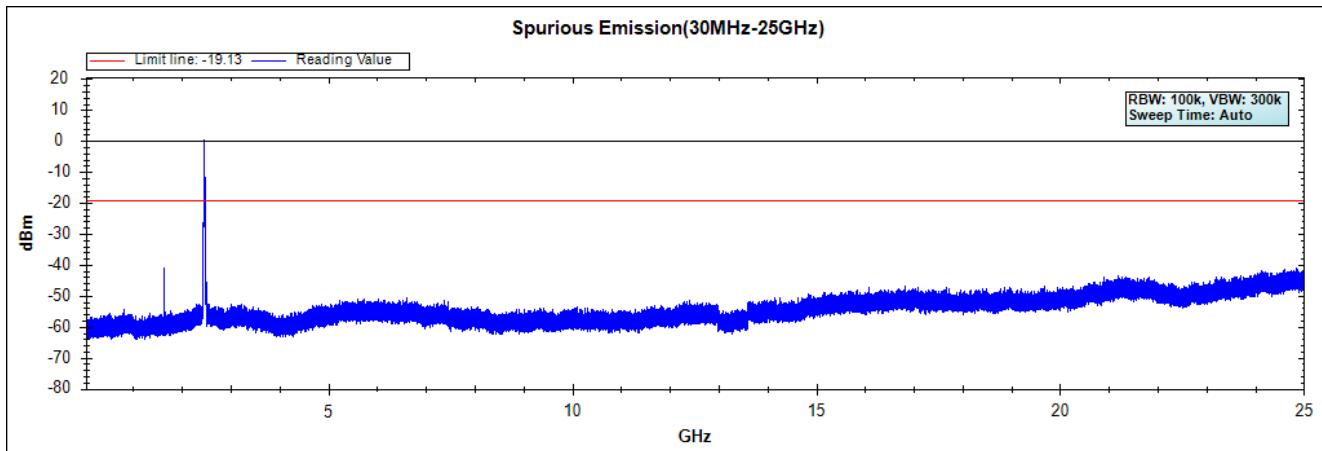


Note: The above test pattern is synthesized by multiple of the frequency range.

Product : WIFI Module  
Test Item : RF Antenna Conducted Spurious  
Test Site : No.3 OATS  
Test Mode : Mode 4: Transmit - 802.11n-20BW\_14.4Mbps(2.4G Band)

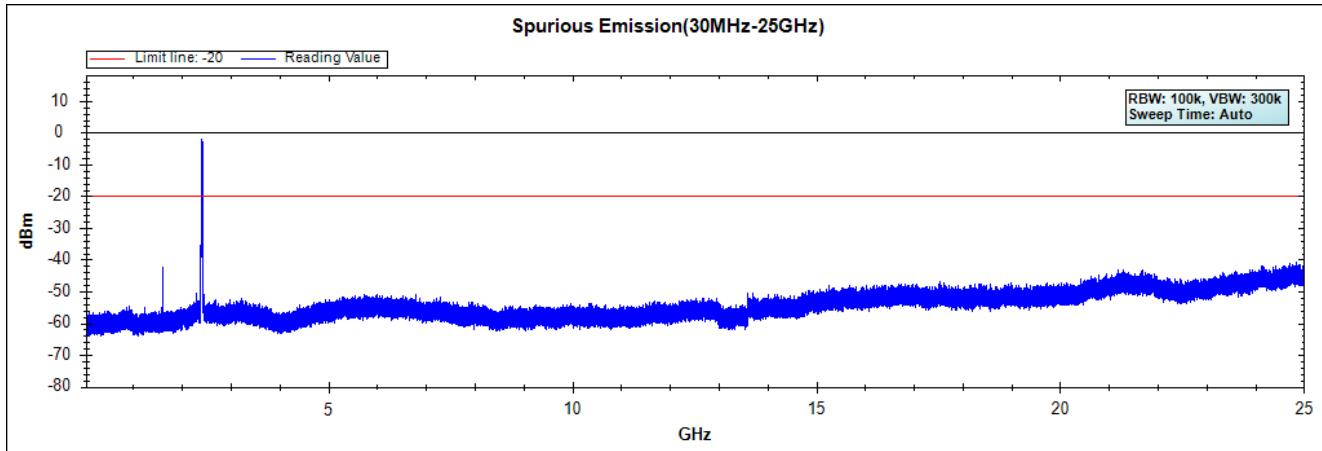
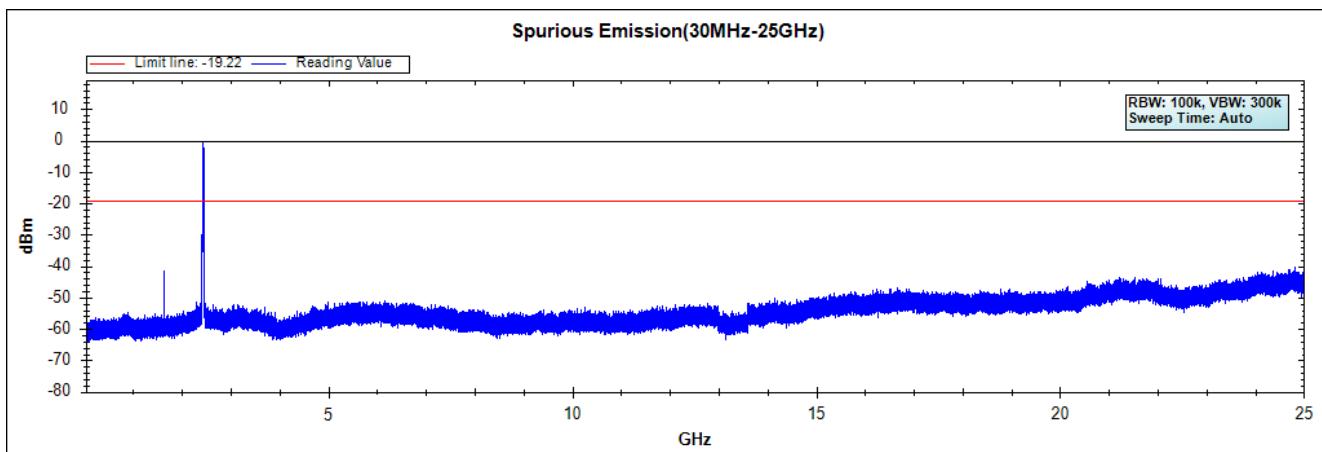
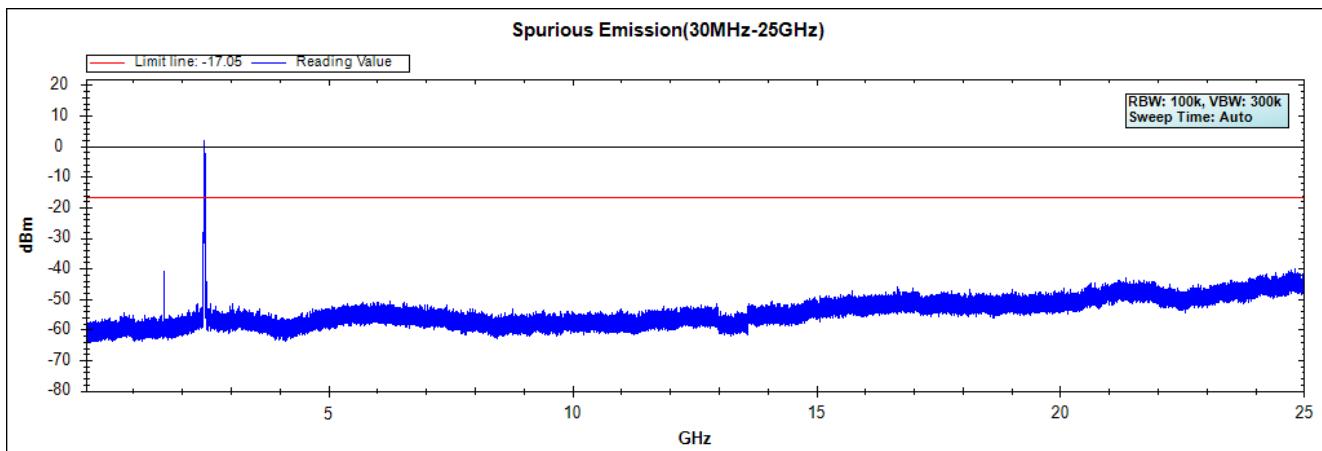
**Channel 01 (2412MHz) 30MHz -25GHz-Chain A****Channel 06 (2437MHz) 30MHz -25GHz-Chain A****Channel 11 (2462MHz) 30MHz -25GHz-Chain A**

Note: The above test pattern is synthesized by multiple of the frequency range.

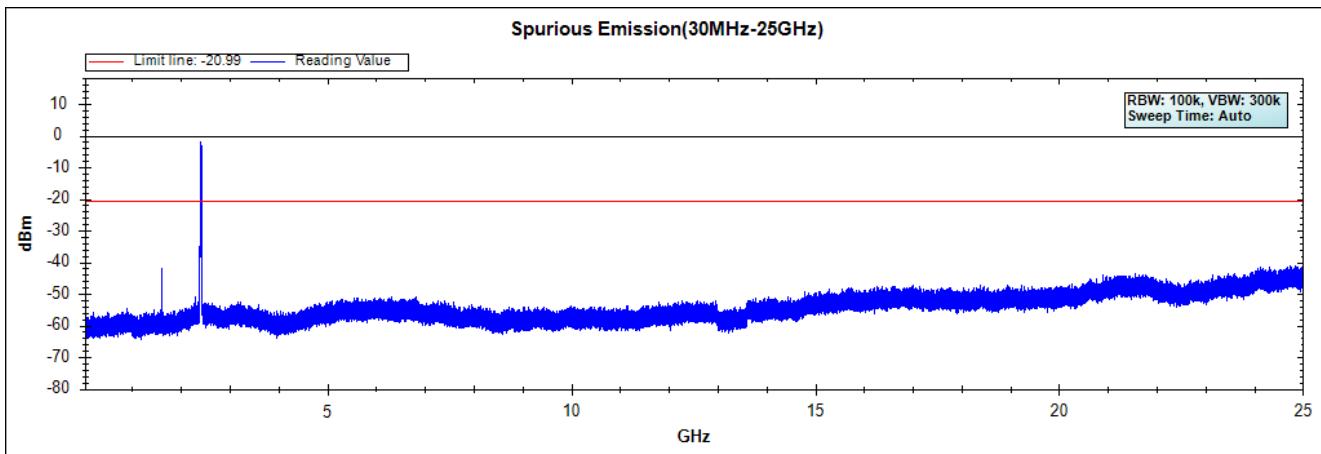
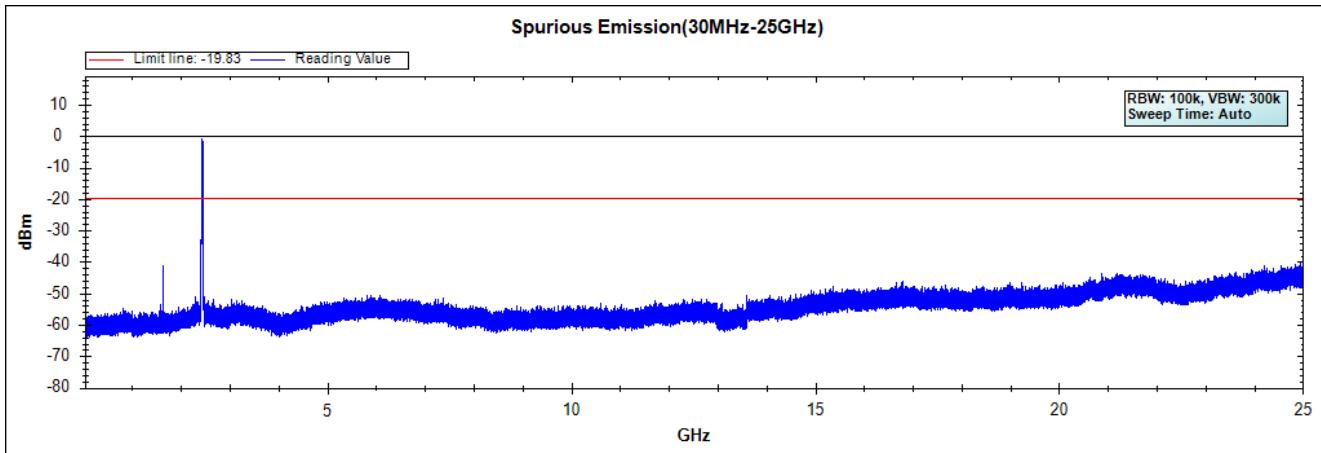
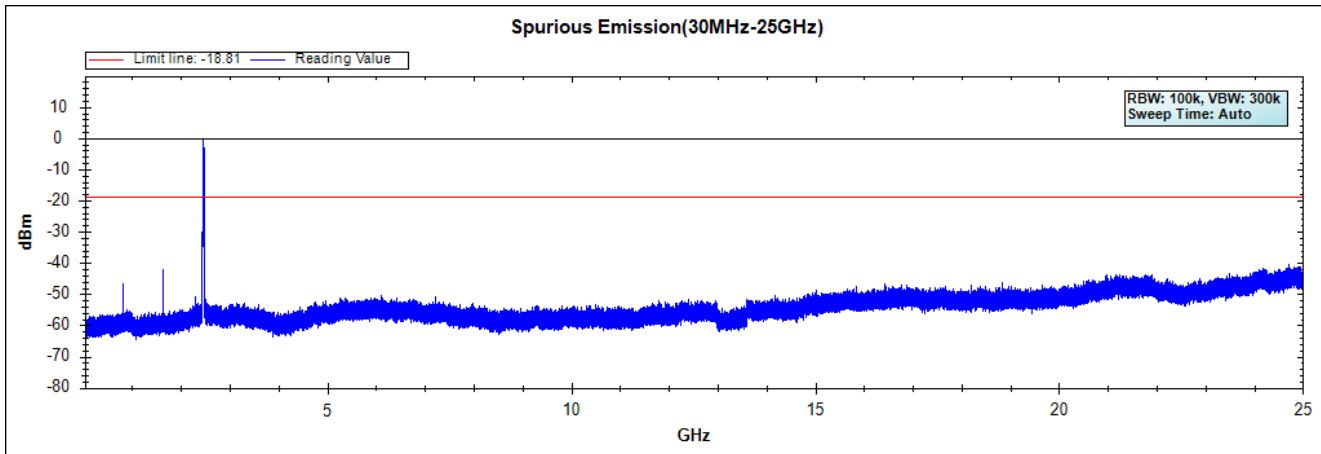
**Channel 01 (2412MHz) 30MHz -25GHz-Chain B****Channel 06 (2437MHz) 30MHz -25GHz-Chain B****Channel 11 (2462MHz) 30MHz -25GHz-Chain B**

Note: The above test pattern is synthesized by multiple of the frequency range.

Product : WIFI Module  
Test Item : RF Antenna Conducted Spurious  
Test Site : No.3 OATS  
Test Mode : Mode 5: Transmit - 802.11n-40BW\_30Mbps(2.4G Band)

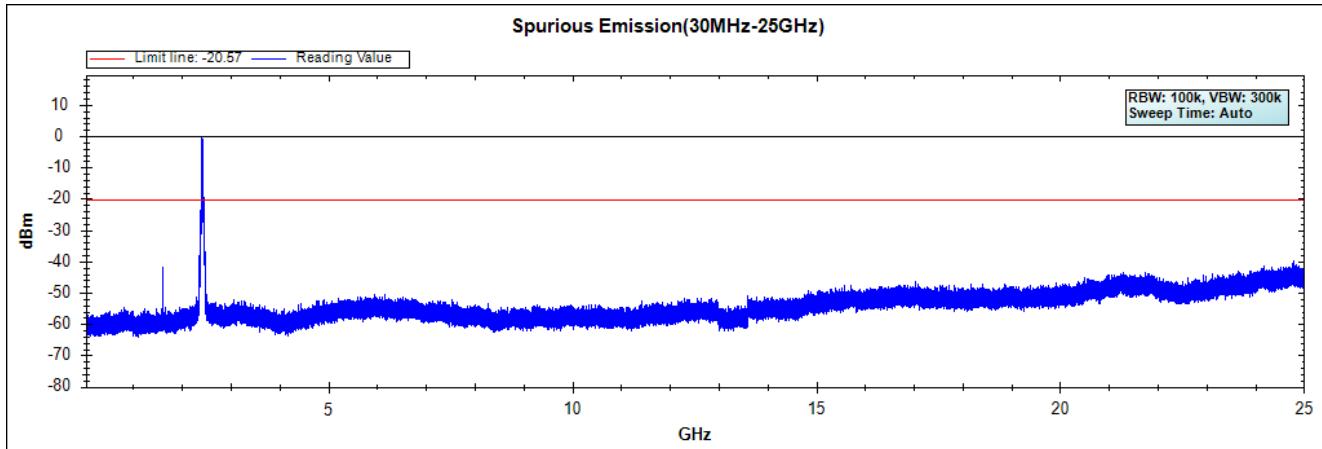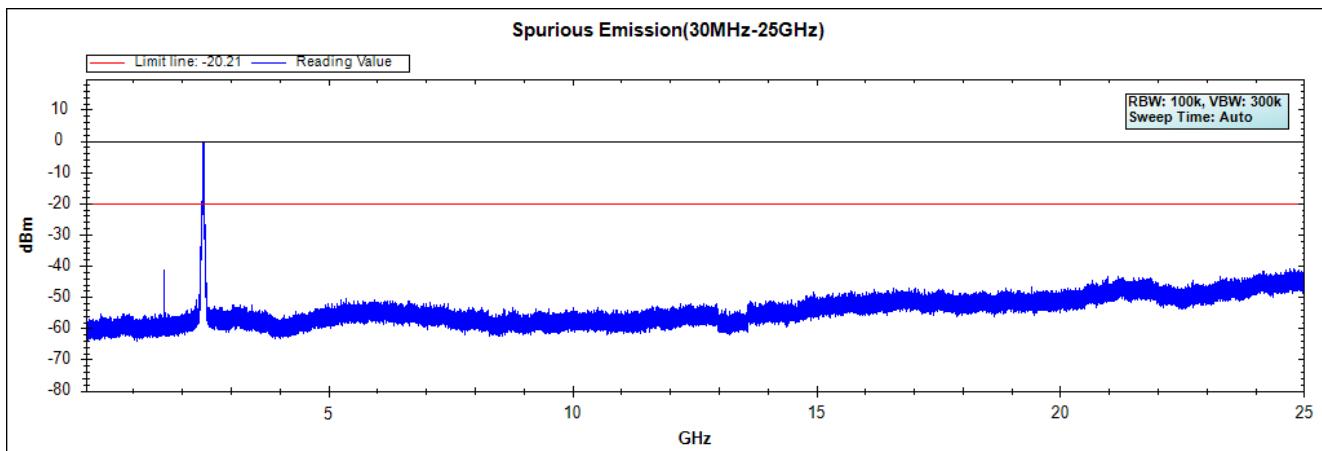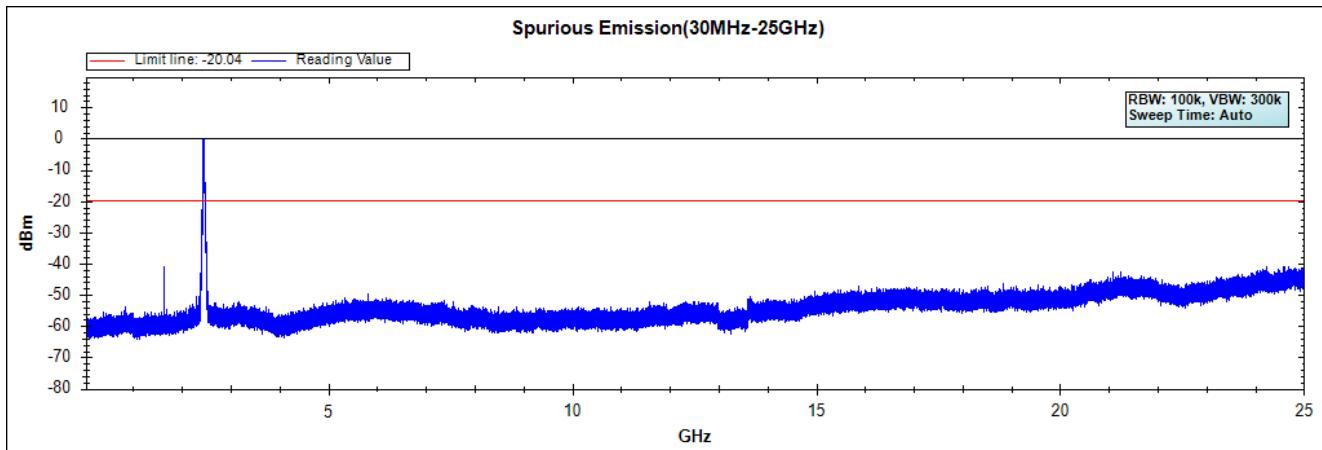**Channel 03 (2422MHz) 30MHz -25GHz-Chain A****Channel 06 (2437MHz) 30MHz -25GHz-Chain A****Channel 09 (2452MHz) 30MHz -25GHz-Chain A**

Note: The above test pattern is synthesized by multiple of the frequency range.

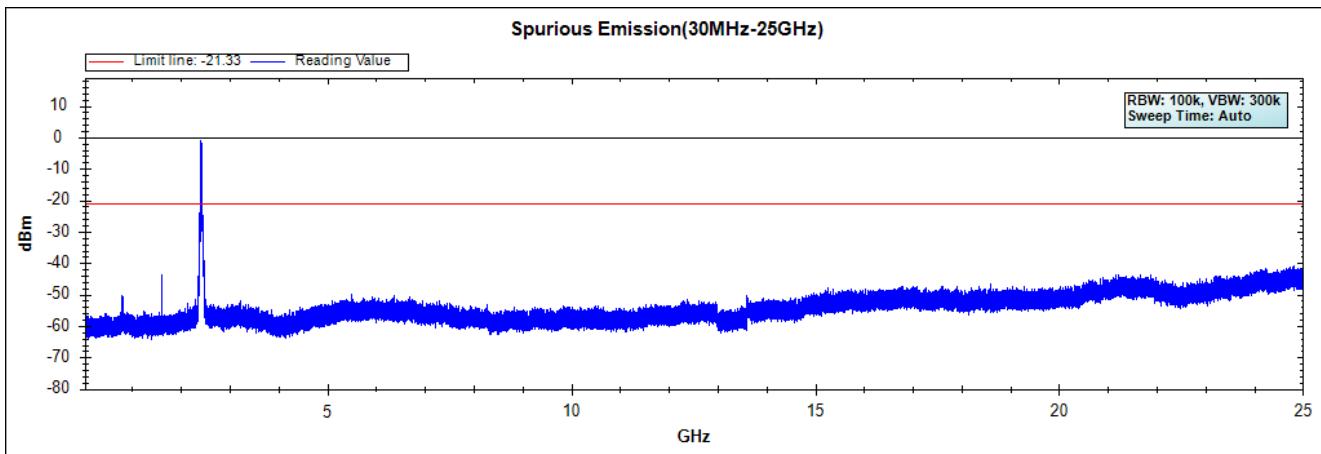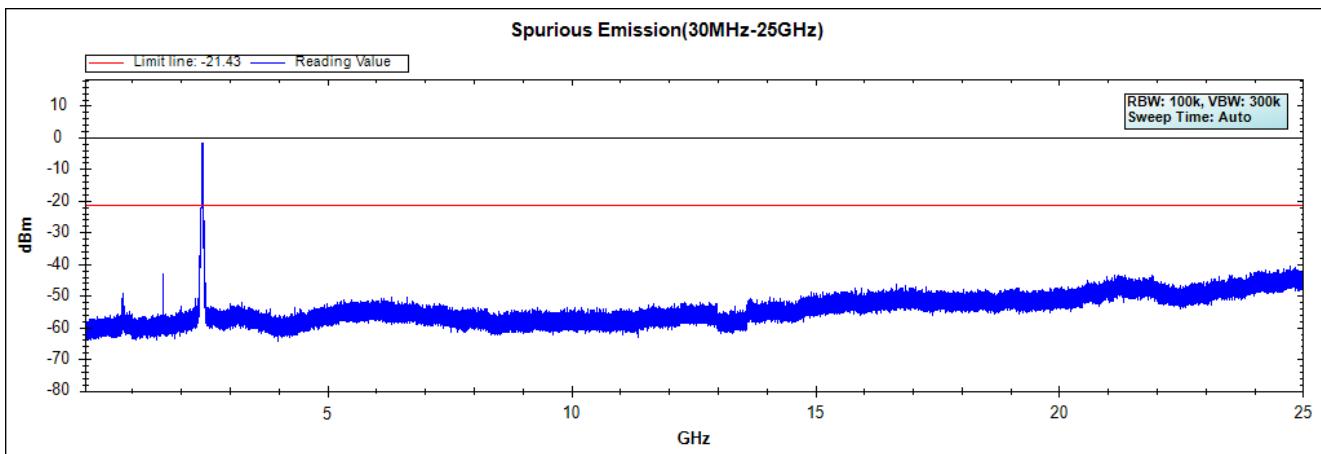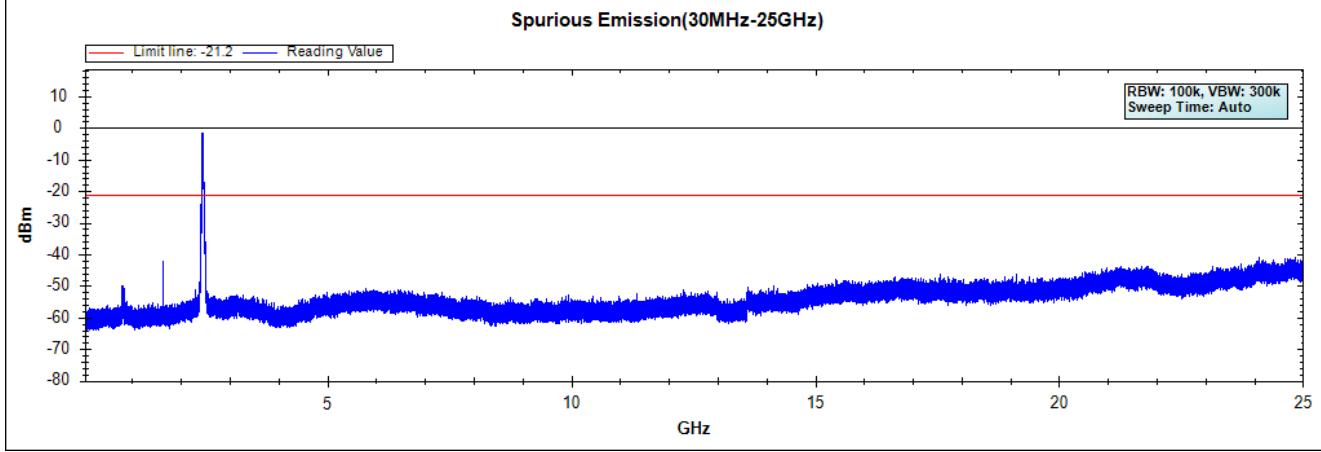**Channel 03 (2422MHz) 30MHz -25GHz-Chain B****Channel 06 (2437MHz) 30MHz -25GHz-Chain B****Channel 09 (2452MHz) 30MHz -25GHz-Chain B**

Note: The above test pattern is synthesized by multiple of the frequency range.

## 6. Band Edge

### 6.1. Test Equipment

#### RF Conducted Measurement

The following test equipments are used during the band edge tests:

Equipment	Manufacturer	Model No./Serial No.	Last Cal.
Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2014
Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2014
X      Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2014

#### RF Radiated Measurement:

The following test equipments are used during the band edge tests:


Test Site	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X Site # 3	Bilog Antenna	Schaffner Chase	CBL6112B/2673	Sep., 2014
	X      Horn Antenna	Schwarzbeck	BBHA9120D/D305	Sep., 2014
	Horn Antenna	Schwarzbeck	BBHA9170/208	Jul., 2014
	Pre-Amplifier	QTK	QTK-AMP-03 / 0003	May, 2014
	X      Pre-Amplifier	QTK	AP-180C / CHM_0906076	Sep., 2014
	Pre-Amplifier	MITEQ	AMF-4D-180400-45-6P/925975	Mar, 2014
	X      Spectrum Analyzer	Agilent	E4407B / US39440758	May, 2014
	Test Receiver	R & S	ESCS 30/ 825442/018	Sep., 2014
	X      Coaxial Cable	QuiTek	QTK-CABLE/ CAB5	Feb., 2014
	X      Controller	QuiTek	QTK-CONTROLLER/ CTRL3	N/A
	X      Coaxial Switch	Anritsu	MP59B/6200265729	N/A

Note:


1. All instruments are calibrated every one year.
2. The test instruments marked by "X" are used to measure the final test results.

## 6.2. Test Setup

### RF Conducted Measurement

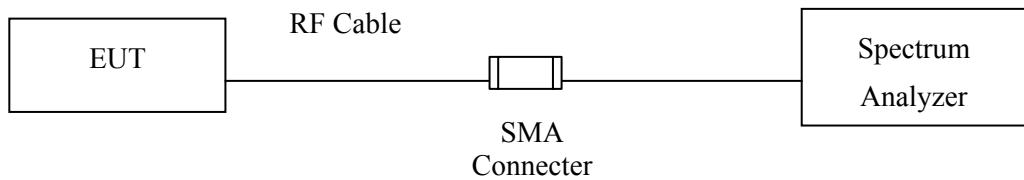

### RF Radiated Measurement:

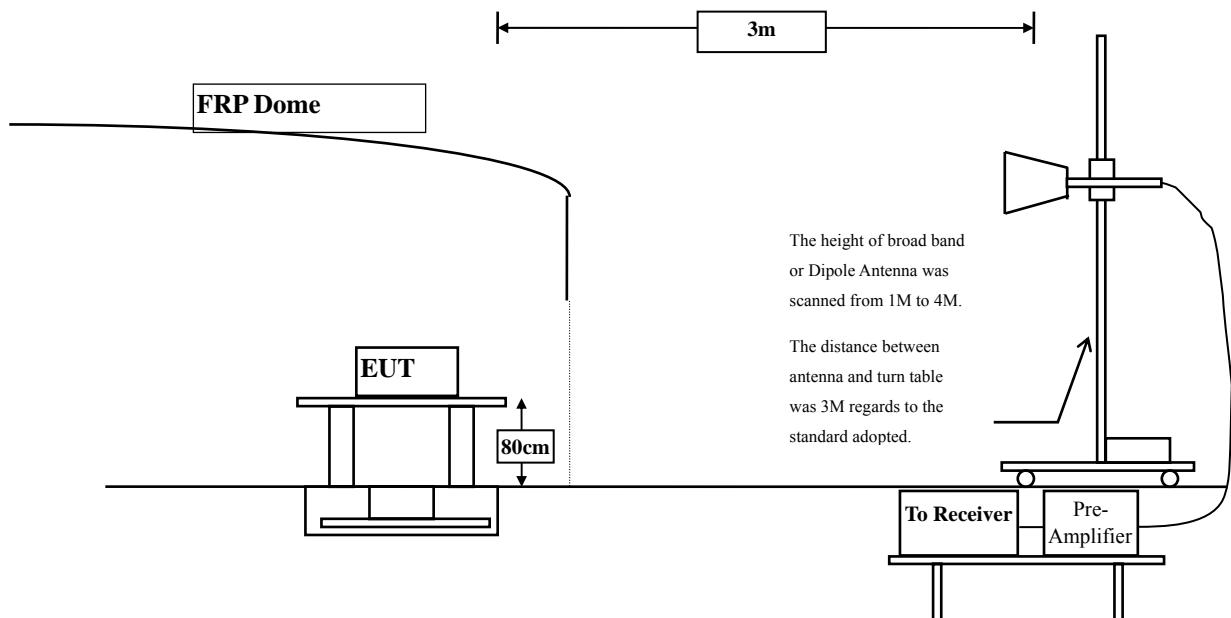

### **6.3. Limits**

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 30dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

### **6.4. Test Procedure**

The EUT was setup according to ANSI C63.10, 2009 and tested according to DTS test procedure of KDB558074 for compliance to FCC 47CFR 15.247 requirements.

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2009 on radiated measurement.

### **6.5. Uncertainty**

± 3.9 dB above 1GHz

± 3.8 dB below 1GHz

## 6.6. Test Result of Band Edge

Product : WIFI Module  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit (802.11b 1Mbps)

### RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
01 (Peak)	2390.000	33.739	23.247	56.986	74.00	54.00	Pass
01 (Peak)	2411.000	33.769	60.773	94.542	--	--	--
01 (Average)	2390.000	33.739	11.357	45.096	74.00	54.00	Pass
01 (Average)	2411.400	33.771	56.256	90.026	--	--	--

Figure Channel 01:

Horizontal (Peak)


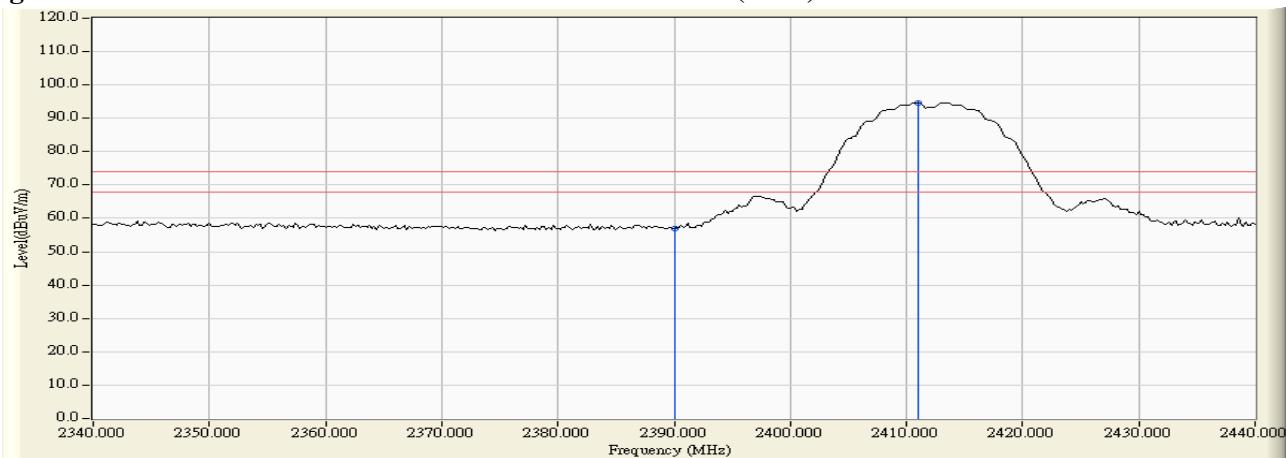


Figure Channel 01:

Horizontal (Average)

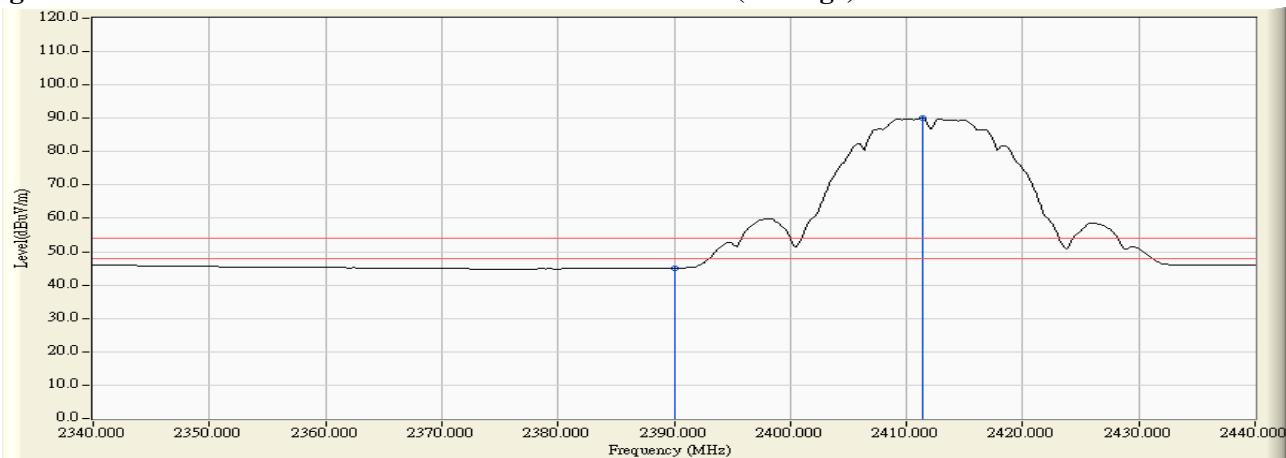

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “\*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : WIFI Module  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit (802.11b 1Mbps)

#### RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
01 (Peak)	2390.000	32.267	22.058	54.325	74.00	54.00	Pass
01 (Peak)	2410.600	32.244	58.993	91.237	--	--	--
01 (Average)	2390.000	32.267	11.386	43.653	74.00	54.00	Pass
01 (Average)	2411.200	32.245	55.326	87.571	--	--	--

Figure Channel 01:

Vertical (Peak)


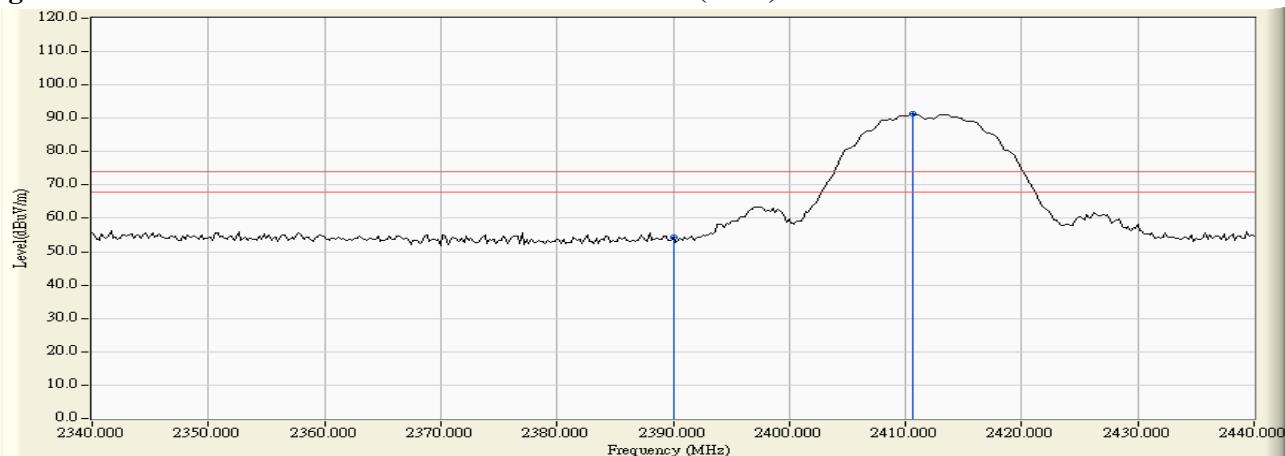


Figure Channel 01:

Vertical (Average)

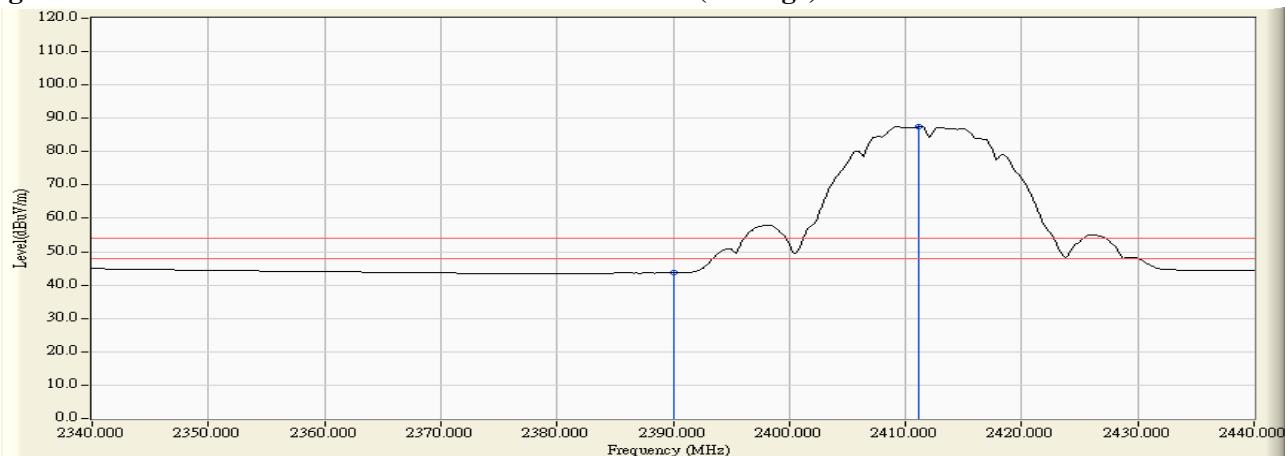

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “\*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : WIFI Module  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit (802.11b 1Mbps)

#### RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
11 (Peak)	2460.500	33.889	61.366	95.255	--	--	--
11 (Peak)	2483.500	33.951	23.806	57.756	74.00	54.00	Pass
11 (Peak)	2492.900	33.975	25.810	59.784	74.00	54.00	Pass
11 (Average)	2461.300	33.890	57.384	91.275	--	--	--
11 (Average)	2483.500	33.951	11.942	45.892	74.00	54.00	Pass

Figure Channel 11:

Horizontal (Peak)


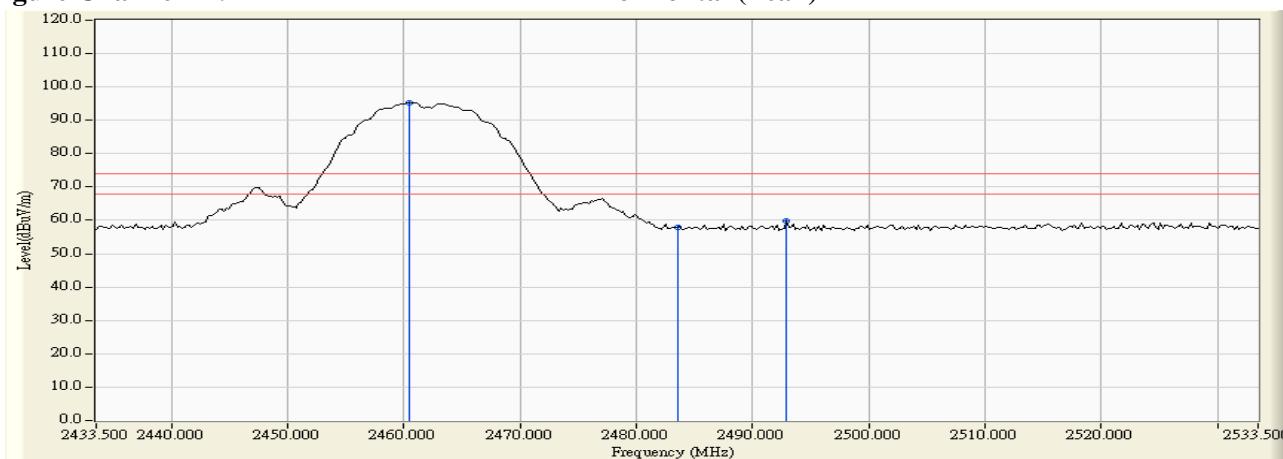


Figure Channel 11:

Horizontal (Average)

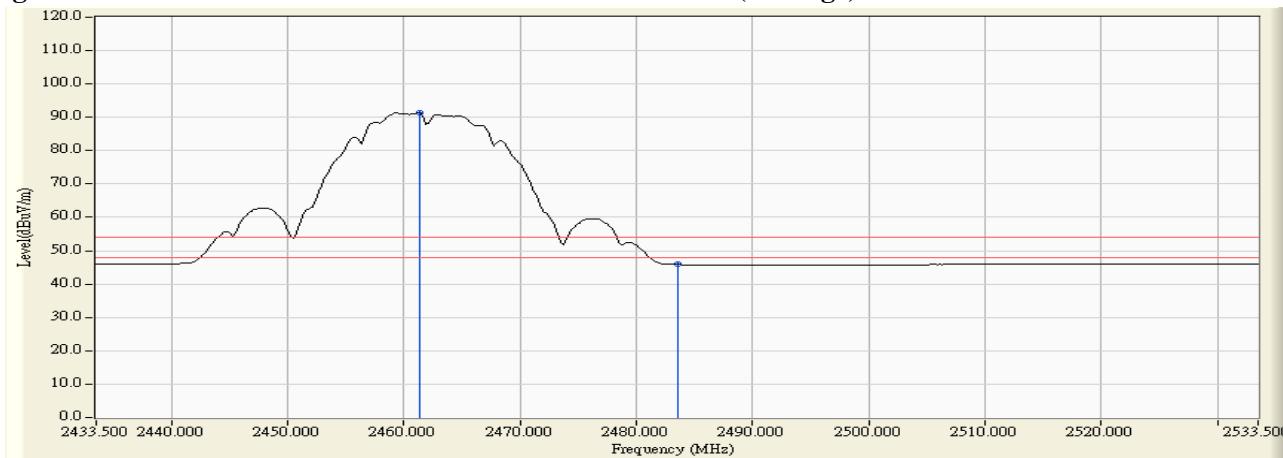

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “\*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.


Product : WIFI Module  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit (802.11b 1Mbps)

**RF Radiated Measurement (Vertical):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
11 (Peak)	2460.500	32.473	61.142	93.615	--	--	--
11 (Peak)	2483.500	32.586	24.661	57.246	74.00	54.00	Pass
11 (Peak)	2495.900	32.645	24.609	57.254	74.00	54.00	Pass
11 (Average)	2461.300	32.477	57.361	89.838	--	--	--
11 (Average)	2483.500	32.586	11.952	44.537	74.00	54.00	Pass


**Figure Channel 11:**

**Vertical (Peak)**

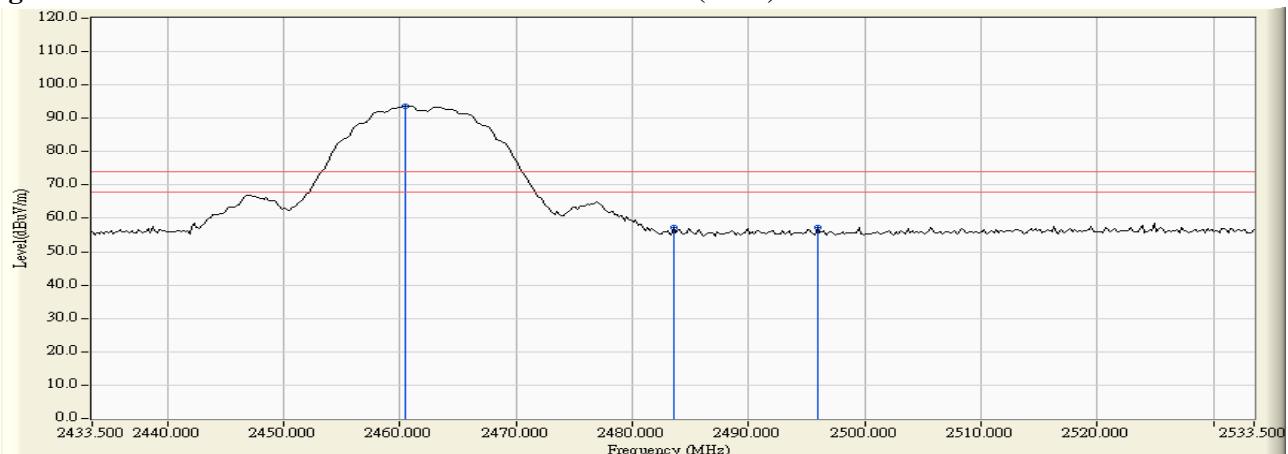

**Figure Channel 11:**

**Vertical (Average)**

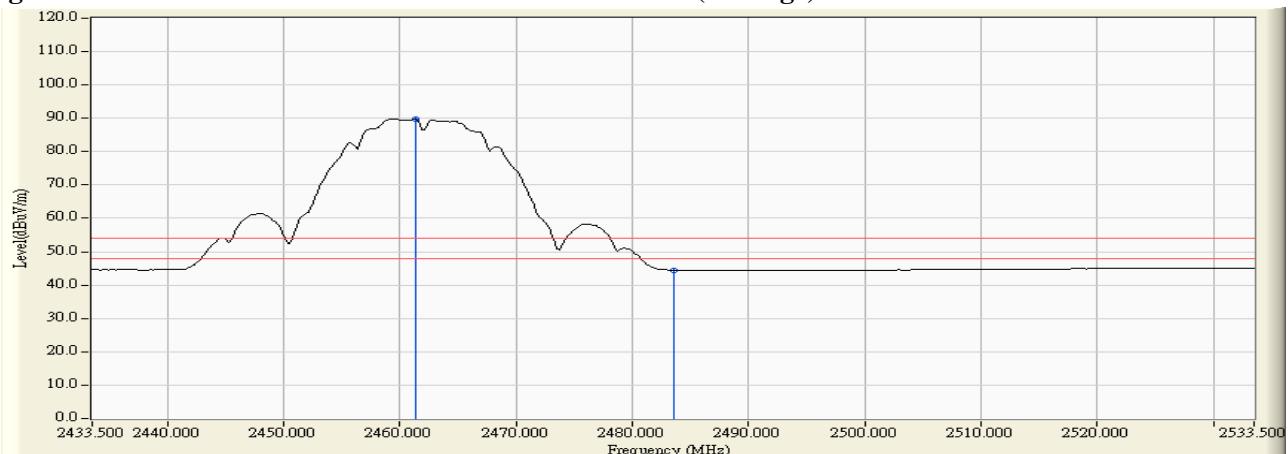

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “\*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.


Product : WIFI Module  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit (802.11g 6Mbps)

**RF Radiated Measurement (Horizontal):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
01 (Peak)	2390.000	33.739	37.266	71.005	74.00	54.00	Pass
01 (Peak)	2418.200	33.787	62.726	96.513	--	--	--
01(Average)	2390.000	33.739	20.122	53.861	74.00	54.00	Pass
01(Average)	2407.000	33.763	52.109	85.872	--	--	--


**Figure Channel 01:**

**Horizontal (Peak)**

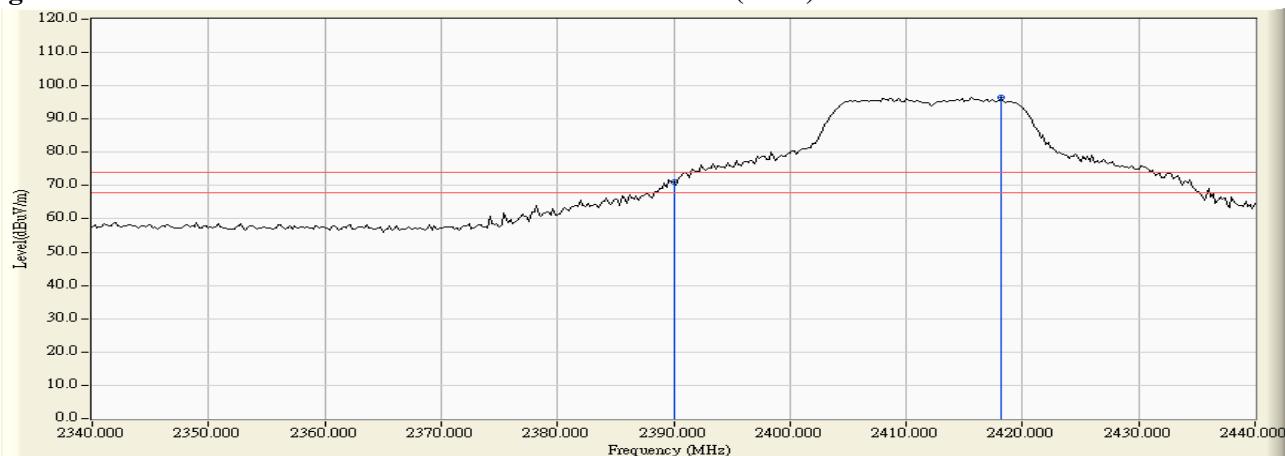

**Figure Channel 01:**

**Horizontal (Average)**

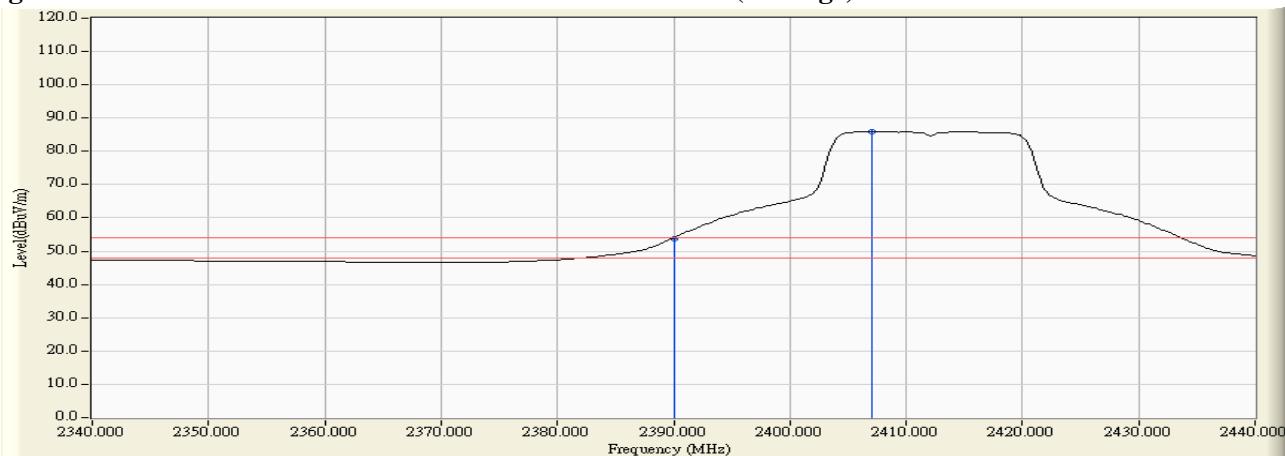

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “\*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : WIFI Module  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit (802.11g 6Mbps)

#### RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
01 (Peak)	2390.000	32.267	37.808	70.075	74.00	54.00	Pass
01 (Peak)	2416.600	32.270	62.467	94.737	--	--	--
01 (Average)	2390.000	32.267	20.065	52.332	74.00	54.00	Pass
01 (Average)	2407.200	32.243	51.946	84.189	--	--	--

Figure Channel 01:

Vertical (Peak)


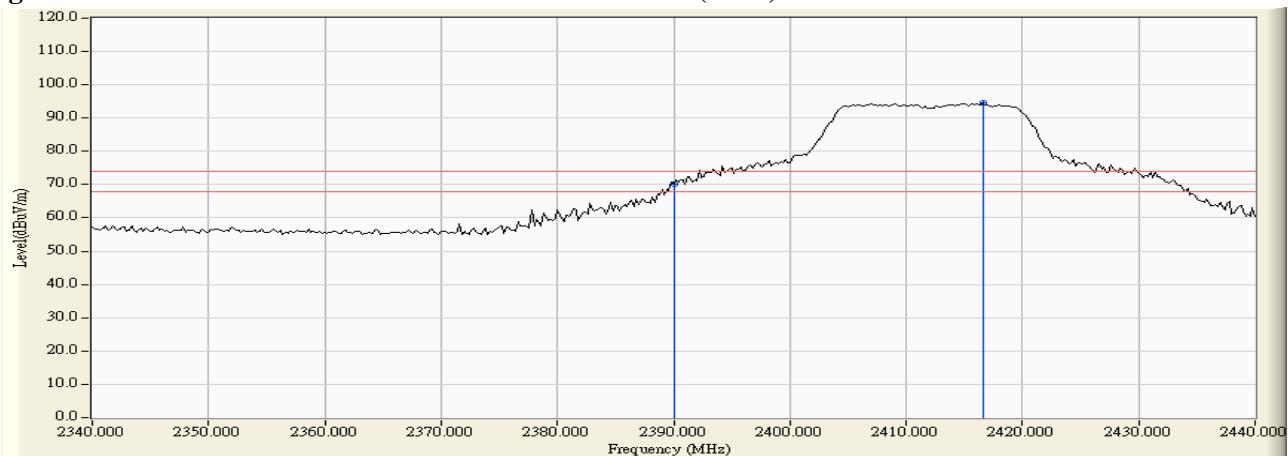


Figure Channel 01:

Vertical (Average)

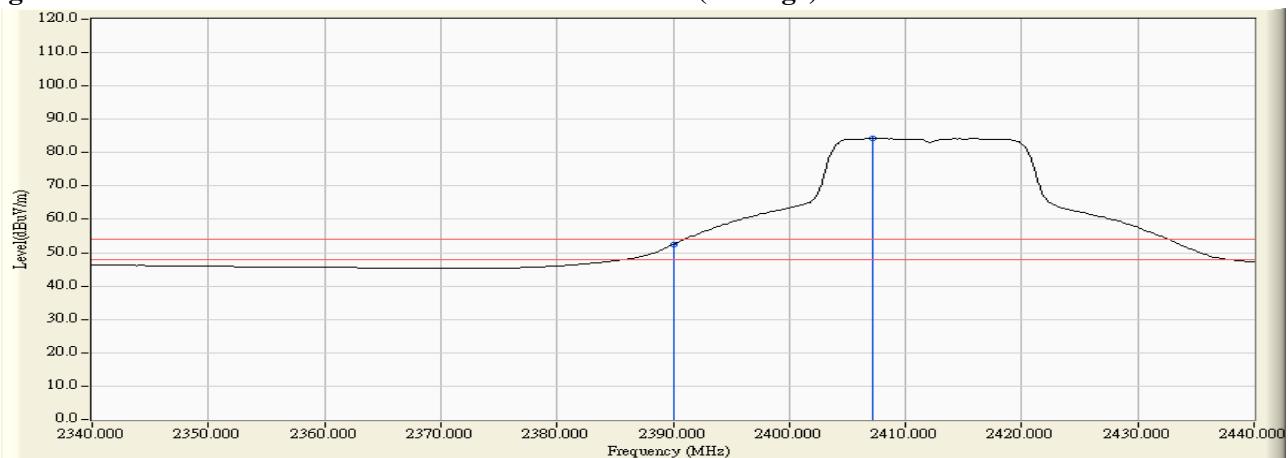



Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “\*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : WIFI Module  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit (802.11g 6Mbps)

**RF Radiated Measurement (Horizontal):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
11 (Peak)	2458.900	33.885	63.005	96.890	--	--	--
11 (Peak)	2483.500	33.951	35.706	69.656	74.00	54.00	Pass
11 (Average)	2456.500	33.878	52.567	86.446	--	--	--
11 (Average)	2483.500	33.951	17.570	51.520	74.00	54.00	Pass

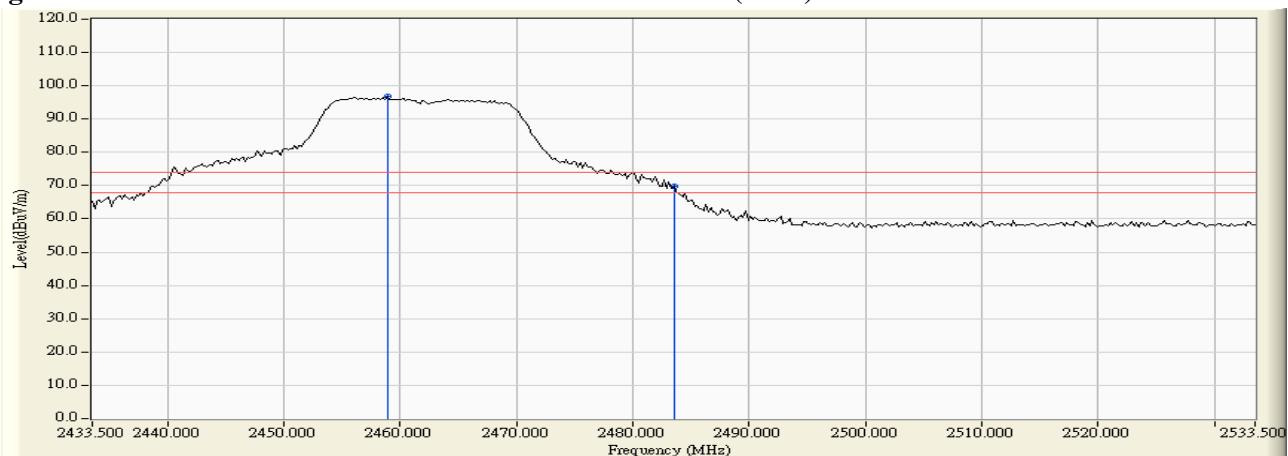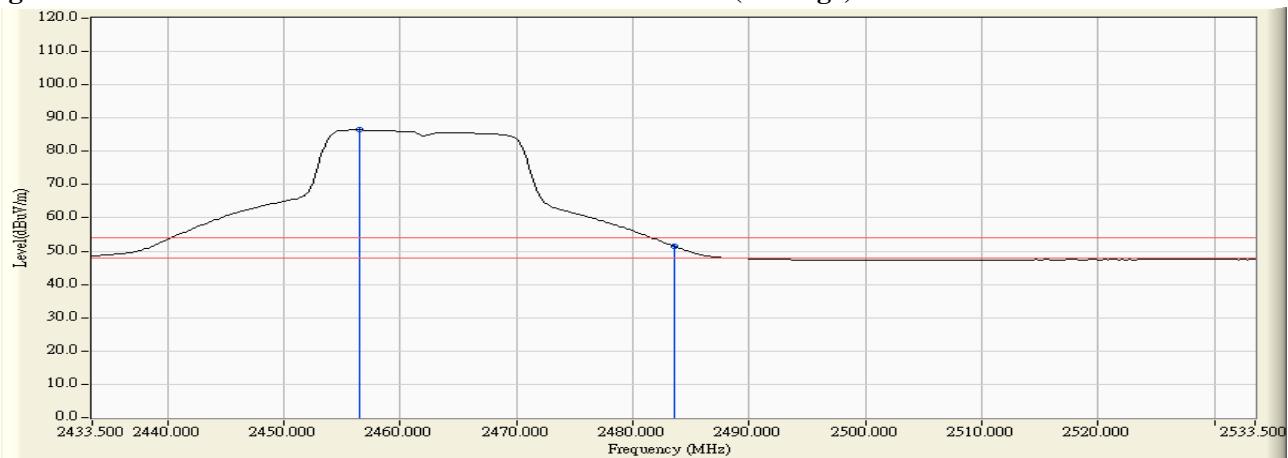**Figure Channel 11:****Horizontal (Peak)****Figure Channel 11:****Horizontal (Average)**

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “\*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : WIFI Module  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit (802.11g 6Mbps)

**RF Radiated Measurement (Vertical):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
11 (Peak)	2458.100	32.462	63.611	96.073	--	--	--
11 (Peak)	2483.500	32.586	35.138	67.723	74.00	54.00	Pass
11 (Average)	2456.300	32.453	52.984	85.437	--	--	--
11 (Average)	2483.500	32.586	18.252	50.837	74.00	54.00	Pass


**Figure Channel 11:**

**Vertical (Peak)**



**Figure Channel 11:**

**Vertical (Average)**

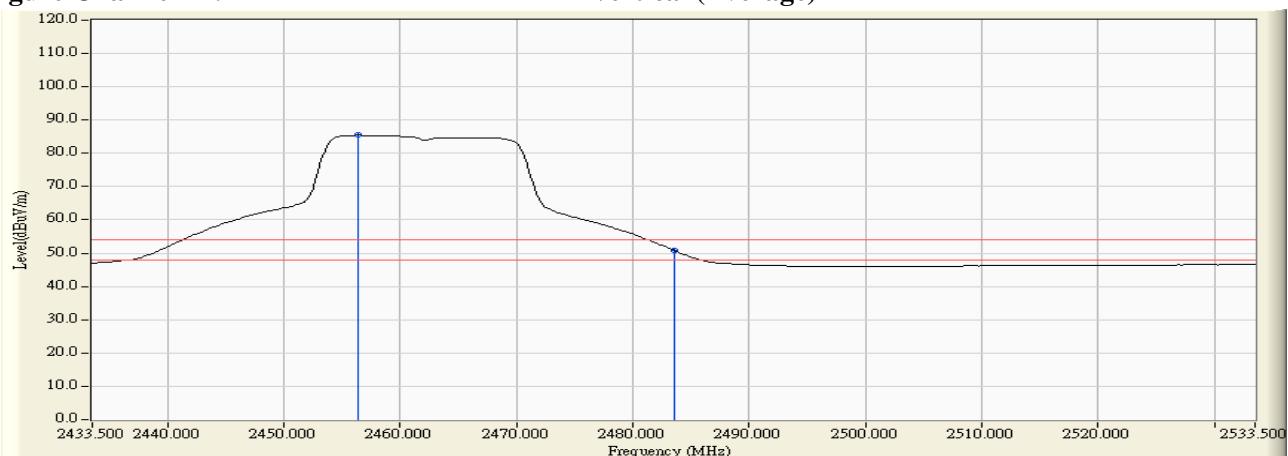

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “\*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : WIFI Module  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 4: Transmit - 802.11n-20BW\_14.4Mbps(2.4G Band)

**RF Radiated Measurement (Horizontal):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
01 (Peak)	2390.000	33.739	36.358	70.097	74.00	54.00	Pass
01 (Peak)	2406.000	33.760	64.372	98.133	--	--	--
01 (Average)	2390.000	33.739	19.037	52.776	74.00	54.00	Pass
01 (Average)	2407.000	33.763	51.929	85.692	--	--	--

Figure Channel 01:

Horizontal (Peak)


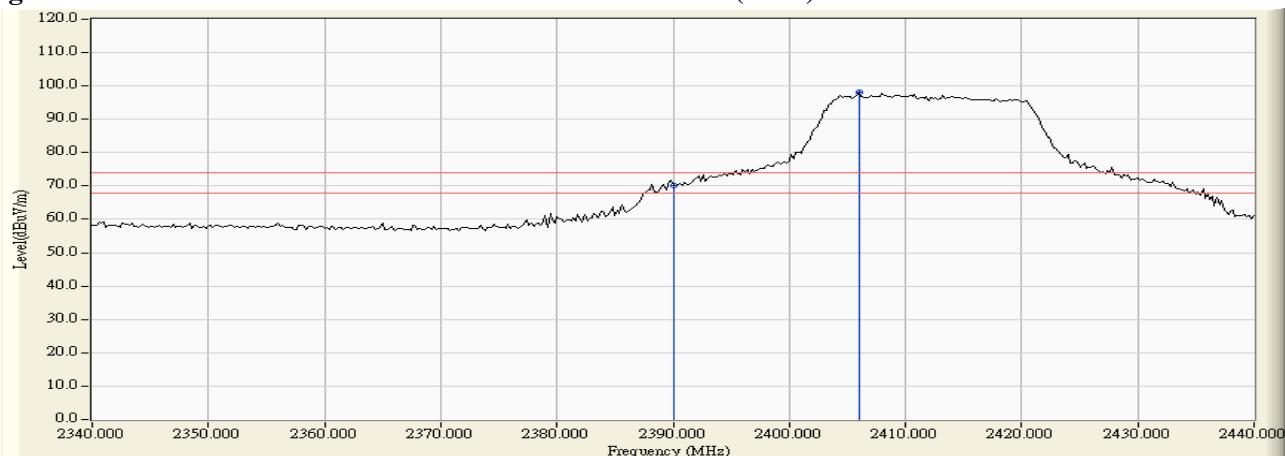


Figure Channel 01:

Horizontal (Average)

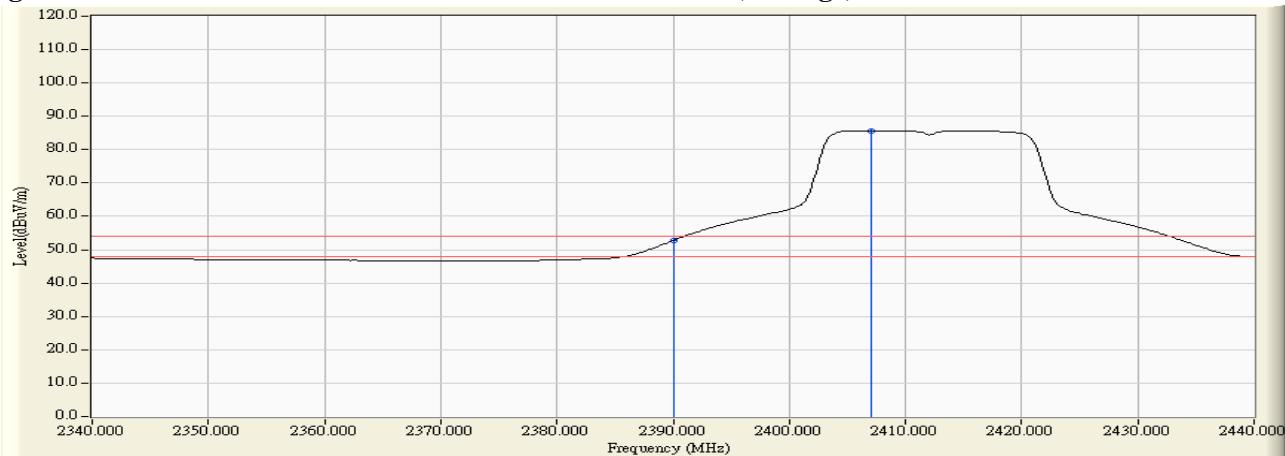

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “\*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : WIFI Module  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 4: Transmit - 802.11n-20BW\_14.4Mbps(2.4G Band)

#### RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
01 (Peak)	2389.800	32.268	36.169	68.437	74.00	54.00	Pass
01 (Peak)	2390.000	32.267	34.148	66.415	74.00	54.00	Pass
01 (Peak)	2406.200	32.243	63.869	96.112	--	--	--
01 (Average)	2390.000	32.267	18.486	50.753	74.00	54.00	Pass
01 (Average)	2407.000	32.243	51.641	83.884	--	--	--

Figure Channel 01:

Vertical (Peak)


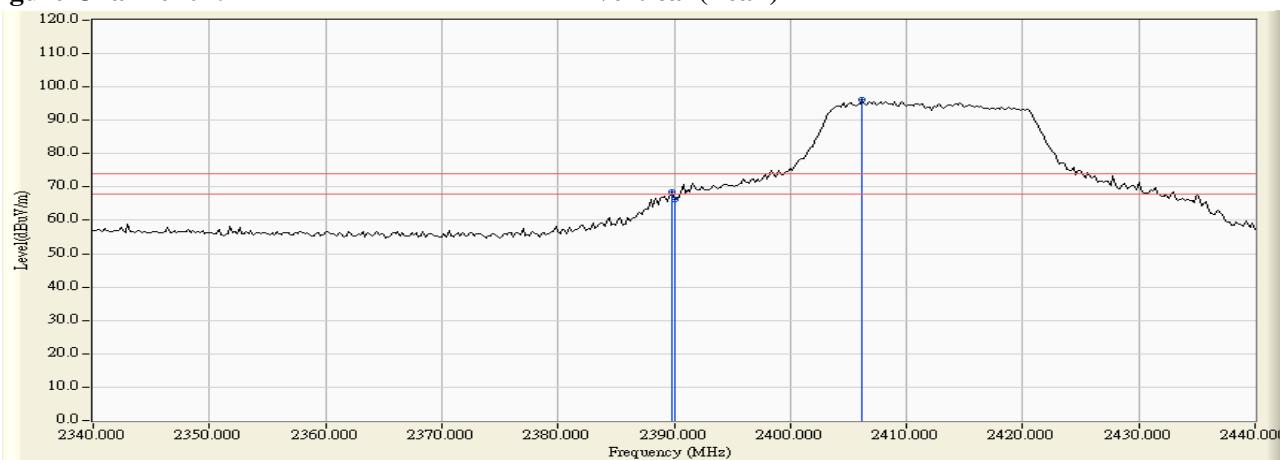


Figure Channel 01:

Vertical (Average)

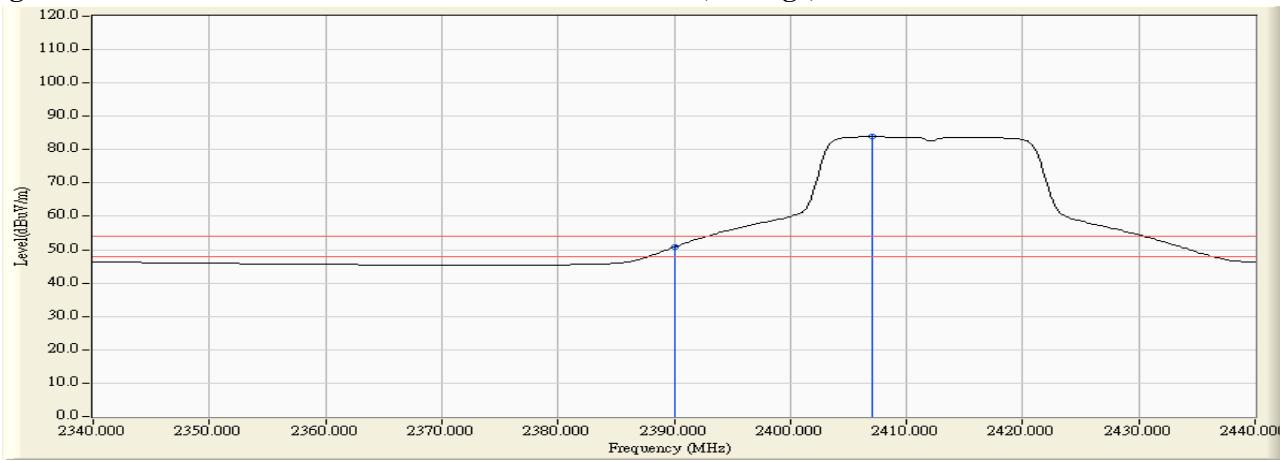

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “\*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : WIFI Module  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 4: Transmit - 802.11n-20BW\_14.4Mbps(2.4G Band)

**RF Radiated Measurement (Horizontal):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
11 (Peak)	2465.700	33.902	65.537	99.439	--	--	--
11 (Peak)	2483.500	33.951	31.673	65.623	74.00	54.00	Pass
11 (Average)	2457.900	33.882	53.697	87.579	--	--	--
11 (Average)	2483.500	33.951	17.131	51.081	74.00	54.00	Pass

Figure Channel 11:

Horizontal (Peak)


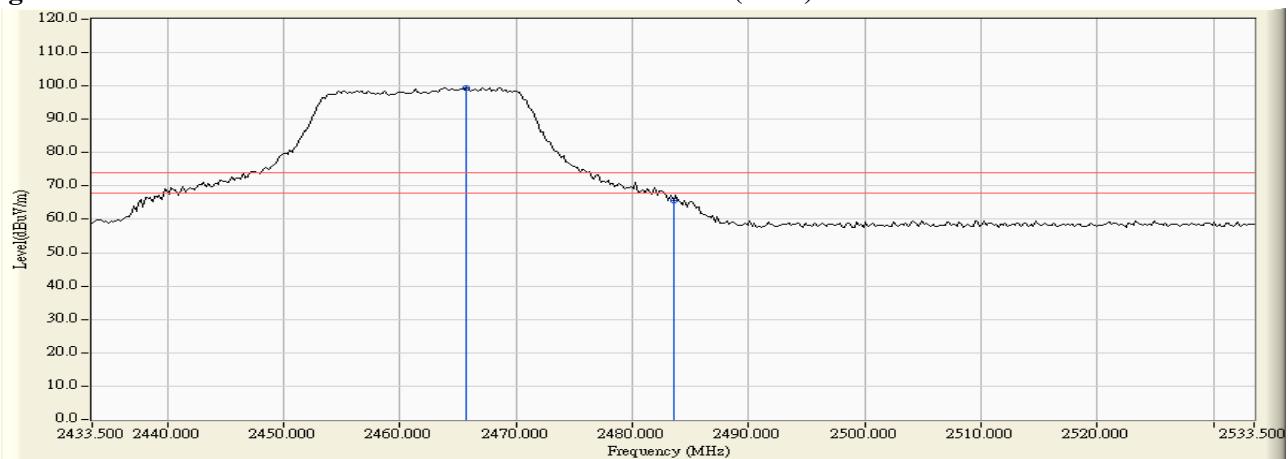


Figure Channel 11:

Horizontal (Average)

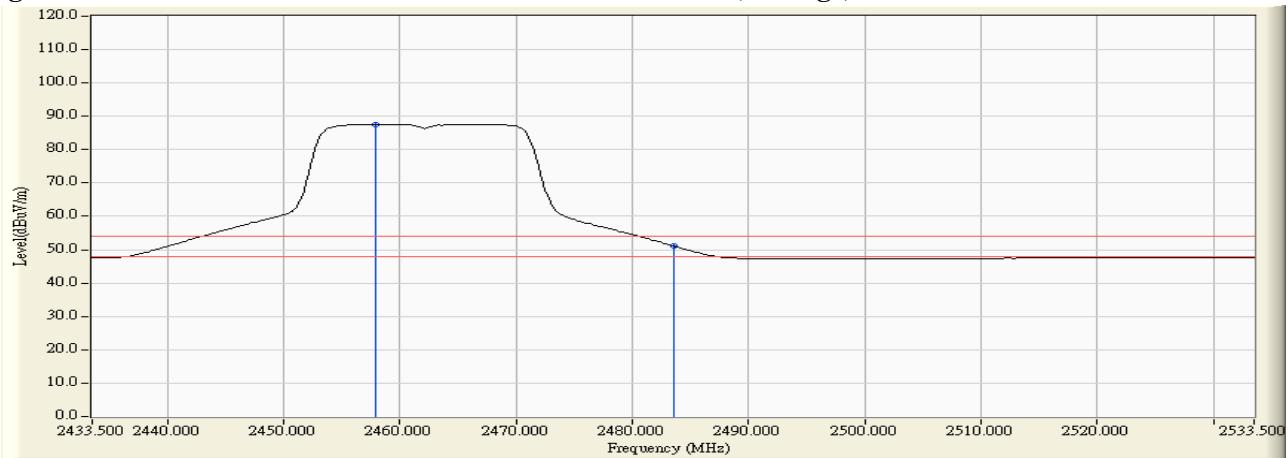

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “\*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : WIFI Module  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 4: Transmit - 802.11n-20BW\_14.4Mbps(2.4G Band)

#### RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
11 (Peak)	2468.100	32.510	65.552	98.062	--	--	--
11 (Peak)	2483.500	32.586	31.624	64.209	74.00	54.00	Pass
11 (Peak)	2483.900	32.587	33.650	66.237	74.00	54.00	Pass
11 (Average)	2466.300	32.501	53.533	86.034	--	--	--
11 (Average)	2483.500	32.586	16.987	49.572	74.00	54.00	Pass

Figure Channel 11:

Vertical (Peak)


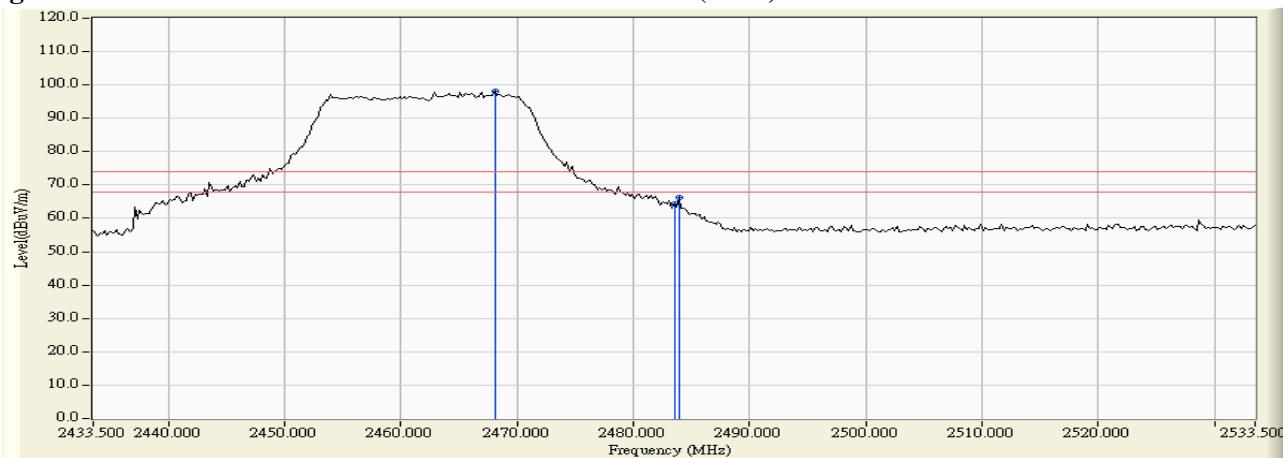


Figure Channel 11:

Vertical (Average)

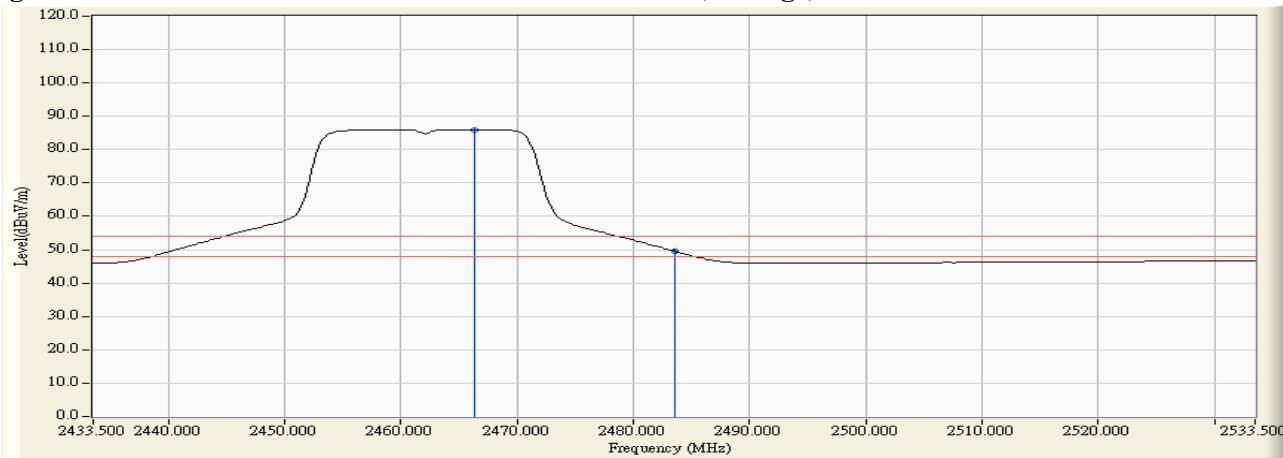

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “\*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.


Product : WIFI Module  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 5: Transmit - 802.11n-40BW\_30Mbps(2.4G Band)

**RF Radiated Measurement (Horizontal):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
03 (Peak)	2389.800	33.738	39.234	72.973	74.00	54.00	Pass
03 (Peak)	2390.000	33.739	39.468	73.207	74.00	54.00	Pass
03 (Peak)	2436.200	33.829	62.623	96.452	--	--	--
03 (Average)	2390.000	33.739	19.765	53.504	74.00	54.00	Pass
03 (Average)	2437.000	33.831	48.103	81.934	--	--	--


**Figure Channel 01:**

**Horizontal (Peak)**

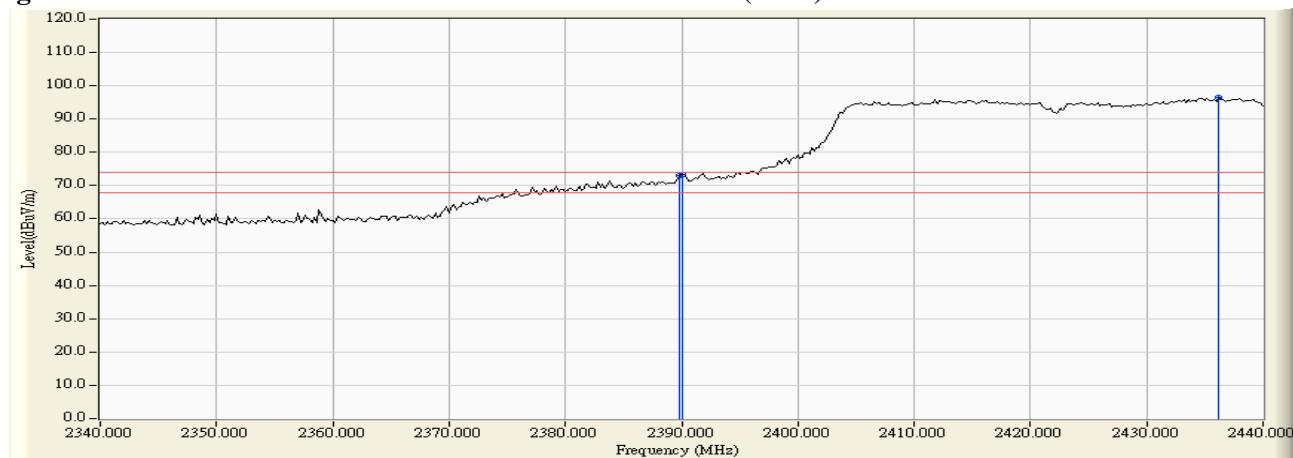

**Figure Channel 01:**

**Horizontal (Average)**

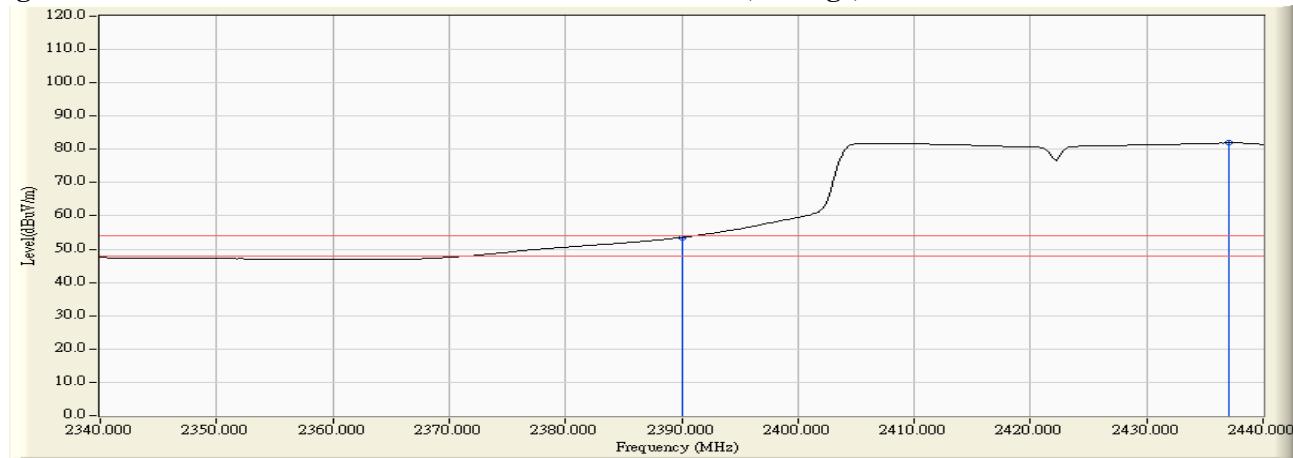

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “\*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.


Product : WIFI Module  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 5: Transmit - 802.11n-40BW\_30Mbps(2.4G Band)

**RF Radiated Measurement (Vertical):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
03 (Peak)	2390.000	32.267	32.752	65.019	74.00	54.00	Pass
03 (Peak)	2425.200	32.308	59.725	92.033	--	--	--
03 (Average)	2390.000	32.267	19.559	51.826	74.00	54.00	Pass
03 (Average)	2437.200	32.363	47.973	80.336	--	--	--


**Figure Channel 01:**

**Vertical (Peak)**

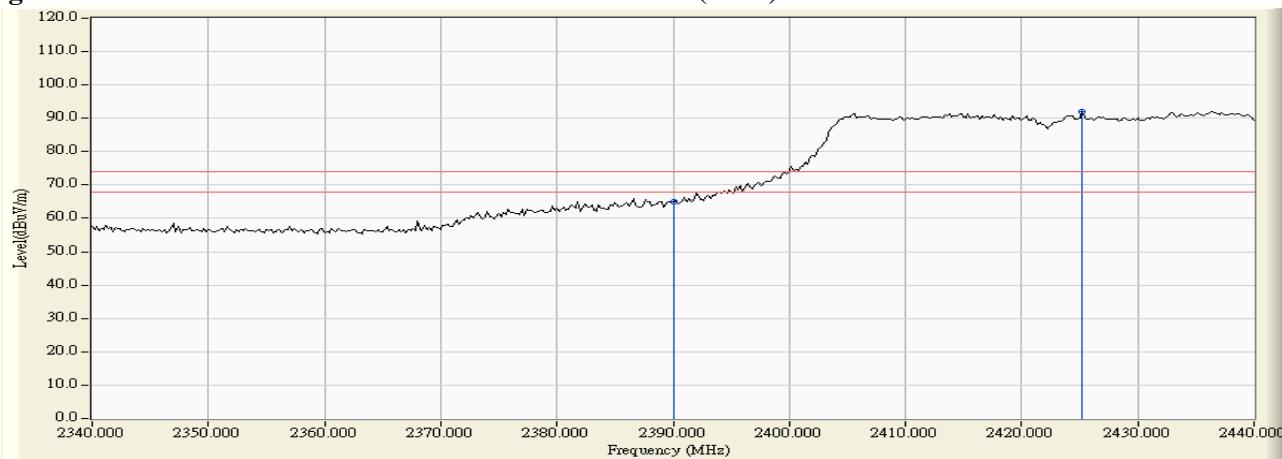

**Figure Channel 01:**

**Vertical (Average)**

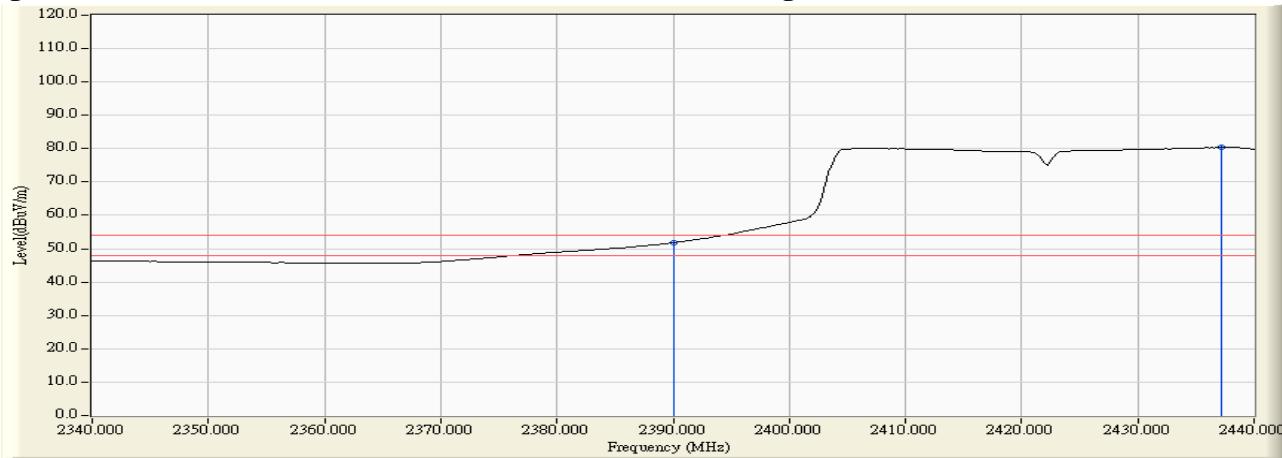

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “\*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : WIFI Module  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 5: Transmit - 802.11n-40BW\_30Mbps(2.4G Band)

**RF Radiated Measurement (Horizontal):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
09 (Peak)	2465.100	33.900	63.856	97.757	--	--	--
09 (Peak)	2483.500	33.951	35.287	69.237	74.00	54.00	Pass
09 (Peak)	2485.900	33.956	36.322	70.278	74.00	54.00	Pass
09 (Average)	2466.300	33.904	50.415	84.319	--	--	--
09 (Average)	2483.500	33.951	18.457	52.407	74.00	54.00	Pass

Figure Channel 07:

Horizontal (Peak)


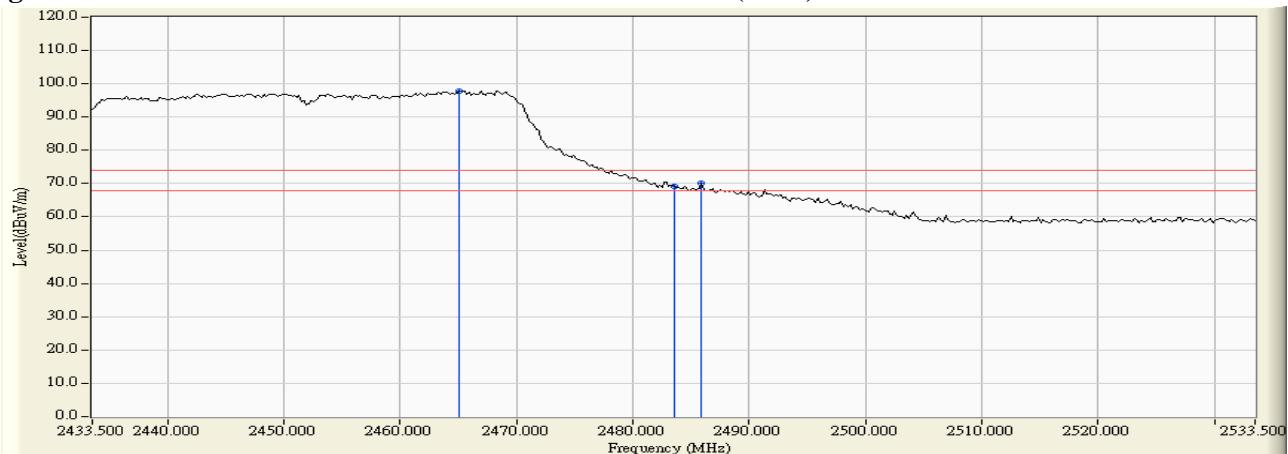


Figure Channel 07:

Horizontal (Average)

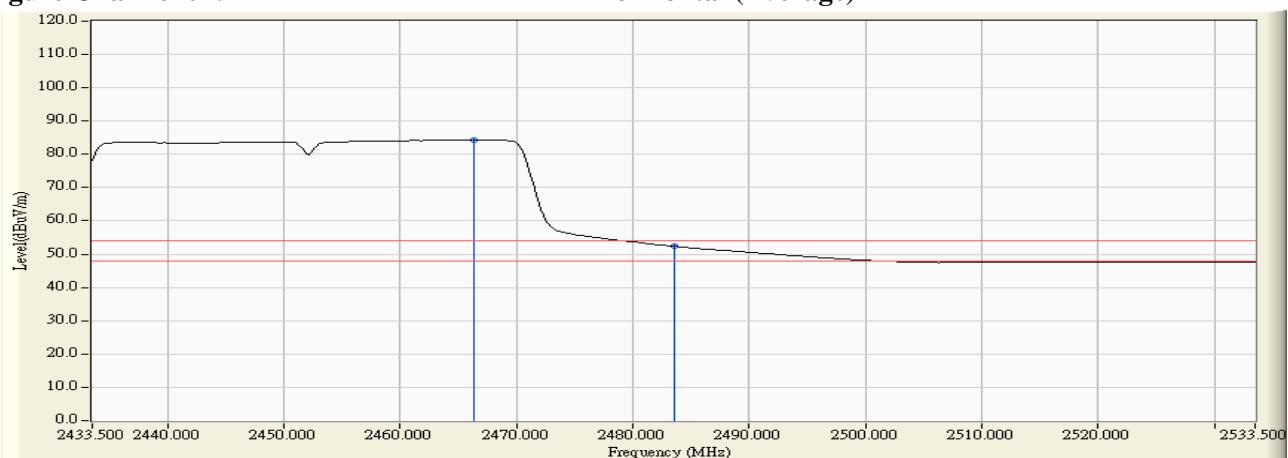

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “\*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.


Product : WIFI Module  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 5: Transmit - 802.11n-40BW\_30Mbps(2.4G Band)

**RF Radiated Measurement (Vertical):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
09 (Peak)	2436.500	32.359	62.043	94.403	--	--	--
09 (Peak)	2483.500	32.586	31.392	63.977	74.00	54.00	Pass
09 (Average)	2465.900	32.500	50.292	82.791	--	--	--
09 (Average)	2483.500	32.586	18.331	50.916	74.00	54.00	Pass


**Figure Channel 07:**

**Vertical (Peak)**

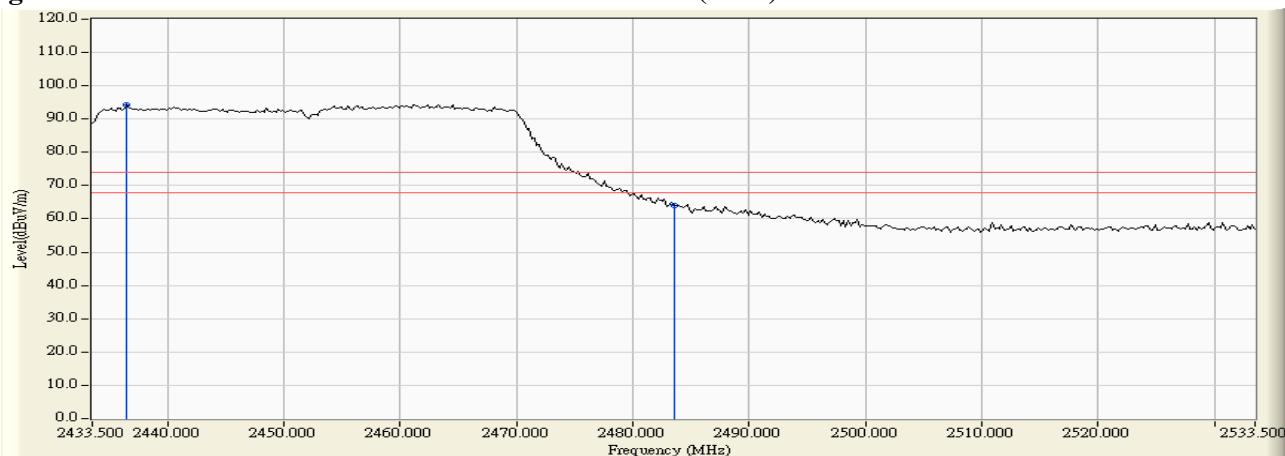

**Figure Channel 07:**

**Vertical (Average)**

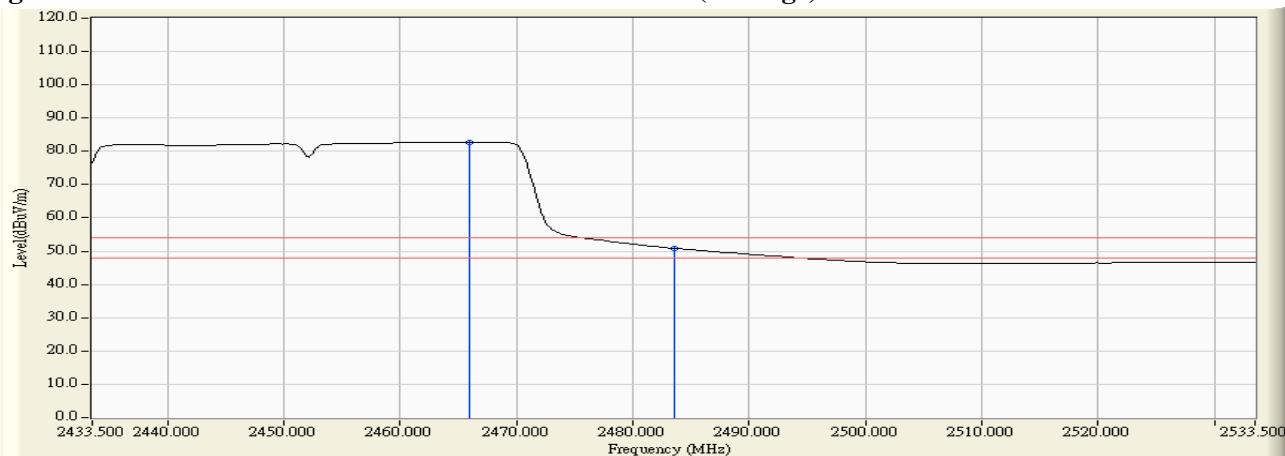


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “\*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.


Product : WIFI Module  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit (802.11b 1Mbps)

Test Frequency (MHz)	Measurement Level Δ (dB)	Limit Δ (dB)	Result
2412	45.87	>20	PASS
2462	52.74	>20	PASS

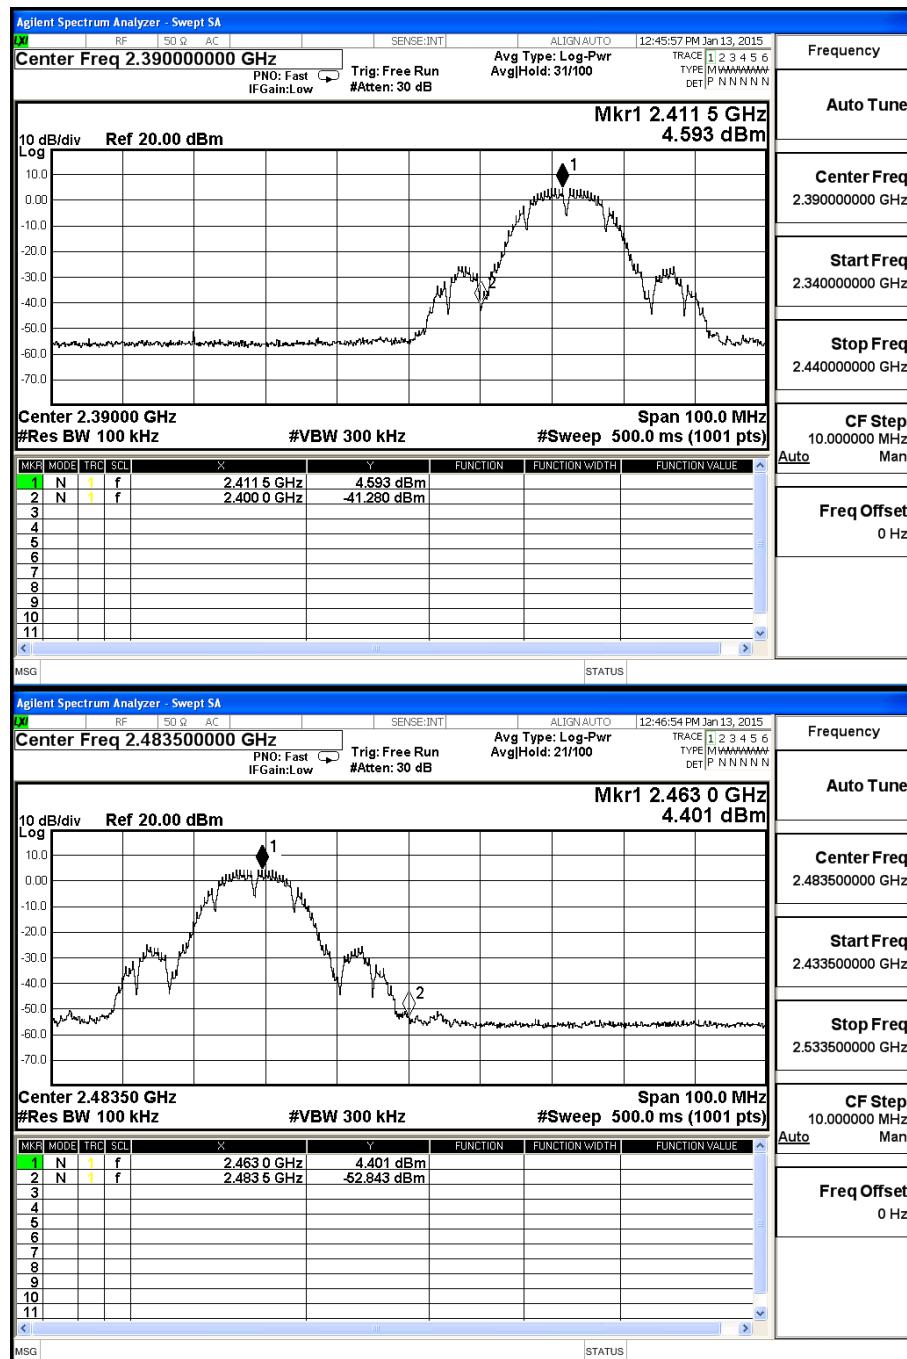


Product : WIFI Module  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit (802.11g 6Mbps)

Test Frequency (MHz)	Measurement Level Δ (dB)	Limit Δ (dB)	Result
2412	23.30	>20	PASS
2462	30.81	>20	PASS

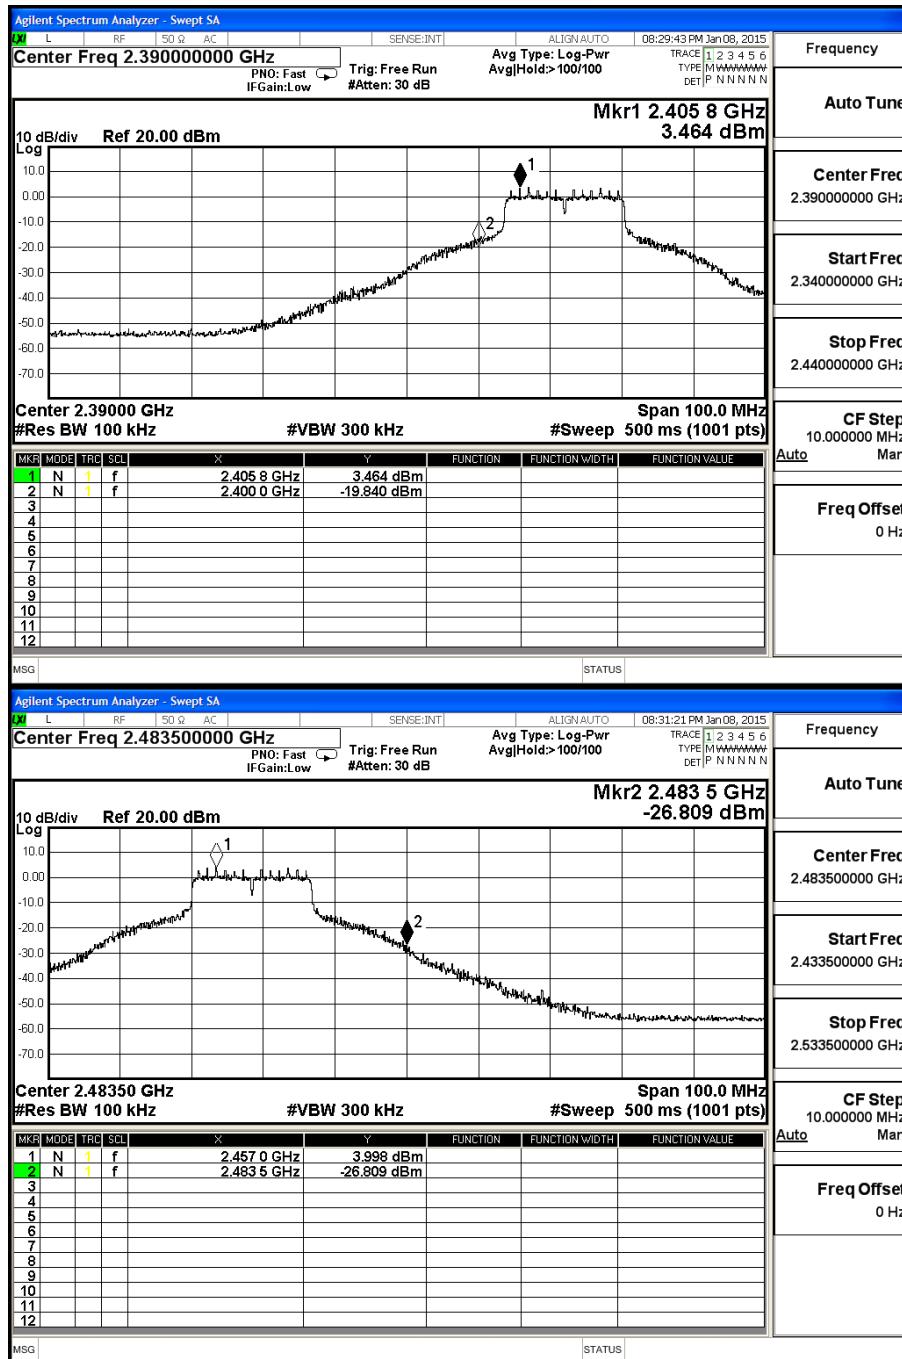


Product : WIFI Module  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 4: Transmit - 802.11n-20BW\_14.4Mbps(2.4G Band) Chain A

Test Frequency (MHz)	Measurement Level Δ (dB)	Limit Δ (dB)	Result
2412	25.01	>20	PASS
2462	32.22	>20	PASS

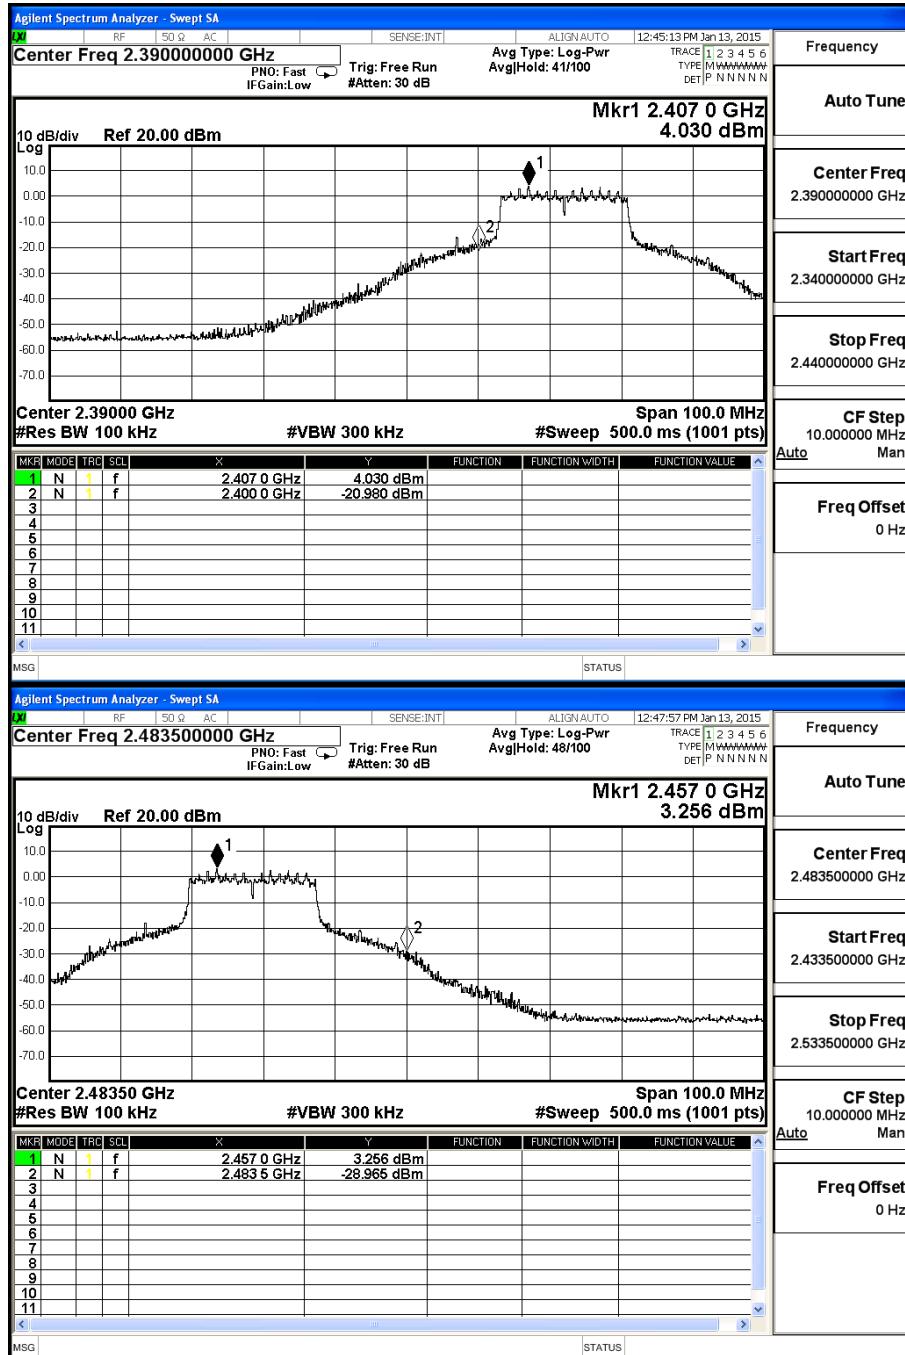


Product : WIFI Module  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 4: Transmit - 802.11n-20BW\_14.4Mbps(2.4G Band) Chain B

Test Frequency (MHz)	Measurement Level Δ (dB)	Limit Δ (dB)	Result
2412	24.74	>20	PASS
2462	34.02	>20	PASS

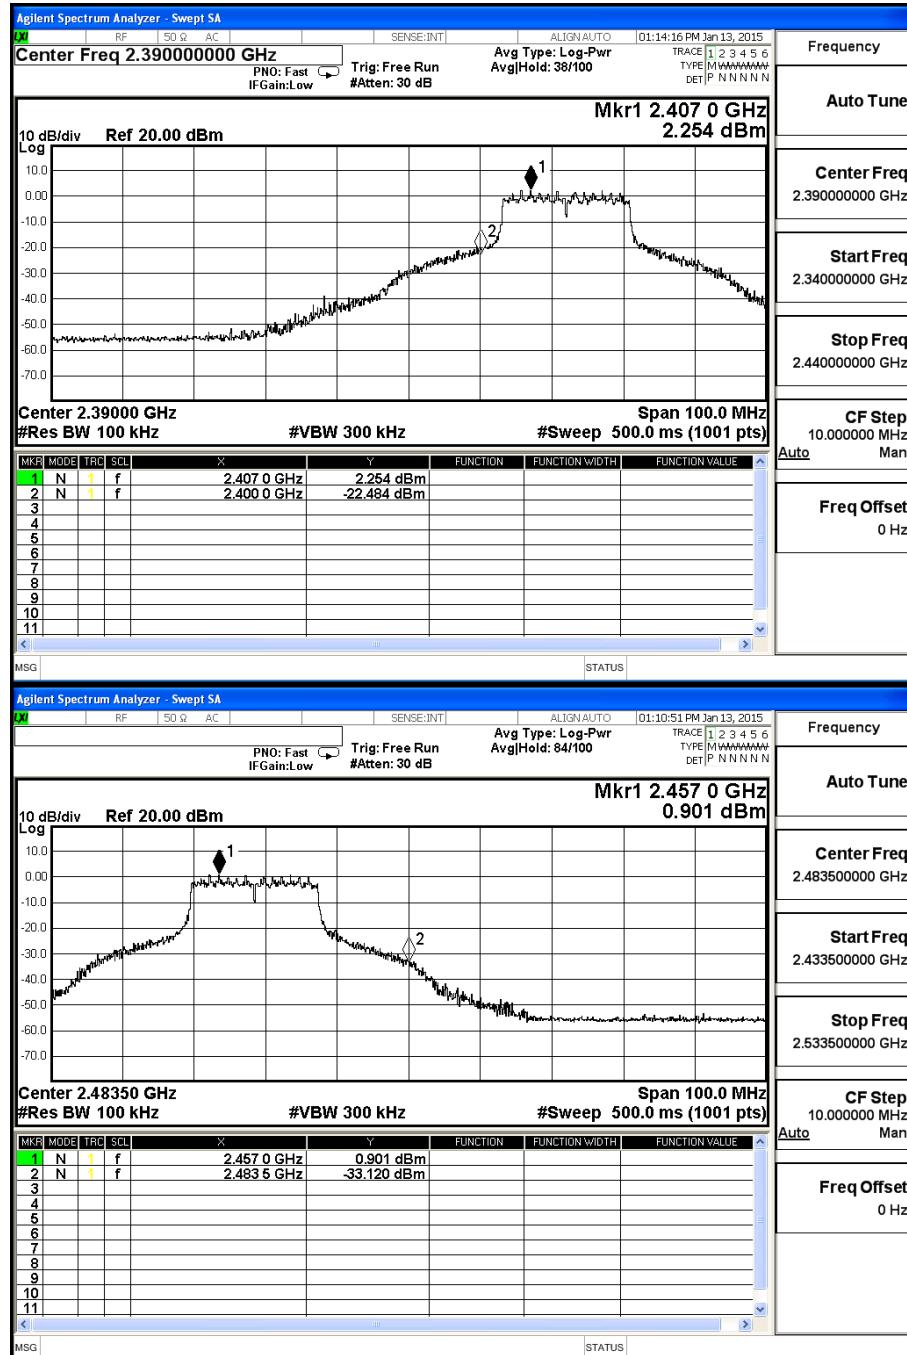


Product : WIFI Module  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 5: Transmit - 802.11n-40BW\_30Mbps(2.4G Band) Chain A

Test Frequency (MHz)	Measurement Level Δ (dB)	Limit Δ (dB)	Result
2422	26.18	>20	PASS
2452	29.30	>20	PASS

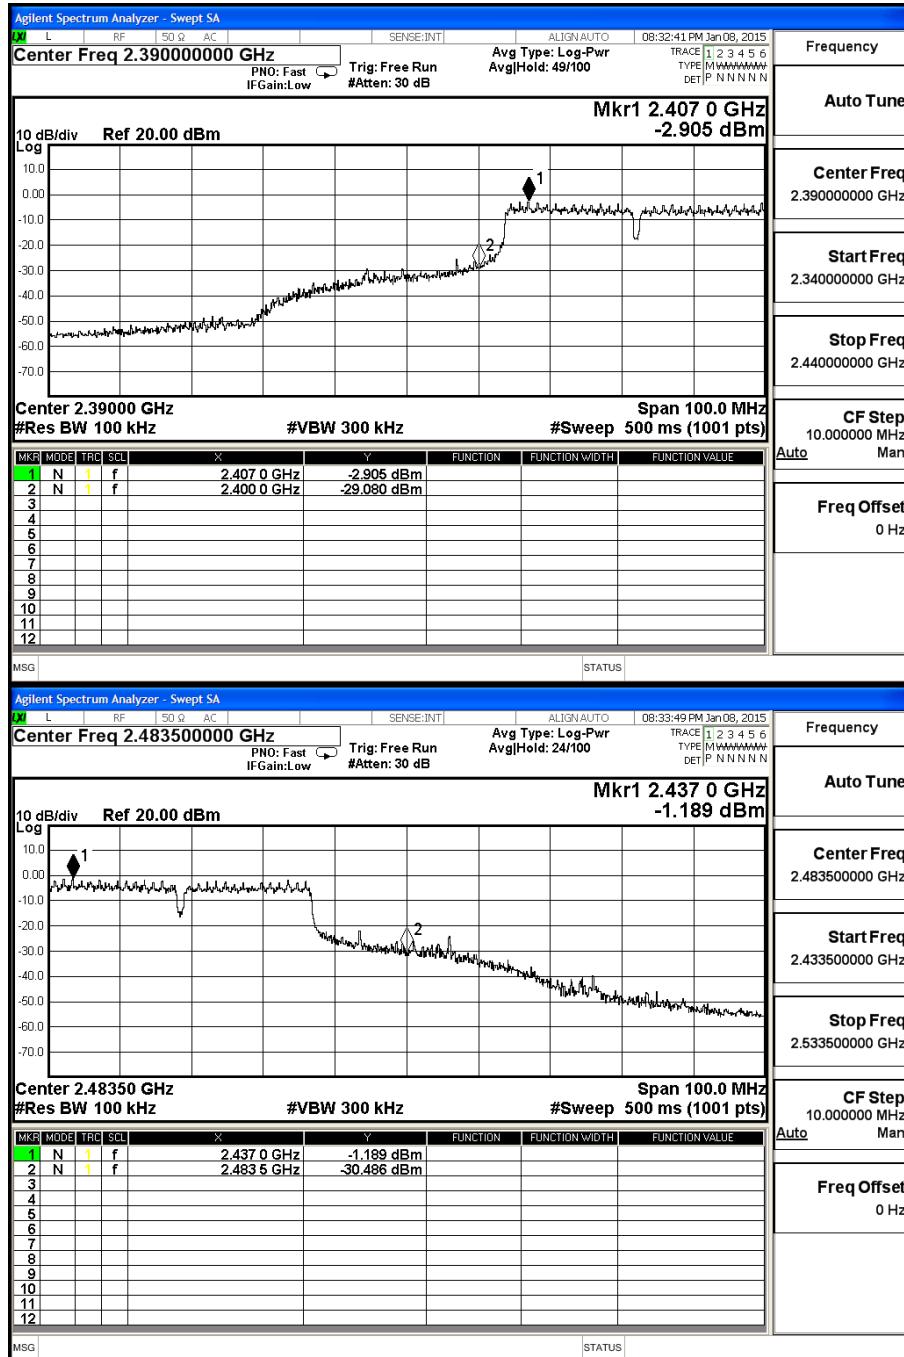

Product : WIFI Module  
Test Item : Band Edge  
Test Site : No.3 OATS  
Test Mode : Mode 5: Transmit - 802.11n-40BW\_30Mbps(2.4G Band) Chain B

Test Frequency (MHz)	Measurement Level $\Delta$ (dB)	Limit $\Delta$ (dB)	Result
2422	25.57	>20	PASS
2452	29.73	>20	PASS

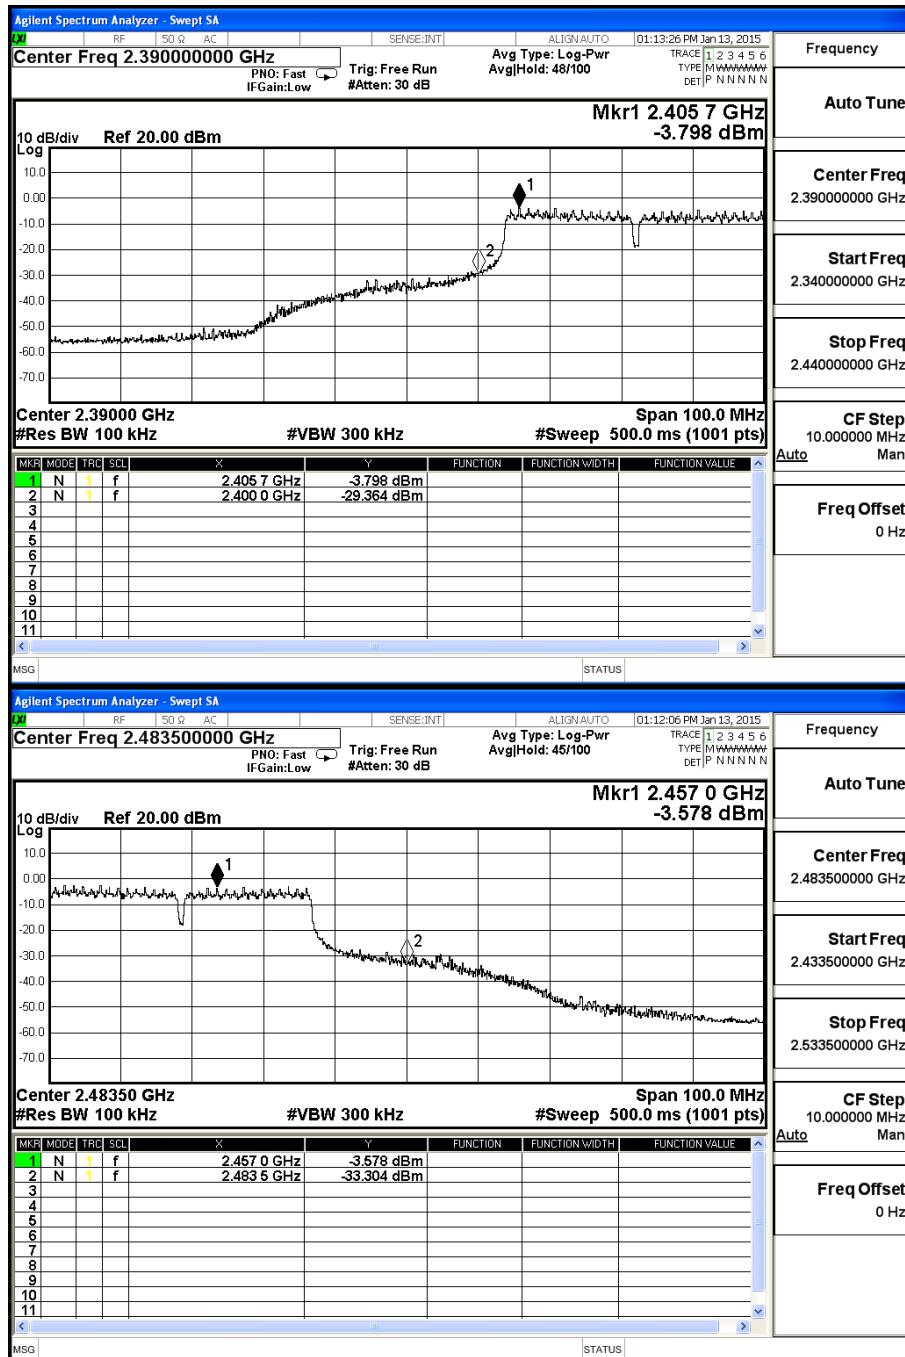

## 7. Occupied Bandwidth


### 7.1. Test Equipment

Equipment	Manufacturer	Model No./Serial No.	Last Cal.
Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2014
Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2014
X Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2014

Note:

1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with “X” are used to measure the final test results.

### 7.2. Test Setup

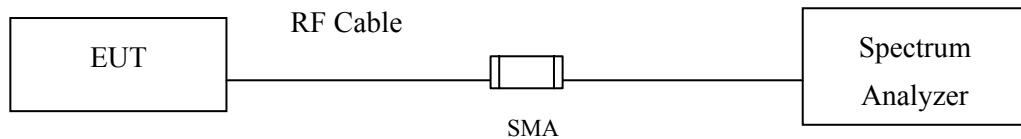

### 7.3. Limits

The minimum bandwidth shall be at least 500 kHz.

### 7.4. Test Procedure

The EUT was setup according to ANSI C63.10, 2009; tested according to DTS test procedure of KDB558074 for compliance to FCC 47CFR 15.247 requirements.

Set RBW = 1-5% of the emission bandwidth,  $VBW \geq 3 * RBW$

### 7.5. Uncertainty


$\pm 150\text{Hz}$

## 7.6. Test Result of Occupied Bandwidth

Product : WIFI Module  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2412MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
1	2412.00	10200	>500	Pass


Figure Channel 1:

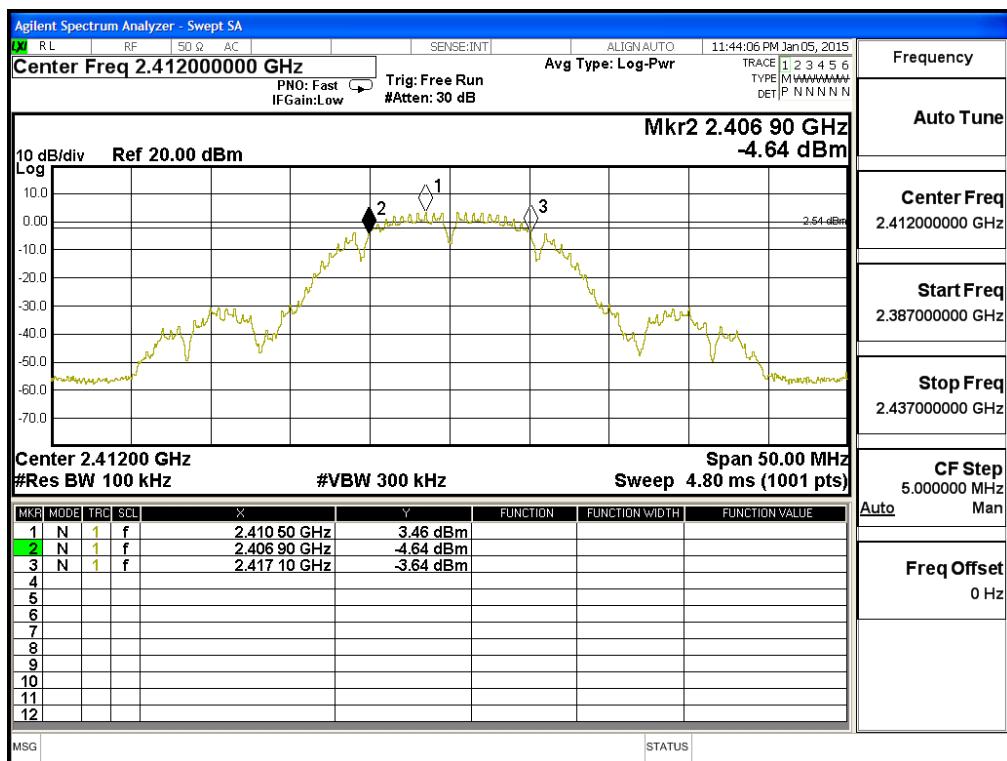

Product : WIFI Module  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2437MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
6	2437.00	10200	>500	Pass


Figure Channel 6:

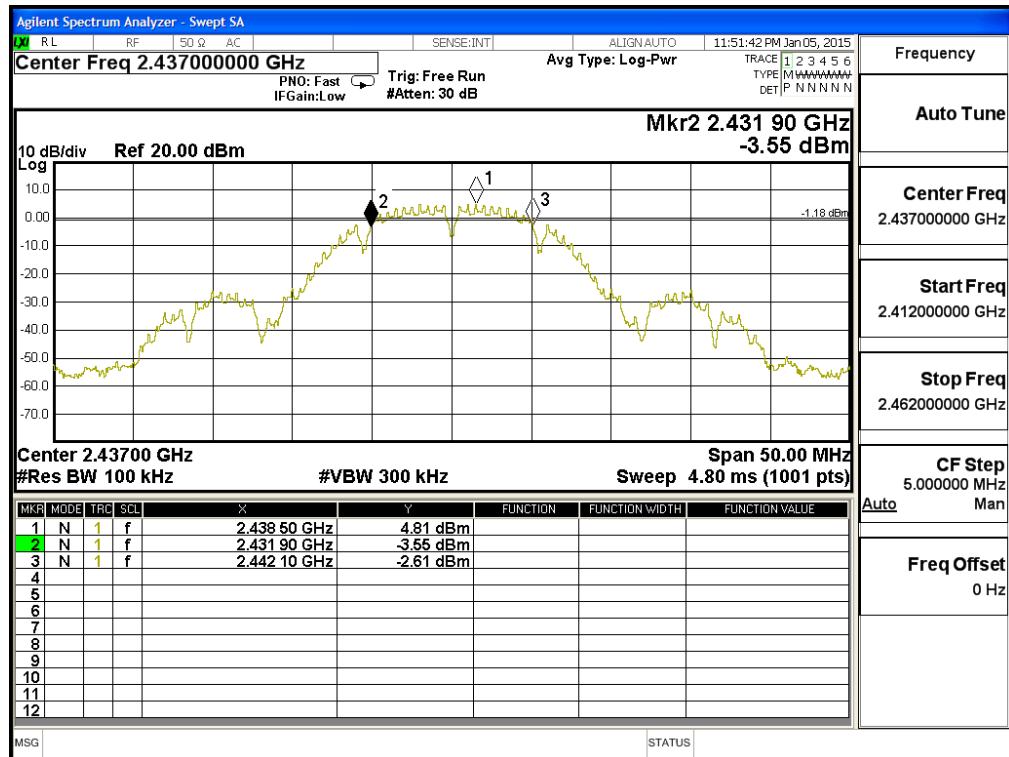

Product : WIFI Module  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2462MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
11	2462.00	10200	>500	Pass


Figure Channel 11:

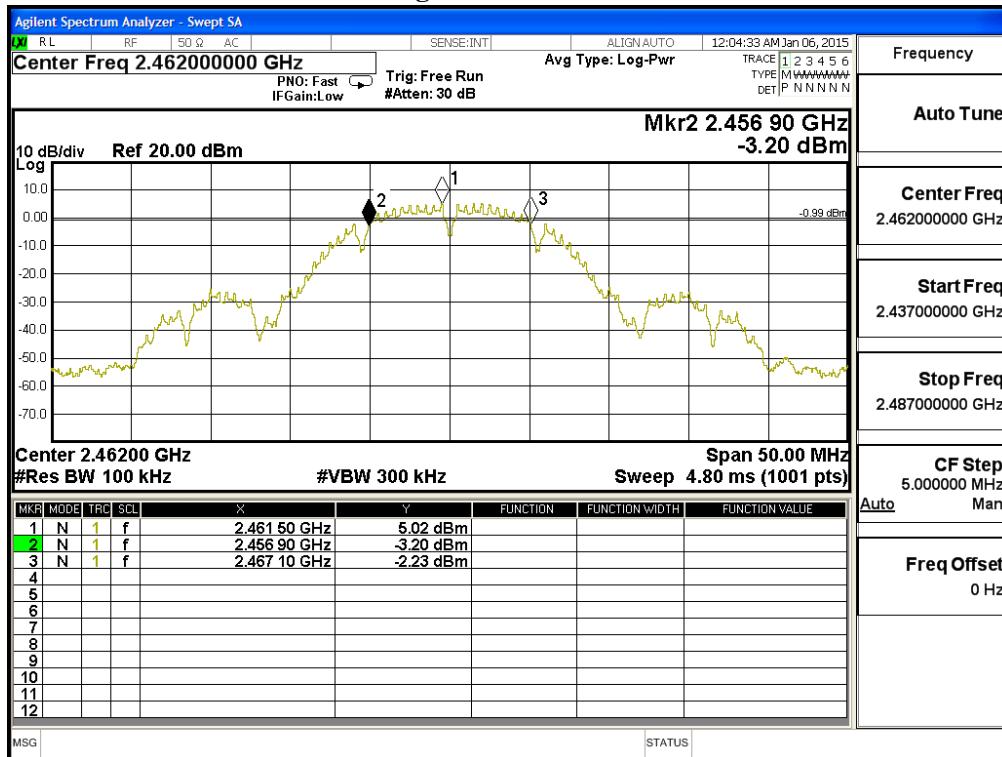

Product : WIFI Module  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2412MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
1	2412.00	16650	>500	Pass


Figure Channel 1:

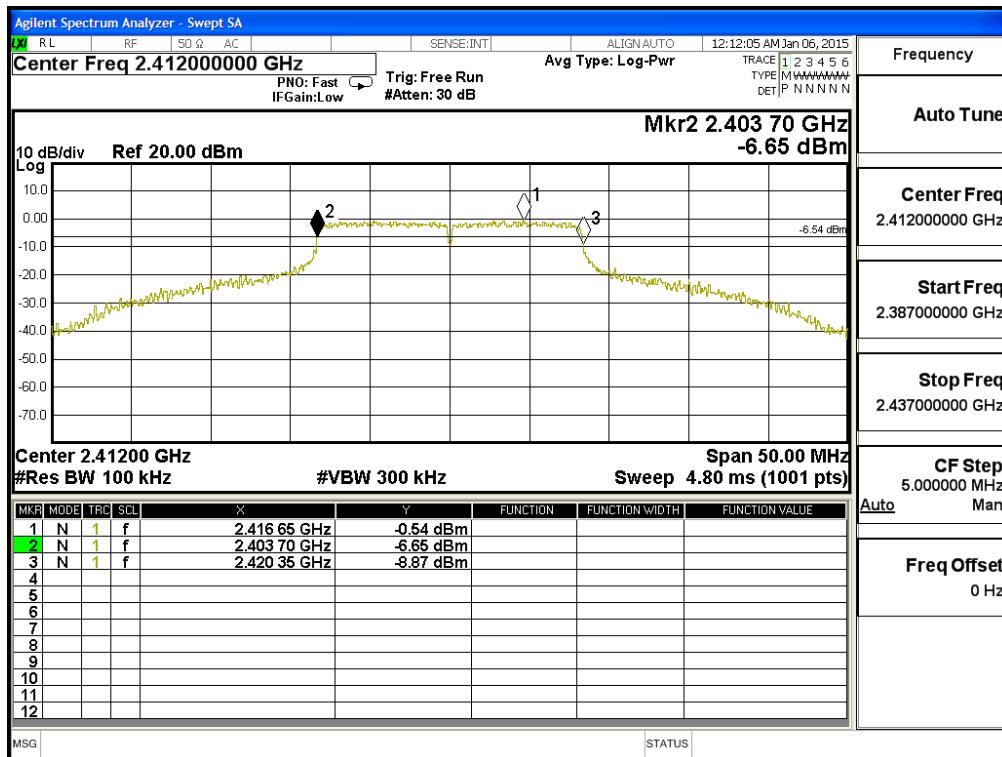

Product : WIFI Module  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2437MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
6	2437.00	16700	>500	Pass


Figure Channel 6:

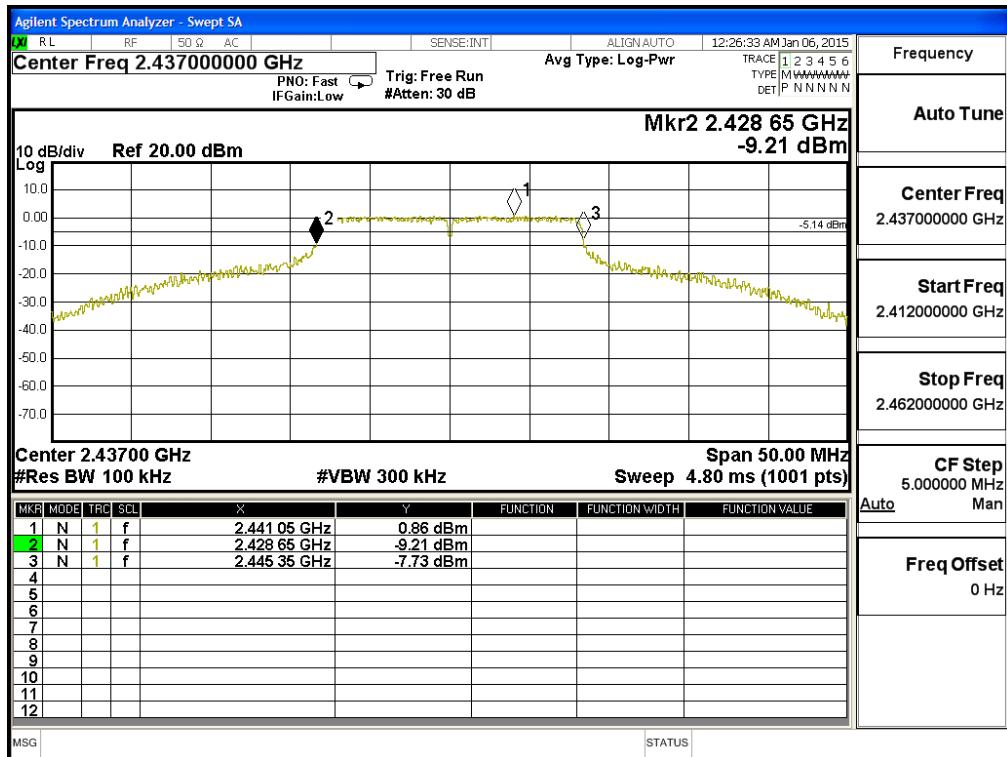

Product : WIFI Module  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2462MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
11	2462.00	16650	>500	Pass


Figure Channel 11:

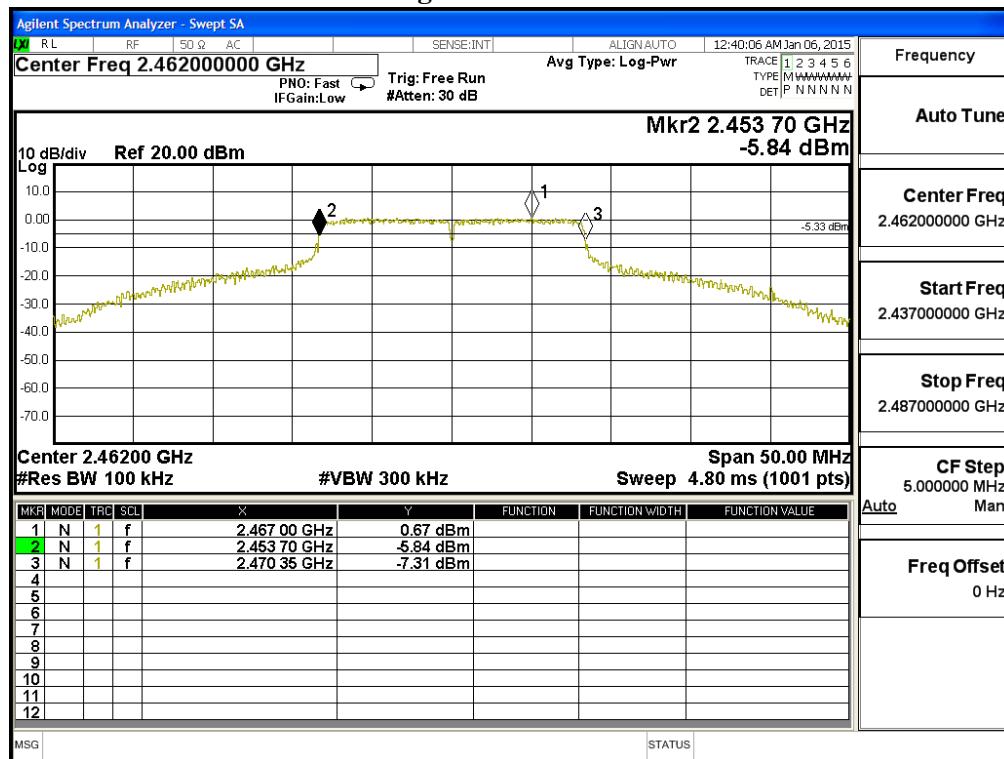

Product : WIFI Module  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 4: Transmit - 802.11n-20BW\_14.4Mbps(2.4G Band) (2412MHz)


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
1	2412.00	17900	>500	Pass

**Figure Channel 1: (Chain A)**

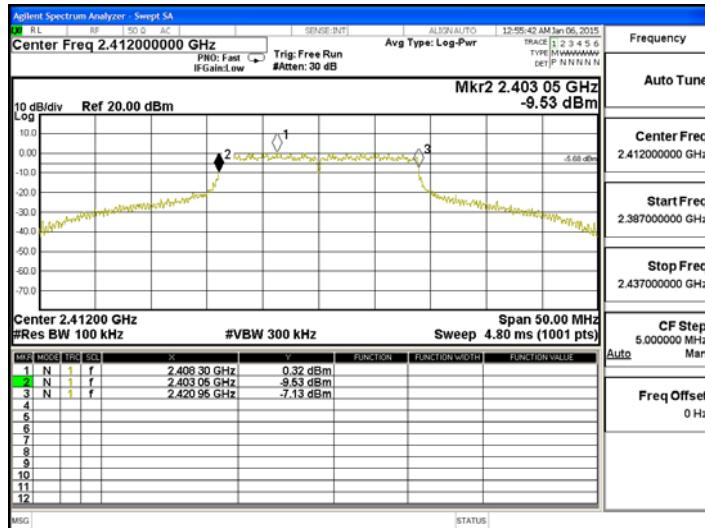

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
1	2412.00	17850	>500	Pass


**Figure Channel 1: (Chain B)**

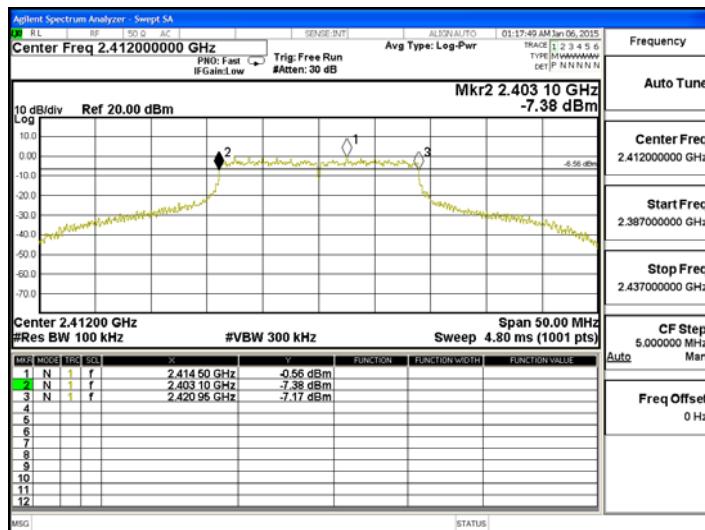

Product : WIFI Module  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 4: Transmit - 802.11n-20BW\_14.4Mbps(2.4G Band) (2437MHz)


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
6	2437.00	17850	>500	Pass

Figure Channel 6: (Chain A)

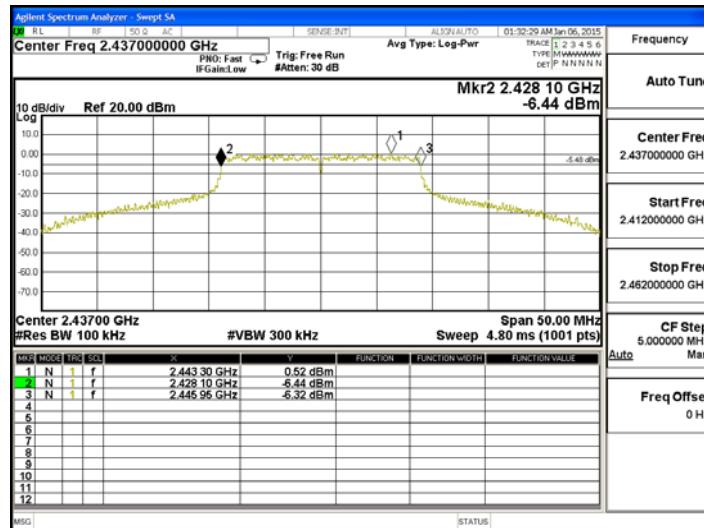

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
6	2437.00	17850	>500	Pass


Figure Channel 6: (Chain B)

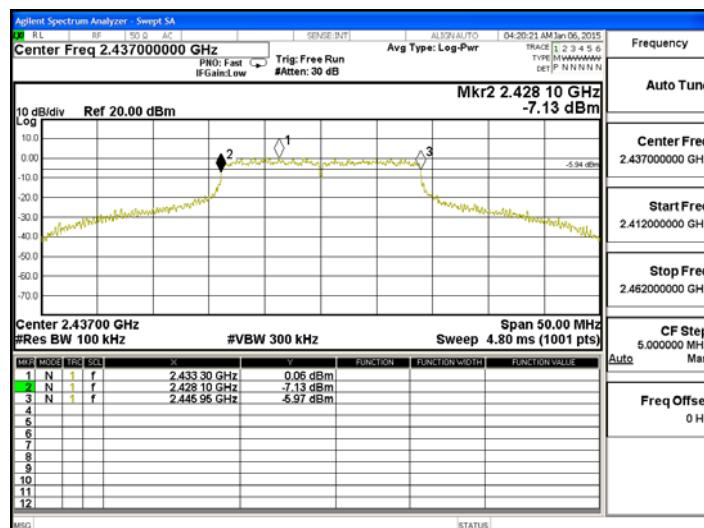

Product : WIFI Module  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 4: Transmit - 802.11n-20BW\_14.4Mbps(2.4G Band) (2462MHz)


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
11	2462.00	17700	>500	Pass

**Figure Channel 11: (Chain A)**

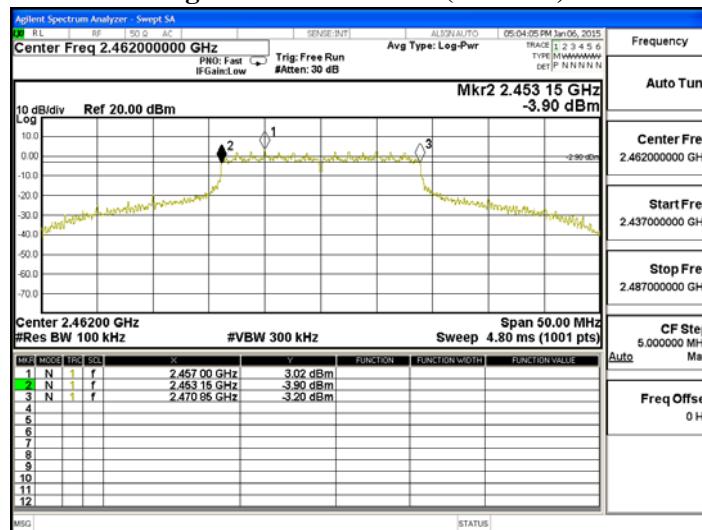

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
11	2462.00	17700	>500	Pass


**Figure Channel 11: (Chain B)**

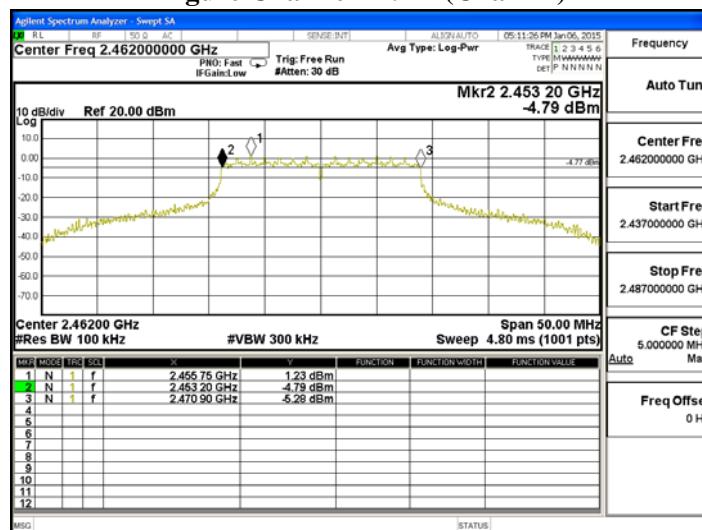

Product : WIFI Module  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 5: Transmit - 802.11n-40BW\_30Mbps(2.4G Band) (2422MHz)


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
3	2422.00	36600	>500	Pass

Figure Channel 1: (Chain A)

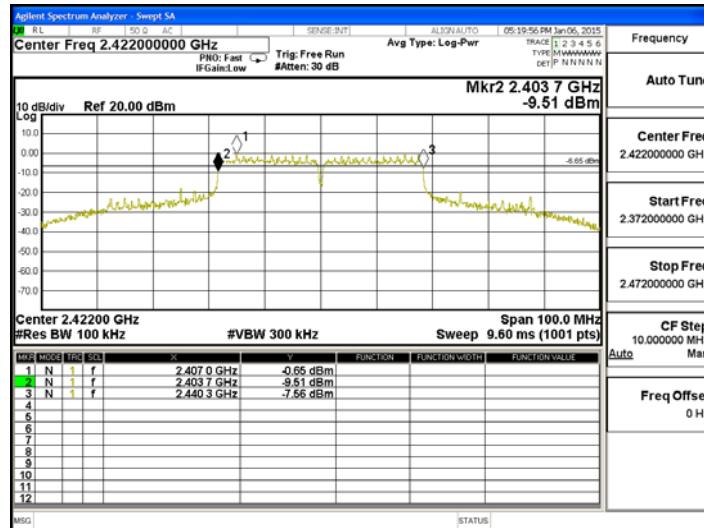

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
3	2422.00	36600	>500	Pass


Figure Channel 1: (Chain B)

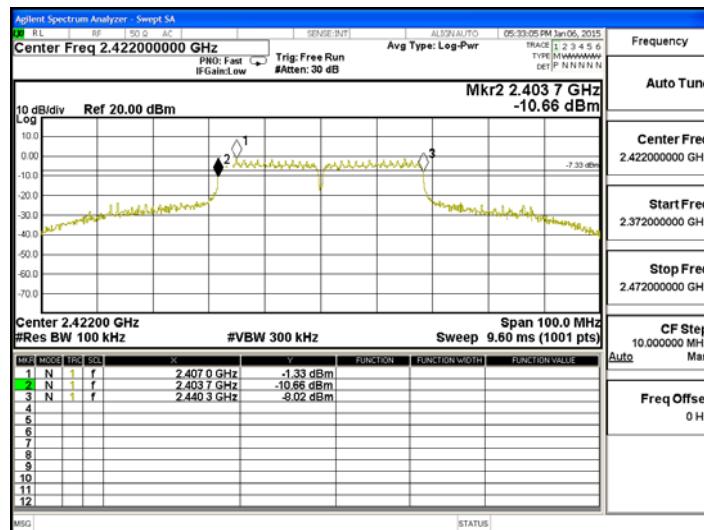

Product : WIFI Module  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 5: Transmit - 802.11n-40BW\_30Mbps(2.4G Band) (2437MHz)


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
6	2437.00	36600	>500	Pass

Figure Channel 4: (Chain A)

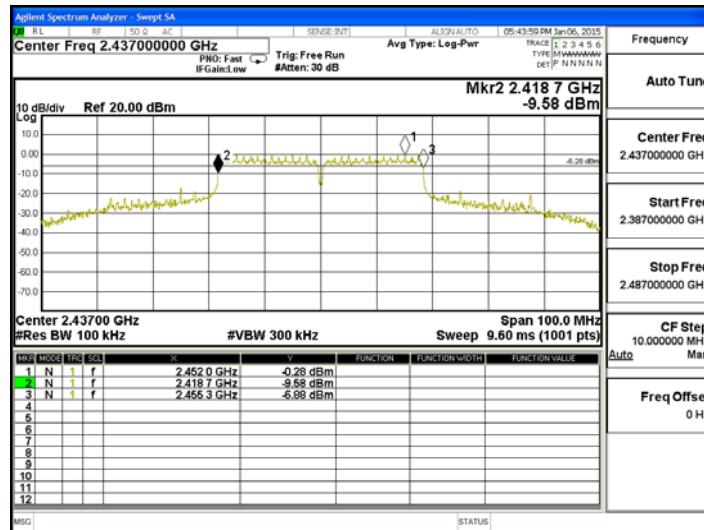

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
6	2437.00	36600	>500	Pass


Figure Channel 4: (Chain B)

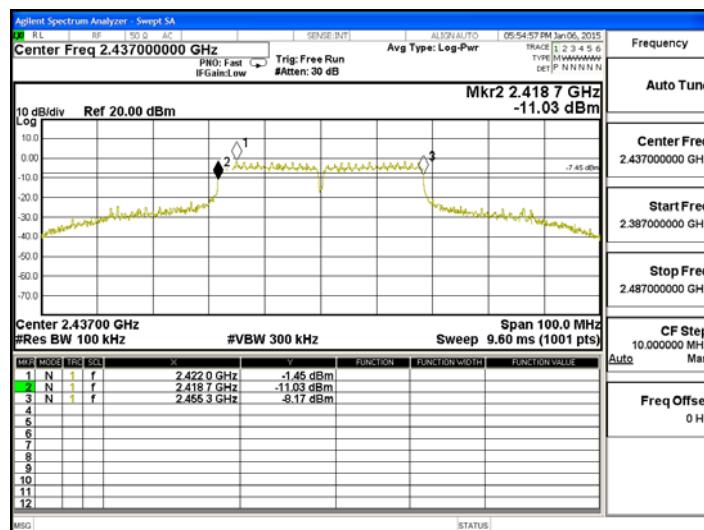

Product : WIFI Module  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 5: Transmit - 802.11n-40BW\_30Mbps(2.4G Band) (2452MHz)


Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
9	2452.00	36600	>500	Pass

Figure Channel 7: (Chain A)

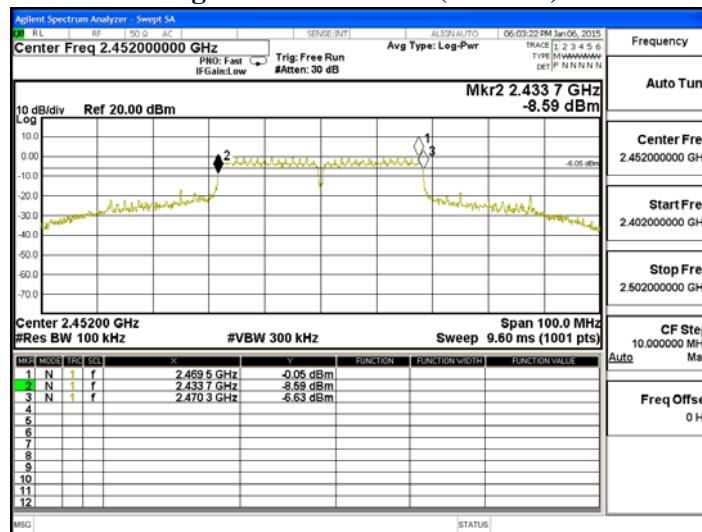

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
9	2452.00	36600	>500	Pass

Figure Channel 7: (Chain B)

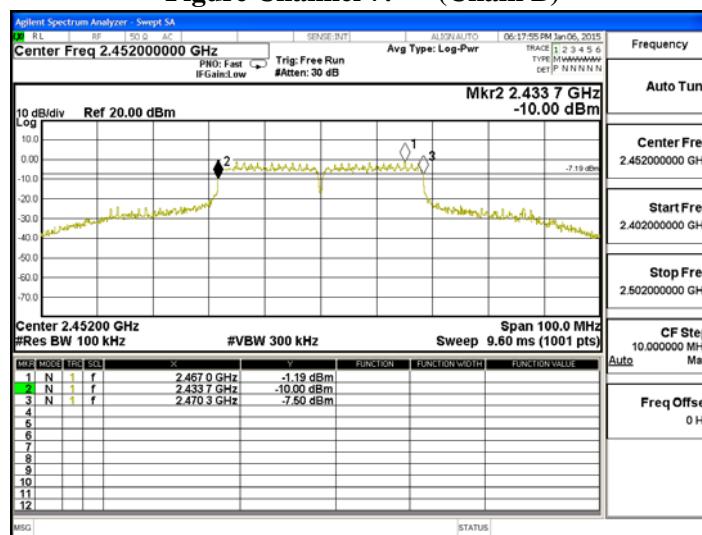

## 8. Power Density


### 8.1. Test Equipment

Equipment	Manufacturer	Model No./Serial No.	Last Cal.
Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2014
Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2014
X Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2014

Note:

1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with “X” are used to measure the final test results.

### 8.2. Test Setup

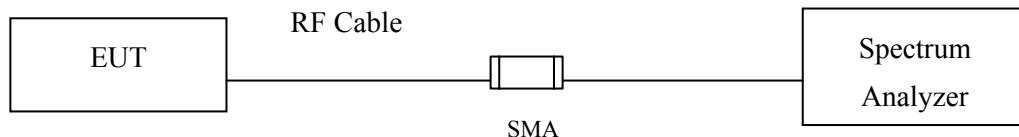

### 8.3. Limits

The transmitted power density averaged over any 1 second interval shall not be greater +8dBm in any 3kHz bandwidth.

### 8.4. Test Procedure

The EUT was setup according to ANSI C63.10, 2009; tested according to DTS test procedure of KDB 558074 for compliance to FCC 47CFR 15.247 requirements.

The maximum power spectral density using KDB 558074 section 10.2 PKPSD (peak PSD) method.

### 8.5. Uncertainty


± 1.27 dB

## 8.6. Test Result of Power Density

Product : WIFI Module  
Test Item : Power Density Data  
Test Site : No.3 OATS  
Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2412MHz)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
1	2412	3.520	< 8dBm	Pass


**Figure Channel 1:**

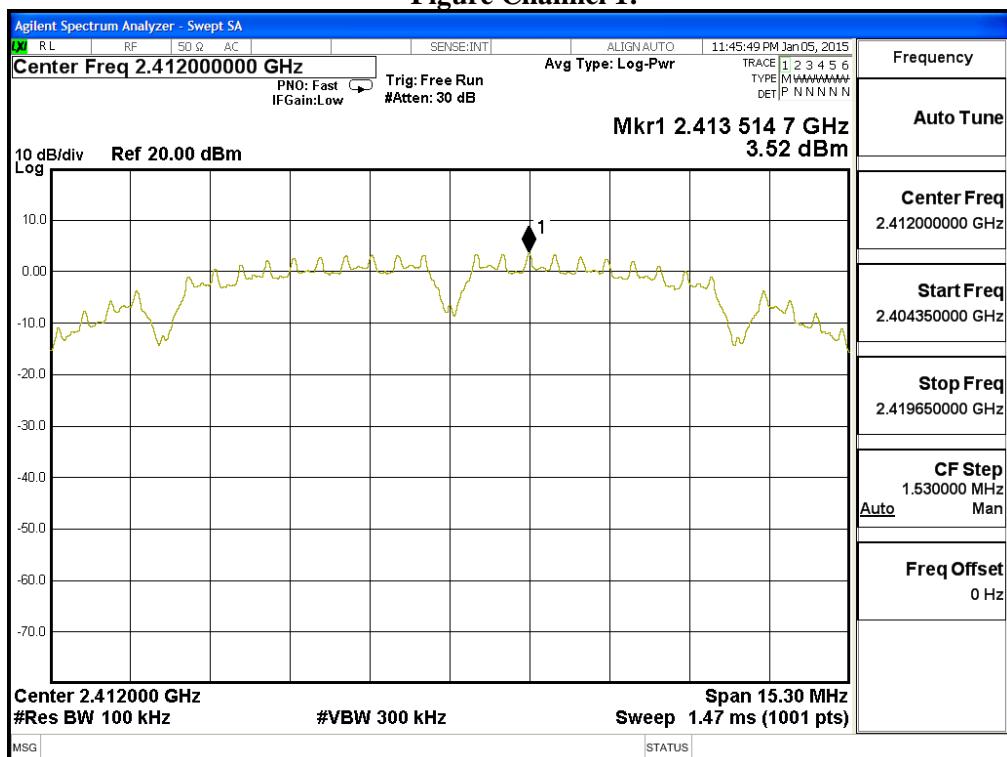

Product : WIFI Module  
Test Item : Power Density Data  
Test Site : No.3OATS  
Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2437MHz)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
6	2437	4.910	< 8dBm	Pass


**Figure Channel 6:**

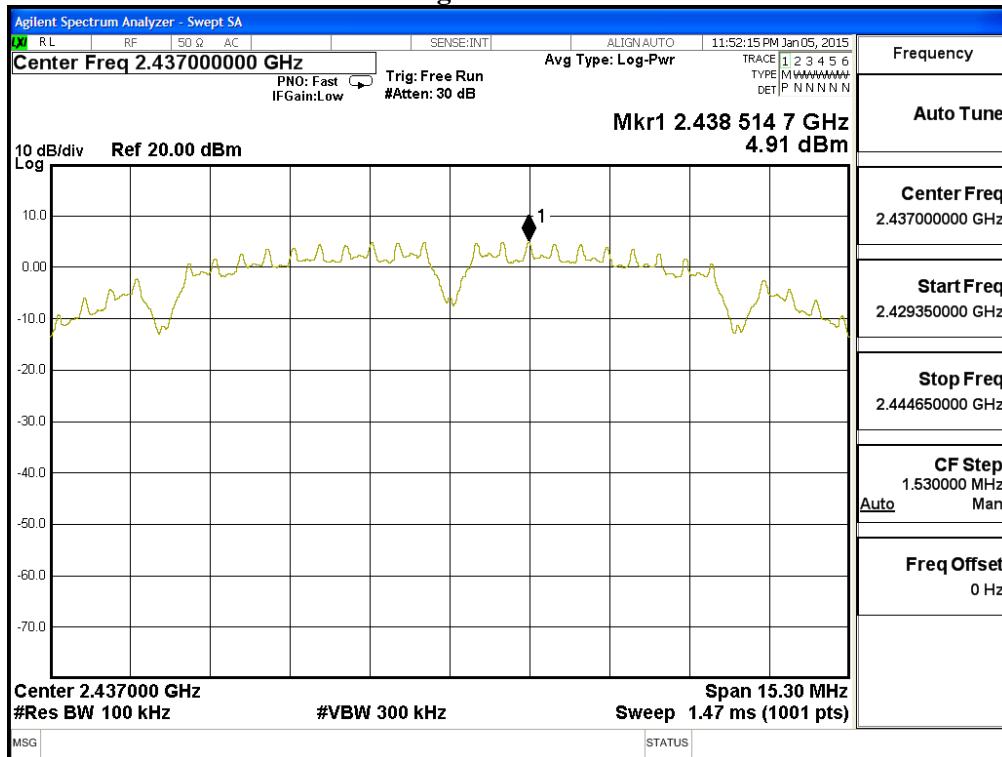

Product : WIFI Module  
Test Item : Power Density Data  
Test Site : No.3 OATS  
Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2462MHz)


Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
11	2462	5.140	< 8dBm	Pass

Figure Channel 11:

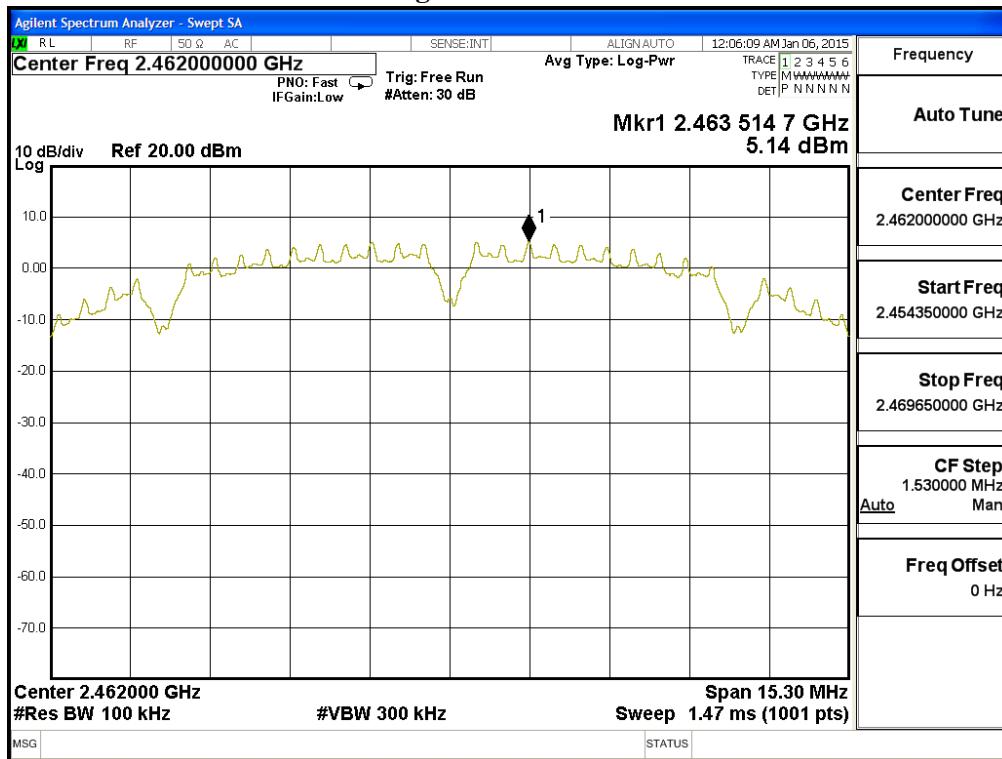

Product : WIFI Module  
Test Item : Power Density Data  
Test Site : No.3 OATS  
Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2412MHz)


Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
1	2412	-0.460	< 8dBm	Pass

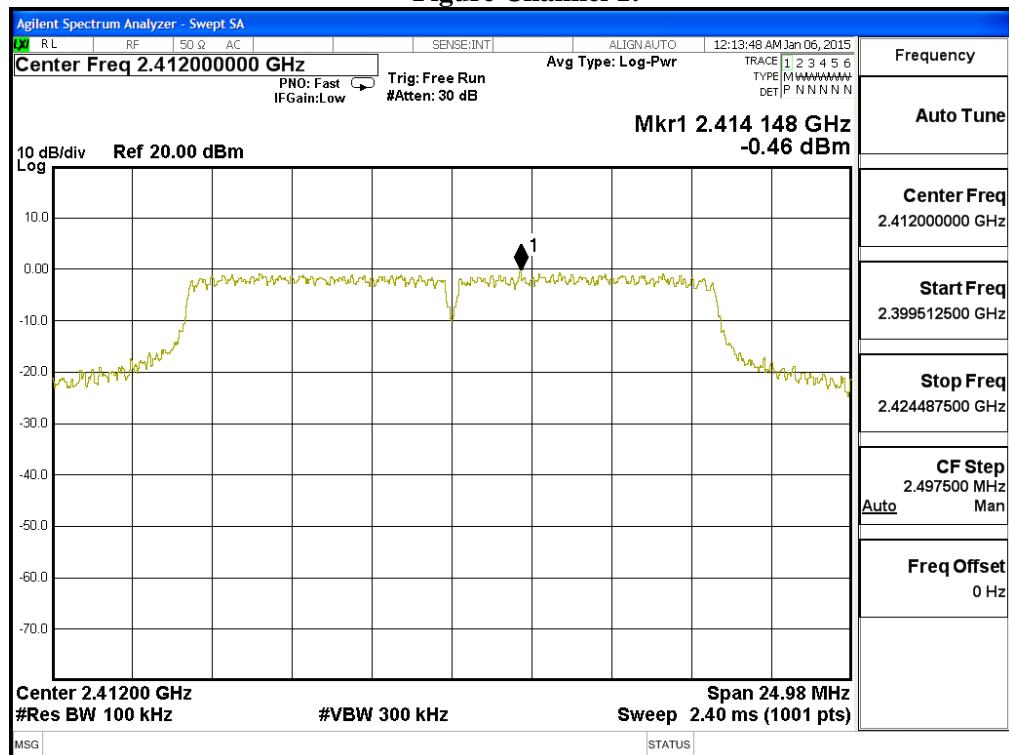**Figure Channel 1:**

Product : WIFI Module  
Test Item : Power Density Data  
Test Site : No.3OATS  
Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2437MHz)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
6	2437	1.090	< 8dBm	Pass


**Figure Channel 6:**

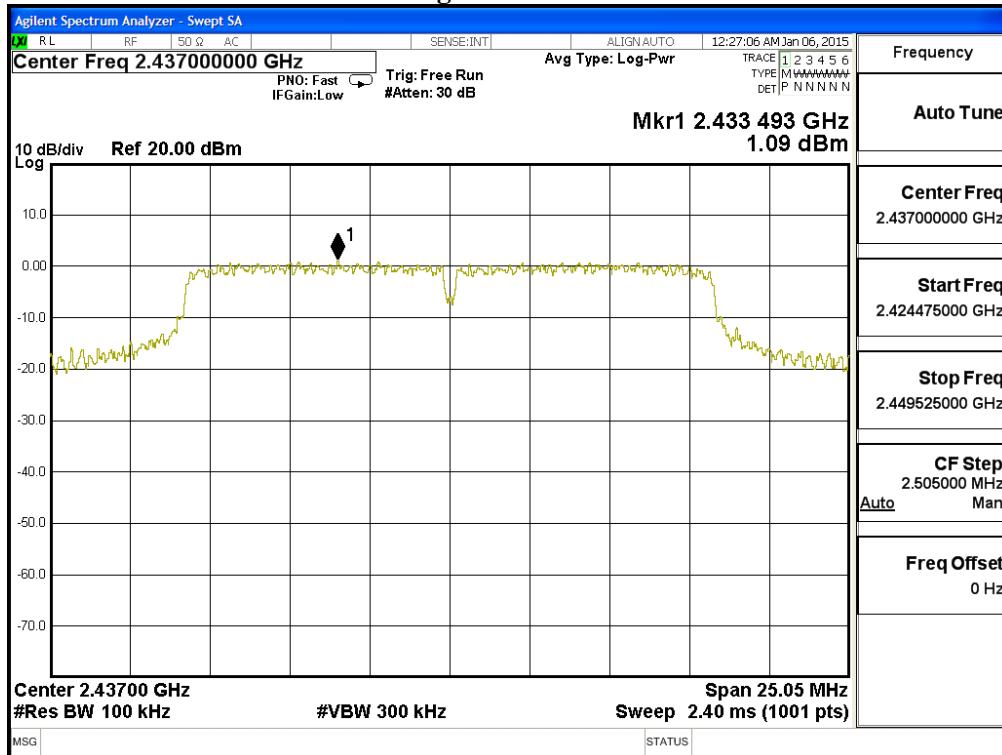

Product : WIFI Module  
 Test Item : Power Density Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2462MHz)

Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
11	2462	0.870	< 8dBm	Pass

Figure Channel 11:

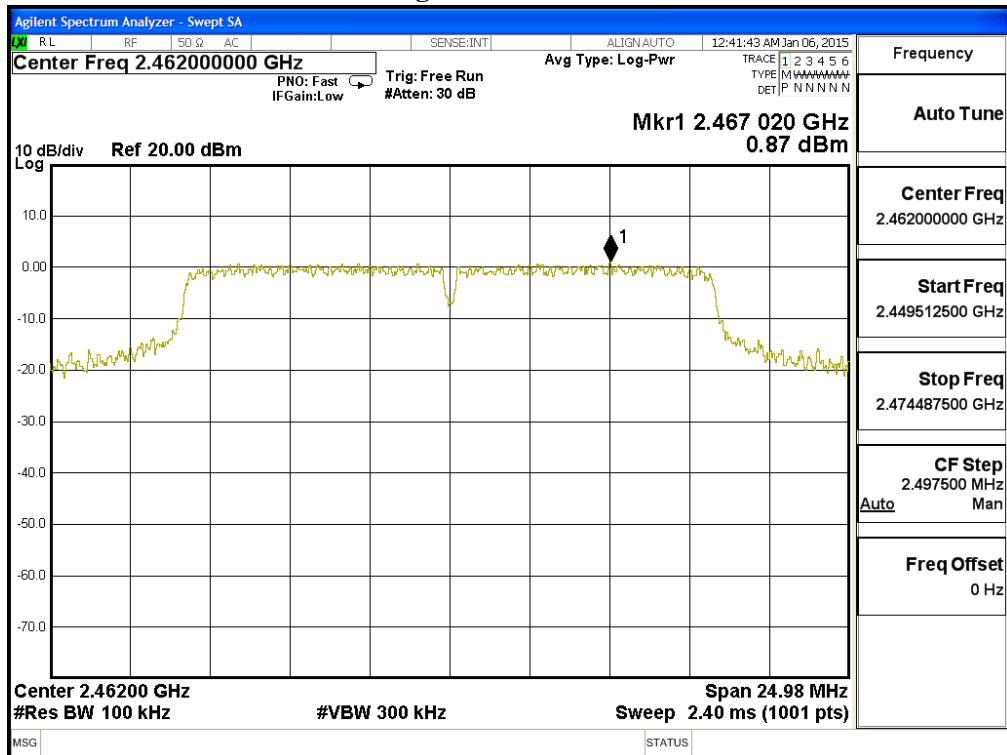


Product : WIFI Module  
 Test Item : Power Density Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 4: Transmit - 802.11n-20BW\_14.4Mbps(2.4G Band) (2412MHz)


CHAIN	PPSD/MHz (dBm)	Total PPSD/MHz (dBm)1	Limit	Result
A	0.000	3.010	< 8dBm	Pass
B	-0.990	2.020	< 8dBm	Pass

Note 1: The quantity  $10 \log 2$  (two antennas) is added to the spectrum peak value according to document 662911 D01.

**Figure Channel 1: (Chain A)**

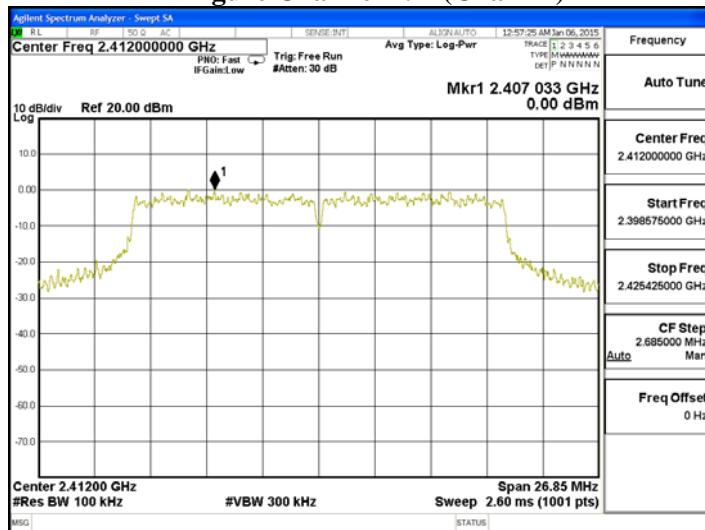

**Figure Channel 1: (Chain B)**

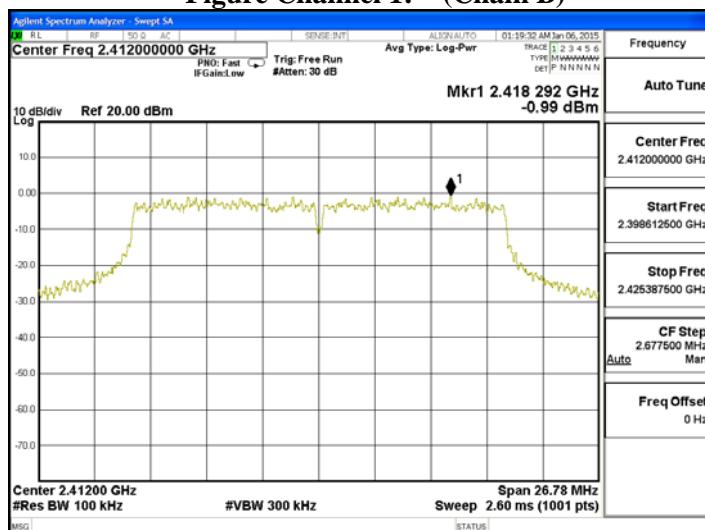

Product : WIFI Module  
 Test Item : Power Density Data  
 Test Site : No.3OATS  
 Test Mode : Mode 4: Transmit - 802.11n-20BW\_14.4Mbps(2.4G Band) (2437MHz)

CHAIN	PPSD/MHz (dBm)	Total PPSD/MHz (dBm)1	Limit	Result
A	0.780	3.790	< 8dBm	Pass
B	0.170	3.180	< 8dBm	Pass

Note 1: The quantity  $10 \log 2$  (two antennas) is added to the spectrum peak value according to document 662911 D01.

Figure Channel 6: (Chain A)


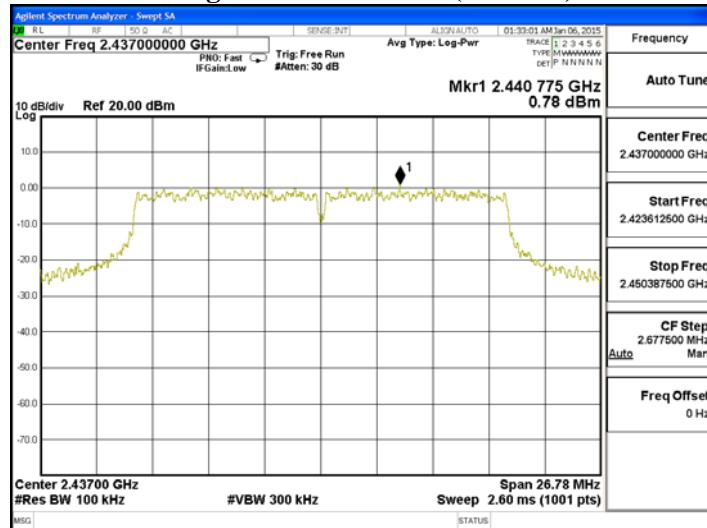


Figure Channel 6: (Chain B)

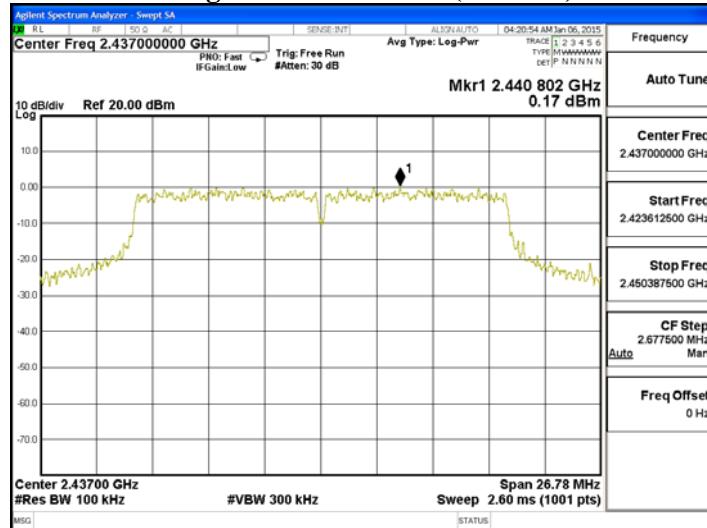

Product : WIFI Module  
 Test Item : Power Density Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 4: Transmit - 802.11n-20BW\_14.4Mbps(2.4G Band) (2462MHz)

CHAIN	PPSD/MHz (dBm)	Total PPSD/MHz (dBm)1	Limit	Result
A	2.950	5.960	< 8dBm	Pass
B	1.190	4.200	< 8dBm	Pass

Note 1: The quantity  $10 \log 2$  (two antennas) is added to the spectrum peak value according to document 662911 D01.

Figure Channel 11: (Chain A)



Figure Channel 11: (Chain B)



Product : WIFI Module  
 Test Item : Power Density Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 5: Transmit - 802.11n-40BW\_30Mbps(2.4G Band) (2422MHz)

CHAIN	PPSD/MHz (dBm)	Total PPSD/MHz (dBm)1	Limit	Result
A	-0.570	2.440	< 8dBm	Pass
B	-1.330	1.680	< 8dBm	Pass

Note 1: The quantity  $10 \times \log 2$  (two antennas) is added to the spectrum peak value according to document 662911 D01.

Figure Channel 3: (Chain A)


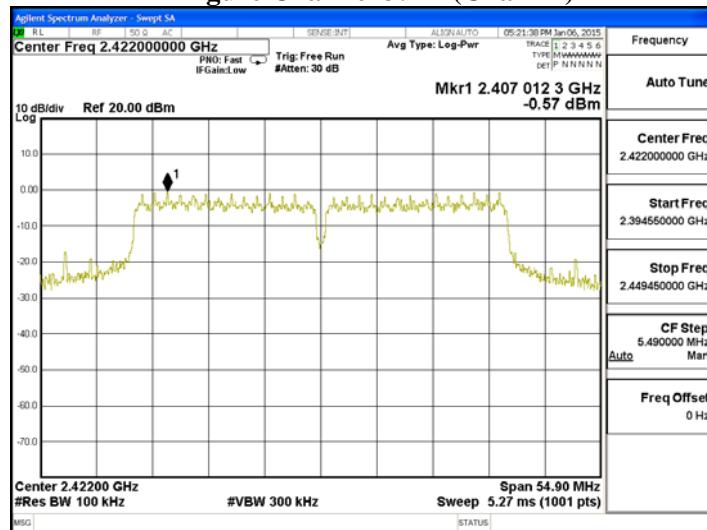


Figure Channel 3: (Chain B)

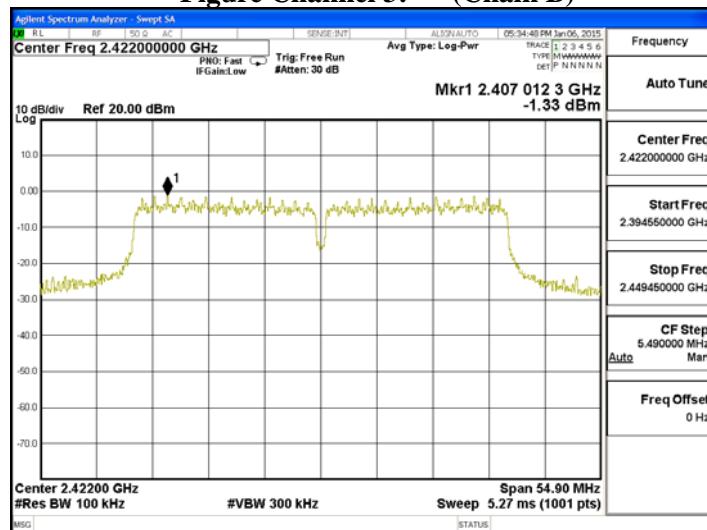

Product : WIFI Module  
 Test Item : Power Density Data  
 Test Site : No.3OATS  
 Test Mode : Mode 5: Transmit - 802.11n-40BW\_30Mbps(2.4G Band) (2437MHz)

CHAIN	PPSD/MHz (dBm)	Total PPSD/MHz (dBm)1	Limit	Result
A	-0.210	2.800	< 8dBm	Pass
B	-1.430	1.580	< 8dBm	Pass

Note 1: The quantity  $10 \log 2$  (two antennas) is added to the spectrum peak value according to document 662911 D01.

Figure Channel 6: (Chain A)

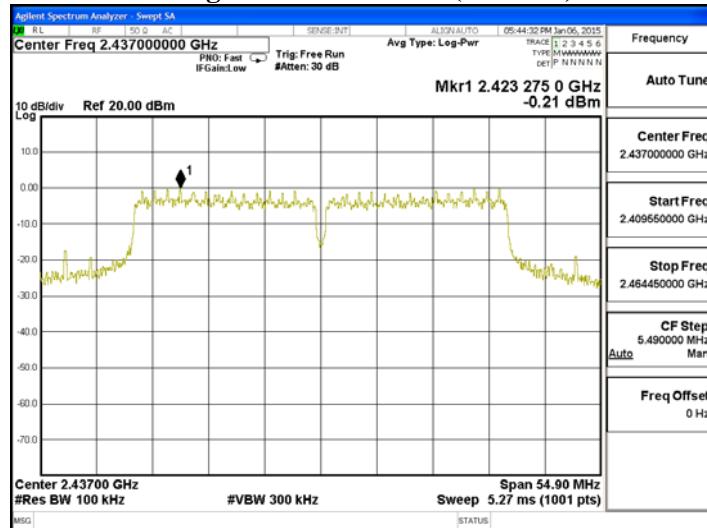


Figure Channel 6: (Chain B)



Product : WIFI Module  
 Test Item : Power Density Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 5: Transmit - 802.11n-40BW\_30Mbps(2.4G Band) (2452MHz)

CHAIN	PPSD/MHz (dBm)	Total PPSD/MHz (dBm)1	Limit	Result
A	-0.040	2.970	< 8dBm	Pass
B	-1.200	1.810	< 8dBm	Pass

Note 1: The quantity  $10 \log 2$  (two antennas) is added to the spectrum peak value according to document 662911 D01.

Figure Channel 9: (Chain A)


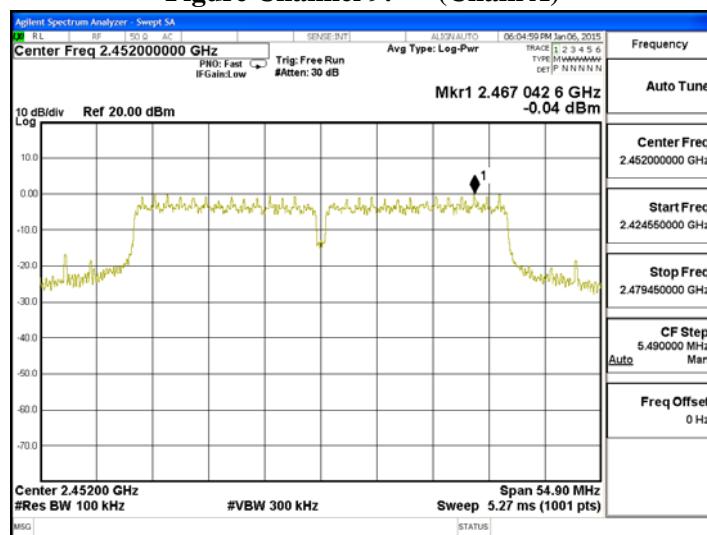


Figure Channel 9: (Chain B)

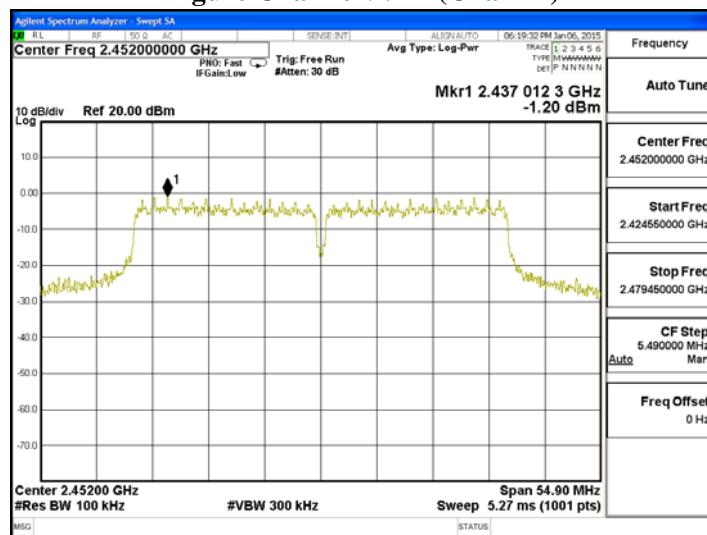

**9. EMI Reduction Method During Compliance Testing**

No modification was made during testing.