



LCIE

Accreditation
N° 1-0312
Scope
available on
www.cofrac.fr



TEST REPORT

N° 76783-565443-Cr 2008-03-17

FCC REGISTRATION NUMBER: 888863
INDUSTRY CANADA NUMBER: 6231A

ISSUED TO : LUTRONIC INTERNATIONAL
1, rue de l'industrie
BP 51
L-4801 RODANGE
LUXEMBOURG

SUBJECT : ELECTROMAGNETIC COMPATIBILITY TESTS ACCORDING TO
THE STANDARD 47 CFR PART 15, SUBPART C, 15.225 and RSS-
GEN, RSS-210, RSS-102

Apparatus under test :
Product : TRANSPONDER READER
Trade mark : NONATEC
Manufacturer : LUTRONIC
Model : HAND HELD *
Reference : NONA06LS05-B
Serial number : 061003X 00002002
FCC ID : VU4HANDV22
IC : 7912A-HANDV22

Test date : September, 2007

Composition of document : 20 pages


* Information given by the customer

Initially released on the January 10th, 2008
Corrected on the March 17th, 2008

Fontenay Aux Roses, March 17th, 2008

The technical manager,

Eric ROUSSEL

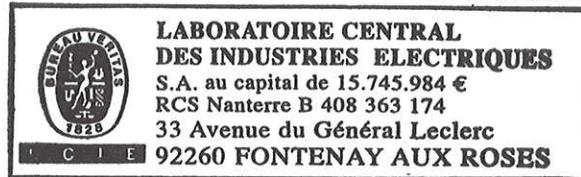

This document shall not be reproduced, except in full, without the written approval of the LCIE. This document contains results related only to the item tested. It does not imply the conformity of the whole production to the items tested. Unless otherwise specified, the decision of conformity takes into account the uncertainty of measures. This document doesn't anticipate any certification decision. The COFRAC accreditation only attests the technical capability of the testing laboratory for the tests covered by the accreditation. Only tests not covered by the COFRAC accreditation are marked with asterisk (*).

LCIE	33, av du Général Leclerc	Tél : +33 1 40 95 60 60	Société par Actions Simplifiée
Laboratoire Central	BP 8	Fax : +33 1 40 95 86 56	au capital de 15 745 984 €
des Industries Electriques	92266 Fontenay-aux-Roses cedex	contact@lcie.fr	RCS Nanterre B 408 363 174
Une société de Bureau Veritas	France	www.lcie.fr	



L C I E

TEST REPORT N° 76783-565443 – Cr 2008-03-17

Page 2

FCC ID : VU4HANDV22
IC : 7912A-HANDV22

TABLE OF CONTENTS

1 – GENERAL

1.1 – <u>Summary of test results</u>	Page 3
1.2 – <u>References</u>	Page 3
1.3 – <u>Equipment under test specification</u>	Page 4

2 – TEST RESULTS

2.1 – <u>Power line conducted emission test</u>	Page 7
2.2 – <u>Field strength within the 13.110-14.010MHz band</u>	Page 10
2.3 – <u>Field strength outside the 13.110-14.010MHz band</u>	Page 15
2.4 – <u>Frequency tolerance over extreme voltage and temperature condition</u>	Page 19

FCC ID : VU4HANDV22
IC : 7912A-HANDV22**1 – GENERAL****1.1 – Summary of test results**

Radiated emissions are made on open area test site located “rue Théo Bonhomme, Moret-Sur-Loing (77, France)”.
A description of the test facility is on file with the FCC.

47 CFR Part 15			
Paragraph No.	Name of test	Remarks	Result
§ 15.207 (a)	Power line conducted limits		YES
§ 15.225 (a) (b) (c)	Field strength within the band 13.110-14.010 MHz		YES
§ 15.209 (d)	Field strength outside of the bands 13.110-14.010 MHz		YES
§ 15.225 (e)	Frequency stability over extreme temperature and voltage conditions		YES

NA : Not Applicable

1.2 – References

Measurements were performed in accordance with the following standards:

47 CFR Part 15 of September 9, 2007 : Code of federal regulations – Telecommunication –Radiofrequency devices

ANSI C63.4 of December 11, 2003 : American national standard for methods of measurement of radio noise emissions from low-voltage electrical and electronic equipment in the range of 9 kHz to 40 GHz.

CISPR 16-4-2 of November, 2003 : International electrotechnical commission - Specification for radio disturbance and immunity measuring apparatus and methods – Uncertainties, statistics and limit modeling – Uncertainty in EMC measurements.

RSS-Gen of June 2007: General Requirements and Information for the Certification of Radiocommunication Equipment

RSS-102 of November 2005: Radio Frequency Exposure Compliance of Radiocommunication Apparatus

RSS-210 of June 2007 - Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment



L C I E

FCC ID : VU4HANDV22
IC : 7912A-HANDV22

1.3 - Equipment under test specification

1.3.1 – General equipment information

Applicant : LUTRONIC
1, rue de l'industrie
BP51-L 4801 RODANGE

Manufacturer : LUTRONIC
1, rue de l'industrie
BP51-L 4801 RODANGE

Frequency band : 13.110-14.010 MHz
Number of channel : 1
Channel spacing : /
User frequency adjustment : NO
User power adjustment : NO
Type of antenna : Integrated
Is the operation point to point? : NO
Power supply : AC/DC power source : trade mark MASCOT and model : 2116

Cables :

Type	EUT port	Long (m)	Shielded	Number of wire
Power	DC	2m	NO	2

This product includes a Bluetooth module referenced BISMS02BI-01 SOIC of trademark EZURIO (FCC Id: PI403B). This module is integrated without any change in the equipment object of this test report.

1.3.2 – Description of modifications

The equipment has not been modified during tests.

1.3.3 – Description of operation

The equipment was configured in the following operation mode:

- Maximum transmission power : Permanently emission (reading and writing a tag)
- The operating mode is performed by using Nonatec PRO software, as described in the user's guide.





L C I E

TEST REPORT N° 76783-565443 – Cr 2008-03-17

Page 5

FCC ID : VU4HANDV22
IC : 7912A-HANDV22

- 1.3.4 – Photograph of the sample

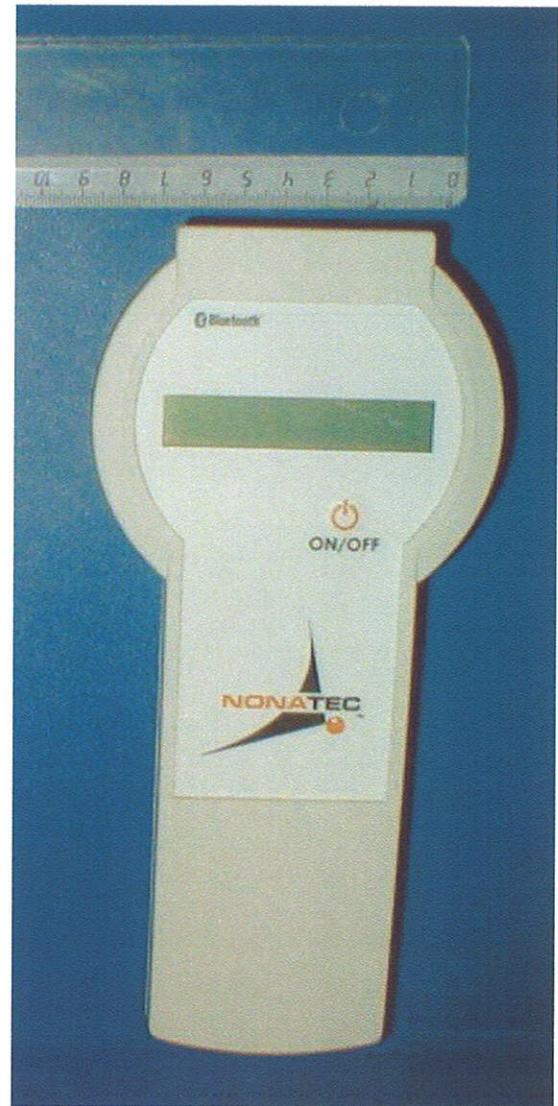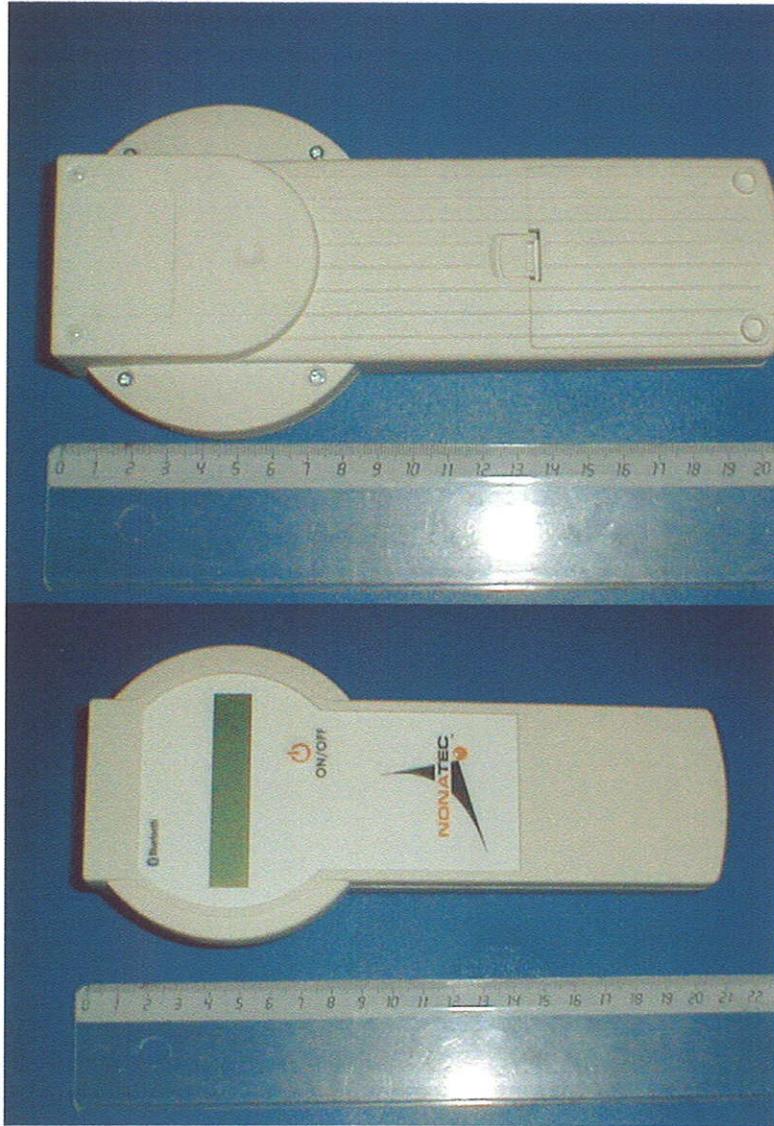





L C I E

TEST REPORT N° 76783-565443 – Cr 2008-03-17

Page 6

FCC ID : VU4HANDV22
IC : 7912A-HANDV22

Charger photos

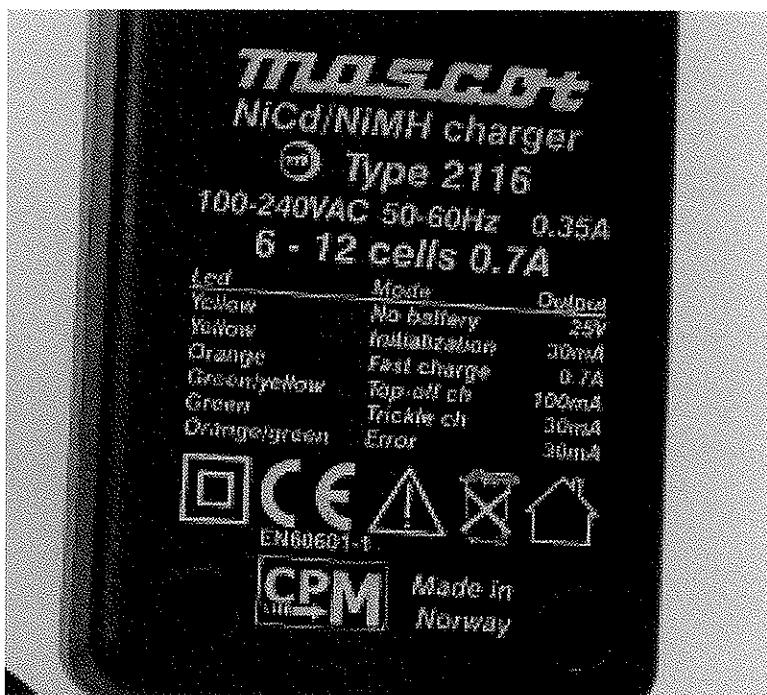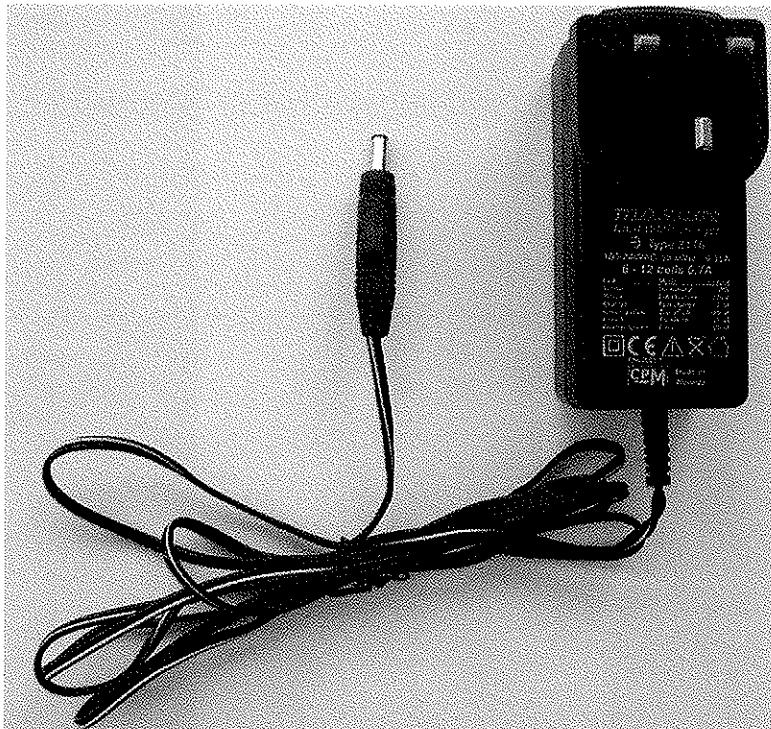

FCC ID : VU4HANDV22
IC : 7912A-HANDV22

2 – TEST RESULTS

2.1 – Power line conducted emission test

2.1.1 - General

The product has been tested with 110 V/60 Hz power line voltage and compared to the FCC part 15 subpart C § 15.207 limits.

The 6dB resolution bandwidth was 9 kHz from 150 kHz to 30 MHz.

2.1.2 – Test setup

The EUT is placed on a table at 0.8 m height. The cable of the power port has been shorted to 1 meter length. The EUT is powered through the LISN.



2.1.3 – Equipment list

Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum analyseur	HEWLETT PACKARD	8566B	A4060004	07/2007	07/2008
Preselector	HEWLETT PACKARD	85685A	A4069001	07/2007	07/2008
Quasi-Peak adaptator	HEWLETT PACKARD	85650A	A4069003	07/2007	07/2008
V ISLN	HEWLETT PACKARD	ESH2-Z5	A4069002	19/03/2007	03/2008



L C I E

TEST REPORT N° 76783-565443 – Cr 2008-03-17

Page 8

FCC ID : VU4HANDV22
IC : 7912A-HANDV22

2.1.4 – Uncertainty

The uncertainty values calculated by the laboratory are lower than limit uncertainty values defined by the CISPR 16-4-2. The conformity of the sample is directly established by the applicable limits values.

Kind of measurement	Wide uncertainty laboratory ($k = 2$) $\pm x$	CISPR uncertainty limit $\pm y$
Measurement of conducted disturbances in voltage on the power port	3.57 dB	3.6 dB

2.1.5 – Test results

Conducted measurement on conductor 2

Frequency (MHz)	Peak measurements (dB μ V)	Q-Peak measurements (dB μ V)	Q-Peak limits (dB μ V)	Average measurements (dB μ V)	Average limits (dB μ V)
0.15	44.5	-	66	44.0	56
0.20	40.1	-	63.6	39.2	53.6
0.29	40.0	-	60.5	39.0	50.5
1.26	37.2	-	56	35.9	46
1.71	37.3	-	56	36.1	46
2.95	38.1	-	56	37.2	46

Conducted measurement on conductor 1

Frequency (MHz)	Peak measurements (dB μ V)	Q-Peak measurements (dB μ V)	Q-Peak limits (dB μ V)	Average measurements (dB μ V)	Average limits (dB μ V)
0.15	44.1	-	66	43.4	56
0.20	40.1	-	63.6	39.4	53.6
0.29	40.2	-	60.5	39.1	50.5
1.26	36.9	-	56	35.7	46
1.71	36.8	-	56	35.8	46
3.68	37.2	-	56	36.6	46

The Q-Peak limits are at least 20 dB above the Peak and Q-Peak measurements.

To demonstrate the compliance at 13.56 MHz, the transmitter antenna was shielded for conducted measurements.




L C I E

TEST REPORT N° 76783-565443 – Cr 2008-03-17

Page 9

FCC ID : VU4HANDV22
IC : 7912A-HANDV22

Power line 1 and 2

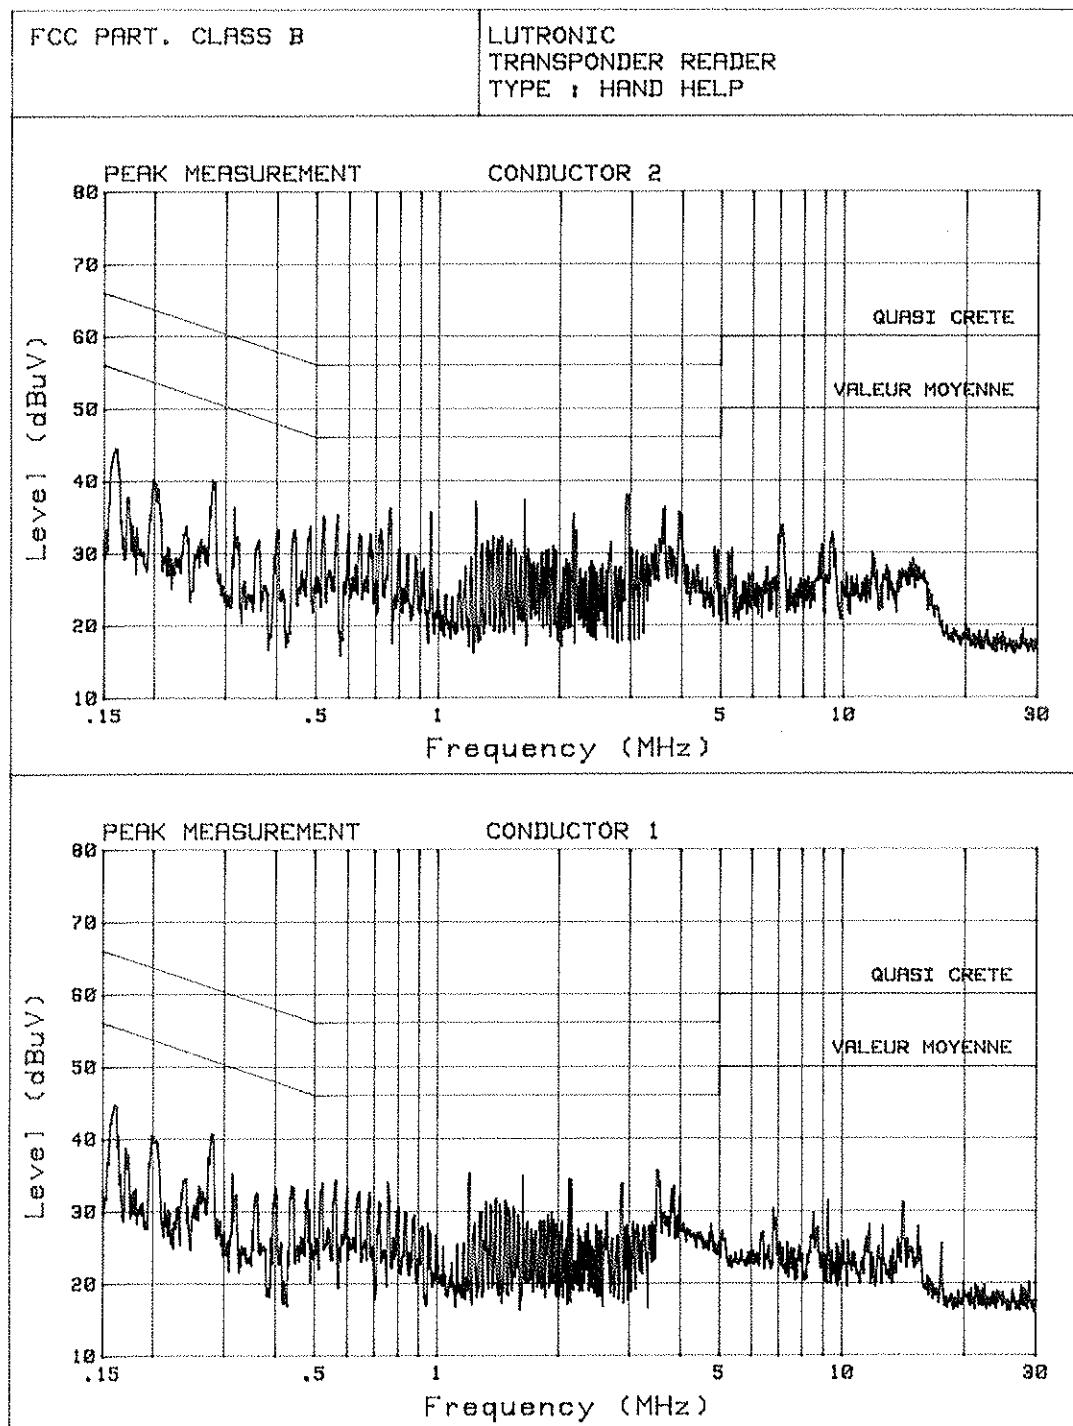



FCC ID : VU4HANDV22
IC : 7912A-HANDV22

2.2 – Field strength within the band 13.110-14.010 MHz

2.2.1 – General

The product has been tested with 110V/60Hz power line voltage and compared to the FCC part 15 subpart C § 15.225 (a) (b) and (c) limits.

The 6 dB resolution bandwidth was :

- 9 kHz from 13.110-14.010 MHz

2.2.2 – Test setup

The EUT is placed at 3m distance of the loop antenna on a table 80cm height. The level has been maximised by turning the EUT with the rotating table and with the antenna at 0° and 90° around its vertical and horizontal axes. Antenna height was 1m.

As hand-held equipment the EUT was tested in 3 orthogonal planes.


The measuring value has been extrapolated to a 30m distance measured level according to § 15.31 (f) (2) by the following formula :

$$E_{30m} = E_d \times \left(\frac{d}{30} \right)^2$$

E_{30m} is the field strength at 30m in $\mu\text{V/m}$

E_d is the field strength at the measured distance in $\mu\text{V/m}$

D is the used distance between antenna and EUT in m

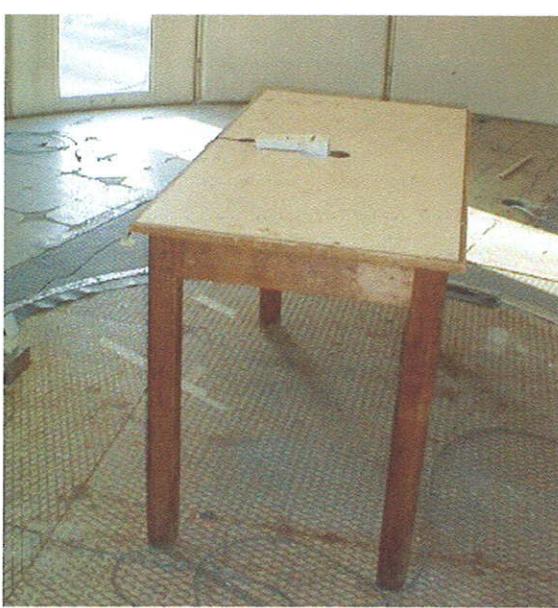



L C I E

TEST REPORT N° 76783-565443 – Cr 2008-03-17

Page 11

FCC ID : VU4HANDV22
IC : 7912A-HANDV22

2.2.3 – Equipment list

Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum analyseur	HEWLETT PACKARD	8566B	A4060004	07/2007	07/2008
Preselector	HEWLETT PACKARD	85685A	A4069001	07/2007	07/2008
Quasi-Peak adaptator	HEWLETT PACKARD	85650A	A4069003	07/2007	07/2008
V ISLN	HEWLETT PACKARD	ESH2-Z5	A4069002	19/03/2007	03/2008
Loop antenna	ROHDE & SHWARZ	HFH H2 Z2	C2040007	14/09/07	09/2008

2.2.4 – Uncertainty

Kind of measurement	Wide uncertainty laboratory (k = 2) ± x	CISPR uncertainty limit ± y
E field measurement	4.75 dB	Not defined

2.2.5 – Test results

The measure result at 3 m is 70.2 dB μ V/m for 13.56 MHz with the antenna orientation vertical at 0°
The 30 m measure corrected is M@3m – 40dB

Frequency MHz	Maximum Quasi Peak (30m) dB μ V/m	Quasi Peak Limit (30m) dB μ V/m
13.56	30.2	84



L C I E

TEST REPORT N° 76783-565443 – Cr 2008-03-17


Page 12

FCC ID : VU4HANDV22
IC : 7912A-HANDV22

2.2.6 – Band-edge compliance

Frequency (MHz)	Field strength (μ V/m)	Measurement distance (m)
13.553-13.567	15848 84 dB μ V/m	30
13.410-13.553	334	30
13.567-13.710	50.5 dB μ V/m	
13.110-13.410	106	30
13.710-14.010	40.5 dB μ V/m	
Outside	30	
13.110-14.010	29.5 dB μ V/m	30

Graph from 11.5 to 15.5 MHz with RBW=10kHz and VBW=30kHz (measurement @ 3m)

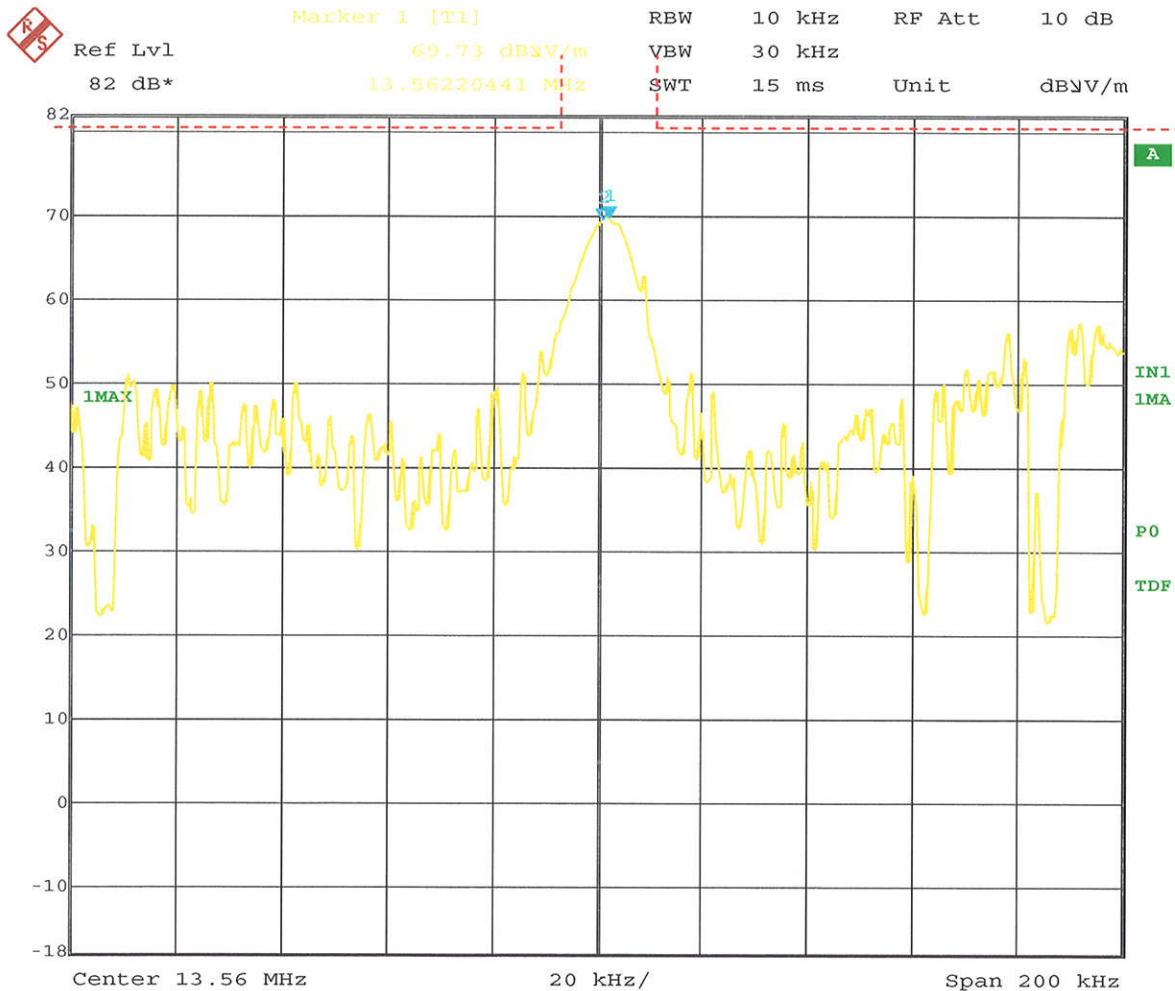

Date: 10.OCT.2008 10:45:20

The 99% occupied bandwidth is 24.0 kHz




L C I E

TEST REPORT N° 76783-565443 – Cr 2008-03-17

Page 13

FCC ID : VU4HANDV22
IC : 7912A-HANDV22

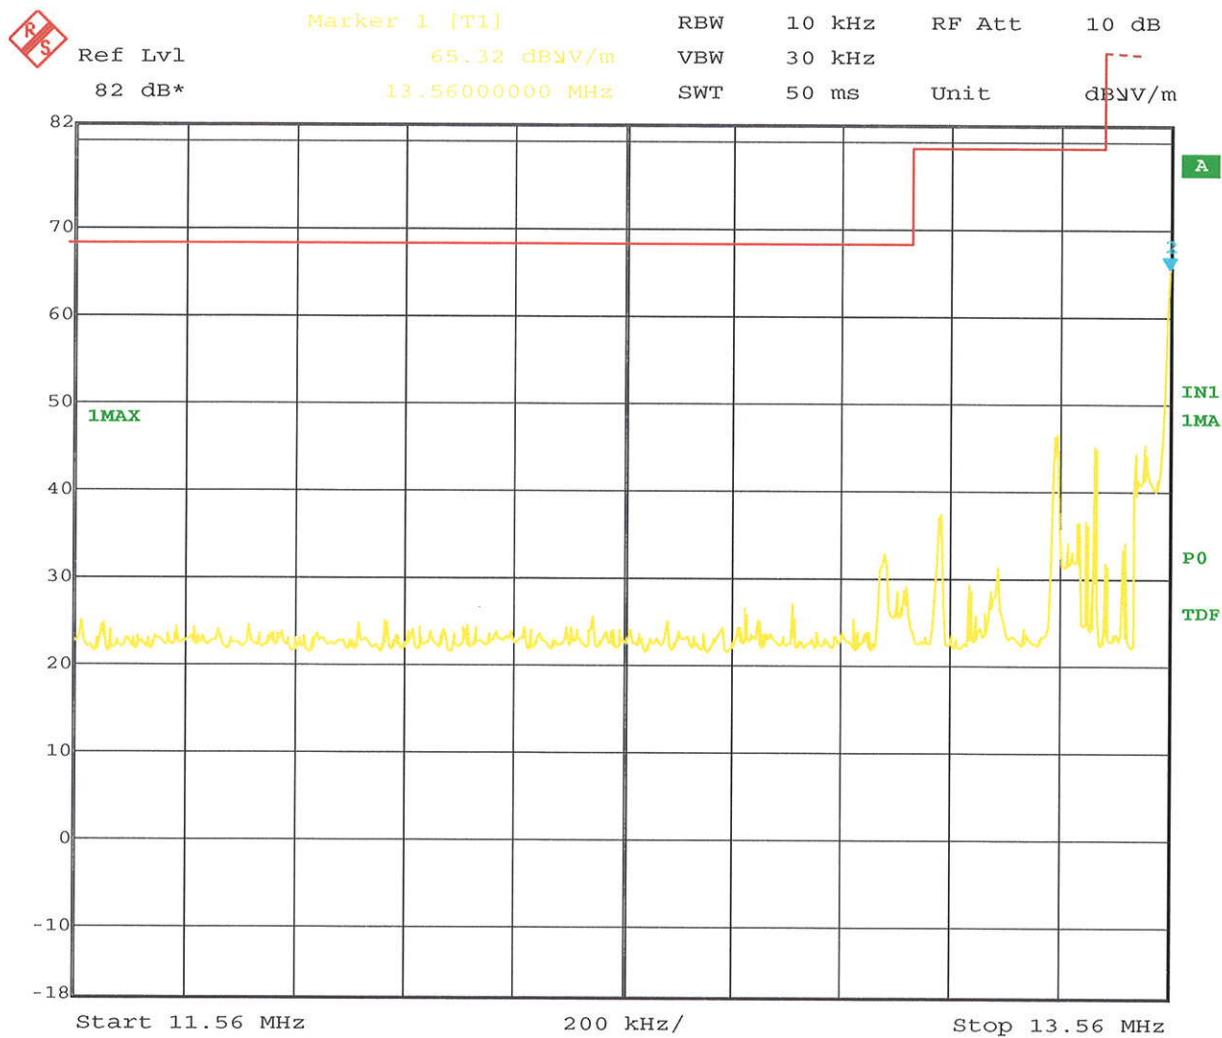

Date: 10.OCT.2008 10:47:07




L C I E

TEST REPORT N° 76783-565443 – Cr 2008-03-17

Page 14

FCC ID : VU4HANDV22
IC : 7912A-HANDV22

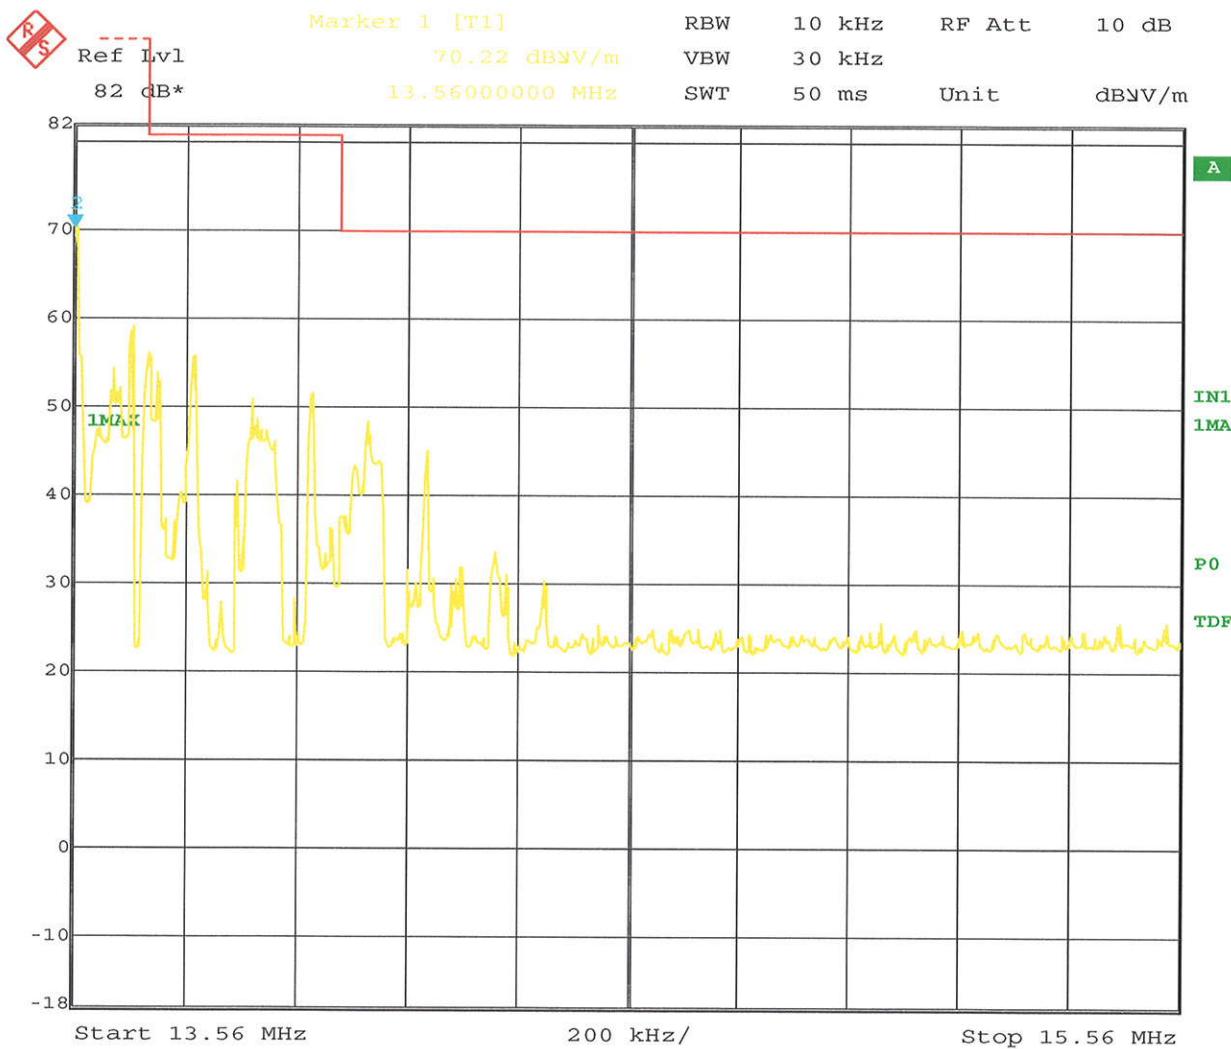



FCC ID : VU4HANDV22
IC : 7912A-HANDV22

2.3 – Field strength outside the 13.110-14.010 MHz band

2.3.1 – General

The product has been tested with 110 V/60 Hz power line voltage and compared to the FCC part 15 subpart C § 15.209 limits.

The 6 dB resolution bandwidth was :

- 200 Hz from 9 kHz to 150 kHz.
- 9 kHz from 150 kHz to 30 MHz.
- 120 kHz from 30 MHz to 1000 MHz.
- 1 MHz from 1 GHz to 18 GHz.

-Frequency range : 9 kHz to 30 MHz

Measuring Distance : **3 m**

Antenna :


- Loop antenna (9 kHz to 30 MHz)

-Frequency range : 30 MHz to 18000 MHz

Measuring Distance : **10 m**

Antenna :

- bilog (30 MHz to 1000 MHz)
- horn (1000 MHz to 18000 MHz)

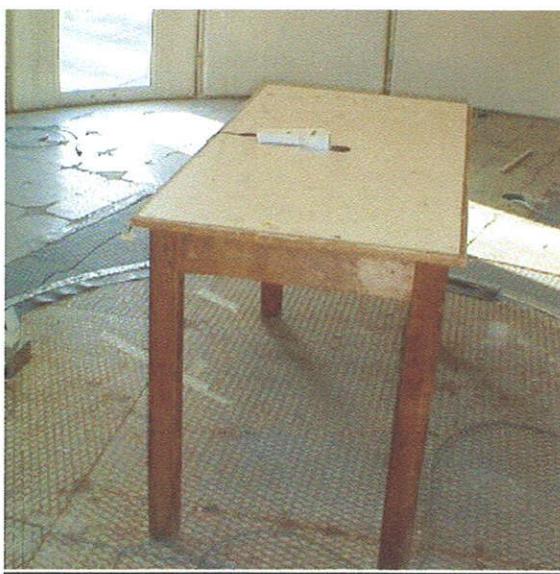

The EUT is placed at 3m distance of the loop antenna (0.009 to 30MHz) on a table 80cm height. The level has been maximised by turning the EUT with the rotating table and with the antenna at 0° and 90° around its vertical and horizontal axes. Antenna height was 1m.

The EUT is placed at 10m distance of the bilog (30 to 1000MHz) or horn (above 1GHz) antenna on a table 80cm height. The level has been maximised by turning the EUT with the rotating table and with the antenna in horizontal and vertical polarity. Antenna height search was performed from 1 to 4m.

As hand-held equipment the EUT was tested in 3 orthogonal planes. Radiated pre-scans were performed on the EUT powered with battery or with AC power supply and the levels were measured in the worst case: AC power supply.



L C I E

TEST REPORT N° 76783-565443 – Cr 2008-03-17

Page 16

FCC ID : VU4HANDV22
IC : 7912A-HANDV22

2.3.2 – Equipment list

Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum analyseur	HEWLETT PACKARD	8566B	A4060004	07/2007	07/2008
Preselector	HEWLETT PACKARD	85685A	A4069001	07/2007	07/2008
Quasi-Peak adaptator	HEWLETT PACKARD	85650A	A4069003	07/2007	07/2008
V ISLN	HEWLETT PACKARD	ESH2-Z5	A4069002	19/03/2007	03/2008
Bilog antenna	CHASE	CBL 6112A	C2040040	06/09/2007	09/2008
Horn antenna	EMCO	3115	C2042016	11/09/07	09/2008
Loop antenna	ROHDE & SHWARZ	HFH H2 Z2	C2040007	13/09/07	09/2008

2.3.3 – Uncertainty

The uncertainty values calculated by the laboratory are lower than limit uncertainty values defined by the CISPR 16-4-2. The conformity of the sample is directly established by the applicable limits values.

Kind of measurement	Wide uncertainty laboratory ($k = 2$) $\pm x$	CISPR uncertainty limit $\pm y$
E field measurement within the band 150 kHz-30 MHz	4.75 dB	Not defined
Measurement of radiated electric field on the open area test site	5.07 dB	5.2 dB



L C I E

TEST REPORT N° 76783-565443 – Cr 2008-03-17

Page 17

FCC ID : VU4HANDV22
IC : 7912A-HANDV22

2.3.4 – Test results

Frequency (MHz)	Level @ 3m (dB μ V/m)	Limit @ 3m (dB μ V/m)
0.010	49	127.6
0.016	53	123.5
0.024	57	120
0.025	50	119.6
0.035	50	116.7
0.039	52	115.8
0.051	46	113.4
0.060	50	112
0.071	56	110.5
0.082	58	109.3
0.097	50	107.9
0.105	41	107.2
0.147	40	104.2
0.193	48	101.9
0.411	49	95.3
0.513	43	73.4
0.531	42	73.1
0.539	46	73
0.756	40	70
0.960	35	67.9
1.040	45	67.2
1.400	40	64.7
1.856	35	69.5
1.970	48	69.5
2.150	30	69.5
2.560	40	69.5
3.900	40	69.5
4.320	37	69.5
4.330	46	69.5
4.48	43	69.5
4.64	38	69.5
5.21	40	69.5
5.49	35	69.5
5.7	48	69.5
6.49	50	69.5
7.10	52	69.5
8.29	30	69.5
8.46	45	69.5
8.70	48	69.5
9.75	46	69.5
11.9	40	69.5
23.4000	56	69.5
27.1221	64	69.5

The highest levels at 23.40 and 27.12MHz are found with the antenna orientation vertical at 0°




L C I E

TEST REPORT N° 76783-565443 – Cr 2008-03-17

Page 18

FCC ID : VU4HANDV22
IC : 7912A-HANDV22

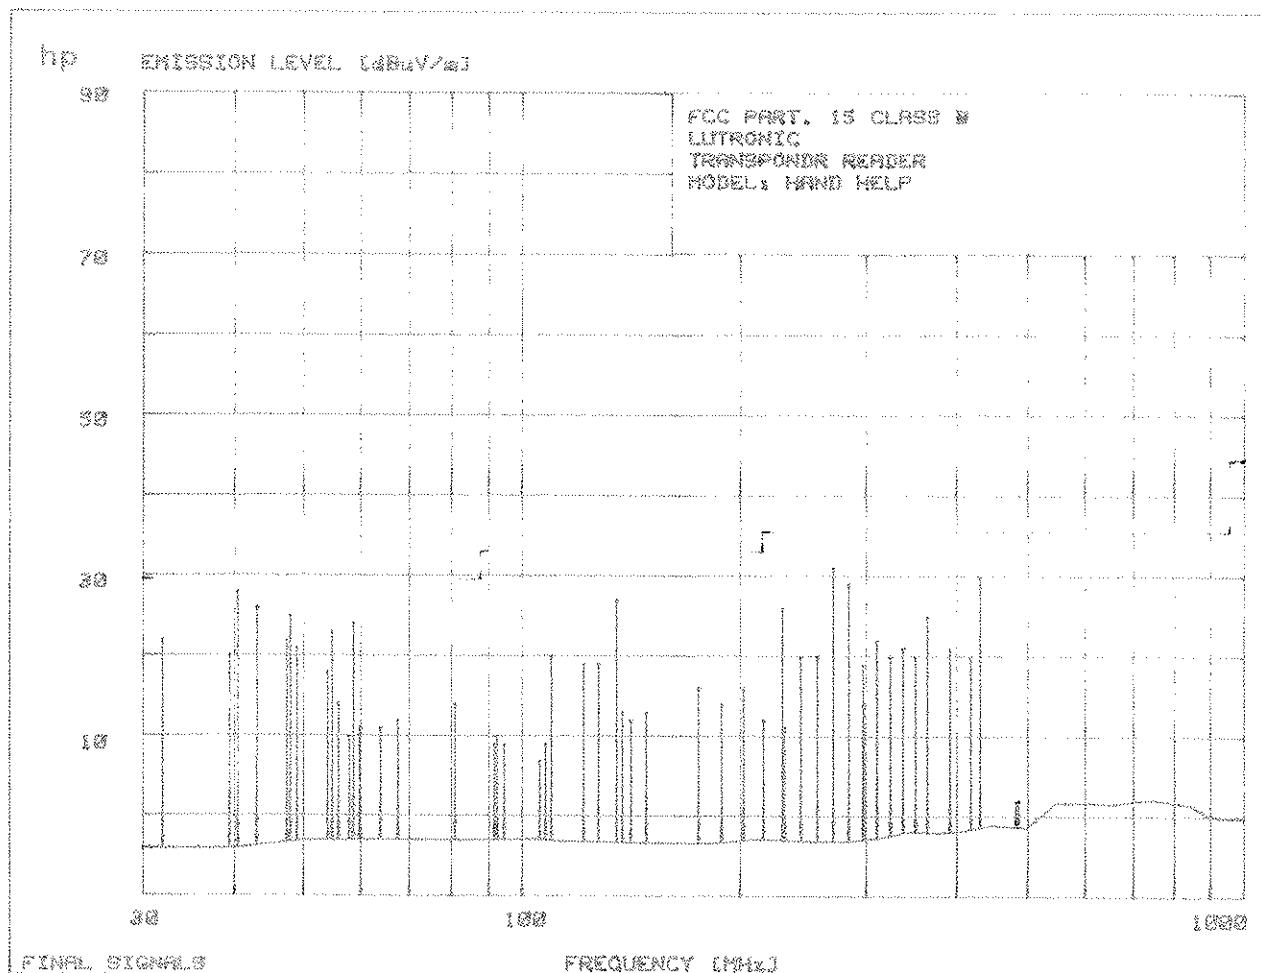

Frequency (MHz)	Quasi-peak measurements @ 10m (dB μ V/m)	Limits @ 10m (dB μ V/m)
40.8	28.3	29.5
42.2	27.5	29.5
47.5	26.1	29.5
135.4	28.1	33.0
272.6	31.9	35.5
433.3	30.0	35.5

No frequency from the equipment higher than 1GHz.

The spurious emissions of the receiver are the same as the transmitter spurious.



L C I E

TEST REPORT N° 76783-565443 – Cr 2008-03-17

Page 19

FCC ID : VU4HANDV22
IC : 7912A-HANDV22

2.4 – Frequency stability over extreme voltage and temperature condition

2.4.1 – General

The product has been tested with DC power supply replacing internal battery or external AC power supply inside a climatic chamber and compared to the FCC part 15 subpart C § 15.225 (e) limits.

2.4.2 – Test setup





L C I E

TEST REPORT N° 76783-565443 – Cr 2008-03-17

Page 20

FCC ID : VU4HANDV22
IC : 7912A-HANDV22

2.4.3 – Equipment list

Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum analyseur	ROHDE & SCHWARZ	ESCI	A2642016	12/2006	12/2007
Voltmeter	KEITHLEY	2000	A1241084	10/2007	10/2008
Climatic chamber	CLIMATS	343H65	D1024024	07/2006	07/2008
DC power supply	Tektronic	PS280	A7042052	Inspected before test	/
Variable transformer	ADB		C1164011	Inspected before test	/

2.4.4 – Uncertainty

The uncertainty values calculated by the laboratory are lower than limit uncertainty values defined by the CISPR 16-4-2. The conformity of the sample is directly established by the applicable limits values.

Kind of measurement	Wide uncertainty laboratory ($k = 2$) $\pm x$
Frequency stability	$\pm 10^{-7}$ of frequency

2.4.5 – Test results

Temperature	Voltage	Frequency	Limits
22 °C	110.0 V AC	13.56051 MHz	Reference 13.55915 MHz – 13.56187 MHz
22 °C	93.5 V AC	13.56051 MHz	
22 °C	126.5 V AC	13.56051 MHz	
22 °C	6.0 V DC	13.56062 MHz	
22 °C	8.3 V DC	13.56062 MHz	
- 20 °C	110.0 V AC	13.56042 MHz	
+ 50 °C	110.0 V AC	13.56051 MHz	
- 20 °C	93.5 V AC	13.56042 MHz	
+ 50 °C	93.5 V AC	13.56051 MHz	
- 20 °C	126.5 V AC	13.56042 MHz	
+ 50 °C	126.5 V AC	13.56051 MHz	

Note : AC voltages are voltage at the input port of the AC/DC converter.

DC voltages are voltage applied instead of the battery, AC/DC converter disconnected.

End of test report