




# FCC Test Report

**Equipment** : Wireless module  
**Brand Name** : PEGATRON  
**Model No.** : UPWL6028F  
**FCC ID** : VUIUPWL6028F  
**Standard** : 47 CFR FCC Part 15.247  
**Frequency Range** : 2400 MHz – 2483.5 MHz  
**Equipment Class** : DTS  
**Applicant** : PEGATRON CORPORATION  
**Manufacturer** : 5F., NO. 76, LIGONG ST., BEITOU DISTRICT,  
TAIPEI CITY 112 Taiwan

The product sample received on Aug. 28, 2012 and completely tested on Oct. 24, 2012. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2009 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:

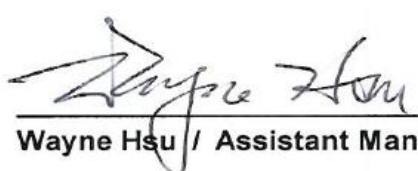  
Wayne Hsu / Assistant Manager





## Table of Contents

<b>1</b>	<b>GENERAL DESCRIPTION .....</b>	<b>5</b>
1.1	Information.....	5
1.2	Support Equipment .....	8
1.3	Testing Applied Standards .....	8
1.4	Testing Location Information .....	8
1.5	Measurement Uncertainty .....	9
<b>2</b>	<b>TEST CONFIGURATION OF EUT .....</b>	<b>10</b>
2.1	The Worst Case Modulation Configuration .....	10
2.2	Test Channel Frequencies Configuration.....	10
2.3	The Worst Case Power Setting Parameter .....	11
2.4	The Worst Case Measurement Configuration .....	12
2.5	Test Setup Diagram .....	14
<b>3</b>	<b>TRANSMITTER TEST RESULT .....</b>	<b>16</b>
3.1	AC Power-line Conducted Emissions .....	16
3.2	6dB Bandwidth.....	19
3.3	RF Output Power .....	23
3.4	Power Spectral Density.....	30
3.5	Transmitter Radiated Bandedge Emissions .....	34
3.6	Transmitter Radiated Unwanted Emissions .....	43
<b>4</b>	<b>TEST EQUIPMENT AND CALIBRATION DATA.....</b>	<b>84</b>
<b>5</b>	<b>CERTIFICATION OF TAF ACCREDITATION.....</b>	<b>86</b>
<b>APPENDIX A. TEST PHOTOS .....</b>		<b>A7</b>
<b>APPENDIX B. PHOTOGRAPHS OF EUT.....</b>		<b>B18</b>



## Summary of Test Result

Conformance Test Specifications					
Report Clause	Ref. Std. Clause	Description	Measured	Limit	Result
1.1.2	15.203	Antenna Requirement	Antenna connector mechanism complied	FCC 15.203	Complied
3.1	15.207	AC Power-line Conducted Emissions	[dBuV]: 16.75MHz 37.40 (Margin 12.60dB) - AV 43.15 (Margin 16.85dB) - QP	FCC 15.207	Complied
3.2	15.247(a)	6dB Bandwidth	6dB Bandwidth Unit [MHz] 11B-20M: 8.20 11G-20M: 15.78 11N2.4G-20M: 17.61 11N2.4G-40M: 36.64	≥500kHz	Complied
3.3	15.247(b)	RF Output Power (Maximum Peak Conducted Output Power)	Power [dBm] 11B-20M: 21.19 11G-20M: 25.01 11N2.4G-20M: 28.99 11N2.4G-40M: 29.86	Power [dBm]:30	Complied
3.4	15.247(d)	Power Spectral Density	PSD [dBm/3kHz] 11B-20M: -6.15 11G-20M: -9.85 11N2.4G-20M: -11.33 11N2.4G-40M: -12.49	PSD [dBm/3kHz]:8	Complied
3.5	15.247(c)	Transmitter Radiated Bandedge Emissions	Non-Restricted Bands: 2400MHz: 29.63dB Restricted Bands [dBuV/m at 3m]: 2487.10MHz 66.34 (Margin 7.66dB) - PK 53.00 (Margin 1.00dB) - AV	Non-Restricted Bands: > 20 dBc Restricted Bands: FCC 15.209	Complied
3.6	15.247(c)	Transmitter Radiated Unwanted Emissions	Restricted Bands [dBuV/m at 3m]: 4874MHz 64.26 (Margin 9.74dB) - PK 52.81 (Margin 1.19dB) - AV	Non-Restricted Bands: > 20 dBc Restricted Bands: FCC 15.209	Complied



## Revision History



## 1 General Description

### 1.1 Information

#### 1.1.1 RF General Information

RF General Information						
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N <sub>TX</sub> )	RF Output Power (dBm)	Co-location
2400-2483.5	b	2412-2462	1-11 [11]	1	21.19	N/A
2400-2483.5	g	2412-2462	1-11 [11]	1	25.01	N/A
2400-2483.5	n (HT20)	2412-2462	1-11 [11]	1	24.75	N/A
2400-2483.5	n (HT40)	2422-2452	3-9 [7]	1	25.96	N/A
2400-2483.5	n (HT20)	2412-2462	1-11 [11]	2	28.99	N/A
2400-2483.5	n (HT40)	2422-2452	3-9 [7]	2	29.83	N/A

Note 1: RF output power specifies that Maximum Peak Conducted Output Power.  
Note 2: 802.11b uses a combination of DSSS-DBPSK, DQPSK, CCK modulation.  
Note 3: 802.11g/n uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.  
Note 4: Co-location, Co-location is generally defined as simultaneously transmitting (co-transmitting) antennas within 20 cm of each other. (i.e., EUT has simultaneously co-transmitting that operating 2.4GHz and 5GHz.)



## 1.1.2 Antenna Information

Antenna Category	
<input checked="" type="checkbox"/>	Integral antenna (antenna permanently attached)
<input checked="" type="checkbox"/>	Temporary RF connector provided
<input type="checkbox"/>	No temporary RF connector provided Transmit chains bypass antenna and soldered temporary RF connector provided for connected measurement. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator and correct for all losses in the RF path.

Antenna General Information						
No.	Ant. Cat.	Ant. Type	Brand	Part No.	Gain (dBi)	
					2.4G	5G
1	Integral	PCB	Wanshih	UC3WFI0063	2.04	4.62
2	Integral	PCB	Wanshih	UC3WFI0064	3.90	4.48
3	Integral	PCB	Wanshih	UC3WFI0072	2.04	6.21
4	Integral	PCB	Wanshih	UC3WFI0073	5.72	4.93
5	Integral	PCB	Wanshih	UC3WFI0080	4.72	-
6	Integral	PCB	Wanshih	UC3WFI0081	5.65	-
7	Integral	PCB	Wanshih	UC3WFI0082	-	5.16
8	Integral	PCB	Wanshih	UC3WFI0083	-	6.36
9	Integral	PCB	Hong-lin	260-23396	2.32	3.91
10	Integral	PCB	Hong-lin	260-23397	4.64	4.53
11	Integral	PCB	Hong-lin	260-23042	4.36	6.22
12	Integral	PCB	Hong-lin	260-23403	4.40	6.00
13	Integral	PCB	Hong-lin	260-23432	2.58	-
14	Integral	PCB	Hong-lin	260-23434	4.36	-
15	Integral	PCB	Hong-lin	260-23433	-	5.60
16	Integral	PCB	Hong-lin	260-23435	-	6.22
17	Integral	PCB	Airgain	N2420DS (10cm)	3.10	-
18	Integral	PCB	Airgain	N2420DS (27cm)	3.10	-
19	Integral	PCB	Airgain	N2420 (10cm)	3.30	-
20	Integral	PCB	Airgain	N2420 (40cm)	3.30	-
21	Integral	PCB	Airgain	N5x20SC (15cm)	-	1.90
22	Integral	PCB	Airgain	N5x20SC (19cm)	-	1.90
23	Integral	PCB	Airgain	N5x20SC (23cm)	-	1.90
24	Integral	PCB	Airgain	N5x20SC (27cm)	-	1.90

EUT is consist of multiple antenna models assembly (multiple antenna models are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type. Then Ant. No. 4 shall be performed the radiated test.



### 1.1.3 Type of EUT

Identify EUT	
EUT Serial Number	N/A
Presentation of Equipment	<input type="checkbox"/> Production ; <input checked="" type="checkbox"/> Pre-Production ; <input type="checkbox"/> Prototype
Type of EUT	
<input checked="" type="checkbox"/> Stand-alone	
<input type="checkbox"/> Combined (EUT where the radio part is fully integrated within another device) Combined Equipment - Brand Name / Model No.: ...	
<input type="checkbox"/> Plug-in radio (EUT intended for a variety of host systems) Host System - Brand Name / Model No.: ...	
<input type="checkbox"/> Other:	

### 1.1.4 Test Signal Duty Cycle

Operated Mode for Worst Duty Cycle		
<input type="checkbox"/> Operated normally mode for worst duty cycle		
<input checked="" type="checkbox"/> Operated test mode for worst duty cycle		
Test Signal Duty Cycle (x)	Power Duty Factor [dB] – (10 log 1/x)	Voltage Duty Factor [dB] – (20 log 1/x)
<input checked="" type="checkbox"/> 93.55% - IEEE 802.11b	0.29	0.58
<input checked="" type="checkbox"/> 68.07% - IEEE 802.11g	1.67	3.34
<input checked="" type="checkbox"/> 67.16% - IEEE 802.11n (HT20)	1.73	3.46
<input checked="" type="checkbox"/> 65.45% - IEEE 802.11n (HT40)	1.84	3.68

Note 1: Average Output Power Plots w/o Duty Factor

### 1.1.5 EUT Operational Condition

Supply Voltage	<input type="checkbox"/> AC mains	<input checked="" type="checkbox"/> DC	
Type of DC Source	<input type="checkbox"/> Internal DC supply	<input checked="" type="checkbox"/> Host	<input type="checkbox"/> Battery



## 1.2 Support Equipment

Support Equipment - Conducted Emissions				
No.	Equipment	Brand Name	Model Name	Serial No.
1	Notebook	DELL	XPS M1330	DoC
2	iPod	Apple	A1199	N/A
3	(USB) Mouse	Microsoft	1113	N/A
4	Wireless AP (Remote Workstation)	ASUS	RT-AC66U	DoC

Support Equipment - Radiated Emissions				
No.	Equipment	Brand Name	Model Name	Serial No.
1	Notebook	DELL	E5500	DoC
2	(USB) Mouse	Microsoft	1113	DoC
3	iPod	APPLE	A1199	DoC
4	Wireless AP (Remote Workstation)	ASUS	RT-AC66U	DoC

## 1.3 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR FCC Part 15
- ANSI C63.10-2009
- FCC KDB 558074
- FCC KDB 662911
- FCC KDB 412172

## 1.4 Testing Location Information

Testing Location				
<input checked="" type="checkbox"/>	HWA YA	ADD :	No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.	
		TEL :	886-3-327-3456	FAX : 886-3-327-0973
Test Condition		Test Site No.	Test Engineer	Test Environment
RF Conducted		TH01-HY	Ian	25.9°C / 60%
AC Conduction		CO04-HY	Bill	25.2°C / 49.3%
Radiated Emission		03CH03-HY	Daniel	25.6°C / 58%
				20-Sep-12 ~ 24-Oct-12



## 1.5 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Measurement Uncertainty		
Test Item	Uncertainty	Limit
AC power-line conducted emissions	±2.26 dB	N/A
Emission bandwidth, 6dB bandwidth	±1.42 %	N/A
RF output power, conducted	±0.63 dB	N/A
Power density, conducted	±0.81 dB	N/A
Unwanted emissions, conducted	30 – 1000 MHz	±0.51 dB
	1 – 18 GHz	±0.67 dB
	18 – 40 GHz	±0.83 dB
	40 – 200 GHz	N/A
All emissions, radiated	30 – 1000 MHz	±2.56 dB
	1 – 18 GHz	±3.59 dB
	18 – 40 GHz	±3.82 dB
	40 – 200 GHz	N/A
Temperature	±0.8 °C	N/A
Humidity	±3 %	N/A
DC and low frequency voltages	±3 %	N/A
Time	±1.42 %	N/A
Duty Cycle	±1.42 %	N/A



## 2 Test Configuration of EUT

### 2.1 The Worst Case Modulation Configuration

Worst Modulation Used for Conformance Testing					
IEEE Std. 802.11	Transmit Chains ( $N_{TX}$ )	Data Rate / MCS	Worst Data Rate / MCS	Modulation Mode	RF Output Power (dBm)
b	1	1-11 Mbps	1 Mbps	11B-20M	21.19
g	1	6-54 Mbps	6 Mbps	11G-20M	25.01
n (HT20)	1	MCS 0-7	MCS 0	11N2.4G-20M	24.75
n (HT40)	1	MCS 0-7	MCS 0	11N2.4G-40M	25.96
n (HT20)	2	MCS 7-15	MCS 8	11N2.4G-20M	28.99
n (HT40)	2	MCS 7-15	MCS 8	11N2.4G-40M	29.83

Note 1: IEEE Std. 802.11n-2009 modulation consists of HT20 and HT40 (HT: High Throughput). Then EUT support HT20 and HT40. Worst modulation mode of Guard Interval (GI) is 800ns.

Note 2: Modulation modes consist below configuration::  
11B: IEEE 802.11b, 11G: IEEE 802.11g, 11N: IEEE 802.11n  
2.4G: 2.4-2.4835GHz band  
20M/40M: Channel Bandwidth 20MHz/40MHz

Note 3: RF output power specifies that Maximum Peak Conducted Output Power.

### 2.2 Test Channel Frequencies Configuration

Test Channel Frequencies Configuration	
IEEE Std. 802.11	Test Channel Frequencies (MHz) – FX (Frequencies Abbreviations)
b, g, n (HT20)	2412-(F1), 2437-(F2), 2462-(F3)
n (HT40)	2422-(F4), 2437-(F5), 2452-(F6)



## 2.3 The Worst Case Power Setting Parameter

The Worst Case Power Setting Parameter					
Test Software Version		DOS			
Modulation Mode	Transmit Chains ( $N_{TX}$ )	Frequency (MHz)	Power Setting	Data Rate / MCS	RF Output Power (dBm)
11B-20M	1	2412	73	1 Mbps	21.19
11B-20M	1	2437	73	1 Mbps	21.01
11B-20M	1	2462	70	1 Mbps	18.45
11G-20M	1	2412	38	6 Mbps	16.04
11G-20M	1	2437	74	6 Mbps	25.01
11G-20M	1	2462	33	6 Mbps	14.10
11N2.4G-20M	1	2412	42	MCS 0	17.25
11N2.4G-20M	1	2437	71	MCS 0	24.75
11N2.4G-20M	1	2462	38	MCS 0	15.86
11N2.4G-40M	1	2422	40	MCS 0	16.35
11N2.4G-40M	1	2437	75	MCS 0	25.96
11N2.4G-40M	1	2452	37	MCS 0	15.22
11N2.4G-20M	2	2412	39	MCS 8	21.13
11N2.4G-20M	2	2437	70	MCS 8	28.99
11N2.4G-20M	2	2462	34	MCS 8	19.54
11N2.4G-40M	2	2422	38	MCS 8	22.45
11N2.4G-40M	2	2437	70	MCS 8	29.83
11N2.4G-40M	2	2452	40	MCS 8	22.56

Note 1: RF output power specifies that Maximum Peak Conducted Output Power.



## 2.4 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
<b>Tests Item</b>	AC power-line conducted emissions
<b>Condition</b>	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
<b>Operating Mode</b>	Operating Mode Description
1	Radio link (2.4G-WLAN)


The Worst Case Mode for Following Conformance Tests			
Tests Item	RF Output Power, Power Spectral Density, 6 dB Bandwidth		
Test Condition	Conducted measurement at transmit chains		
Modulation Mode	Transmit Chains ( $N_{TX}$ )	Data Rate / MCS	Test Frequency
11B-20M	1	1 Mbps	F1, F2, F3
11G-20M	1	6 Mbps	F1, F2, F3
11N2.4G-20M	1	MCS 0	F1, F2, F3
11N2.4G-40M	1	MCS 0	F4, F5, F6
11N2.4G-20M	2	MCS 8	F1, F2, F3
11N2.4G-40M	2	MCS 8	F4, F5, F6

The Worst Case Mode for Following Conformance Tests			
Tests Item	Transmitter Radiated Bandedge Emissions		
Test Condition	Radiated measurement		
Modulation Mode	Transmit Chains ( $N_{TX}$ )	Data Rate / MCS	Test Frequency
11B-20M	1	1 Mbps	F1, F3
11G-20M	1	6 Mbps	F1, F3
11N2.4G-20M	1	MCS 0	F1, F3
11N2.4G-40M	1	MCS 0	F4, F6
11N2.4G-20M	2	MCS 8	F1, F3
11N2.4G-40M	2	MCS 8	F4, F6




The Worst Case Mode for Following Conformance Tests		
<b>Tests Item</b>	Transmitter Radiated Unwanted Emissions	
<b>Test Condition</b>	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.	
<b>User Position</b>	<input checked="" type="checkbox"/> EUT will be placed in fixed position.	
	<input type="checkbox"/> EUT will be placed in mobile position and operating multiple positions. EUT shall be performed two or three orthogonal planes.	
	<input type="checkbox"/> EUT will be a hand-held or body-worn battery-powered devices and operating multiple positions. EUT shall be performed two or three orthogonal planes.	
<b>Operating Mode &lt; 1GHz</b>	<input checked="" type="checkbox"/> 1. Radio link (2.4G-WLAN)	
<b>Modulation Mode</b>	<b>Data Rate / MCS</b>	<b>Test Frequency</b>
11B-20M	1 Mbps	F1, F2, F3
11G-20M	6 Mbps	F1, F2, F3
11N2.4G-20M	MCS 0	F1, F2, F3
11N2.4G-40M	MCS 0	F4, F5, F6
11N2.4G-20M	MCS 8	F1, F2, F3
11N2.4G-40M	MCS 8	F4, F5, F6

## 2.5 Test Setup Diagram

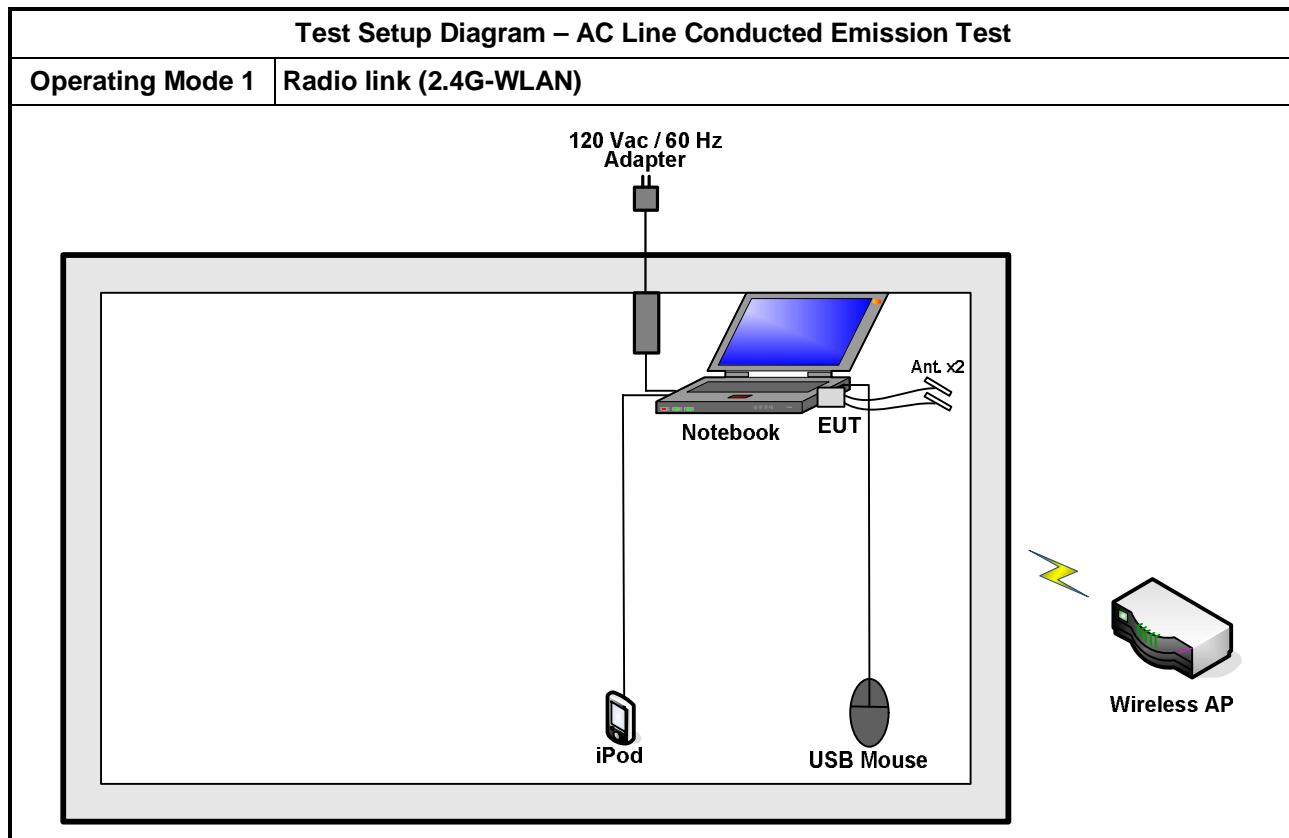


## Test Setup Diagram - Radiated Test (Below 1GHz)

Operating Mode | Radio link (2.4G-WLAN)

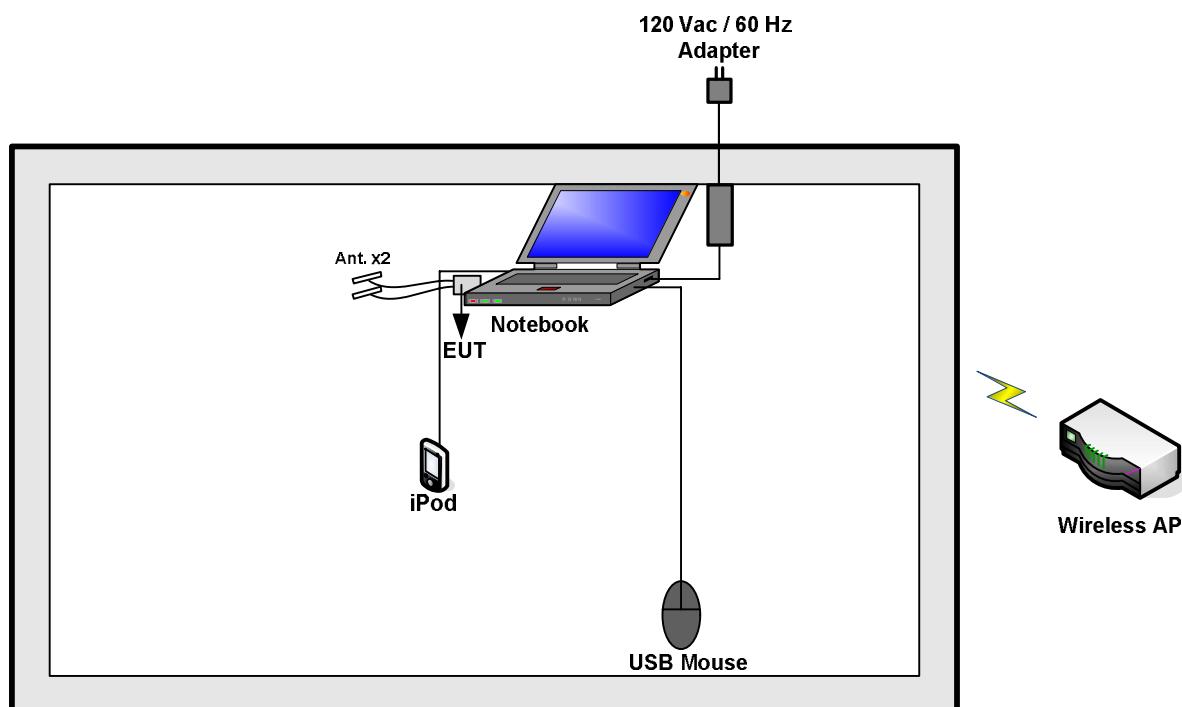

## Test Setup Diagram - Radiated Test (Above 1GHz)

Operating Mode | Transmission Mode

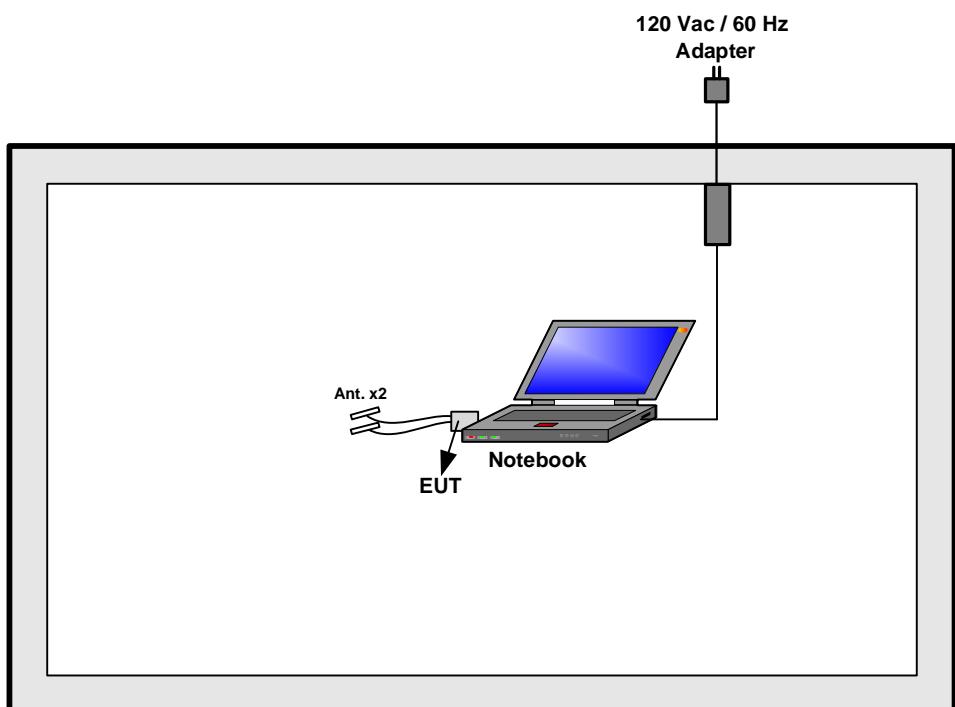

### 3 Transmitter Test Result

#### 3.1 AC Power-line Conducted Emissions

##### 3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: \* Decreases with the logarithm of the frequency.


##### 3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

##### 3.1.3 Test Procedures


Test Method
<input checked="" type="checkbox"/> Refer as ANSI C63.10-2009, clause 6.2 for AC power-line conducted emissions.


##### 3.1.4 Test Setup

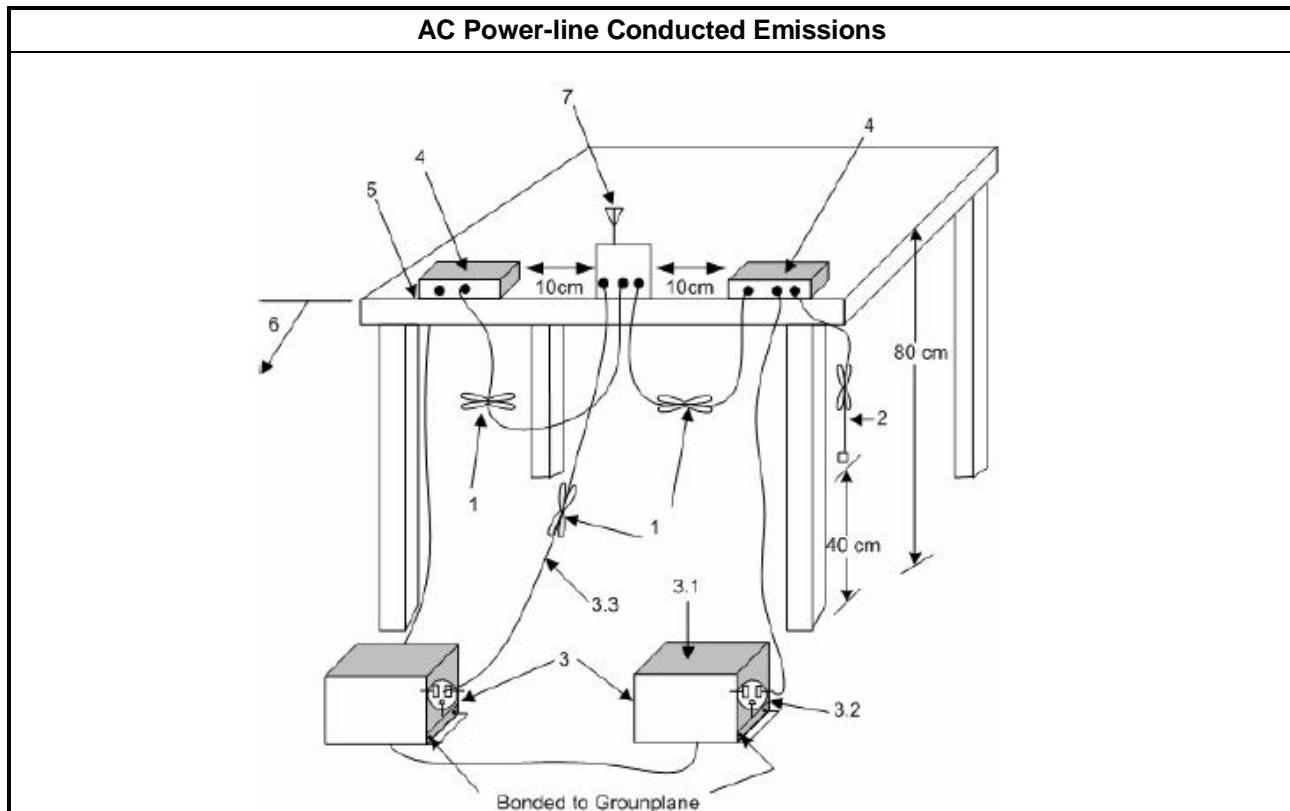



## 3.1.5 Test Result of AC Power-line Conducted Emissions

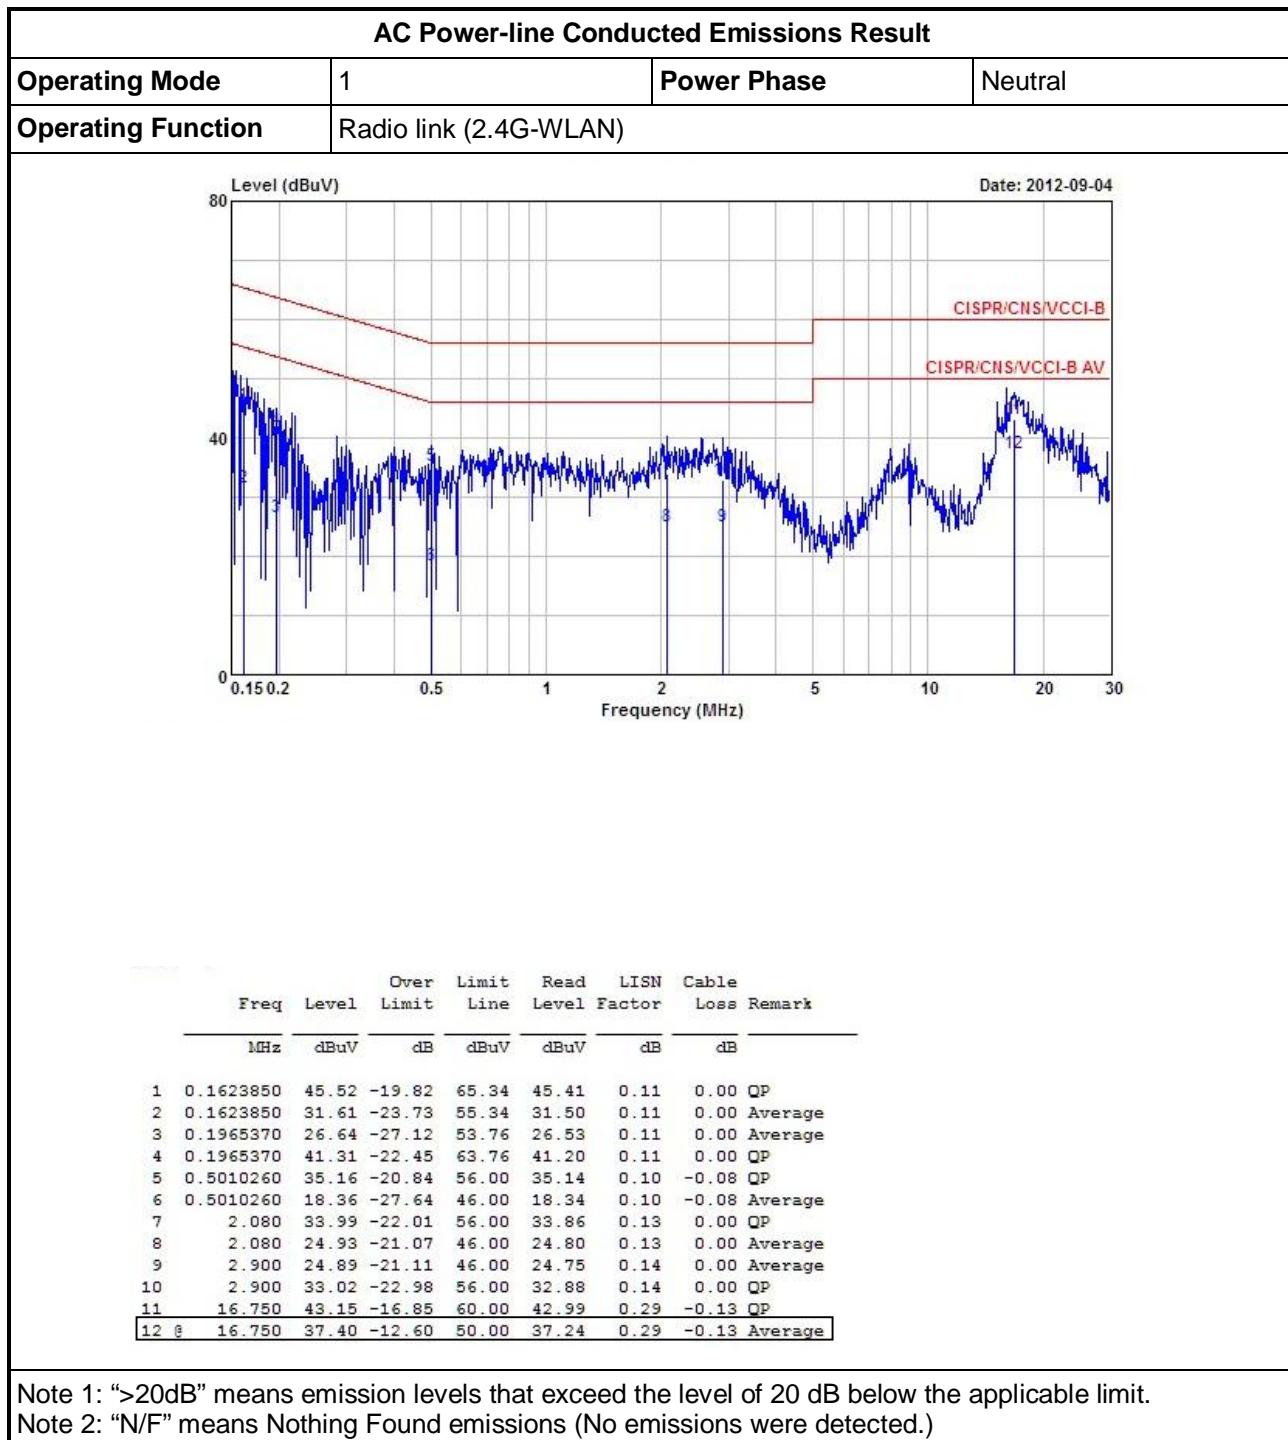

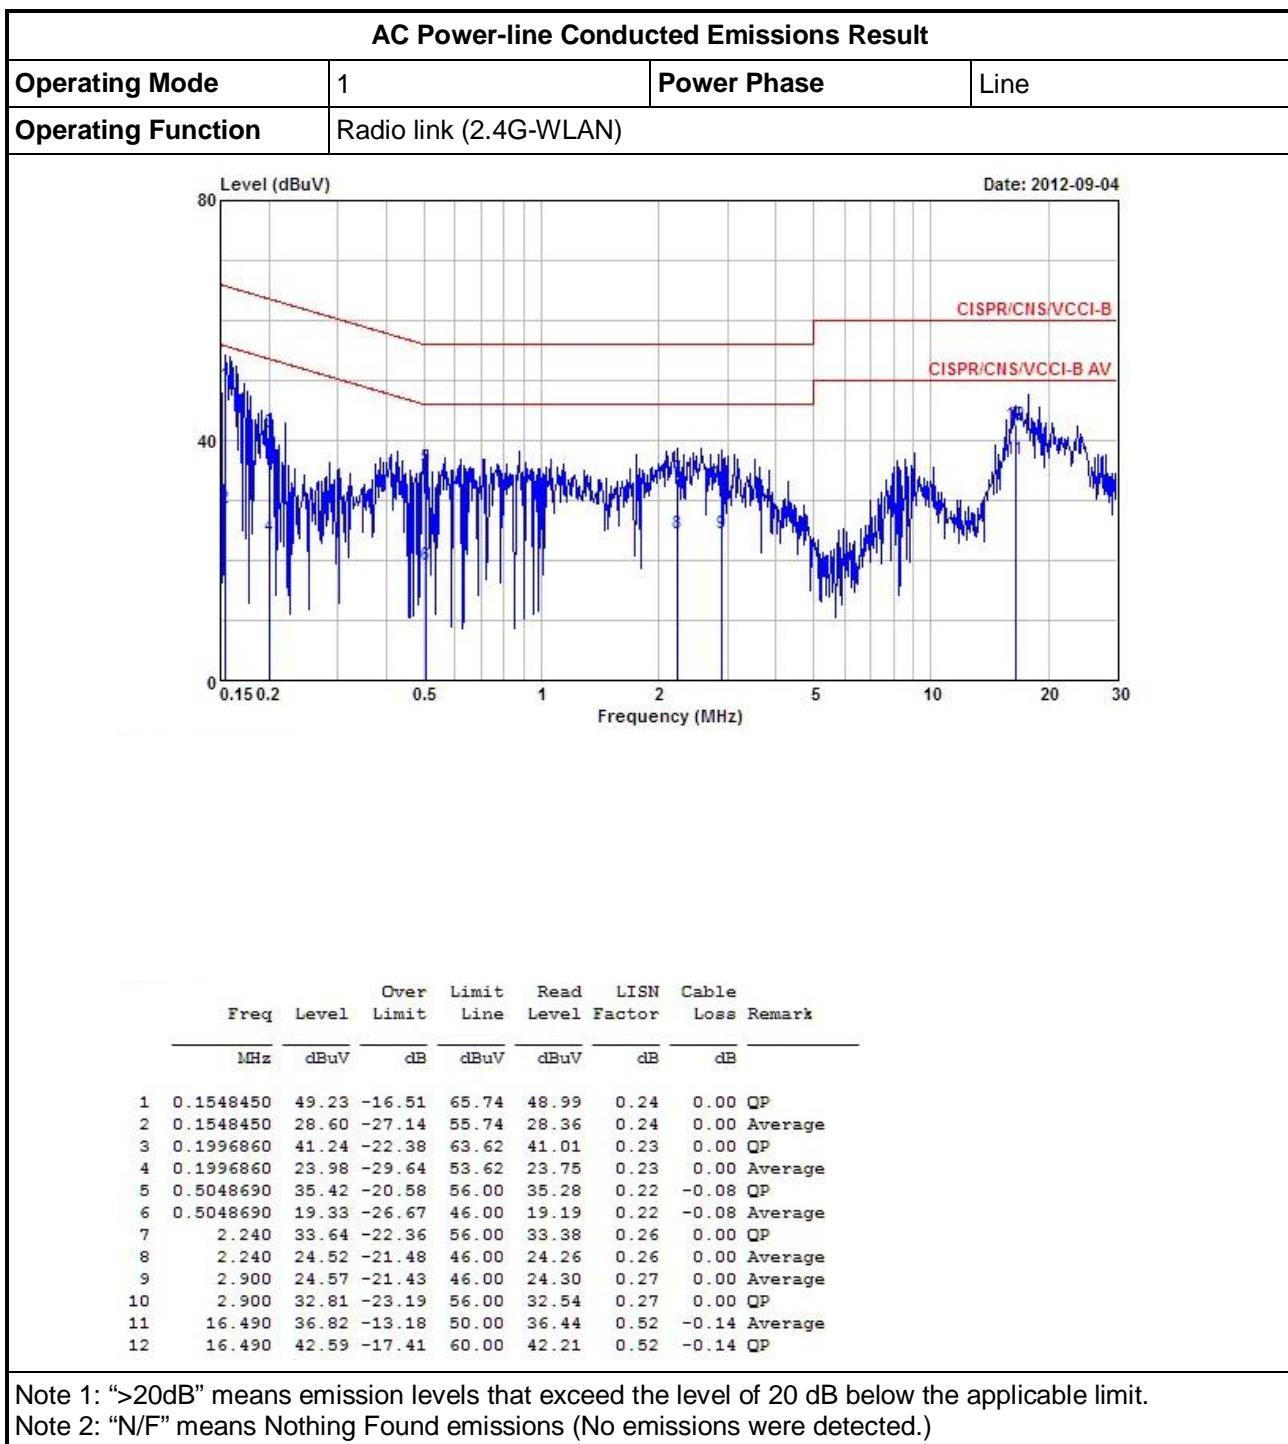

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)



## 3.2 6dB Bandwidth

### 3.2.1 6dB Bandwidth Limit

6dB Bandwidth Limit
<b>Systems using digital modulation techniques:</b>
<input checked="" type="checkbox"/> 6 dB bandwidth $\geq$ 500 kHz.


### 3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

### 3.2.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> For the emission bandwidth shall be measured using one of the options below:
<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 5.1.1 Option 1 for 6 dB bandwidth measurement.
<input type="checkbox"/> Refer as FCC KDB 558074, clause 5.1.2 Option 2 for 6 dB bandwidth measurement.
<input type="checkbox"/> Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.
<input checked="" type="checkbox"/> For conducted measurement.
<input checked="" type="checkbox"/> The EUT supports single transmit chain and measurements performed on this transmit chain.
<input checked="" type="checkbox"/> The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
<input checked="" type="checkbox"/> The EUT supports multiple transmit chains using options given below:
<input type="checkbox"/> Option 1: Multiple transmit chains measurements need to be performed on one of the active transmit chains (antenna outputs). All measurement had be performed on transmit chains 1.
<input checked="" type="checkbox"/> Option 2: Multiple transmit chains measurements need to be performed on each transmit chains individually (antenna outputs). All measurement had be performed on all transmit chains.

### 3.2.4 Test Setup

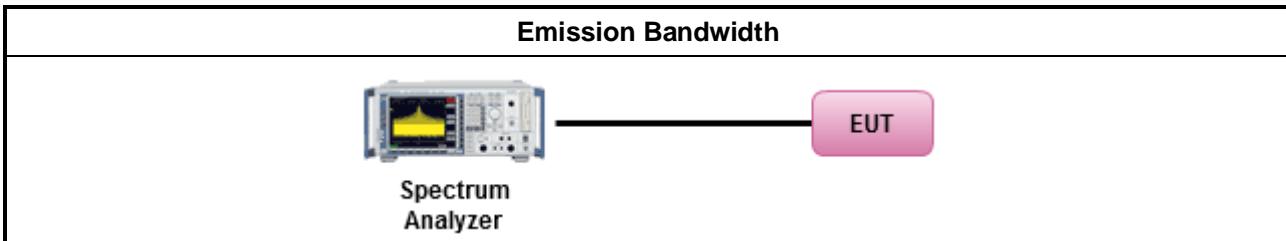



## 3.2.5 Test Result of Emission Bandwidth


Emission Bandwidth Result										
Condition			Emission Bandwidth (MHz)							
Modulation Mode	N <sub>TX</sub>	Freq. (MHz)	99% Bandwidth				6dB Bandwidth			
			Chain-Port 1	Chain-Port 2	-	-	Chain-Port 1	Chain-Port 2	-	-
11B-20M	1	2412	10.20	-	-	-	8.19	-	-	-
11B-20M	1	2437	10.15	-	-	-	8.20	-	-	-
11B-20M	1	2462	10.14	-	-	-	8.18	-	-	-
11G-20M	1	2412	16.42	-	-	-	14.96	-	-	-
11G-20M	1	2437	16.33	-	-	-	15.58	-	-	-
11G-20M	1	2462	16.29	-	-	-	15.78	-	-	-
11N2.4G-20M	1	2412	17.47	-	-	-	16.90	-	-	-
11N2.4G-20M	1	2437	17.48	-	-	-	16.91	-	-	-
11N2.4G-20M	1	2462	17.46	-	-	-	16.99	-	-	-
11N2.4G-40M	1	2412	36.26	-	-	-	35.92	-	-	-
11N2.4G-40M	1	2437	36.62	-	-	-	36.64	-	-	-
11N2.4G-40M	1	2462	36.62	-	-	-	36.16	-	-	-
11N2.4G-20M	2	2412	17.45	17.47	-	-	16.94	17.47	-	-
11N2.4G-20M	2	2437	17.46	17.46	-	-	16.42	15.56	-	-
11N2.4G-20M	2	2462	17.49	17.53	-	-	16.25	17.61	-	-
11N2.4G-40M	2	2412	36.82	36.62	-	-	35.92	36.20	-	-
11N2.4G-40M	2	2437	36.58	36.46	-	-	36.28	36.24	-	-
11N2.4G-40M	2	2462	36.70	36.30	-	-	36.04	35.36	-	-
Limit			N/A				≥500 kHz			
Result			Complied							

Note 1: N<sub>TX</sub> = Number of Transmit Chains


N<sub>TX</sub> 1

## Worst Emission Bandwidth Plots


11B-20M – F2 [Port 1]

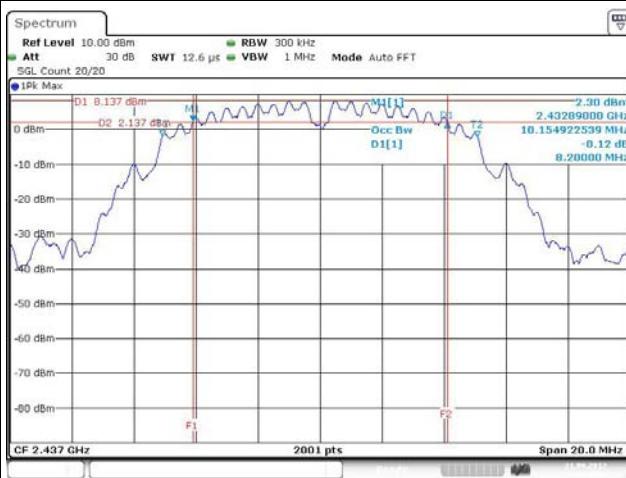


11G-20M – F3 [Port 1]

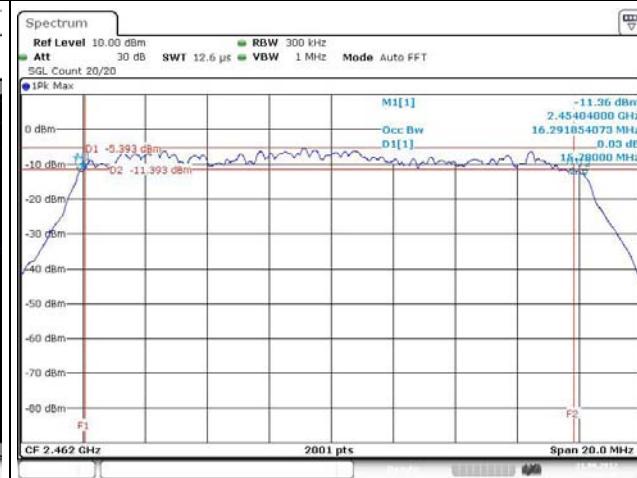

11N2.4G-20M – F3 [Port 1]

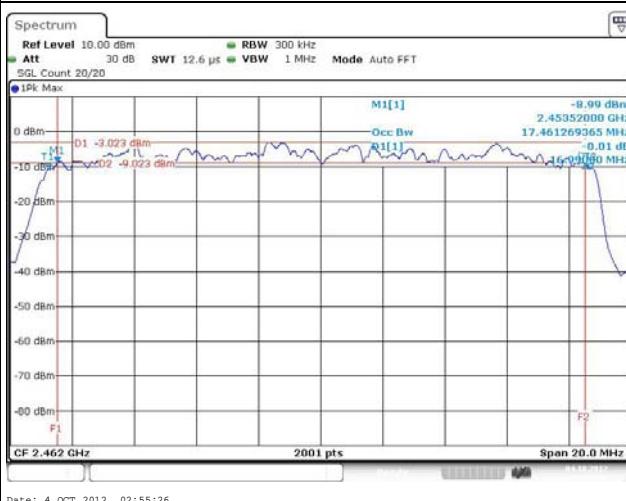


11N2.4G-40M – F2 [Port 1]

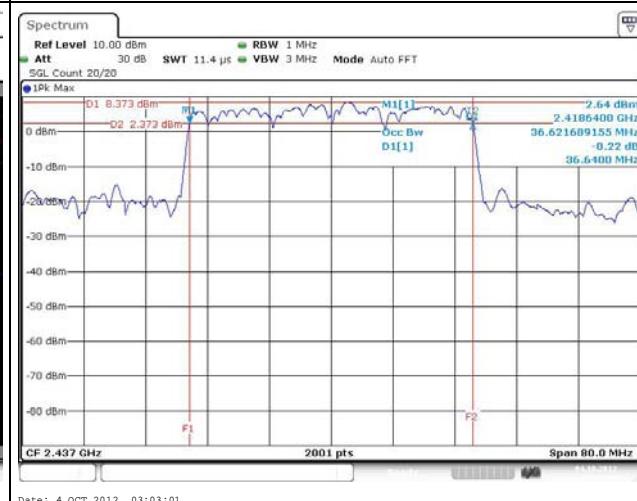

N<sub>TX</sub> 2


## Worst Emission Bandwidth Plots

## 11N2.4G-20M – F1 [Port 1]

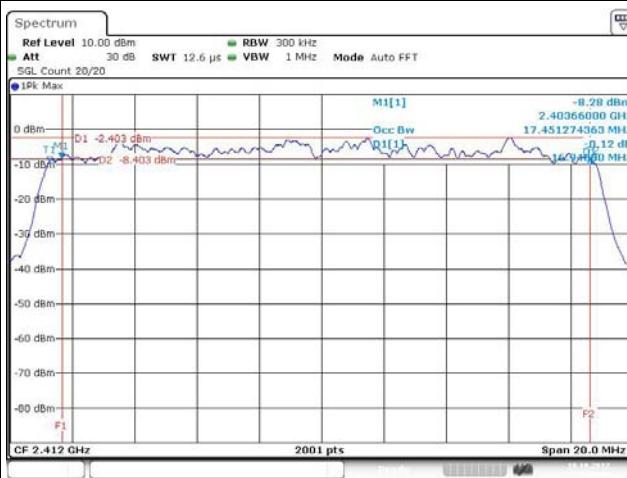


Date: 18.OCT.2012 23:08:05

## 11N2.4G-20M – F3 [Port 2]

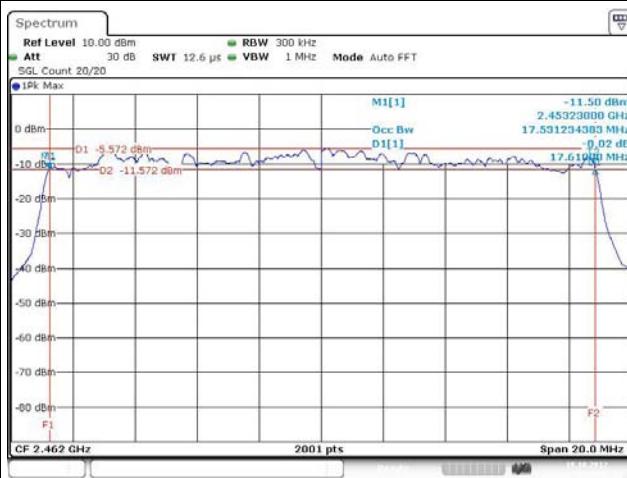


Date: 18.OCT.2012 23:11:47

## 11N2.4G-40M – F5 [Port 1]

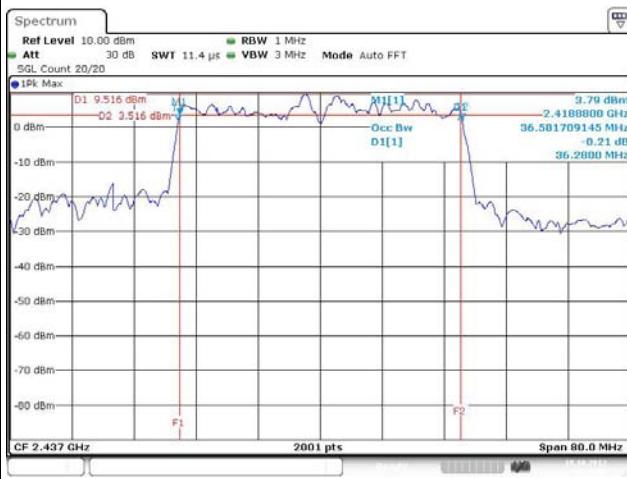

Date: 18.OCT.2012 23:16:50

## 11N2.4G-40M – F5 [Port 2]

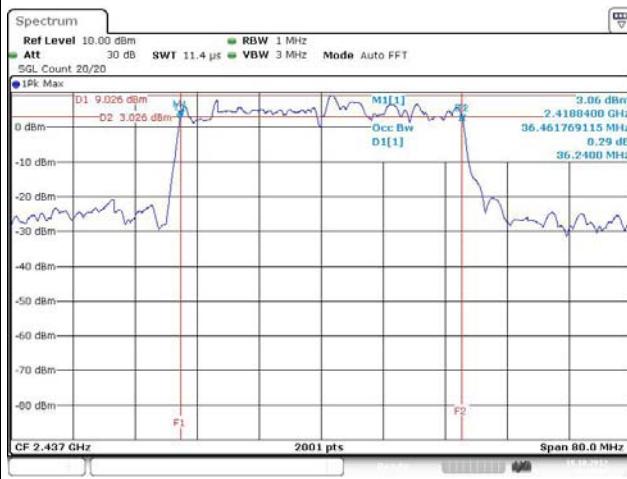

Date: 18.OCT.2012 23:16:57



### 3.3 RF Output Power

#### 3.3.1 RF Output Power Limit

RF Output Power Limit	
<b>Maximum Peak Conducted Output Power or Maximum Conducted Output Power Limit</b>	
<input checked="" type="checkbox"/> 2400-2483.5 MHz Band:	
<input checked="" type="checkbox"/>	If $G_{TX} \leq 6$ dBi, then $P_{Out} \leq 30$ dBm (1 W)
<input checked="" type="checkbox"/>	Point-to-multipoint systems (P2M): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ dBm
<input type="checkbox"/>	Point-to-point systems (P2P): If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
<input type="checkbox"/>	Smart antenna system (SAS):
	<input type="checkbox"/> Single beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	<input type="checkbox"/> Overlap beam: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3$ dBm
	<input type="checkbox"/> Aggregate power on all beams: If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)/3 + 8$ dBm
<b>e.i.r.p. Power Limit:</b>	
<input checked="" type="checkbox"/> 2400-2483.5 MHz Band	
<input checked="" type="checkbox"/>	Point-to-multipoint systems (P2M): $P_{eirp} \leq 36$ dBm (4 W)
<input type="checkbox"/>	Point-to-point systems (P2P): $P_{eirp} \leq \text{MAX}(36, [P_{Out} + G_{TX}])$ dBm
<input type="checkbox"/>	Smart antenna system (SAS)
	<input type="checkbox"/> Single beam: $P_{eirp} \leq \text{MAX}(36, P_{Out} + G_{TX})$ dBm
	<input type="checkbox"/> Overlap beam: $P_{eirp} \leq \text{MAX}(36, P_{Out} + G_{TX})$ dBm
	<input type="checkbox"/> Aggregate power on all beams: $P_{eirp} \leq \text{MAX}(36, [P_{Out} + G_{TX} + 8])$ dBm
$P_{Out}$ = maximum peak conducted output power or maximum conducted output power in dBm, $G_{TX}$ = the maximum transmitting antenna directional gain in dBi. $P_{eirp}$ = e.i.r.p. Power in dBm.	


#### 3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

### 3.3.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/> Maximum Peak Conducted Output Power	<input type="checkbox"/> Refer as FCC KDB 558074, clause 5.2.1.1 Option 1 (RBW $\geq$ EBW method). <input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 5.2.1.2 Option 2 (integrated band power method). <input type="checkbox"/> Refer as ANSI C63.10, clause 6.10.2.1 a) for peak power meter.
<input checked="" type="checkbox"/> Maximum Conducted (Average) Output Power	<input type="checkbox"/> Refer as FCC KDB 558074, clause 5.2.2.1 Option 1 (RMS detection with slow sweep speed). <input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 5.2.2.2 Option 2 (spectral trace averaging).
<input checked="" type="checkbox"/> For conducted measurement.	<input checked="" type="checkbox"/> The EUT supports single transmit chain and measurements performed on this transmit chain. <input checked="" type="checkbox"/> The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case. <input checked="" type="checkbox"/> The EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them. <input checked="" type="checkbox"/> If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$

### 3.3.4 Test Setup

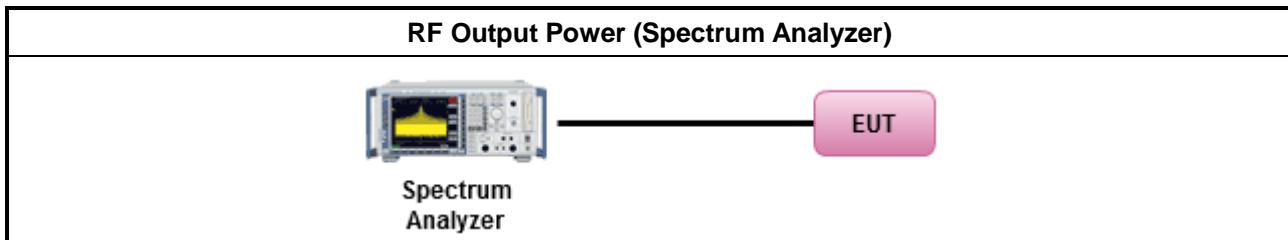



## 3.3.5 Directional Gain for Power Measurement

Directional Gain (DG) Result					
Transmit Chains No.		1	2	-	-
Maximum $G_{ANT}$ (dBi)		5.72	5.72	-	-
Modulation Mode	DG (dBi)	$N_{TX}$	$N_{SS}$	STBC	Array Gain (dB)
Legacy CCK,1-11Mbps (11b)	5.72	1	1	-	-
Non HT20,6-54Mbps (11g)	5.72	1	1	-	-
HT20,M0-M7	5.72	1	1	-	-
HT20,M8-15	5.72	2	2	-	-
HT40,M0-M7	5.72	1	1	-	-
HT40,M8-M15	5.72	2	2	-	-

Note 1: For all transmitter outputs with equal antenna gains, directional gain is to be computed as follows:  
Any transmit signals are correlated, Directional Gain =  $G_{ANT} + 10 \log(N_{TX})$   
All transmit signals are completely uncorrelated, Directional Gain =  $G_{ANT}$

Note 2: For all transmitter outputs with unequal antenna gains, directional gain is to be computed as follows:  
Any transmit signals are correlated, Directional Gain =  $10 \log[(10^{G1/20} + \dots + 10^{GN/20})^2 / N_{TX}]$   
All transmit signals are completely uncorrelated, Directional Gain =  $10 \log[(10^{G1/10} + \dots + 10^{GN/10}) / N_{TX}]$

Note 3: For Spatial Multiplexing, Directional Gain (DG) =  $G_{ANT} + 10 \log(N_{TX}/N_{SS})$ ,  
where  $N_{SS}$  = the number of independent spatial streams data.

Note 4: For CDD transmissions, directional gain is calculated as power measurements:  
Directional Gain (DG) =  $G_{ANT} + \text{Array Gain}$ , where Array Gain is as follows:  
Array Gain = 0 dB (i.e., no array gain) for  $N_{TX} \leq 4$ ;  
Array Gain = 0 dB (i.e., no array gain) for channel widths  $\geq 40$  MHz for any  $N_{TX}$ ;



## 3.3.6 Test Result of Maximum Peak Conducted Output Power


Maximum Peak Conducted Output Power Result												
Condition			RF Output Power (dBm)									
Modulation Mode	N <sub>TX</sub>	Freq. (MHz)	Chain Port 1	Chain Port 2	-	-	Sum Chain	Power Limit	DG (dBi)	EIRP Power	EIRP Limit	
11B-20M	1	2412	21.19	-	-	-	21.19	30	5.72	26.91	36.0	
11B-20M	1	2437	21.01	-	-	-	21.01	30	5.72	26.73	36.0	
11B-20M	1	2462	18.45	-	-	-	18.45	30	5.72	24.17	36.0	
11G-20M	1	2412	16.04	-	-	-	16.04	30	5.72	21.76	36.0	
11G-20M	1	2437	25.01	-	-	-	25.01	30	5.72	30.73	36.0	
11G-20M	1	2462	14.10	-	-	-	14.10	30	5.72	19.82	36.0	
11N2.4G-20M	1	2412	17.25	-	-	-	17.25	30	5.72	22.97	36.0	
11N2.4G-20M	1	2437	24.75	-	-	-	24.75	30	5.72	30.47	36.0	
11N2.4G-20M	1	2462	15.86	-	-	-	15.86	30	5.72	21.58	36.0	
11N2.4G-40M	1	2422	16.35	-	-	-	16.35	30	5.72	22.07	36.0	
11N2.4G-40M	1	2437	25.96	-	-	-	25.96	30	5.72	31.68	36.0	
11N2.4G-40M	1	2452	15.22	-	-	-	15.22	30	5.72	20.94	36.0	
11N2.4G-20M	2	2412	18.38	17.84	-	-	21.13	30	5.72	26.85	36.0	
11N2.4G-20M	2	2437	26.19	25.76	-	-	28.99	30	5.72	34.71	36.0	
11N2.4G-20M	2	2462	16.70	16.36	-	-	19.54	30	5.72	25.26	36.0	
11N2.4G-40M	2	2422	18.26	18.27	-	-	21.28	30	5.72	27.00	36.0	
11N2.4G-40M	2	2437	26.92	26.78	-	-	29.86	30	5.72	35.58	36.0	
11N2.4G-40M	2	2452	18.22	18.54	-	-	21.39	30	5.72	27.11	36.0	
Result			Complied									



## 3.3.7 Test Result of Maximum Conducted (Average) Output Power

Maximum Conducted (Average) Output Power												
Condition			RF Output Power (dBm)									
Modulation Mode	N <sub>TX</sub>	Freq. (MHz)	Chain Port 1	Chain Port 2	-	-	Sum Chain	Power Limit	DG (dBi)	EIRP Power	EIRP Limit	
11B-20M	1	2412	17.97	-	-	-	17.97	30	5.72	23.69	36.0	
11B-20M	1	2437	17.95	-	-	-	17.95	30	5.72	23.67	36.0	
11B-20M	1	2462	16.75	-	-	-	16.75	30	5.72	22.47	36.0	
11G-20M	1	2412	8.24	-	-	-	8.24	30	5.72	13.96	36.0	
11G-20M	1	2437	17.18	-	-	-	17.18	30	5.72	22.90	36.0	
11G-20M	1	2462	6.30	-	-	-	6.30	30	5.72	12.02	36.0	
11N2.4G-20M	1	2412	10.13	-	-	-	10.13	30	5.72	15.85	36.0	
11N2.4G-20M	1	2437	17.63	-	-	-	17.63	30	5.72	23.35	36.0	
11N2.4G-20M	1	2462	8.61	-	-	-	8.61	30	5.72	14.33	36.0	
11N2.4G-40M	1	2422	8.00	-	-	-	8.00	30	5.72	13.72	36.0	
11N2.4G-40M	1	2437	17.63	-	-	-	17.63	30	5.72	23.35	36.0	
11N2.4G-40M	1	2452	6.95	-	-	-	6.95	30	5.72	12.67	36.0	
11N2.4G-20M	2	2412	10.68	9.84	-	-	13.29	30	5.72	19.01	36.0	
11N2.4G-20M	2	2437	18.62	17.65	-	-	21.17	30	5.72	26.89	36.0	
11N2.4G-20M	2	2462	9.09	8.41	-	-	11.77	30	5.72	17.49	36.0	
11N2.4G-40M	2	2422	10.20	9.85	-	-	13.04	30	5.72	18.76	36.0	
11N2.4G-40M	2	2437	18.88	18.42	-	-	21.67	30	5.72	27.39	36.0	
11N2.4G-40M	2	2452	10.13	10.14	-	-	13.15	30	5.72	18.87	36.0	
Result			Complied									

Test Signal Duty Cycle (x)		Power Duty Factor [dB] – (10 log 1/x)
<input checked="" type="checkbox"/>	93.55% - IEEE 802.11b	0.29
<input checked="" type="checkbox"/>	68.07% - IEEE 802.11g	1.67
<input checked="" type="checkbox"/>	67.16% - IEEE 802.11n (HT20)	1.73
<input checked="" type="checkbox"/>	65.45% - IEEE 802.11n (HT40)	1.84

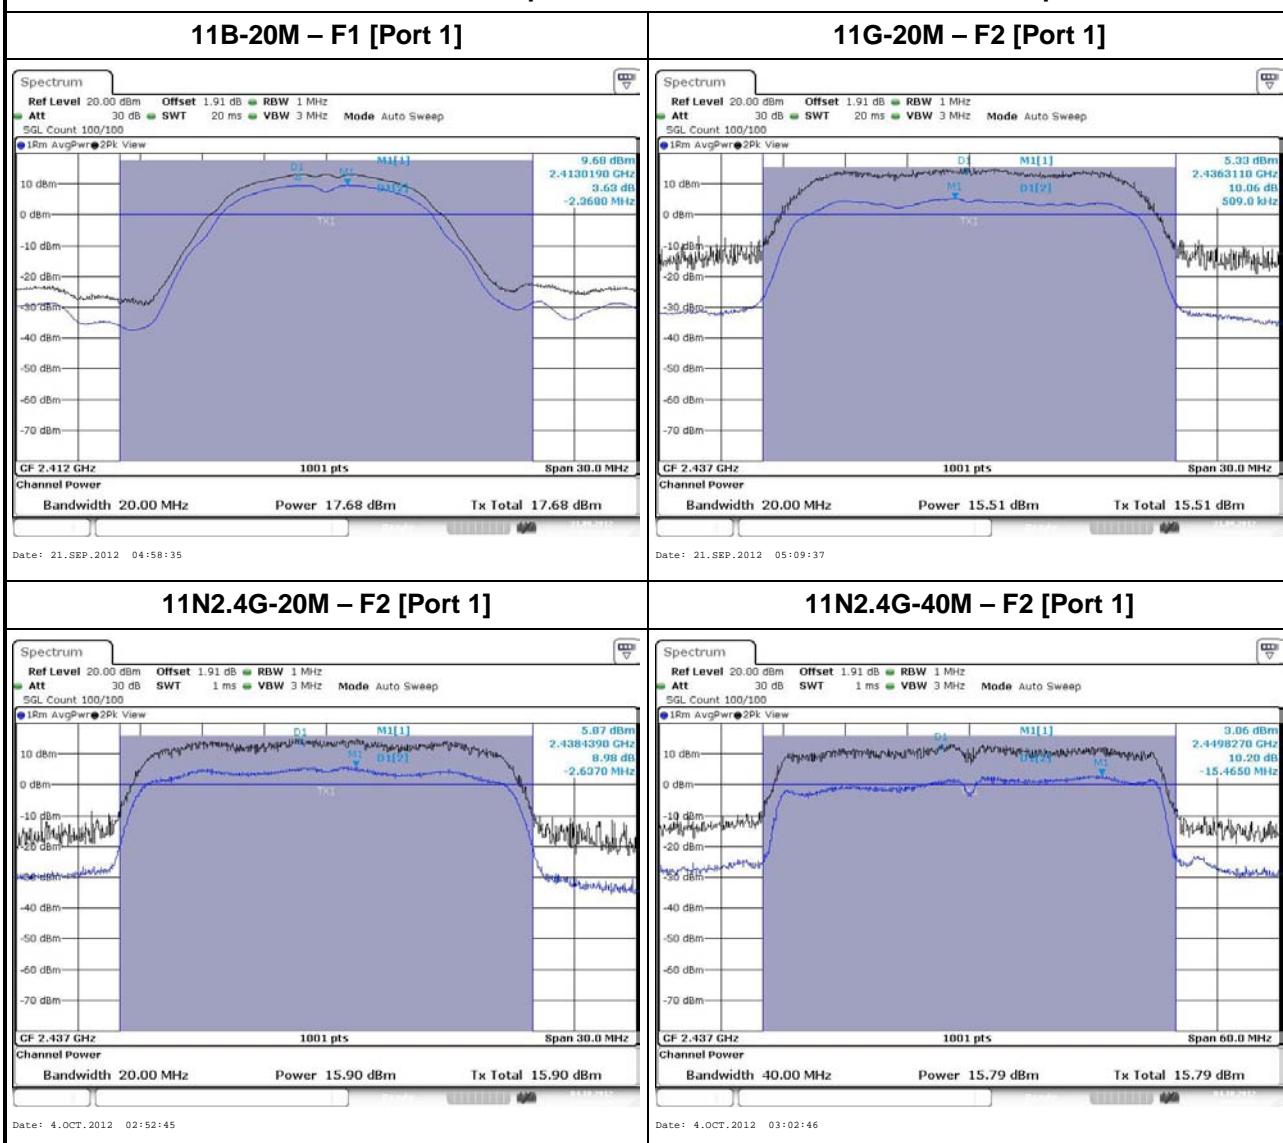
**N<sub>TX</sub> 1**
**Worst Maximum Peak Conducted Output Power and Maximum Conducted Output Power Plots**


Note 1: Average Output Power Plots w/o Duty Factor


N<sub>TX</sub> 2

## Worst Maximum Peak Conducted Output Power and Maximum Conducted Output Power Plots


## 11N2.4G-20M – F2 [Port 1]

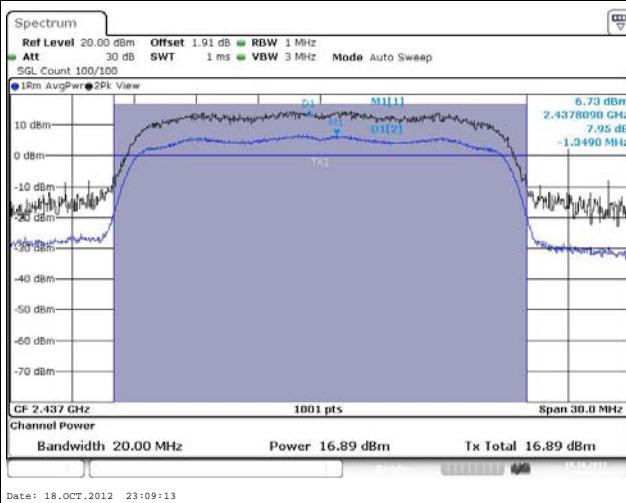


## 11N2.4G-20M – F2 [Port 2]

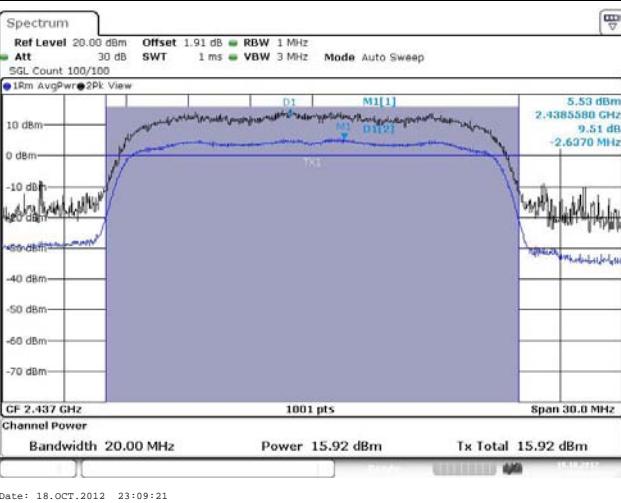

## 11N2.4G-40M – F5 [Port 1]

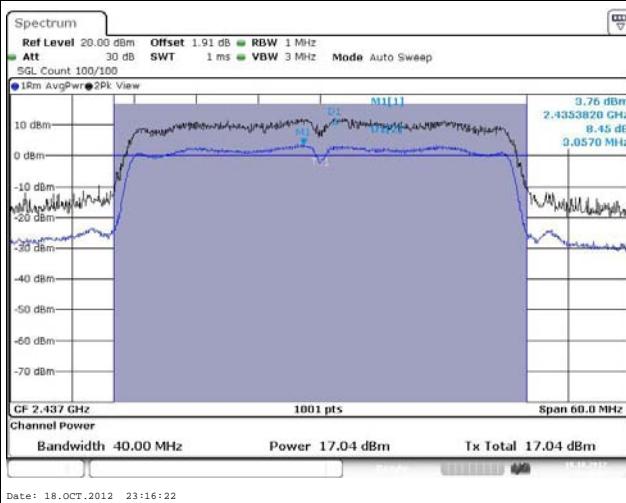

## 11N2.4G-40M – F5 [Port 2]

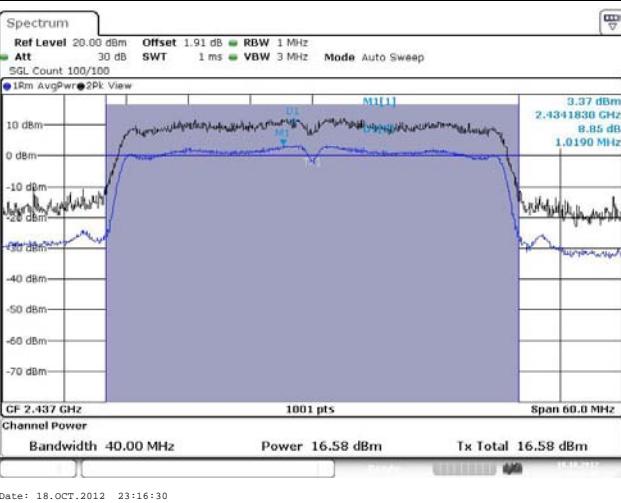

Note 1: Average Output Power Plots w/o Duty Factor



### 3.4 Power Spectral Density

#### 3.4.1 Power Spectral Density Limit

Power Spectral Density Limit	
<input checked="" type="checkbox"/> Power Spectral Density (PSD) $\leq 8 \text{ dBm/3kHz}$	

#### 3.4.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

#### 3.4.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/> Power spectral density procedures that the same method as used to determine the conducted output power shall be used to determine the power spectral density. In addition, the use of a peak PSD procedure will always result in a "worst-case" measured level for comparison to the limit. Therefore, whenever the DTS bandwidth exceeds 500 kHz, it is acceptable to utilize the peak PSD procedure to demonstrate compliance to the PSD limit, regardless of how the fundamental output power was measured. For the power spectral density shall be measured using below options:	
<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 5.3.1 Option 1 (peak PSD; BWCF=-15.2dB).	
<input type="checkbox"/> Refer as FCC KDB 558074, clause 5.3.2 Option 2 (average PSD; BWCF=-15.2dB).	
<input type="checkbox"/> Refer as ANSI C63.10, clause 6.11.2.3 for PSD for DTS - (RBW=3kHz; sweep=100s).	
<input type="checkbox"/> Refer as ANSI C63.10, clause 6.11.2.4 for Alternative PSD for DTS - (RBW=3kHz; average=100)	
<input checked="" type="checkbox"/> For conducted measurement.	
<input checked="" type="checkbox"/> The EUT supports single transmit chain and measurements performed on this transmit chain.	
<input checked="" type="checkbox"/> The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.	
<input checked="" type="checkbox"/> The EUT supports multiple transmit chains using options given below:	
	<input checked="" type="checkbox"/> Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the $N_{TX}$ output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace. The new data trace samples added 100 kHz segment and found the highest value of each 100 kHz segments. Add the bandwidth correction factor (BWCF) [-15.2 dB] adjusting in power spectral density per 3kHz.
	<input type="checkbox"/> Option 2: Measure and add $10 \log(N)$ dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with $10 \log(N)$ . Or each transmit chains shall be add $10 \log(N)$ to compared with the limit.



### 3.4.4 Test Setup

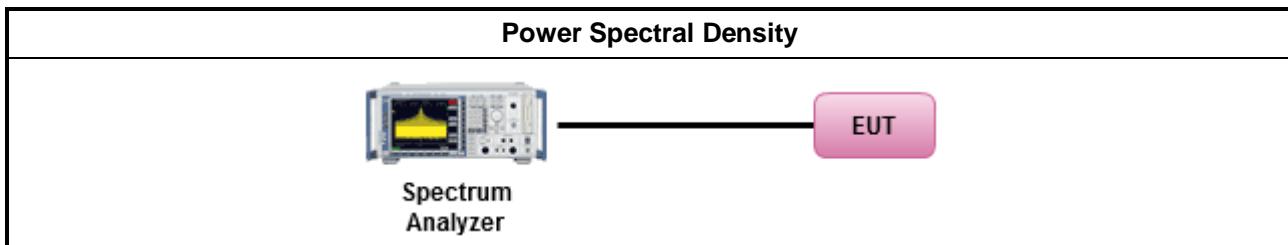

### 3.4.5 Test Result of Power Spectral Density


Power Spectral Density Result									
Condition			Power Spectral Density (dBm/3kHz)						
Modulation Mode	N <sub>TX</sub>	Freq. (MHz)	Sum Chain	-	-	-	-	-	Power Limit
11B-20M	1	2412	-6.15	-	-	-	-	-	8
11B-20M	1	2437	-6.47	-	-	-	-	-	8
11B-20M	1	2462	-7.32	-	-	-	-	-	8
11G-20M	1	2412	-19.46	-	-	-	-	-	8
11G-20M	1	2437	-9.85	-	-	-	-	-	8
11G-20M	1	2462	-21.03	-	-	-	-	-	8
11N2.4G-20M	1	2412	-20.08	-	-	-	-	-	8
11N2.4G-20M	1	2437	-12.47	-	-	-	-	-	8
11N2.4G-20M	1	2462	-21.66	-	-	-	-	-	8
11N2.4G-40M	1	2422	-24.22	-	-	-	-	-	8
11N2.4G-40M	1	2437	-13.08	-	-	-	-	-	8
11N2.4G-40M	1	2452	-23.89	-	-	-	-	-	8
11N2.4G-20M	2	2412	-17.84	-	-	-	-	-	8
11N2.4G-20M	2	2437	-11.33	-	-	-	-	-	8
11N2.4G-20M	2	2462	-19.66	-	-	-	-	-	8
11N2.4G-40M	2	2422	-20.86	-	-	-	-	-	8
11N2.4G-40M	2	2437	-12.49	-	-	-	-	-	8
11N2.4G-40M	2	2452	-21.78	-	-	-	-	-	8
Result			Complied						

Note 1: PSD [dBm/3kHz] = sum each transmit chains by bin-to-bin PSD [dBm/100kHz] + BWFC [-15.2 dB]


N<sub>TX</sub> 1

## Worst Power Spectral Density Plots


11B-20M – F1 [Sum All Chains]

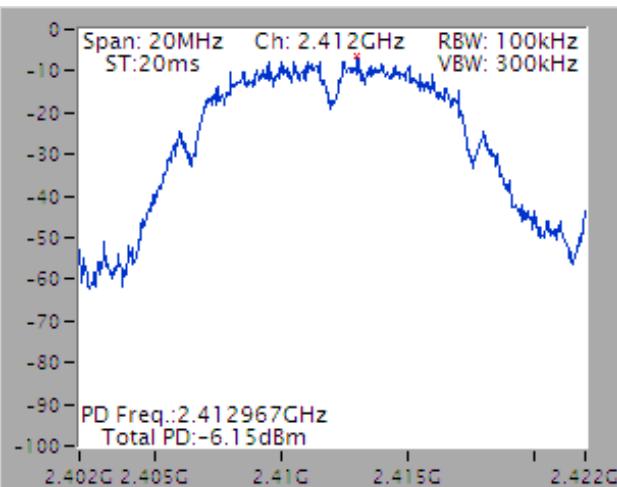


11G-20M – F2 [Sum All Chains]

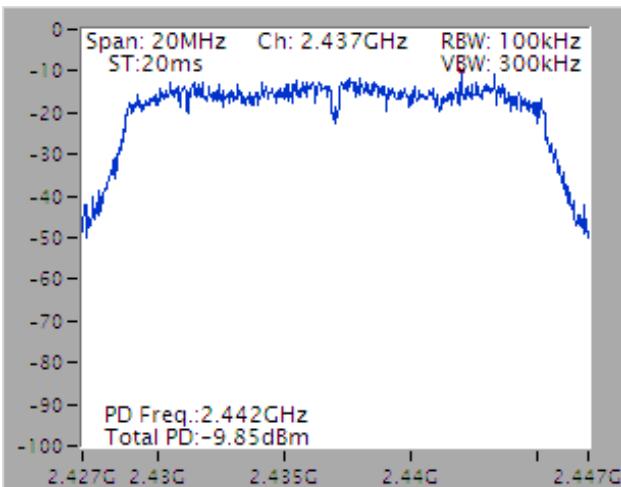

11N2.4G-20M – F2 [Sum All Chains]

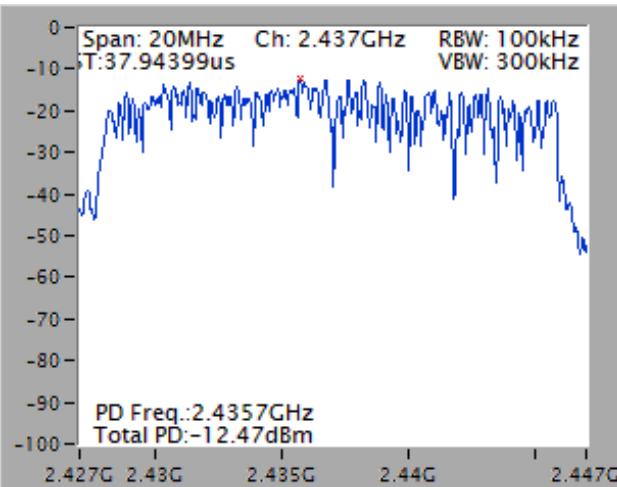


11N2.4G-40M – F5 [Sum All Chains]

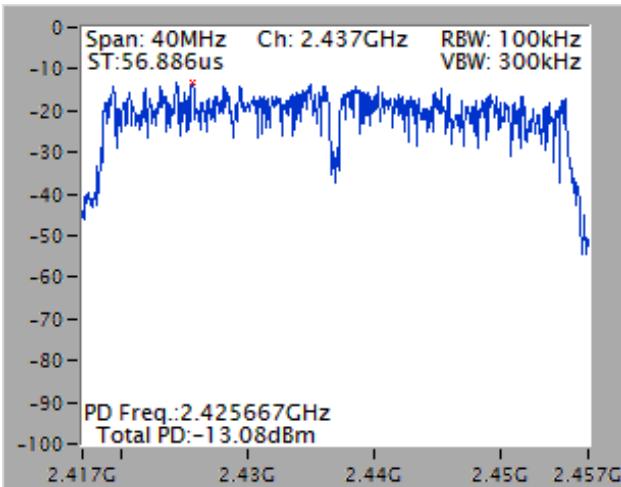


N<sub>TX</sub> 2

## Worst Power Spectral Density Plots

11N2.4G-20M – F2 [Sum All Chains]

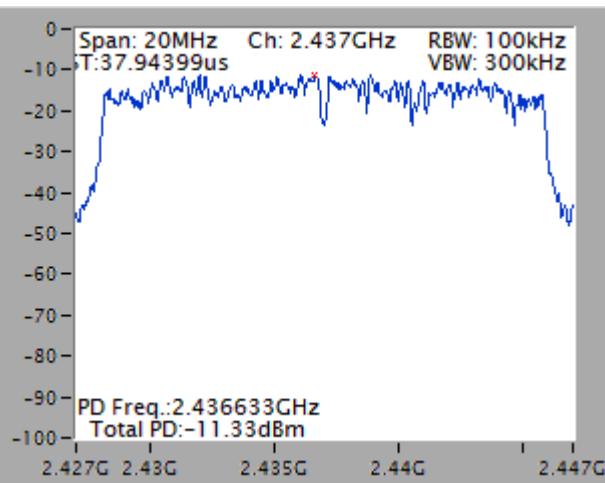


11N2.4G-40M – F5 [Sum All Chains]

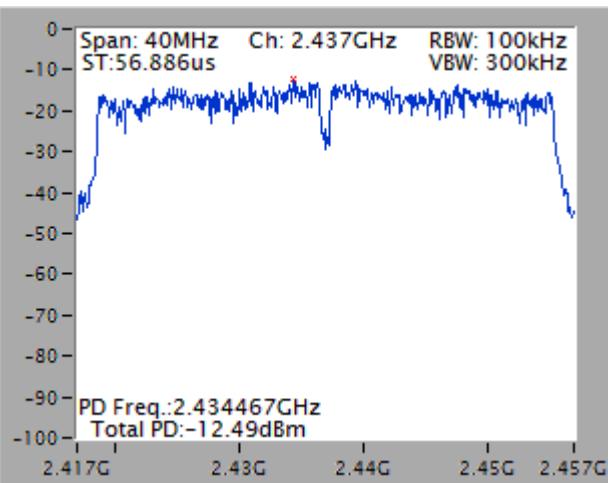

### 3.5 Transmitter Radiated Bandedge Emissions

#### 3.5.1 Transmitter Radiated Bandedge Emissions Limit

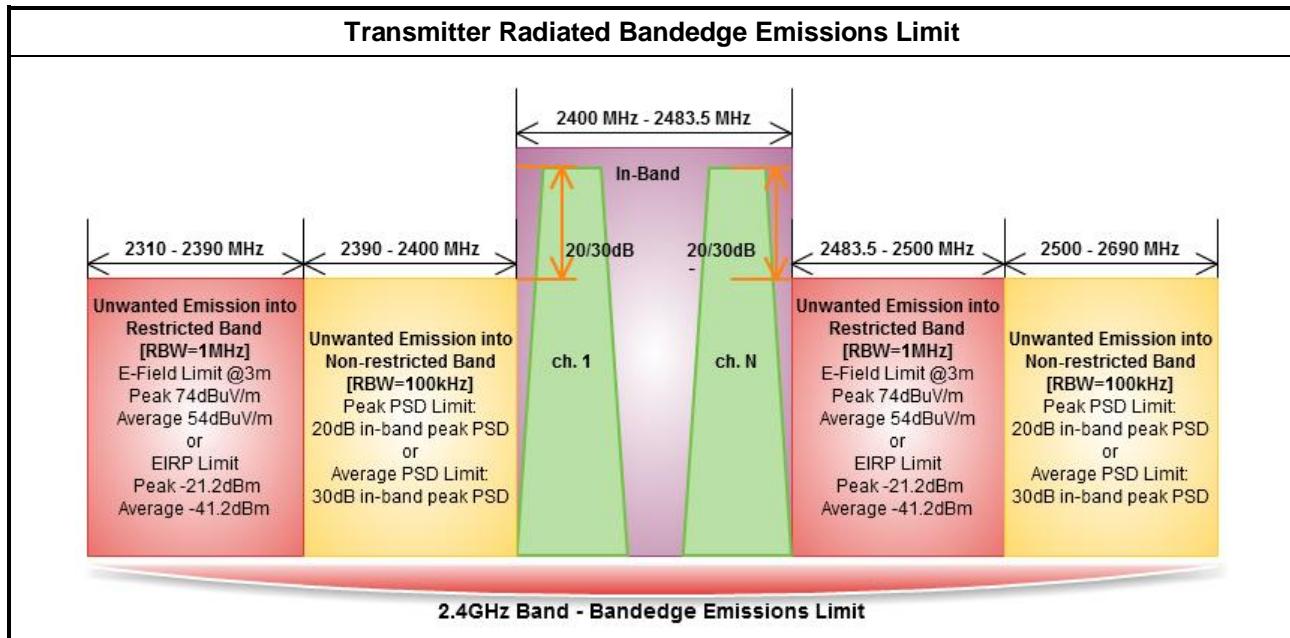



### 3.5.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

### 3.5.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.2.2 bandedge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.
<input checked="" type="checkbox"/>	For the transmitter unwanted emissions shall be measured using following options below:
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 5.4.1 for unwanted emissions into non-restricted bands.
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 5.4.2 for unwanted emissions into restricted bands.
	<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 5.4.2.2.1 Option 1 (Power Averaging).
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 5.4.2.2.2 Option 2 (Trace Averaging).
	<input type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW). – Duty cycle $\geq$ 98%.
	<input type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
	<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 5.4.2.2.1.1 measurement procedure peak limit.
	<input type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit.
<input checked="" type="checkbox"/>	For the transmitter bandedge emissions shall be measured using following options below:
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 5.4.2.2.4 for narrower resolution bandwidth using the band power and summing the spectral levels (i.e., 100 kHz or 1 MHz).
	<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 6.9.2 for band-edge testing.
	<input type="checkbox"/> Refer as ANSI C63.10, clause 6.9.3 for marker-delta method for band-edge measurements.
<input checked="" type="checkbox"/>	For radiated measurement, refer as ANSI C63.10, clause 6.5 for radiated emissions from above 1 GHz.

### 3.5.4 Test Setup

#### Transmitter Radiated Bandedge Emissions

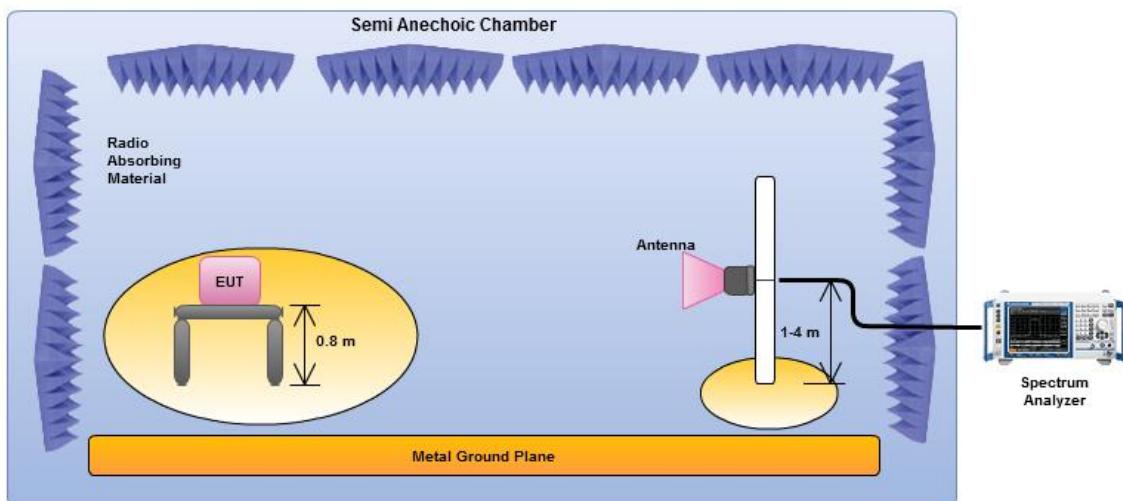

Electric field tests shall be performed in transmitter bandedge emissions using a calibrated horn antenna.

3.5.5 Test Result of Transmitter Radiated Bandedge Emissions- $N_{TX}$  1

Transmitter Radiated Bandedge Emissions Result									
Modulation	11B-20M		Non-restricted Band Emissions						
Non-restricted Band (MHz)	Test Ch. Freq. (MHz)	In-band PSD [i] (dBuV/100kHz)	NBE Freq. (MHz)	Out-band PSD [o] (dBuV/100kHz)	[i] – [o] (dB)	Limit (dB)	Level Type	Pol. note 1	
2390-2400	2412	111.00	2398.48	74.95	36.05	20	PK	V	
2500-2690	2462	110.95	2533.50	62.91	48.04	20	PK	V	
Low Bandedge				Up Bandedge					

Note 1: Measurement worst emissions of receive antenna polarization: H (Horizontal) or V (Vertical)

Transmitter Radiated Bandedge Emissions Result								
Modulation	11B-20M		Restricted Band Emissions					
Restricted Band (MHz)	Test Ch. Freq. (MHz)	In-band PSD [i] (dBuV/1MHz)	RBE Freq. (MHz)	Measure Distance (m)	Out-Band Level (dBuV/m)	Limit (dBuV/m)	Level Type	Pol. note 1
2310-2390	2412	118.61	2390.00	3	68.95	74	PK	V
2310-2390	2412	104.30	2389.63	3	52.51	54	AV	V
2483.5-2500	2462	118.79	2483.80	3	68.46	74	PK	V
2483.5-2500	2462	104.38	2483.50	3	52.81	54	AV	V

Note 1: Measurement worst emissions of receive antenna polarization: H (Horizontal) or V (Vertical).



Transmitter Radiated Bandedge Emissions Result								
Modulation	11G-20M		Non-restricted Band Emissions					
Non-restricted Band (MHz)	Test Ch. Freq. (MHz)	In-band PSD [i] (dBuV/100kHz)	NBE Freq. (MHz)	Out-band PSD [o] (dBuV/100kHz)	[i] – [o] (dB)	Limit (dB)	Level Type	Pol. note 1
2390-2400	2412	99.10	2394.00	64.32	34.78	20	PK	V
2500-2690	2462	98.56	2544.30	62.85	35.71	20	PK	V
Low Bandedge				Up Bandedge				

Note 1: Measurement worst emissions of receive antenna polarization: H (Horizontal) or V (Vertical)

Transmitter Radiated Bandedge Emissions Result								
Modulation	11G-20M		Restricted Band Emissions					
Restricted Band (MHz)	Test Ch. Freq. (MHz)	In-band PSD [i] (dBuV/1MHz)	RBE Freq. (MHz)	Measure Distance (m)	Out-Band Level (dBuV/m)	Limit (dBuV/m)	Level Type	Pol. note 1
2310-2390	2412	108.46	2389.97	3	67.23	74	PK	V
2310-2390	2412	96.70	2389.18	3	52.47	54	AV	V
2483.5-2500	2462	107.69	2485.00	3	66.76	74	PK	V
2483.5-2500	2462	95.40	2485.80	3	52.99	54	AV	V

Note 1: Measurement worst emissions of receive antenna polarization: H (Horizontal) or V (Vertical).





Transmitter Radiated Bandedge Emissions Result								
Modulation	11N-20M		Non-restricted Band Emissions					
Non-restricted Band (MHz)	Test Ch. Freq. (MHz)	In-band PSD [i] (dBuV/100kHz)	NBE Freq. (MHz)	Out-band PSD [o] (dBuV/100kHz)	[i] – [o] (dB)	Limit (dB)	Level Type	Pol. note 1
2390-2400	2412	99.33	2399.49	65.05	34.28	20	PK	V
2500-2690	2462	99.16	2531.40	61.90	37.26	20	PK	V
Low Bandedge				Up Bandedge				
Note 1: Measurement worst emissions of receive antenna polarization: H (Horizontal) or V (Vertical)								

Transmitter Radiated Bandedge Emissions Result								
Modulation	11N-20M		Restricted Band Emissions					
Restricted Band (MHz)	Test Ch. Freq. (MHz)	In-band PSD [i] (dBuV/1MHz)	RBE Freq. (MHz)	Measure Distance (m)	Out-Band Level (dBuV/m)	Limit (dBuV/m)	Level Type	Pol. note 1
2310-2390	2412	108.05	2389.97	3	71.41	74	PK	V
2310-2390	2412	95.76	2390.00	3	52.97	54	AV	V
2483.5-2500	2462	107.40	2484.70	3	66.34	74	PK	V
2483.5-2500	2462	95.26	2487.10	3	53.00	54	AV	V

Note 1: Measurement worst emissions of receive antenna polarization: H (Horizontal) or V (Vertical).

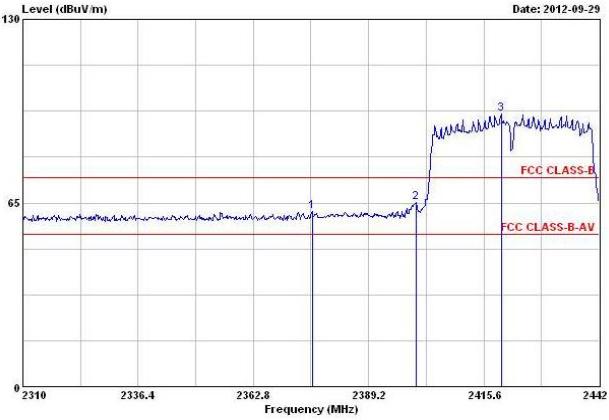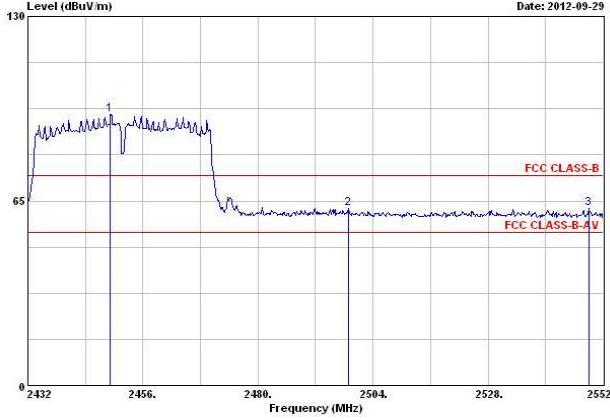

Transmitter Radiated Bandedge Emissions Result								
Modulation	11N-40M		Non-restricted Band Emissions					
Non-restricted Band (MHz)	Test Ch. Freq. (MHz)	In-band PSD [i] (dBuV/100kHz)	NBE Freq. (MHz)	Out-band PSD [o] (dBuV/100kHz)	[i] – [o] (dB)	Limit (dB)	Level Type	Pol. note 1
2390-2400	2422	96.55	2400.00	65.04	31.51	20	PK	V
2500-2690	2452	95.57	2549.00	62.28	33.29	20	PK	V
Low Bandedge				Up Bandedge				
								
Note 1: Measurement worst emissions of receive antenna polarization: H (Horizontal) or V (Vertical)								

Transmitter Radiated Bandedge Emissions Result								
Modulation	11N-40M		Restricted Band Emissions					
Restricted Band (MHz)	Test Ch. Freq. (MHz)	In-band PSD [i] (dBuV/1MHz)	RBE Freq. (MHz)	Measure Distance (m)	Out-Band Level (dBuV/m)	Limit (dBuV/m)	Level Type	Pol. note 1
2310-2390	2422	105.58	2378.38	3	69.23	74	PK	V
2310-2390	2422	86.84	2390.00	3	52.58	54	AV	V
2483.5-2500	2452	104.16	2496.08	3	68.34	74	PK	V
2483.5-2500	2452	85.57	2493.68	3	52.53	54	AV	V

Note 1: Measurement worst emissions of receive antenna polarization: H (Horizontal) or V (Vertical).

3.5.6 Test Result of Transmitter Radiated Bandedge Emissions-  $N_{TX} 2$ 



Transmitter Radiated Bandedge Emissions Result								
Modulation	11N-20M		Non-restricted Band Emissions					
Non-restricted Band (MHz)	Test Ch. Freq. (MHz)	In-band PSD [i] (dBuV/100kHz)	NBE Freq. (MHz)	Out-band PSD [o] (dBuV/100kHz)	[i] – [o] (dB)	Limit (dB)	Level Type	Pol. note 1
2390-2400	2412	103.26	2395.90	63.37	39.89	20	PK	V
2500-2690	2462	99.30	2543.90	62.04	37.26	20	PK	V
Low Bandedge				Up Bandedge				

Note 1: Measurement worst emissions of receive antenna polarization: H (Horizontal) or V (Vertical)

Transmitter Radiated Bandedge Emissions Result								
Modulation	11N-20M- $N_{TX} 2$		Restricted Band Emissions					
Restricted Band (MHz)	Test Ch. Freq. (MHz)	In-band PSD [i] (dBuV/1MHz)	RBE Freq. (MHz)	Measure Distance (m)	Out-Band Level (dBuV/m)	Limit (dBuV/m)	Level Type	Pol. note 1
2310-2390	2412	111.34	2390.00	3	68.80	74	PK	V
2310-2390	2412	97.02	2390.00	3	52.68	54	AV	V
2483.5-2500	2462	107.33	2487.50	3	65.59	74	PK	V
2483.5-2500	2462	93.86	2487.80	3	52.04	54	AV	V

Note 1: Measurement worst emissions of receive antenna polarization: H (Horizontal) or V (Vertical).

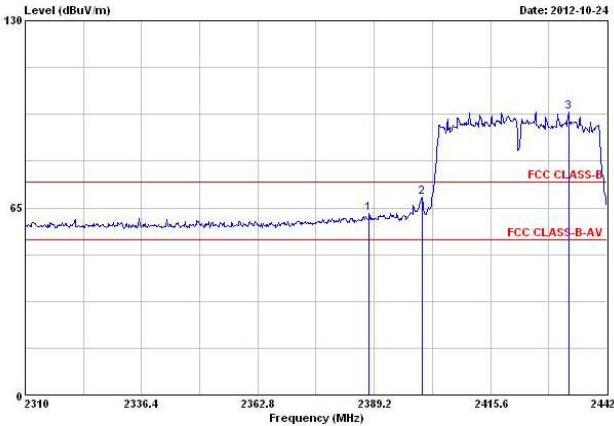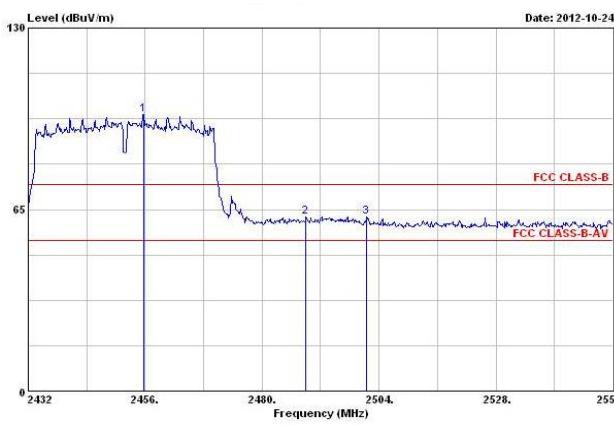

Transmitter Radiated Bandedge Emissions Result								
Modulation	11N-40M-N <sub>TX</sub> 2		Non-restricted Band Emissions					
Non-restricted Band (MHz)	Test Ch. Freq. (MHz)	In-band PSD [i] (dBuV/100kHz)	NBE Freq. (MHz)	Out-band PSD [o] (dBuV/100kHz)	[i] – [o] (dB)	Limit (dB)	Level Type	Pol. note 1
2390-2400	2422	98.17	2400.00	68.54	29.63	20	PK	V
2500-2690	2452	99.05	2501.48	62.25	36.80	20	PK	V
Low Bandedge				Up Bandedge				
								
Note 1: Measurement worst emissions of receive antenna polarization: H (Horizontal) or V (Vertical)								

Transmitter Radiated Bandedge Emissions Result								
Modulation	11N-40M-N <sub>TX</sub> 2		Restricted Band Emissions					
Restricted Band (MHz)	Test Ch. Freq. (MHz)	In-band PSD [i] (dBuV/1MHz)	RBE Freq. (MHz)	Measure Distance (m)	Out-Band Level (dBuV/m)	Limit (dBuV/m)	Level Type	Pol. note 1
2310-2390	2422	105.64	2389.60	3	69.15	74	PK	V
2310-2390	2422	85.96	2389.60	3	52.92	54	AV	V
2483.5-2500	2452	105.26	2490.44	3	68.52	74	PK	V
2483.5-2500	2452	85.94	2493.80	3	52.93	54	AV	V

Note 1: Measurement worst emissions of receive antenna polarization: H (Horizontal) or V (Vertical).



### 3.6 Transmitter Radiated Unwanted Emissions

#### 3.6.1 Transmitter Radiated Unwanted Emissions Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

#### Un-restricted Band Emissions Limit

RF output power procedure	Limit (dB)
Peak output power procedure	20
Average output power procedure	30

Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.

#### 3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.




### 3.6.3 Test Procedures

<b>Test Method</b>	
<input checked="" type="checkbox"/>	Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).
<input checked="" type="checkbox"/>	Measurements in the frequency range 10 GHz - 18GHz are typically made at a closer distance 1m, because the instrumentation noise floor is typically close to the radiated emission limit.
<input checked="" type="checkbox"/>	Measurements in the frequency range above 18 GHz - 25GHz are typically made at a closer distance 0.5m, because the instrumentation noise floor is typically close to the radiated emission limit.
<input checked="" type="checkbox"/>	The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].
<input checked="" type="checkbox"/>	For the transmitter unwanted emissions shall be measured using following options below:
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 5.4.1 for unwanted emissions into non-restricted bands.
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 5.4.2 for unwanted emissions into restricted bands.
	<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 5.4.2.2.1 Option 1 (Power Averaging).
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 5.4.2.2.2 Option 2 (Trace Averaging).
	<input type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW) – Duty cycle $\geq$ 98%.
	<input type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
	<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 5.4.2.2.1.1 measurement procedure peak limit.
	<input type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit.
<input checked="" type="checkbox"/>	For radiated measurement.
	<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 6.4 for radiated emissions from below 30 MHz.
	<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 6.5 for radiated emissions from 30 MHz to 1000 MHz.
	<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 6.5 for radiated emissions from above 1 GHz.


### 3.6.4 Test Setup

#### Transmitter Radiated Unwanted Emissions

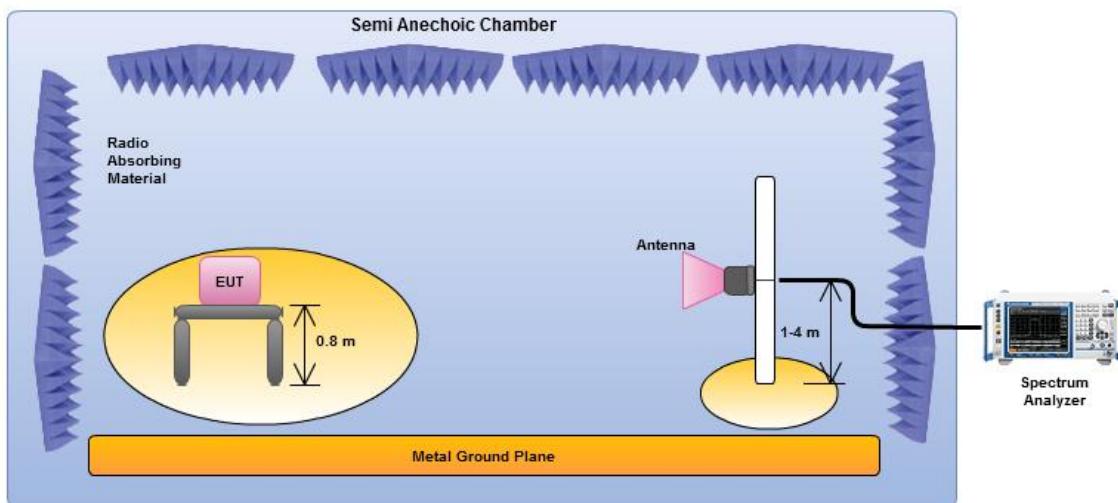

Magnetic field tests shall be performed in the frequency range of 9 kHz to 30 MHz using a calibrated loop antenna. Electric field tests shall be performed in the frequency range of 30 MHz to 1000 MHz using a calibrated bi-log antenna and the frequency range of 1 GHz to 40 GHz using a calibrated horn antenna.


### 3.6.5 Transmitter Radiated Unwanted Emissions (Below 1GHz)

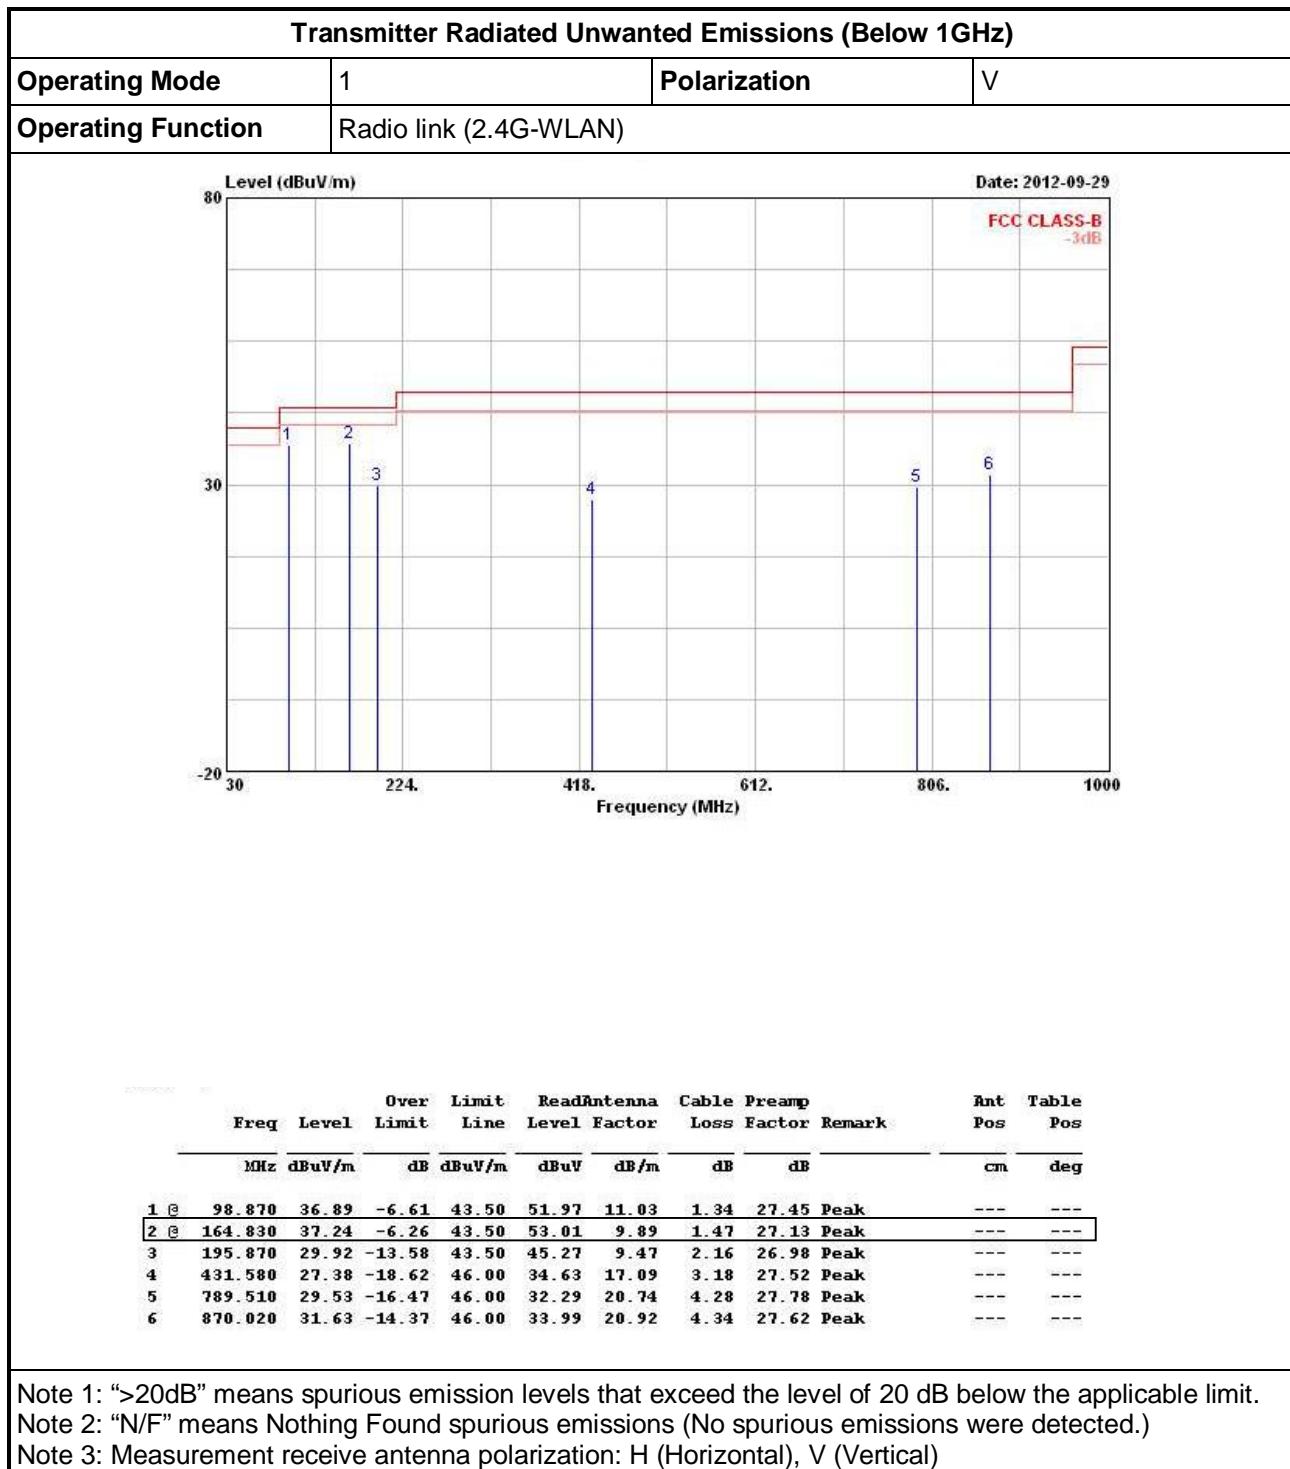



## Transmitter Radiated Unwanted Emissions (Below 1GHz)

Operating Mode	1	Polarization	H
Operating Function	Radio link (2.4G-WLAN)		

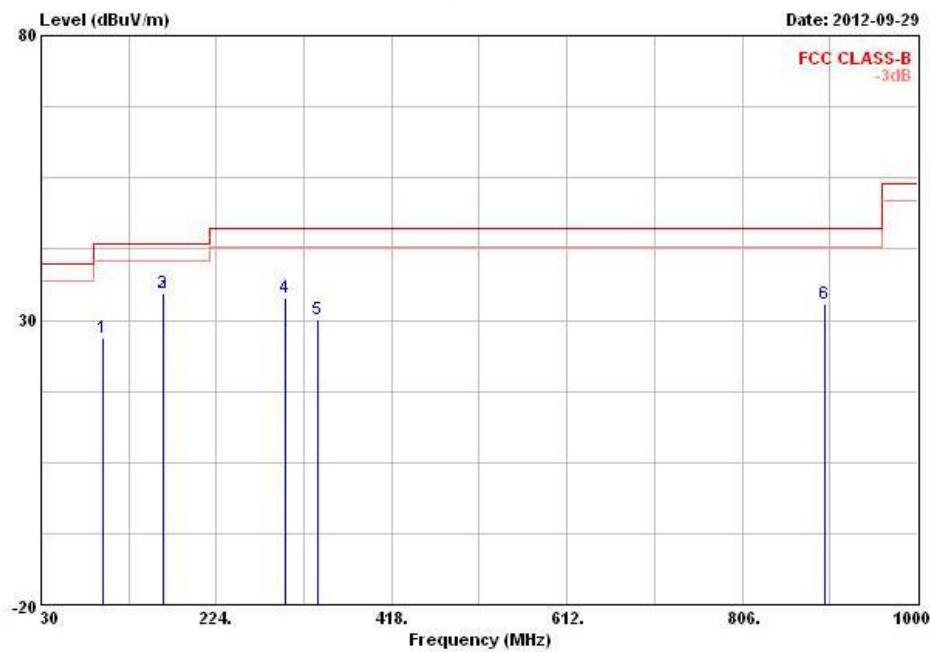


Freq	Level	Over Limit	Line	Read		Ant	Table
				Antenna	Level		
MHz	dBuV/m	dB	dBuV/m	dB	dB	cm	deg
1	98.870	26.80	-16.70	43.50	41.88	11.03	1.34 27.45 Peak
2	164.830	34.84	-8.66	43.50	50.61	9.89	1.47 27.13 Peak
3	164.830	34.84	-8.66	43.50	50.61	9.89	1.47 27.13 Peak
4	299.660	33.93	-12.07	46.00	43.86	13.58	3.19 26.70 Peak
5	335.550	30.15	-15.85	46.00	39.90	14.67	2.50 26.92 Peak
6	897.180	32.73	-13.27	46.00	35.22	21.02	4.06 27.57 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

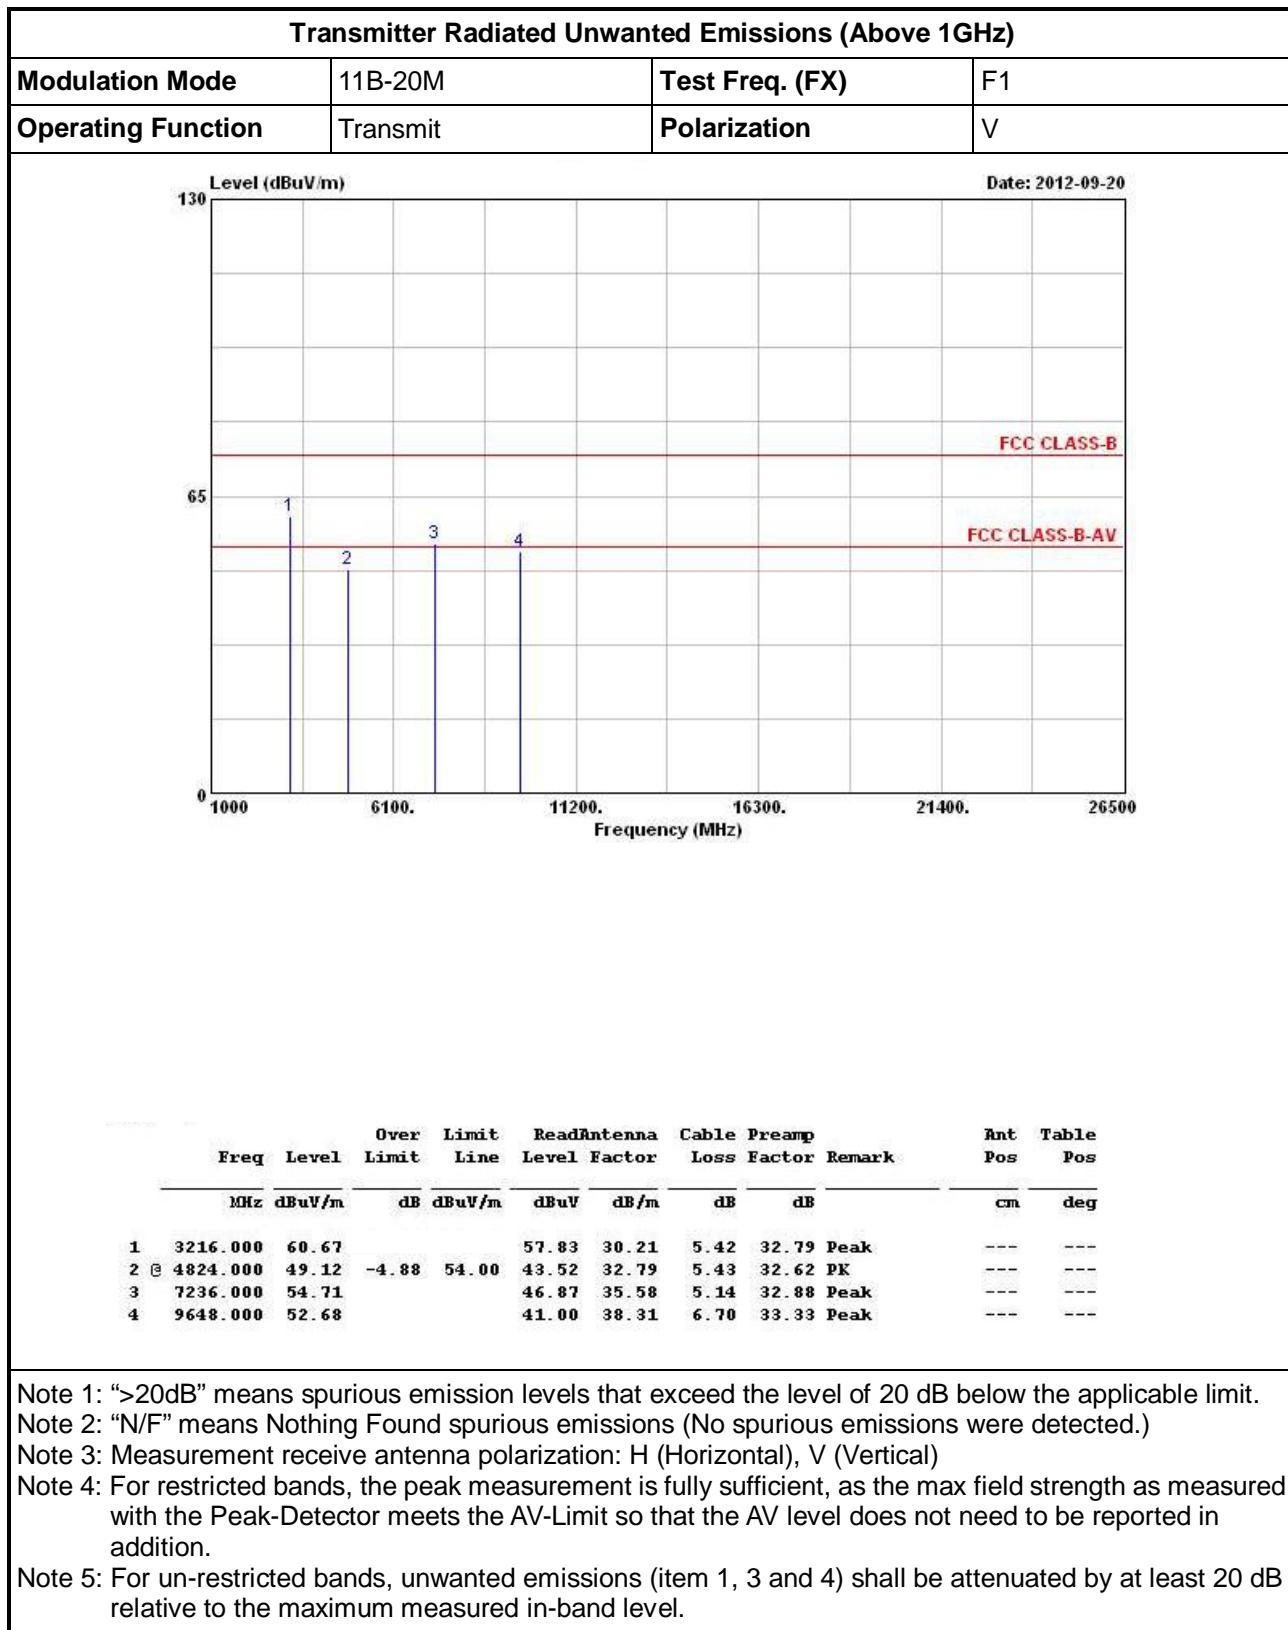3.6.6 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11B-20M- N<sub>TX</sub> 1



## Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11B-20M	Test Freq. (FX)	F1
Operating Function	Transmit	Polarization	H

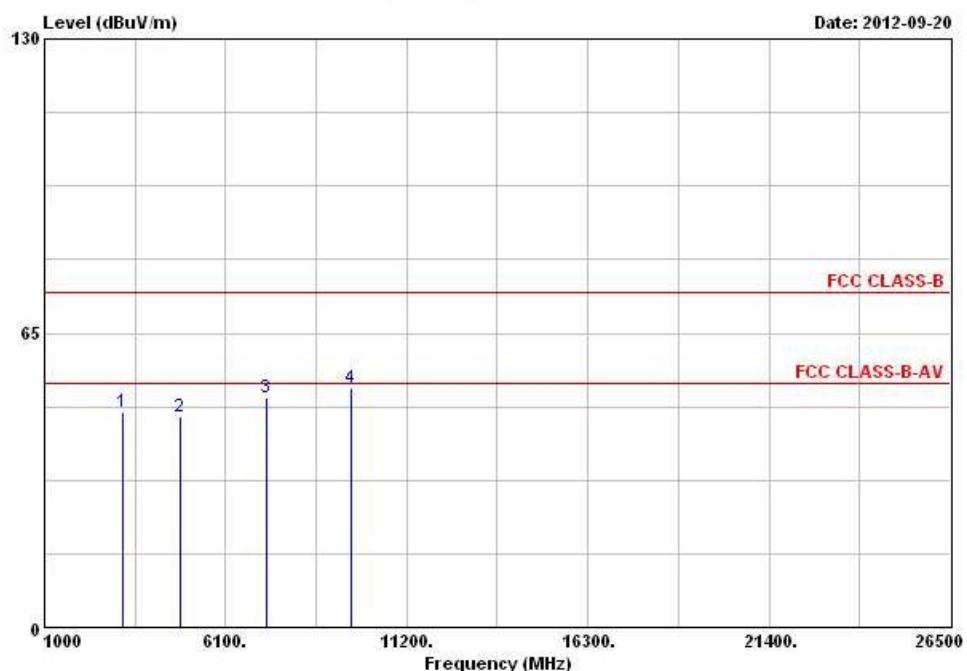

Freq	Level	Over Limit	Line	Read	Antenna	Cable	Preamp	Remark	Ant	Table
									Pos	Pos
MHz	dBuV/m		dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	3216.000	47.67			44.83	30.21	5.42	32.79 Peak	---	---
2	4824.000	46.46	-7.54	54.00	40.86	32.79	5.43	32.62 PK	0	0
3	7236.000	50.72			42.88	35.58	5.14	32.88 Peak	0	0
4	9648.000	52.88			41.20	38.31	6.70	33.33 Peak	0	0

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 1, 3 and 4) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



## Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11B-20M	Test Freq. (FX)	F2
Operating Function	Transmit	Polarization	V

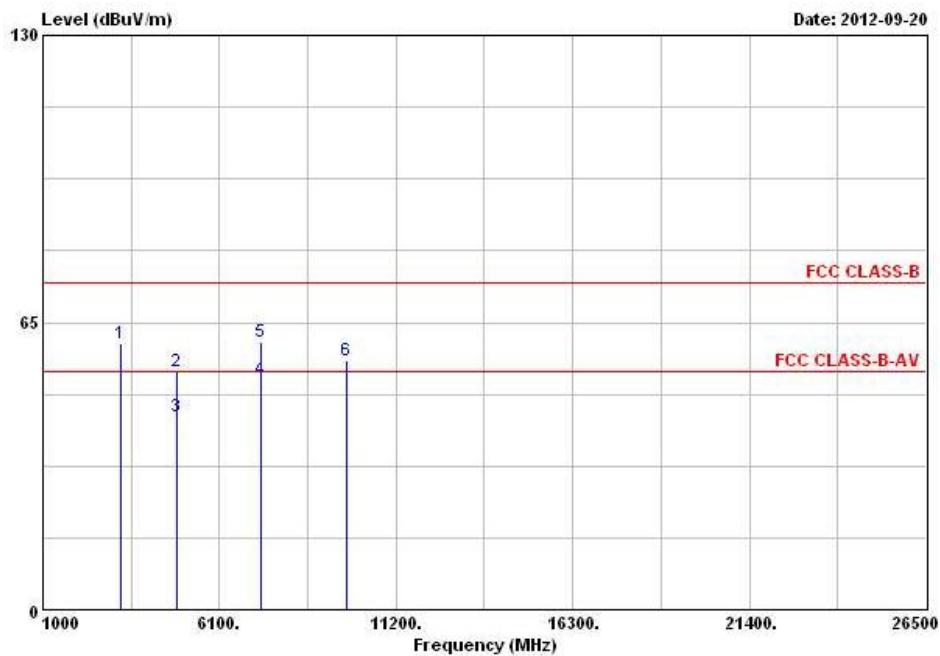

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table
		Line	Limit	Level	Factor	Loss	Factor		
1	3249.000	60.27		57.36	30.28	5.42	32.79	Peak	---
2	4874.000	54.02	-19.98	74.00	48.32	32.88	5.43	32.61	Peak
3	4874.000	43.71	-10.29	54.00	38.01	32.88	5.43	32.61	Average
4	7311.000	52.10	-1.90	54.00	43.89	35.74	5.36	32.89	Average
5	7311.000	60.71	-13.29	74.00	52.50	35.74	5.36	32.89	Peak
6	9748.000	56.32		44.38	38.52	6.74	33.32	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 1and 6) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



## Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11B-20M	Test Freq. (FX)	F2
Operating Function	Transmit	Polarization	H

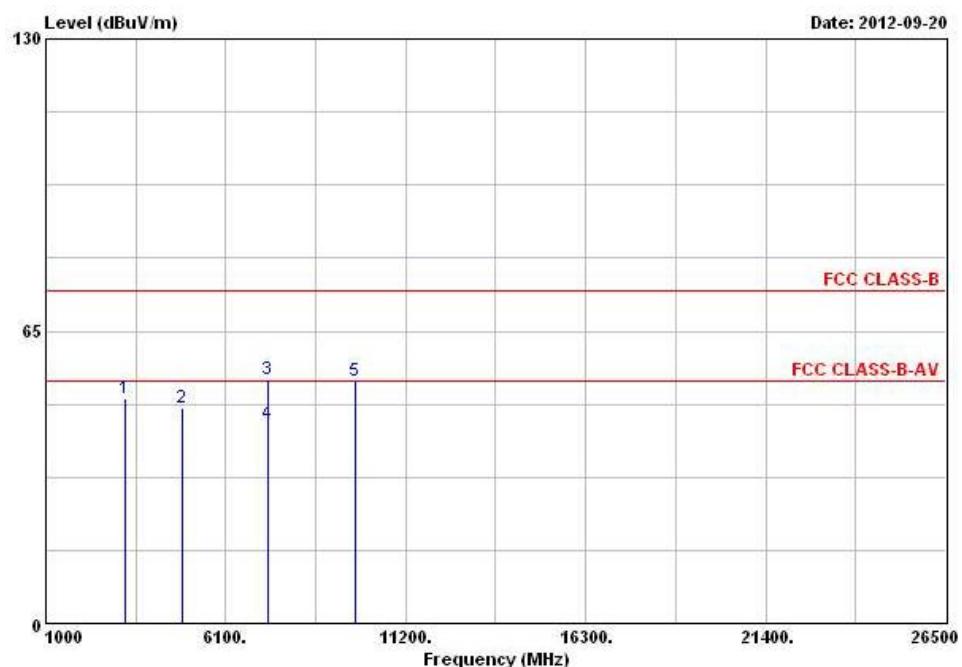

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	
		Line	Limit	Antenna	Level	Level	Factor			
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	3249.000	50.06		47.15	30.28	5.42	32.79	Peak	---	---
2	4874.000	48.02	-5.98	54.00	42.32	32.88	5.43	32.61	PK	---
3	7311.000	54.19	-19.81	74.00	45.98	35.74	5.36	32.89	Peak	---
4	7311.000	44.25	-9.75	54.00	36.04	35.74	5.36	32.89	Average	---
5	9748.000	53.85		41.91	38.52	6.74	33.32	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 1and 5) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



### Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11B-20M	Test Freq. (FX)	F3
Operating Function	Transmit	Polarization	V

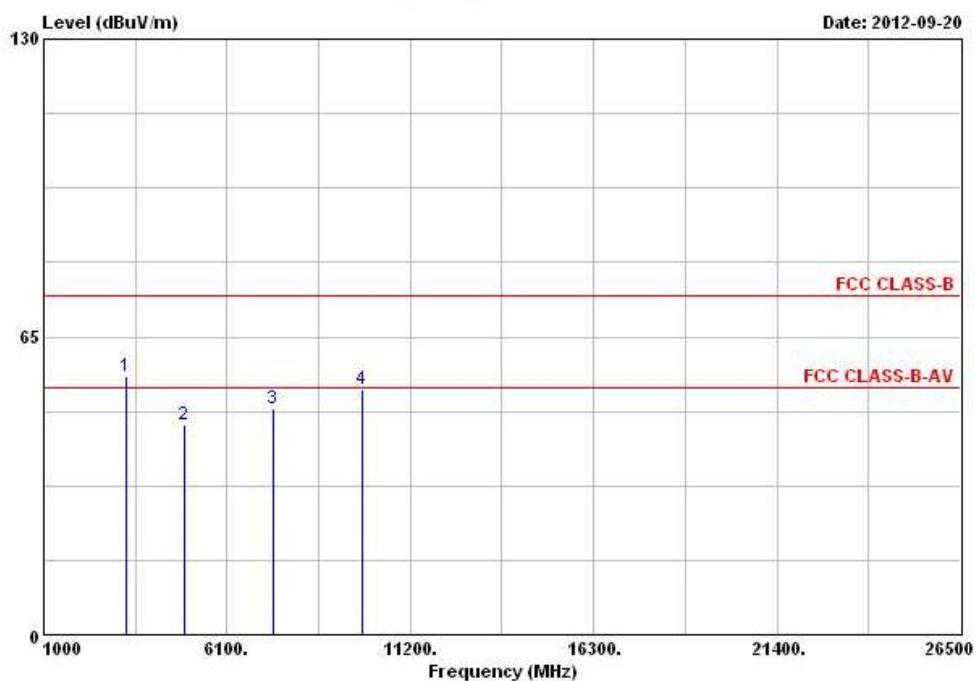

Freq	Level	Over Limit		ReadAntenna		Cable Preamp		Ant Pos	Table Pos
		Limit	Line	Level	Factor	Loss	Factor		
3282.000	56.40			53.43	30.35	5.41	32.79	Peak	---
1924.000	45.67	-8.33	54.00	39.88	32.98	5.41	32.60	PK	---
7386.000	49.42	-4.58	54.00	40.81	35.95	5.57	32.91	Average	---
9848.000	53.56			41.38	38.69	6.80	33.31	Peak	---

Note 1: “>20dB” means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 1and 4) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



## Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11B-20M	Test Freq. (FX)	F3
Operating Function	Transmit	Polarization	H

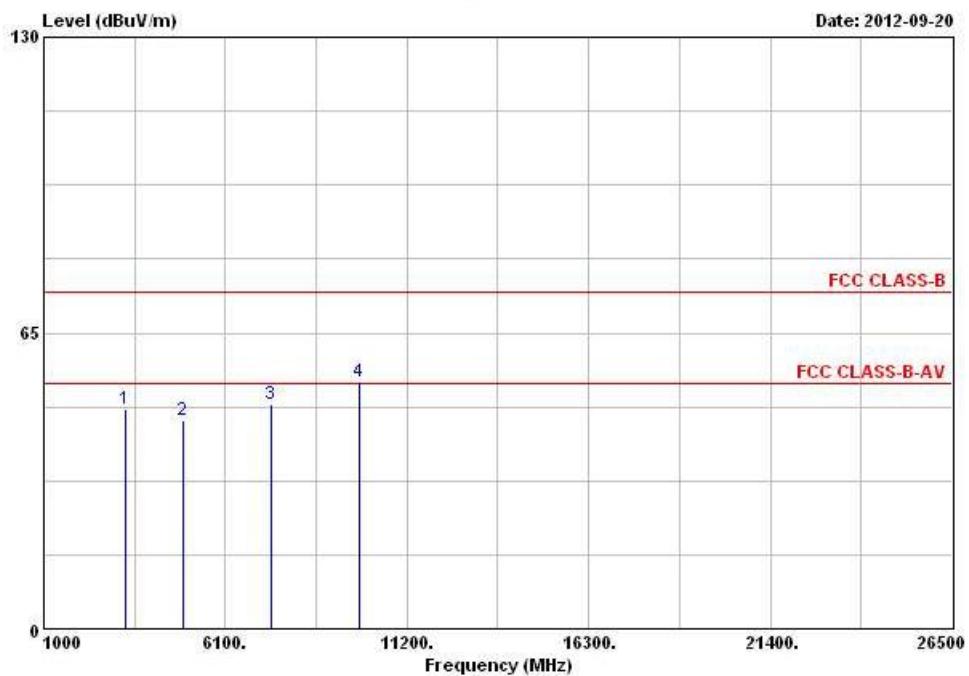

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table
		Line	Line	Antenna	Cable	Loss	Factor		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 3282.000	48.11			45.14	30.35	5.41	32.79 Peak	---	---
2 4924.000	45.84	-8.16	54.00	40.05	32.98	5.41	32.60 PK	---	---
3 7386.000	49.38	-4.62	54.00	40.77	35.95	5.57	32.91 PK	---	---
4 9848.000	54.24			42.06	38.69	6.80	33.31 Peak	---	---


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 5: For un-restricted bands, unwanted emissions (item 1and 4) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

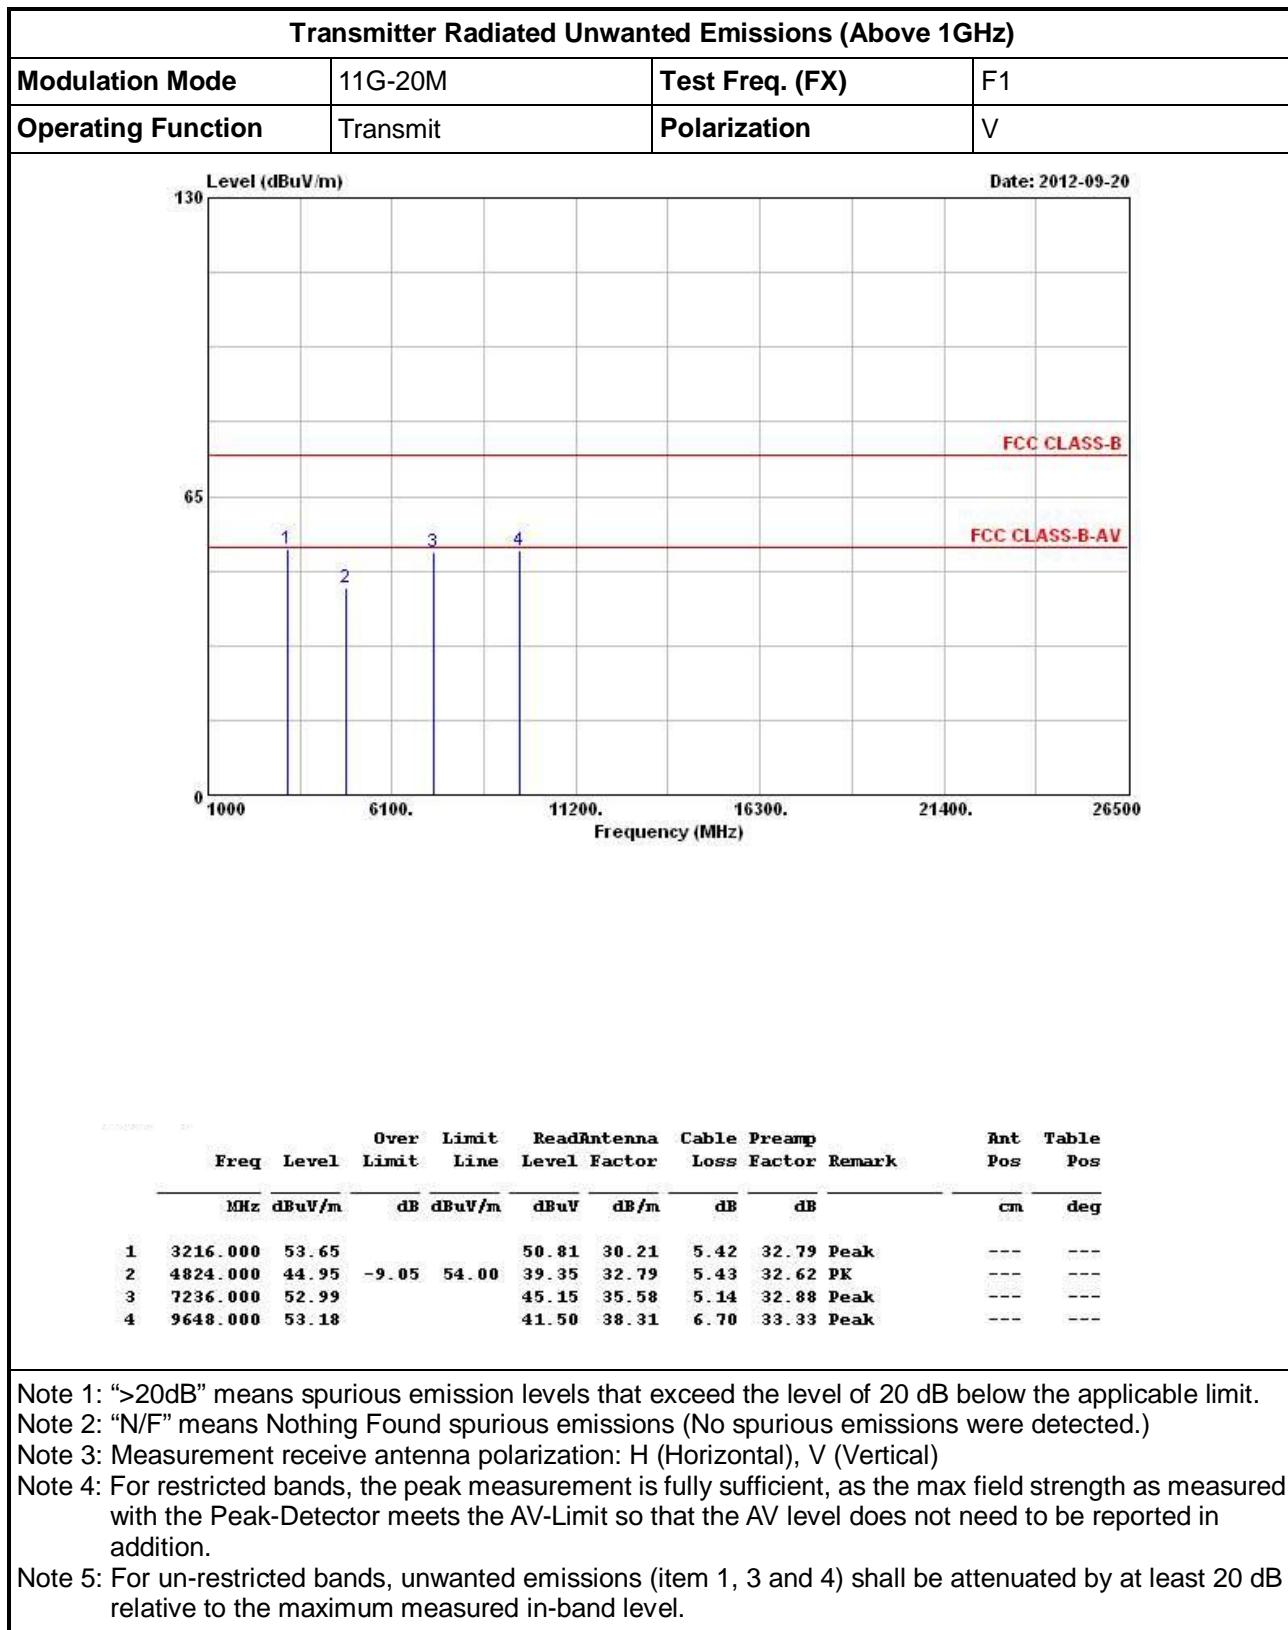3.6.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11G-20M-N<sub>TX</sub> 1



### Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11G-20M	Test Freq. (FX)	F1
Operating Function	Transmit	Polarization	H

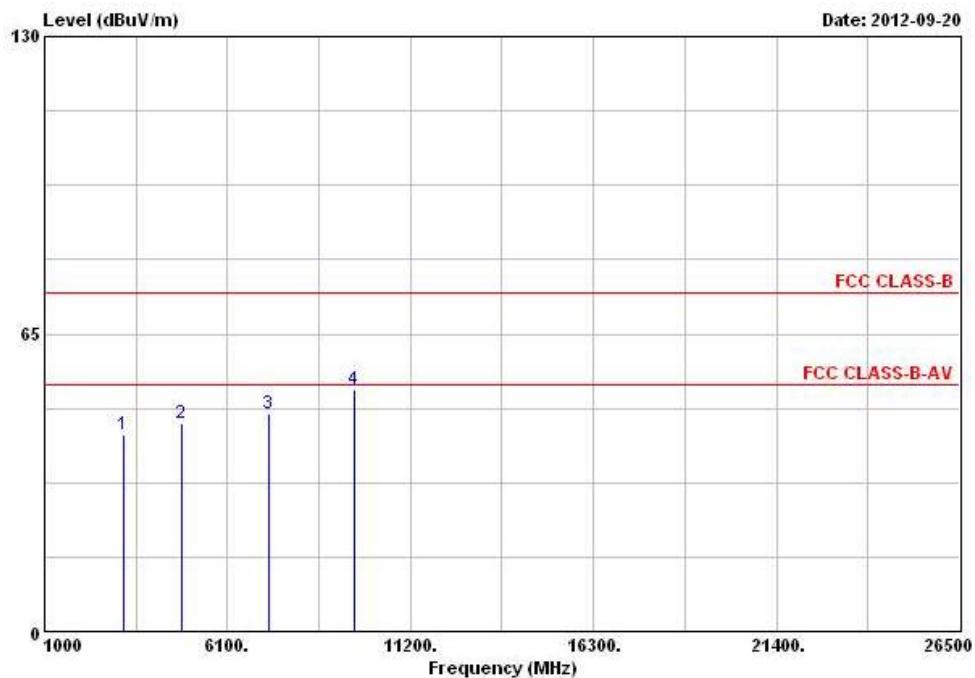

Freq	Level	Over Limit		ReadAntenna		Cable Preamp		Ant Pos	Table Pos
		Limit	Line	Level	Factor	Loss	Factor		
3216.000	42.92			40.08	30.21	5.42	32.79	Peak	---
4824.000	45.60	-8.40	54.00	40.00	32.79	5.43	32.62	PK	---
7236.000	47.65			39.81	35.58	5.14	32.88	Peak	---
9648.000	52.91			41.23	38.31	6.70	33.33	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 1, 3 and 4) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



## Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11G-20M	Test Freq. (FX)	F2
Operating Function	Transmit	Polarization	V

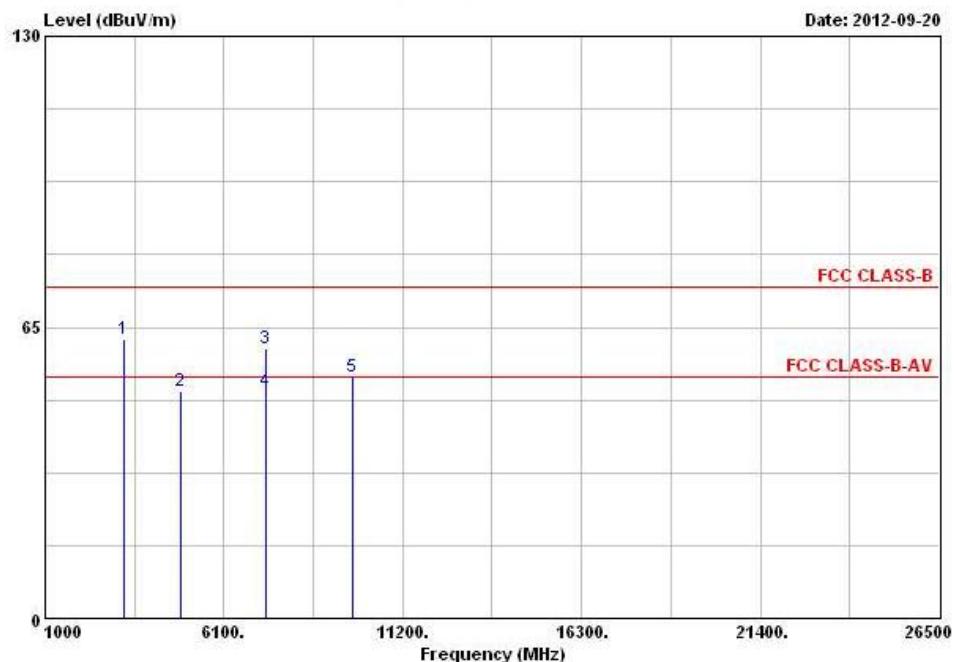

Freq	Level	Over Limit	Line	ReadAntenna		Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
				MHz	dBuV/m	dB	dBuV/m	dB		
1	3238.000	62.47		59.56	30.28	5.42	32.79	Peak	---	---
2	4874.000	50.79	-3.21	54.00	45.09	32.88	5.43	32.61 PK	---	---
3	7311.000	60.37	-13.63	74.00	52.16	35.74	5.36	32.89 Peak	---	---
4	7311.000	50.67	-3.33	54.00	42.46	35.74	5.36	32.89 Average	---	---
5	9748.000	53.92		41.98	38.52	6.74	33.32	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 1 and 5) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



## Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11G-20M	Test Freq. (FX)	F2
Operating Function	Transmit	Polarization	H

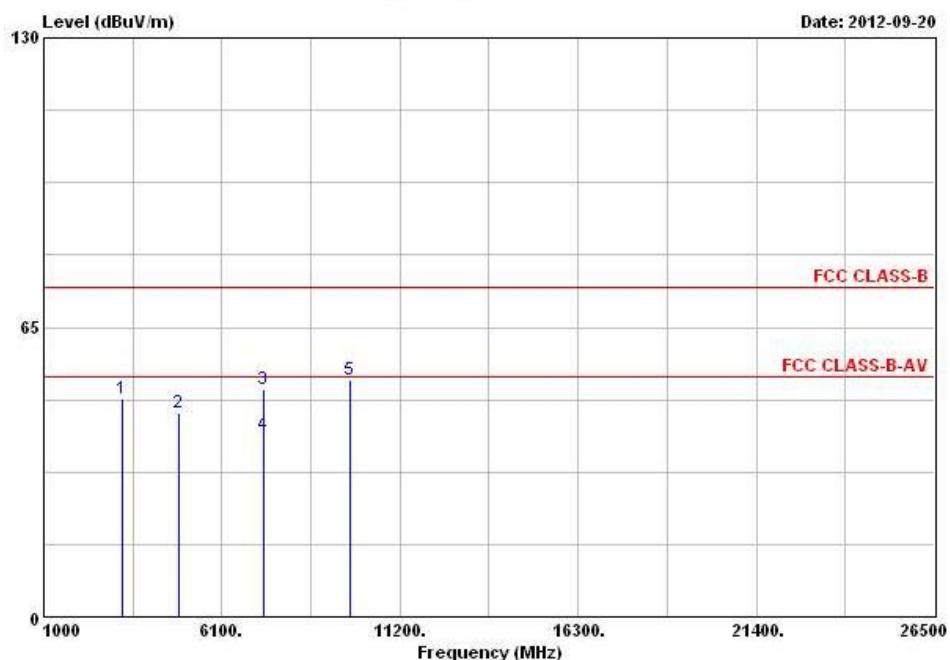

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table
		Line	Limit	Level	Factor	Loss	Factor		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 3249.000	49.05			46.14	30.28	5.42	32.79	Peak	---
2 @ 4874.000	45.92	-8.08	54.00	40.22	32.88	5.43	32.61	PK	---
3 7311.000	51.17	-22.83	74.00	42.96	35.74	5.36	32.89	Peak	---
4 7311.000	40.82	-13.18	54.00	32.61	35.74	5.36	32.89	Average	---
5 9748.000	53.08			41.14	38.52	6.74	33.32	Peak	---


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 5: For un-restricted bands, unwanted emissions (item 1 and 5) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

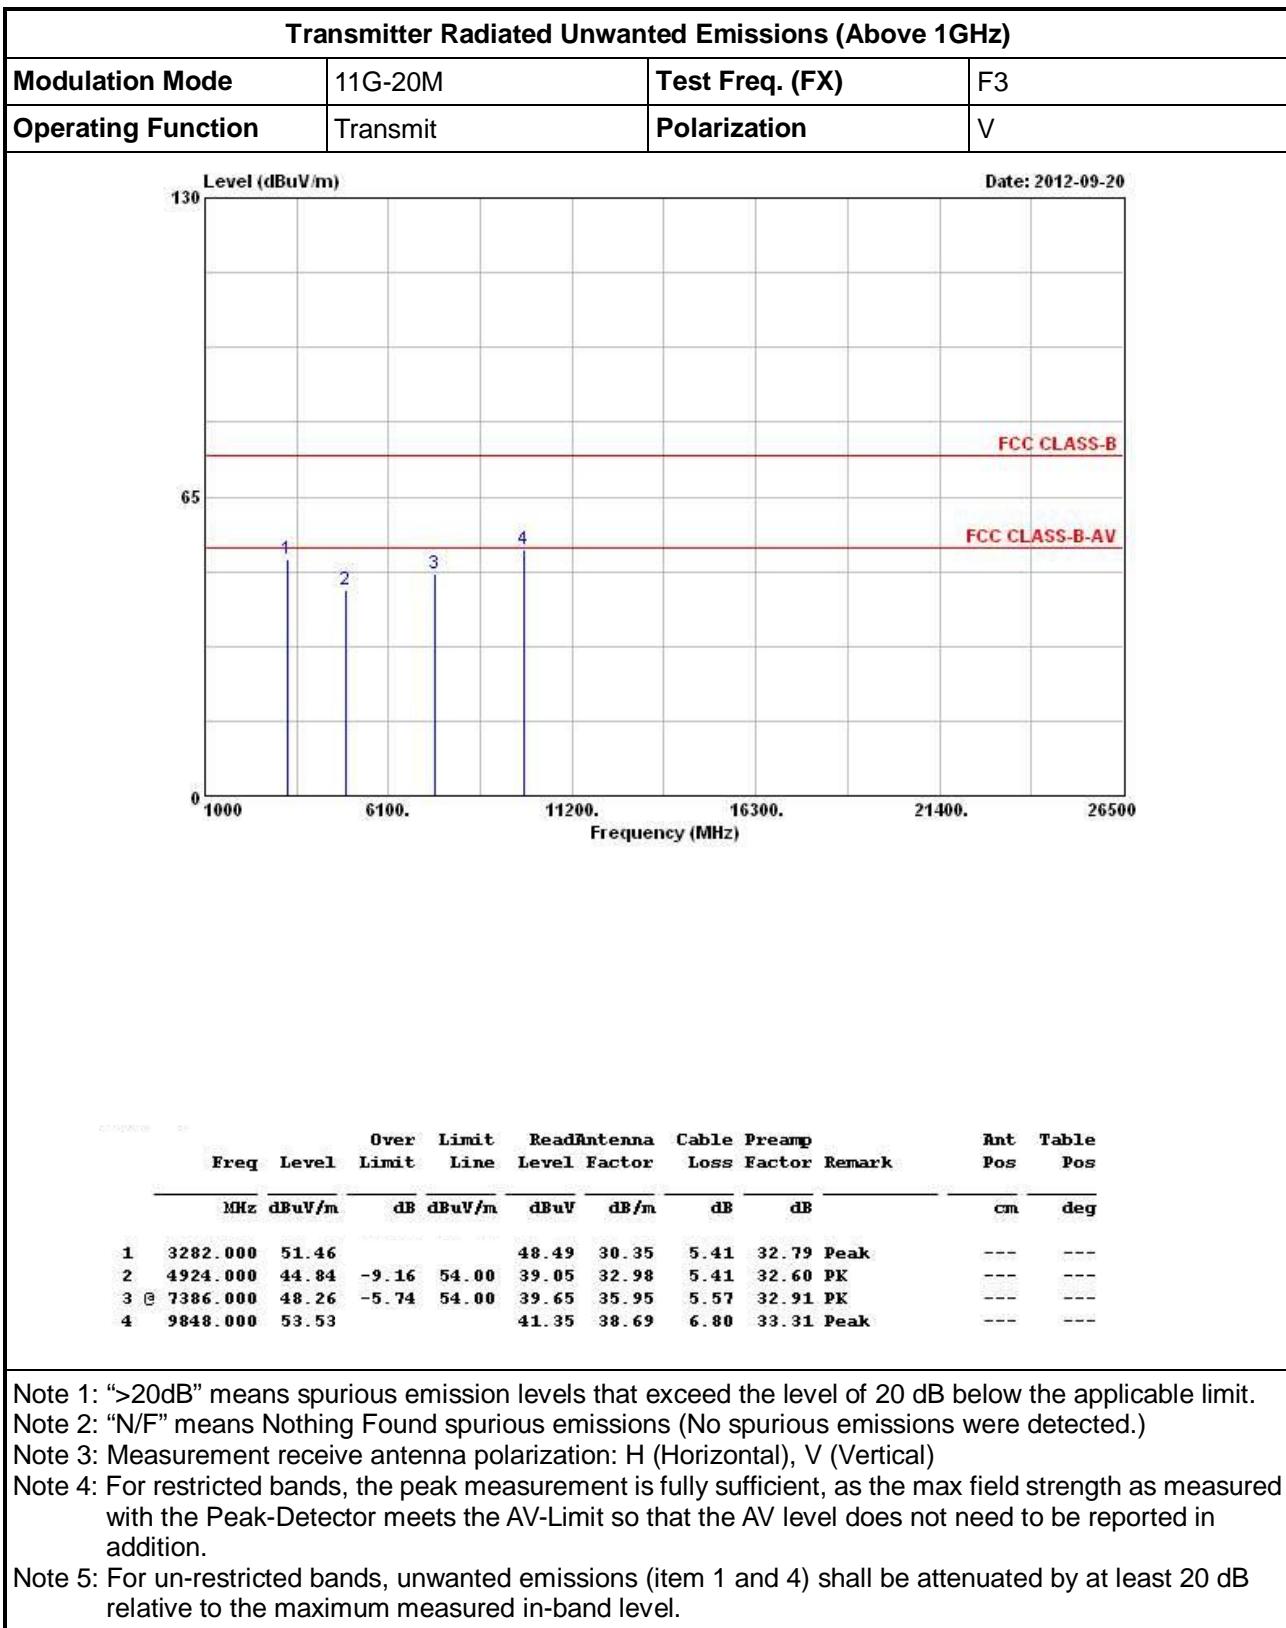



## Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11G-20M	Test Freq. (FX)	F3
Operating Function	Transmit	Polarization	H

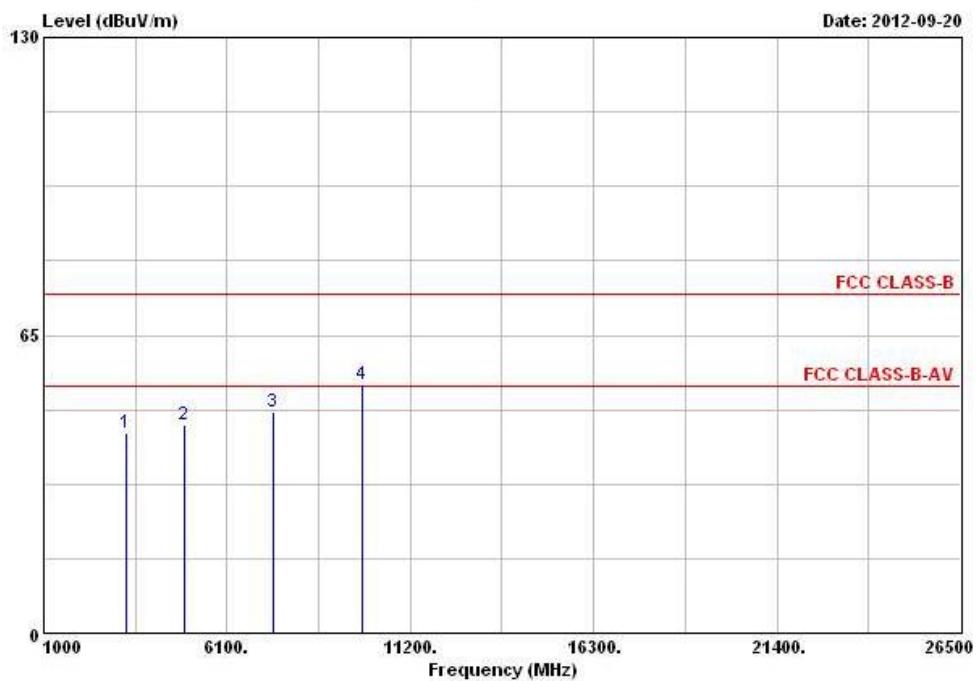

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant Pos	Table Pos
		Line	Limit	Antenna	Cable	Preamp			
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 3282.000	43.76			40.79	30.35	5.41	32.79 Peak	---	---
2 4924.000	45.62	-8.38	54.00	39.83	32.98	5.41	32.60 PK	---	---
3 7386.000	48.28	-5.72	54.00	39.67	35.95	5.57	32.91 PK	---	---
4 9848.000	54.26			42.08	38.69	6.80	33.31 Peak	---	---


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 5: For un-restricted bands, unwanted emissions (item 1 and 4) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

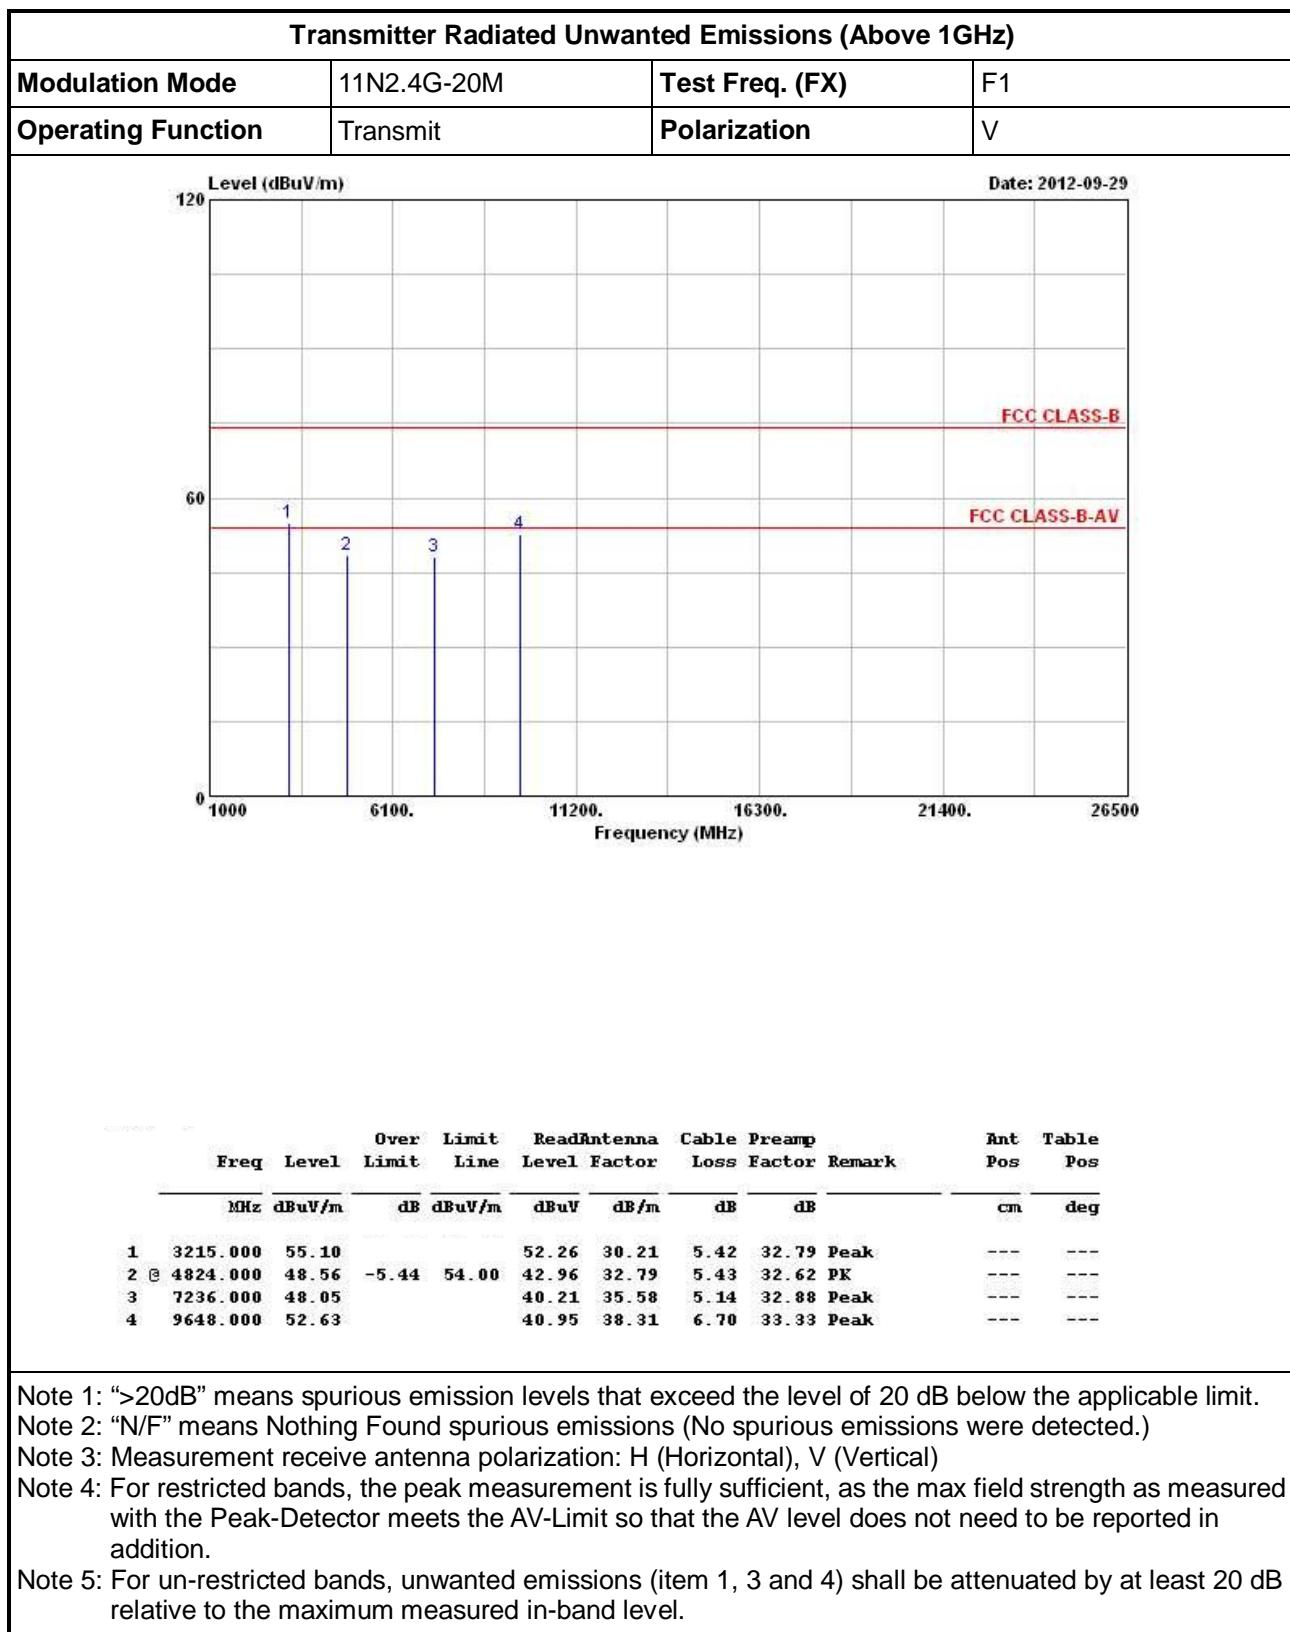3.6.8 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11N2.4G-20M-N<sub>TX</sub> 1



### Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11N2.4G-20M	Test Freq. (FX)	F1
Operating Function	Transmit	Polarization	H

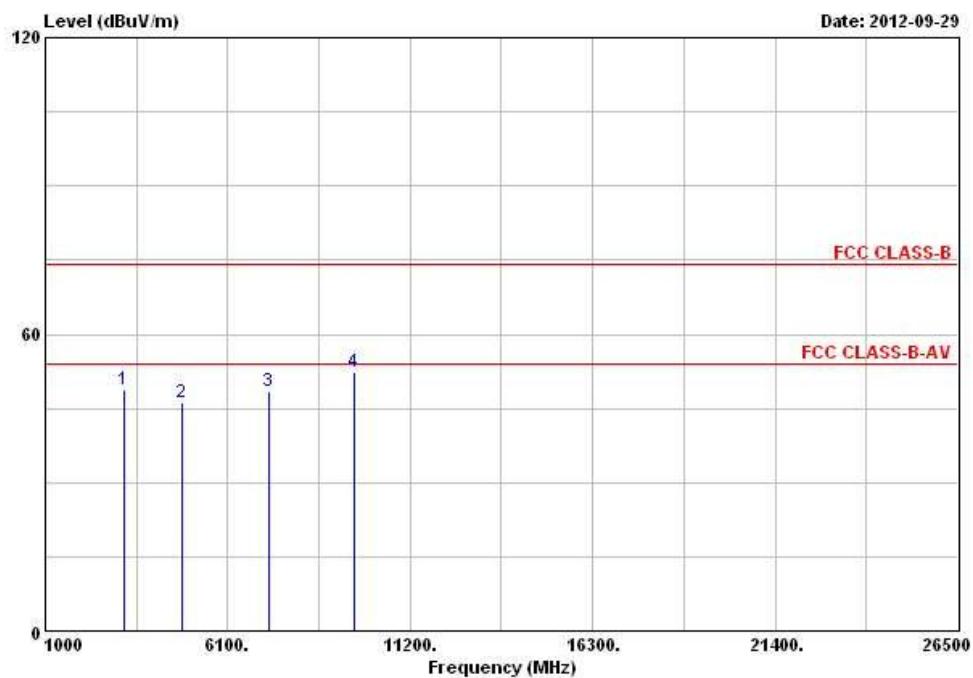

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark	Ant	Table
		Line	Level	Factor	Loss	Factor	Factor			
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/n	dB	dB	cm	deg	
1 3215.000	48.73			45.89	30.21	5.42	32.79	Peak	---	---
2 @ 4824.000	46.15	-7.85	54.00	40.55	32.79	5.43	32.62	PK	---	---
3 7236.000	48.36			40.52	35.58	5.14	32.88	Peak	---	---
4 9648.000	52.38			40.70	38.31	6.70	33.33	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 1, 3 and 4) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



## Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11N2.4G-20M	Test Freq. (FX)	F2
Operating Function	Transmit	Polarization	V

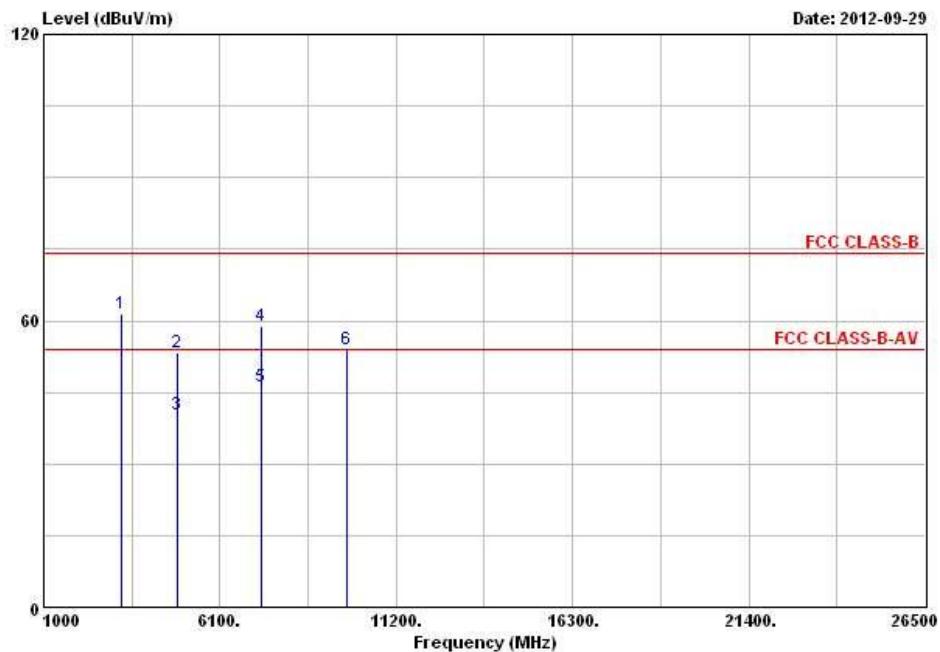

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table
		Limit	Line	Level	Factor	Loss	Factor		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	3249.000	61.37		58.46	30.28	5.42	32.79	Peak	---
2	4874.000	53.28	-20.72	74.00	47.58	32.88	5.43	32.61	Peak
3	4874.000	40.36	-13.64	54.00	34.66	32.88	5.43	32.61	Average
4	7311.000	58.96	-15.04	74.00	50.75	35.74	5.36	32.89	Peak
5	7311.000	46.12	-7.88	54.00	37.91	35.74	5.36	32.89	Average
6	9748.000	53.98			42.04	38.52	6.74	33.32	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 1 and 6) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



## Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11N2.4G-20M	Test Freq. (FX)	F2
Operating Function	Transmit	Polarization	H

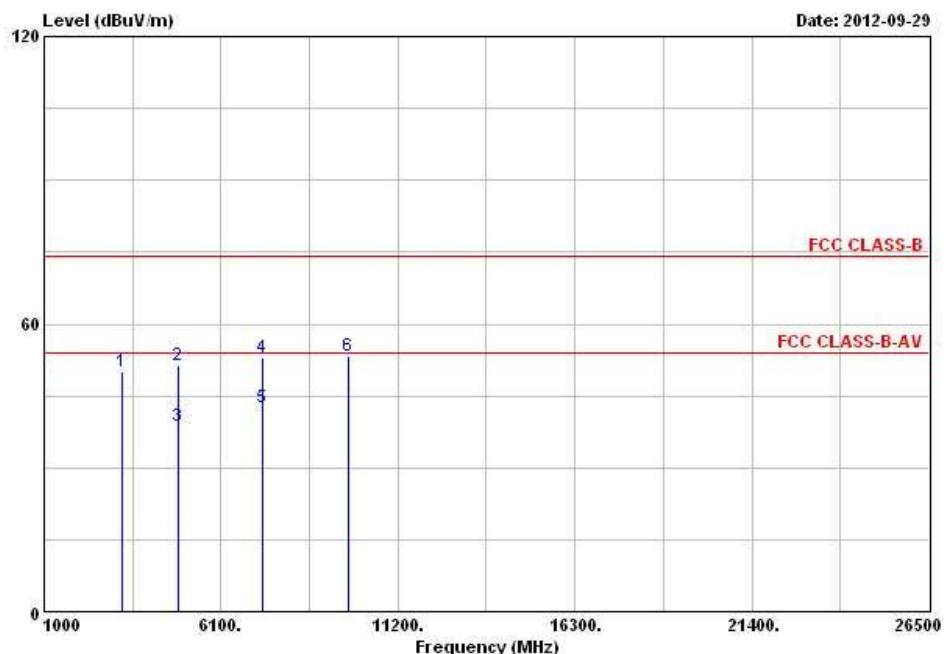

Freq	Level	Over Limit	Line	ReadAntenna		Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
				MHz	dBuV/m	dB	dBuV/m	dB	dB	deg
1	3249.000	50.11		47.20	30.28	5.42	32.79	Peak	---	---
2	4874.000	51.29	-22.71	74.00	45.59	32.88	5.43	32.61	Peak	---
3	4874.000	38.69	-15.31	54.00	32.99	32.88	5.43	32.61	Average	---
4	7311.000	53.03	-20.97	74.00	44.82	35.74	5.36	32.89	Peak	---
5	7311.000	42.52	-11.48	54.00	34.31	35.74	5.36	32.89	Average	---
6	9748.000	53.22		41.28	38.52	6.74	33.32	Peak	---	---


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.


Note 5: For un-restricted bands, unwanted emissions (item 1 and 6) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.

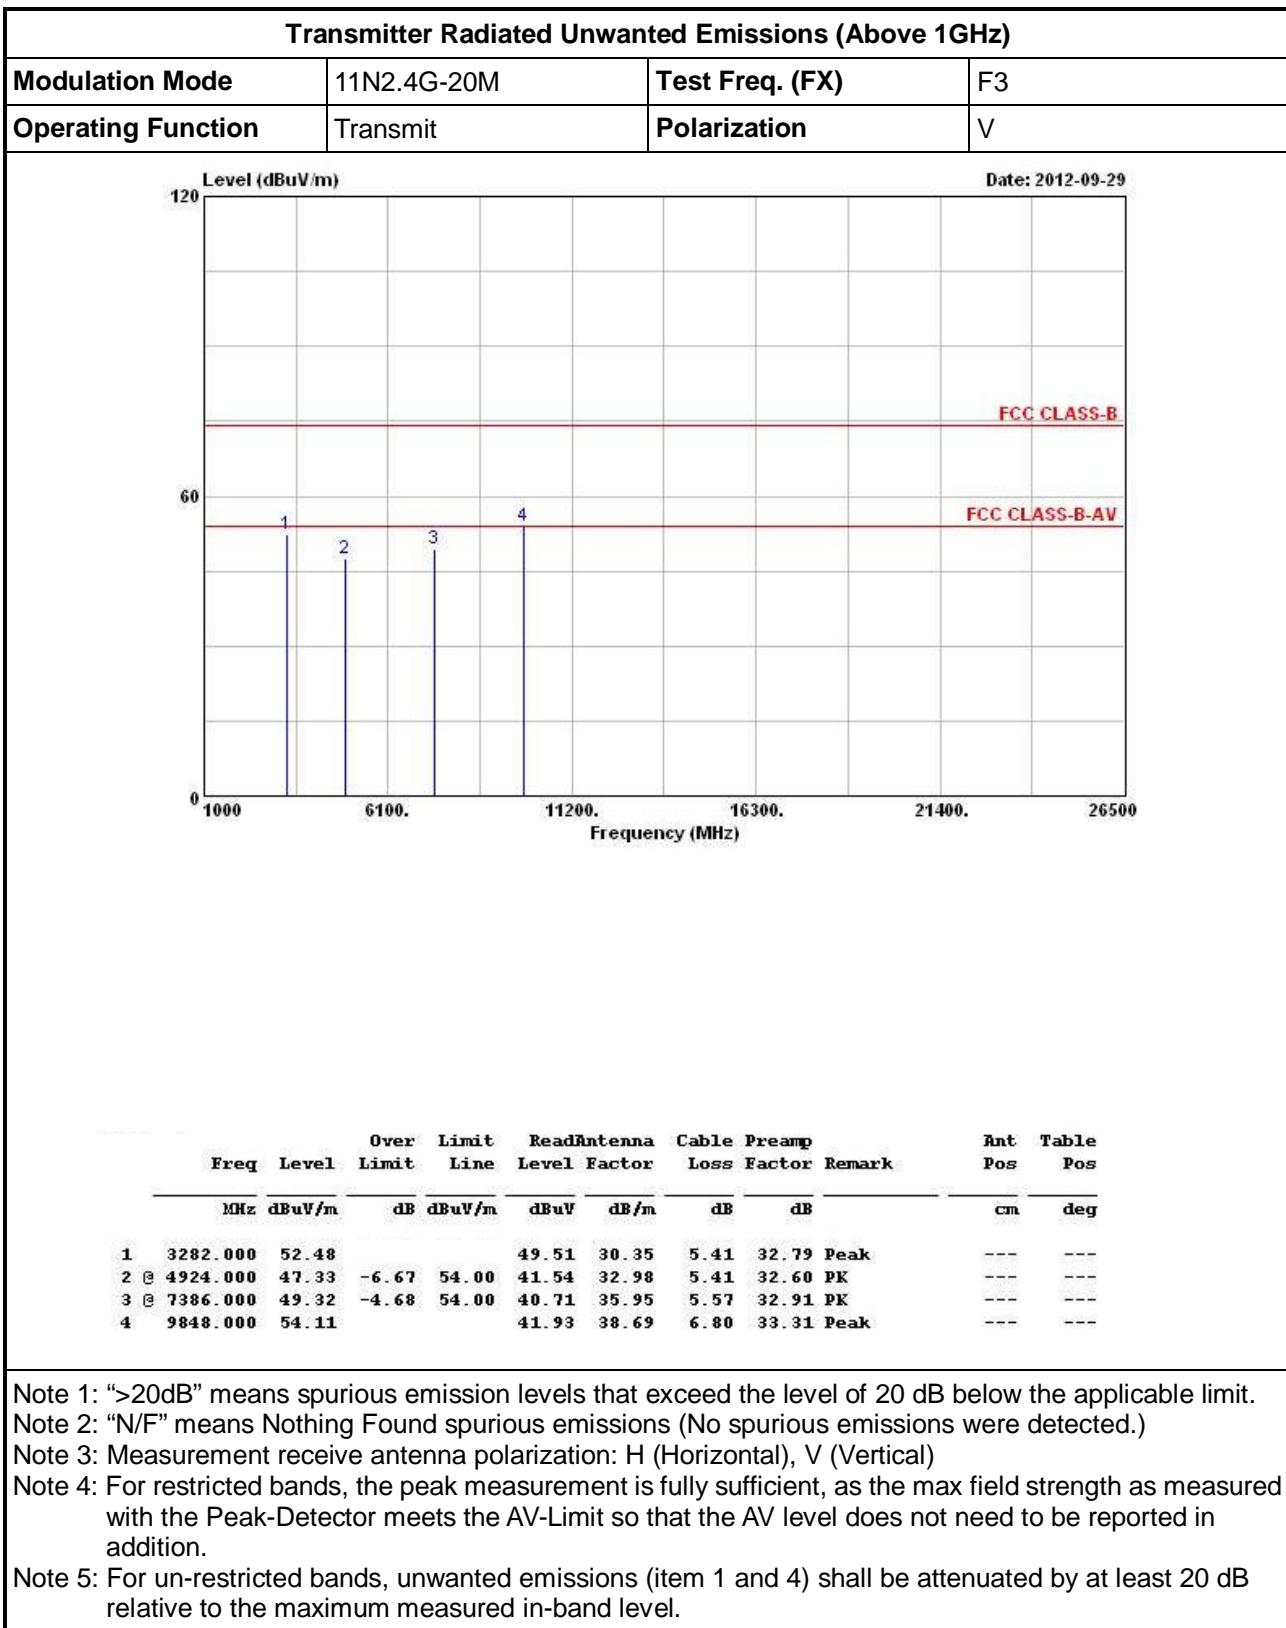



## Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11N2.4G-20M-N <sup>1X1</sup>	Test Freq. (FX)	F3
Operating Function	Transmit	Polarization	H

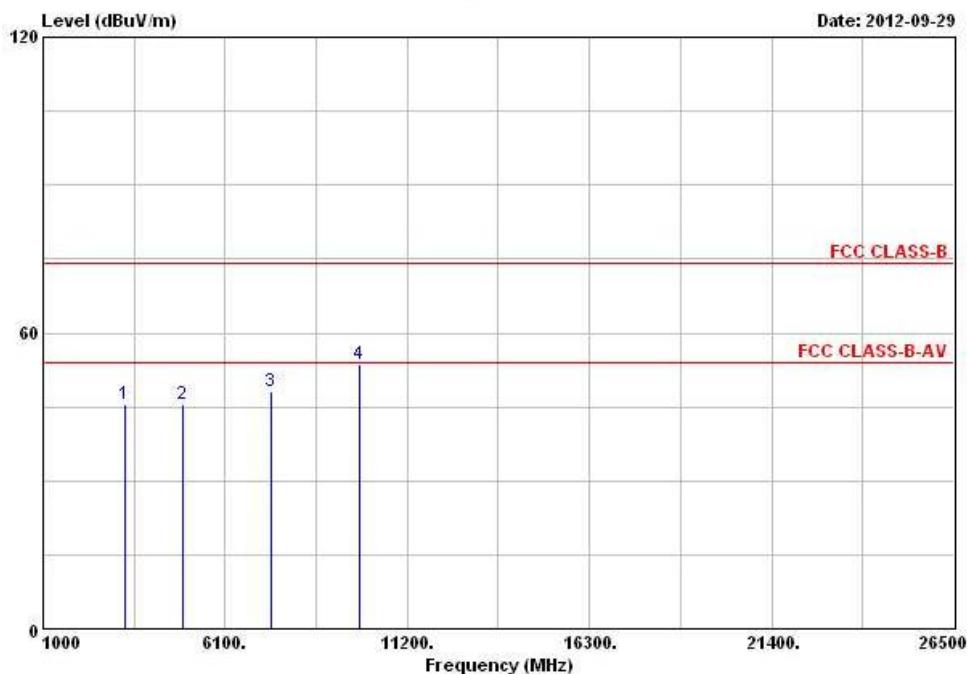

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table
		Limit	Line	Antenna	Cable	Loss	Factor		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 3282.000	45.55			42.58	30.35	5.41	32.79 Peak	---	---
2 @ 4924.000	45.61	-8.39	54.00	39.82	32.98	5.41	32.60 PK	---	---
3 @ 7386.000	48.19	-5.81	54.00	39.58	35.95	5.57	32.91 PK	---	---
4 9848.000	53.60			41.42	38.69	6.80	33.31 Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 1 and 4) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



### 3.6.9 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 1N2.4G-40M-N<sub>TX</sub> 1

Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	11N2.4G-40M	Test Freq. (FX)	F4
Operating Function	Transmit	Polarization	V

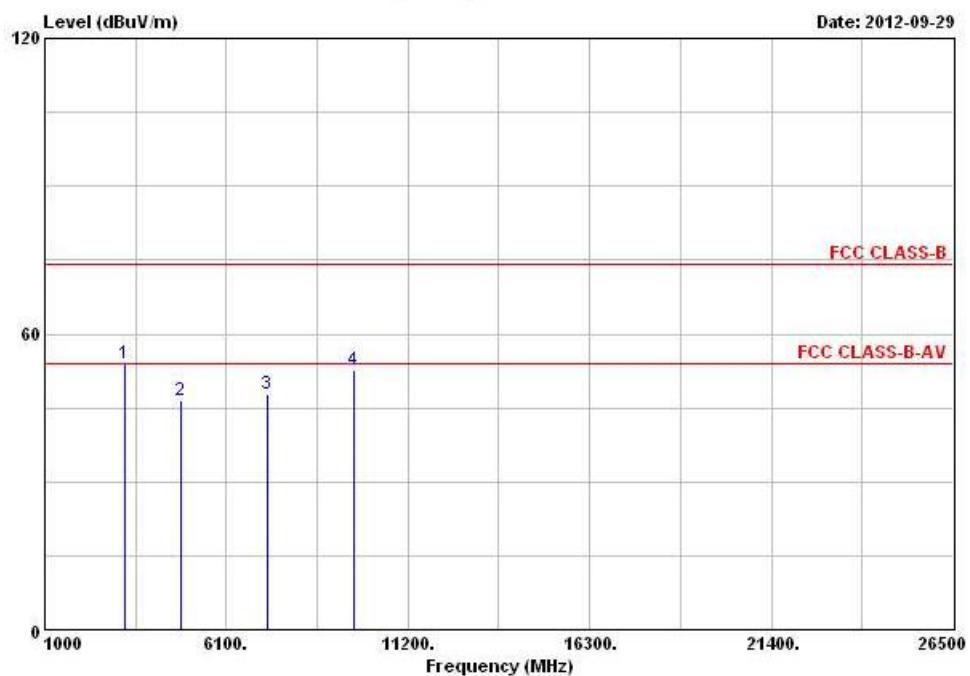

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark	Ant	Table
		Limit	Line	Level	Factor	Loss	Factor			
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 3229.000	53.87			50.99	30.25	5.42	32.79	Peak	---	---
2 @ 4844.000	46.54	-7.46	54.00	40.91	32.82	5.43	32.62	PK	---	---
3 @ 7266.000	47.87	-6.13	54.00	39.84	35.66	5.25	32.88	PK	---	---
4 9688.000	52.72			40.94	38.38	6.72	33.32	Peak	---	---

Note 1: “>20dB” means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 1 and 4) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



## Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11N2.4G-40M	Test Freq. (FX)	F4
Operating Function	Transmit	Polarization	H

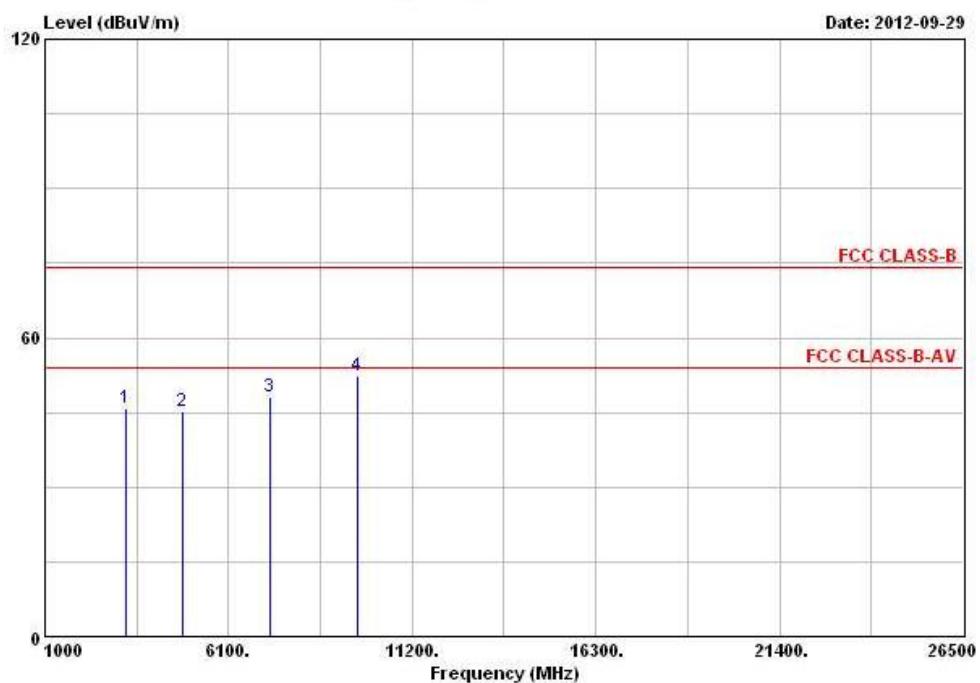

Freq	Level	Over Limit	Line	ReadAntenna		Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
				MHz	dBuV/m	dB	dBuV/m	dB	dB	deg
1	3229.000	45.97			43.09	30.25	5.42	32.79 Peak	---	---
2	4844.000	45.26	-8.74	54.00	39.63	32.82	5.43	32.62 PK	---	---
3	7266.000	48.02	-5.98	54.00	39.99	35.66	5.25	32.88 PK	---	---
4	9688.000	52.45			40.67	38.38	6.72	33.32 Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 1 and 4) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



## Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11N2.4G-40M	Test Freq. (FX)	F5
Operating Function	Transmit	Polarization	V

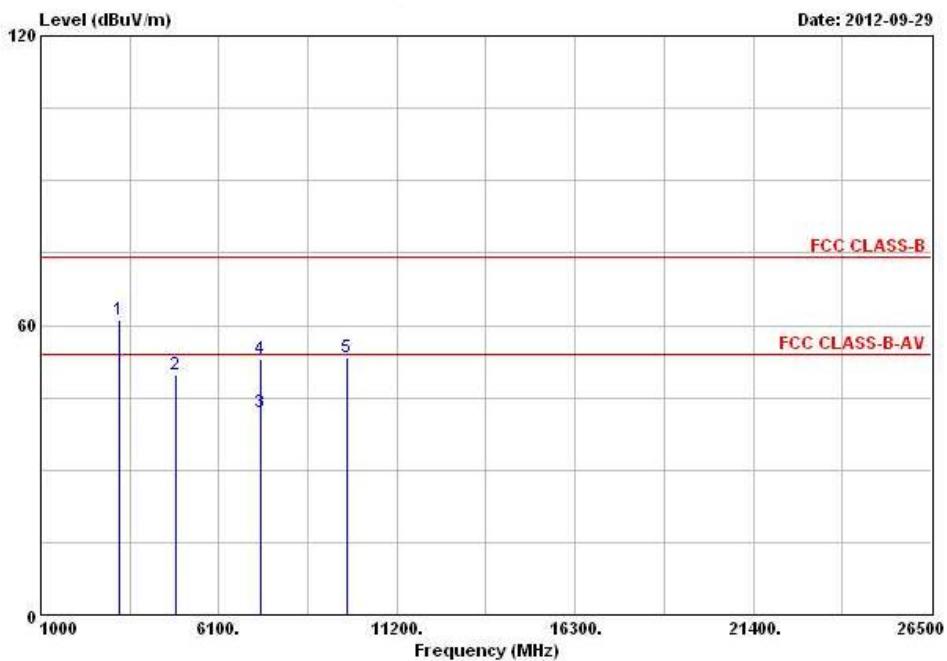

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant Pos	Table Pos
		Line	Limit	Level	Factor	Loss	Factor		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 3249.000	61.26			58.35	30.28	5.42	32.79	Peak	---
2 @ 4874.000	49.82	-4.18	54.00	44.12	32.88	5.43	32.61	PK	---
3 7311.000	41.91	-12.09	54.00	33.70	35.74	5.36	32.89	Average	---
4 7311.000	52.85	-21.15	74.00	44.64	35.74	5.36	32.89	Peak	---
5 9748.000	53.40			41.46	38.52	6.74	33.32	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 1 and 5) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



## Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11N2.4G-40M	Test Freq. (FX)	F5
Operating Function	Transmit	Polarization	H

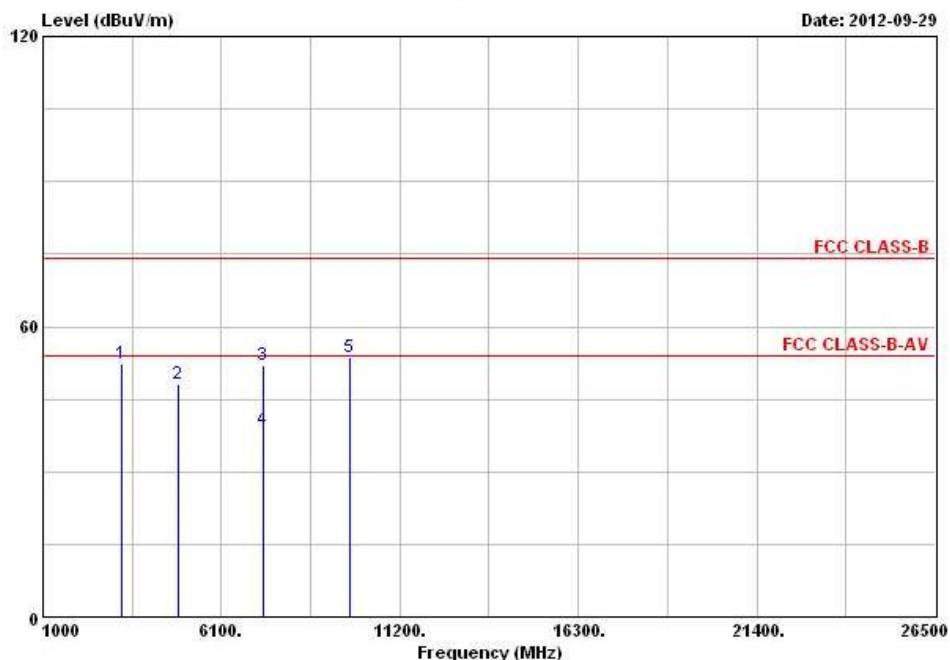

Freq	Level	Over Limit	Line	ReadAntenna		Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
				MHz	dBuV/m	dB	dBuV/m	dB/m	dB	dB
1	3249.000	52.30			49.39	30.28	5.42	32.79	Peak	---
2	4874.000	47.97	-6.03	54.00	42.27	32.88	5.43	32.61	PK	---
3	7311.000	51.88	-22.12	74.00	43.67	35.74	5.36	32.89	Peak	---
4	7311.000	38.71	-15.29	54.00	30.50	35.74	5.36	32.89	Average	---
5	9748.000	53.59			41.65	38.52	6.74	33.32	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 1 and 5) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



## Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11N2.4G-40M	Test Freq. (FX)	F6
Operating Function	Transmit	Polarization	V

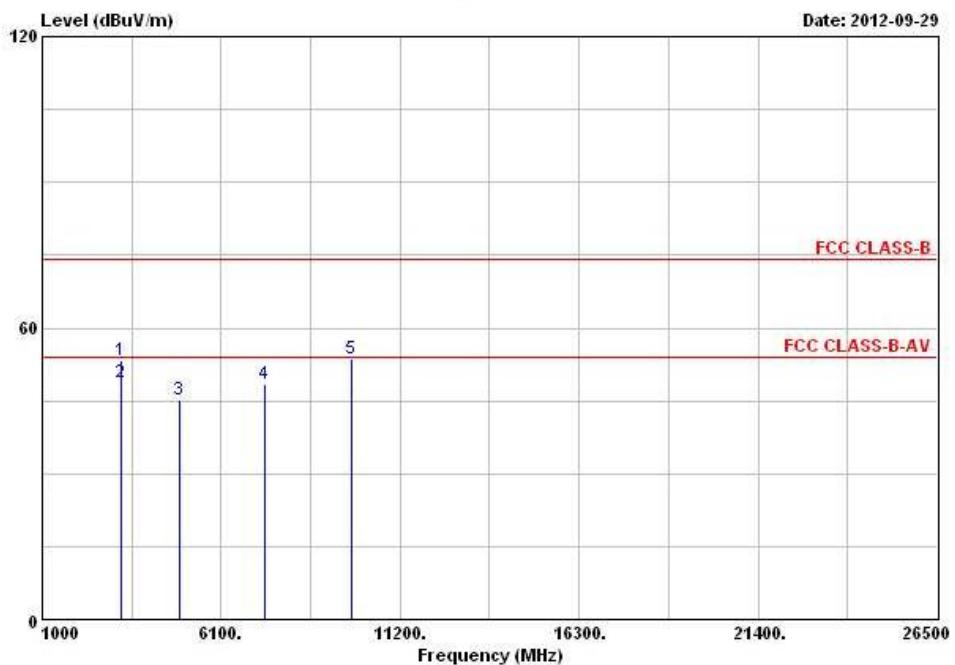

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant Pos	Table Pos
		Line	Limit	Antenna	Cable	Preamp			
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 3269.000	53.33			50.38	30.32	5.42	32.79 Peak	---	---
2 @ 3269.000	48.62			45.67	30.32	5.42	32.79 Average	---	---
3 4904.000	45.29	-8.71	54.00	39.54	32.94	5.42	32.61 PK	---	---
4 @ 7356.000	48.38	-5.62	54.00	39.95	35.87	5.46	32.90 PK	---	---
5 9808.000	53.66			41.58	38.62	6.78	33.32 Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 1, 2 and 5) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



## Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11N2.4G-40M	Test Freq. (FX)	F6
Operating Function	Transmit	Polarization	H

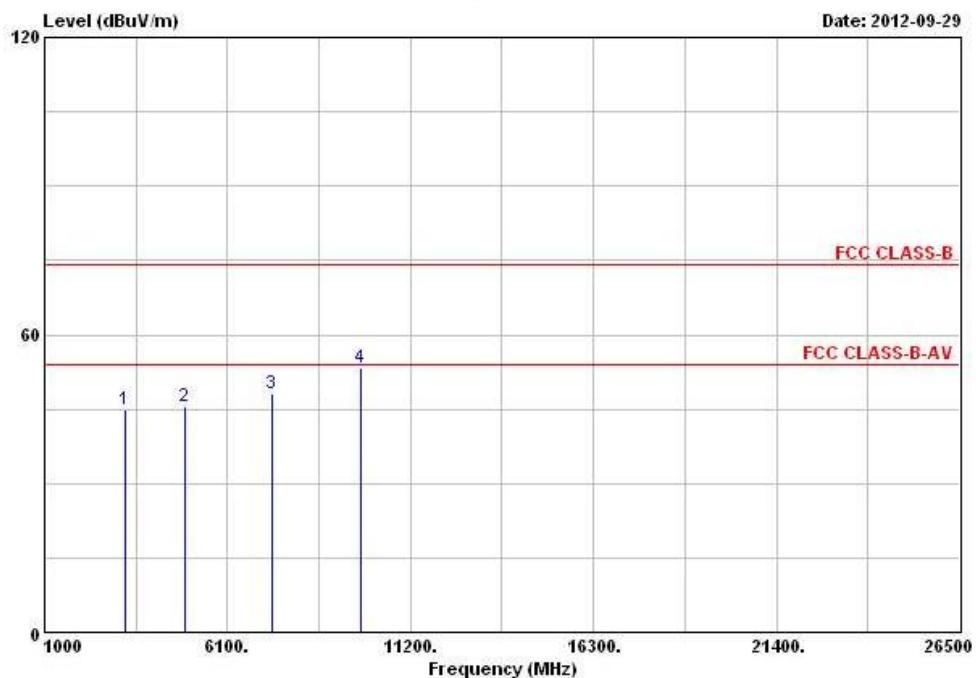

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table
		Line	Limit	Antenna	Cable	Preamp	Pos		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 3269.000	44.91			41.96	30.32	5.42	32.79	Peak	---
2 4904.000	45.46	-8.54	54.00	39.71	32.94	5.42	32.61	PK	---
3 7356.000	48.15	-5.85	54.00	39.72	35.87	5.46	32.90	PK	---
4 9808.000	53.27			41.19	38.62	6.78	33.32	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 1 and 4) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



### 3.6.10 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11N2.4G-20M- N<sub>TX</sub> 2

Freq	Level	Over	Limit	ReadAntenna		Cable		Preamp	Remark	Ant	Table
		Limit	Line	Level	Factor	Loss	Factor				
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		
1 3210.000	57.99			55.15	30.21	5.42	32.79	Peak	---	---	
2 4824.000	49.19	-4.81	54.00	43.59	32.79	5.43	32.62	PK	---	---	
3 7236.000	48.67			40.83	35.58	5.14	32.88	Peak	---	---	
4 9648.000	53.59			41.91	38.31	6.70	33.33	Peak	---	---	

Note 1: “>20dB” means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected).

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 1, 3 and 4) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



### Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11N2.4G-20M	Test Freq. (FX)	F1
Operating Function	Transmit	Polarization	H

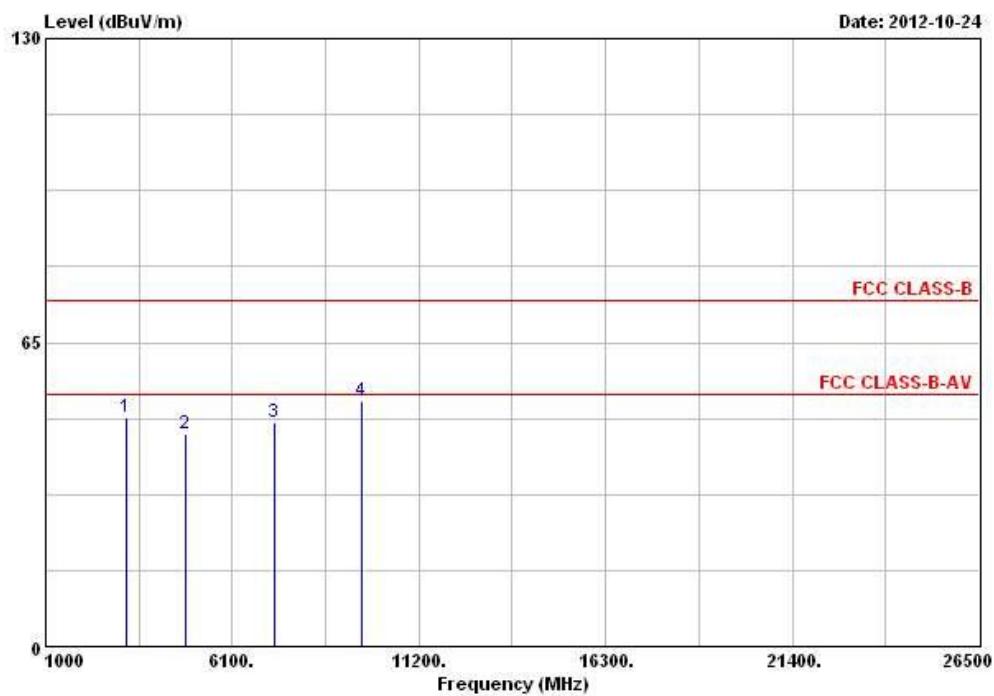

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark	Ant	Table
		Limit	Line	Level	Factor	Cable	Preamp			
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 3210.000	48.97			46.13	30.21	5.42	32.79	Peak	---	---
2 4824.000	45.59	-8.41	54.00	39.99	32.79	5.43	32.62	PK	---	---
3 7236.000	47.85			40.01	35.58	5.14	32.88	Peak	---	---
4 9648.000	52.33			40.65	38.31	6.70	33.33	Peak	---	---

Note 1: “>20dB” means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 1, 3 and 4) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



## Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11N2.4G-20M	Test Freq. (FX)	F2
Operating Function	Transmit	Polarization	V

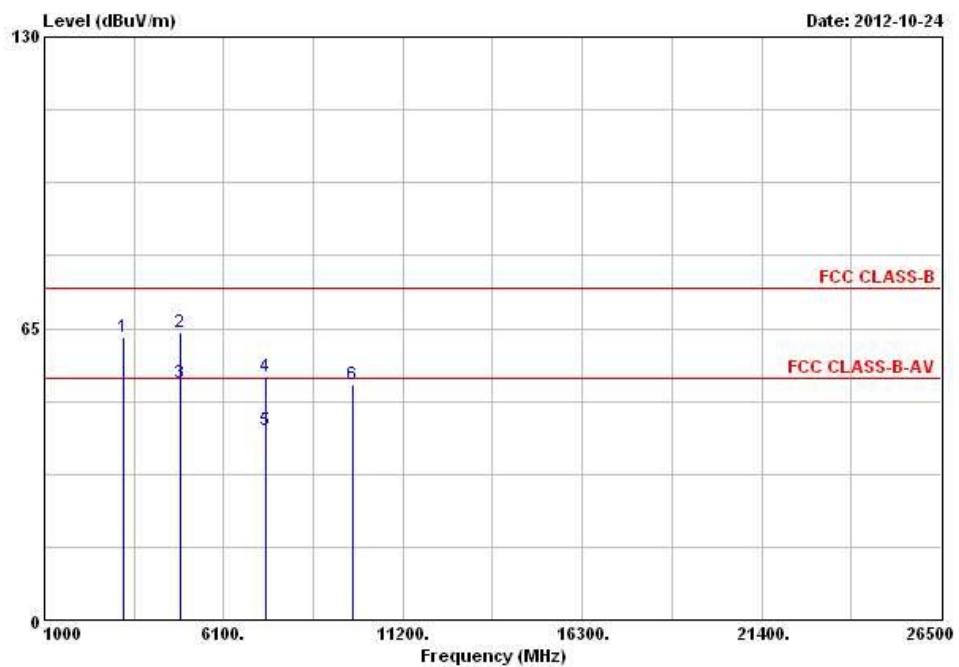

Freq	Level	Over Limit	Read	Antenna	Cable Preamp			Ant Pos	Table Pos
					Line	Antenna Factor	Cable Loss		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/n	dB	dB	cm	deg
1	3238.000	63.02		60.11	30.28	5.42	32.79	Peak	---
2	4874.000	64.26	-9.74	74.00	58.56	32.88	5.43	32.61	Peak
3	4874.000	52.81	-1.19	54.00	47.11	32.88	5.43	32.61	Average
4	7311.000	54.37	-19.63	74.00	46.16	35.74	5.36	32.89	Peak
5	7311.000	42.25	-11.75	54.00	34.04	35.74	5.36	32.89	Average
6	9748.000	52.57		40.63	38.52	6.74	33.32	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 1 and 6) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



### Transmitter Radiated Unwanted Emissions (Above 1GHz)

<b>Modulation Mode</b>	11N2.4G-20M	<b>Test Freq. (FX)</b>	F2
<b>Operating Function</b>	Transmit	<b>Polarization</b>	H

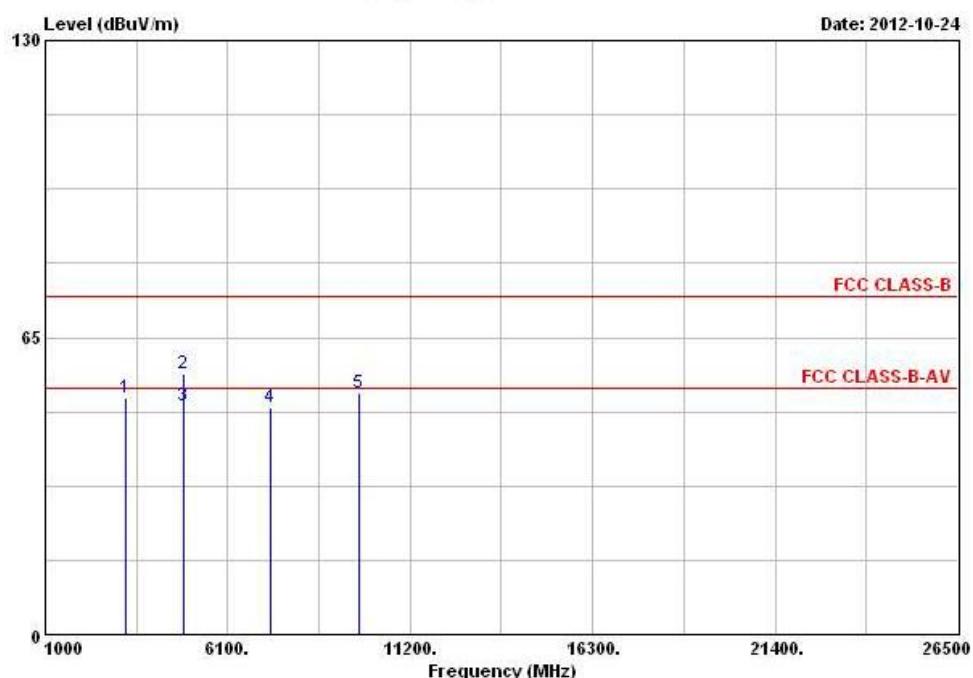

Freq	Level	Over Limit		ReadAntenna		Cable Preamp		Ant Pos	Table Pos
		Limit	Line	Level	Factor	Loss	Factor		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
3238.000	51.79			48.88	30.28	5.42	32.79	Peak	---
4874.000	57.12	-16.88	74.00	51.42	32.88	5.43	32.61	Peak	---
4874.000	50.10	-3.90	54.00	44.40	32.88	5.43	32.61	Average	---
7311.000	49.52	-4.48	54.00	41.31	35.74	5.36	32.89	PK	---
9748.000	52.94			41.00	38.52	6.74	33.32	Peak	---

Note 1: “>20dB” means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 1: >25dB means spurious emission levels that exceed the level of 25 dB below the applied Note 2: "NF" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 1 and 5) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



## Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11N2.4G-20M	Test Freq. (FX)	F3
Operating Function	Transmit	Polarization	V

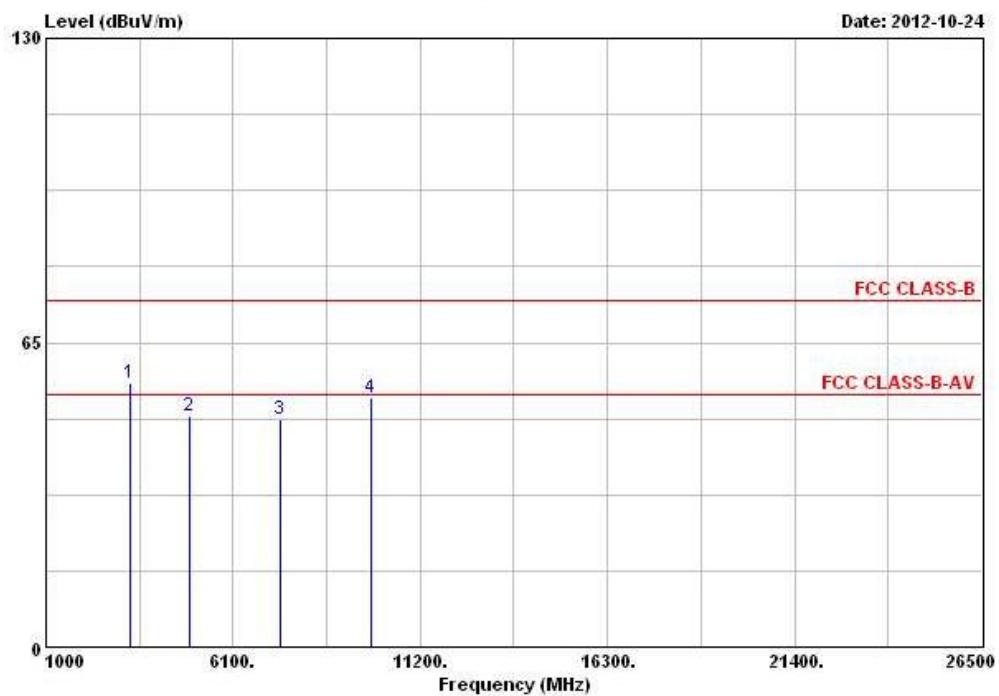

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant Pos	Table Pos
		Line	Limit	Level	Factor	Cable	Preamp		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 3273.000	56.35			53.37	30.35	5.42	32.79 Peak	---	---
2 @ 4924.000	49.49	-4.51	54.00	43.70	32.98	5.41	32.60 PK	---	---
3 @ 7386.000	48.78	-5.22	54.00	40.17	35.95	5.57	32.91 PK	---	---
4 9848.000	53.19			41.01	38.69	6.80	33.31 Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 1 and 4) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



## Transmitter Radiated Unwanted Emissions (Above 1GHz)

<b>Modulation Mode</b>	11N2.4G-20M	<b>Test Freq. (FX)</b>	F3
<b>Operating Function</b>	Transmit	<b>Polarization</b>	H

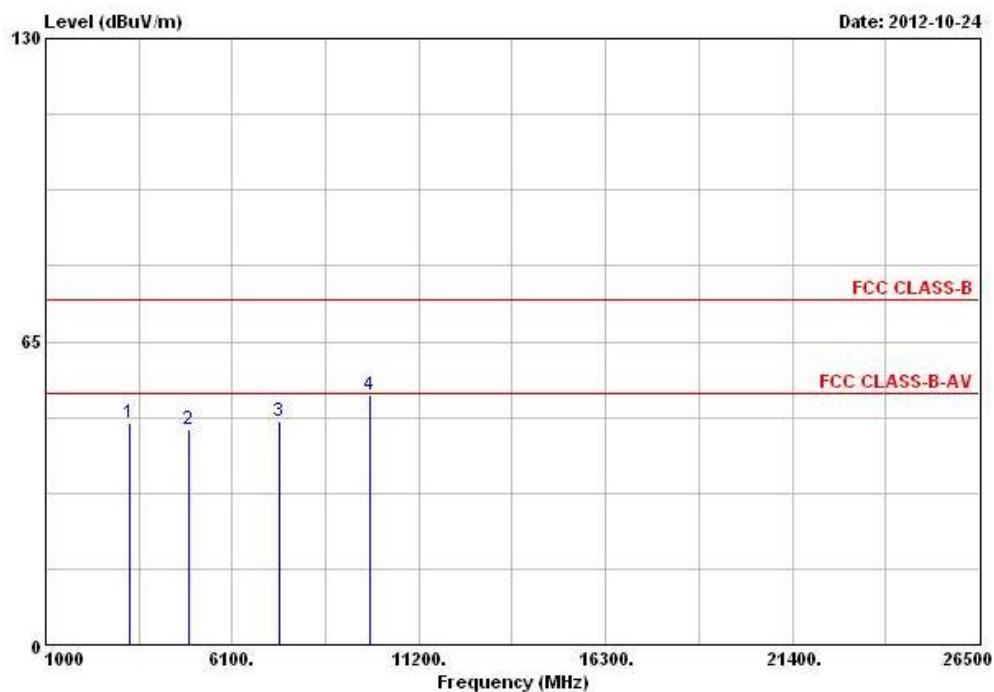

Freq	Level	Over Limit		ReadAntenna		Cable Preamp			Ant Pos	Table Pos
		Limit	Line	Level	Factor	Loss	Factor	Remark		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 3273.000	47.39			44.41	30.35	5.42	32.79	Peak	---	---
2 4924.000	46.07	-7.93	54.00	40.28	32.98	5.41	32.60	PK	---	---
3 7386.000	48.02	-5.98	54.00	39.41	35.95	5.57	32.91	PK	---	---
4 9848.000	53.46			41.28	38.69	6.80	33.31	Peak	---	---

Note 1: “>20dB” means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 1 and 4) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.




### 3.6.11 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11N2.4G-40M- N<sub>TX</sub> 2



### Transmitter Radiated Unwanted Emissions (Above 1GHz)

<b>Modulation Mode</b>	11N2.4G-40M	<b>Test Freq. (FX)</b>	F4
<b>Operating Function</b>	Transmit	<b>Polarization</b>	H

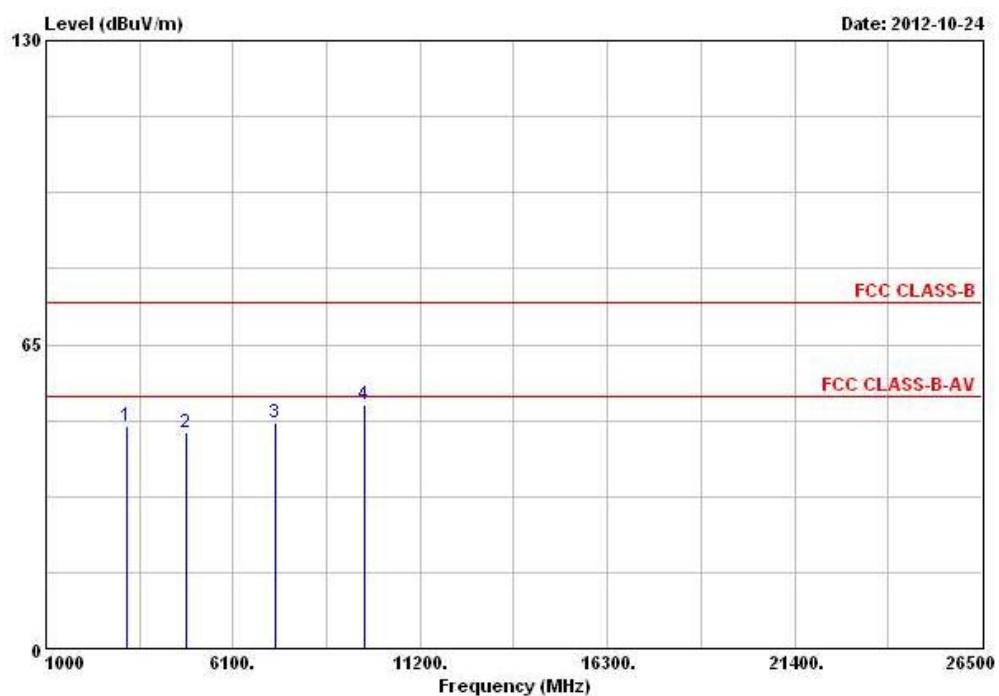

Freq	Level	Over Limit		ReadAntenna		Cable Preamp		Ant Pos	Table Pos	
		Limit	Line	Level	Factor	Loss	Factor			
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 3217.000	47.43			44.59	30.21	5.42	32.79	Peak	---	---
2 4844.000	46.15	-7.85	54.00	40.52	32.82	5.43	32.62	PK	---	---
3 7266.000	48.14	-5.86	54.00	40.11	35.66	5.25	32.88	PK	---	---
4 9688.000	52.24			40.46	38.38	6.72	33.32	Peak	---	---

Note 1: “>20dB” means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 1 and 4) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



## Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11N2.4G-40M	Test Freq. (FX)	F5
Operating Function	Transmit	Polarization	V

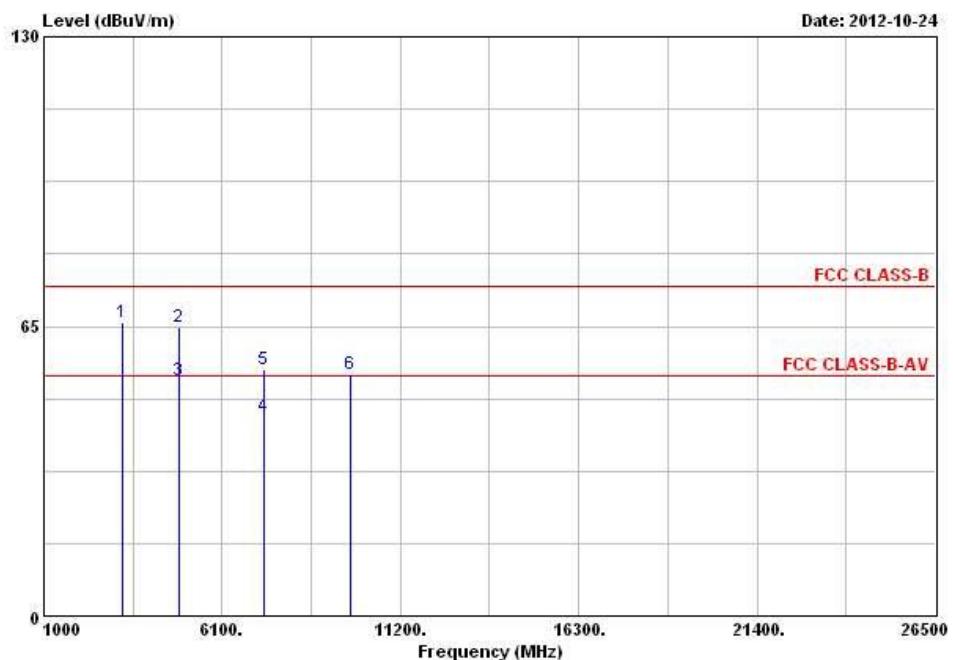

Freq	Level	Over Limit	Line	Read	Antenna	Cable Preamp			Ant Pos	Table Pos
						Level	Factor	Loss		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 3238.000	65.78			62.87	30.28	5.42	32.79	Peak	---	---
2 4874.000	64.71	-9.29	74.00	59.01	32.88	5.43	32.61	Peak	---	---
3 4874.000	52.72	-1.28	54.00	47.02	32.88	5.43	32.61	Average	---	---
4 7311.000	44.80	-9.20	54.00	36.59	35.74	5.36	32.89	Average	---	---
5 7311.000	55.36	-18.64	74.00	47.15	35.74	5.36	32.89	Peak	---	---
6 9748.000	54.24			42.30	38.52	6.74	33.32	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 1 and 6) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



### Transmitter Radiated Unwanted Emissions (Above 1GHz)

<b>Modulation Mode</b>	11N2.4G-40M	<b>Test Freq. (FX)</b>	F5
<b>Operating Function</b>	Transmit	<b>Polarization</b>	H

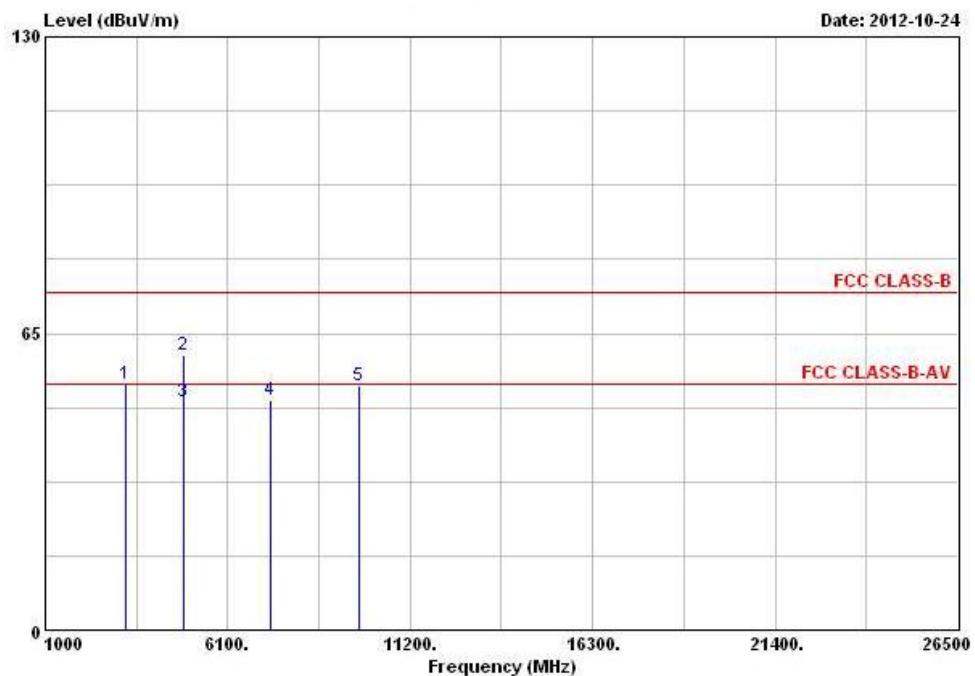

Freq	Level	Over Limit		ReadAntenna		Cable Preamp		Ant Pos	Table Pos
		Limit	Line	Level	Factor	Loss	Factor		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 3238.000	54.02			51.11	30.28	5.42	32.79	Peak	---
2 4874.000	60.12	-13.88	74.00	54.42	32.88	5.43	32.61	Peak	---
3 @ 4874.000	50.04	-3.96	54.00	44.34	32.88	5.43	32.61	Average	---
4 @ 7311.000	50.50	-3.50	54.00	42.29	35.74	5.36	32.89	PK	---
5 9748.000	53.54			41.60	38.52	6.74	33.32	Peak	---

Note 1: “>20dB” means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 1 and 5) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



## Transmitter Radiated Unwanted Emissions (Above 1GHz)

<b>Modulation Mode</b>	11N2.4G-40M	<b>Test Freq. (FX)</b>	F6
<b>Operating Function</b>	Transmit	<b>Polarization</b>	V

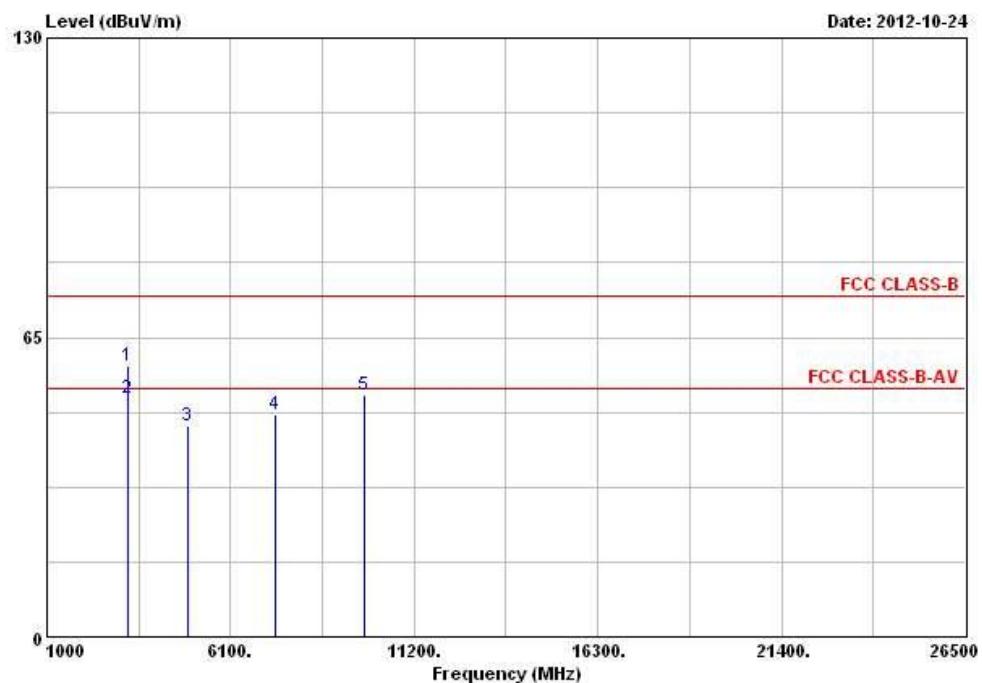

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark	Ant	Table
		Line	Level	Factor		Loss	Factor			
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 3266.000	58.75	-15.25	74.00	55.80	30.32	5.42	32.79	Peak	---	---
2 @ 3266.000	51.71	-2.29	54.00	48.76	30.32	5.42	32.79	Average	---	---
3 4904.000	45.63	-8.37	54.00	39.88	32.94	5.42	32.61	PK	---	---
4 @ 7356.000	48.41	-5.59	54.00	39.98	35.87	5.46	32.90	PK	---	---
5 9808.000	52.45			40.37	38.62	6.78	33.32	Peak	---	---

Note 1: “>20dB” means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 4) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



## Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11N2.4G-40M	Test Freq. (FX)	F6
Operating Function	Transmit	Polarization	H

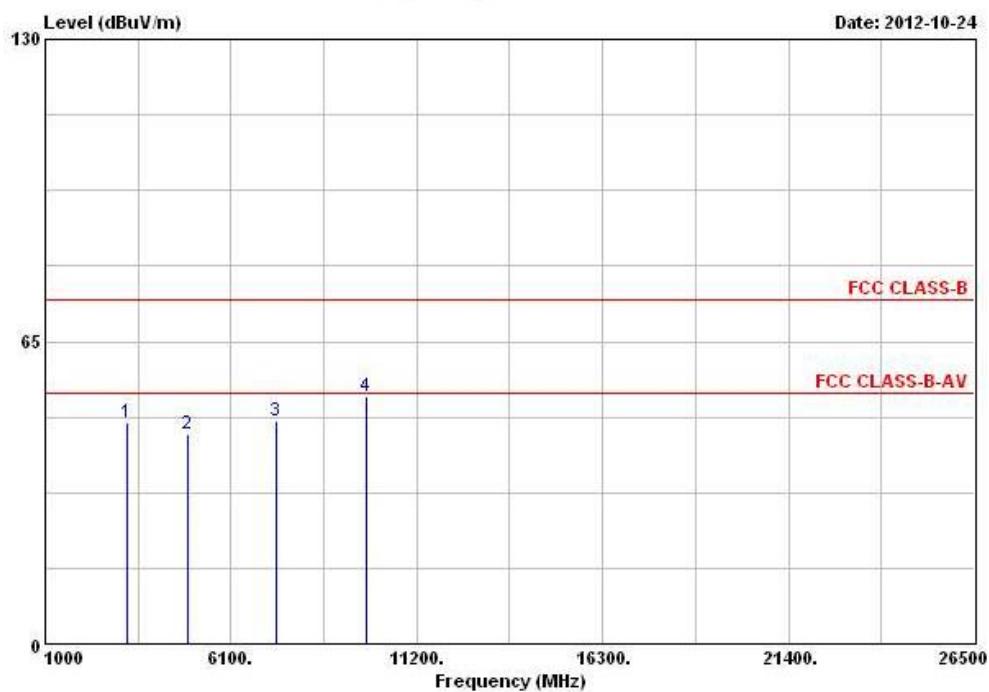

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant Pos	Table Pos
		Limit	Line	Level	Factor	Cable	Preamp		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 3266.000	47.56	-6.44	54.00	44.61	30.32	5.42	32.79 PK	---	---
2 4904.000	45.05	-8.95	54.00	39.30	32.94	5.42	32.61 PK	---	---
3 @ 7356.000	48.03	-5.97	54.00	39.60	35.87	5.46	32.90 PK	---	---
4 9808.000	53.05			40.97	38.62	6.78	33.32 Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 4) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



## 4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz ~ 2.75GHz	Mar. 23, 2012	Conduction (CO04-HY)
LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	8127-477	9kHz ~ 30MHz	Feb. 08, 2012	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3810/2NM	9703-1839	9kHz ~ 30MHz	Apr. 20, 2012	Conduction (CO04-HY)
RF Cable-CON	HUBER+SUHNER	RG213/U	CB049	9kHz ~ 30MHz	Apr. 25, 2012	Conduction (CO04-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSP 40	100305	9KHz~40GHz	Feb. 21, 2012	Conducted (TH01-HY)
Spectrum Analyzer	R&S	FSV 40	15195-01-00	9KHz~40GHz	Jan. 06, 2012	Conducted (TH01-HY)
DC Power Source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Jun. 19, 2012	Conducted (TH01-HY)
AC Power Source	G.W	APS-9102	EL920581	AC 0V ~ 300V	Jul. 02, 2012	Conducted (TH01-HY)
Temp. and Humidity Chamber	Giant Force	GTH-225-20-SP-SD	MAA1112-007	-20 ~ 100°C	Dec. 07, 2011	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100302	10MHz ~ 40GHz	Nov. 22, 2011	Conducted (TH01-HY)
Power Sensor	Anritsu	MA2411B	1027452	300MHz ~ 40GHz	Jan. 12, 2012	Conducted (TH01-HY)
Power Meter	Anritsu	ML2495A	1124009	300MHz ~ 40GHz	Jan. 12, 2012	Conducted (TH01-HY)
RF Cable-2m	HUBER+SUHNER	SUCOFLEX_104	SN 345672/4	1GHz ~ 26.5GHz	Dec. 03, 2011	Conducted (TH01-HY)
RF Cable-3m	HUBER+SUHNER	SUCOFLEX_104	SN 345668/4	1GHz ~ 26.5GHz	Dec. 03, 2011	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.

**FCC RADIO TEST REPORT****Report No. : FR281440AC**

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30MHz ~ 1GHz 3m	Dec. 12, 2011	Radiation (03CH03-HY)
Amplifier	HP	8447D	2944A08033	10kHz ~ 1.3GHz	May. 10, 2012	Radiation (03CH03-HY)
Amplifier	Agilent	8449B	3008A02120	1GHz ~ 26.5GHz	Aug 16 2012	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSP40	100004	9kHz ~ 40GHz	Feb. 01, 2012	Radiation (03CH03-HY)
Bilog Antenna	SCHAFFNER	CBL 6112D	22237	30MHz ~ 1GHz	Oct. 22, 2011	Radiation (03CH03-HY)
Horn Antenna	EMCO	3115	6741	1GHz ~ 18GHz	May 30, 2012	Radiation (03CH03-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15GHz ~ 40GHz	Jan.13, 2012	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30MHz ~ 1GHz	Jan. 18, 2012	Radiation (03CH03-HY)
RF Cable-high	SUHNER	SUCOFLEX 106	03CH03-HY	1GHz ~ 40GHz	Jan. 18, 2012	Radiation (03CH03-HY)
Turn Table	HD	DS 420	420/650/00	0 ~ 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	MF	MF-7802	MF780208179	1 ~ 4 m	N/A	Radiation (03CH03-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Loop Antenna	R&S	HFH2-Z2	860004/0001	9 kHz - 30 MHz	Jul. 03, 2012*	Radiation (03CH03-HY)

Note: Calibration Interval of instruments listed above is two year.



## 5 Certification of TAF Accreditation



Certificate No. : L1190-120405

財團法人全國認證基金會  
Taiwan Accreditation Foundation

### Certificate of Accreditation

This is to certify that

**Sportun International Inc.**  
**EMC & Wireless Communications Laboratory**  
No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,  
Taiwan, R.O.C.

is accredited in respect of laboratory

**Accreditation Criteria** : ISO/IEC 17025:2005  
**Accreditation Number** : 1190  
**Originally Accredited** : December 15, 2003  
**Effective Period** : January 10, 2010 to January 09, 2013  
**Accredited Scope** : Testing Field, see described in the Appendix  
**Specific Accreditation Program** : Accreditation Program for Designated Testing Laboratory  
for Commodities Inspection  
Accreditation Program for Telecommunication Equipment  
Testing Laboratory  
Accreditation Program for BSMI Mutual Recognition  
Arrangement with Foreign Authorities

Jay-San Chen  
President, Taiwan Accreditation Foundation  
Date: April 05, 2012

P1, total 24 pages