



FCC Test Report

Equipment : Wireless module
Brand Name : PEGATRON
Model No. : UPWL6028F
FCC ID : VUIUPWL6028F
Standard : 47 CFR FCC Part 15.247
Frequency Range : 5725 MHz – 5850 MHz
Equipment Class : DTS
Applicant : PEGATRON CORPORATION
Manufacturer : 5F., NO. 76, LIGONG ST., BEITOU DISTRICT,
TAIPEI CITY 112 Taiwan

The product sample received on Aug. 28, 2012 and completely tested on Oct. 05, 2012. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2009 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:



Wayne Hsu / Assistant Manager





Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Support Equipment	8
1.3	Testing Applied Standards	8
1.4	Testing Location Information	8
1.5	Measurement Uncertainty	9
2	TEST CONFIGURATION OF EUT	10
2.1	The Worst Case Modulation Configuration	10
2.2	Test Channel Frequencies Configuration.....	10
2.3	The Worst Case Power Setting Parameter	11
2.4	The Worst Case Measurement Configuration	12
2.5	Test Setup Diagram	14
3	TRANSMITTER TEST RESULT	16
3.1	AC Power-line Conducted Emissions	16
3.2	6dB Bandwidth.....	19
3.3	RF Output Power	23
3.4	Power Spectral Density	30
3.5	Transmitter Radiated Bandedge Emissions	34
3.6	Transmitter Radiated Unwanted Emissions	42
4	TEST EQUIPMENT AND CALIBRATION DATA.....	73
5	CERTIFICATION OF TAF ACCREDITATION.....	75
APPENDIX A. TEST PHOTOS		A7
APPENDIX B. PHOTOGRAPHS OF EUT.....		B18

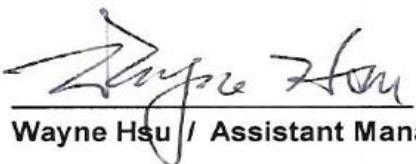

Summary of Test Result

Conformance Test Specifications					
Report Clause	Ref. Std. Clause	Description	Measured	Limit	Result
1.1.2	15.203	Antenna Requirement	Antenna connector mechanism complied	FCC 15.203	Complied
3.1	15.207	AC Power-line Conducted Emissions	[dBuV]:0.203963MHz 29.75 (Margin 23.70dB) - AV 40.76(Margin 22.69dB) - QP	FCC 15.207	Complied
3.2	15.247(a)	6dB Bandwidth	6dB Bandwidth [MHz] 5745-5825MHz(20M): 17.38 5755-5795MHz(40M): 36.00	≥500kHz	Complied
3.3	15.247(b)	RF Output Power (Maximum Peak Conducted Output Power)	Power [dBm] 5745-5825MHz: 26.28 5755-5795MHz: 25.69	Power [dBm]:30	Complied
3.4	15.247(d)	Power Spectral Density	PSD [dBm/3kHz] 5745-5825MHz: -14.09 5755-5795MHz: -17.05	PSD [dBm/3kHz]:8	Complied
3.5	15.247(c)	Transmitter Radiated Bandedge Emissions	Non-Restricted Bands: 5717.40MHz: 20.88dB Bandedge emissions not fall in restricted bands.	Non-Restricted Bands: > 20 dBc Restricted Bands: FCC 15.209	Complied
3.6	15.247(c)	Transmitter Radiated Unwanted Emissions	Restricted Bands [dBuV/m at 1m]:11490MHz 75.30 (Margin 8.24dB) - PK 62.29 (Margin 1.25dB) - AV	Non-Restricted Bands: > 20 dBc Restricted Bands: FCC 15.209	Complied



Revision History



1 General Description

1.1 Information

1.1.1 RF General Information

RF General Information						
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N _{TX})	RF Output Power (dBm)	Co-location
5725-5850	a	5745-5825	149-165 [5]	1	22.32	N/A
5725-5850	n (HT20)	5745-5825	149-165 [5]	1	23.08	N/A
5725-5850	n (HT40)	5755-5795	151-159 [2]	1	22.82	N/A
5725-5850	n (HT20)	5745-5825	149-165 [5]	2	26.28	N/A
5725-5850	n (HT40)	5755-5795	151-159 [2]	2	25.69	N/A

Note 1: RF output power specifies that Maximum Peak Conducted Output Power.

Note 2: 802.11a/n uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.

Note 3: Co-location, Co-location is generally defined as simultaneously transmitting (co-transmitting) antennas within 20 cm of each other. (i.e., EUT has simultaneously co-transmitting that operating 2.4GHz and 5GHz.)



1.1.2 Antenna Information

Antenna Category	
<input checked="" type="checkbox"/>	Integral antenna (antenna permanently attached)
<input checked="" type="checkbox"/>	Temporary RF connector provided
<input type="checkbox"/>	No temporary RF connector provided Transmit chains bypass antenna and soldered temporary RF connector provided for connected measurement. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator and correct for all losses in the RF path.

Antenna General Information						
No.	Ant. Cat.	Ant. Type	Brand	Part No.	Gain (dBi)	
					2.4G	5G
1	Integral	PCB	Wanshih	UC3WFI0063	2.04	4.62
2	Integral	PCB	Wanshih	UC3WFI0064	3.90	4.48
3	Integral	PCB	Wanshih	UC3WFI0072	2.04	6.21
4	Integral	PCB	Wanshih	UC3WFI0073	5.72	4.93
5	Integral	PCB	Wanshih	UC3WFI0080	4.72	-
6	Integral	PCB	Wanshih	UC3WFI0081	5.65	-
7	Integral	PCB	Wanshih	UC3WFI0082	-	5.16
8	Integral	PCB	Wanshih	UC3WFI0083	-	6.36
9	Integral	PCB	Hong-lin	260-23396	2.32	3.91
10	Integral	PCB	Hong-lin	260-23397	4.64	4.53
11	Integral	PCB	Hong-lin	260-23042	4.36	6.22
12	Integral	PCB	Hong-lin	260-23403	4.40	6.00
13	Integral	PCB	Hong-lin	260-23432	2.58	-
14	Integral	PCB	Hong-lin	260-23434	4.36	-
15	Integral	PCB	Hong-lin	260-23433	-	5.60
16	Integral	PCB	Hong-lin	260-23435	-	6.22
17	Integral	PCB	Airgain	N2420DS (10cm)	3.10	-
18	Integral	PCB	Airgain	N2420DS (27cm)	3.10	-
19	Integral	PCB	Airgain	N2420 (10cm)	3.30	-
20	Integral	PCB	Airgain	N2420 (40cm)	3.30	-
21	Integral	PCB	Airgain	N5x20SC (15cm)	-	1.90
22	Integral	PCB	Airgain	N5x20SC (19cm)	-	1.90
23	Integral	PCB	Airgain	N5x20SC (23cm)	-	1.90
24	Integral	PCB	Airgain	N5x20SC (27cm)	-	1.90

EUT is consist of multiple antenna models assembly (multiple antenna models are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type. Then Ant. No. 8 shall be performed the radiated test.



1.1.3 Type of EUT

Identify EUT	
EUT Serial Number	N/A
Presentation of Equipment	<input type="checkbox"/> Production ; <input checked="" type="checkbox"/> Pre-Production ; <input type="checkbox"/> Prototype
Type of EUT	
<input checked="" type="checkbox"/> Stand-alone	
<input type="checkbox"/> Combined (EUT where the radio part is fully integrated within another device) Combined Equipment - Brand Name / Model No.: ...	
<input type="checkbox"/> Plug-in radio (EUT intended for a variety of host systems) Host System - Brand Name / Model No.: ...	
<input type="checkbox"/> Other:	

1.1.4 Test Signal Duty Cycle

Operated Mode for Worst Duty Cycle		
<input type="checkbox"/> Operated normally mode for worst duty cycle		
<input checked="" type="checkbox"/> Operated test mode for worst duty cycle		
Test Signal Duty Cycle (x)	Power Duty Factor [dB] – (10 log 1/x)	Voltage Duty Factor [dB] – (20 log 1/x)
<input checked="" type="checkbox"/> 97.97% - IEEE 802.11a	0.09	0.18
<input checked="" type="checkbox"/> 95.89% - IEEE 802.11n (HT20)	0.18	0.36
<input checked="" type="checkbox"/> 87.49% - IEEE 802.11n (HT40)	0.58	1.16

Note 1: Average Output Power Plots w/o Duty Factor

1.1.5 EUT Operational Condition

Supply Voltage	<input type="checkbox"/> AC mains	<input checked="" type="checkbox"/> DC	
Type of DC Source	<input type="checkbox"/> Internal DC supply	<input checked="" type="checkbox"/> Host	<input type="checkbox"/> Battery



1.2 Support Equipment

Support Equipment - Conducted Emissions				
No.	Equipment	Brand Name	Model Name	Serial No.
1	Notebook	DELL	XPS M1330	DoC
2	iPod	Apple	A1199	N/A
3	(USB) Mouse	Microsoft	1113	N/A
4	Wireless AP (Remote Workstation)	ASUS	RT-AC66U	DoC

Support Equipment - Radiated Emissions				
No.	Equipment	Brand Name	Model Name	Serial No.
1	Notebook	DELL	E5500	DoC
2	(USB) Mouse	Microsoft	1113	DoC
3	iPod	APPLE	A1199	DoC
4	Wireless AP (Remote Workstation)	ASUS	RT-AC66U	DoC

1.3 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR FCC Part 15
- ANSI C63.10-2009
- FCC KDB 558074
- FCC KDB 662911
- FCC KDB 412172

1.4 Testing Location Information

Testing Location				
	HWA YA	ADD	: No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.	
		TEL	886-3-327-3456	FAX : 886-3-327-0973
Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
RF Conducted	TH01-HY	Ian	24.3°C / 65%	04-Oct-12
AC Conduction	CO04-HY	Bill	25.2°C / 49.3%	04-Sep-12
Radiated Emission	03CH03-HY	Daniel	25.6°C / 58%	20-Sep-12 ~ 29-Sep-12



1.5 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Measurement Uncertainty		
Test Item	Uncertainty	Limit
AC power-line conducted emissions	±2.26 dB	N/A
Emission bandwidth, 6dB bandwidth	±1.42 %	N/A
RF output power, conducted	±0.63 dB	N/A
Power density, conducted	±0.81 dB	N/A
Unwanted emissions, conducted	30 – 1000 MHz	±0.51 dB
	1 – 18 GHz	±0.67 dB
	18 – 40 GHz	±0.83 dB
	40 – 200 GHz	N/A
All emissions, radiated	30 – 1000 MHz	±2.56 dB
	1 – 18 GHz	±3.59 dB
	18 – 40 GHz	±3.82 dB
	40 – 200 GHz	N/A
Temperature	±0.8 °C	N/A
Humidity	±3 %	N/A
DC and low frequency voltages	±3 %	N/A
Time	±1.42 %	N/A
Duty Cycle	±1.42 %	N/A



2 Test Configuration of EUT

2.1 The Worst Case Modulation Configuration

Worst Modulation Used for Conformance Testing					
IEEE Std. 802.11	Transmit Chains (N_{TX})	Data Rate / MCS	Worst Data Rate / MCS	Modulation Mode	RF Output Power (dBm)
a	1	6-54 Mbps	6 Mbps	11A5.8G-20M	22.32
n (HT20)	2	MCS 0-7	MCS 0	11N5.8G-20M	23.08
n (HT40)	2	MCS 0-7	MCS 0	11N5.8G-40M	22.82
n (HT20)	2	MCS 7-15	MCS 8	11N5.8G-20M	26.28
n (HT40)	2	MCS 7-15	MCS 8	11N5.8G-40M	25.69

Note 1: IEEE Std. 802.11n-2009 modulation consists of HT20 and HT40 (HT: High Throughput). Then EUT support HT20 and HT40. Worst modulation mode of Guard Interval (GI) is 800ns.

Note 2: Modulation modes consist below configuration:

11A: IEEE 802.11a, 11N: IEEE 802.11n
5.8G: 5.725-5.85GHz band
20M/40M: Channel Bandwidth 20MHz/40MHz

Note 3: RF output power specifies that Maximum Peak Conducted Output Power.

2.2 Test Channel Frequencies Configuration

Test Channel Frequencies Configuration	
IEEE Std. 802.11	Test Channel Frequencies (MHz) – FX (Frequencies Abbreviations)
a, n (HT20)	5745-(F1), 5785-(F2), 5825-(F3)
n (HT40)	5755-(F4), 5795-(F5)



2.3 The Worst Case Power Setting Parameter

The Worst Case Power Setting Parameter					
Test Software Version		DOS			
Modulation Mode	Transmit Chains (N_{TX})	Frequency (MHz)	Power Setting	Data Rate / MCS	RF Output Power (dBm)
11A5.8G-20M	1	5745	65	6 Mbps	22.32
11A5.8G-20M	1	5785	65	6 Mbps	22.32
11A5.8G-20M	1	5825	65	6 Mbps	22.17
11N5.8G-20M	1	5745	67	MCS 0	22.97
11N5.8G-20M	1	5785	67	MCS 0	23.08
11N5.8G-20M	1	5825	67	MCS 0	22.85
11N5.8G-40M	1	5755	66	MCS 0	22.82
11N5.8G-40M	1	5795	66	MCS 0	22.50
11N5.8G-20M	2	5745	68	MCS 8	25.89
11N5.8G-20M	2	5785	68	MCS 8	26.28
11N5.8G-20M	2	5825	68	MCS 8	26.05
11N5.8G-40M	2	5755	66	MCS 8	25.69
11N5.8G-40M	2	5795	66	MCS 8	25.67

Note 1: RF output power specifies that Maximum Peak Conducted Output Power.



2.4 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	Operating Mode Description
1	Radio link (5G-WLAN)


The Worst Case Mode for Following Conformance Tests			
Tests Item	RF Output Power, Power Spectral Density, 6dB Bandwidth		
Test Condition	Conducted measurement at transmit chains		
Modulation Mode	Transmit Chains (N_{TX})	Data Rate / MCS	Test Frequency
11A5.8G-20M	1	6 Mbps	F1, F2, F3
11N5.8G-20M	1	MCS 0	F1, F2, F3
11N5.8G-40M	1	MCS 0	F4, F5
11N5.8G-20M	2	MCS 8	F1, F2, F3
11N5.8G-40M	2	MCS 8	F4, F5

The Worst Case Mode for Following Conformance Tests			
Tests Item	Transmitter Radiated Bandedge Emissions		
Test Condition	Radiated measurement		
Modulation Mode	Transmit Chains (N_{TX})	Data Rate / MCS	Test Frequency
11A5.8G-20M	1	6 Mbps	F1, F3
11N5.8G-20M	1	MCS 0	F1, F3
11N5.8G-40M	1	MCS 0	F4, F5
11N5.8G-20M	2	MCS 8	F1, F3
11N5.8G-40M	2	MCS 8	F4, F5



The Worst Case Mode for Following Conformance Tests		
Tests Item	Transmitter Radiated Unwanted Emissions	
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.	
User Position	<input checked="" type="checkbox"/> EUT will be placed in fixed position. <input type="checkbox"/> EUT will be placed in mobile position and operating multiple positions. EUT shall be performed two or three orthogonal planes. <input type="checkbox"/> EUT will be a hand-held or body-worn battery-powered devices and operating multiple positions. EUT shall be performed two or three orthogonal planes.	
Operating Mode < 1GHz	<input checked="" type="checkbox"/> 1. Radio link (5G-WLAN)	
Modulation Mode	Data Rate / MCS	Test Frequency
11A5.8G-20M	6 Mbps	F1, F2, F3
11N5.8G-20M	MCS 0	F1, F2, F3
11N5.8G-40M	MCS 0	F4, F5
11N5.8G-20M	MCS 8	F1, F2, F3
11N5.8G-40M	MCS 8	F4, F5


2.5 Test Setup Diagram

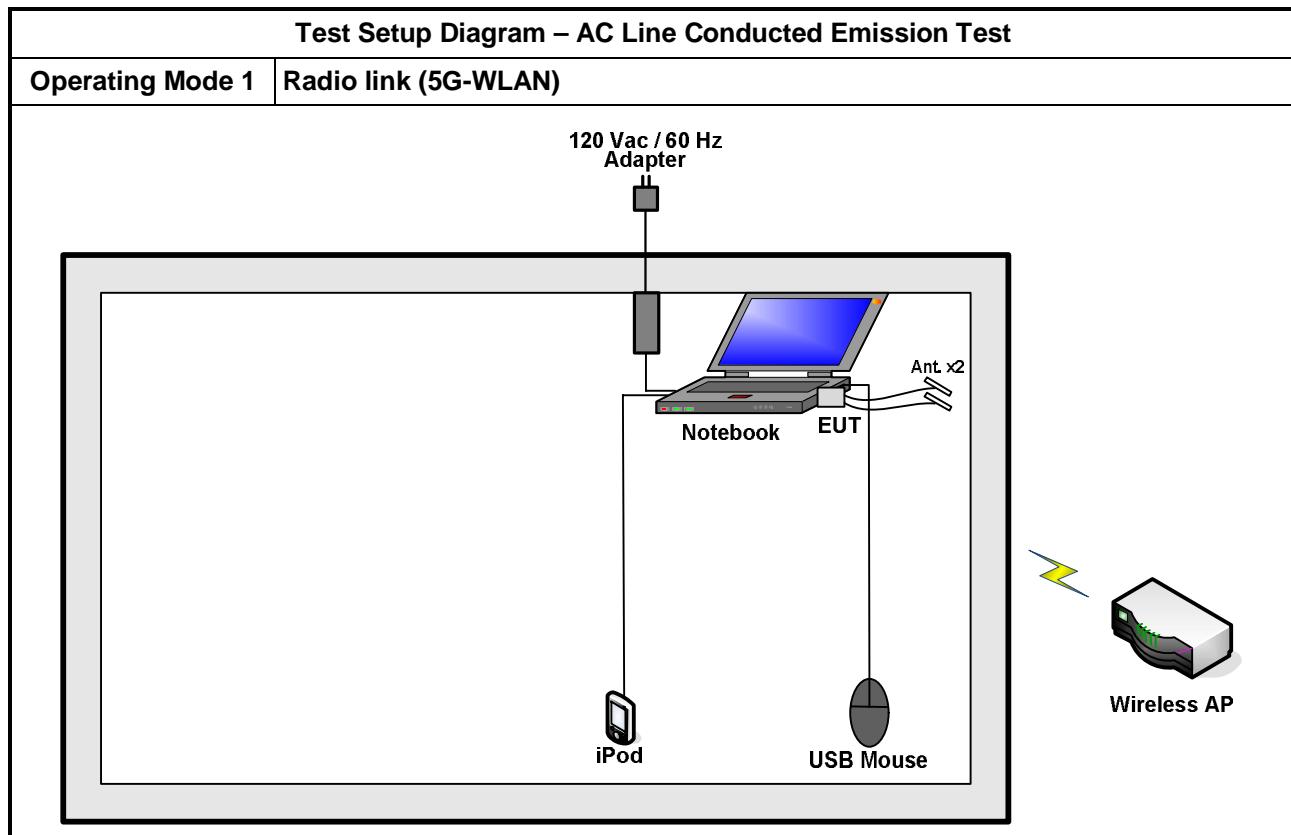




Test Setup Diagram - Radiated Test (Below 1GHz)

Operating Mode 1 | Radio link (5G-WLAN)

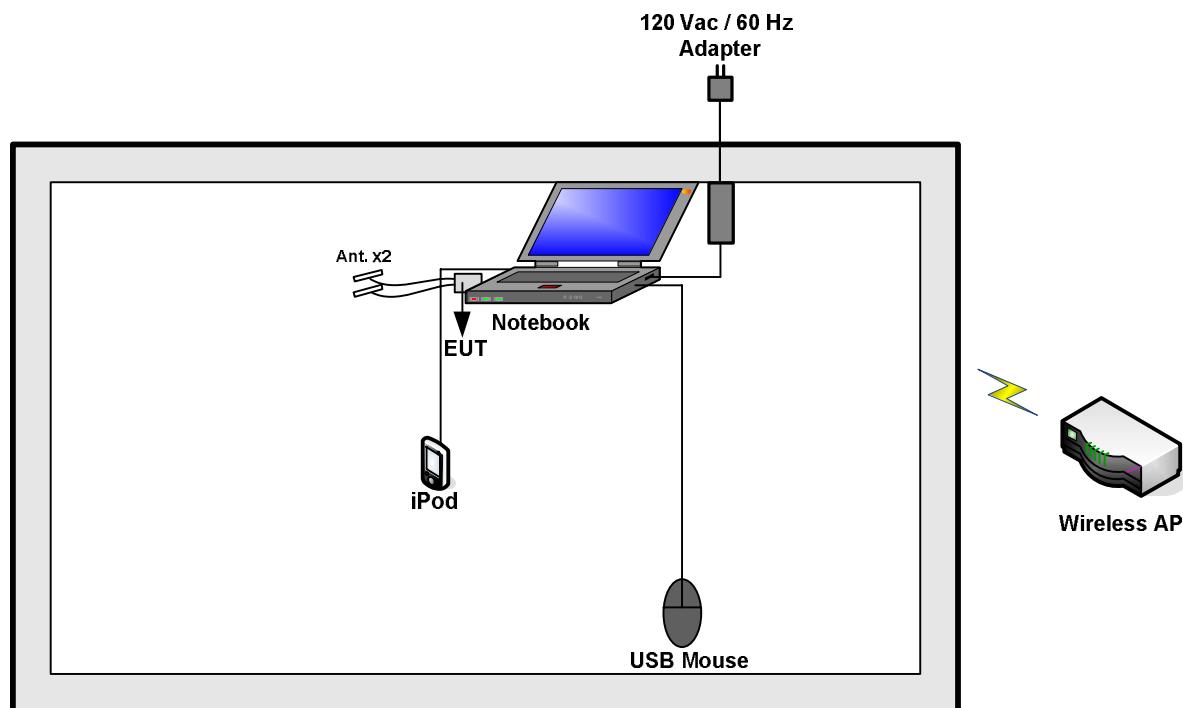

Test Setup Diagram - Radiated Test (Above 1GHz)

Operating Mode 1 | Transmission Mode

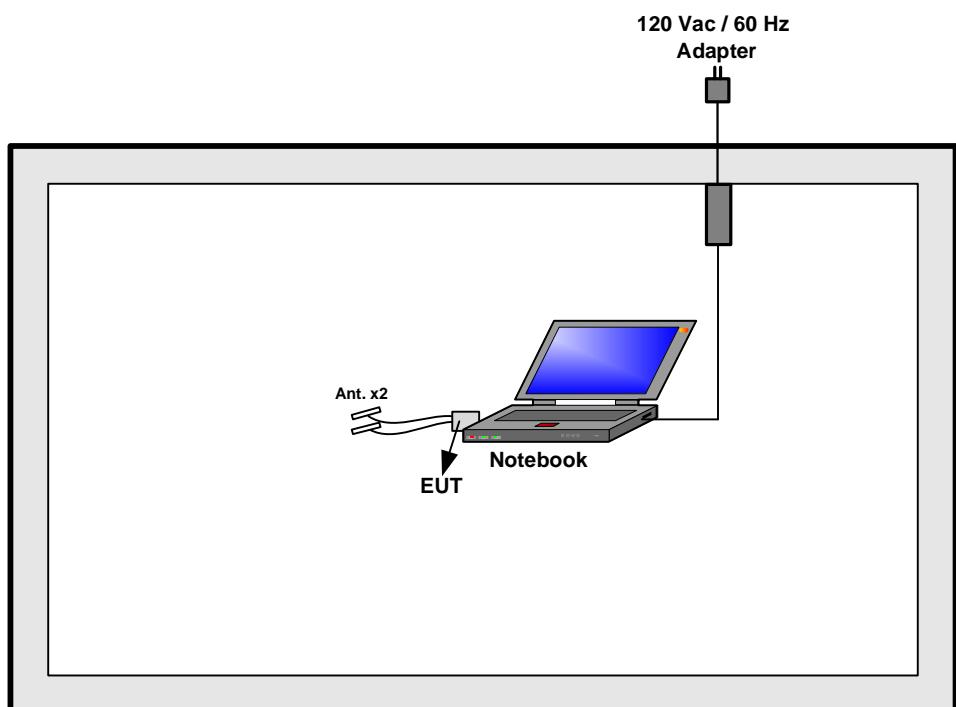

3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> Refer as ANSI C63.10-2009, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

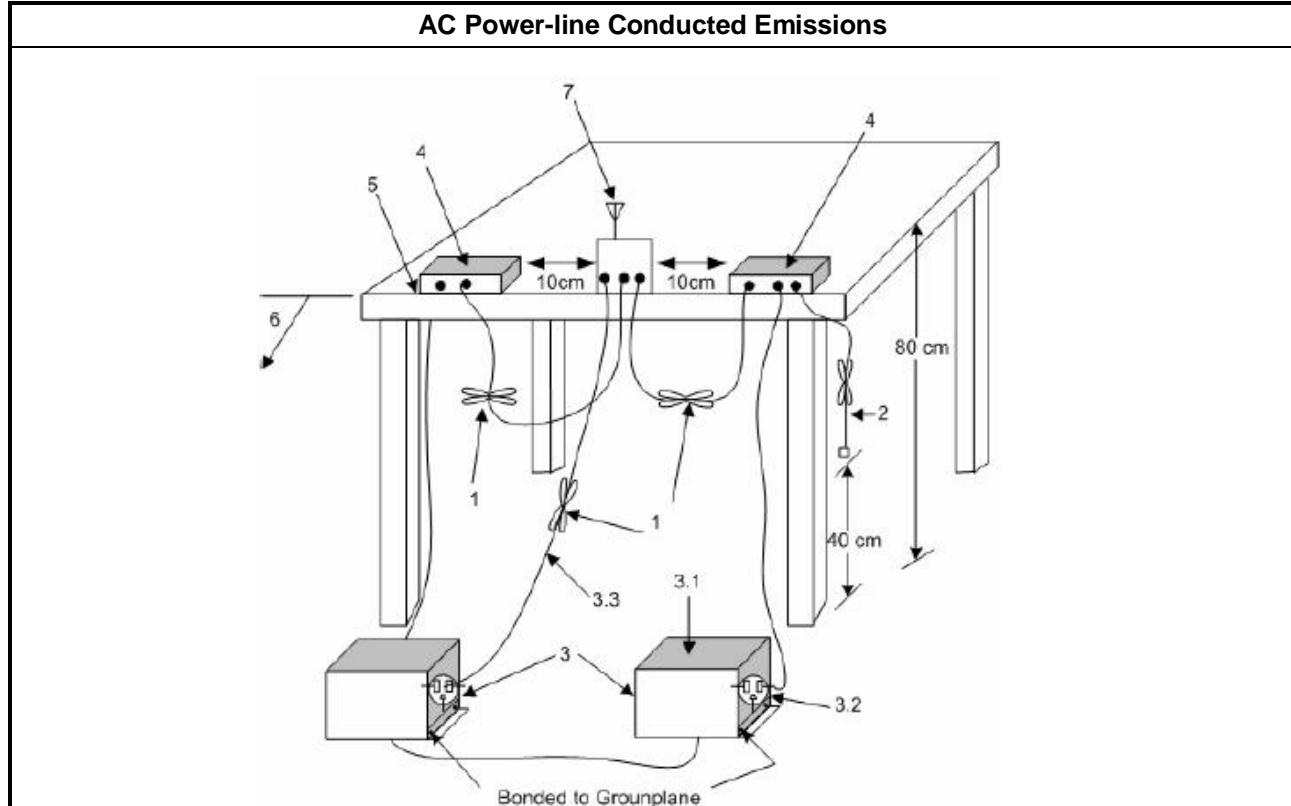



3.1.5 Test Result of AC Power-line Conducted Emissions


AC Power-line Conducted Emissions Result							
Operating Mode	1	Power Phase	Neutral				
Operating Function	Radio link (5G-WLAN)						
Date: 2012-09-04							
0.15	0.2	0.5	1	2	5	10	20
0	40	80					
Freq Level Over Limit Read LISN Cable							
Freq Level Limit Line Read LISN Cable							
MHz dBuV dB dBuV dB dB dB							
1	0.1712450	39.89	-25.01	64.90	39.78	0.11	0.00 QP
2	0.1712450	28.53	-26.37	54.90	28.42	0.11	0.00 Average
3	0.4715910	29.08	-27.41	56.49	29.06	0.10	-0.08 QP
4	0.4715910	17.66	-28.83	46.49	17.64	0.10	-0.08 Average
5	0.7567850	23.52	-32.48	56.00	23.44	0.11	-0.03 QP
6	0.7567850	14.63	-31.37	46.00	14.55	0.11	-0.03 Average
7	1.859	23.94	-32.06	56.00	23.81	0.13	0.00 QP
8	1.859	15.02	-30.98	46.00	14.89	0.13	0.00 Average
9	2.420	17.70	-28.30	46.00	17.56	0.14	0.00 Average
10	2.420	26.56	-29.44	56.00	26.42	0.14	0.00 QP
11	17.380	22.81	-27.19	50.00	22.61	0.30	-0.10 Average
12	17.380	28.11	-31.89	60.00	27.91	0.30	-0.10 QP

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)



AC Power-line Conducted Emissions Result

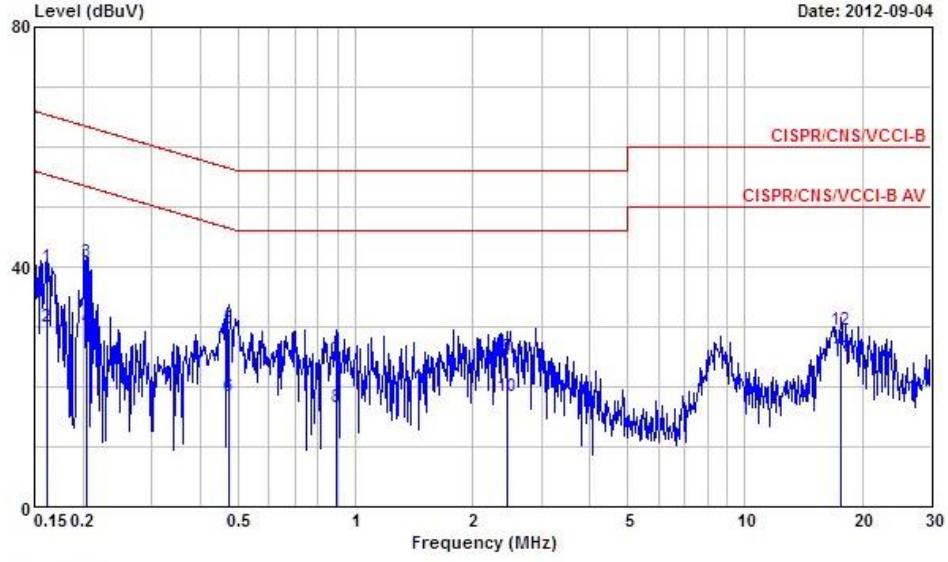Operating Mode	1	Power Phase	Line			
Operating Function	Radio link (5G-WLAN)					
						
Freq	Over Level	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.1615500	40.01	-25.37	65.38	39.77	0.24 0.00 QP
2	0.1615500	30.00	-25.38	55.38	29.76	0.24 0.00 Average
3	0.2039630	40.76	-22.69	63.45	40.53	0.23 0.00 QP
4	0.2039630	29.75	-23.70	53.45	29.52	0.23 0.00 Average
5	0.4736030	29.84	-26.61	56.45	29.70	0.22 -0.08 QP
6	0.4736030	18.47	-27.98	46.45	18.33	0.22 -0.08 Average
7	0.8904140	24.54	-31.46	56.00	24.32	0.23 -0.01 QP
8	0.8904140	16.60	-29.40	46.00	16.38	0.23 -0.01 Average
9	2.450	25.11	-30.89	56.00	24.85	0.26 0.00 QP
10	2.450	18.33	-27.67	46.00	18.07	0.26 0.00 Average
11	17.660	24.91	-25.09	50.00	24.46	0.54 -0.09 Average
12	17.660	29.53	-30.47	60.00	29.08	0.54 -0.09 QP

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)



3.2 6dB Bandwidth

3.2.1 6dB Bandwidth Limit

6dB Bandwidth Limit
Systems using digital modulation techniques:
<input checked="" type="checkbox"/> 6 dB bandwidth \geq 500 kHz.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> For the emission bandwidth shall be measured using one of the options below:
<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 5.1.1 Option 1 for 6 dB bandwidth measurement.
<input type="checkbox"/> Refer as FCC KDB 558074, clause 5.1.2 Option 2 for 6 dB bandwidth measurement.
<input type="checkbox"/> Refer as ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.
<input checked="" type="checkbox"/> For conducted measurement.
<input checked="" type="checkbox"/> The EUT supports single transmit chain and measurements performed on this transmit chain.
<input checked="" type="checkbox"/> The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.
<input checked="" type="checkbox"/> The EUT supports multiple transmit chains using options given below:
<input type="checkbox"/> Option 1: Multiple transmit chains measurements need to be performed on one of the active transmit chains (antenna outputs). All measurement had be performed on transmit chains 1.
<input checked="" type="checkbox"/> Option 2: Multiple transmit chains measurements need to be performed on each transmit chains individually (antenna outputs). All measurement had be performed on all transmit chains.

3.2.4 Test Setup

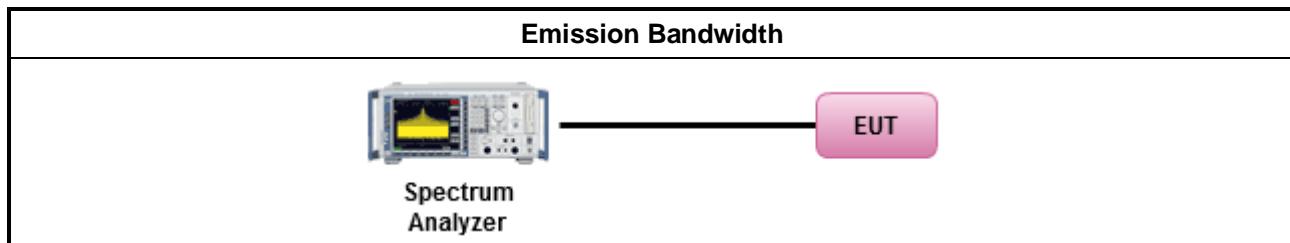




3.2.5 Test Result of Emission Bandwidth

Emission Bandwidth Result										
Condition			Emission Bandwidth (MHz)							
Modulation Mode	N _{TX}	Freq. (MHz)	99% Bandwidth				6dB Bandwidth			
			Chain-Port 1	Chain-Port 2	-	-	Chain-Port 1	Chain-Port 2	-	-
11A5.8G-20M	1	5745	16.35	-	-	-	16.24	-	-	-
11A5.8G-20M	1	5785	16.35	-	-	-	15.99	-	-	-
11A5.8G-20M	1	5825	16.35	-	-	-	15.69	-	-	-
11N5.8G-20M	1	5745	17.43	-	-	-	17.15	-	-	-
11N5.8G-20M	1	5785	17.62	-	-	-	15.68	-	-	-
11N5.8G-20M	1	5825	17.50	-	-	-	16.98	-	-	-
11N5.8G-40M	1	5755	36.66	-	-	-	36.00	-	-	-
11N5.8G-40M	1	5795	36.66	-	-	-	32.68	-	-	-
11N5.8G-20M	2	5745	17.43	17.54	-	-	17.02	17.16	-	-
11N5.8G-20M	2	5785	17.50	17.55	-	-	16.87	15.47	-	-
11N5.8G-20M	2	5825	17.75	17.64	-	-	17.38	16.53	-	-
11N5.8G-40M	2	5755	36.58	36.58	-	-	36.00	28.32	-	-
11N5.8G-40M	2	5795	36.98	36.50	-	-	36.00	32.36	-	-
Limit			N/A				≥500 kHz			
Result			Complied							

Note 1: N_{TX} = Number of Transmit Chains



(F1~F3: 5745-5825 MHz) / (F4~F5: 5755-5795 MHz)
N_{TX} 1

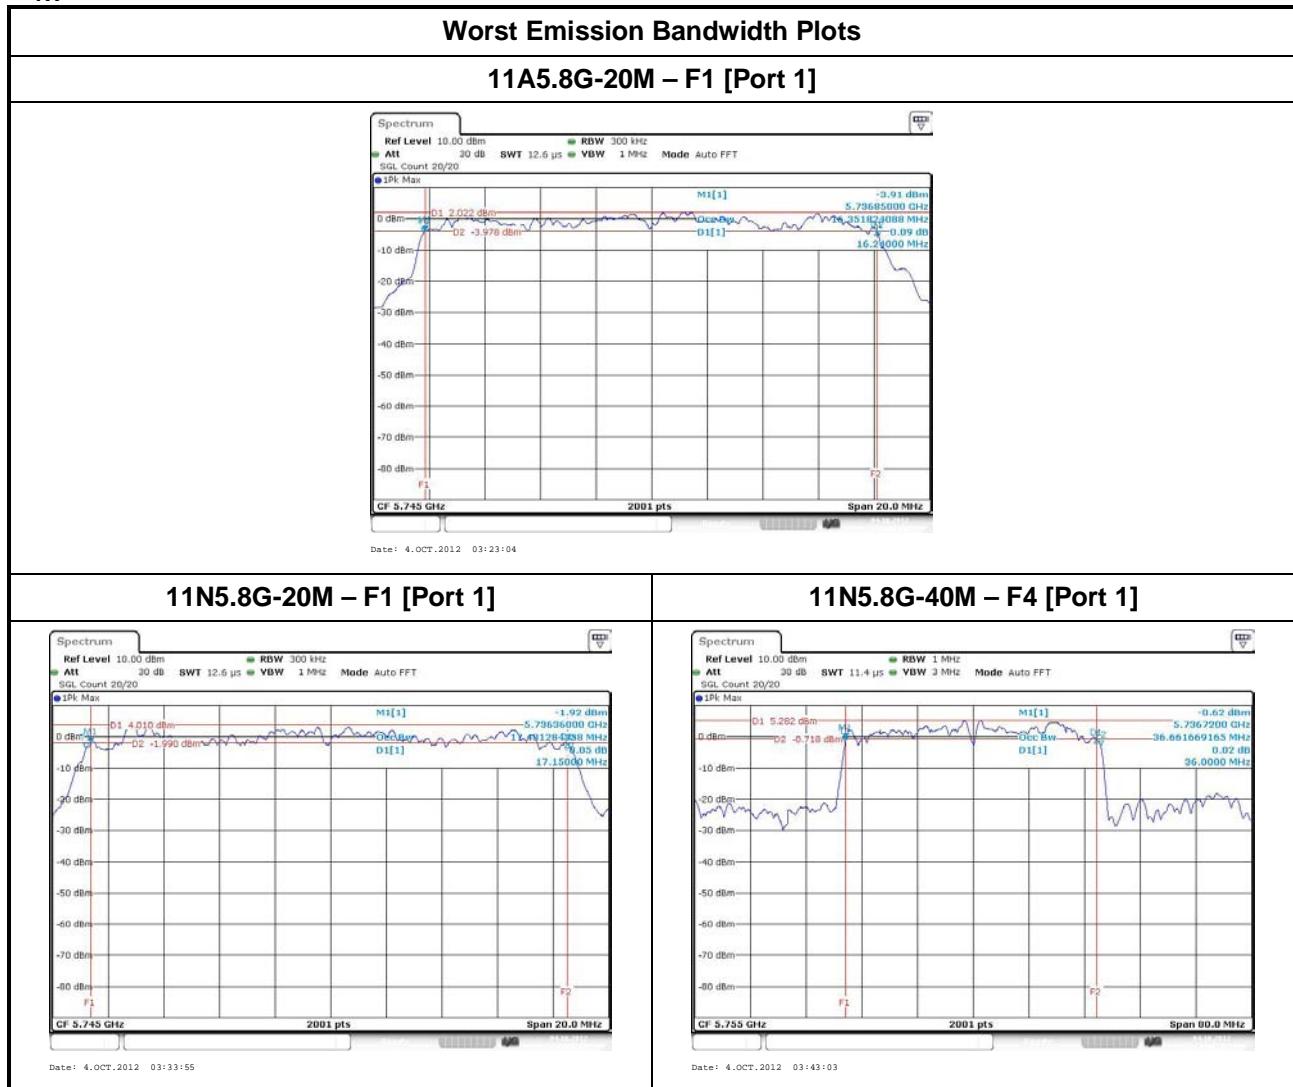





(F1~F3: 5745-5825 MHz) / (F4~F5: 5755-5795 MHz)
N_{TX} 2

Worst Emission Bandwidth Plots


11N5.8G-20M – F3 [Port 1]

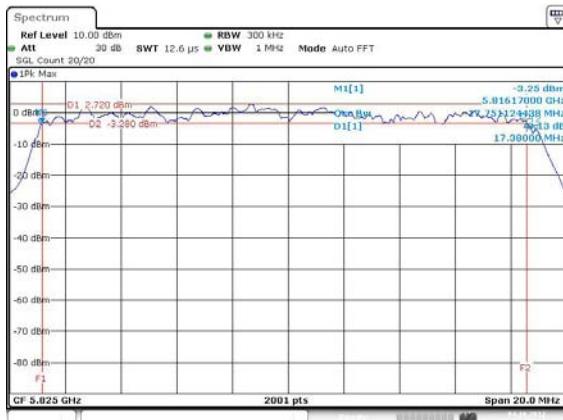


11N5.8G-20M – F1 [Port 1]

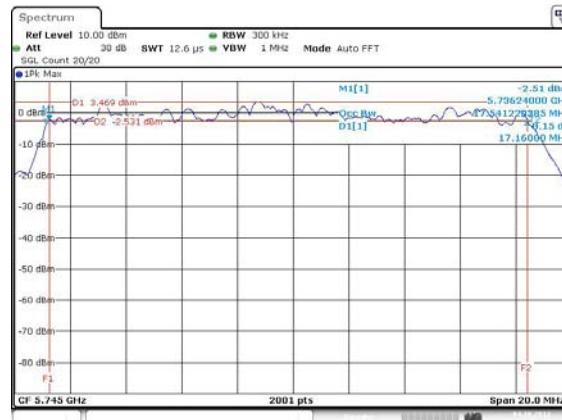

11N5.8G-40M – F5 [Port 1]

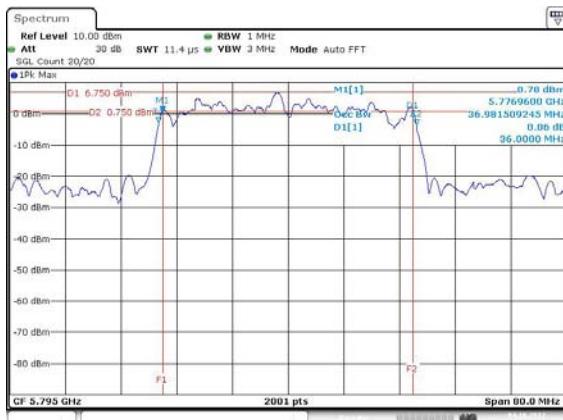

11N5.8G-40M – F5 [Port 2]

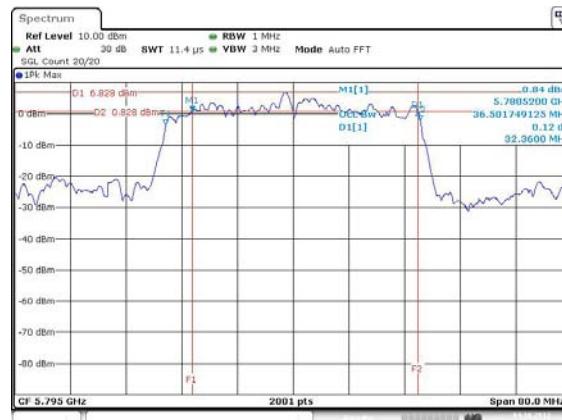



3.3 RF Output Power

3.3.1 RF Output Power Limit

RF Output Power Limit	
Maximum Peak Conducted Output Power or Maximum Conducted Output Power Limit	
<input checked="" type="checkbox"/> 5725-5850 MHz Band:	
<input checked="" type="checkbox"/>	If $G_{TX} \leq 6$ dBi, then $P_{out} \leq 30$ dBm (1 W)
<input checked="" type="checkbox"/>	Point-to-multipoint systems (P2M): If $G_{TX} > 6$ dBi, then $P_{out} = 30 - (G_{TX} - 6)$ dBm
<input type="checkbox"/>	Point-to-point systems (P2P): If $G_{TX} > 6$ dBi, then $P_{out} = 30$ dBm
e.i.r.p. Power Limit:	
<input checked="" type="checkbox"/> 5725-5850 MHz Band	
<input checked="" type="checkbox"/>	Point-to-multipoint systems (P2M): $P_{eirp} \leq 36$ dBm (4 W)
<input type="checkbox"/>	Point-to-point systems (P2P): N/A
P_{out} = maximum peak conducted output power or maximum conducted output power in dBm, G_{TX} = the maximum transmitting antenna directional gain in dBi. P_{eirp} = e.i.r.p. Power in dBm.	

3.3.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.



3.3.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/> Maximum Peak Conducted Output Power	<input type="checkbox"/> Refer as FCC KDB 558074, clause 5.2.1.1 Option 1 (RBW \geq EBW method). <input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 5.2.1.2 Option 2 (integrated band power method). <input type="checkbox"/> Refer as ANSI C63.10, clause 6.10.2.1 a) for peak power meter.
<input checked="" type="checkbox"/> Maximum Conducted (Average) Output Power	<input type="checkbox"/> Refer as FCC KDB 558074, clause 5.2.2.1 Option 1 (RMS detection with slow sweep speed). <input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 5.2.2.2 Option 2 (spectral trace averaging).
<input checked="" type="checkbox"/> For conducted measurement.	<input checked="" type="checkbox"/> The EUT supports single transmit chain and measurements performed on this transmit chain. <input checked="" type="checkbox"/> The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case. <input checked="" type="checkbox"/> The EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them. <input checked="" type="checkbox"/> If multiple transmit chains, EIRP calculation could be following as methods: $P_{total} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = P_{total} + DG$

3.3.4 Test Setup

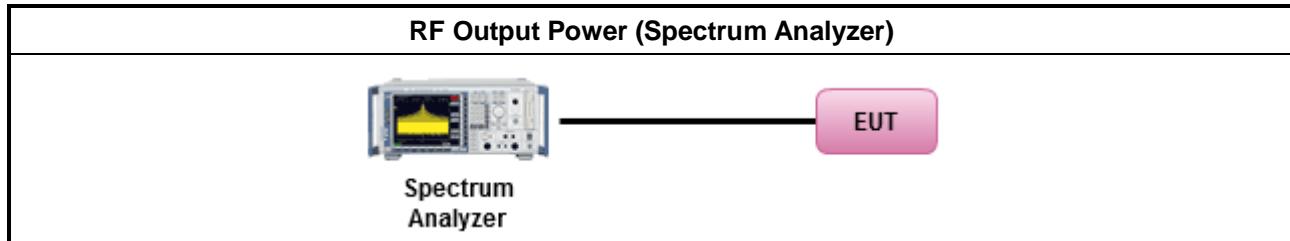



3.3.5 Directional Gain for Power Measurement

Directional Gain (DG) Result					
Transmit Chains No.		1	2	-	-
Maximum G _{ANT} (dBi)		6.36	6.36	-	-
Modulation Mode	DG (dBi)	N _{TX}	N _{SS}	STBC	Array Gain (dB)
Non HT20,6-54Mbps (11a)	6.36	1	1	-	-
HT20, M0-M7	6.36	1	1	-	-
HT40,M0-M7	6.36	2	2	-	-
HT20,M0-M16	6.36	1	1	-	-
HT40, M0-M16	6.36	2	2	-	-

Note 1: For all transmitter outputs with equal antenna gains, directional gain is to be computed as follows:
Any transmit signals are correlated, Directional Gain = G_{ANT} + 10 log(N_{TX})
All transmit signals are completely uncorrelated, Directional Gain = G_{ANT}

Note 2: For all transmitter outputs with unequal antenna gains, directional gain is to be computed as follows:
Any transmit signals are correlated, Directional Gain = 10 log[(10^{G1/20} + ... + 10^{GN/20})² / N_{TX}]
All transmit signals are completely uncorrelated, Directional Gain = 10 log[(10^{G1/10} + ... + 10^{GN/10}) / N_{TX}]

Note 3: For Spatial Multiplexing, Directional Gain (DG) = G_{ANT} + 10 log(N_{TX}/N_{SS}),
where N_{SS} = the number of independent spatial streams data.

Note 4: For CDD transmissions, directional gain is calculated as power measurements:
Directional Gain (DG) = G_{ANT} + Array Gain, where Array Gain is as follows:
Array Gain = 0 dB (i.e., no array gain) for N_{TX} ≤ 4;
Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{TX};



3.3.6 Test Result of Maximum Peak Conducted Output Power

Maximum Peak Conducted Output Power Result												
Condition			RF Output Power (dBm)									
Modulation Mode	N _{TX}	Freq. (MHz)	Chain Port 1	Chain Port 2	-	-	Sum Chain	Power Limit	DG (dBi)	EIRP Power	EIRP Limit	
11A5.8G-20M	1	5745	22.32	-	-	-	22.32	29.6	6.36	28.68	36.0	
11A5.8G-20M	1	5785	22.32	-	-	-	22.32	29.6	6.36	28.68	36.0	
11A5.8G-20M	1	5825	22.17	-	-	-	22.17	29.6	6.36	28.53	36.0	
11N5.8G-20M	1	5745	22.97	-	-	-	22.97	29.6	6.36	29.33	36.0	
11N5.8G-20M	1	5785	23.08	-	-	-	23.08	29.6	6.36	29.44	36.0	
11N5.8G-20M	1	5825	22.85	-	-	-	22.85	29.6	6.36	29.21	36.0	
11N5.8G-40M	1	5755	22.82	-	-	-	22.82	29.6	6.36	29.18	36.0	
11N5.8G-40M	1	5825	22.50	-	-	-	22.50	29.6	6.36	28.86	36.0	
11N5.8G-20M	2	5745	22.71	23.04	-	-	25.89	29.6	6.36	32.25	36.0	
11N5.8G-20M	2	5785	23.36	23.17	-	-	26.28	29.6	6.36	32.64	36.0	
11N5.8G-20M	2	5825	23.09	22.99	-	-	26.05	29.6	6.36	32.41	36.0	
11N5.8G-40M	2	5755	22.66	22.70	-	-	25.69	29.6	6.36	32.05	36.0	
11N5.8G-40M	2	5825	22.56	22.75	-	-	25.67	29.6	6.36	32.03	36.0	
Result			Complied									




3.3.7 Test Result of Maximum Conducted (Average) Output Power

Maximum Conducted (Average) Output Power												
Condition			RF Output Power (dBm)									
Modulation Mode	N _{TX}	Freq. (MHz)	Chain Port 1	Chain Port 2	-	-	Sum Chain	Power Limit	DG (dBi)	EIRP Power	EIRP Limit	
11A5.8G-20M	1	5745	14.93	-	-	-	14.93	29.6	6.36	21.29	36.0	
11A5.8G-20M	1	5785	15.06	-	-	-	15.06	29.6	6.36	21.42	36.0	
11A5.8G-20M	1	5825	14.83	-	-	-	14.83	29.6	6.36	21.19	36.0	
11N5.8G-20M	1	5745	15.66	-	-	-	15.66	29.6	6.36	22.02	36.0	
11N5.8G-20M	1	5785	15.75	-	-	-	15.75	29.6	6.36	22.11	36.0	
11N5.8G-20M	1	5825	15.59	-	-	-	15.59	29.6	6.36	21.95	36.0	
11N5.8G-40M	1	5755	15.47	-	-	-	15.47	29.6	6.36	21.83	36.0	
11N5.8G-40M	1	5825	15.37	-	-	-	15.37	29.6	6.36	21.73	36.0	
11N5.8G-20M	2	5745	15.64	15.19	-	-	18.43	29.6	6.36	24.79	36.0	
11N5.8G-20M	2	5785	15.87	15.33	-	-	18.62	29.6	6.36	24.98	36.0	
11N5.8G-20M	2	5825	15.62	15.17	-	-	18.41	29.6	6.36	24.77	36.0	
11N5.8G-40M	2	5755	15.07	14.88	-	-	17.99	29.6	6.36	24.35	36.0	
11N5.8G-40M	2	5825	15.14	14.91	-	-	18.04	29.6	6.36	24.40	36.0	
Result			Complied									

Test Signal Duty Cycle (x)		Power Duty Factor [dB] – (10 log 1/x)
<input checked="" type="checkbox"/> 97.97% - IEEE 802.11a		0.09
<input checked="" type="checkbox"/> 95.89% - IEEE 802.11n (HT20)		0.18
<input checked="" type="checkbox"/> 87.49% - IEEE 802.11n (HT40)		0.58




(F1~F3: 5745-5825 MHz) / (F4~F5: 5755-5795 MHz)
N_{TX} 1

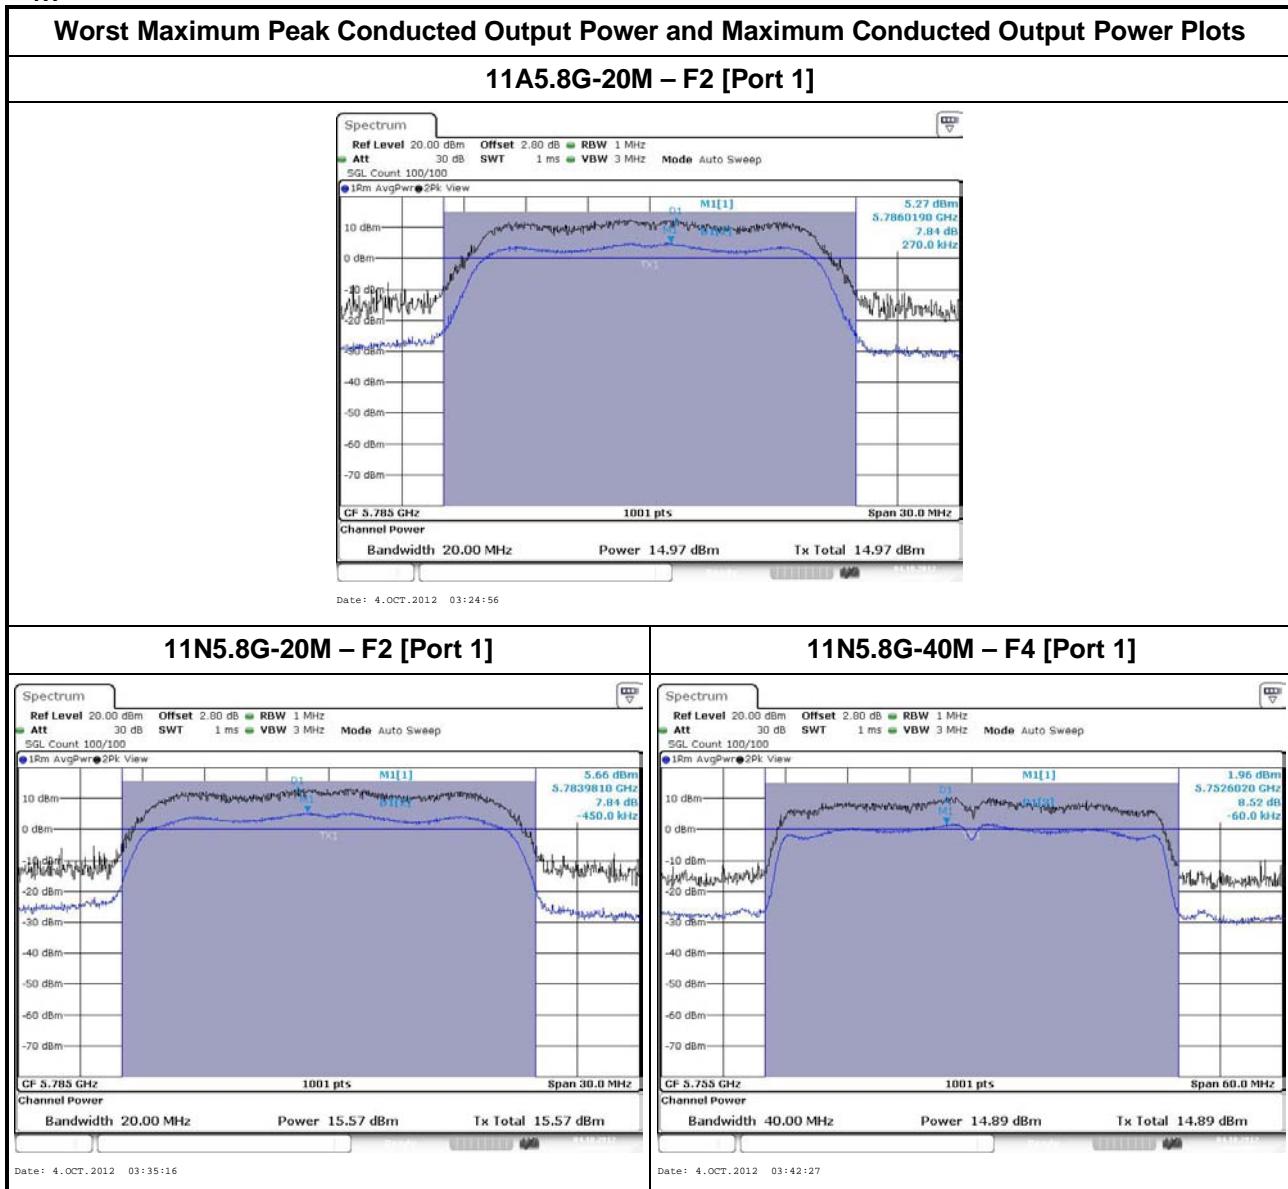

Note 1: Average Output Power Plots w/o Duty Factor



(F1~F3: 5745-5825 MHz) / (F4~F5: 5755-5795 MHz)
N_{TX} 2

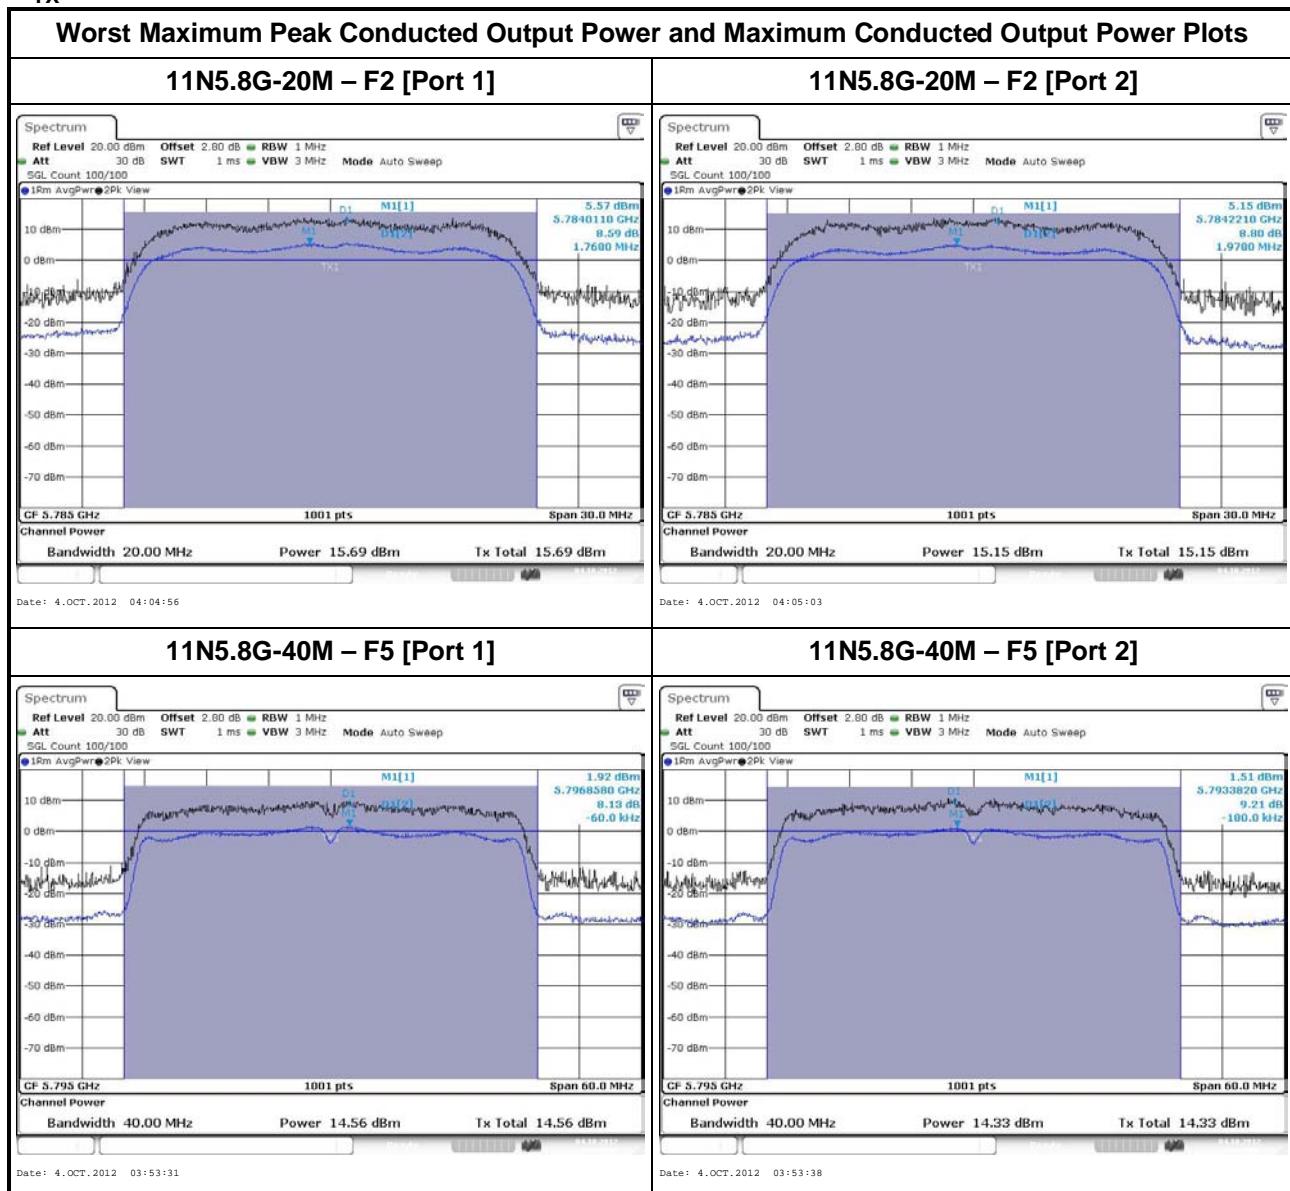

Note 1: Average Output Power Plots w/o Duty Factor



3.4 Power Spectral Density

3.4.1 Power Spectral Density Limit

Power Spectral Density Limit	
<input checked="" type="checkbox"/> Power Spectral Density (PSD) $\leq 8 \text{ dBm/3kHz}$	

3.4.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/> Power spectral density procedures that the same method as used to determine the conducted output power shall be used to determine the power spectral density. In addition, the use of a peak PSD procedure will always result in a "worst-case" measured level for comparison to the limit. Therefore, whenever the DTS bandwidth exceeds 500 kHz, it is acceptable to utilize the peak PSD procedure to demonstrate compliance to the PSD limit, regardless of how the fundamental output power was measured. For the power spectral density shall be measured using below options:	
<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 5.3.1 Option 1 (peak PSD; BWCF=-15.2dB).	
<input type="checkbox"/> Refer as FCC KDB 558074, clause 5.3.2 Option 2 (average PSD; BWCF=-15.2dB).	
<input type="checkbox"/> Refer as ANSI C63.10, clause 6.11.2.3 for PSD for DTS - (RBW=3kHz; sweep=100s).	
<input type="checkbox"/> Refer as ANSI C63.10, clause 6.11.2.4 for Alternative PSD for DTS - (RBW=3kHz; average=100)	
<input checked="" type="checkbox"/> For conducted measurement.	
<input checked="" type="checkbox"/> The EUT supports single transmit chain and measurements performed on this transmit chain.	
<input checked="" type="checkbox"/> The EUT supports diversity transmitting and the results on transmit chain port 1 is the worst case.	
<input checked="" type="checkbox"/> The EUT supports multiple transmit chains using options given below:	
	<input checked="" type="checkbox"/> Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the N_{TX} output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace. The new data trace samples added 100 kHz segment and found the highest value of each 100 kHz segments. Add the bandwidth correction factor (BWCF) [-15.2 dB] adjusting in power spectral density per 3kHz.
	<input type="checkbox"/> Option 2: Measure and add $10 \log(N)$ dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with $10 \log(N)$. Or each transmit chains shall be add $10 \log(N)$ to compared with the limit.



3.4.4 Test Setup

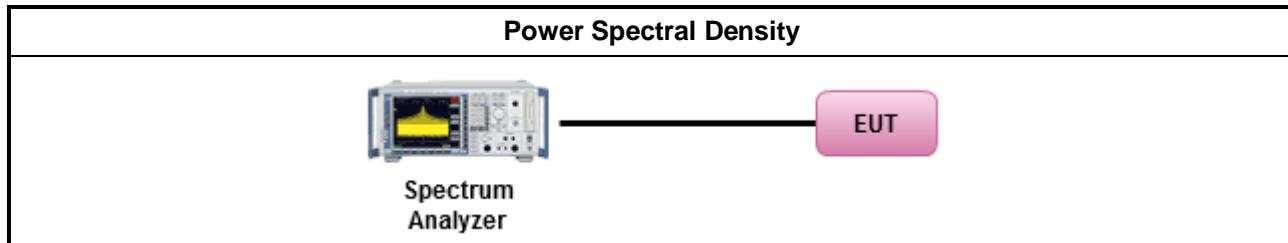

3.4.5 Test Result of Power Spectral Density


Power Spectral Density Result								
Condition			Power Spectral Density (dBm/3kHz)					
Modulation Mode	N _{TX}	Freq. (MHz)	Sum Chain	-	-	-	-	Power Limit
11A5.8G-20M	1	5745	-17.27	-	-	-	-	8
11A5.8G-20M	1	5785	-17.09	-	-	-	-	8
11A5.8G-20M	1	5825	-17.78	-	-	-	-	8
11N5.8G-20M	1	5745	-17.20	-	-	-	-	8
11N5.8G-20M	1	5785	-15.41	-	-	-	-	8
11N5.8G-20M	1	5825	-16.76	-	-	-	-	8
11N5.8G-40M	1	5755	-20.26	-	-	-	-	8
11N5.8G-40M	1	5825	-19.80	-	-	-	-	8
11N5.8G-20M	2	5745	-14.27	-	-	-	-	8
11N5.8G-20M	2	5785	-14.09	-	-	-	-	8
11N5.8G-20M	2	5825	-14.36	-	-	-	-	8
11N5.8G-40M	2	5755	-17.15	-	-	-	-	8
11N5.8G-40M	2	5825	-17.05	-	-	-	-	8
Result			Complied					

Note 1: PSD [dBm/3kHz] = sum each transmit chains by bin-to-bin PSD [dBm/100kHz] + BWFC [-15.2 dB]


N_{TX} 1

Worst Power Spectral Density Plots


11A5.8G-20M – F2 [Sum All Chains]

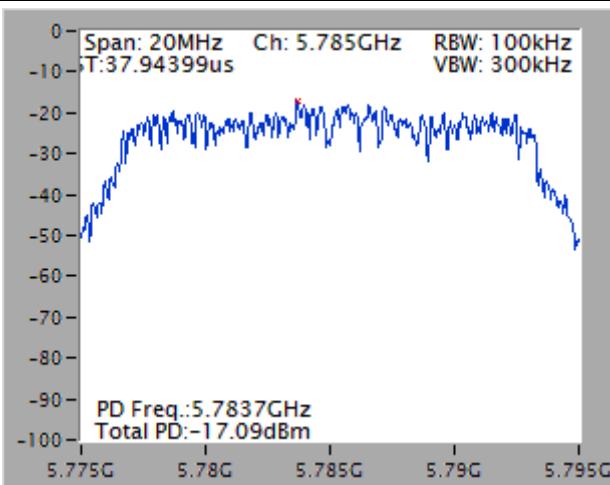

11N5.8G-20M – F2 [Sum All Chains]

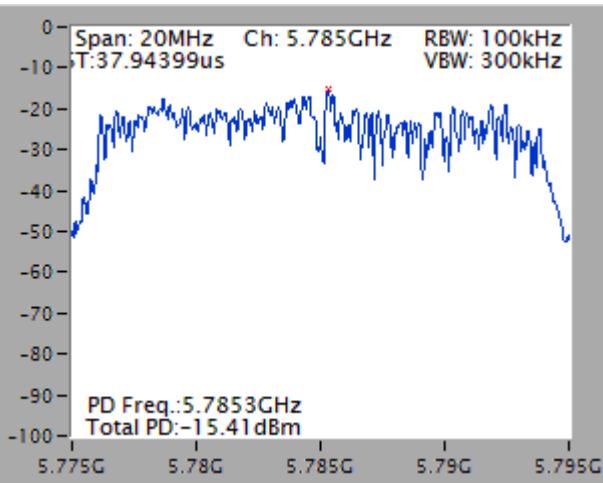


11N5.8G-40M – F5 [Sum All Chains]

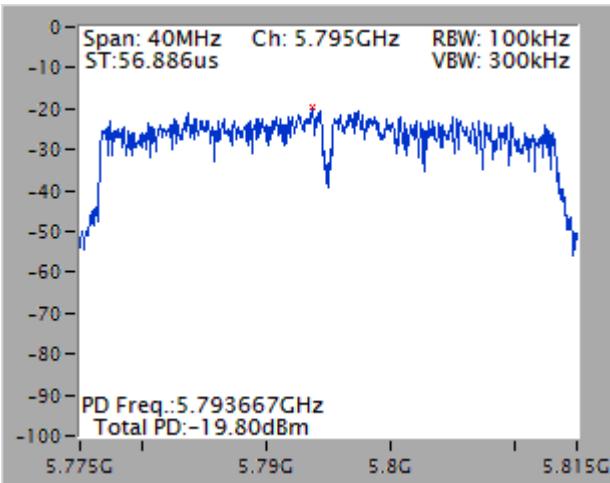


N_{TX} 2

Worst Power Spectral Density Plots

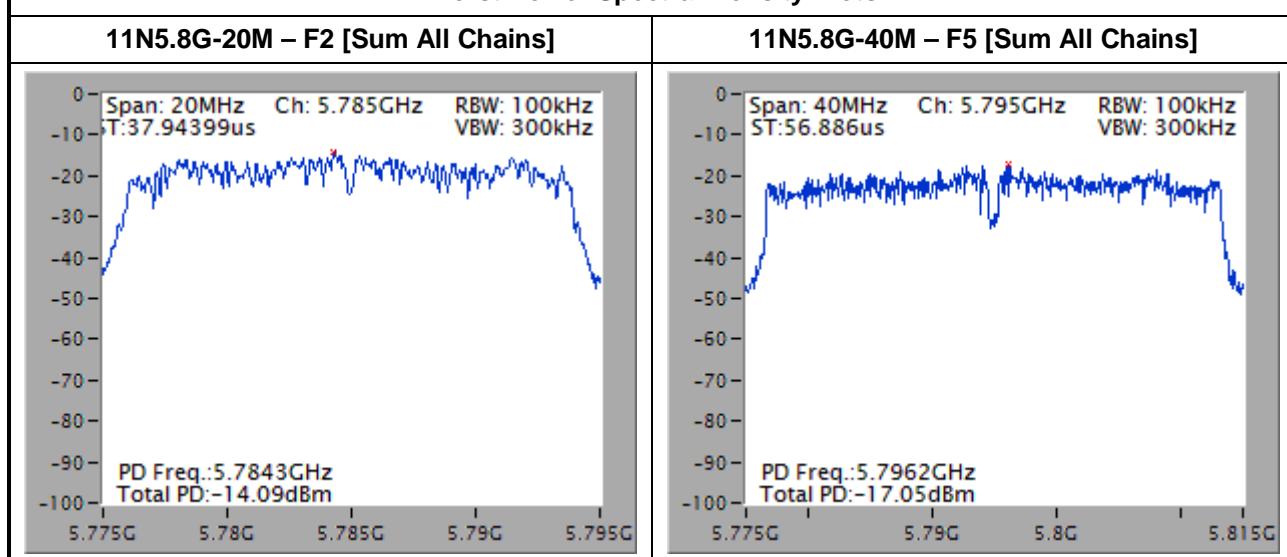

3.5 Transmitter Radiated Bandedge Emissions

3.5.1 Transmitter Radiated Bandedge Emissions Limit

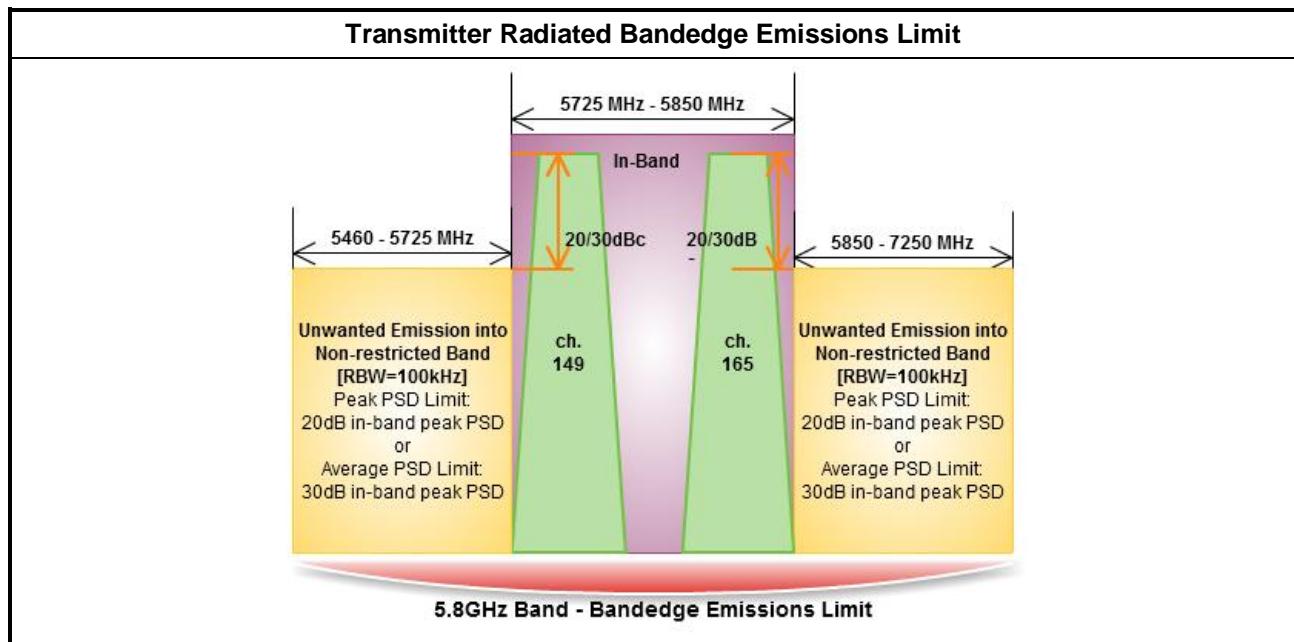

3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.




3.5.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	The average emission levels shall be measured in [duty cycle \geq 98 or duty factor].
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.2.2 bandedge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.
<input checked="" type="checkbox"/>	For the transmitter unwanted emissions shall be measured using following options below:
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 5.4.1 for unwanted emissions into non-restricted bands.
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 5.4.2 for unwanted emissions into restricted bands.
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 5.4.2.2.1 Option 1 (Power Averaging).
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 5.4.2.2.2 Option 2 (Trace Averaging).
	<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW) - Duty cycle \geq 98%.
	<input type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
	<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 5.4.2.2.1.1 measurement procedure peak limit.
	<input type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit.
<input checked="" type="checkbox"/>	For the transmitter bandedge emissions shall be measured using following options below:
<input type="checkbox"/>	Refer as FCC KDB 558074, clause 5.4.2.2.4 for narrower resolution bandwidth using the band power and summing the spectral levels (i.e., 100 kHz or 1 MHz).
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.2 for band-edge testing.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.3 for marker-delta method for band-edge measurements.

Test Method	
<input checked="" type="checkbox"/>	Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements). Measurements in the bandedge are typically made at a closer distance 1.0m, because the instrumentation noise floor is typically close to the radiated emission limit.
<input checked="" type="checkbox"/>	For radiated measurement, refer as ANSI C63.10, clause 6.5 for radiated emissions from above 1 GHz.

3.5.4 Test Setup

Transmitter Radiated Bandedge Emissions

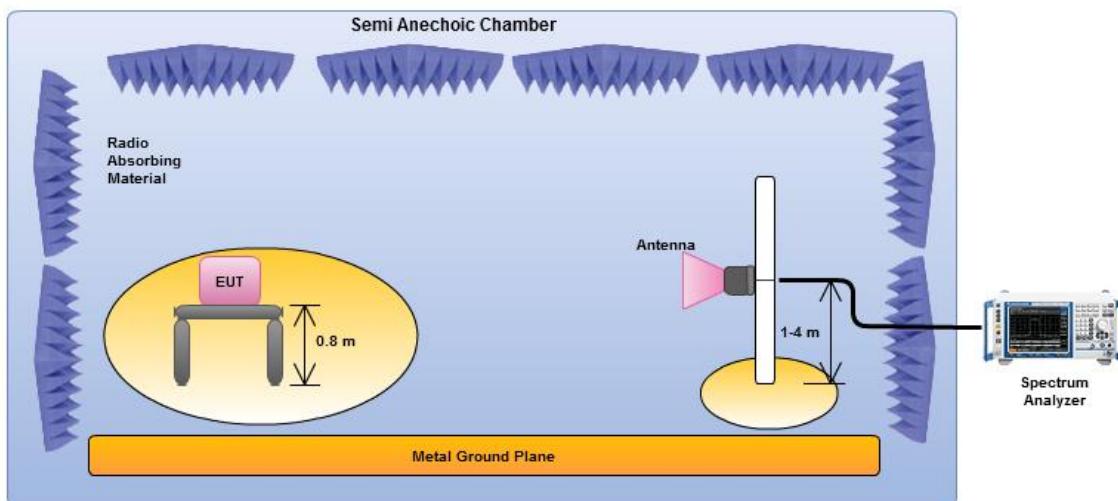



Electric field tests shall be performed in transmitter bandedge emissions using a calibrated horn antenna.

3.5.5 Test Result of Transmitter Radiated Bandedge Emissions-N_{TX} 1

Transmitter Radiated Bandedge Emissions Result								
Modulation	11A-20M		Non-restricted Band Emissions					
Non-restricted Band (MHz)	Test Ch. Freq. (MHz)	In-band PSD [i] (dBuV/100kHz)	NBE Freq. (MHz)	Out-band PSD [o] (dBuV/100kHz)	[i] – [o] (dB)	Limit (dB)	Level Type	Pol. note 1
5460-5725	5745	120.63	5724.62	94.70	25.93	20	PK	V
5850-7250	5825	121.08	5850.97	85.73	35.35	20	PK	V
Low Bandedge				Up Bandedge				

Note 1: Measurement worst emissions of receive antenna polarization: H (Horizontal) or V (Vertical)

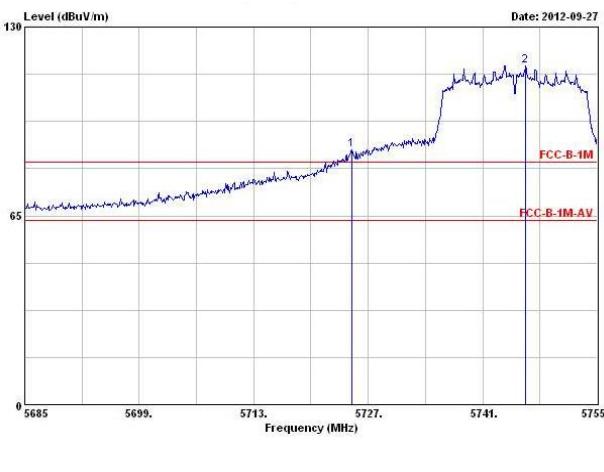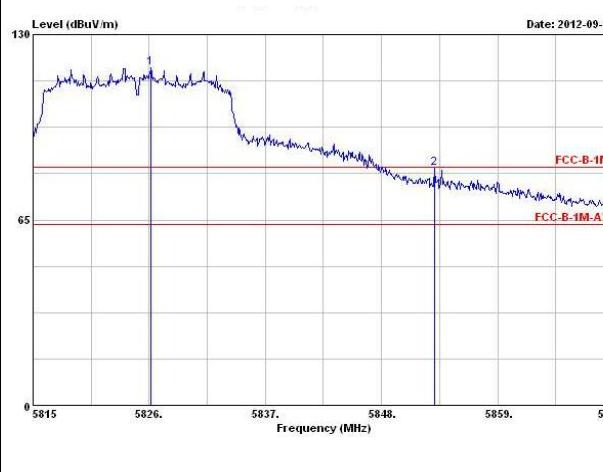

Transmitter Radiated Bandedge Emissions Result								
Modulation	11N-20M		Non-restricted Band Emissions					
Non-restricted Band (MHz)	Test Ch. Freq. (MHz)	In-band PSD [i] (dBuV/100kHz)	NBE Freq. (MHz)	Out-band PSD [o] (dBuV/100kHz)	[i] – [o] (dB)	Limit (dB)	Level Type	Pol. note 1
5460-5725	5745	116.72	5724.97	87.57	29.15	20	PK	V
5850-7250	5825	118.21	5853.01	83.08	35.13	20	PK	V
Low Bandedge				Up Bandedge				
								
Note 1: Measurement worst emissions of receive antenna polarization: H (Horizontal) or V (Vertical)								





Transmitter Radiated Bandedge Emissions Result								
Modulation	11N-40M		Non-restricted Band Emissions					
Non-restricted Band (MHz)	Test Ch. Freq. (MHz)	In-band PSD [i] (dBuV/100kHz)	NBE Freq. (MHz)	Out-band PSD [o] (dBuV/100kHz)	[i] – [o] (dB)	Limit (dB)	Level Type	Pol. note 1
5460-5725	5755	111.10	5717.40	90.22	20.88	20	PK	V
5850-7250	5795	115.29	5852.60	89.16	26.13	20	PK	V
Low Bandedge				Up Bandedge				
Note 1: Measurement worst emissions of receive antenna polarization: H (Horizontal) or V (Vertical)								

3.5.6 Test Result of Transmitter Radiated Bandedge Emissions-N_{TX} 2

Transmitter Radiated Bandedge Emissions Result								
Modulation	11N-20M		Non-restricted Band Emissions					
Non-restricted Band (MHz)	Test Ch. Freq. (MHz)	In-band PSD [i] (dBuV/100kHz)	NBE Freq. (MHz)	Out-band PSD [o] (dBuV/100kHz)	[i] – [o] (dB)	Limit (dB)	Level Type	Pol. note 1
5460-5725	5745	122.09	5724.90	96.81	25.28	20	PK	V
5850-7250	5825	123.35	5852.51	91.90	31.45	20	PK	V
Low Bandedge				Up Bandedge				
Note 1: Measurement worst emissions of receive antenna polarization: H (Horizontal) or V (Vertical)								

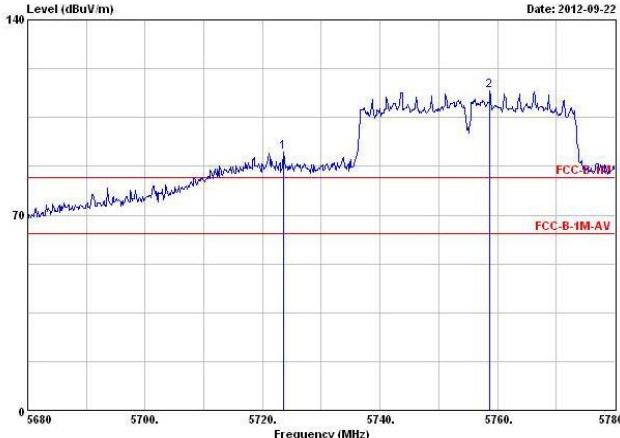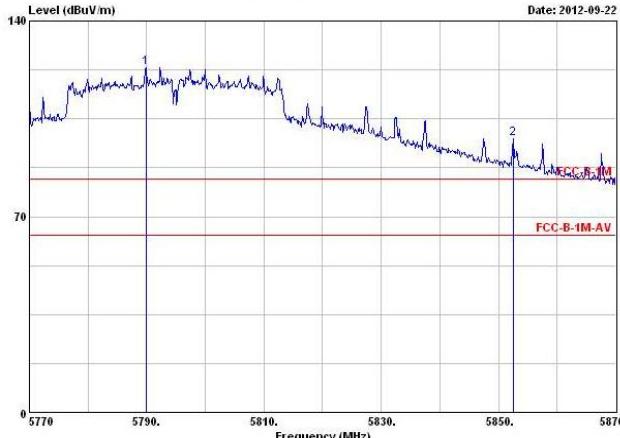

Transmitter Radiated Bandedge Emissions Result								
Modulation	11N-40M		Non-restricted Band Emissions					
Non-restricted Band (MHz)	Test Ch. Freq. (MHz)	In-band PSD [i] (dBuV/100kHz)	NBE Freq. (MHz)	Out-band PSD [o] (dBuV/100kHz)	[i] – [o] (dB)	Limit (dB)	Level Type	Pol. note 1
5460-5725	5755	114.68	5723.50	92.44	22.24	20	PK	V
5850-7250	5795	123.35	5852.60	97.86	25.49	20	PK	V
Low Bandedge				Up Bandedge				
								
Note 1: Measurement worst emissions of receive antenna polarization: H (Horizontal) or V (Vertical)								



3.6 Transmitter Radiated Unwanted Emissions

3.6.1 Transmitter Radiated Unwanted Emissions Limit

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Un-restricted Band Emissions Limit	
RF output power procedure	Limit (dB)
Peak output power procedure	20
Average output power procedure	30
Note 1: If the peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.	
Note 2: If the average output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the power in any 100 kHz outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum measured in-band average PSD level.	

3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.




3.6.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).
<input checked="" type="checkbox"/>	Measurements in the frequency range 5 GHz - 10GHz are typically made at a closer distance 1.0m, because the instrumentation noise floor is typically close to the radiated emission limit.
<input checked="" type="checkbox"/>	Measurements in the frequency range 10 GHz - 18GHz are typically made at a closer distance 1m, because the instrumentation noise floor is typically close to the radiated emission limit.
<input checked="" type="checkbox"/>	Measurements in the frequency range above 18 GHz - 40GHz are typically made at a closer distance 0.5m, because the instrumentation noise floor is typically close to the radiated emission limit.
<input checked="" type="checkbox"/>	The average emission levels shall be measured in [duty cycle \geq 98 or duty factor].
<input checked="" type="checkbox"/>	For the transmitter unwanted emissions shall be measured using following options below:
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 5.4.1 for unwanted emissions into non-restricted bands.
<input checked="" type="checkbox"/>	Refer as FCC KDB 558074, clause 5.4.2 for unwanted emissions into restricted bands.
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 5.4.2.2.1 Option 1 (Power Averaging).
	<input type="checkbox"/> Refer as FCC KDB 558074, clause 5.4.2.2.2 Option 2 (Trace Averaging).
	<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW) – Duty \geq 98%.
	<input type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions.
	<input checked="" type="checkbox"/> Refer as FCC KDB 558074, clause 5.4.2.2.1.1 measurement procedure peak limit.
	<input type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit.
<input checked="" type="checkbox"/>	For radiated measurement.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.4 for radiated emissions from below 30 MHz.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.5 for radiated emissions from 30 MHz to 1000 MHz.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.5 for radiated emissions from above 1 GHz.

3.6.4 Test Setup


Transmitter Radiated Unwanted Emissions

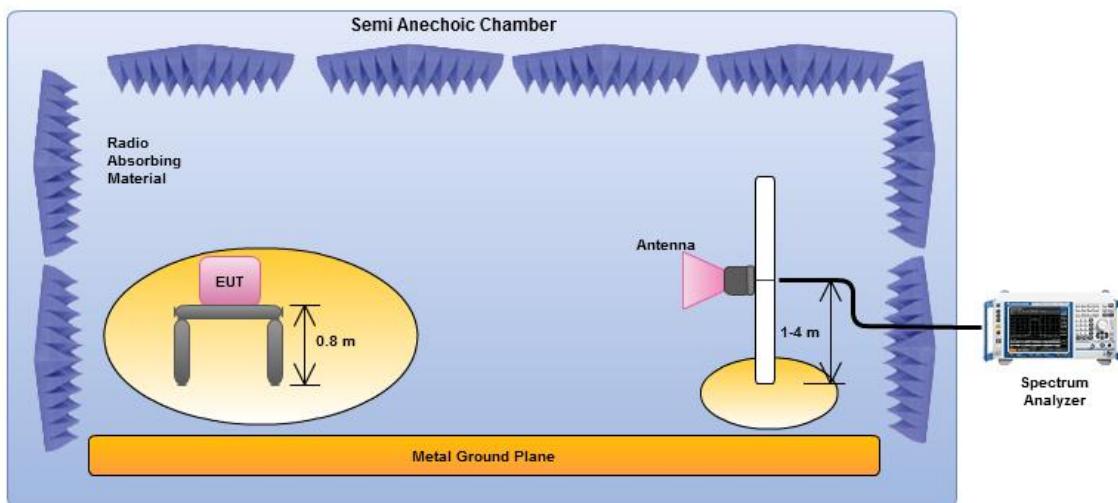

Magnetic field tests shall be performed in the frequency range of 9 kHz to 30 MHz using a calibrated loop antenna. Electric field tests shall be performed in the frequency range of 30 MHz to 1000 MHz using a calibrated bi-log antenna and the frequency range of 1 GHz to 40 GHz using a calibrated horn antenna.



3.6.5 Transmitter Radiated Unwanted Emissions (Below 1GHz)

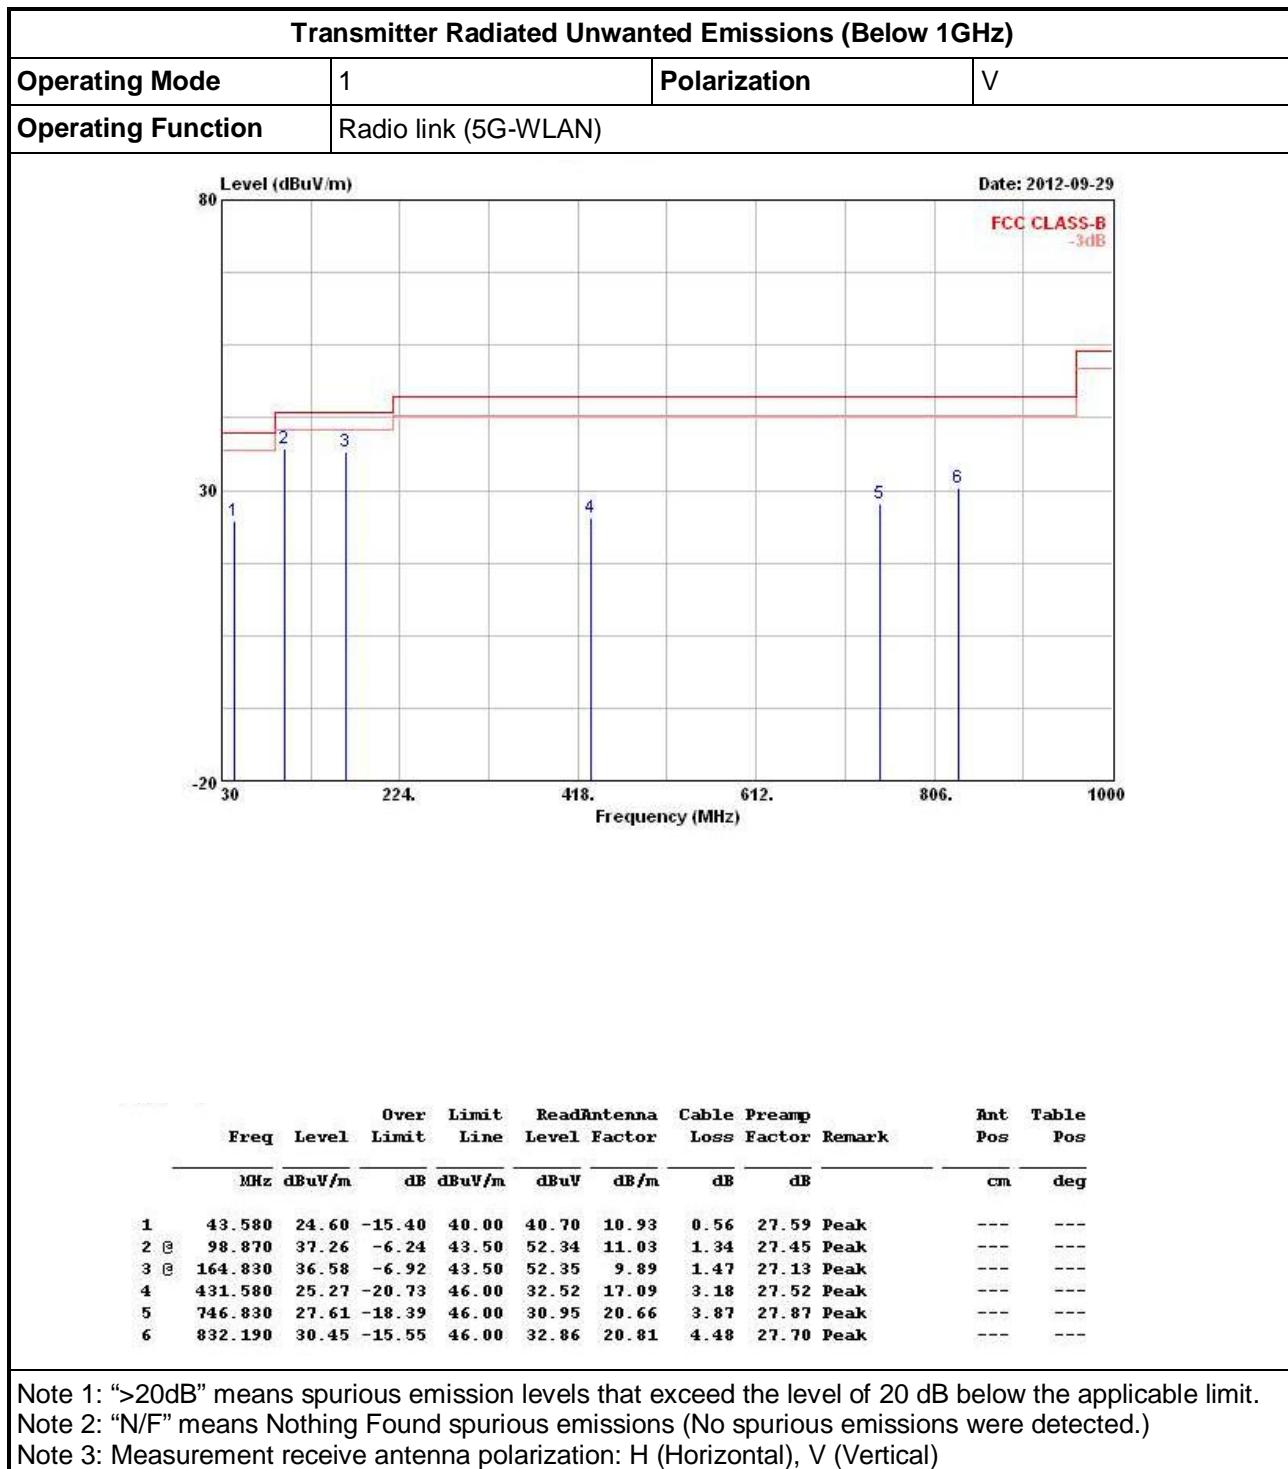



Transmitter Radiated Unwanted Emissions (Below 1GHz)

Operating Mode	1	Polarization	H				
Operating Function	Radio link (5G-WLAN)						
Freq	Over Limit	Read Line	Antenna	Cable	Preamp	Ant Pos	Table Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	deg
1	98.870	25.52	-17.98	43.50	40.60	11.03	1.34 27.45 Peak
2	113.420	25.82	-17.68	43.50	39.36	12.49	1.36 27.39 Peak
3	164.630	39.58	-3.92	43.50	55.35	9.89	1.47 27.13 Peak
4	238.550	30.35	-15.65	46.00	43.34	11.44	2.43 26.86 Peak
5	793.390	31.90	-14.10	46.00	34.60	20.75	4.32 27.77 Peak
6	831.220	32.60	-13.40	46.00	35.02	20.81	4.47 27.70 Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)



3.6.6 Transmitter Radiated Unwanted Emissions (Above 1GHz) 11A5.8G-20M


Transmitter Radiated Unwanted Emissions (Above 1GHz)											
Modulation Mode		11A5.8G-20M-N _{TX} 1			Test Freq. (FX)			F1			
Operating Function		Transmit			Polarization			V			
Level (dB _{uV/m})											
120											
60											
0											
Date: 2012-09-21											
1000	8738.000	54.22	Over Limit	Line	Read	Antenna	Cable	Preamp	Ant	Table	
					Level	Factor	Loss	Factor	Pos	Pos	
	MHz	dB _{uV/m}	dB	dB _{uV/m}	dB _{uV}	dB/m	dB	dB	cm	deg	
1	8738.000	54.22			42.38	38.69	6.27	33.12 Peak	---	---	
2	811490.000	60.19	-3.35	63.54	46.15	40.07	6.54	32.57 PK	---	---	
3	17235.000	68.58			49.69	43.79	6.77	31.67 Peak	---	---	

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions (item 1 and 3) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11A5.8G-20M-N _{TX} 1	Test Freq. (FX)	F1
Operating Function	Transmit	Polarization	H

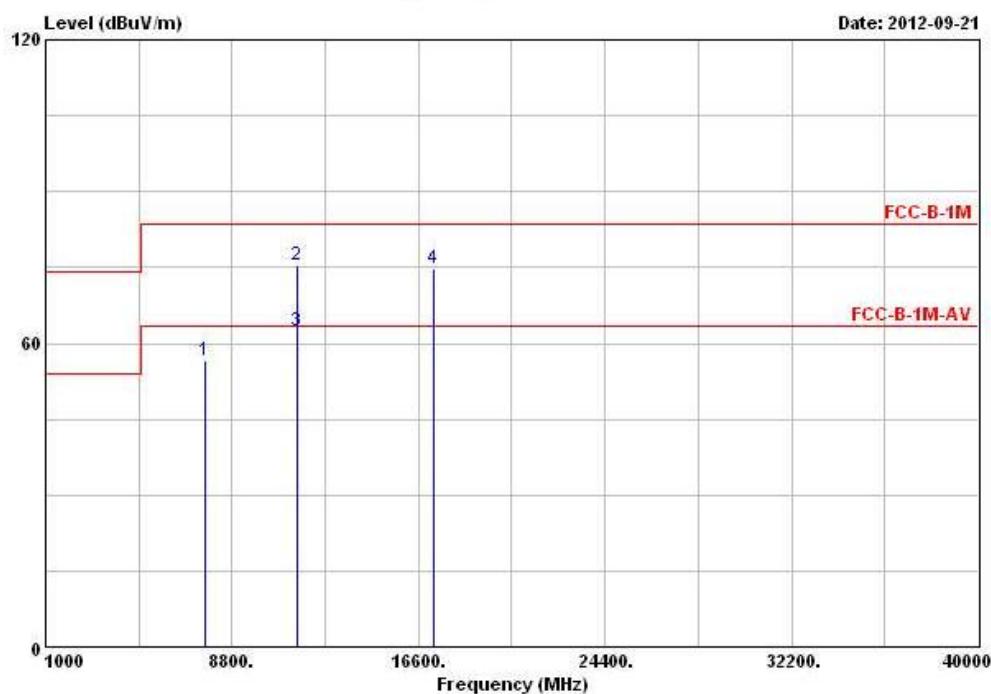

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant Pos	Table Pos
		Line	Limit	Antenna	Cable	Loss	Factor		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 7649.000	56.63	-6.91	63.54	46.14	37.76	5.71	32.98	PK	---
2 11490.000	75.30	-8.24	83.54	61.26	40.07	6.54	32.57	Peak	---
3 11490.000	62.29	-1.25	63.54	48.25	40.07	6.54	32.57	Average	---
4 17235.000	74.69			55.80	43.79	6.77	31.67	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 4) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11A5.8G-20M-N _{TX} 1	Test Freq. (FX)	F2
Operating Function	Transmit	Polarization	V

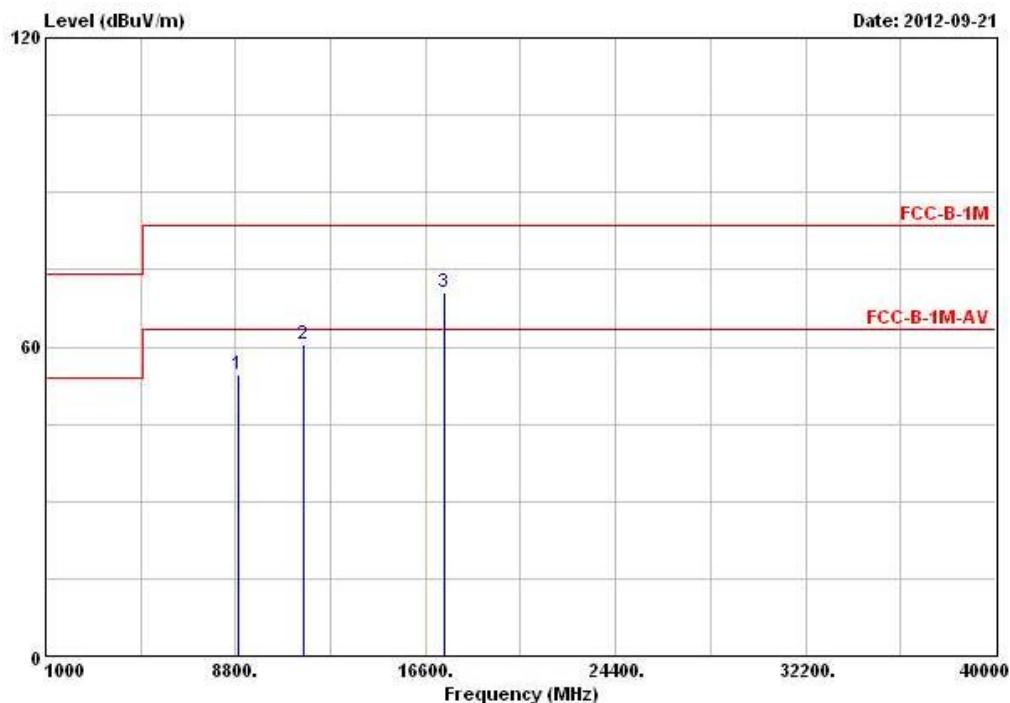

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant Pos	Table Pos
		Line	Limit	Line	Factor	Cable	Preamp		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 8914.000	54.66			42.73	38.77	6.34	33.18 Peak	---	---
2 11570.000	60.54	-3.00	63.54	46.45	40.03	6.64	32.58 PK	---	---
3 17355.000	70.57			50.41	44.89	6.96	31.69 Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 1 and 3) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11A5.8G-20M-N _{TX} 1	Test Freq. (FX)	F2
Operating Function	Transmit	Polarization	H

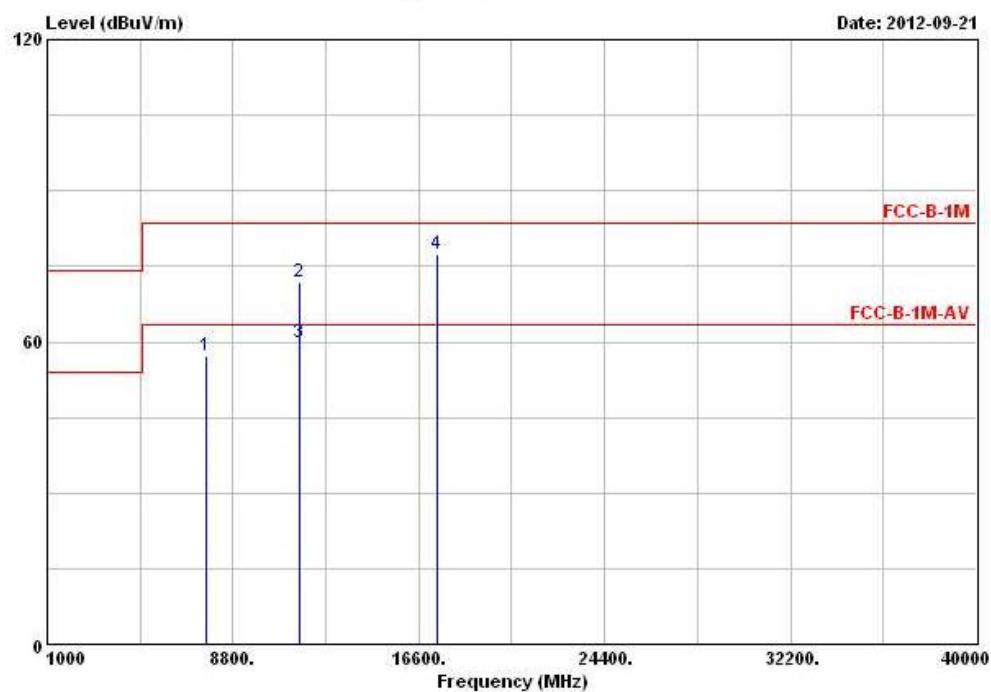

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant Pos	Table Pos
		Line	Limit	Level	Factor	Cable	Preamp		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 7693.000	57.28	-6.26	63.54	46.76	37.78	5.72	32.98	PK	---
2 11570.000	71.90	-11.64	83.54	57.81	40.03	6.64	32.58	Peak	---
3 @11570.000	59.79	-3.75	63.54	45.70	40.03	6.64	32.58	Average	---
4 17355.000	77.30			57.14	44.89	6.96	31.69	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 4) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11A5.8G-20M-N _{TX} 1	Test Freq. (FX)	F3
Operating Function	Transmit	Polarization	V

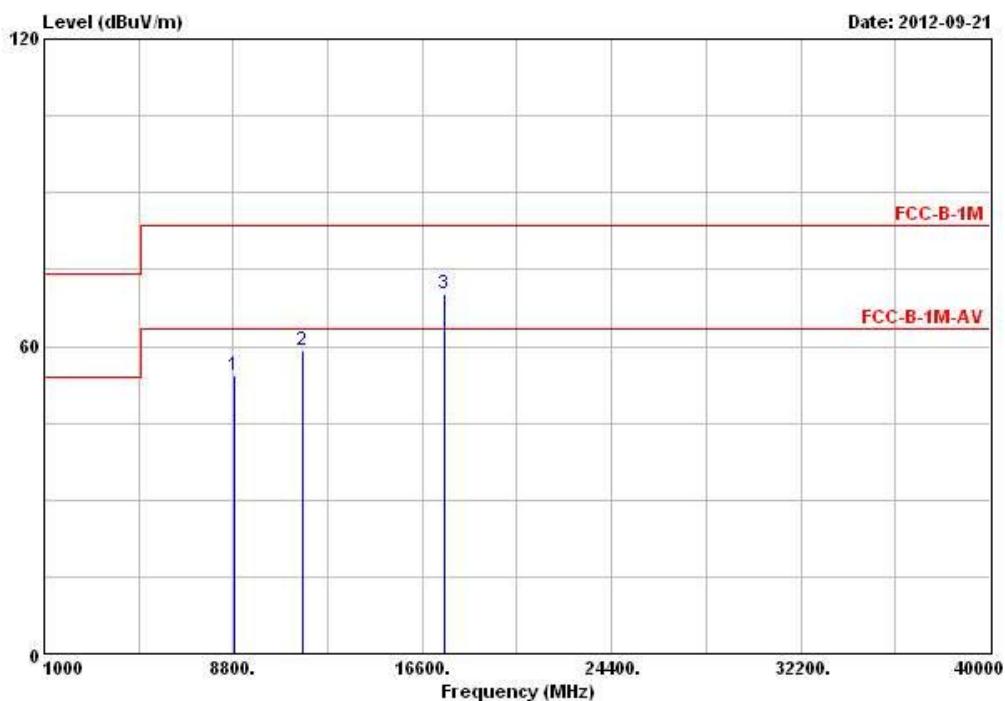

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant Pos	Table Pos
		Line	Limit	Level	Factor	Loss	Factor		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/n	dB	dB	cm	deg
1 8826.000	54.26			42.38	38.73	6.30	33.15 Peak	---	---
2 @11650.000	59.04	-4.50	63.54	44.94	39.96	6.73	32.59 PK	---	---
3 17475.000	70.27			48.86	45.99	7.15	31.73 Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 1 and 3) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11A5.8G-20M-N _{TX} 1	Test Freq. (FX)	F3
Operating Function	Transmit	Polarization	H

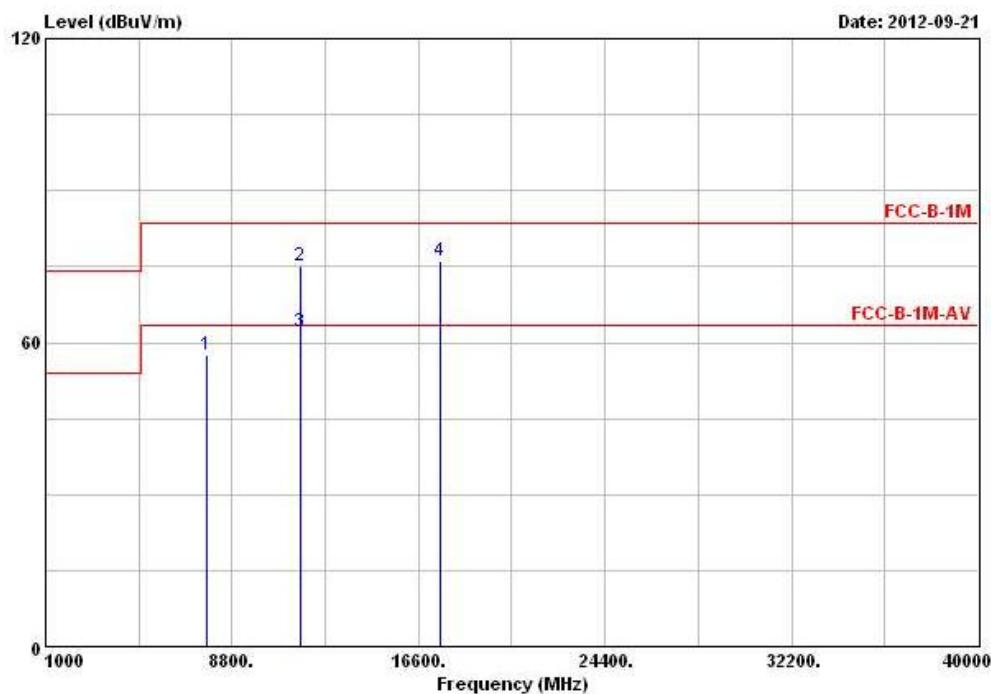

Freq	Level	Over Limit	Line	Read		Ant	Table		
				Antenna	Factor			Pos	Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 @ 7737.000	57.54	-6.00	63.54	47.02	37.79	5.72	32.99	PK	---
2 @ 11650.000	74.99	-8.55	83.54	60.89	39.96	6.73	32.59	Peak	---
3 @ 11650.000	62.22	-1.32	63.54	48.12	39.96	6.73	32.59	Average	---
4 @ 17475.000	76.26			54.85	45.99	7.15	31.73	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 4) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



3.6.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11N5.8G-20M

Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	11N5.8G-20M-N _{TX} 1	Test Freq. (FX)	F1
Operating Function	Transmit	Polarization	V

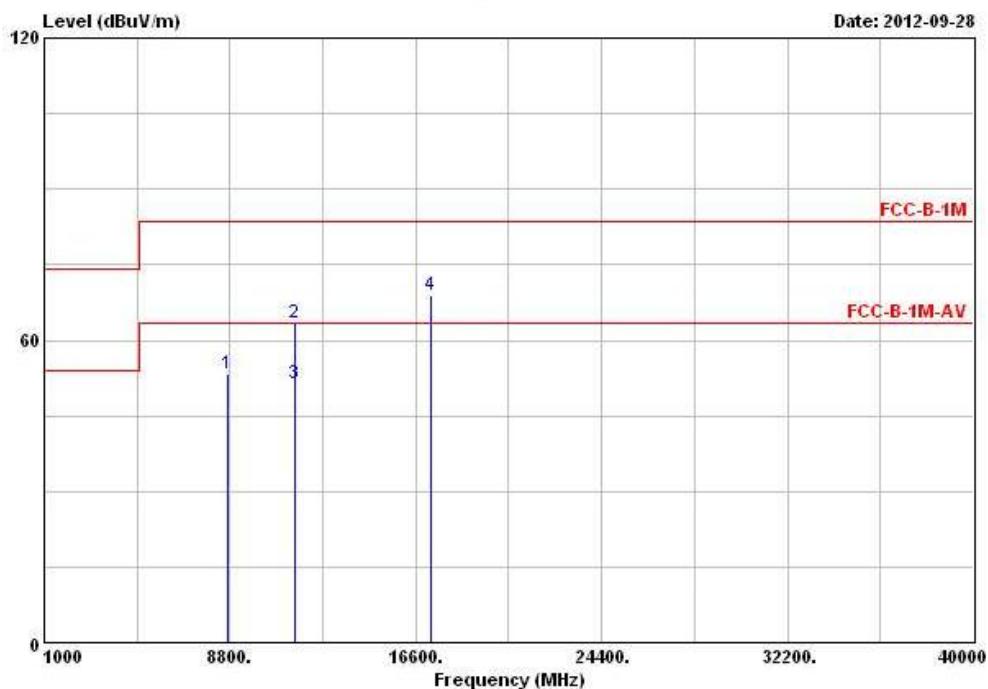

Freq	Level	Over Limit	Line	ReadAntenna		Cable Preamp		Remark	Ant Pos	Table Pos
				Level	Factor	Loss	Factor			
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 8738.000	53.48			41.64	38.69	6.27	33.12	Peak	---	---
2 11490.000	63.45	-20.09	83.54	49.41	40.07	6.54	32.57	Peak	---	---
3 11490.000	51.29	-12.25	63.54	37.25	40.07	6.54	32.57	Average	---	---
4 17235.000	69.02			50.13	43.79	6.77	31.67	Peak	---	---

Note 1: “>20dB” means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 1: >2SD means spurious emission levels that exceed the level of 2 SD below the appropriate limit.

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 1 and 4) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11N5.8G-20M-N _{TX} 1	Test Freq. (FX)	F1
Operating Function	Transmit	Polarization	H

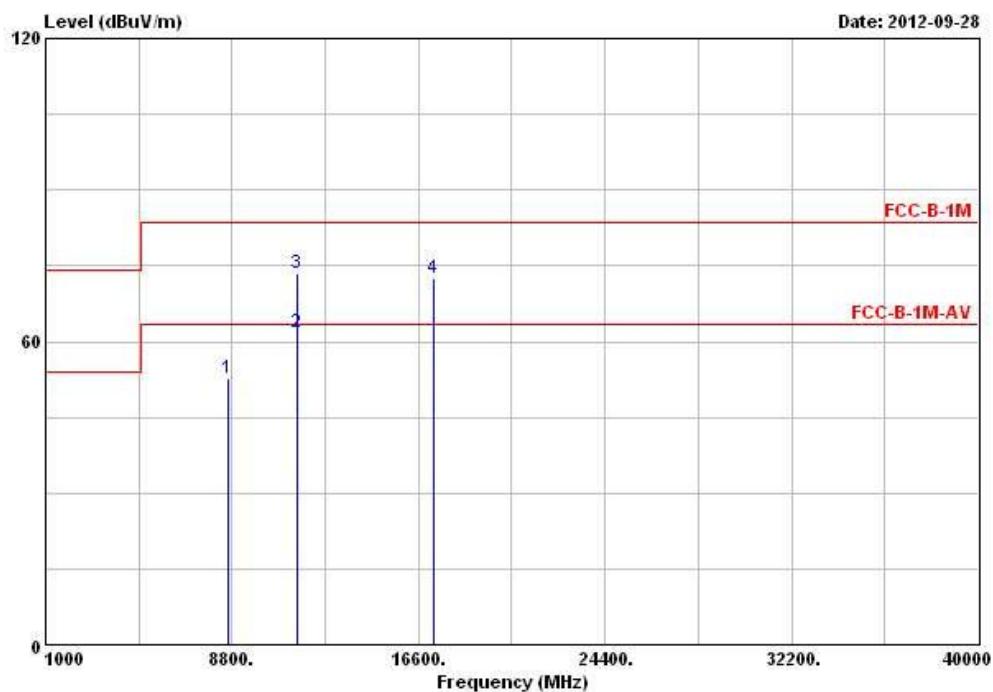

Freq	Level	Over	Limit	ReadAntenna		Cable	Preamp	Remark	Ant	Table
		Limit	Line	Level	Factor	Cable	Preamp			
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 8606.000	52.60			40.82	38.64	6.21	33.07	Peak	---	---
2 @11490.000	61.80	-1.74	63.54	47.76	40.07	6.54	32.57	Average	---	---
3 11490.000	73.38	-10.16	83.54	59.34	40.07	6.54	32.57	Peak	---	---
4 17235.000	72.49			53.60	43.79	6.77	31.67	Peak	---	---

Note 1: “>20dB” means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 1 and 4) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11N5.8G-20M-N _{TX} 1	Test Freq. (FX)	F2
Operating Function	Transmit	Polarization	V

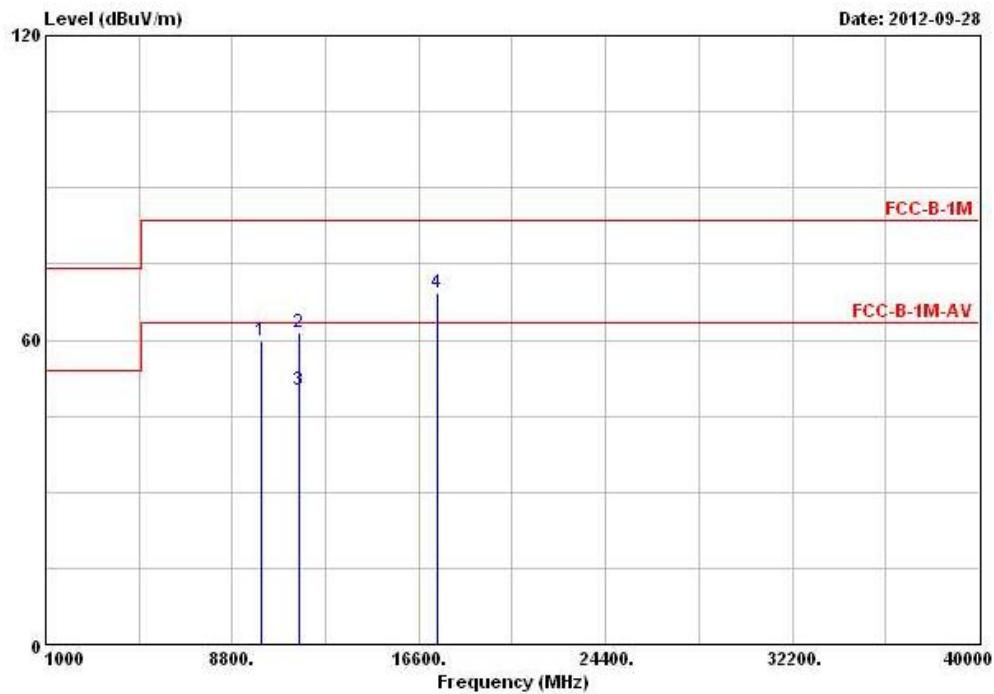

Freq	Level	Over Limit	Line	Read	Antenna	Cable	Preamp	Ant Table	
								Pos	Pos
MHz	dBuV/m		dB	dBuV/m	dBuV	dB/m	dB	cm	deg
1 9981.000	59.95			46.77	39.65	6.83	33.30	Peak	---
2 11570.000	61.43	-22.11	83.54	47.34	40.03	6.64	32.58	Peak	---
3 11570.000	50.13	-13.41	63.54	36.04	40.03	6.64	32.58	Average	---
4 17355.000	69.36			49.20	44.89	6.96	31.69	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 1 and 4) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11N5.8G-20M-N _{TX} 1	Test Freq. (FX)	F2
Operating Function	Transmit	Polarization	H

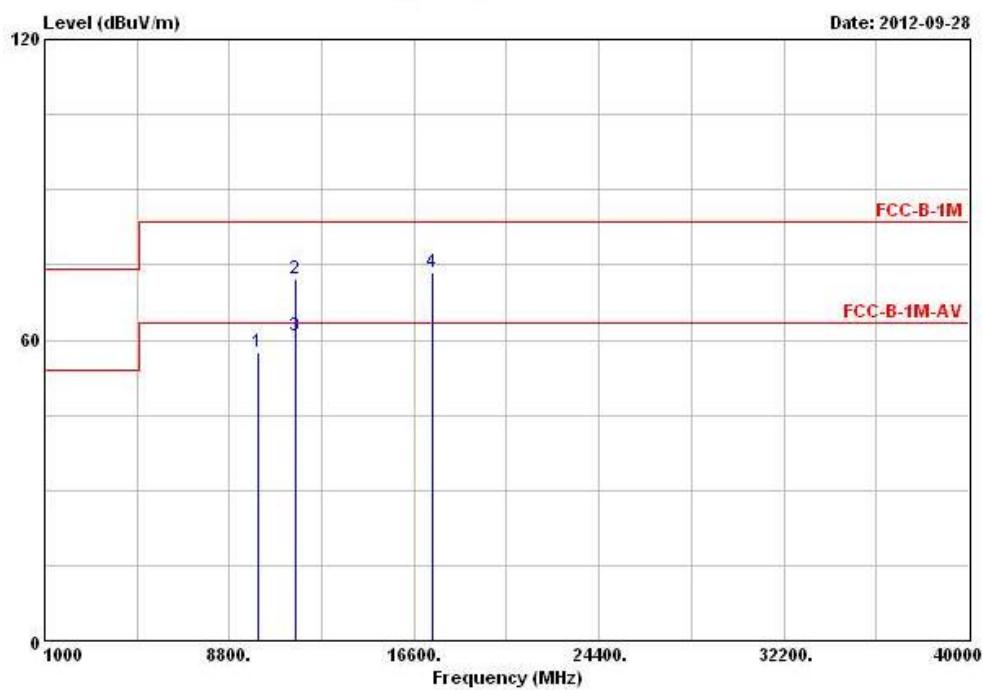

Freq	Level	Over Limit	Line	Read		Ant	Table		
				Antenna	Factor			Pos	Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 9981.000	57.52			44.34	39.65	6.83	33.30	Peak	---
2 11570.000	72.25	-11.29	83.54	58.16	40.03	6.64	32.58	Peak	---
3 @11570.000	60.76	-2.78	63.54	46.67	40.03	6.64	32.58	Average	---
4 17355.000	73.55			53.39	44.89	6.96	31.69	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 1 and 4) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11N5.8G-20M-N _{TX} 1	Test Freq. (FX)	F3
Operating Function	Transmit	Polarization	V

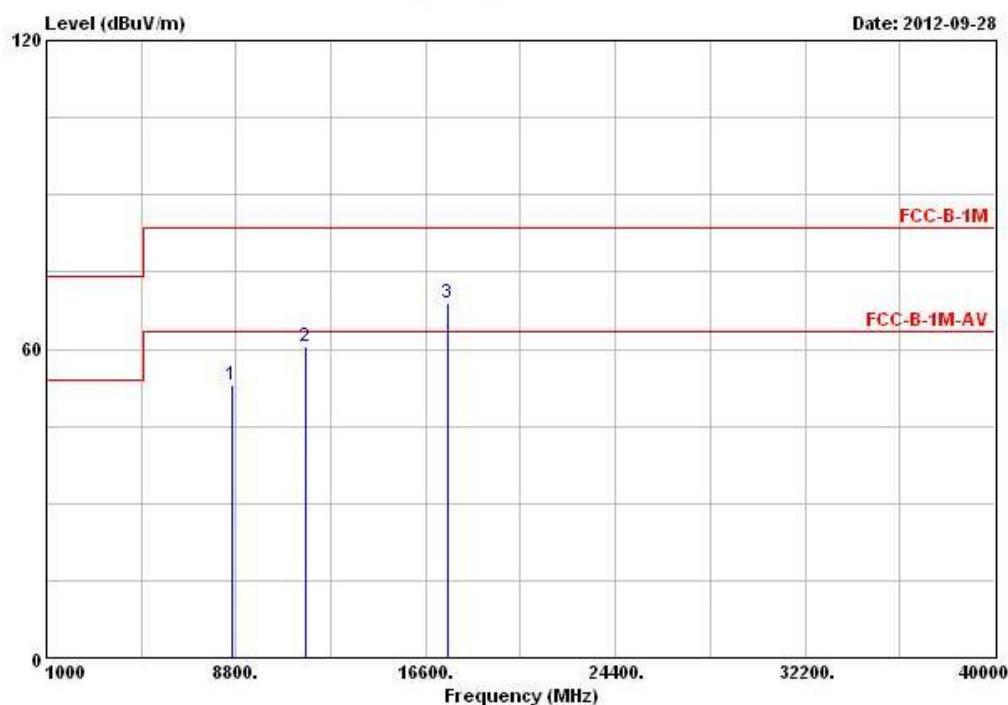

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant Pos	Table Pos
		Line	Limit	Level	Factor	Cable	Preamp		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 8617.000	53.16			41.38	38.65	6.21	33.08 Peak	---	---
2 @11650.000	60.49	-3.05	63.54	46.39	39.96	6.73	32.59 PK	---	---
3 17475.000	68.98			47.57	45.99	7.15	31.73 Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 1 and 3) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11N5.8G-20M-N _{TX} 1	Test Freq. (FX)	F3
Operating Function	Transmit	Polarization	H

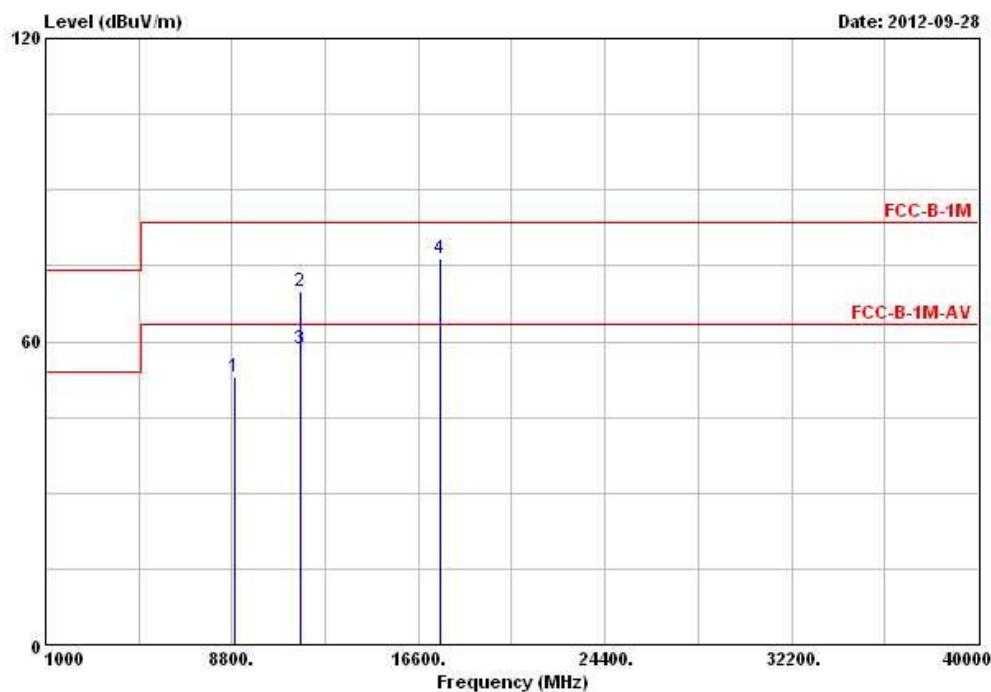

Freq	Level	Over Limit Line	Read	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant	Table
								Pos	Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 8914.000	52.88			40.95	38.77	6.34	33.18 Peak	---	---
2 11650.000	69.96	-13.58	83.54	55.86	39.96	6.73	32.59 Peak	---	---
3 @11650.000	58.58	-4.96	63.54	44.48	39.96	6.73	32.59 Average	---	---
4 @17475.000	76.36			54.95	45.99	7.15	31.73 Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 1 and 4) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



3.6.8 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11N5.8G-40M


Transmitter Radiated Unwanted Emissions (Above 1GHz)											
Modulation Mode		11N5.8G-40M-N _{TX} 1			Test Freq. (FX)			F4			
Operating Function		Transmit			Polarization			V			
Level (dB _{UV} /m)											
120											
60											
0											
Date: 2012-09-28											
1000	8661.000	53.19	Over Limit	Line	Read	Antenna	Cable	Preamp	Ant	Table	
Freq	Level	dB	dB _{UV} /m	dB	Level	Factor	Loss	Factor	Pos	Pos	
MHz	dB _{UV} /m								cm	deg	
1	8661.000	53.19			41.38	38.67	6.23	33.09 Peak	---	---	
2	11510.000	60.38	-3.16	63.54	46.28	40.10	6.57	32.57 PK	---	---	
3	17265.000	66.64			47.39	44.11	6.81	31.67 Peak	---	---	

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions (item 1 and 3) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11N5.8G-40M-N _{TX} 1	Test Freq. (FX)	F4
Operating Function	Transmit	Polarization	H

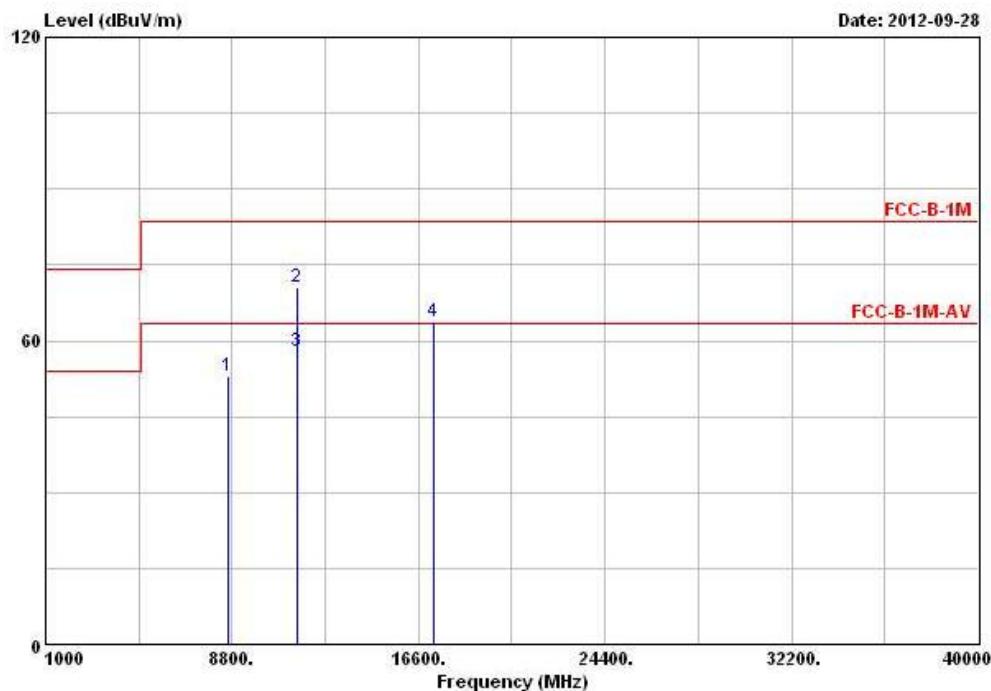

Freq	Level	Over Limit	Line	Read	Antenna	Cable	Preamp	Ant Table	
								Pos	Pos
MHz	dB _{uV/m}		dB	dB _{uV/m}	dB _{uV}	dB/m	dB	cm	deg
1 8650.000	52.85			41.06	38.66	6.22	33.09 Peak	---	---
2 11510.000	70.59	-12.95	83.54	56.49	40.10	6.57	32.57 Peak	---	---
3 @11510.000	57.84	-5.70	63.54	43.74	40.10	6.57	32.57 Average	---	---
4 17265.000	63.76			44.51	44.11	6.81	31.67 Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 1 and 4) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11N5.8G-40M-N _{TX} 1	Test Freq. (FX)	F5
Operating Function	Transmit	Polarization	V

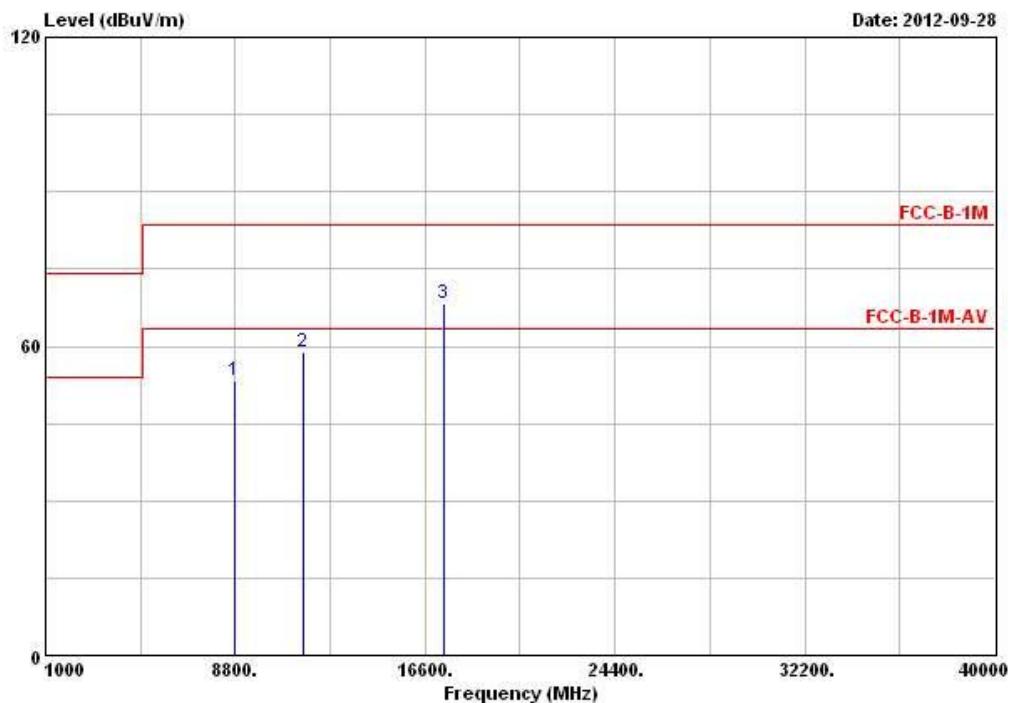

Freq	Level	Over Limit	Limit Line	Read		Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
				Antenna Level	Factor					
MHz	dBuV/m			dB	dBuV/m	dBuV	dB/m	dB	deg	cm
1 8782.000	53.43			41.56	38.71	6.29	33.13	Peak	---	---
2 11590.000	58.88	-4.66	63.54	44.78	40.01	6.67	32.58	PK	---	---
3 17385.000	68.30			47.81	45.20	7.00	31.71	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 1 and 3) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11N5.8G-40M-N _{TX} 1	Test Freq. (FX)	F5
Operating Function	Transmit	Polarization	H

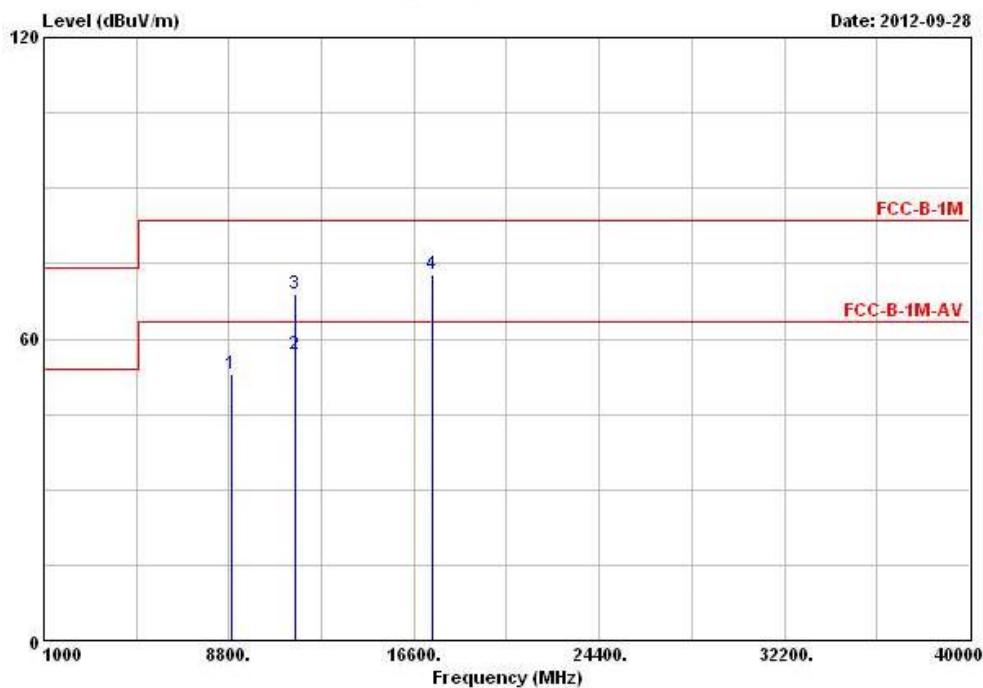

Freq	Level	Over Limit	Line	Read		Ant	Table		
				Antenna	Factor			Pos	Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 8881.000	52.92			41.01	38.75	6.33	33.17	Peak	---
2 @11590.000	56.93	-6.61	63.54	42.83	40.01	6.67	32.58	Average	---
3 11590.000	68.92	-14.62	83.54	54.82	40.01	6.67	32.58	Peak	---
4 17385.000	72.76			52.27	45.20	7.00	31.71	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 1 and 4) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



3.6.9 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11N5.8G-20M


Transmitter Radiated Unwanted Emissions (Above 1GHz)											
Modulation Mode		11N5.8G-20M-N _{TX} 2			Test Freq. (FX)			F1			
Operating Function		Transmit			Polarization			V			
Level (dBuV/m)											Date: 2012-09-22
120											FCC-B-1M
60											FCC-B-1M-AV
0											
1000	8298.000	54.30	-9.24	63.54	43.04	38.31	5.99	33.04	PK	---	---
8800.	11490.000	65.96	-17.58	83.54	51.92	40.07	6.54	32.57	Peak	---	---
16600.	11490.000	54.52	-9.02	63.54	40.48	40.07	6.54	32.57	Average	---	---
40000	17235.000	69.07		50.18	43.79	6.77	31.67	Peak		---	---
Frequency (MHz)	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	8298.000	54.30	-9.24	63.54	43.04	38.31	5.99	33.04	PK	---	---
2	11490.000	65.96	-17.58	83.54	51.92	40.07	6.54	32.57	Peak	---	---
3	11490.000	54.52	-9.02	63.54	40.48	40.07	6.54	32.57	Average	---	---
4	17235.000	69.07		50.18	43.79	6.77	31.67	Peak		---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
 Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
 Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.
 Note 5: For un-restricted bands, unwanted emissions (item 4) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11N5.8G-20M-N _{TX} 2	Test Freq. (FX)	F1
Operating Function	Transmit	Polarization	H

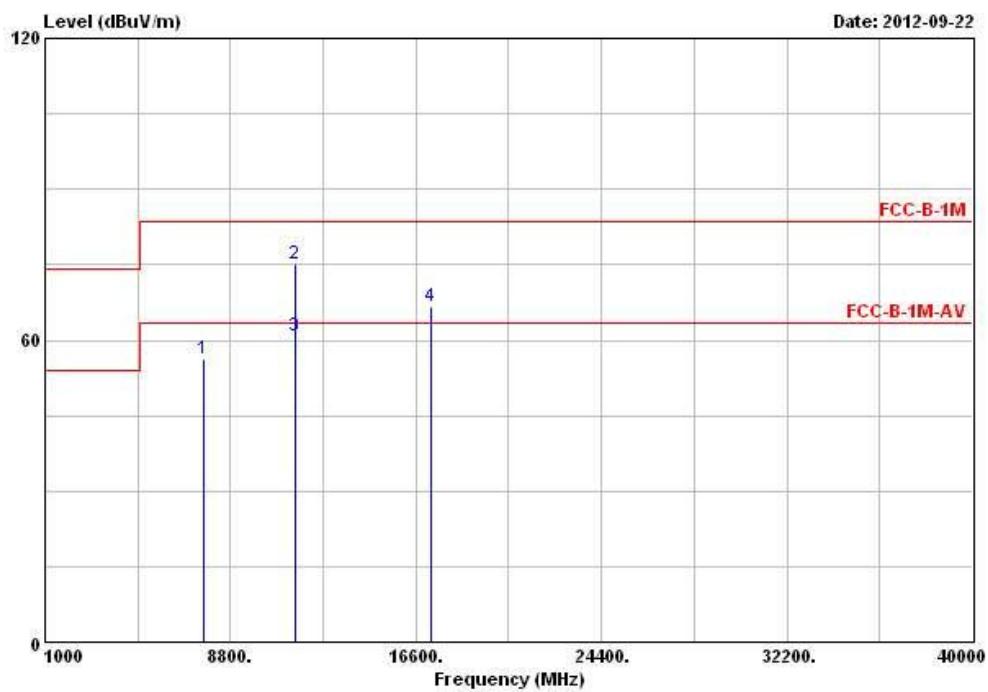

Freq	Level	Over Limit	Line	Read		Ant	Table		
				Antenna	Level Factor			Pos	Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 7649.000	56.35	-7.19	63.54	45.86	37.76	5.71	32.98	PK	---
2 11490.000	75.08	-8.46	83.54	61.04	40.07	6.54	32.57	Peak	---
3 @11490.000	60.74	-2.80	63.54	46.70	40.07	6.54	32.57	Average	---
4 17235.000	66.81			47.92	43.79	6.77	31.67	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 4) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11N5.8G-20M-N _{TX} 2	Test Freq. (FX)	F2
Operating Function	Transmit	Polarization	V

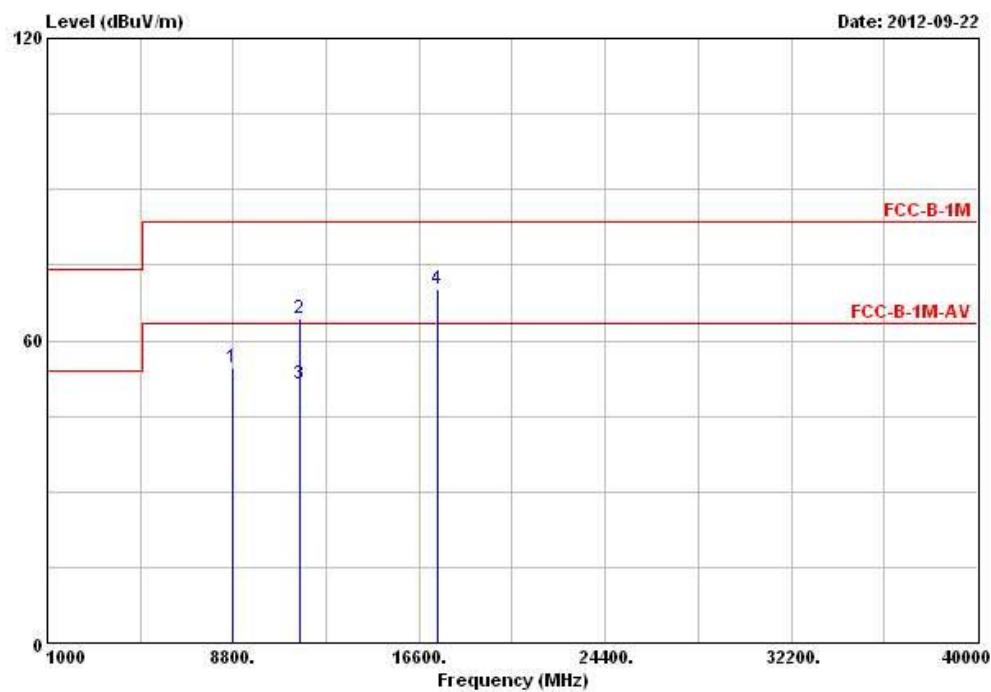

Freq	Level	Over Limit	Line	Read	Antenna	Cable	Preamp	Table		
								Pos	Pos	
MHz	dBuV/m		dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 8749.000	54.79				42.94	38.70	6.27	33.12	Peak	---
2 11570.000	64.48	-19.06	83.54	50.39	40.03	6.64	32.58	Peak	---	---
3 11570.000	51.49	-12.05	63.54	37.40	40.03	6.64	32.58	Average	---	---
4 17355.000	70.21				50.05	44.89	6.96	31.69	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 1 and 4) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11N5.8G-20M-N _{TX} 2	Test Freq. (FX)	F2
Operating Function	Transmit	Polarization	H

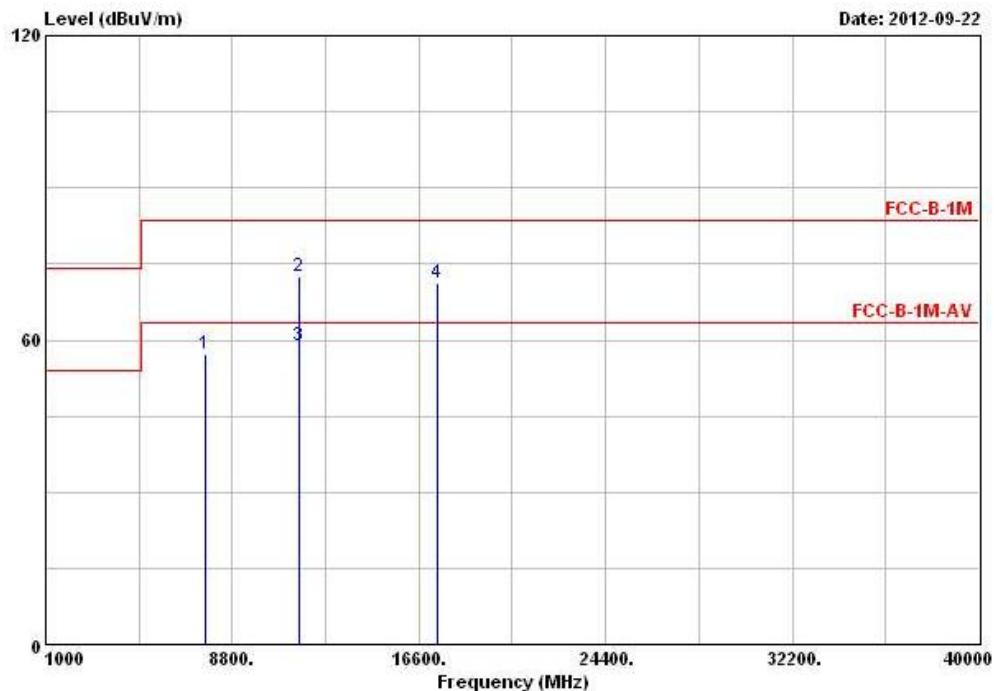

Freq	Level	Over Limit Line	Read Antenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant	Table
								Pos	Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 6 7693.000	57.30			46.78	37.78	5.72	32.98 PK	---	---
2 11570.000	72.65	-10.89	83.54	58.56	40.03	6.64	32.58 Peak	---	---
3 11570.000	58.73	-4.81	63.54	44.64	40.03	6.64	32.58 Average	---	---
4 17355.000	71.26			51.10	44.89	6.96	31.69 Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 1 and 4) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11N5.8G-20M-N _{TX} 2	Test Freq. (FX)	F3
Operating Function	Transmit	Polarization	V

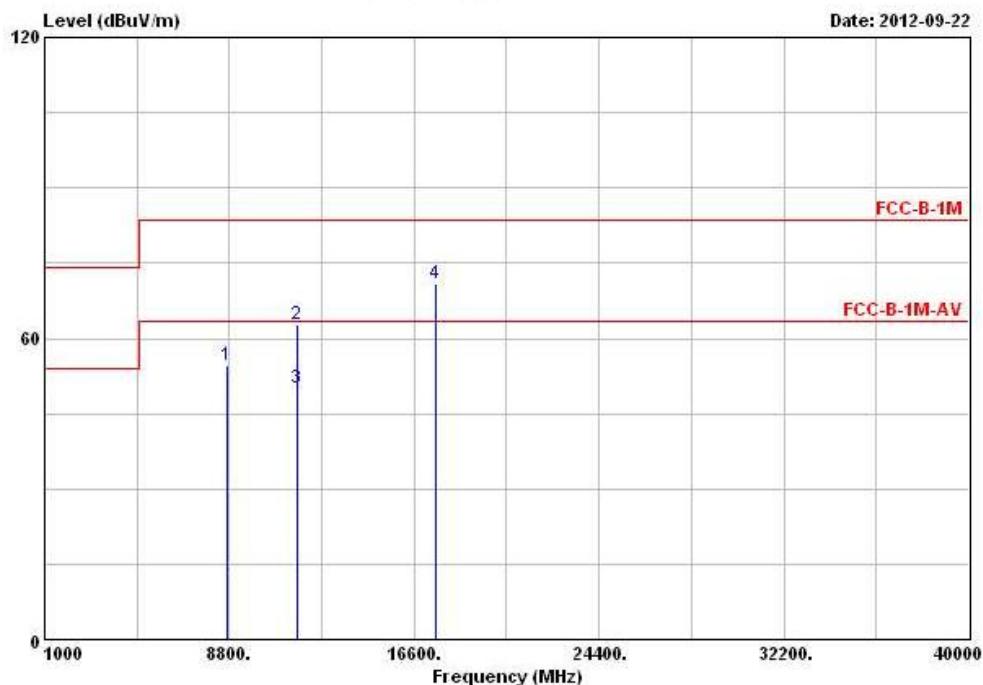

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant Pos	Table Pos
		Limit	Line	Level	Factor	Cable	Preamp		
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 8738.000	54.54			42.70	38.69	6.27	33.12 Peak	---	---
2 11650.000	62.89	-20.65	83.54	48.79	39.96	6.73	32.59 Peak	---	---
3 11650.000	50.06	-13.48	63.54	35.96	39.96	6.73	32.59 Average	---	---
4 17475.000	70.85			49.44	45.99	7.15	31.73 Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 1 and 4) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11N5.8G-20M-N _{TX} 2	Test Freq. (FX)	F3
Operating Function	Transmit	Polarization	H

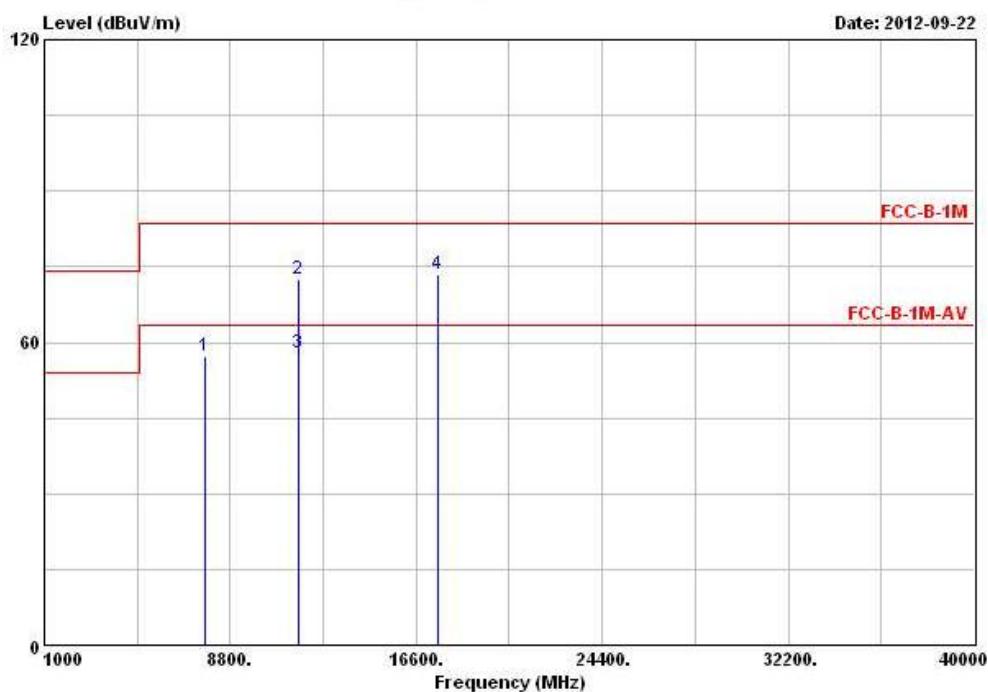

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark	Ant Pos	Table Pos
		Line	Limit	Antenna	Cable	Loss	Factor			
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 7737.000	57.32	-6.22	63.54	46.80	37.79	5.72	32.99	PK	---	---
2 11650.000	72.45	-11.09	83.54	58.35	39.96	6.73	32.59	Peak	---	---
3 11650.000	57.94	-5.60	63.54	43.84	39.96	6.73	32.59	Average	---	---
4 17475.000	73.39			51.98	45.99	7.15	31.73	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 4) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



3.6.10 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11N5.8G-40M

Transmitter Radiated Unwanted Emissions (Above 1GHz)			
Modulation Mode	11N5.8G-40M-N _{TX} 2	Test Freq. (FX)	F4
Operating Function	Transmit	Polarization	V

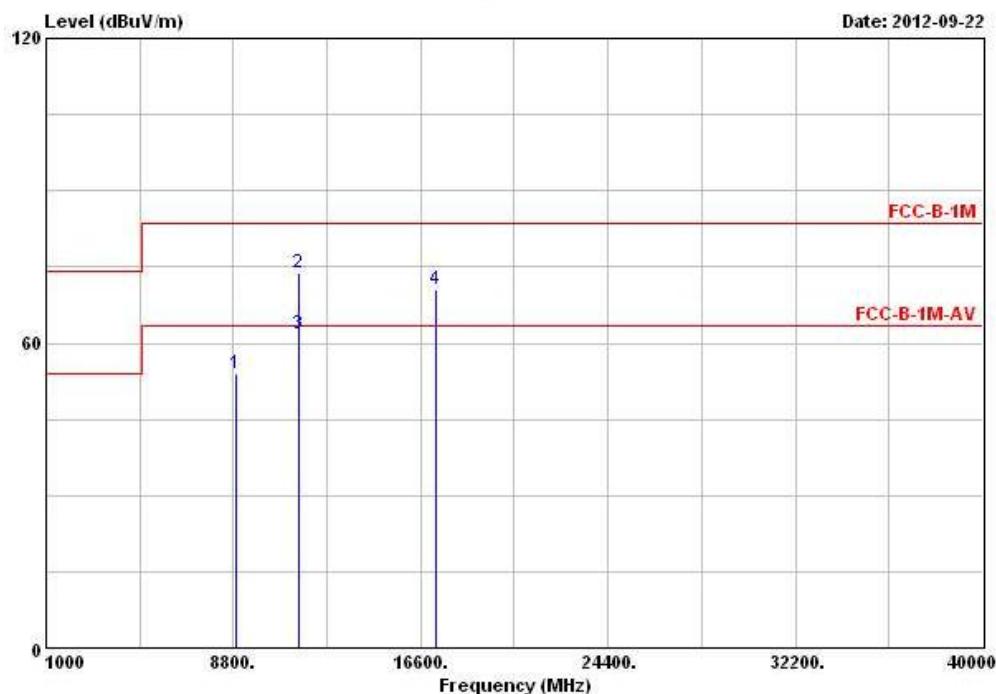

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark	Ant	Table
		Limit	Line	Level	Factor	Loss	Factor			
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 8881.000	54.01			42.10	38.75	6.33	33.17	Peak	---	---
2 11510.000	73.84	-9.70	83.54	59.74	40.10	6.57	32.57	Peak	---	---
3 11510.000	61.75	-1.79	63.54	47.65	40.10	6.57	32.57	Average	---	---
4 17265.000	70.71			51.46	44.11	6.81	31.67	Peak	---	---

Note 1: “>20dB” means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 1 and 4) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11N5.8G-40M-N _{TX} 2	Test Freq. (FX)	F4
Operating Function	Transmit	Polarization	H

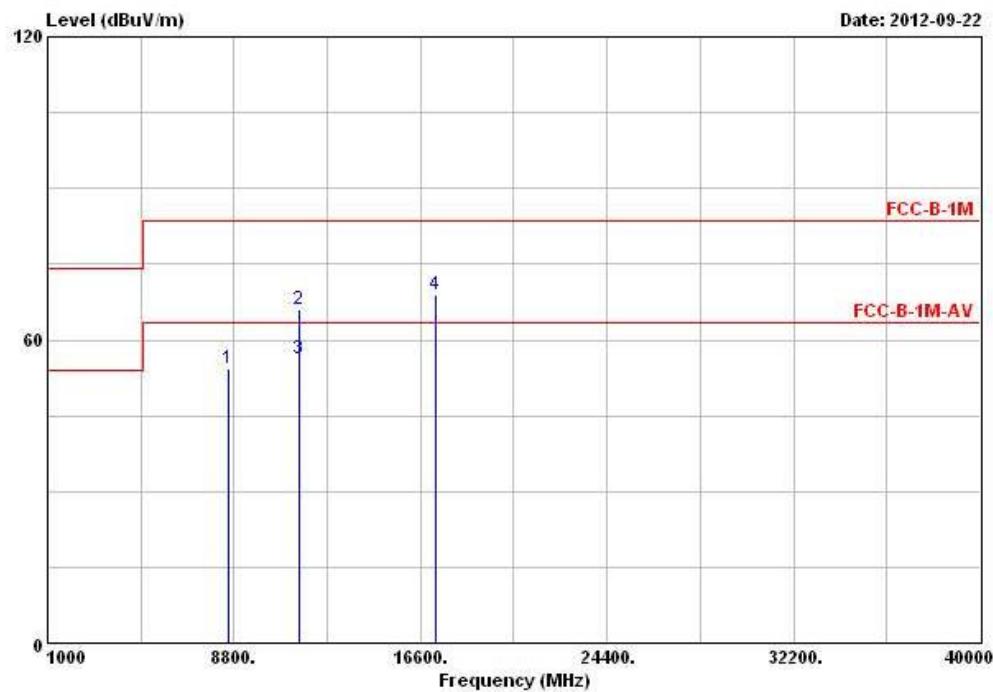

Freq	Level	Over	Limit	ReadAntenna		Cable	Preamp	Remark	Ant	Table
		Limit	Line	Level	Factor	Loss	Factor			
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 8573.000	54.27			42.52	38.63	6.19	33.07	Peak	---	---
2 11510.000	66.11	-17.43	83.54	52.01	40.10	6.57	32.57	Peak	---	---
3 @11510.000	56.35	-7.19	63.54	42.25	40.10	6.57	32.57	Average	---	---
4 17265.000	68.99			49.74	44.11	6.81	31.67	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 3: Measured signal receive antenna polarization: H (horizontal), V (vertical)
Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 1 and 4) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11N5.8G-40M-N _{TX} 2	Test Freq. (FX)	F5
Operating Function	Transmit	Polarization	V

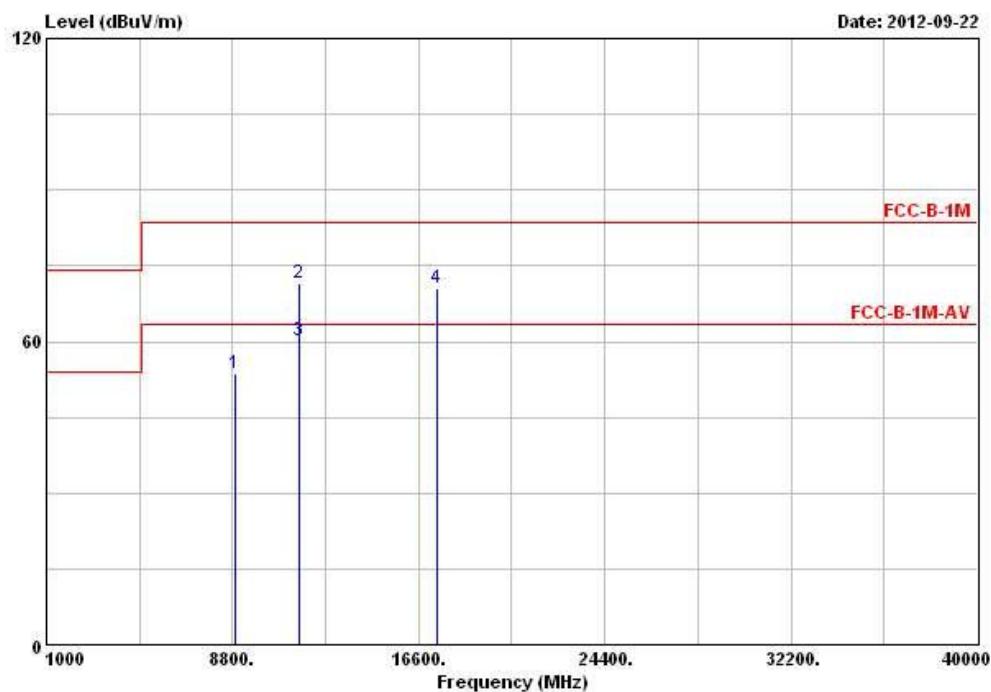

Freq	Level	Over Limit	Line	Read		Cable	Preamp	Remark	Ant Pos	Table Pos
				Int	Antenna					
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m				cm	deg
1 8881.000	53.62			41.71	38.75	6.33	33.17	Peak	---	---
2 11590.000	71.55	-11.99	83.54	57.45	40.01	6.67	32.58	Peak	---	---
3 @11590.000	60.06	-3.48	63.54	45.96	40.01	6.67	32.58	Average	---	---
4 17385.000	70.45			49.96	45.20	7.00	31.71	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 1 and 4) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	11N5.8G-40M-N _{TX} 2	Test Freq. (FX)	F5
Operating Function	Transmit	Polarization	H

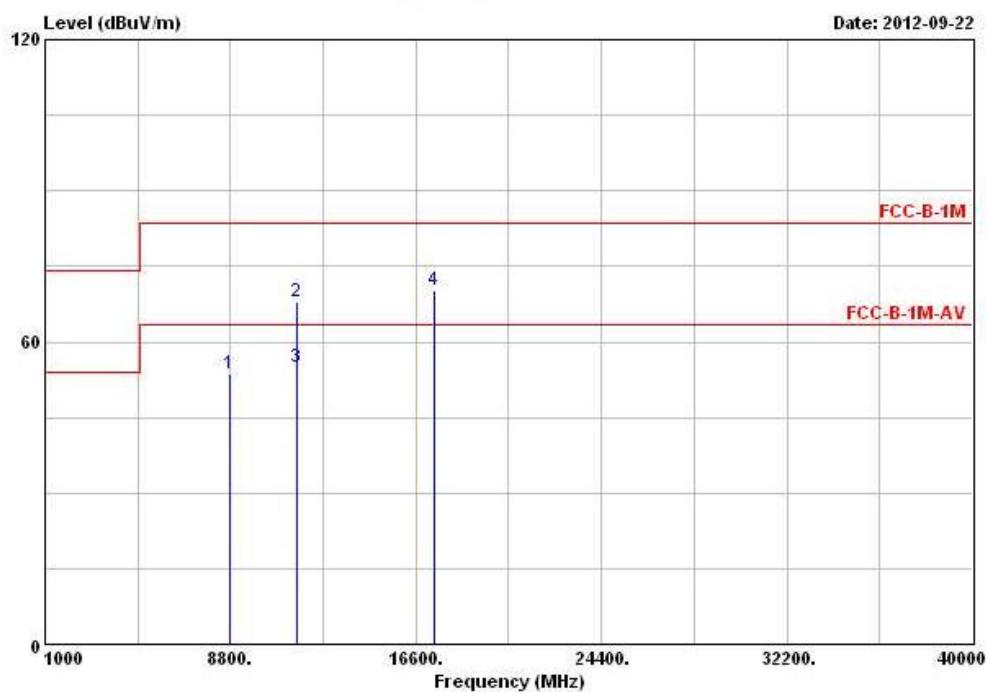

Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark	Ant	Table
		Line	Limit	Level	Factor	Cable	Preamp			
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 8793.000	53.59			41.73	38.71	6.29	33.14	Peak	---	---
2 11590.000	68.09	-15.45	83.54	53.99	40.01	6.67	32.58	Peak	---	---
3 @11590.000	55.03	-8.51	63.54	40.93	40.01	6.67	32.58	Average	---	---
4 17385.000	70.25			49.76	45.20	7.00	31.71	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: For restricted bands, the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 5: For un-restricted bands, unwanted emissions (item 1 and 4) shall be attenuated by at least 20 dB relative to the maximum measured in-band level.



4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz ~ 2.75GHz	Mar. 23, 2012	Conduction (CO04-HY)
LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	8127-477	9kHz ~ 30MHz	Feb. 08, 2012	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3810/2NM	9703-1839	9kHz ~ 30MHz	Apr. 20, 2012	Conduction (CO04-HY)
RF Cable-CON	HUBER+SUHNER	RG213/U	CB049	9kHz ~ 30MHz	Apr. 25, 2012	Conduction (CO04-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSP 40	100305	9KHz~40GHz	Feb. 21, 2012	Conducted (TH01-HY)
Spectrum Analyzer	R&S	FSV 40	15195-01-00	9KHz~40GHz	Jan. 06, 2012	Conducted (TH01-HY)
DC Power Source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Jun. 19, 2012	Conducted (TH01-HY)
AC Power Source	G.W	APS-9102	EL920581	AC 0V ~ 300V	Jul. 02, 2012	Conducted (TH01-HY)
Temp. and Humidity Chamber	Giant Force	GTH-225-20-SP-SD	MAA1112-007	-20 ~ 100°C	Dec. 07, 2011	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100302	10MHz ~ 40GHz	Nov. 22, 2011	Conducted (TH01-HY)
Power Sensor	Anritsu	MA2411B	1027452	300MHz ~ 40GHz	Jan. 12, 2012	Conducted (TH01-HY)
Power Meter	Anritsu	ML2495A	1124009	300MHz ~ 40GHz	Jan. 12, 2012	Conducted (TH01-HY)
RF Cable-2m	HUBER+SUHNER	SUCOFLEX_104	SN 345672/4	1GHz ~ 26.5GHz	Dec. 03, 2011	Conducted (TH01-HY)
RF Cable-3m	HUBER+SUHNER	SUCOFLEX_104	SN 345668/4	1GHz ~ 26.5GHz	Dec. 03, 2011	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.

**FCC RADIO TEST REPORT**

Report No. : FR281440AI

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30MHz ~ 1GHz 3m	Dec. 12, 2011	Radiation (03CH03-HY)
Amplifier	HP	8447D	2944A08033	10kHz ~ 1.3GHz	May. 10, 2012	Radiation (03CH03-HY)
Amplifier	Agilent	8449B	3008A02120	1GHz ~ 26.5GHz	Aug 16 2012	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSP40	100004	9kHz ~ 40GHz	Feb. 01, 2012	Radiation (03CH03-HY)
Bilog Antenna	SCHAFFNER	CBL 6112D	22237	30MHz ~ 1GHz	Oct. 22, 2011	Radiation (03CH03-HY)
Horn Antenna	EMCO	3115	6741	1GHz ~ 18GHz	May 30, 2012	Radiation (03CH03-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15GHz ~ 40GHz	Jan.13, 2012	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30MHz ~ 1GHz	Jan. 18, 2012	Radiation (03CH03-HY)
RF Cable-high	SUHNER	SUCOFLEX 106	03CH03-HY	1GHz ~ 40GHz	Jan. 18, 2012	Radiation (03CH03-HY)
Turn Table	HD	DS 420	420/650/00	0 ~ 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	MF	MF-7802	MF780208179	1 ~ 4 m	N/A	Radiation (03CH03-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Loop Antenna	R&S	HFH2-Z2	860004/001	9kHz ~ 30MHz	Jul. 03, 2012*	Radiation (03CH03-HY)

Note: Calibration Interval of instruments listed above is two year.



5 Certification of TAF Accreditation



Certificate No. : L1190-120405

財團法人全國認證基金會
Taiwan Accreditation Foundation

Certificate of Accreditation

This is to certify that

Sportun International Inc.

EMC & Wireless Communications Laboratory

No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,
Taiwan, R.O.C.

is accredited in respect of laboratory

Accreditation Criteria : ISO/IEC 17025:2005

Accreditation Number : 1190

Originally Accredited : December 15, 2003

Effective Period : January 10, 2010 to January 09, 2013

Accredited Scope : Testing Field, see described in the Appendix

Specific Accreditation Program : Accreditation Program for Designated Testing Laboratory
for Commodities Inspection
Accreditation Program for Telecommunication Equipment
Testing Laboratory
Accreditation Program for BSMI Mutual Recognition
Arrangement with Foreign Authorities

Jay-San Chen
President, Taiwan Accreditation Foundation
Date: April 05, 2012

P1, total 24 pages