



TEST REPORT

Product Name: Portable reader
FCC ID: VUJ-AT909
Trademark: N/A
Model Number: AT909
Prepared For: ATID Co., Ltd
Address: #1402, 83, Gasan digital 1-ro, Geumcheon-gu, Seoul, 08589 South Korea
Manufacturer: ATID Co., Ltd
Address: #1402, 83, Gasan digital 1-ro, Geumcheon-gu, Seoul, 08589 South Korea
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: 1&2/F., Building A, No.26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: Jan. 21, 2025
Sample tested Date: Jan. 21, 2025 to Apr. 21, 2025
Issue Date: Apr. 21, 2025
Report No.: CTB25012101303RH09
Test Standards: FCC 47 CFR Part2(2.1093), FCC 47 CFR Part1(1.1310)
FCC 47 CFR Part1(1.1307), ANSI/IEEE C95.1-2019
IEEE 1528-2013 & Published RF Exposure KDB Procedures
Test Results: PASS
Remark: This is SAR test report.

Compiled by:

Reviewed by:

Approved by:

Zhang Mao cheng

Martin Feng

Rita xiao

Zhang Mao cheng

Martin Feng

Rita xiao/ Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

Contents

	Page
1 COVER PAGE.....	1
1. VERSION	4
2. PRODUCT INFORMATION AND TEST SETUP.....	5
2.1 PRODUCT INFORMATION	5
3 TEST RESULT SUMMARY	8
4 EQUIPMENT USED DURING TEST.....	9
4.1 EQUIPMENT LIST	9
4.2 TEST EQUIPMENT CALIBRATION	10
5 SAR INTRODUCTION.....	11
5.1 INTRODUCTION	11
5.2 SAR DEFINITION.....	11
6 SAR MEASUREMENT SETUP.....	11
6.1 SAR MEASUREMENT SETUP	11
6.2 DASY5 E-FIELD PROBE SYSTEM	13
6.3 PROBE SPECIFICATION	13
6.4 ISOTROPIC E-FIELD PROBE.....	13
6.5 PHANTOMS.....	14
6.6 DEVICE HOLDER	14
7 SAR TEST PROCEDURE	16
7.1 SCANNING PROCEDURE.....	16
7.2 EXTRAPOLATION.....	19
7.3 EAR REFERENCE POINT	19
7.4 DEVICE REFERENCE POINTS.....	19
7.5 TEST CONFIGURATION – POSITIONING FOR CHEEK / TOUCH	19
7.6 TEST CONFIGURATION – POSITIONING FOR EAR / 15° TILT	21
7.7 TEST POSITION – BODY CONFIGURATIONS.....	21
8 EXPOSURE LIMIT	22
8.1 UNCONTROLLED ENVIRONMENT.....	22
8.2 CONTROLLED ENVIRONMENT	22
9 SYSTEM AND LIQUID VALIDATION	23
9.1 SYSTEM VALIDATION	23
9.2 LIQUID VALIDATION	25
9.3 TISSUE DIELECTRIC PARAMETERS FOR HEAD AND BODY PHANTOMS.....	26
10 SYSTEM VERIFICATION PLOTS	29
11 TYPE A MEASUREMENT UNCERTAINTY	47
12 OUTPUT POWER VERIFICATION	50
12.1 TEST CONDITION:.....	50
12.2 TEST PROCEDURES:.....	50
13 EXPOSURE CONDITIONS CONSIDERATION	96



14	RF EXPOSURE	102
15	SAR TEST RESULTS	104
15.1	TEST CONDITION:	104
15.2	GENERALLY TEST PROCEDURES:	104
15.3	SAR SUMMARY TEST RESULT:	105
15.4	MEASUREMENT VARIABILITY CONSIDERATION	125
15.5	SIMULTANEOUS TRANSMISSION SAR ANALYSIS.....	127
16	SAR MEASUREMENT REFERENCE	141
17	MAXIMUM SAR MEASUREMENT PLOTS	142
18	CALIBRATION REPORTS-PROBE AND DIPOLE	179
19	SAR SYSTEM PHOTOS AND LIQUID DEPTH.....	180
20	SETUP PHOTO	181
21	EUT PHOTOS	183



1. Version

Report No.	Issue Date	Description	Approved
CTB25012101303RH09	Apr. 21, 2025	Original	Valid

2. PRODUCT INFORMATION AND TEST SETUP

2.1 Product Information

Model(s):	AT909
Model Description:	N/A
Bluetooth Version:	Bluetooth 5.0
Wi-Fi Specification:	IEEE 802.11a/n/ac
Hardware Version:	V1.0
Software Version:	V1.0
	Bluetooth: 2402-2480MHz
	WiFi(2.4G): IEEE 802.11b/g/n 20: 2412-2462MHz/ 11 channel
	IEEE 802.11n 40: 2422-2452MHz/ 7 channel
	IEEE 802.11a/n/ac(20M): 5150MHz ~5250MHz/ 4 channel
	IEEE 802.11n/ac(40M): 5150MHz ~5250MHz/ 2 channel
	IEEE 802.11ac(80M): 5150MHz ~5250MHz/ 1 channel
	IEEE 802.11a/n/ac(20M): 5250MHz ~5350 MHz/ 4 channel
	IEEE 802.11n/ac(40M): 5250MHz ~5350 MHz/ 2 channel
	IEEE 802.11ac(80M): 5250MHz ~5350 MHz/ 1 channel
	IEEE 802.11a/n/ac(20M): 5725MHz ~5850MHz/ 5 channel
	IEEE 802.11n/ac(40M): 5725MHz ~5850MHz/ 2 channel
	IEEE 802.11ac(80M): 5725MHz ~5850MHz/ 1 channel
	GSM/GPRS/EDGE 850: 824~849MHz
	GSM/GPRS/EDGE 1900: 1850~1910MHz
Operation Frequency:	WCDMA Band 2: 1850~1910MHz
	WCDMA Band 5: 824~849MHz
	FDD-LTE BAND 2: 1850-1910MHz
	FDD-LTE BAND 4: 1710-1755MHz
	FDD-LTE BAND 5: 824-849MHz
	FDD-LTE BAND 7: 2500-2570MHz
	FDD-LTE BAND 12: 699-716MHz
	FDD-LTE BAND 17: 704-716MHz
	TDD-LTE BAND 38: 2570-2620MHz
	TDD-LTE BAND 40A: 2305-2315MHz
	TDD-LTE BAND 40B: 2350-2360MHz
	TDD-LTE BAND 41: 2545-2655MHz
	RFID: 902-928MHz
	NFC:13.56 MHz
Max. RF output power:	Bluetooth: 1M: -5.028dBm
	Bluetooth: 2M: -5.06dBm

	Bluetooth EDR: 7.731dBm
	WiFi (2.4G): 20.882dBm
	WiFi (5G): 16.33dBm
	GSM850: 32.51dBm
	GSM1900: 29.11dBm
	WCDMA Band 2: 21.03dBm
	WCDMA Band 5: 22.86dBm
	FDD-LTE BAND 2: 23.77dBm
	FDD-LTE BAND 4: 23.98dBm
	FDD-LTE BAND 5: 24.53dBm
	FDD-LTE BAND 7: 22.13dBm
	FDD-LTE BAND 12: 24.25dBm
	FDD-LTE BAND 17: 24.47dBm
	TDD-LTE BAND 38: 24.44 dBm
	TDD-LTE BAND 40A: 24.07dBm
	TDD-LTE BAND 40B: 24.13dBm
	TDD-LTE BAND 41: 24.81dBm
	RFID: 29.510dBm
Max.SAR:	0.33 W/Kg 1g Head Tissue
	0.55 W/Kg 1g Body Tissue
	1.14 W/Kg 1g Hotspot
Max Simultaneous SAR	1.38 W/Kg
	Bluetooth BLE: GFSK
	Bluetooth EDR: GFSK, $\pi/4$ DQPSK, 8DPSK
	WiFi(2.4G): DSSS, OFDM
Type of Modulation:	WiFi (5G): OFDM
	2 3G: GMSK, BPSK
	4G: QPSK, 16QAM
	RFID: ASK
	NFC: ASK
Antenna installation:	Internal antenna
	Bluetooth: 2.15dBi
	WiFi (2.4G): 1.74dBi
	WiFi (5.2G): 0.92dBi
	WiFi (5.3G): 1.02dBi
Antenna Gain:	WiFi (5.8G): 1.58dBi
	GSM850: -1.8dBi
	GSM1900: 1.92dBi
	WCDMA Band 2: 1.92dBi

WCDMA Band 5: -1.8dBi
FDD-LTE BAND 2: 1.92dBi
FDD-LTE BAND 4: 1.6dBi
FDD-LTE BAND 5: -1.8dBi
FDD-LTE BAND 7: 1.28dBi
FDD-LTE BAND 12: -2.8dBi
FDD-LTE BAND 17: -2.8dBi
TDD-LTE BAND 38: 0.76dBi
TDD-LTE BAND 40A: 0.86dBi
TDD-LTE BAND 40B: 0.92dBi
TDD-LTE BAND 41: 1.02dBi
RFID: 4.5 dBi

Ratings:

DC 5V charging from adapter
DC 3.8V by battery

3 Test result Summary

Band	Maximum Report SAR (W/kg)			Limit(W/kg)	Results
	Head	Body	Hotspot		
GSM850	0.06	0.51	0.73	1.6	Pass
GSM1900	0.01	0.55	1.14		
WCDMA Band V	0.30	0.31	0.32		
WCDMA Band II	0.11	0.41	0.86		
LTE BAND 2	0.16	0.33	1.02		
LTE BAND 4	0.08	0.27	0.42		
LTE BAND 5	0.33	0.26	0.34		
LTE BAND 7	0.16	0.16	0.20		
LTE BAND 12	0.12	0.06	0.12		
LTE BAND 17	0.11	0.06	0.13		
LTE BAND 38	0.11	0.03	0.13		
LTE BAND 40a	0.15	0.20	0.29		
LTE BAND 40b	0.16	0.15	0.25		
LTE BAND 41	0.09	0.05	0.15		
2.4G WIFI	0.04	0.06	0.05		
5G WIFI	0.18	0.17	0.17		
RFID	/	0.16	0.35		
Simultaneous SAR	0.59	0.84	1.38		

4 Equipment Used during Test

4.1 Equipment List

Name of Equipment	Manufacturer	Type/Model	Serial Number	Calibration Date	Calibration Due
Data acquisition electronics	SPEAG	DAE4	881	2024/7/4	2025/7/3
Dosimetric E-field Probes	SPEAG	ES3DV3	3089	2024/7/4	2025/7/3
Dosimetric E-field Probes	SPEAG	EX3DV4	7769	2024/9/5	2025/9/4
SAR test software	SPEAG	DASY 52	52.10.3.1513	/	/
Dipole	SPEAG	D750V3	1088	2022/9/19	2025/9/18
Dipole	SPEAG	D835V2	4d125	2022/9/20	2025/9/19
Dipole	SPEAG	D1750V2	1057	2022/9/20	2025/9/19
Dipole	SPEAG	D1900V2	5d145	2022/10/8	2025/10/7
Dipole	SPEAG	D2450V2	801	2022/9/19	2025/9/18
Dipole	SPEAG	D2600V2	1101	2023/1/12	2026/1/11
Dipole	SPEAG	D5GHzV2	1190	2022/9/16	2025/9/15
Communication test set	R&S	CMW500	108058	2024/6/29	2025/6/28
Network analyzer	R&S	ZVB 8	100348	2024/6/29	2025/6/28
Dielectric Assessment Kit	SPEAG	DAK-3.5	1076	/	/
power meter	Agilent	E4419B	N10149	2024/6/29	2025/6/28
MXA signal analyzer	Agilent	N5181A	MY49060920	2024/6/29	2025/6/28
RF Power Meter	Agilent	E9301A	MY41495675	2024/6/29	2025/6/28
Amplifier 300-4200MHz	SHW	SHWPA-00300420P30 40-S	22110401	2024/6/29	2025/6/28
Amplifier 2-6GHz	SHW	SHWPA-02000600P30 40-S	24072501	2024/6/29	2025/6/28
Thermometer and Hygrometer	SMART SENSOR	AR867	/	2024/7/2	2025/7/1

4.2 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

FCC Test Firm Registration Number: CN1276

5 SAR Introduction

5.1 Introduction

This measurement report shows compliance of the EUT with ANSI/IEEE C95.1-2006 and FCC 47 CFR Part2 (2.1093). The test procedures, as described in IEEE 1528-2013 Standard for IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques(300MHz~6GHz) and Published RF Exposure KDB Procedures

5.2 SAR Definition

- ✘ SAR : Specific Absorption Rate
- ✘ The SAR characterize the absorption of energy by a quantity of tissue
- ✘ This is related to a increase of the temperature of these tissues during a time period.

$$DAS = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dV} \right)$$

$$DAS = \frac{\sigma E^2}{\rho}$$

$$DAS = c_h \left. \frac{dT}{dt} \right|_{t=0}$$

SAR definition

$$SAR = \frac{\sigma E^2}{\rho}$$

■ SAR : Specific Absorption Rate

- σ : Liquid conductivity

$$\circ \epsilon_r = \epsilon' - j\epsilon'' \text{ (complex permittivity of liquid)}$$

$$\circ \sigma = \frac{\epsilon'' \omega}{\epsilon_0}$$

- ρ : Liquid density

$$\circ \rho = 1000 \text{ g/L} = 1000 \text{ Kg/m}^3$$

where:

σ = conductivity of the tissue (S/m)
 ρ = mass density of the tissue (kg/m³)
 E = rms electric field strength (V/m)

6 SAR Measurement Setup

6.1 SAR MEASUREMENT SETUP

The DASY5 system for performing compliance tests consists of the following items:

A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).

A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.

A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD- conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

A unit to operate the optical surface detector which is connected to the EOC.

The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE.

The EOC is connected to the DASY5 measurement server.

The DASY5 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows 2003.


DASY5 software and SEMCAD data evaluation software.

Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc. The generic twin phantom enabling the testing of left-hand and right-hand usage.

The device holder for handheld Mobile Phones.

Tissue simulating liquid mixed according to the given recipes.

System validation dipoles allowing to validate the proper functioning of the system.

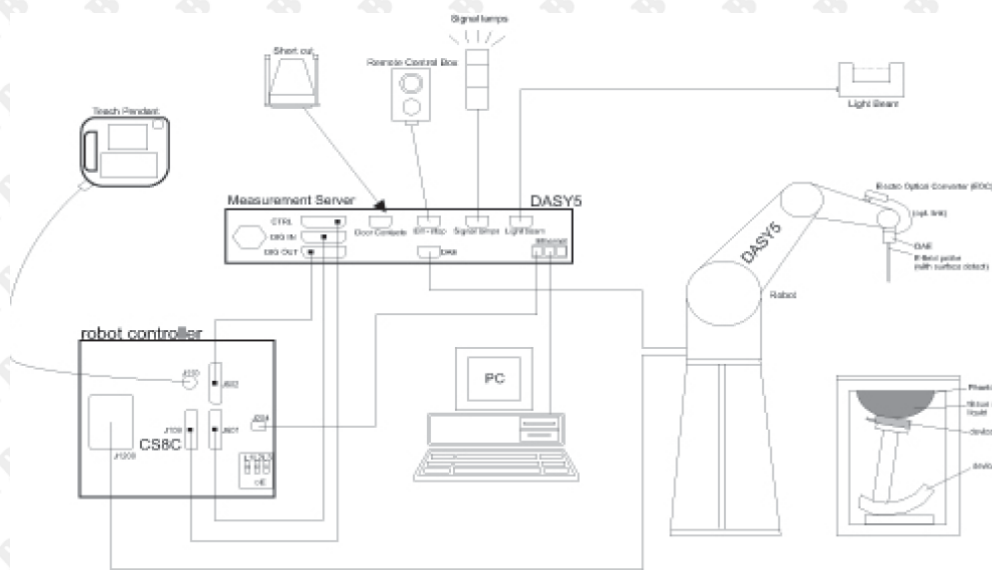

6.2 DASY5 E-field Probe System

The SAR measurements were conducted with the dosimetric probe EX3DV4 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation.

6.3 Probe Specification

Construction Symmetrical design with triangular core
Interleaved sensors

Built-in shielding against static charges

PEEK enclosure material (resistant to organic solvents, e.g., DGBE)

Calibration ISO/IEC 17025 calibration service available.

Frequency 4 MHz – 10 GHz

Linearity: ± 0.2 dB (30 MHz – 10 GHz)

Directivity ± 0.1 dB in TSL (rotation around probe axis)

± 0.3 dB in TSL (rotation normal to probe axis)

Dynamic Range 10 μ W/g – >100 W/kg

Linearity: ± 0.2 dB (noise: typically <1 μ W/g)

Dimensions Overall length: 337 mm (tip: 20 mm)
Tip diameter: 2.5 mm (body: 12 mm)
Typical distance from probe tip to dipole centers: 1 mm

Application General dosimetry up to 10 GHz
Dosimetry in strong gradient fields
Compliance tests of Mobile Phones


Compatibility DASY3, DASY4, DASY52 SAR and higher, EASY4/MRI



6.4 Isotropic E-Field Probe

The isotropic E-Field probe has been fully calibrated and assessed for isotropicity, and boundary effect within a controlled environment. Depending on the frequency for which the probe is calibrated the method utilized for calibration will change.

The E-Field probe utilizes a triangular sensor arrangement as detailed in the diagram below:

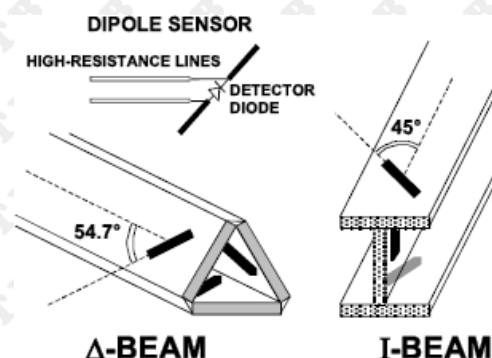

6.5 Phantoms

The phantom used for all tests i.e. for both system checks and device testing, was the twin-headed "SAM Phantom", manufactured by SPEAG. The SAM twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region, where shell thickness increases to 6mm).

System checking was performed using the flat section, whilst Head SAR tests used the left and right head profile sections. Body SAR testing also used the flat section between the head profiles.



SAM Twin Phantom

6.6 Device Holder

The device was placed in the device holder (illustrated below) that is supplied by SPEAG as an integral part of the DASY system.

The DASY device holder is designed to cope with the different positions given in the standard. It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.



Device holder supplied by SPEAG

7 SAR Test Procedure

7.1 Scanning Procedure

The DASY5 installation includes predefined files with recommended procedures for measurements and validation. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

The “reference” and “drift” measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT's output power and should vary max. $\pm 5\%$.

The “surface check” measurement tests the optical surface detection system of the DASY5 system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above $\pm 0.1\text{mm}$). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe (It does not depend on the surface reflectivity or the probe angle to the surface within $\pm 30^\circ$.)

Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values before running a detailed measurement around the hot spot. Before starting the area scan a grid spacing of 15 mm x 15 mm is set. During the scan the distance of the probe to the phantom remains unchanged. After finishing area scan, the field maxima within a range of 2 dB will be ascertained.

Zoom Scan

Zoom Scans are used to estimate the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The default Zoom Scan is done by 7x7x5 points within a cube whose base is centered around the maxima found in the preceding area scan.

Spatial Peak Detection

The procedure for spatial peak SAR evaluation has been implemented and can determine values of masses of 1g and 10g, as well as for user-specific masses. The DASY5 system allows evaluations that combine measured data and robot positions, such as: • maximum search • extrapolation • boundary correction • peak search for averaged SAR. During a maximum search, global and local maxima searches are automatically performed in 2-D after each Area Scan measurement with at least 6 measurement points. It is based on the evaluation of the local SAR gradient calculated by the Quadratic Shepard's method. The algorithm will find the global maximum and all local maxima within -2 dB of the global maxima for all SAR distributions.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. Several measurements at different distances are necessary for the extrapolation.

Extrapolation routines require at least 10 measurement points in 3-D space. They are used in the Zoom Scan to obtain SAR values between the lowest measurement points and the inner phantom surface. The routine uses the modified Quadratic Shepard's method for extrapolation. For a grid using 7x7x5 measurement points with 5mm resolution amounting to 343 measurement points, the uncertainty of the extrapolation routines is less than 1% for 1g and 10g cubes.

A Z-axis scan measures the total SAR value at the x-and y-position of the maximum SAR value found during the cube 7x7x5 scan. The probe is moved away in z-direction from the bottom of the SAM phantom in 5mm steps.

Data Storage and Evaluation

Data Storage

The DASY5 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension ".DA4". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [W/kg], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

Data Evaluation

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	Sensitivity:	Normi, ai0, ai1, ai2
	Conversion factor:	ConvFi
	Diode compression point:	Dcpi
Device parameters:	Frequency:	f
	Crest factor:	cf
Media parameters:	Conductivity:	σ
	Density:	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY5 components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

Vi: compensated signal of channel (i = x, y, z) Ui: input signal of channel (i = x, y, z)

cf: crest factor of exciting field (DASY parameter) dcpi: diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

$$E - \text{fieldprobes : } E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$

$$H - \text{fieldprobes : } H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

Vi: compensated signal of channel (i = x, y, z) Normi: sensor sensitivity of channel (i = x, y, z), [mV/(V/m)²] for E-field Probes ConvF: sensitivity enhancement in solution

aij: sensor sensitivity factors for H-field probes f: carrier frequency [GHz]

Ei: electric field strength of channel i in V/m Hi: magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1'000}$$

SAR: local specific absorption rate in W/kg
 E_{tot} : total field strength in V/m
 σ : conductivity in [mho/m] or [Siemens/m]
 ρ : equivalent tissue density in g/cm³

total field strength in V/m
equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid.

7.2 Extrapolation

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. Several measurements at different distances are necessary for the extrapolation.

They are used in the Cube Scan to obtain SAR values between the lowest measurement points and the inner phantom surface. The routine uses the fourth order least square polynomial method for extrapolation. For a grid using 5x5x7 measurement points with 5mm resolution amounting to 343 measurement points, the uncertainty of the extrapolation routines is less than 1% for 1 g and 10 g cubes.

7.3 Ear Reference Point

Figure 6.2 shows the front, back and side views of the SAM Phantom. The point “M” is the reference point for the center of the mouth, “LE” is the left ear reference point (ERP), and “RE” is the right ERP. The ERPs are 15mm posterior to the entrance to the ear canal (EEC) along the B-M line (Back-Mouth), as shown in Figure 6.1. The plane passing through the two ear canals and M is defined as the Reference Plane. The line N-F (Neck-Front) is perpendicular to the reference plane and passing through the RE (or LE) is called the Reference Pivoting Line (see Figure 6.1). Line B-M is perpendicular to the N-F line. Both N-F and B-M lines are marked on the external phantom shell to facilitate handset positioning [5].




Figure 6.1 Close-up side view of ERP's



Figure 6.2 Front, back and side view of SAM

7.4 Device Reference Points

Two imaginary lines on the device need to be established: the vertical centerline and the horizontal line. The test device is placed in a normal operating position with the “test device reference point” located along the “vertical centerline” on the front of the device aligned to the “ear reference point” (See Fig. 6.3). The “test device reference point” is then located at the same level as the center of the ear reference point. The test device is positioned so that the “vertical centerline” is bisecting the front surface of the device at it's top and bottom edges, positioning the “ear reference point” on the outer surface of both the left and right head phantoms on the ear reference point [5].

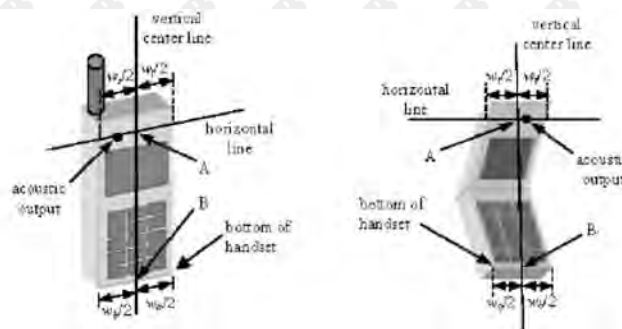


Figure 6.3 Handset Vertical Center & Horizontal Line Reference Points

7.5 Test Configuration – Positioning for Cheek / Touch

1. Position the device close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure below), such that the plane

2. Translate the device towards the phantom along the line passing through RE and LE until the device touches the ear.
3. While maintaining the device in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to MB-NF including the line MB (called the reference plane).
4. Rotate the device around the vertical centerline until the device (horizontal line) is symmetrical with respect to the line NF.
5. While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE and maintaining the device contact with the ear, rotate the device about the line NF until any point on the device is in contact with a phantom point below the ear (cheek). See Figure below.




Figure 7.2 Side view w/ relevant markings

7.6 Test Configuration – Positioning for Ear / 15° Tilt

With the test device aligned in the Cheek/Touch Position”:

1. While maintaining the orientation of the device, retracted the device parallel to the reference plane far enough to enable a rotation of the device by 15 degrees.
2. Rotate the device around the horizontal line by 15 degrees.
3. While maintaining the orientation of the device, move the device parallel to the reference plane until any part of the device touches the head. (In this position, point A is located on the line RE-LE). The tilted position is obtained when the contact is on the pinna. If the contact is at any location other than the pinna, the angle of the device shall be reduced. The tilted position is obtained when any part of the device is in contact with the ear as well as a second part of the device is in contact with the head (see Figure below).


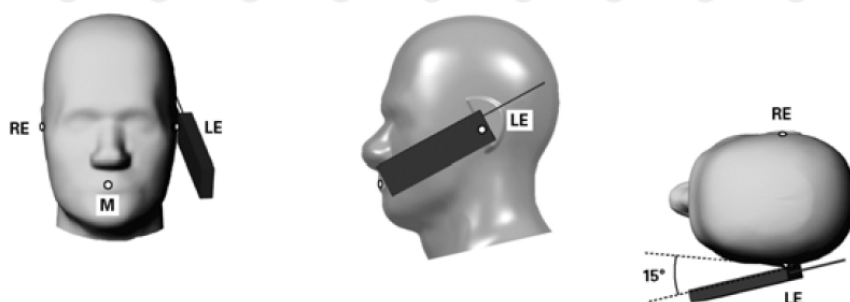


Figure 7.3 Front, Side and Top View of Ear/15° Tilt Position

7.7 Test Position – Body Configurations

Body Worn Position

- (a) To position the device parallel to the phantom surface with either keypad up or down.
- (b) To adjust the device parallel to the flat phantom.
- (c) To adjust the distance between the device surface and the flat phantom to 1.0 cm or holster surface and the flat phantom to 0 cm.

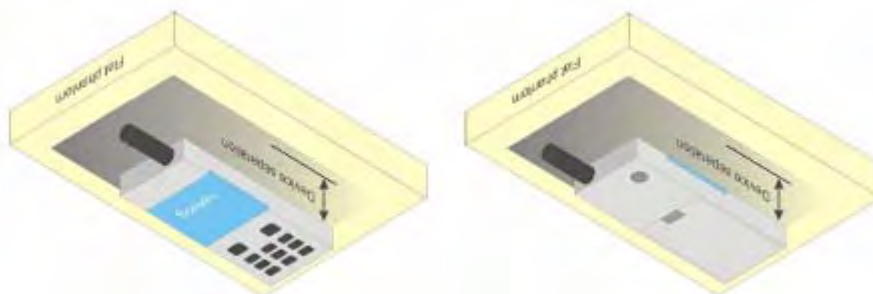

8 Exposure limit

In order for users to be aware of the body-worn operating requirements for meeting RF exposure compliance, operating instructions and cautions statements are included in the user's manual.

8.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

8.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Table 8.1 Human Exposure Limits

	UNCONTROLLED ENVIRONMENT General Population (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT Professional Population (W/kg) or (mW/g)
SPATIAL PEAK SAR ¹ Brain	1.60	8.00
SPATIAL AVERAGE SAR ² Whole Body	0.08	0.40
SPATIAL PEAK SAR ³ Hands, Feet, Ankles, Wrists	4.00	20.00


¹ The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

² The Spatial Average value of the SAR averaged over the whole body.

³ The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

9 System and liquid validation

9.1 System validation

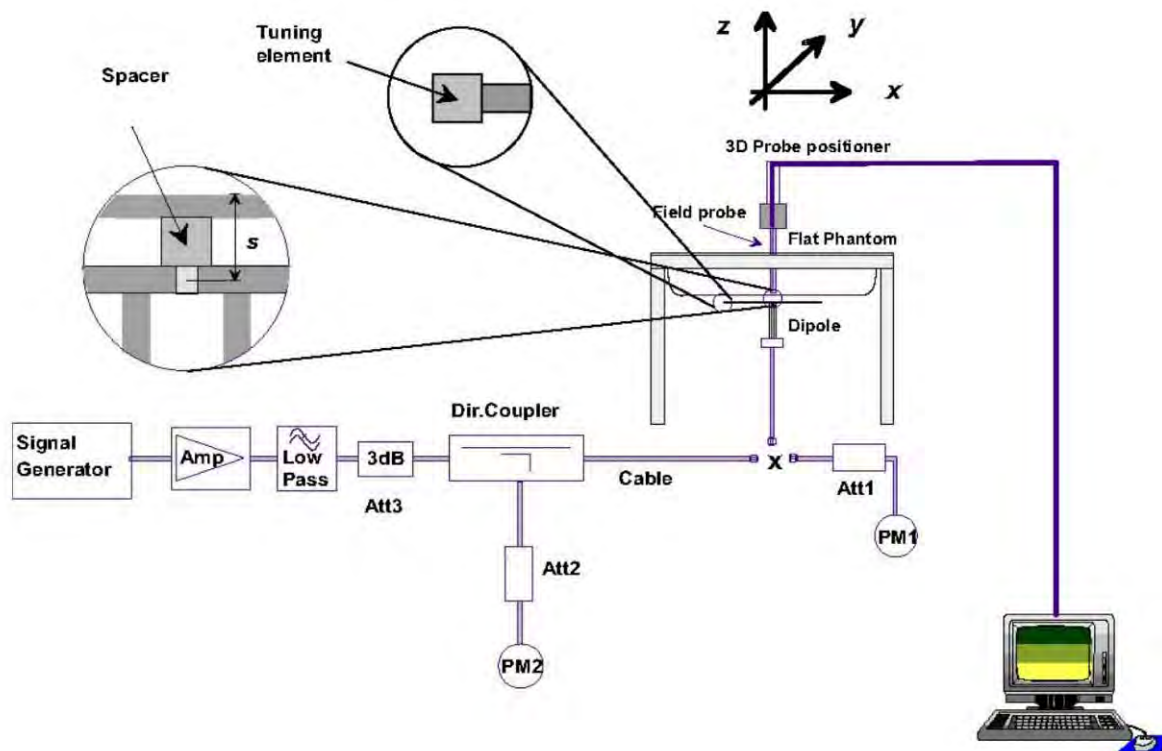

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

1. Signal Generator
2. Amplifier
3. Directional Coupler
4. Power Meter
5. Calibrated Dipole

The output power on dipole port must be calibrated to 30 dBm (1000 mW) before dipole is connected.

Numerical reference SAR values (W/kg) for reference dipole and flat phantom

Frequency (MHz)	1g SAR	10g SAR	Local SAR at surface(above feed-point)	Local SAR at surface(y = 2 cm offset from feedpoint)
300	3.02	2.04	4.40	2.10
450	4.92	3.28	7.20	3.20
750	8.49	5.55	12.6	4.59
835	9.56	6.22	14.1	4.90
900	10.9	6.99	16.4	5.40
1450	29.0	16.0	50.2	6.50
1800	38.4	20.1	69.5	6.80
1900	39.7	20.5	72.1	6.60
2000	41.1	21.1	74.6	6.50
2450	52.4	24.0	104	7.70
2600	55.3	24.6	113	8.29
3000	63.8	25.7	140	9.50

Table 1: system validation (1g)

Measurement Date	Frequency (MHz)	Liquid Type (head/body)	Target SAR1g (W/kg)	Measured SAR1g (W/kg)	Normalized SAR1g (W/kg)	Deviation (±10%)
2025.3.3	750	head	8.51	2.15	8.6	1.06
2025.4.10	750	head	8.51	2.16	8.64	1.53
2025.3.5	835	head	9.62	2.49	9.96	3.53
2025.4.10	835	head	9.62	2.48	9.92	3.12
2025.3.7	1750	head	36.4	9.02	36.08	-0.88
2025.4.10	1750	head	36.4	9.07	36.28	-0.33
2025.3.12	1900	head	39.6	10.7	42.8	8.08
2025.4.11	1900	head	39.6	10.8	43.2	9.09
2025.3.14	2450	head	52.0	14	56	7.69
2025.4.11	2450	head	52.0	14.2	56.8	9.23
2025.2.28	2600	head	57.3	14.6	58.4	1.92
2025.4.11	2600	head	57.3	14.8	59.2	3.32
2025.3.17	5200	head	76.5	7.82	78.2	2.22
2025.4.12	5200	head	76.5	7.72	77.2	0.92
2025.2.27	5300	head	79.3	8.65	86.5	9.08
2025.4.12	5300	head	79.3	8.67	86.7	9.33
2025.3.10	5800	head	79.4	7.97	79.7	0.38
2025.4.12	5800	head	79.4	8.01	80.1	0.88

Note: system check input power: 250mW, above 5GHz the input power is 100mW ..

9.2 liquid validation

The dielectric parameters were checked prior to assessment using the HP85070C dielectric probe kit. The dielectric parameters measured are reported in each correspondent section.

KDB 865664 recommended Tissue Dielectric Parameters

The head and body tissue parameters given in this below table should be used to measure the SAR of transmitters operating in 100 MHz to 6 GHz frequency range. The tissue dielectric parameters of the tissue medium at the test frequency should be within the tolerance required in this document. The dielectric parameters should be linearly interpolated between the closest pair of target frequencies to determine the applicable dielectric parameters corresponding to the device test frequency.

The head tissue dielectric parameters recommended by IEEE Std 1528-2013 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in 1528 are derived from tissue dielectric parameters computed from the 4-Cole-Cole equations described above and extrapolated according to the head parameters specified in 1528.

Target Frequency	Head/Body Tissue	
MHz	ϵ_r	σ (S/m)
150	52.3	0.76
300	45.3	0.87
450	43.5	0.87
835	41.5	0.90
900	41.5	0.97
915	41.5	0.98
1450	40.5	1.20
1610	40.3	1.29
1800-2000	40.0	1.40
2450	39.2	1.80
2600	39.0	1.96
3000	38.5	2.40
5200	36.0	4.66
5800	35.3	5.27

9.3 Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness Power drifts in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in P1528.

Table 2: Recommended Dielectric Performance of Tissue

Recommended Dielectric Performance of Tissue												
Ingredients (% by weight)	Frequency (MHz)											
	750		835		1800		1900		2450		2600	
Tissue	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	40.52	51.83	41.45	52.4	55.2	70.2	54.9	40.4	62.7	73.2	54.8	68.1
Salt (NaCl)	1.61	1.52	1.45	1.4	0.3	0.4	0.18	0.5	0.5	0.04	0.1	0.01
Sugar	57.67	46.45	56.0	45.0	0.0	0.0	0.0	58.0	0.0	0.0	0.0	0.0
HEC	0.1	0.1	1.0	1.0	0.0	0.0	0.0	1.0	0.0	0.0	0.0	0.0
Bactericide	0.1	0.1	0.1	0.1	0.0	0.0	0.0	0.1	0.0	0.0	0.0	0.0
Triton x-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	36.8	0.0	0.0	0.0
DGBE	0.0	0.0	0.0	0.0	44.5	29.4	44.92	0.0	0.0	26.7	45.1	31.8
Dielectric	40.93	54.32	42.54	56.1	40.0	53.3	39.9	54.0	39.8	52.5	39.0	52.5
Conductivity	0.87	0.95	0.91	0.95	1.40	1.52	1.42	1.45	1.88	1.78	1.96	2.15

Table 3: Dielectric Performance of Head Tissue Simulating Liquid

Temperature: 21°C , Relative humidity: 57%				
Frequency(MHz)	Measured Date	Description	Dielectric Parameters	
			ϵ_r	$\sigma(s/m)$
750	2025.3.3	Target Value $\pm 5\%$ window	41.90 39.805 — 43.995	0.89 0.846 — 0.935
		Measurement Value	41.118	0.914
750	2025.4.10	Target Value $\pm 5\%$ window	41.90 39.805 — 43.995	0.89 0.846 — 0.935
		Measurement Value	41.672	0.873
835	2025.3.5	Target Value $\pm 5\%$ window	41.5 38.425 — 43.575	0.90 0.855 — 0.945
		Measurement Value	42.28	0.87
835	2025.4.10	Target Value $\pm 5\%$ window	41.5 38.425 — 43.575	0.90 0.855 — 0.945
		Measurement Value	41.193	0.901
1750	2025.3.7	Target Value $\pm 5\%$ window	40.10 38.095 — 42.105	1.37 1.302 — 1.439
		Measurement Value	40.02	1.38
1750	2025.4.10	Target Value $\pm 5\%$ window	40.10 38.095 — 42.105	1.37 1.302 — 1.439
		Measurement Value	40.18	1.369
1900	2025.3.12	Target Value $\pm 5\%$ window	40.00 38.00 — 42.00	1.40 1.33 — 1.47
		Measurement Value	39.75	1.45
1900	2025.4.11	Target Value $\pm 5\%$ window	40.00 38.00 — 42.00	1.40 1.33 — 1.47
		Measurement Value	40.25	1.35
2450	2025.3.14	Target Value $\pm 5\%$ window	39.20 37.24 — 41.16	1.80 1.71 — 1.89
		Measurement Value	37.97	1.88
2450	2025.4.11	Target Value $\pm 5\%$ window	39.20 37.24 — 41.16	1.80 1.71 — 1.89
		Measurement Value	38.17	1.78
2600	2025.2.28	Target Value $\pm 5\%$ window	39.0 37.05 — 40.95	1.96 1.862 — 2.058
		Measurement Value	38.587	2.024
2600	2025.4.11	Target Value $\pm 5\%$ window	39.0 37.05 — 40.95	1.96 1.862 — 2.058
		Measurement Value	38.588	2.019
5200	2025.3.17	Target Value $\pm 5\%$ window	36.0 34.2-37.8	4.66 4.427-4.893
		Measurement Value	35.819	4.568
5200	2025.4.12	Target Value $\pm 5\%$ window	36.0 34.2-37.8	4.66 4.427-4.893
		Measurement Value	35.872	4.571
5300	2025.2.27	Target Value $\pm 5\%$ window	35.9 34.105-37.695	4.76 4.522-4.998
		Measurement Value	35.63	4.54
5300	2025.4.12	Target Value $\pm 5\%$ window	35.9 34.105-37.695	4.76 4.522-4.998
		Measurement Value	35.73	4.51



5800	2025.3.10	Target Value ±5% window	35.3 33.535-37.065	5.27 5.007-5.534
		Measurement Value	34.837	5.130
5800	2025.4.12	Target Value ±5% window	35.3 33.535-37.065	5.27 5.007-5.534
		Measurement Value	35.174	5.264

10 System Verification Plots

System Check-750

DUT: Dipole 750 MHz D750V3; Type: D750V3; Serial: D750V3 - SN:1088

Communication System: UID 0, CW (0); Communication System Band: D750 (750.0 MHz); Frequency: 750 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 750$ MHz; $\sigma = 0.914$ S/m; $\epsilon_r = 41.118$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

Probe: ES3DV3 - SN3089; ConvF(6.52, 6.52, 6.52) @ 750 MHz; Calibrated: 2024/7/4

Modulation Compensation:

Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$


Electronics: DAE4 Sn881; Calibrated: 2024/7/4

Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1410

DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

System Performance Check at 750MHz/d=10mm, Pin=250mW, dist=4.0mm (ES-Probe)/Area Scan (61x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 2.27 W/kg

System Performance Check at 750MHz/d=10mm, Pin=250mW, dist=4.0mm (ES-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 50.76 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 3.23 W/kg
SAR(1 g) = 2.15 W/kg; SAR(10 g) = 1.41 W/kg
Ratio of SAR at M2 to SAR at M1 = 67.2%
Maximum value of SAR (measured) = 2.31 W/kg

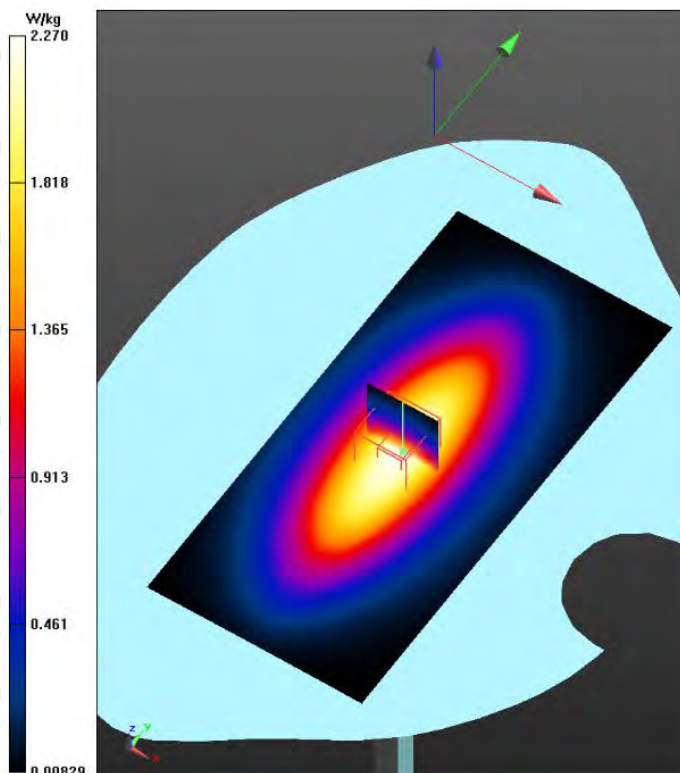

System Check-750

DUT: Dipole 750 MHz D750V3; Type: D750V3; Serial: D750V3 - SN:1088

Communication System: UID 0, CW (0); Communication System Band: D750 (750.0 MHz); Frequency: 750 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 750$ MHz; $\sigma = 0.873$ S/m; $\epsilon_r = 41.672$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

Probe: ES3DV3 - SN3089; ConvF(6.52, 6.52, 6.52) @ 750 MHz; Calibrated: 2024/7/4

Modulation Compensation:

Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$


Electronics: DAE4 Sn881; Calibrated: 2024/7/4

Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1410

DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

System Performance Check at 750MHz/d=10mm, Pin=250mW, dist=4.0mm (ES-Probe)/Area Scan (61x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 2.26 W/kg

System Performance Check at 750MHz/d=10mm, Pin=250mW, dist=4.0mm (ES-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 50.74 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 3.24 W/kg
SAR(1 g) = 2.16 W/kg; SAR(10 g) = 1.42 W/kg
Ratio of SAR at M2 to SAR at M1 = 67.1%
Maximum value of SAR (measured) = 2.32 W/kg

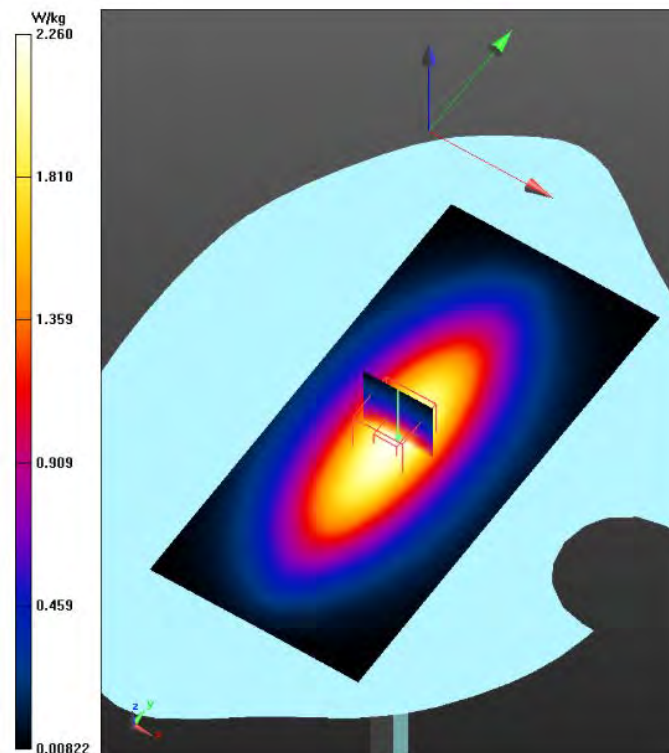

System Check-835

DUT: Dipole 835 MHz D835V2; Type: D835V2; Serial: D835V2 - SN:4d125

Communication System: UID 0, CW (0); Communication System Band: D835 (835.0 MHz); Frequency: 835 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used (interpolated): $f = 835$ MHz; $\sigma = 0.87$ S/m; $\epsilon_r = 42.28$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

Probe: ES3DV3 - SN3089; ConvF(6.28, 6.28, 6.28) @ 835 MHz; Calibrated: 2024/7/4

Modulation Compensation:

Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$


Electronics: DAE4 Sn881; Calibrated: 2024/7/4

Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1410

DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

System Performance Check at 835MHz/d=10mm, Pin=250mW, dist=4.0mm (ES-Probe)/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 2.61 W/kg

System Performance Check at 835MHz/d=10mm, Pin=250mW, dist=4.0mm (ES-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 56.15 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 3.56 W/kg
SAR(1 g) = 2.49 W/kg; SAR(10 g) = 1.68 W/kg
Ratio of SAR at M2 to SAR at M1 = 70.2%
Maximum value of SAR (measured) = 2.66 W/kg

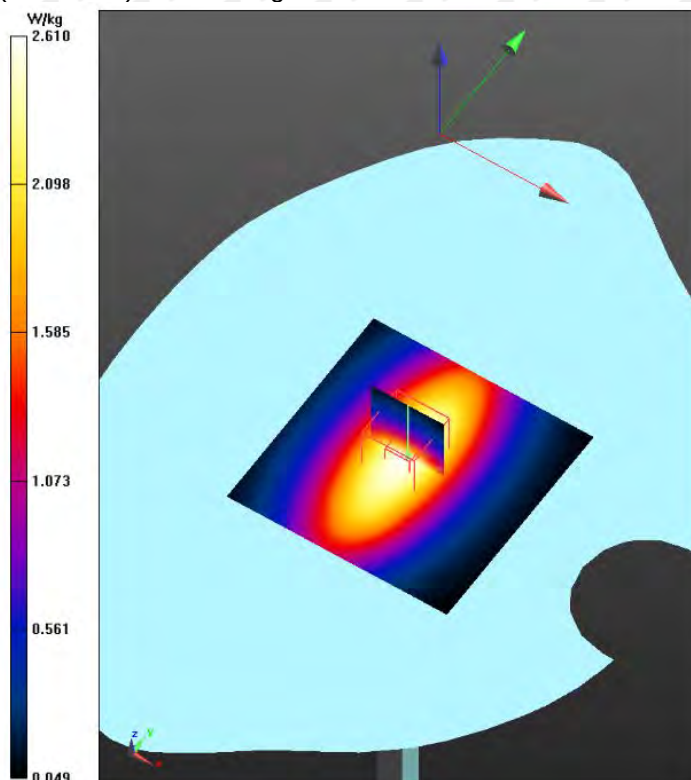

System Check-835

DUT: Dipole 835 MHz D835V2; Type: D835V2; Serial: D835V2 - SN: 4d125

Communication System: UID 0, CW (0); Communication System Band: D835 (835.0 MHz); Frequency: 835 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used (interpolated): $f = 835$ MHz; $\sigma = 0.901$ S/m; $\epsilon_r = 41.193$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

Probe: ES3DV3 - SN3089; ConvF(6.28, 6.28, 6.28) @ 835 MHz; Calibrated: 2024/7/4

Modulation Compensation:

Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$


Electronics: DAE4 Sn881; Calibrated: 2024/7/4

Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1410

DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

System Performance Check at 835MHz/d=10mm, Pin=250mW, dist=4.0mm (ES-Probe)/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 2.62 W/kg

System Performance Check at 835MHz/d=10mm, Pin=250mW, dist=4.0mm (ES-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 56.15 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 3.54 W/kg
SAR(1 g) = 2.48 W/kg; SAR(10 g) = 1.69 W/kg
Ratio of SAR at M2 to SAR at M1 = 70.4%
Maximum value of SAR (measured) = 2.67 W/kg

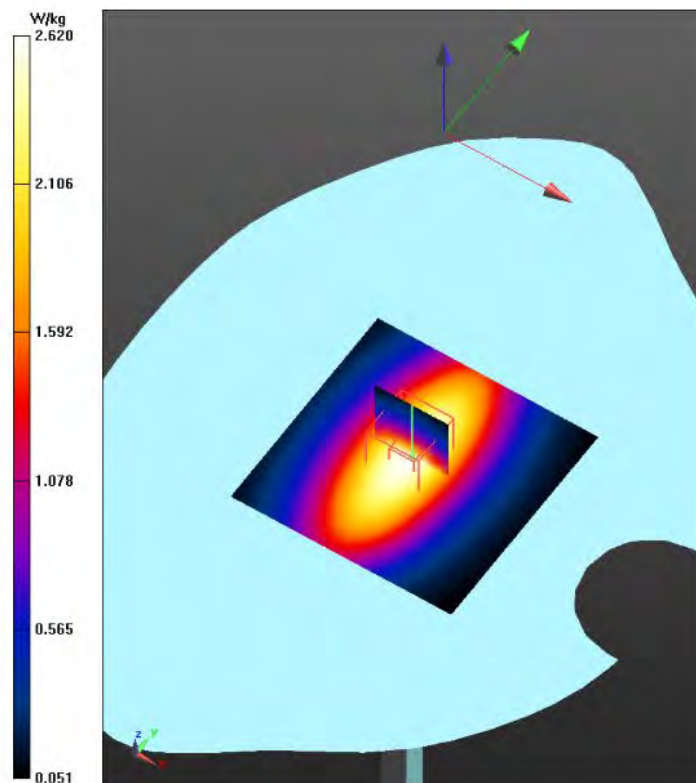

System Check-1750

DUT: Dipole 1750 MHz D1750V2; Type: D1750V2; Serial: D1750V2 - SN:1057


Communication System: UID 0, CW (0); Communication System Band: D1750 (1750.0 MHz); Frequency: 1750 MHz; Communication System PAR: 0 dB; PMF: 1
Medium parameters used: $f = 1750$ MHz; $\sigma = 1.38$ S/m; $\epsilon_r = 40.02$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

Probe: ES3DV3 - SN3089; ConvF(5.35, 5.35, 5.35) @ 1750 MHz; Calibrated: 2024/7/4
Modulation Compensation:
Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
Electronics: DAE4 Sn881; Calibrated: 2024/7/4
Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1119
DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

System Performance Check at 1750MHz/d=5mm, Pin=250mW, dist=4.0mm (ES-Probe)/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 10.5 W/kg

System Performance Check at 1750MHz/d=5mm, Pin=250mW, dist=4.0mm (ES-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 85.76 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 16.2 W/kg
SAR(1 g) = 9.02 W/kg; SAR(10 g) = 4.87 W/kg
Smallest distance from peaks to all points 3 dB below = 11.4 mm
Ratio of SAR at M2 to SAR at M1 = 57.8%
Maximum value of SAR (measured) = 10.1 W/kg

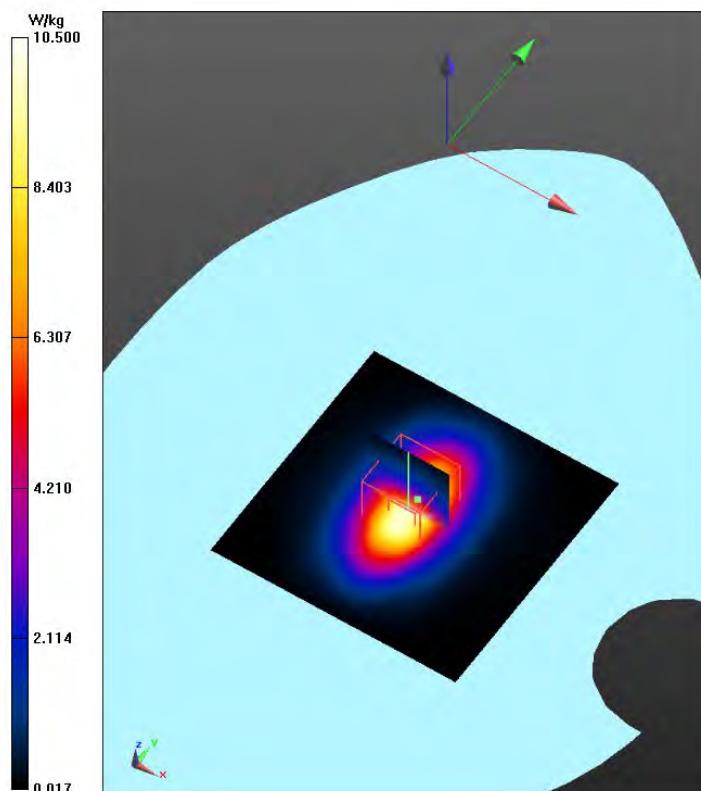

System Check-1750

DUT: Dipole 1750 MHz D1750V2; Type: D1750V2; Serial: D1750V2 - SN: 1057

Communication System: UID 0, CW (0); Communication System Band: D1750 (1750.0 MHz); Frequency: 1750 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.369$ S/m; $\epsilon_r = 40.18$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

Probe: ES3DV3 - SN3089; ConvF(5.35, 5.35, 5.35) @ 1750 MHz; Calibrated: 2024/7/4

Modulation Compensation:

Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$


Electronics: DAE4 Sn881; Calibrated: 2024/7/4

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1119

DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

System Performance Check at 1750MHz/d=5mm, Pin=250mW, dist=4.0mm (ES-Probe)/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 10.6 W/kg

System Performance Check at 1750MHz/d=5mm, Pin=250mW, dist=4.0mm (ES-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 86.54 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 16.3 W/kg
SAR(1 g) = 9.07 W/kg; SAR(10 g) = 4.89 W/kg
Smallest distance from peaks to all points 3 dB below = 11.2 mm
Ratio of SAR at M2 to SAR at M1 = 57.8%
Maximum value of SAR (measured) = 10.2 W/kg

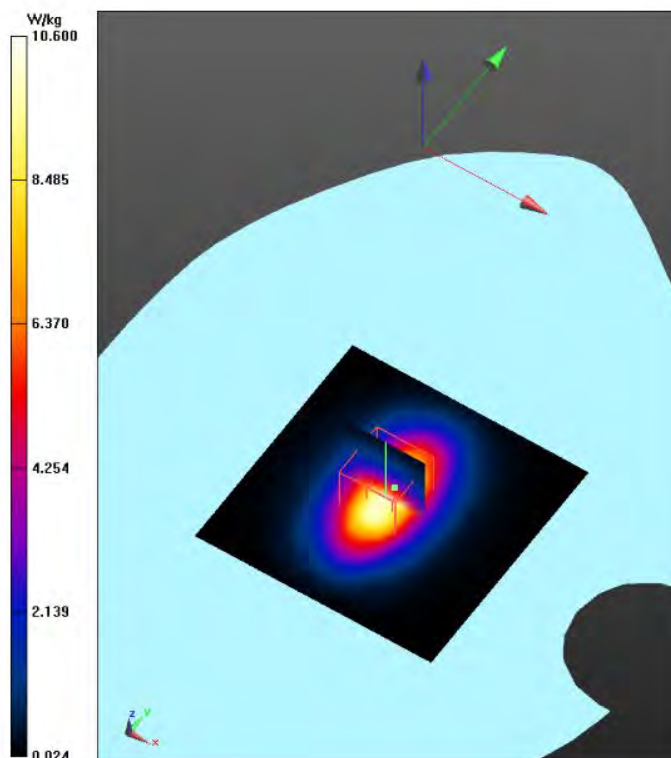

System Check-1900

DUT: Dipole 1900 MHz D1900V2; Type: D1900V2; Serial: D1900V2 - SN:5d145

Communication System: UID 0, CW (0); Communication System Band: D1900 (1900.0 MHz); Frequency: 1900 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.45$ S/m; $\epsilon_r = 39.75$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

Probe: ES3DV3 - SN3089; ConvF(5.07, 5.07, 5.07) @ 1900 MHz; Calibrated: 2024/7/4

Modulation Compensation:

Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$


Electronics: DAE4 Sn881; Calibrated: 2024/7/4

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1119

DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

System Performance Check at 1900MHz/d=5mm, Pin=250mW, dist=4.0mm (ES-Probe)/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 12.5 W/kg

System Performance Check at 1900MHz/d=5mm, Pin=250mW, dist=4.0mm (ES-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 93.00 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 19.9 W/kg
SAR(1 g) = 10.7 W/kg; SAR(10 g) = 5.57 W/kg
Smallest distance from peaks to all points 3 dB below = 10 mm
Ratio of SAR at M2 to SAR at M1 = 55.5%
Maximum value of SAR (measured) = 12.1 W/kg

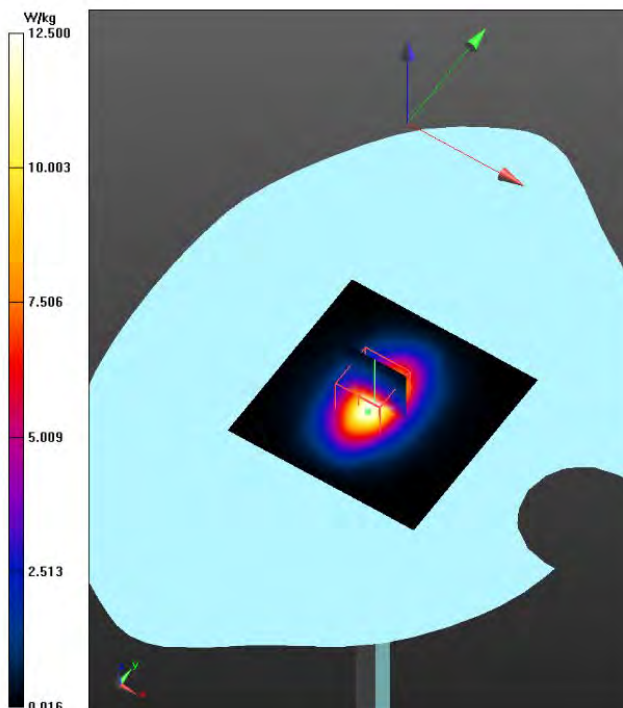

System Check-1900

DUT: Dipole 1900 MHz D1900V2; Type: D1900V2; Serial: D1900V2 - SN: 5d145

Communication System: UID 0, CW (0); Communication System Band: D1900 (1900.0 MHz); Frequency: 1900 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.35$ S/m; $\epsilon_r = 40.25$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

Probe: ES3DV3 - SN3089; ConvF(5.07, 5.07, 5.07) @ 1900 MHz; Calibrated: 2024/7/4

Modulation Compensation:

Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$


Electronics: DAE4 Sn881; Calibrated: 2024/7/4

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1119

DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

System Performance Check at 1900MHz/d=5mm, Pin=250mW, dist=4.0mm (ES-Probe)/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 12.4 W/kg

System Performance Check at 1900MHz/d=5mm, Pin=250mW, dist=4.0mm (ES-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 93.02 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 19.9 W/kg
SAR(1 g) = 10.8 W/kg; SAR(10 g) = 5.59 W/kg
Smallest distance from peaks to all points 3 dB below = 10.5 mm
Ratio of SAR at M2 to SAR at M1 = 55.5%
Maximum value of SAR (measured) = 12.1 W/kg

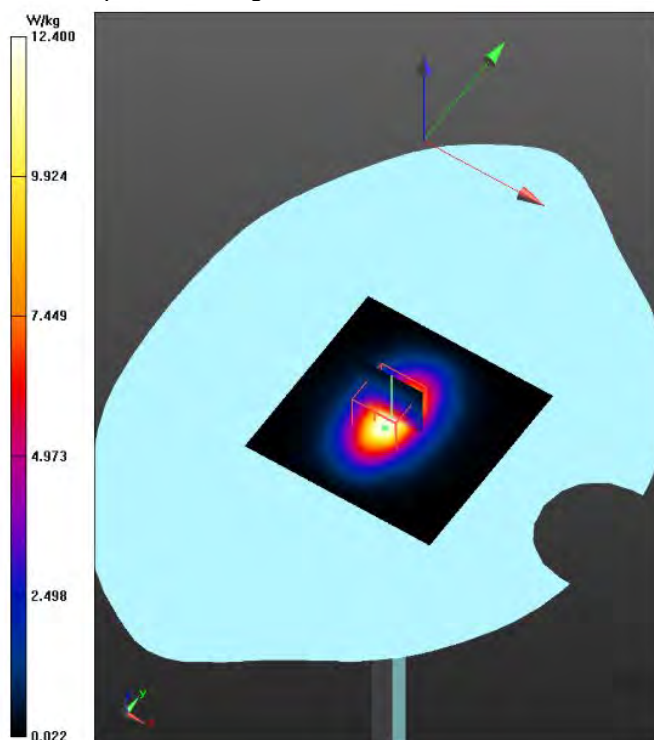

System Check-2450

DUT: Dipole 2450 MHz D2450V2; Type: D2450V2; Serial: D2450V2 - SN:801

Communication System: UID 0, CW (0); Communication System Band: D2450 (2450.0 MHz); Frequency: 2450 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.88$ S/m; $\epsilon_r = 37.97$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

Probe: ES3DV3 - SN3089; ConvF(4.7, 4.7, 4.7) @ 2450 MHz; Calibrated: 2024/7/4

Modulation Compensation:

Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$


Electronics: DAE4 Sn881; Calibrated: 2024/7/4

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1119

DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

System Performance Check at 2450MHz/d=5mm, Pin=250mW, dist=4.0mm (ES-Probe)/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 17.1 W/kg

System Performance Check at 2450MHz/d=5mm, Pin=250mW, dist=4.0mm (ES-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 95.01 V/m; Power Drift = -0.20 dB
Peak SAR (extrapolated) = 30.3 W/kg
SAR(1 g) = 14 W/kg; SAR(10 g) = 6.49 W/kg
Smallest distance from peaks to all points 3 dB below = 10 mm
Ratio of SAR at M2 to SAR at M1 = 48.5%
Maximum value of SAR (measured) = 16.0 W/kg

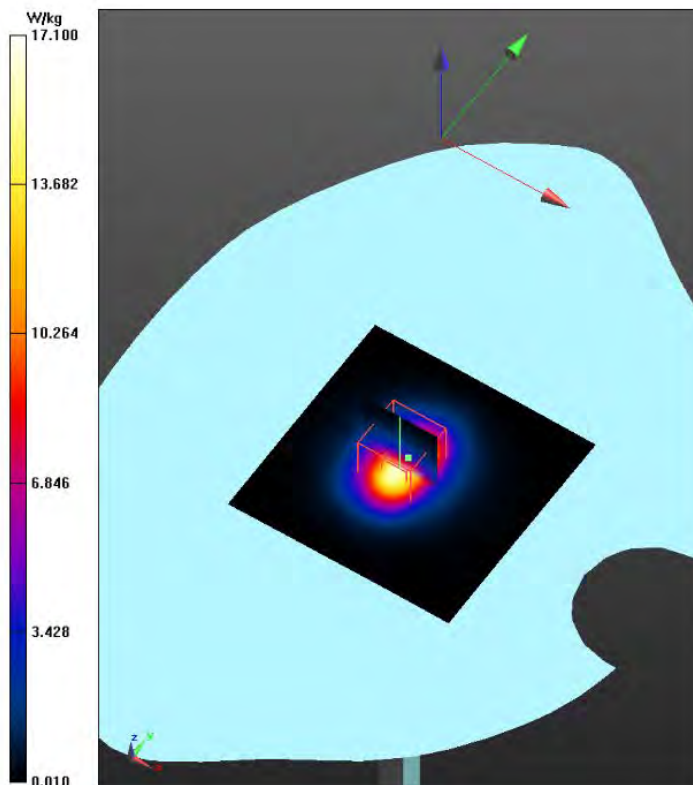

System Check-2450

DUT: Dipole 2450 MHz D2450V2; Type: D2450V2; Serial: D2450V2 - SN:801

Communication System: UID 0, CW (0); Communication System Band: D2450 (2450.0 MHz); Frequency: 2450 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.78$ S/m; $\epsilon_r = 38.17$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

Probe: ES3DV3 - SN3089; ConvF(4.7, 4.7, 4.7) @ 2450 MHz; Calibrated: 2024/7/4

Modulation Compensation:

Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$


Electronics: DAE4 Sn881; Calibrated: 2024/7/4

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1119

DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

System Performance Check at 2450MHz/d=5mm, Pin=250mW, dist=4.0mm (ES-Probe)/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 17.0 W/kg

System Performance Check at 2450MHz/d=5mm, Pin=250mW, dist=4.0mm (ES-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 93.57 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 30.4 W/kg
SAR(1 g) = 14.2 W/kg; SAR(10 g) = 6.55 W/kg
Smallest distance from peaks to all points 3 dB below = 9 mm
Ratio of SAR at M2 to SAR at M1 = 48.5%
Maximum value of SAR (measured) = 16.0 W/kg

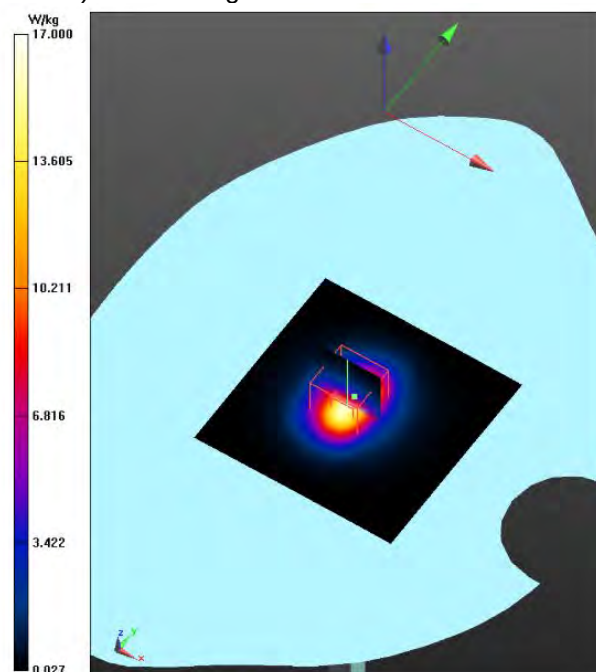

System Check-2600

DUT: Dipole 2600 MHz D2600V2; Type: D2600V2; Serial: D2600V2 - SN:1101

Communication System: UID 0, CW (0); Communication System Band: D2600 (2600.0 MHz); Frequency: 2600 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 2600$ MHz; $\sigma = 2.024$ S/m; $\epsilon_r = 38.587$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

Probe: ES3DV3 - SN3089; ConvF(4.57, 4.57, 4.57) @ 2600 MHz; Calibrated: 2024/7/4

Modulation Compensation:

Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -1.0, 32.0$


Electronics: DAE4 Sn881; Calibrated: 2024/7/4

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1119

DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

System Performance Check at 2600MHz/d=5mm, Pin=250mW, dist=4.0mm (ES-Probe)/Area Scan (61x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 17.2 W/kg

System Performance Check at 2600MHz/d=5mm, Pin=250mW, dist=4.0mm (ES-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 92.37 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 32.7 W/kg
SAR(1 g) = 14.6 W/kg; SAR(10 g) = 6.45 W/kg
Smallest distance from peaks to all points 3 dB below = 9.2 mm
Ratio of SAR at M2 to SAR at M1 = 46.6%
Maximum value of SAR (measured) = 16.4 W/kg

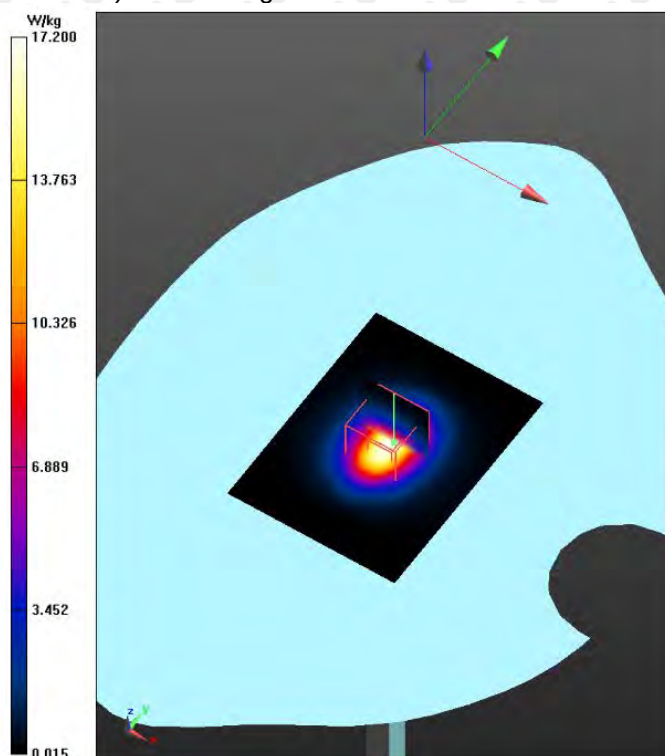

System Check-2600

DUT: Dipole 2600 MHz D2600V2; Type: D2600V2; Serial: D2600V2 - SN: 1101

Communication System: UID 0, CW (0); Communication System Band: D2600 (2600.0 MHz); Frequency: 2600 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 2600$ MHz; $\sigma = 2.019$ S/m; $\epsilon_r = 38.588$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

Probe: ES3DV3 - SN3089; ConvF(4.57, 4.57, 4.57) @ 2600 MHz; Calibrated: 2024/7/4

Modulation Compensation:

Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -1.0, 32.0$


Electronics: DAE4 Sn881; Calibrated: 2024/7/4

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1119

DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

System Performance Check at 2600MHz/d=5mm, Pin=250mW, dist=4.0mm (ES-Probe)/Area Scan (61x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 17.2 W/kg

System Performance Check at 2600MHz/d=5mm, Pin=250mW, dist=4.0mm (ES-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 92.34 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 33.0 W/kg
SAR(1 g) = 14.8 W/kg; SAR(10 g) = 6.49 W/kg
Smallest distance from peaks to all points 3 dB below = 9.2 mm
Ratio of SAR at M2 to SAR at M1 = 46.4%
Maximum value of SAR (measured) = 16.5 W/kg

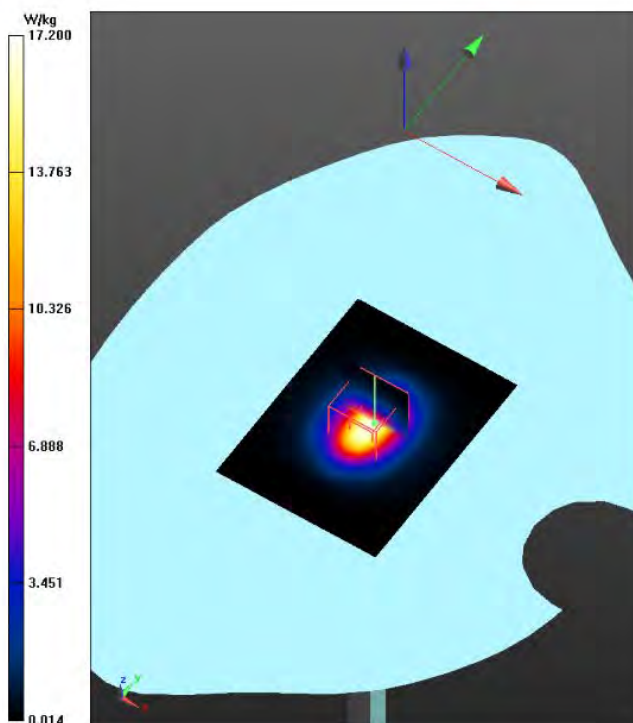

System Check-5200

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1190

Communication System: UID 0, CW; Communication System Band: D5GHz (5000.0 - 6000.0 MHz);

Frequency: 5200 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.568$ S/m; $\epsilon_r = 35.819$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: EX3DV4 - SN7769; ConvF(5.35, 5.35, 5.35) @ 5200 MHz; Calibrated: 2024/9/5

Modulation Compensation:

Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0$

Electronics: DAE4 Sn881; Calibrated: 2024/7/4

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1119

DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

System Performance Check with D5GHzV2 Dipole/ $d=5$ mm, $P_{in}=100$ mW, $f=5200$ MHz/Area Scan (61x61x1):Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 20.9 W/kg

System Performance Check with D5GHzV2 Dipole/ $d=5$ mm, $P_{in}=100$ mW, $f=5200$ MHz/Zoom Scan(4x4x1.4mm, graded), $dist=1.4$ mm (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 70.26 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 30.3 W/kg

SAR(1 g) = 7.82 W/kg; SAR(10 g) = 2.23 W/kg

Smallest distance from peaks to all points 3 dB below = 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 66%

Maximum value of SAR (measured) = 18.4 W/kg

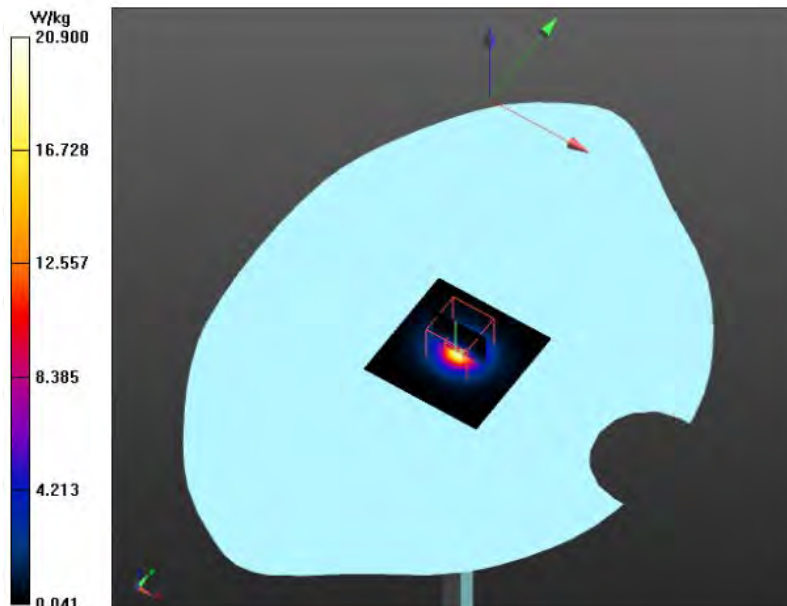

System Check-5200

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1190

Communication System: UID 0, CW; Communication System Band: D5GHz (5000.0 - 6000.0 MHz);

Frequency: 5200 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 5200$ MHz; $\sigma = 4.571$ S/m; $\epsilon_r = 35.872$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: EX3DV4 - SN7769; ConvF(5.35, 5.35, 5.35) @ 5200 MHz; Calibrated: 2024/9/5

Modulation Compensation:

Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0$

Electronics: DAE4 Sn881; Calibrated: 2024/7/4

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1119

DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

System Performance Check with D5GHzV2 Dipole/ $d=5$ mm, $P_{in}=100$ mW, $f=5200$ MHz/Area Scan (61x61x1):Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 20.4 W/kg

System Performance Check with D5GHzV2 Dipole/ $d=5$ mm, $P_{in}=100$ mW, $f=5200$ MHz/Zoom Scan(4x4x1.4mm, graded), $dist=1.4$ mm (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 70.25 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 29.6 W/kg

SAR(1 g) = 7.72 W/kg; SAR(10 g) = 2.21 W/kg

Smallest distance from peaks to all points 3 dB below = 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 65.8%

Maximum value of SAR (measured) = 18.4 W/kg

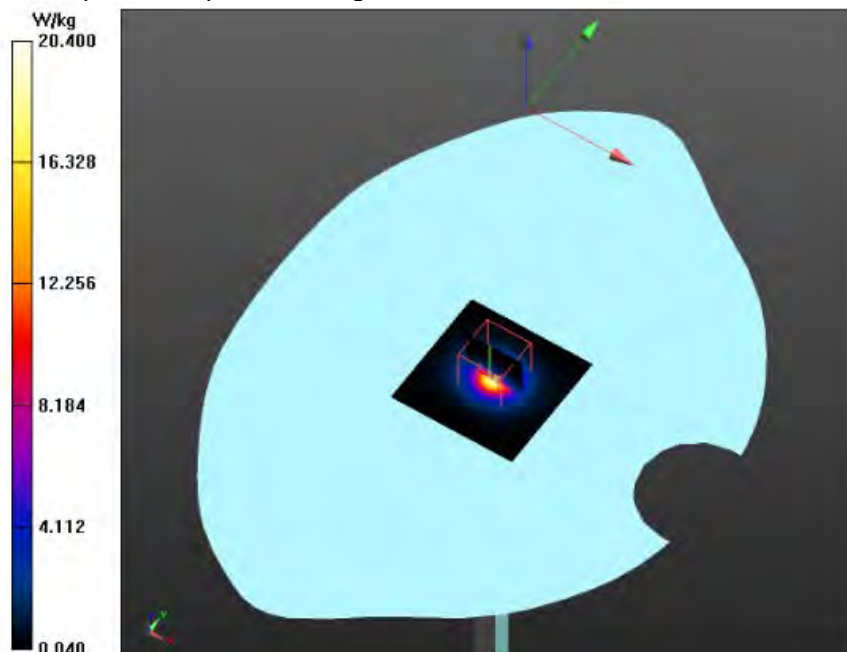

System Check-5300

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1190

Communication System: UID 0, CW; Communication System Band: D5GHz (5000.0 - 6000.0 MHz);

Frequency: 5300 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 5300$ MHz; $\sigma = 4.54$ S/m; $\epsilon_r = 35.63$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: EX3DV4 - SN7769; ConvF(5.35, 5.35, 5.35) @ 5300 MHz; Calibrated: 2024/9/5

Modulation Compensation:

Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0$

Electronics: DAE4 Sn881; Calibrated: 2024/7/4

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1119

DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

System Performance Check with D5GHzV2 Dipole/ $d=5$ mm, $P_{in}=100$ mW, $f=5300$ MHz/Area Scan (61x61x1):Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 23.2 W/kg

System Performance Check with D5GHzV2 Dipole/ $d=5$ mm, $P_{in}=100$ mW, $f=5300$ MHz/Zoom Scan(4x4x1.4mm, graded), $dist=1.4$ mm (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 76.11 V/m; Power Drift = -0.12 dB


Peak SAR (extrapolated) = 34.0 W/kg

SAR(1 g) = 8.65 W/kg; SAR(10 g) = 2.45 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 65.2%

Maximum value of SAR (measured) = 21.0 W/kg

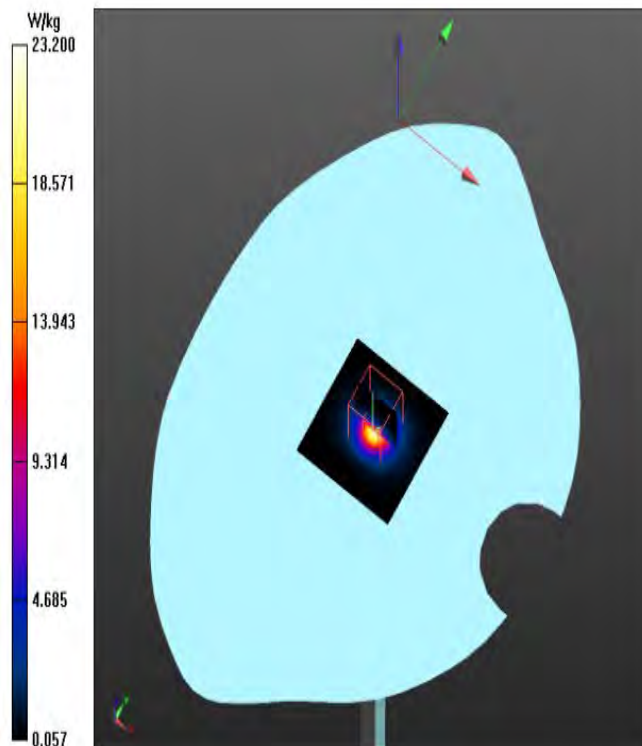

System Check-5300

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1190

Communication System: UID 0, CW; Communication System Band: D5GHz (5000.0 - 6000.0 MHz);

Frequency: 5300 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 5300$ MHz; $\sigma = 4.51$ S/m; $\epsilon_r = 35.73$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: EX3DV4 - SN7769; ConvF(5.35, 5.35, 5.35) @ 5300 MHz; Calibrated: 2024/9/5

Modulation Compensation:

Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0$

Electronics: DAE4 Sn881; Calibrated: 2024/7/4

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1119

DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

System Performance Check with D5GHzV2 Dipole/ $d=5$ mm, $P_{in}=100$ mW, $f=5300$ MHz/Area Scan (61x61x1):Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 23.4 W/kg

System Performance Check with D5GHzV2 Dipole/ $d=5$ mm, $P_{in}=100$ mW, $f=5300$ MHz/Zoom Scan(4x4x1.4mm, graded), $dist=1.4$ mm (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 76.07 V/m; Power Drift = -0.12 dB


Peak SAR (extrapolated) = 34.3 W/kg

SAR(1 g) = 8.67 W/kg; SAR(10 g) = 2.45 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 64.9%

Maximum value of SAR (measured) = 20.9 W/kg

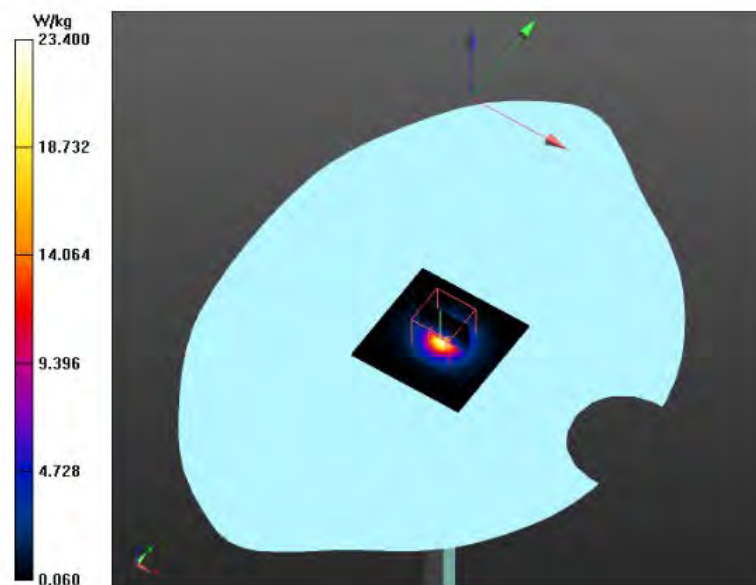

System Check-5800

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1190

Communication System: UID 0, CW (0); Communication System Band: D5GHz (5000.0 - 6000.0 MHz);

Frequency: 5800 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 5800$ MHz; $\sigma = 5.130$ S/m; $\epsilon_r = 34.837$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: EX3DV4 - SN7769; ConvF(4.85, 4.85, 4.85) @ 5800 MHz; Calibrated: 2024/9/5

Modulation Compensation:

Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0$

Electronics: DAE4 Sn881; Calibrated: 2024/7/4

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1119

DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

System Performance Check with D5GHzV2 Dipole/ $d=5$ mm, $P_{in}=100$ mW, $f=5800$ MHz/Area Scan (61x61x1):Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 22.0 W/kg

System Performance Check with D5GHzV2 Dipole/ $d=5$ mm, $P_{in}=100$ mW, $f=5800$ MHz/Zoom Scan(4x4x1.4mm, graded), $dist=1.4$ mm (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 71.28 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 35.4 W/kg

SAR(1 g) = 7.97 W/kg; SAR(10 g) = 2.25 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 61%

Maximum value of SAR (measured) = 19.5 W/kg

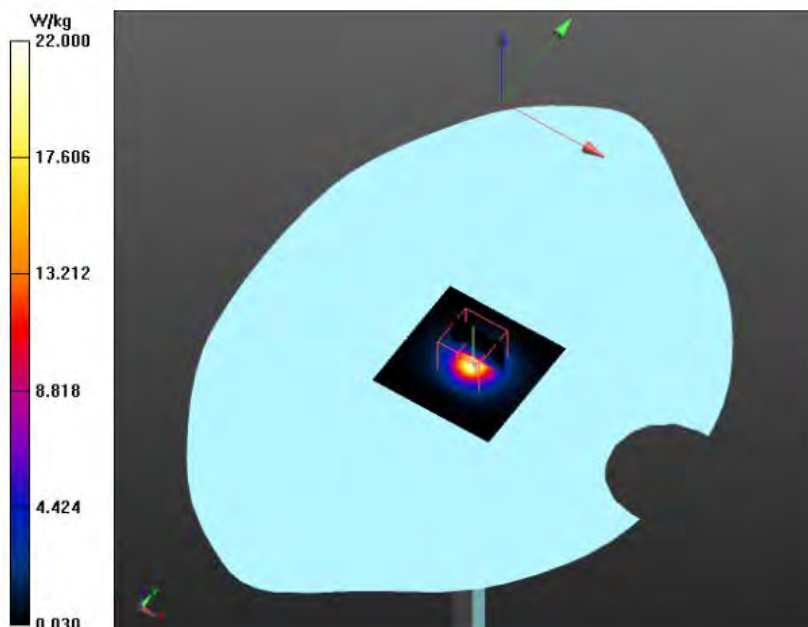

System Check-5800

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1190

Communication System: UID 0, CW (0); Communication System Band: D5GHz (5000.0 - 6000.0 MHz);

Frequency: 5800 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used: $f = 5800$ MHz; $\sigma = 5.264$ S/m; $\epsilon_r = 35.174$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: EX3DV4 - SN7769; ConvF(4.85, 4.85, 4.85) @ 5800 MHz; Calibrated: 2024/9/5

Modulation Compensation:

Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0$

Electronics: DAE4 Sn881; Calibrated: 2024/7/4

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1119

DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

System Performance Check with D5GHzV2 Dipole/ $d=5$ mm, $P_{in}=100$ mW, $f=5800$ MHz/Area Scan (61x61x1):Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 22.2 W/kg

System Performance Check with D5GHzV2 Dipole/ $d=5$ mm, $P_{in}=100$ mW, $f=5800$ MHz/Zoom Scan(4x4x1.4mm, graded), $dist=1.4$ mm (8x8x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 71.49 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 36.6 W/kg

SAR(1 g) = 8.01 W/kg; SAR(10 g) = 2.25 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 60.3%

Maximum value of SAR (measured) = 20.0 W/kg

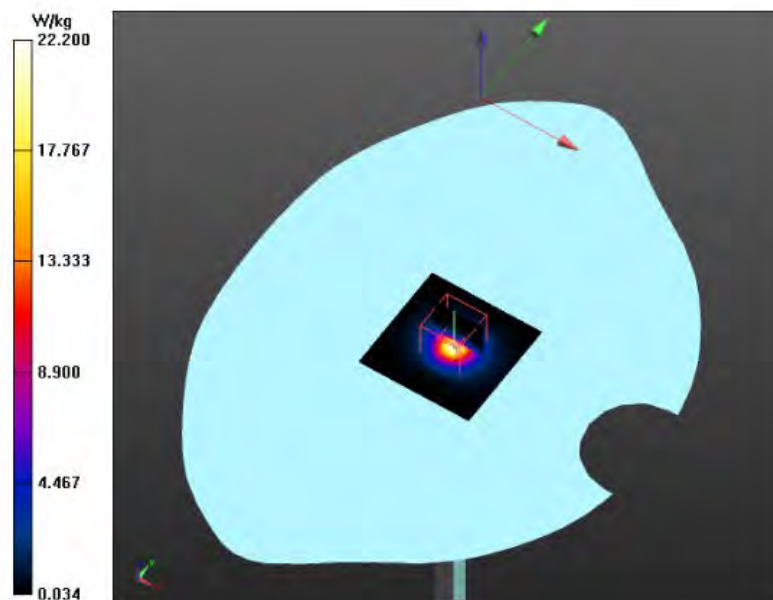

11 Type a Measurement Uncertainty

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience and specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in Table below :

Uncertainty Distribution	Normal	Rectangle	Triangular	U Shape
Multi-plying Factor(a)	$1/k(b)$	$1/\sqrt{3}$	$1/\sqrt{6}$	$1/\sqrt{2}$

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b) k is the coverage factor

Standard Uncertainty for Assumed Distribution

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type -sum- by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %.

The COMOSAR Uncertainty Budget is show in below table:

DASY5 Uncertainty Measurement uncertainty for 300MHz to 3GHz averaged over 1 gram/ 10 gram								
Error Description	Uncert. value	Prob. Dist.	Div.	(ci) 1g	(ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	(vi) vef f
Measurement System								
Probe Calibration	±6.0 %	N	1	1	1	±6.0 %	±6.0 %	∞
Axial Isotropy	±4.7 %	R	√3	0.7	0.7	±1.9 %	±1.9 %	∞
Hemispherical Isotropy	±9.6 %	R	√3	0.7	0.7	±3.9 %	±3.9 %	∞
Boundary Effects	±1.0 %	R	√3	1	1	±0.6 %	±0.6 %	∞
Linearity	±4.7 %	R	√3	1	1	±2.7 %	±2.7 %	∞
System Detection Limits	±1.0 %	R	√3	1	1	±0.6 %	±0.6 %	∞
Modulation Responsem	±2.4 %	R	√3	1	1	±1.4 %	±1.4 %	∞
Readout Electronics	±0.3 %	N	1	1	1	±0.3 %	±0.3 %	∞
Response Time	±0.8 %	R	√3	1	1	±0.5 %	±0.5 %	∞
Integration Time	±2.6 %	R	√3	1	1	±1.5 %	±1.5 %	∞
RF Ambient Noise	±3.0 %	R	√3	1	1	±1.7 %	±1.7 %	∞
RF Ambient Reflections	±3.0 %	R	√3	1	1	±1.7 %	±1.7 %	∞
Probe Positioner	±0.4 %	R	√3	1	1	±0.2 %	±0.2 %	∞
Probe Positioning	±2.9 %	R	√3	1	1	±1.7 %	±1.7 %	∞
Max. SAR Eval.	±2.0 %	R	√3	1	1	±1.2 %	±1.2 %	∞
Test Sample Related								
Device Positioning	±2.9 %	N	1	1	1	±2.9 %	±2.9 %	145
Device Holder	±3.6 %	N	1	1	1	±3.6 %	±3.6 %	5
Power Drift	±5.0 %	R	√3	1	1	±2.9 %	±2.9 %	∞
Power Scalingp	±0 %	R	√3	1	1	±0.0 %	±0.0 %	∞
Phantom and Setup								
Phantom Uncertainty	±6.1 %	R	√3	1	1	±3.5 %	±3.5 %	∞
SAR correction	±1.9 %	R	√3	1	0.84	±1.1 %	±0.9 %	∞
Liquid Conductivity (mea.)DAK	±2.5 %	R	√3	0.78	0.71	±1.1 %	±1.0 %	∞
Liquid Permittivity (mea.) DAK	±2.5 %	R	√3	0.26	0.26	±0.3 %	±0.4 %	∞
Temp. unc. - Conductivity BB	±3.4 %	R	√3	0.78	0.71	±1.5 %	±1.4 %	∞
Temp. unc. - Permittivity BB	±0.4 %	R	√3	0.23	0.26	±0.1 %	±0.1 %	∞
Combined Std. Uncertainty						±11.2 %	±11.1 %	361
Expanded STD Uncertainty						±22.3 %	±22.2 %	

DASY5 Uncertainty Measurement uncertainty for 3GHz-6GHz averaged over 1 gram/ 10 gram								
Error Description	Uncert. value	Prob. Dist.	Div.	(ci) 1g	(ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	(vi) vef f
Measurement System								
Probe Calibration	±7.56 %	N	1	1	1	±7.56 %	±7.56 %	∞
Axial Isotropy	±4.7 %	R	√3	0.7	0.7	±1.9 %	±1.9 %	∞
Hemispherical Isotropy	±9.6 %	R	√3	0.7	0.7	±3.9 %	±3.9 %	∞
Linearity	±4.7 %	R	√3	1	1	±2.7 %	±2.7 %	∞
Modulation Responsem	±2.4 %	R	√3	1	1	±1.4 %	±1.4 %	∞
System Detection Limits	±1.0 %	R	√3	1	1	±0.6 %	±0.6 %	∞
Boundary Effects	±2.0 %	R	√3	1	1	±1.2 %	±1.2 %	∞
Readout Electronics	±0.3 %	N	1	1	1	±0.3 %	±0.3 %	∞
Response Time	±0.8 %	R	√3	1	1	±0.5 %	±0.5 %	∞
Integration Time	±2.6 %	R	√3	1	1	±1.5 %	±1.5 %	∞
RF Ambient Noise	±3.0 %	R	√3	1	1	±1.7 %	±1.7 %	∞
RF Ambient Reflections	±3.0 %	R	√3	1	1	±1.7 %	±1.7 %	∞
Probe Positioner	±0.8 %	R	√3	1	1	±0.5 %	±0.5 %	∞
Probe Positioning	±6.7 %	R	√3	1	1	±3.9 %	±3.9 %	∞
Post-processing	±4.0 %	R	√3	1	1	±2.3 %	±2.3 %	∞
Test Sample Related								
Device Holder	±3.6 %	N	1	1	1	±3.6 %	±3.6 %	5
Test sample Positioning	±2.9 %	N	1	1	1	±2.9 %	±2.9 %	145
Power Scalingp	±0 %	R	√3	1	1	±0.0 %	±0.0 %	∞
Power Drift	±5.0 %	R	√3	1	1	±2.9 %	±2.9 %	∞
Phantom and Setup								
Phantom Uncertainty	±7.6 %	R	√3	1	1	±4.4 %	±4.4 %	∞
SAR correction	±1.9 %	R	√3	1	0.84	±1.1 %	±0.9 %	∞
Liquid Conductivity (mea.)DAK	±2.5 %	R	√3	0.78	0.71	±1.1 %	±1.0 %	∞
Liquid Permittivity (mea.) DAK	±2.5 %	R	√3	0.26	0.26	±0.3 %	±0.4 %	∞
Temp. unc. - Conductivity BB	±3.4 %	R	√3	0.78	0.71	±1.5 %	±1.4 %	∞
Temp. unc. - Permittivity BB	±0.4 %	R	√3	0.23	0.26	±0.1 %	±0.1 %	∞
Combined Std. Uncertainty						±13.04%	±13.01 %	748
Expanded STD Uncertainty						±26.08 %	±26.02 %	

12 Output Power Verification

12.1 Test Condition:

- Conducted Measurement
EUT was set for low, mid, high channel with modulated mode and highest RF output power. The base station simulator was connected to the antenna terminal.
- Conducted Emissions Measurement Uncertainty
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 40GHz is $\pm 1.5\text{dB}$.
- Environmental Conditions

Temperature	23°C
Relative Humidity	53%
Atmospheric Pressure	1019mbar
- Tested By : Martin Feng

12.2 Test Procedures:

Mobile Phone radio output power measurement

- The transmitter output port was connected to base station emulator.
- Establish communication link between emulator and EUT and set EUT to operate at maximum output power all the time.
- Select lowest, middle, and highest channels for each band and different possible test mode.
- Measure the conducted peak burst power and conducted average burst power from EUT antenna port.

Other radio output power measurement:

The output power was measured using power meter at low, mid, and hi channels.

Source-based Time Averaged Burst Power Calculation:

For TDMA, the following duty cycle factor was used to calculate the source-based time average power

Number of Time slot	1	2	3	4
Duty Cycle	1:8	1:4	1:2.66	1:2
Duty cycle factor	-9.03 dB	-6.02 dB	-4.26 dB	-3.01 dB
Crest Factor	8	4	2.66	2

Remark: *Time slot duty cycle factor = $10 * \log(\text{Time Slot Duty Cycle})$*

Source based time averaged power = Maximum burst averaged power (1 Uplink) – 9.03 dB

Source based time averaged power = Maximum burst averaged power (2 Uplink) – 6.02 dB

Source based time averaged power = Maximum burst averaged power (3 Uplink) – 4.26 dB

Source based time averaged power = Maximum burst averaged power (4 Uplink) – 3.01 dB

Test Result:

Burst Average Power (dBm);								
Band	GSM850				PCS1900			
Channel	128	190	251	Tune up Power tolerant	512	661	810	Tune up Power tolerant
Frequency (MHz)	824.2	836.6	848.8	/	1850.2	1880	1909.8	/
GSM	32.02	32.12	32.46	32±1	28.38	28.78	29.11	29±1
GPRS 1 slots	32.04	32.16	32.51	32±1	28.40	28.77	29.10	29±1
GPRS 2 slots	31.53	31.59	31.91	31±1	27.38	27.80	28.20	28±1
GPRS 3 slots	29.96	30.00	30.31	30±1	25.54	25.54	26.46	26±1
GPRS 4 slots	28.77	28.83	29.13	29±1	24.72	25.22	25.68	25±1
EGPRS 1 slots	25.83	25.77	25.98	25±1	26.16	25.50	24.96	25.5±1
EGPRS 2 slots	24.65	24.94	25.01	25±1	25.07	24.45	24.36	25±1
EGPRS 3 slots	22.72	22.93	22.90	22±1	23.10	22.44	22.28	23±1
EGPRS 4 slots	21.58	21.67	21.57	21±1	22.21	21.64	21.12	22±1
Remark : GPRS, CS1 coding scheme. EGPRS, MCS5 coding scheme. Multi 1 Slot , Support Max 4 downlink, 1 uplink , 5 working link Multi 2 Slots , Support Max 4 downlink, 2 uplink , 5 working link Multi 3 Slots , Support Max 4 downlink, 3 uplink , 5 working link Multi 4 Slots , Support Max 4 downlink, 4 uplink , 5 working link								

Source Based time Average Power (dBm)								
Band	GSM850				PCS1900			
Channel	128	190	251	Time Average factor	512	661	810	Time Average factor
Frequency (MHz)	824.2	836.6	848.8	/	1850.2	1880	1909.8	/
GSM	22.99	23.09	23.43	-9.03	19.35	19.75	20.08	-9.03
GPRS 1 slots	23.01	23.13	23.48	-9.03	19.37	19.74	20.07	-9.03
GPRS 2 slots	25.51	25.57	25.89	-6.02	21.36	21.78	22.18	-6.02
GPRS 3 slots	25.70	25.74	26.05	-4.26	21.28	21.28	22.20	-4.26
GPRS 4 slots	25.76	25.82	26.12	-3.01	21.71	22.21	22.67	-3.01
EGPRS 1 slots	16.80	16.74	16.95	-9.03	17.13	16.47	15.93	-9.03
EGPRS 2 slots	18.63	18.92	18.99	-6.02	19.05	18.43	18.34	-6.02
EGPRS 3 slots	18.46	18.67	18.64	-4.26	18.84	18.18	18.02	-4.26
EGPRS 4 slots	18.57	18.66	18.56	-3.01	19.20	18.63	18.11	-3.01
Remark : Time average factor = 1 uplink , $10 \cdot \log(1/8) = -9.03\text{dB}$, 2 uplink , $10 \cdot \log(2/8) = -6.02\text{dB}$, 3 uplink , $10 \cdot \log(3/8) = -4.26\text{dB}$, 4 uplink , $10 \cdot \log(4/8) = -3.01\text{dB}$ Source based time average power = Burst Average power + Time Average factor								

Note: DUT was set in GPRS(4Tx slots) for GSM850 and PCS1900 due to the Maximum source-base time average output power for body SAR.

WCDMA - Average Power (dBm)								
Band	WCDMA Band II				WCDMA Band V			
Channel	9262	9400	9538	Tune up Power tolerant	4132	4182	4233	Tune up Power tolerant
Frequency (MHz)	1852.4	1880	1907.6	/	826.4	836.4	846.6	/
RMC 12.2k	20.41	20.89	21.03	21±1	22.32	22.85	22.70	22±1
HSDPA Subtest-1	20.38	20.88	21.02	21±1	22.26	22.86	22.68	22±1
HSDPA Subtest-2	20.37	20.89	21.01	21±1	22.27	22.86	22.69	22±1
HSDPA Subtest-3	20.37	20.88	21.01	21±1	22.28	22.84	22.71	22±1
HSDPA Subtest-4	20.36	20.90	21.00	21±1	22.29	22.85	22.71	22±1
HSUPA Subtest-1	20.37	20.88	21.01	21±1	22.26	22.86	22.69	22±1
HSUPA Subtest-2	20.39	20.88	21.01	21±1	22.28	22.85	22.70	22±1
HSUPA Subtest-3	20.36	20.88	21.01	21±1	22.29	22.83	22.70	22±1
HSUPA Subtest-4	20.36	20.88	21.00	21±1	22.30	22.83	22.71	22±1
HSUPA Subtest-5	20.37	20.88	21.00	21±1	22.27	22.85	22.69	22±1

LTE Power Reduction

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signalling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10, 15, 20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3 6.6.3.3.2	13	10	Table 6.2.4-2	Table 6.2.4-2
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 ¹	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..					
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

LTE Band 2:

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
1.4MHz	18607	1850.7	QPSK	1	0	22.31	22.0±1	/
				1	2	22.52	22.0±1	/
				1	5	22.30	22.0±1	/
				3	0	22.31	22.0±1	/
				3	2	22.30	22.0±1	/
				6	0	21.26	21.0±1	1.0
			16QAM	1	0	21.28	21.0±1	1.0
				1	2	21.48	21.0±1	1.0
				1	5	21.28	21.0±1	1.0
				3	0	21.46	21.0±1	1.0
				3	2	21.50	21.0±1	1.0
				6	0	20.30	21.0±1	1.0
	18900	1880	QPSK	1	0	22.71	22.0±1	/
				1	2	22.89	22.0±1	/
				1	5	22.72	22.0±1	/
				3	0	22.77	22.0±1	/
				3	1	22.77	22.0±1	/
				6	0	21.80	21.0±1	1.0
			16QAM	1	0	21.91	21.0±1	1.0
				1	2	22.15	22.0±1	/
				1	5	21.92	21.0±1	1.0
				3	0	21.83	21.0±1	1.0
				3	2	21.85	21.0±1	1.0
				6	0	20.77	21.0±1	1.0
	19193	1909.3	QPSK	1	0	22.89	23.0±1	/
				1	2	23.11	23.0±1	/
				1	5	22.93	23.0±1	/
				3	0	22.96	23.0±1	/
				3	2	22.93	23.0±1	/
				6	0	21.96	22.0±1	1.0
			16QAM	1	0	21.82	22.0±1	1.0
				1	2	21.98	22.0±1	1.0
				1	5	21.83	22.0±1	1.0
				3	0	21.93	22.0±1	1.0
				3	2	21.94	22.0±1	1.0
				6	0	21.05	22.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
3MHz	18615	1851.5	QPSK	1	0	22.25	22.0±1	/
				1	8	22.22	22.0±1	/
				1	14	22.21	22.0±1	/
				6	0	21.32	21.0±1	1.0
				6	9	21.30	21.0±1	1.0
				15	0	21.28	21.0±1	1.0
			16QAM	1	0	21.58	21.0±1	1.0
				1	8	21.56	21.0±1	1.0
				1	14	21.55	21.0±1	1.0
				6	0	20.32	21.0±1	1.0
				6	9	20.31	21.0±1	1.0
				15	0	20.25	21.0±1	1.0
	18900	1880	QPSK	1	0	22.81	22.0±1	/
				1	8	22.81	22.0±1	/
				1	14	22.83	22.0±1	/
				6	4	21.82	21.0±1	1.0
				6	9	21.85	21.0±1	1.0
				15	0	21.83	21.0±1	1.0
			16QAM	1	0	21.97	21.0±1	1.0
				1	8	22.03	21.0±1	1.0
				1	14	22.03	21.0±1	1.0
				6	0	20.81	21.0±1	1.0
				6	9	20.86	21.0±1	1.0
				15	0	20.72	21.0±1	1.0
	19185	1908.5	QPSK	1	0	22.91	23.0±1	/
				1	8	22.99	23.0±1	/
				1	14	23.03	23.0±1	/
				6	0	21.96	22.0±1	1.0
				6	9	22.03	22.0±1	1.0
				15	0	21.98	22.0±1	1.0
			16QAM	1	0	21.81	22.0±1	1.0
				1	8	21.90	22.0±1	1.0
				1	14	21.89	22.0±1	1.0
				6	0	21.07	22.0±1	1.0
				6	9	21.03	22.0±1	1.0
				15	0	21.08	22.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
5MHz	18625	1852.5	QPSK	1	0	22.16	22.0±1	/
				1	12	22.29	22.0±1	/
				1	24	22.13	22.0±1	/
				12	0	21.30	21.0±1	1.0
				12	11	21.26	21.0±1	1.0
				25	0	21.28	21.0±1	1.0
			16QAM	1	0	21.51	21.0±1	1.0
				1	12	21.62	21.0±1	1.0
				1	24	21.49	21.0±1	1.0
				12	0	20.24	21.0±1	1.0
				12	11	20.22	21.0±1	1.0
				25	0	20.30	21.0±1	1.0
	18900	1880	QPSK	1	0	22.65	22.0±1	/
				1	12	22.81	22.0±1	/
				1	24	22.72	22.0±1	/
				12	0	21.78	21.0±1	1.0
				12	11	21.91	21.0±1	1.0
				25	0	21.85	21.0±1	1.0
			16QAM	1	0	21.89	21.0±1	1.0
				1	12	22.09	22.0±1	/
				1	24	21.95	21.0±1	1.0
				12	0	20.73	21.0±1	1.0
				12	11	20.85	21.0±1	1.0
				25	0	20.81	21.0±1	1.0
	19175	1907.5	QPSK	1	0	22.71	22.0±1	/
				1	12	22.90	22.0±1	/
				1	24	22.77	22.0±1	/
				12	0	21.89	21.0±1	1.0
				12	11	22.02	22.0±1	/
				25	0	21.99	21.0±1	1.0
			16QAM	1	0	22.05	22.0±1	/
				1	12	22.23	22.0±1	/
				1	24	22.09	22.0±1	/
				12	0	20.89	21.0±1	1.0
				12	11	21.03	21.0±1	1.0
				25	0	21.00	21.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
10MHz	18650	1855	QPSK	1	0	22.20	22.0±1	/
				1	24	22.24	22.0±1	/
				1	49	22.21	22.0±1	/
				25	0	21.30	21.0±1	1.0
				25	24	21.21	21.0±1	1.0
				50	0	21.26	21.0±1	1.0
			16QAM	1	0	21.56	21.0±1	1.0
				1	24	21.65	21.0±1	1.0
				1	49	21.54	21.0±1	1.0
				25	0	20.41	21.0±1	1.0
				25	24	20.30	21.0±1	1.0
				50	0	20.28	21.0±1	1.0
	18900	1880	QPSK	1	0	22.68	22.0±1	/
				1	24	22.93	22.0±1	/
				1	49	22.82	22.0±1	/
				25	0	21.71	21.0±1	1.0
				25	24	21.98	21.0±1	1.0
				50	0	21.85	21.0±1	1.0
			16QAM	1	0	21.91	21.0±1	1.0
				1	24	22.13	22.0±1	/
				1	49	22.05	22.0±1	/
				25	0	20.76	21.0±1	1.0
				25	24	21.01	21.0±1	1.0
				50	0	20.85	21.0±1	1.0
	19150	1905	QPSK	1	0	22.92	23.0±1	/
				1	24	23.04	23.0±1	/
				1	49	22.98	23.0±1	/
				25	0	21.96	22.0±1	1.0
				25	24	22.11	22.0±1	1.0
				50	0	22.03	22.0±1	1.0
			16QAM	1	0	21.77	22.0±1	1.0
				1	24	21.89	22.0±1	1.0
				1	49	21.86	22.0±1	1.0
				25	0	21.08	22.0±1	1.0
				25	24	21.09	22.0±1	1.0
				50	0	21.02	22.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
15MHz	18675	1857.5	QPSK	1	0	22.17	22.0±1	/
				1	37	22.22	22.0±1	/
				1	74	22.23	22.0±1	/
				36	0	21.34	21.0±1	1.0
				36	35	21.28	21.0±1	1.0
				75	0	21.31	21.0±1	1.0
			16QAM	1	0	21.49	21.0±1	1.0
				1	37	21.58	21.0±1	1.0
				1	74	21.53	21.0±1	1.0
				36	0	20.35	21.0±1	1.0
				36	35	20.26	21.0±1	1.0
				75	0	20.33	21.0±1	1.0
	18900	1880	QPSK	1	0	22.54	22.0±1	/
				1	37	22.80	22.0±1	/
				1	74	22.77	22.0±1	/
				36	0	21.73	21.0±1	1.0
				36	35	21.99	21.0±1	1.0
				75	0	21.89	21.0±1	1.0
			16QAM	1	0	21.74	21.0±1	1.0
				1	37	22.02	22.0±1	/
				1	74	21.99	21.0±1	1.0
				36	0	20.71	21.0±1	1.0
				36	35	20.95	21.0±1	1.0
				75	0	20.81	21.0±1	1.0
	19125	1902.5	QPSK	1	0	22.83	22.0±1	/
				1	37	22.92	22.0±1	/
				1	74	22.92	22.0±1	/
				36	0	22.04	22.0±1	/
				36	35	22.10	22.0±1	/
				75	0	22.08	22.0±1	/
			16QAM	1	0	21.88	21.0±1	1.0
				1	37	21.96	21.0±1	1.0
				1	74	21.94	21.0±1	1.0
				36	0	21.01	21.0±1	1.0
				36	35	21.02	21.0±1	1.0
				75	0	21.05	21.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
20MHz	18700	1860	QPSK	1	0	21.95	22.0±1	/
				1	49	22.32	22.0±1	/
				1	99	22.17	22.0±1	/
				50	0	21.32	22.0±1	/
				50	24	21.22	22.0±1	/
				100	0	21.30	22.0±1	/
			16QAM	1	0	21.21	22.0±1	/
				1	49	21.59	22.0±1	/
				1	99	21.41	22.0±1	/
				50	0	20.35	21.0±1	1.0
				50	24	20.22	21.0±1	/
				100	0	20.29	21.0±1	/
	18900	1880	QPSK	1	0	22.34	22.0±1	/
				1	49	22.99	22.0±1	/
				1	99	22.73	22.0±1	/
				50	0	21.63	21.0±1	1.0
				50	24	21.99	21.0±1	1.0
				100	0	21.83	21.0±1	1.0
			16QAM	1	0	21.22	21.0±1	1.0
				1	49	21.90	21.0±1	1.0
				1	99	21.59	21.0±1	1.0
				50	0	20.60	21.0±1	1.0
				50	24	20.95	21.0±1	1.0
				100	0	20.85	21.0±1	1.0
	19100	1900	QPSK	1	0	22.64	22.0±1	/
				1	49	22.95	22.0±1	/
				1	99	22.71	22.0±1	/
				50	0	22.11	22.0±1	/
				50	24	22.02	22.0±1	/
				100	0	22.07	22.0±1	/
			16QAM	1	0	21.46	21.0±1	1.0
				1	49	21.81	21.0±1	1.0
				1	99	21.51	21.0±1	1.0
				50	0	21.16	21.0±1	1.0
				50	24	21.03	21.0±1	1.0
				100	0	21.08	21.0±1	1.0

LTE Band 4:

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
1.4MHz	19957	1710.7	QPSK	1	0	23.80	23.0±1	/
				1	2	23.90	23.0±1	/
				1	5	23.80	23.0±1	/
				3	0	23.84	23.0±1	/
				3	1	23.80	23.0±1	/
				6	0	22.97	22.0±1	1.0
			16QAM	1	0	22.94	22.0±1	1.0
				1	2	23.09	23.0±1	/
				1	5	22.95	22.0±1	1.0
				3	0	22.78	22.0±1	1.0
				3	2	22.80	22.0±1	1.0
				6	0	21.82	22.0±1	1.0
	20175	1732.5	QPSK	1	0	23.65	23.0±1	/
				1	2	23.86	23.0±1	/
				1	5	23.67	23.0±1	/
				3	0	23.71	23.0±1	/
				3	2	23.69	23.0±1	/
				6	0	22.72	22.0±1	1.0
			16QAM	1	0	22.55	22.0±1	1.0
				1	2	22.72	22.0±1	1.0
				1	5	22.58	22.0±1	1.0
				3	0	22.67	22.0±1	1.0
				3	2	22.66	22.0±1	1.0
				6	0	21.68	22.0±1	1.0
	20393	1754.3	QPSK	1	0	23.60	23.0±1	/
				1	2	23.79	23.0±1	/
				1	5	23.52	23.0±1	/
				3	0	23.49	23.0±1	/
				3	2	23.50	23.0±1	/
				6	0	22.63	22.0±1	1.0
			16QAM	1	0	22.43	22.0±1	1.0
				1	2	22.66	22.0±1	1.0
				1	5	22.44	22.0±1	1.0
				3	0	22.60	22.0±1	1.0
				3	2	22.62	22.0±1	1.0
				6	0	21.56	22.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
3MHz	19965	1711.5	QPSK	1	0	23.86	23.0±1	/
				1	8	23.79	23.0±1	/
				1	14	23.79	23.0±1	/
				8	0	22.86	22.0±1	1.0
				8	4	22.87	22.0±1	1.0
				15	0	22.80	22.0±1	1.0
			16QAM	1	0	23.03	23.0±1	/
				1	8	22.95	22.0±1	1.0
				1	14	22.96	22.0±1	1.0
				8	0	21.81	22.0±1	1.0
				8	9	21.81	22.0±1	1.0
				15	0	21.75	22.0±1	1.0
	20175	1732.5	QPSK	1	0	23.62	23.0±1	/
				1	8	23.60	23.0±1	/
				1	14	23.62	23.0±1	/
				8	0	22.72	22.0±1	1.0
				8	4	22.72	22.0±1	1.0
				15	0	22.63	22.0±1	1.0
			16QAM	1	0	22.83	22.0±1	1.0
				1	8	22.78	22.0±1	1.0
				1	14	22.79	22.0±1	1.0
				8	0	21.64	22.0±1	1.0
				8	4	21.66	22.0±1	1.0
				15	0	21.53	22.0±1	1.0
	20385	1753.5	QPSK	1	0	23.63	23.0±1	/
				1	8	23.59	23.0±1	/
				1	14	23.57	23.0±1	/
				8	0	22.59	22.0±1	1.0
				8	9	22.54	22.0±1	1.0
				15	0	22.50	22.0±1	1.0
			16QAM	1	0	22.36	22.0±1	1.0
				1	8	22.36	22.0±1	1.0
				1	14	22.34	22.0±1	1.0
				8	0	21.51	22.0±1	1.0
				8	9	21.49	22.0±1	1.0
				15	0	21.46	22.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
5MHz	19975	1712.5	QPSK	1	0	23.78	23.0±1	/
				1	49	23.84	23.0±1	/
				1	99	23.76	23.0±1	/
				12	0	22.79	22.0±1	1.0
				12	24	22.79	22.0±1	1.0
				25	0	22.79	22.0±1	1.0
			16QAM	1	0	22.96	22.0±1	1.0
				1	49	23.03	23.0±1	/
				1	99	22.93	22.0±1	1.0
				12	0	21.72	22.0±1	1.0
				12	24	21.70	22.0±1	1.0
				25	0	21.77	22.0±1	1.0
	20175	1732.5	QPSK	1	0	23.59	23.0±1	/
				1	49	23.67	23.0±1	/
				1	99	23.58	23.0±1	/
				12	0	22.66	22.0±1	1.0
				12	49	22.73	22.0±1	1.0
				25	0	22.69	22.0±1	1.0
			16QAM	1	0	22.79	22.0±1	1.0
				1	49	22.84	22.0±1	1.0
				1	99	22.75	22.0±1	1.0
				12	0	21.57	22.0±1	1.0
				12	24	21.64	22.0±1	1.0
				25	0	21.64	22.0±1	1.0
	20375	1752.5	QPSK	1	0	23.42	23.0±1	/
				1	49	23.49	23.0±1	/
				1	99	23.33	23.0±1	/
				12	0	22.56	22.0±1	1.0
				12	49	22.43	22.0±1	1.0
				25	0	22.52	22.0±1	1.0
			16QAM	1	0	22.62	22.0±1	1.0
				1	49	22.70	22.0±1	1.0
				1	99	22.58	22.0±1	1.0
				12	0	21.53	22.0±1	1.0
				12	49	21.42	22.0±1	1.0
				25	0	21.48	22.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
10MHz	20000	1715	QPSK	1	0	23.85	23.0±1	/
				1	49	23.92	23.0±1	/
				1	99	23.77	23.0±1	/
				25	0	22.88	22.0±1	1.0
				25	49	22.88	22.0±1	1.0
				50	0	22.85	22.0±1	1.0
			16QAM	1	0	23.03	23.0±1	/
				1	49	23.07	23.0±1	/
				1	99	22.97	22.0±1	1.0
				25	0	21.90	22.0±1	1.0
				25	49	21.90	22.0±1	1.0
				50	0	21.81	22.0±1	1.0
	20175	1732.5	QPSK	1	0	23.70	23.0±1	/
				1	49	23.73	23.0±1	/
				1	99	23.63	23.0±1	/
				25	0	22.70	22.0±1	1.0
				25	49	22.83	22.0±1	1.0
				50	0	22.76	22.0±1	1.0
			16QAM	1	0	22.89	22.0±1	1.0
				1	49	22.96	22.0±1	1.0
				1	99	22.78	22.0±1	1.0
				25	0	21.72	22.0±1	1.0
				25	49	21.84	22.0±1	1.0
				50	0	21.73	22.0±1	1.0
	20350	1750	QPSK	1	0	23.60	23.0±1	/
				1	49	23.64	23.0±1	/
				1	99	23.46	23.0±1	/
				25	0	22.69	22.0±1	1.0
				25	49	22.47	22.0±1	1.0
				50	0	22.59	22.0±1	1.0
			16QAM	1	0	22.75	22.0±1	1.0
				1	49	23.08	23.0±1	/
				1	99	22.87	22.0±1	1.0
				25	0	21.74	22.0±1	1.0
				25	49	21.52	22.0±1	1.0
				50	0	21.56	22.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
15MHz	20025	1717.5	QPSK	1	0	23.74	23.0±1	/
				1	49	23.79	23.0±1	/
				1	99	23.64	23.0±1	/
				36	0	23.04	23.0±1	/
				36	49	22.91	23.0±1	/
				75	0	23.00	23.0±1	/
			16QAM	1	0	22.90	22.0±1	1.0
				1	49	22.93	23.0±1	/
				1	99	22.82	22.0±1	1.0
				36	0	21.90	22.0±1	1.0
				36	49	21.83	22.0±1	1.0
				75	0	21.90	22.0±1	1.0
	20175	1732.5	QPSK	1	0	23.74	23.0±1	/
				1	49	23.73	23.0±1	/
				1	99	23.63	23.0±1	/
				36	0	22.79	22.0±1	1.0
				36	49	22.88	22.0±1	1.0
				75	0	22.81	22.0±1	1.0
			16QAM	1	0	22.69	22.0±1	1.0
				1	49	22.73	23.0±1	/
				1	99	22.56	22.0±1	1.0
				36	0	21.71	22.0±1	1.0
				36	49	21.74	22.0±1	1.0
				75	0	21.79	22.0±1	1.0
	20325	1747.5	QPSK	1	0	23.53	23.0±1	/
				1	49	23.60	23.0±1	/
				1	99	23.38	23.0±1	/
				36	0	22.82	22.0±1	1.0
				36	49	22.67	22.0±1	1.0
				75	0	22.76	22.0±1	1.0
			16QAM	1	0	22.75	22.0±1	1.0
				1	49	22.74	23.0±1	/
				1	99	22.58	22.0±1	1.0
				36	0	21.72	22.0±1	1.0
				36	49	21.56	22.0±1	1.0
				75	0	21.67	22.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
20MHz	20050	1720	QPSK	1	0	23.63	23.0±1	/
				1	49	23.93	23.0±1	/
				1	99	23.49	23.0±1	/
				50	0	22.90	22.0±1	1.0
				50	24	22.79	22.0±1	1.0
				100	0	22.86	22.0±1	1.0
			16QAM	1	0	22.72	22.0±1	1.0
				1	49	23.02	23.0±1	/
				1	99	22.69	22.0±1	1.0
				50	0	21.87	22.0±1	1.0
				50	24	21.77	22.0±1	1.0
				100	0	21.84	22.0±1	1.0
	20175	1732.5	QPSK	1	0	23.63	23.0±1	/
				1	49	23.89	23.0±1	/
				1	99	23.54	23.0±1	/
				50	0	22.67	22.0±1	1.0
				50	24	22.80	22.0±1	1.0
				100	0	22.73	22.0±1	1.0
			16QAM	1	0	22.42	22.0±1	1.0
				1	49	22.73	22.0±1	1.0
				1	99	22.29	22.0±1	1.0
				50	0	21.64	22.0±1	1.0
				50	49	21.74	22.0±1	1.0
				100	0	21.73	22.0±1	1.0
	20300	1745	QPSK	1	0	23.43	23.0±1	/
				1	49	23.78	23.0±1	/
				1	99	23.32	23.0±1	/
				50	0	22.64	22.0±1	1.0
				50	24	22.45	22.0±1	1.0
				100	0	22.57	22.0±1	1.0
			16QAM	1	0	22.19	22.0±1	1.0
				1	49	22.44	22.0±1	1.0
				1	99	22.02	22.0±1	1.0
				50	0	21.64	22.0±1	1.0
				50	49	21.45	22.0±1	1.0
				100	0	21.50	22.0±1	1.0

LTE Band 5:

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
1.4MHz	20407	824.7	QPSK	1	0	24.34	24.0±1	/
				1	2	24.49	24.0±1	/
				1	5	24.38	24.0±1	/
				3	0	24.44	24.0±1	/
				3	2	24.44	24.0±1	/
				6	0	23.39	23.0±1	1.0
			16QAM	1	0	23.29	23.0±1	1.0
				1	2	23.47	23.0±1	1.0
				1	5	23.30	23.0±1	1.0
				3	0	23.40	23.0±1	1.0
				3	2	23.39	23.0±1	1.0
				6	0	22.39	23.0±1	1.0
	20525	836.5	QPSK	1	0	24.31	24.0±1	/
				1	2	24.48	24.0±1	/
				1	5	24.28	24.0±1	/
				3	0	24.34	24.0±1	/
				3	2	24.35	24.0±1	/
				6	0	23.36	23.0±1	1.0
			16QAM	1	0	23.52	23.0±1	1.0
				1	2	23.71	23.0±1	1.0
				1	5	23.50	23.0±1	1.0
				3	0	23.40	23.0±1	1.0
				3	2	23.59	23.0±1	1.0
				6	0	22.87	23.0±1	1.0
	20634	848.3	QPSK	1	0	24.27	24.0±1	/
				1	2	24.45	24.0±1	/
				1	5	24.30	24.0±1	/
				3	0	24.31	24.0±1	/
				3	2	24.25	24.0±1	/
				6	0	23.36	23.0±1	1.0
			16QAM	1	0	23.09	23.0±1	1.0
				1	2	23.29	23.0±1	1.0
				1	5	23.13	23.0±1	1.0
				3	0	23.23	23.0±1	1.0
				3	2	23.21	23.0±1	1.0
				6	0	22.30	23.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
3MHz	20415	825.5	QPSK	1	0	24.36	24.0±1	/
				1	8	24.35	24.0±1	/
				1	14	24.34	24.0±1	/
				8	0	23.41	23.0±1	1.0
				8	9	23.46	23.0±1	1.0
				15	0	23.40	23.0±1	1.0
			16QAM	1	0	23.69	23.0±1	1.0
				1	8	23.68	23.0±1	1.0
				1	14	23.66	23.0±1	1.0
				8	0	22.44	23.0±1	1.0
				8	9	22.46	23.0±1	1.0
				15	0	22.39	23.0±1	1.0
	20525	836.5	QPSK	1	0	24.35	24.0±1	/
				1	8	24.36	24.0±1	/
				1	14	24.36	24.0±1	/
				8	0	23.42	23.0±1	1.0
				8	9	23.44	23.0±1	1.0
				15	0	23.40	23.0±1	1.0
			16QAM	1	0	23.58	23.0±1	1.0
				1	8	23.58	23.0±1	1.0
				1	14	23.57	23.0±1	1.0
				8	0	22.39	23.0±1	1.0
				8	9	22.41	23.0±1	1.0
				15	0	22.28	23.0±1	1.0
	20635	847.5	QPSK	1	0	24.36	24.0±1	/
				1	8	24.38	24.0±1	/
				1	14	24.40	24.0±1	/
				8	0	23.35	23.0±1	1.0
				8	9	23.39	23.0±1	1.0
				15	0	23.35	23.0±1	1.0
			16QAM	1	0	23.22	23.0±1	1.0
				1	8	23.18	23.0±1	1.0
				1	14	23.19	23.0±1	1.0
				8	0	22.33	23.0±1	1.0
				8	9	22.35	23.0±1	1.0
				15	0	22.34	23.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
5MHz	20425	826.5	QPSK	1	0	24.26	24.0±1	/
				1	49	24.37	24.0±1	/
				1	99	24.28	24.0±1	/
				12	0	23.35	23.0±1	1.0
				12	24	23.53	23.0±1	1.0
				25	0	23.50	23.0±1	1.0
			16QAM	1	0	23.57	23.0±1	1.0
				1	49	23.69	23.0±1	1.0
				1	99	23.56	23.0±1	1.0
				12	0	22.29	23.0±1	1.0
				12	24	22.48	23.0±1	1.0
				25	0	22.53	23.0±1	1.0
	20525	836.5	QPSK	1	0	24.26	24.0±1	/
				1	49	24.37	24.0±1	/
				1	99	24.24	24.0±1	/
				12	0	23.48	23.0±1	1.0
				12	24	23.35	23.0±1	1.0
				25	0	23.43	23.0±1	1.0
			16QAM	1	0	23.50	23.0±1	1.0
				1	49	23.60	23.0±1	1.0
				1	99	23.47	23.0±1	1.0
				12	0	22.39	23.0±1	1.0
				12	49	22.30	23.0±1	1.0
				25	0	22.39	23.0±1	1.0
	20625	846.5	QPSK	1	0	24.14	24.0±1	/
				1	49	24.27	24.0±1	/
				1	99	24.15	24.0±1	/
				12	0	23.28	23.0±1	1.0
				12	49	23.46	23.0±1	1.0
				25	0	23.38	23.0±1	1.0
			16QAM	1	0	23.49	23.0±1	1.0
				1	49	23.52	23.0±1	1.0
				1	99	23.41	23.0±1	1.0
				12	0	22.28	23.0±1	1.0
				12	49	22.40	23.0±1	1.0
				25	0	22.39	23.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
10MHz	20450	829	QPSK	1	0	24.31	24.0±1	/
				1	49	24.49	24.0±1	/
				1	99	24.32	24.0±1	/
				25	0	23.30	23.0±1	1.0
				25	49	23.52	23.0±1	1.0
				50	0	23.41	23.0±1	1.0
			16QAM	1	0	23.64	23.0±1	1.0
				1	49	23.70	23.0±1	1.0
				1	99	23.65	23.0±1	1.0
				25	0	22.36	23.0±1	1.0
				25	49	22.59	23.0±1	1.0
				50	0	22.42	23.0±1	1.0
	20525	836.5	QPSK	1	0	24.37	24.0±1	/
				1	49	24.49	24.0±1	/
				1	99	24.34	24.0±1	/
				25	0	23.50	23.0±1	1.0
				25	49	23.37	23.0±1	1.0
				50	0	23.42	23.0±1	1.0
			16QAM	1	0	23.58	23.0±1	1.0
				1	49	23.69	23.0±1	1.0
				1	99	23.56	23.0±1	1.0
				25	0	22.50	23.0±1	1.0
				25	49	22.37	23.0±1	1.0
				50	0	22.38	23.0±1	1.0
	20600	844	QPSK	1	0	24.40	24.0±1	/
				1	49	24.50	24.0±1	/
				1	99	24.38	24.0±1	/
				25	0	23.44	23.0±1	1.0
				25	49	23.54	23.0±1	1.0
				50	0	23.50	23.0±1	1.0
			16QAM	1	0	23.30	23.0±1	1.0
				1	49	23.37	23.0±1	1.0
				1	99	23.16	23.0±1	1.0
				25	0	22.50	23.0±1	1.0
				25	49	22.53	23.0±1	1.0
				50	0	22.51	23.0±1	1.0

LTE Band 7:

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
5MHz	20775	2502.5	QPSK	1	0	20.75	20.0±1	/
				1	49	20.13	20.0±1	/
				1	99	20.51	20.0±1	/
				12	0	20.31	20.0±1	/
				12	24	19.80	19.0±1	1.0
				25	0	19.84	19.0±1	1.0
			16QAM	1	0	19.59	19.0±1	1.0
				1	49	19.67	19.0±1	1.0
				1	99	19.75	19.0±1	1.0
				12	0	19.65	19.0±1	1.0
				12	49	19.49	19.0±1	1.0
				25	0	19.58	19.0±1	1.0
	21100	2535	QPSK	1	0	22.13	22.0±1	/
				1	49	21.90	22.0±1	/
				1	99	21.74	22.0±1	/
				12	0	21.58	21.0±1	1.0
				12	49	21.42	21.0±1	1.0
				25	0	21.37	21.0±1	1.0
			16QAM	1	0	21.25	21.0±1	1.0
				1	49	21.24	21.0±1	1.0
				1	99	21.16	21.0±1	1.0
				12	0	20.12	21.0±1	1.0
				12	49	20.16	21.0±1	1.0
				25	0	20.18	21.0±1	1.0
	21425	2567.5	QPSK	1	0	19.78	20.0±1	/
				1	49	18.97	20.0±1	/
				1	99	19.52	20.0±1	/
				12	0	19.48	20.0±1	/
				12	49	18.70	19.0±1	1.0
				25	0	19.05	19.0±1	1.0
			16QAM	1	0	19.65	19.0±1	1.0
				1	49	18.84	19.0±1	1.0
				1	99	19.25	19.0±1	1.0
				12	0	19.28	19.0±1	1.0
				12	49	18.52	19.0±1	1.0
				25	0	18.87	19.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
10MHz	20800	2505	QPSK	1	0	19.82	19.0±1	/
				1	49	19.33	19.0±1	/
				1	99	19.57	19.0±1	/
				25	0	19.65	19.0±1	/
				25	24	19.36	19.0±1	/
				50	0	19.05	19.0±1	/
			16QAM	1	0	19.41	19.0±1	/
				1	49	19.12	19.0±1	/
				1	99	19.35	19.0±1	/
				25	0	19.25	19.0±1	/
				25	24	19.18	19.0±1	/
				50	0	19.07	19.0±1	/
	21100	2535	QPSK	1	0	21.97	21.0±1	/
				1	49	21.58	21.0±1	/
				1	99	21.74	21.0±1	/
				25	0	21.13	21.0±1	/
				25	24	21.13	21.0±1	/
				50	0	21.06	21.0±1	/
			16QAM	1	0	21.04	21.0±1	/
				1	49	21.30	21.0±1	/
				1	99	21.28	21.0±1	/
				25	0	20.10	20.0±1	1.0
				25	24	20.01	20.0±1	1.0
				50	0	20.00	20.0±1	1.0
	21400	2565	QPSK	1	0	21.70	21.0±1	/
				1	49	19.72	20.0±1	1.0
				1	99	20.87	20.0±1	1.0
				25	0	20.73	20.0±1	1.0
				25	24	19.04	20.0±1	1.0
				50	0	20.00	20.0±1	1.0
			16QAM	1	0	21.00	20.0±1	/
				1	49	19.40	19.0±1	1.0
				1	99	20.99	20.0±1	/
				25	0	20.34	20.0±1	/
				25	24	18.92	19.0±1	1.0
				50	0	19.86	19.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
15MHz	20825	2507.5	QPSK	1	0	20.97	20.0±1	1.0
				1	49	19.14	20.0±1	1.0
				1	99	20.25	20.0±1	1.0
				36	0	21.38	21.0±1	/
				36	24	21.07	21.0±1	/
				75	0	19.38	20.0±1	1.0
			16QAM	1	0	20.74	21.0±1	/
				1	49	19.97	20.0±1	1.0
				1	99	20.08	20.0±1	1.0
				36	0	21.52	21.0±1	/
				36	24	20.96	20.0±1	1.0
				75	0	19.19	20.0±1	1.0
	21100	2535	QPSK	1	0	21.82	21.0±1	/
				1	49	21.46	21.0±1	/
				1	99	21.27	21.0±1	/
				36	0	21.23	21.0±1	/
				36	24	21.58	21.0±1	/
				75	0	21.31	21.0±1	/
			16QAM	1	0	20.92	20.0±1	1.0
				1	49	21.17	21.0±1	/
				1	99	21.42	21.0±1	/
				36	0	20.07	20.0±1	1.0
				36	24	20.16	20.0±1	1.0
				75	0	20.12	20.0±1	1.0
	21375	2562.5	QPSK	1	0	22.42	22.0±1	/
				1	49	20.76	21.0±1	1.0
				1	99	21.82	22.0±1	/
				36	0	21.57	22.0±1	/
				36	24	21.34	22.0±1	/
				75	0	20.92	21.0±1	1.0
			16QAM	1	0	21.05	21.0±1	/
				1	49	20.49	20.0±1	1.0
				1	99	20.93	20.0±1	1.0
				36	0	20.31	20.0±1	1.0
				36	24	20.93	20.0±1	1.0
				75	0	20.27	20.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
20MHz	20850	2510	QPSK	1	0	21.42	21.0±1	/
				1	49	19.25	20.0±1	1.0
				1	99	20.85	20.0±1	1.0
				50	0	21.46	21.0±1	/
				50	24	21.04	21.0±1	/
				100	0	19.67	20.0±1	1.0
			16QAM	1	0	21.19	21.0±1	/
				1	49	19.11	20.0±1	1.0
				1	99	20.87	20.0±1	1.0
				50	0	19.13	20.0±1	1.0
				50	24	19.32	20.0±1	1.0
				100	0	19.21	20.0±1	1.0
	21100	2535	QPSK	1	0	21.73	21.0±1	/
				1	49	21.67	21.0±1	/
				1	99	21.41	21.0±1	/
				50	0	21.07	21.0±1	/
				50	49	20.95	20.0±1	1.0
				100	0	20.98	20.0±1	1.0
			16QAM	1	0	20.42	20.0±1	1.0
				1	49	21.07	21.0±1	/
				1	99	20.93	20.0±1	1.0
				50	0	20.01	20.0±1	1.0
				50	24	19.82	20.0±1	1.0
				100	0	19.93	20.0±1	1.0
	21350	2560	QPSK	1	0	21.95	21.0±1	/
				1	49	21.79	21.0±1	/
				1	99	21.50	21.0±1	/
				50	0	20.98	20.0±1	1.0
				50	49	20.29	20.0±1	1.0
				100	0	21.03	21.0±1	/
			16QAM	1	0	21.33	21.0±1	/
				1	49	20.94	20.0±1	1.0
				1	99	20.71	20.0±1	1.0
				50	0	19.71	20.0±1	1.0
				50	24	19.69	20.0±1	1.0
				100	0	19.88	20.0±1	1.0

LTE Band 12:

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
1.4MHz	23017	699.7	QPSK	1	0	23.68	23.0±1	/
				1	2	23.94	23.0±1	/
				1	5	23.65	23.0±1	/
				3	0	23.76	23.0±1	/
				3	2	23.79	23.0±1	/
				6	0	22.78	22.0±1	1.0
			16QAM	1	0	22.83	23.0±1	/
				1	2	23.07	23.0±1	/
				1	5	22.88	23.0±1	/
				3	0	22.73	23.0±1	/
				3	2	22.78	23.0±1	/
				6	0	21.77	22.0±1	1.0
	23095	707.5	QPSK	1	0	23.82	24.0±1	/
				1	2	24.08	24.0±1	/
				1	5	23.84	24.0±1	/
				3	0	23.84	24.0±1	/
				3	2	23.83	24.0±1	/
				6	0	22.85	23.0±1	1.0
			16QAM	1	0	22.65	22.0±1	/
				1	2	22.81	22.0±1	/
				1	5	22.66	22.0±1	/
				3	0	22.73	22.0±1	/
				3	2	22.73	22.0±1	/
				6	0	21.82	21.0±1	1.0
	23173	715.3	QPSK	1	0	24.01	24.0±1	/
				1	2	24.05	24.0±1	/
				1	5	24.08	24.0±1	/
				3	0	23.96	23.0±1	1.0
				3	2	23.93	23.0±1	1.0
				6	0	23.03	23.0±1	1.0
			16QAM	1	0	22.87	23.0±1	/
				1	2	23.03	23.0±1	/
				1	5	22.84	23.0±1	/
				3	0	23.00	23.0±1	/
				3	2	22.99	23.0±1	/
				6	0	22.00	23.0±1	/

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
3MHz	23025	700.5	QPSK	1	0	23.76	23.0±1	/
				1	8	23.80	23.0±1	/
				1	14	23.80	23.0±1	/
				8	0	22.82	22.0±1	1.0
				8	9	22.81	22.0±1	1.0
				15	0	22.78	22.0±1	1.0
			16QAM	1	0	22.97	23.0±1	/
				1	8	23.06	23.0±1	/
				1	14	23.07	23.0±1	/
				8	4	21.89	22.0±1	1.0
				8	9	21.88	22.0±1	1.0
				15	0	21.82	22.0±1	1.0
	23095	707.5	QPSK	1	0	23.84	23.0±1	/
				1	8	23.84	23.0±1	/
				1	14	23.82	23.0±1	/
				8	4	22.87	22.0±1	1.0
				8	9	22.87	22.0±1	1.0
				15	0	22.78	22.0±1	1.0
			16QAM	1	0	22.99	22.0±1	1.0
				1	8	22.98	22.0±1	1.0
				1	14	22.94	22.0±1	1.0
				8	4	21.86	22.0±1	1.0
				8	9	21.88	22.0±1	1.0
				15	0	21.72	22.0±1	1.0
	23165	714.5	QPSK	1	0	23.97	24.0±1	/
				1	8	24.08	24.0±1	/
				1	14	24.11	24.0±1	/
				8	0	23.01	24.0±1	/
				8	9	23.05	24.0±1	/
				15	0	23.00	24.0±1	/
			16QAM	1	0	22.79	23.0±1	1.0
				1	8	22.85	23.0±1	1.0
				1	14	22.81	23.0±1	1.0
				8	4	22.06	23.0±1	1.0
				8	9	22.07	23.0±1	1.0
				15	0	22.03	23.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
5MHz	23035	701.5	QPSK	1	0	23.66	23.0±1	/
				1	49	23.85	23.0±1	/
				1	99	23.71	23.0±1	/
				12	0	22.89	22.0±1	1.0
				12	49	22.84	22.0±1	1.0
				25	0	22.86	22.0±1	1.0
			16QAM	1	0	22.89	22.0±1	1.0
				1	49	23.10	22.0±1	1.0
				1	99	22.97	22.0±1	1.0
				12	0	21.90	22.0±1	1.0
				12	49	21.84	22.0±1	1.0
				25	0	21.93	22.0±1	1.0
	23095	707.5	QPSK	1	0	23.72	23.0±1	/
				1	49	23.90	23.0±1	/
				1	99	23.74	23.0±1	/
				12	0	22.76	22.0±1	1.0
				12	49	22.82	22.0±1	1.0
				25	0	22.79	22.0±1	1.0
			16QAM	1	0	22.83	22.0±1	/
				1	49	22.99	22.0±1	/
				1	99	22.91	22.0±1	/
				12	0	21.69	21.0±1	1.0
				12	49	21.80	21.0±1	1.0
				25	0	21.77	21.0±1	1.0
	23155	713.5	QPSK	1	0	23.78	23.0±1	/
				1	49	23.96	23.0±1	/
				1	99	23.86	23.0±1	/
				12	0	23.09	23.0±1	/
				12	49	23.05	23.0±1	/
				25	0	23.09	23.0±1	/
			16QAM	1	0	23.04	23.0±1	/
				1	49	23.20	23.0±1	/
				1	99	23.03	23.0±1	/
				12	0	22.18	22.0±1	1.0
				12	49	22.08	22.0±1	1.0
				25	0	22.14	22.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
10MHz	23060	704	QPSK	1	0	23.73	23.0±1	/
				1	49	23.89	23.0±1	/
				1	99	23.83	23.0±1	/
				25	0	22.91	22.0±1	1.0
				25	24	23.13	23.0±1	/
				50	0	23.02	23.0±1	/
			16QAM	1	0	22.96	23.0±1	/
				1	49	23.14	23.0±1	/
				1	99	23.02	23.0±1	/
				25	0	22.02	22.0±1	1.0
				25	49	22.22	22.0±1	1.0
				50	0	23.02	23.0±1	/
	23095	707.5	QPSK	1	0	23.79	23.0±1	/
				1	49	23.90	23.0±1	/
				1	99	23.92	23.0±1	/
				25	0	22.70	22.0±1	1.0
				25	49	22.74	22.0±1	1.0
				50	0	22.71	22.0±1	1.0
			16QAM	1	0	22.94	23.0±1	/
				1	49	23.04	23.0±1	/
				1	99	23.05	23.0±1	/
				25	0	21.76	22.0±1	1.0
				25	49	21.79	22.0±1	1.0
				50	0	23.02	23.0±1	/
	23130	711	QPSK	1	0	23.94	24.0±1	/
				1	49	24.09	24.0±1	/
				1	99	24.12	24.0±1	/
				25	0	22.96	23.0±1	1.0
				25	49	22.90	23.0±1	1.0
				50	0	22.95	23.0±1	1.0
			16QAM	1	0	22.68	23.0±1	/
				1	49	22.88	23.0±1	/
				1	99	22.82	23.0±1	/
				25	0	21.96	22.0±1	1.0
				25	49	21.94	22.0±1	1.0
				50	0	23.02	23.0±1	/

LTE Band 17:

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
5MHz	23755	706.5	QPSK	1	0	24.08	24.0±1	/
				1	49	24.27	24.0±1	/
				1	99	24.12	24.0±1	/
				12	0	23.10	23.0±1	/
				12	49	23.24	23.0±1	/
				25	0	23.19	23.0±1	/
			16QAM	1	0	23.19	23.0±1	/
				1	49	23.32	23.0±1	/
				1	99	23.21	23.0±1	/
				12	0	22.00	23.0±1	/
				12	49	22.12	23.0±1	/
				25	0	22.06	23.0±1	/
	23790	710	QPSK	1	0	24.04	24.0±1	/
				1	49	24.22	24.0±1	/
				1	99	24.12	24.0±1	/
				12	0	23.20	23.0±1	1.0
				12	49	23.14	23.0±1	1.0
				25	0	23.15	23.0±1	1.0
			16QAM	1	0	23.25	23.0±1	1.0
				1	49	23.45	23.0±1	1.0
				1	99	23.38	23.0±1	1.0
				12	0	22.17	23.0±1	1.0
				12	49	22.14	23.0±1	1.0
				25	0	22.13	23.0±1	1.0
	23825	713.5	QPSK	1	0	24.14	24.0±1	/
				1	49	24.36	24.0±1	/
				1	99	24.26	24.0±1	/
				12	0	23.42	23.0±1	1.0
				12	49	23.42	23.0±1	1.0
				25	0	23.39	23.0±1	1.0
			16QAM	1	0	23.38	23.0±1	1.0
				1	49	23.59	23.0±1	1.0
				1	99	23.41	23.0±1	1.0
				12	0	22.34	23.0±1	1.0
				12	49	22.33	23.0±1	1.0
				25	0	22.40	23.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
10MHz	23780	709	QPSK	1	0	24.13	24.0±1	/
				1	49	24.34	24.0±1	/
				1	99	24.24	24.0±1	/
				25	0	23.05	23.0±1	1.0
				25	49	23.08	23.0±1	1.0
				50	0	23.07	23.0±1	1.0
			16QAM	1	0	23.37	23.0±1	1.0
				1	49	23.47	23.0±1	1.0
				1	99	23.51	23.0±1	1.0
				25	0	22.06	23.0±1	1.0
				25	49	22.14	23.0±1	1.0
				50	0	22.06	23.0±1	1.0
	23790	710	QPSK	1	0	24.17	24.0±1	/
				1	49	24.31	24.0±1	/
				1	99	24.33	24.0±1	/
				25	0	23.13	23.0±1	1.0
				25	49	23.14	23.0±1	1.0
				50	0	23.17	23.0±1	1.0
			16QAM	1	0	23.28	23.0±1	1.0
				1	49	23.44	23.0±1	1.0
				1	99	23.44	23.0±1	1.0
				25	0	22.10	23.0±1	1.0
				25	49	22.11	23.0±1	1.0
				50	0	22.07	23.0±1	1.0
	23800	711	QPSK	1	0	24.24	24.0±1	/
				1	49	24.41	24.0±1	/
				1	99	24.47	24.0±1	/
				25	0	23.24	23.0±1	1.0
				25	49	23.21	23.0±1	1.0
				50	0	23.26	23.0±1	1.0
			16QAM	1	0	23.01	23.0±1	1.0
				1	49	23.25	23.0±1	1.0
				1	99	23.15	23.0±1	1.0
				25	0	22.24	23.0±1	1.0
				25	49	22.18	23.0±1	1.0
				50	0	22.26	23.0±1	1.0

LTE Band 38:

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
5MHz	37775	2572.5	QPSK	1	0	22.52	22.0±1	/
				1	49	22.31	22.0±1	/
				1	99	22.18	22.0±1	/
				12	0	22.16	22.0±1	/
				12	49	22.15	22.0±1	/
				25	0	22.08	22.0±1	/
			16QAM	1	0	22.27	22.0±1	/
				1	49	22.06	22.0±1	/
				1	99	21.94	22.0±1	/
				12	0	20.88	21.0±1	1.0
				12	49	20.77	21.0±1	1.0
				25	0	20.72	21.0±1	1.0
	38000	2595	QPSK	1	0	23.41	23.0±1	/
				1	49	23.59	23.0±1	/
				1	99	23.66	23.0±1	/
				12	0	22.69	22.0±1	1.0
				12	49	22.74	22.0±1	1.0
				25	0	22.71	22.0±1	1.0
			16QAM	1	0	23.09	23.0±1	/
				1	49	22.97	23.0±1	/
				1	99	22.84	23.0±1	/
				12	0	21.46	22.0±1	1.0
				12	49	21.58	22.0±1	1.0
				25	0	21.51	22.0±1	1.0
	38225	2617.5	QPSK	1	0	24.13	24.0±1	/
				1	49	24.38	24.0±1	/
				1	99	24.32	24.0±1	/
				12	0	23.04	23.0±1	1.0
				12	49	23.12	23.0±1	1.0
				25	0	23.07	23.0±1	1.0
			16QAM	1	0	23.21	23.0±1	/
				1	49	23.39	23.0±1	/
				1	99	23.33	23.0±1	/
				12	0	21.94	22.0±1	1.0
				12	49	21.97	22.0±1	1.0
				25	0	22.02	22.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
10MHz	37800	2575	QPSK	1	0	22.08	22.0±1	/
				1	49	22.20	22.0±1	/
				1	99	22.13	22.0±1	/
				25	0	22.32	22.0±1	/
				25	49	22.32	22.0±1	/
				50	0	22.24	22.0±1	/
			16QAM	1	0	21.73	21.0±1	1.0
				1	49	21.99	21.0±1	1.0
				1	99	22.05	22.0±1	/
				25	0	21.00	21.0±1	1.0
				25	49	21.11	21.0±1	1.0
				50	0	20.84	21.0±1	1.0
	38000	2595	QPSK	1	0	23.44	23.0±1	/
				1	49	23.61	23.0±1	/
				1	99	23.56	23.0±1	/
				25	0	22.76	21.0±1	1.0
				25	49	22.82	21.0±1	1.0
				50	0	22.66	21.0±1	1.0
			16QAM	1	0	23.29	23.0±1	/
				1	49	23.06	23.0±1	/
				1	99	22.74	22.0±1	1.0
				25	0	21.52	22.0±1	1.0
				25	49	21.64	22.0±1	1.0
				50	0	21.49	22.0±1	1.0
	38200	2615	QPSK	1	0	23.96	24.0±1	/
				1	49	24.44	24.0±1	/
				1	99	24.36	24.0±1	/
				25	0	22.98	23.0±1	1.0
				25	49	23.16	23.0±1	1.0
				50	0	23.04	23.0±1	1.0
			16QAM	1	0	23.14	23.0±1	1.0
				1	49	23.37	23.0±1	1.0
				1	99	23.25	23.0±1	1.0
				25	0	22.90	23.0±1	1.0
				25	49	22.12	23.0±1	1.0
				50	0	22.03	23.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
15MHz	37825	2577.5	QPSK	1	0	22.49	22.0±1	1.0
				1	49	22.25	22.0±1	1.0
				1	99	22.12	22.0±1	1.0
				36	0	23.09	23.0±1	/
				36	49	23.46	23.0±1	/
				75	0	22.30	22.0±1	1.0
			16QAM	1	0	21.98	21.0±1	1.0
				1	49	22.04	22.0±1	/
				1	99	22.27	21.0±1	1.0
				36	0	21.21	21.0±1	1.0
				36	49	21.28	21.0±1	1.0
				75	0	21.32	21.0±1	1.0
	38000	2595	QPSK	1	0	23.43	23.0±1	/
				1	49	23.63	23.0±1	/
				1	99	23.85	23.0±1	/
				36	0	23.51	23.0±1	/
				36	49	23.10	23.0±1	/
				75	0	23.05	23.0±1	/
			16QAM	1	0	22.71	22.0±1	/
				1	49	22.83	22.0±1	/
				1	99	22.64	22.0±1	/
				36	0	21.74	21.0±1	1.0
				36	49	21.86	21.0±1	1.0
				75	0	21.76	21.0±1	1.0
	38175	2612.5	QPSK	1	0	24.09	24.0±1	/
				1	49	24.12	24.0±1	/
				1	99	24.16	24.0±1	/
				36	0	22.98	23.0±1	1.0
				36	49	23.34	23.0±1	1.0
				75	0	23.13	23.0±1	1.0
			16QAM	1	0	22.68	23.0±1	/
				1	49	22.97	23.0±1	/
				1	99	23.08	23.0±1	/
				36	0	21.82	22.0±1	1.0
				36	49	22.16	22.0±1	1.0
				75	0	22.03	22.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
20MHz	37850	2580	QPSK	1	0	22.56	22.0±1	1.0
				1	49	22.45	22.0±1	1.0
				1	99	22.30	22.0±1	1.0
				50	0	23.19	23.0±1	/
				50	49	23.31	23.0±1	/
				100	0	22.41	23.0±1	/
			16QAM	1	0	21.80	22.0±1	/
				1	49	22.16	22.0±1	/
				1	99	22.38	22.0±1	/
				50	0	21.01	21.0±1	1.0
				50	49	21.27	21.0±1	1.0
				100	0	21.11	21.0±1	1.0
	38000	2595	QPSK	1	0	23.77	23.0±1	/
				1	49	23.69	23.0±1	/
				1	99	23.80	23.0±1	/
				50	0	22.56	22.0±1	1.0
				50	49	22.84	22.0±1	1.0
				100	0	22.71	22.0±1	1.0
			16QAM	1	0	22.54	22.0±1	/
				1	49	22.89	22.0±1	/
				1	99	22.43	22.0±1	/
				50	0	21.30	21.0±1	1.0
				50	49	21.69	21.0±1	1.0
				100	0	21.57	21.0±1	1.0
	38150	2610	QPSK	1	0	23.77	24.0±1	/
				1	49	24.18	24.0±1	/
				1	99	24.15	24.0±1	/
				50	0	22.60	23.0±1	1.0
				50	49	23.04	23.0±1	1.0
				100	0	22.84	23.0±1	1.0
			16QAM	1	0	22.14	22.0±1	/
				1	49	22.63	22.0±1	/
				1	99	22.59	22.0±1	/
				50	0	21.58	22.0±1	/
				50	49	22.04	22.0±1	/
				100	0	21.81	22.0±1	/

LTE Band 40a:

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
5MHz	38725	2307.5	QPSK	1	0	23.51	23.0±1	/
				1	49	23.86	23.0±1	/
				1	99	23.77	23.0±1	/
				12	0	22.75	22.0±1	1.0
				12	49	22.71	22.0±1	1.0
				25	0	22.69	22.0±1	1.0
			16QAM	1	0	22.53	22.0±1	1.0
				1	49	22.87	22.0±1	1.0
				1	99	22.79	22.0±1	1.0
				12	0	21.43	22.0±1	1.0
				12	49	21.41	22.0±1	1.0
				25	0	21.40	22.0±1	1.0
	38750	2310	QPSK	1	0	23.81	23.0±1	/
				1	49	23.92	23.0±1	/
				1	99	23.74	23.0±1	/
				12	0	22.72	22.0±1	1.0
				12	49	22.73	22.0±1	1.0
				25	0	22.71	22.0±1	1.0
			16QAM	1	0	22.65	22.0±1	1.0
				1	49	22.77	22.0±1	1.0
				1	99	22.71	22.0±1	1.0
				12	0	21.38	22.0±1	1.0
				12	49	21.22	22.0±1	1.0
				25	0	21.53	22.0±1	1.0
	38775	2312.5	QPSK	1	0	23.64	23.0±1	/
				1	49	23.93	23.0±1	/
				1	99	23.76	23.0±1	/
				12	0	22.72	22.0±1	1.0
				12	49	22.78	22.0±1	1.0
				25	0	22.74	22.0±1	1.0
			16QAM	1	0	22.65	22.0±1	1.0
				1	49	22.81	22.0±1	1.0
				1	99	22.74	22.0±1	1.0
				12	0	21.41	22.0±1	1.0
				12	49	21.40	22.0±1	1.0
				25	0	21.39	22.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
10MHz	38750	2310	QPSK	1	0	23.93	24.0±1	/
				1	49	24.07	24.0±1	/
				1	99	23.82	24.0±1	/
				25	0	22.74	23.0±1	1.0
				25	49	22.80	23.0±1	1.0
				50	0	22.63	23.0±1	1.0
			16QAM	1	0	22.79	22.0±1	/
				1	49	22.97	22.0±1	/
				1	99	22.84	22.0±1	/
				25	0	21.48	21.0±1	1.0
				25	49	21.53	21.0±1	1.0
				50	0	21.08	21.0±1	1.0

LTE Band 40b:

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
5MHz	39175	2352.5	QPSK	1	0	23.96	24.0±1	/
				1	49	24.04	24.0±1	/
				1	99	23.95	24.0±1	/
				12	0	22.82	22.0±1	1.0
				12	49	22.80	22.0±1	1.0
				25	0	22.76	22.0±1	1.0
			16QAM	1	0	22.78	22.0±1	1.0
				1	49	22.83	22.0±1	1.0
				1	99	22.76	22.0±1	1.0
				12	0	21.54	22.0±1	1.0
				12	49	21.59	22.0±1	1.0
				25	0	21.53	22.0±1	1.0
	39200	2355	QPSK	1	0	23.82	24.0±1	/
				1	49	23.90	24.0±1	/
				1	99	23.81	24.0±1	/
				12	0	22.75	22.0±1	1.0
				12	49	22.74	22.0±1	1.0
				25	0	22.73	22.0±1	1.0
			16QAM	1	0	22.89	22.0±1	1.0
				1	49	22.94	22.0±1	1.0
				1	99	22.88	22.0±1	1.0
				12	0	21.56	22.0±1	1.0
				12	49	21.57	22.0±1	1.0
				25	0	21.53	22.0±1	1.0
	39225	2357.5	QPSK	1	0	23.92	24.0±1	/
				1	49	24.00	24.0±1	/
				1	99	23.91	24.0±1	/
				12	0	22.79	22.0±1	1.0
				12	49	22.74	22.0±1	1.0
				25	0	22.72	22.0±1	1.0
			16QAM	1	0	22.91	22.0±1	1.0
				1	49	22.98	22.0±1	1.0
				1	99	22.88	22.0±1	1.0
				12	0	21.52	22.0±1	1.0
				12	49	21.48	22.0±1	1.0
				25	0	21.52	22.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
10MHz	39200	2355	QPSK	1	0	24.01	24.0±1	/
				1	49	24.13	24.0±1	/
				1	99	23.93	24.0±1	/
				25	0	22.79	23.0±1	1.0
				25	49	22.79	23.0±1	1.0
				50	0	22.65	23.0±1	1.0
			16QAM	1	0	22.95	23.0±1	1.0
				1	49	23.08	23.0±1	1.0
				1	99	22.87	23.0±1	1.0
				25	0	21.65	22.0±1	1.0
				25	49	21.63	22.0±1	1.0
				50	0	21.51	22.0±1	1.0

LTE Band 41:

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
5MHz	40165	2547.5	QPSK	1	0	21.55	21.0±1	/
				1	49	21.70	21.0±1	/
				1	99	21.63	21.0±1	/
				12	0	21.27	21.0±1	/
				12	24	21.78	21.0±1	/
				25	0	21.63	21.0±1	/
			16QAM	1	0	21.21	21.0±1	/
				1	49	21.45	21.0±1	/
				1	99	21.57	21.0±1	/
				12	0	20.13	20.0±1	1.0
				12	49	20.29	20.0±1	1.0
				25	0	20.17	20.0±1	1.0
	40690	2600.0	QPSK	1	0	23.71	23.0±1	/
				1	49	23.82	23.0±1	/
				1	99	23.65	23.0±1	/
				12	0	22.54	22.0±1	1.0
				12	24	22.60	22.0±1	1.0
				25	0	22.56	22.0±1	1.0
			16QAM	1	0	22.69	22.0±1	1.0
				1	49	22.81	22.0±1	1.0
				1	99	22.71	22.0±1	1.0
				12	0	21.43	22.0±1	1.0
				12	24	21.53	22.0±1	1.0
				25	0	21.49	22.0±1	1.0
	41215	2652.5	QPSK	1	0	24.56	24.0±1	/
				1	49	24.81	24.0±1	/
				1	99	24.63	24.0±1	/
				12	0	23.37	23.0±1	1.0
				12	24	23.43	23.0±1	1.0
				25	0	23.39	23.0±1	1.0
			16QAM	1	0	23.53	23.0±1	1.0
				1	49	23.67	23.0±1	1.0
				1	99	23.57	23.0±1	1.0
				12	0	22.19	23.0±1	1.0
				12	24	22.28	23.0±1	1.0
				25	0	22.29	23.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
10MHz	40190	2550.0	QPSK	1	0	22.41	22.0±1	/
				1	49	22.66	22.0±1	/
				1	99	22.58	22.0±1	/
				25	0	21.37	21.0±1	1.0
				25	24	21.64	21.0±1	1.0
				50	0	21.34	21.0±1	1.0
			16QAM	1	0	21.76	21.0±1	1.0
				1	49	21.93	21.0±1	1.0
				1	99	21.55	21.0±1	1.0
				25	0	20.11	21.0±1	1.0
				25	24	20.53	21.0±1	1.0
				50	0	20.21	21.0±1	1.0
	40690	2600.0	QPSK	1	0	23.89	24.0±1	/
				1	49	24.16	24.0±1	/
				1	99	23.79	24.0±1	/
				25	0	22.59	23.0±1	1.0
				25	24	22.74	23.0±1	1.0
				50	0	22.63	23.0±1	1.0
			16QAM	1	0	22.64	22.0±1	/
				1	49	22.85	22.0±1	/
				1	99	22.60	22.0±1	/
				25	0	21.47	21.0±1	1.0
				25	24	21.68	21.0±1	1.0
				50	0	21.56	21.0±1	1.0
	41190	2650.0	QPSK	1	0	24.21	24.0±1	/
				1	49	24.48	24.0±1	/
				1	99	24.33	24.0±1	/
				25	0	23.37	23.0±1	1.0
				25	24	23.50	23.0±1	1.0
				50	0	23.33	23.0±1	1.0
			16QAM	1	0	23.07	23.0±1	1.0
				1	49	23.57	23.0±1	1.0
				1	99	23.24	23.0±1	1.0
				25	0	22.17	23.0±1	1.0
				25	24	22.36	23.0±1	1.0
				50	0	22.20	23.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
15MHz	40215	2552.5	QPSK	1	0	22.57	22.0±1	/
				1	49	22.84	22.0±1	/
				1	99	22.46	22.0±1	/
				36	0	22.09	21.0±1	1.0
				36	24	21.72	21.0±1	1.0
				75	0	21.68	21.0±1	1.0
			16QAM	1	0	21.72	21.0±1	1.0
				1	49	21.88	21.0±1	1.0
				1	99	21.53	21.0±1	1.0
				36	0	20.31	21.0±1	1.0
				36	24	20.59	21.0±1	1.0
				75	0	20.52	21.0±1	1.0
	40690	2600.0	QPSK	1	0	23.57	23.0±1	/
				1	49	23.93	23.0±1	/
				1	99	23.68	23.0±1	/
				36	0	22.80	22.0±1	1.0
				36	24	22.87	22.0±1	1.0
				75	0	22.79	22.0±1	1.0
			16QAM	1	0	22.18	22.0±1	1.0
				1	49	22.56	22.0±1	1.0
				1	99	22.54	22.0±1	1.0
				36	0	21.56	22.0±1	1.0
				36	24	21.71	22.0±1	1.0
				75	0	21.62	22.0±1	1.0
	41165	2647.5	QPSK	1	0	24.35	24.0±1	/
				1	49	24.16	24.0±1	/
				1	99	24.08	24.0±1	/
				36	0	23.98	23.0±1	1.0
				36	24	23.72	23.0±1	1.0
				75	0	23.65	23.0±1	1.0
			16QAM	1	0	23.44	23.0±1	1.0
				1	49	23.36	23.0±1	1.0
				1	99	23.25	23.0±1	1.0
				36	0	22.29	23.0±1	1.0
				36	24	22.46	23.0±1	1.0
				75	0	22.43	23.0±1	1.0

BW(MHz)	Ch	Freq(MHz)	Mode	UL RB Allocation	UL RB Offset	Average Power (dbm)	Tune up limited(dBm)	MPR (dB)
20MHz	40240	2555.0	QPSK	1	0	22.82	23.0±1	/
				1	49	23.01	23.0±1	/
				1	99	22.48	23.0±1	/
				50	0	21.01	22.0±1	1.0
				50	24	21.43	22.0±1	1.0
				100	0	21.23	22.0±1	1.0
			16QAM	1	0	21.76	22.0±1	/
				1	49	22.04	22.0±1	/
				1	99	21.30	22.0±1	/
				50	0	20.91	21.0±1	1.0
				50	24	20.42	21.0±1	1.0
				100	0	20.19	21.0±1	1.0
	40690	2600.0	QPSK	1	0	23.75	24.0±1	/
				1	49	24.13	24.0±1	/
				1	99	23.62	24.0±1	/
				50	0	22.38	23.0±1	1.0
				50	24	22.74	23.0±1	1.0
				100	0	22.56	23.0±1	1.0
			16QAM	1	0	22.43	22.0±1	/
				1	49	22.59	22.0±1	/
				1	99	22.35	22.0±1	/
				50	0	21.24	22.0±1	/
				50	24	21.66	22.0±1	/
				100	0	21.51	22.0±1	/
	41140	2645.0	QPSK	1	0	23.74	24.0±1	/
				1	49	23.66	24.0±1	/
				1	99	24.48	24.0±1	/
				50	0	23.23	23.0±1	1.0
				50	24	23.45	23.0±1	1.0
				100	0	23.34	23.0±1	1.0
			16QAM	1	0	22.91	23.0±1	1.0
				1	49	22.85	23.0±1	1.0
				1	99	22.85	23.0±1	1.0
				50	0	22.07	23.0±1	1.0
				50	24	22.34	23.0±1	1.0
				100	0	22.19	23.0±1	1.0

WIFI Mode (2.4G)

Mode	Channel number	Frequency (MHz)	Average Output Power(dBm)	Average Tune up limited(dBm)
802.11b	1	2412	20.823	20.0±1
	6	2437	20.882	20.0±1
	11	2462	20.781	20.0±1
802.11g	1	2412	19.567	19.0±1
	6	2437	19.847	19.0±1
	11	2462	19.528	19.0±1
802.11n (HT20)	1	2412	18.967	18.0±1
	6	2437	19.254	19.0±1
	11	2462	18.817	18.0±1
802.11n (HT40)	3	2422	18.059	18.0±1
	6	2437	17.454	17.0±1
	9	2452	17.511	17.0±1

WIFI Mode (5.2G)

Mode	Channel number	Frequency (MHz)	Average Output Power(dBm)	Average Tune up limited(dBm)
802.11a	36	5180	16.288	16.0±1
	40	5200	16.145	16.0±1
	48	5240	16.158	16.0±1
802.11n (HT20)	36	5180	16.33	16.0±1
	40	5200	16.2	16.0±1
	48	5240	16.104	16.0±1
802.11n (HT40)	38	5190	14.223	14.0±1
	46	5230	14.267	14.0±1
802.11ac (VHT20)	36	5180	16.295	16.0±1
	40	5200	16.043	16.0±1
	48	5240	16.109	16.0±1
802.11ac (VHT40)	38	5190	14.057	14.0±1
	46	5230	14.599	14.0±1
802.11ac (VHT80)	42	5210	7.484	7.0±1

NOTE: Duty cycle=100%.

WIFI Mode (5.3G)

Mode	Channel number	Frequency (MHz)	Average Output Power(dBm)	Average Tune up limited(dBm)
802.11a	52	5260	11.506	11.0±1
	56	5280	11.079	11.0±1
	64	5320	9.796	9.0±1
802.11n (HT20)	52	5260	11.595	11.0±1
	56	5280	10.177	10.0±1
	64	5320	9.679	9.0±1
802.11n (HT40)	54	5270	14.211	14.0±1
	62	5310	7.304	7.0±1
802.11ac (VHT20)	52	5260	10.797	10.0±1
	56	5280	10.208	10.0±1
	64	5320	9.728	9.0±1
802.11ac (VHT40)	54	5270	7.712	7.0±1
	62	5310	7.106	7.0±1
802.11ac (VHT80)	58	5290	7.398	7.0±1

NOTE: Duty cycle=100%.

WIFI Mode (5.8G)

Mode	Channel number	Frequency (MHz)	Average Output Power(dBm)	Average Tune up limited(dBm)
802.11a	147	5745	11.677	11.0±1
	157	5785	11.546	11.0±1
	165	5825	14.004	14.0±1
802.11n (HT20)	147	5745	11.899	11.0±1
	157	5785	11.443	11.0±1
	165	5825	13.822	13.0±1
802.11n (HT40)	151	5755	12.163	12.0±1
	159	5795	11.748	11.0±1
802.11ac (VHT20)	147	5745	11.718	11.0±1
	157	5785	11.488	11.0±1
	165	5825	13.98	13.0±1
802.11ac (VHT40)	151	5755	12.198	12.0±1
	159	5795	11.948	11.0±1
802.11ac (VHT80)	155	5775	13.094	13.0±1

NOTE: Duty cycle=100%.

Bluetooth Measurement Result

Mode	Frequency (MHz)	Average Output Power(dBm)	Tune up limited(dBm)
GFSK	2402	7.043	7.0±1
	2441	7.731	7.0±1
	2480	4.661	4.0±1
π/4DQPSK	2402	5.976	5.0±1
	2441	6.059	6.0±1
	2480	4.606	4.0±1
8DPSK	2402	5.896	5.0±1
	2441	6.021	6.0±1
	2480	4.511	4.0±1

BLE 1M Measurement Result

Channel number	Frequency (MHz)	Average Output Power(dBm)	Tune up limited(dBm)
0	2402	-6.104	-6.0±1
19	2440	-5.028	-5.0±1
39	2480	-6.101	-6.0±1

BLE 2M Measurement Result


Channel number	Frequency (MHz)	Average Output Power(dBm)	Tune up limited(dBm)
0	2402	-6.084	-6.0±1
19	2440	-5.06	-5.0±1
39	2480	-6.175	-6.0±1

RFID Measurement Result


Channel number	Frequency (MHz)	Average Output Power(dBm)	Tune up limited(dBm)
1	902.75	29.394	29.0±1
25	914.75	29.466	29.0±1
50	927.25	29.510	29.0±1

13 Exposure Conditions Consideration

EUT antenna location:

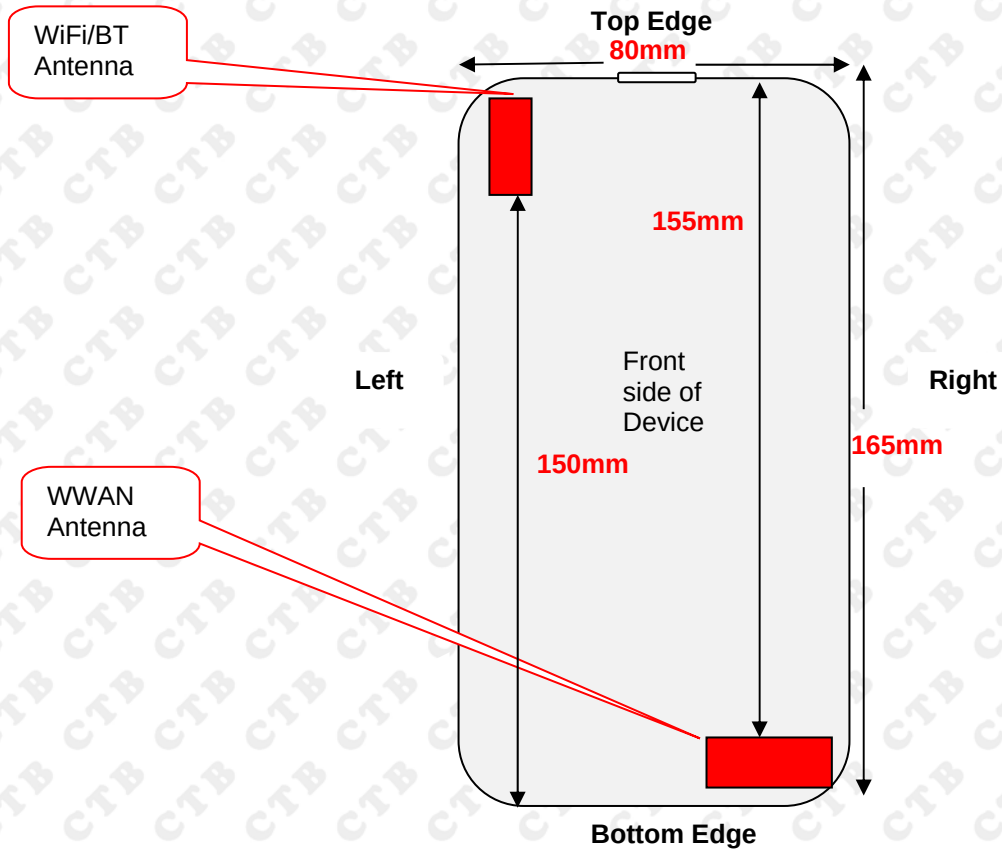



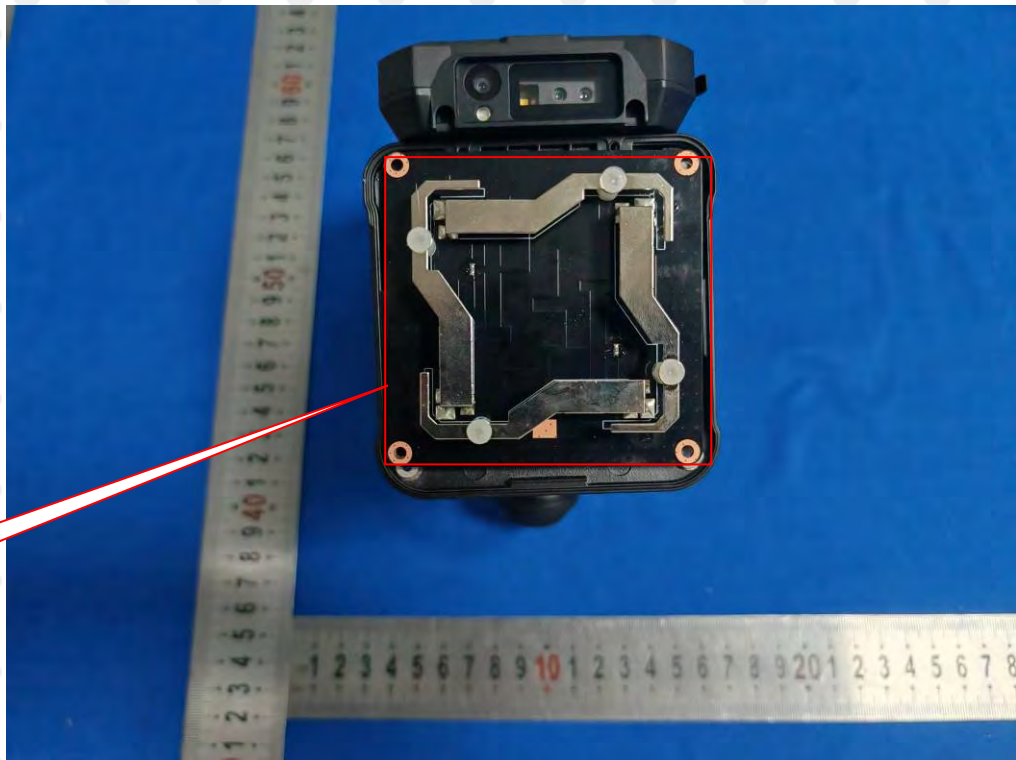

RFID
Antenna

Test position consideration:

Appendix A

SAR Test Exclusion Thresholds for 100 MHz – 6 GHz and ≤ 50 mm

Approximate SAR Test Exclusion Power Thresholds at Selected Frequencies and Test Separation Distances are illustrated in the following Table. The equation and threshold in section 4.3.1 must be applied to determine SAR test exclusion.

MHz	5	10	15	20	25	mm
150	39	77	116	155	194	SAR Test Exclusion Threshold (mW)
300	27	55	82	110	137	
450	22	45	67	89	112	
835	16	33	49	66	82	
900	16	32	47	63	79	
1500	12	24	37	49	61	
1900	11	22	33	44	54	
2450	10	19	29	38	48	
3600	8	16	24	32	40	
5200	7	13	20	26	33	
5400	6	13	19	26	32	
5800	6	12	19	25	31	

MHz	30	35	40	45	50	mm
150	232	271	310	349	387	SAR Test Exclusion Threshold (mW)
300	164	192	219	246	274	
450	134	157	179	201	224	
835	98	115	131	148	164	
900	95	111	126	142	158	
1500	73	86	98	110	122	
1900	65	76	87	98	109	
2450	57	67	77	86	96	
3600	47	55	63	71	79	
5200	39	46	53	59	66	
5400	39	45	52	58	65	
5800	37	44	50	56	62	

Appendix B

SAR Test Exclusion Thresholds for 100 MHz – 6 GHz and > 50 mm

Approximate SAR test exclusion power thresholds at selected frequencies and test separation distances are illustrated in the following table. The equation and threshold in 4.3.1 must be applied to determine SAR test exclusion.

MHz	50	60	70	80	90	100	110	120	130	140	150	160	170	180	190	mm
100	474	481	487	494	501	507	514	521	527	534	541	547	554	561	567	mW
150	387	397	407	417	427	437	447	457	467	477	487	497	507	517	527	
300	274	294	314	334	354	374	394	414	434	454	474	494	514	534	554	
450	224	254	284	314	344	374	404	434	464	494	524	554	584	614	644	
835	164	220	275	331	387	442	498	554	609	665	721	776	832	888	943	
900	158	218	278	338	398	458	518	578	638	698	758	818	878	938	998	
1500	122	222	322	422	522	622	722	822	922	1022	1122	1222	1322	1422	1522	
1900	109	209	309	409	509	609	709	809	909	1009	1109	1209	1309	1409	1509	
2450	96	196	296	396	496	596	696	796	896	996	1096	1196	1296	1396	1496	
3600	79	179	279	379	479	579	679	779	879	979	1079	1179	1279	1379	1479	
5200	66	166	266	366	466	566	666	766	866	966	1066	1166	1266	1366	1466	
5400	65	165	265	365	465	565	665	765	865	965	1065	1165	1265	1365	1465	
5800	62	162	262	362	462	562	662	762	862	962	1062	1162	1262	1362	1462	

Test position consideration:

Distance of EUT antenna-to-edge/surface(mm), Test distance:10mm						
Antennas	Back side	Front side	Left Edge	Right Edge	Top Edge	Bottom Edge
WWAN	140	7	48	18	155	3
2.4G WIFI	140	7	14	60	9	150
5G WIFI	140	7	14	60	9	150
Bluetooth	140	7	14	60	9	150
RFID	43	48	4	4	4	4

Test distance:10mm						
Antennas	Back side	Front side	Left Edge	Right Edge	Top Edge	Bottom Edge
WWAN	NO	YES	YES	YES	NO	YES
2.4G WIFI	NO	YES	YES	YES	YES	NO
5G WIFI	NO	YES	YES	NO	YES	NO
Bluetooth	NO	NO	NO	NO	NO	NO
RFID	YES	YES	YES	YES	YES	YES

Note:

1. Head/Body SAR/Hotspot mode assessments are required.
2. Referring to KDB 941225 D06v02r01, when the overall device length and width are $\geq 9\text{cm} \times 5\text{cm}$, the test distance is 10mm.

3. Per KDB 447498 D01v06, for handsets the test separation distance is determined by the smallest distance between the outer surface of the device and the user, which is 0 mm for head SAR, 10 mm for body SAR.

14 RF Exposure

Standard Requirement:

According to §15.247 (i) and §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:

$$\left[\frac{(\text{max. power of channel, including tune-up tolerance, mW})}{(\text{min. test separation distance, mm})} \right] \cdot [\sqrt{f_{\text{GHz}}}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR,}^{16} \text{ where}$$

- f_{GHz} is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation¹⁷
- The result is rounded to one decimal place for comparison

The test exclusions are applicable only when the minimum *test separation distance* is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum *test separation distance* is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

Routine SAR evaluation refers to that specifically required by § 2.1093, using measurements or computer simulation. When routine SAR evaluation is not required, portable transmitters with output power greater than the applicable low threshold require SAR evaluation to qualify for TCB approval.

Exclusion Thresholds = $P\sqrt{F}/D$

P= Maximum turn-up power in mW

F= Channel frequency in GHz

D= Minimum test separation distance in mm

Test Distance (0mm)

Mode	MAX Power (dBm)	Tune Up Power (dBm)	Max Tune Up Power (dBm)	Max Tune Up Power (mW)	Exclusion Thresholds	Limit
2.4G WIFI 2437	20.882	20.0±1	21	125.89	39.305	3
5.2G WIFI 5180	16.33	16.0±1	17	50.12	22.814	3
5.2G WIFI 5270	14.211	14.0±1	15	31.62	14.518	3
5.8G WIFI 5825	14.004	14.0±1	15	31.62	15.263	3
Bluetooth 2441	7.731	7.0±1	8	6.31	1.972	3
BLE 2440	-5.028	-5.0±1	-4	0.4	0.125	3
RFID 927.25	29.510	29.0±1	30	1000	192.588	3
NFC	5.89	5.0±1	6.0	3.98	0.0927	3

Test Distance (10mm)

Mode	MAX Power (dBm)	Tune Up Power (dBm)	Max Tune Up Power (dBm)	Max Tune Up Power (mW)	Exclusion Thresholds	Limit
2.4G WIFI 2437	20.882	20.0±1	21	125.89	19.653	3
5.2G WIFI 5180	16.33	16.0±1	17	50.12	11.407	3
5.2G WIFI 5270	14.211	14.0±1	15	31.62	7.259	3
5.8G WIFI 5825	14.004	14.0±1	15	31.62	5.088	3
Bluetooth 2441	7.731	7.0±1	8	6.31	0.986	3
BLE 2440	-5.028	-5.0±1	-4	0.4	0.062	3
RFID 927.25	29.510	29.0±1	30	1000	0.0463	3



Result:BT and NFC SAR measurement are not required, 2.4G WIFI and 5G WIFI SAR and RFID SAR test are required.

Note: $NFC=101.09-95.2=5.89\text{dBm}$ ($\text{dBm}=\text{dBuV/m}-95.2$)

15 SAR Test Results

15.1 Test Condition:

1. SAR Measurement
The distance between the EUT and the antenna of the emulator is more than 50 cm and the output power radiated from the emulator antenna is at least 30 dB less than the output power of EUT.
2. Environmental Conditions

Temperature	23°C
Relative Humidity	57%
Atmospheric Pressure	1019mbar
3. Tested By : Martin Feng

15.2 Generally Test Procedures:

1. Establish communication link between EUT and base station emulation by air link.
2. Place the EUT in the selected test position. (Cheek, tilt or flat)
3. Perform SAR testing at middle or highest output power channel under the selected test mode. If the measured 1-g SAR is ≤ 0.8 W/kg, then testing for the other channel will not be performed.
4. When SAR is < 0.8 W/kg, no repeated SAR measurement is required

For WCDMA test:

1. KDB941225 D01-Body SAR is not required for HSDPA when the average output of each RF channel with HSDPA active is less than 0.25dB higher than measured without HSDPA using 12.2kbps RMC or the maximum SAR for 12.2kbps RMC $< 75\%$ of the SAR limit.
2. KDB941225 D01-Body SAR is not required for handset with HSPA capabilities when the maximum average output of each RF channel with HSUPA/HSDPA active is less than 0.25dB higher than that measure without HSUPA/HSDPA using 12.2kbps RMC AND THE maximum SAR for 12.2kbps RMC is $< 75\%$ of the SAR limit

For LTE test:

1. According to FCC KDB 941225 D05v02r05:
 - a. Per Section 5.2.1, SAR is required for QPSK 1 RB Allocation for the largest bandwidth
 - i. The required channel and offset combination with the highest maximum output power is required for SAR.
 - ii. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required. Otherwise, SAR is required for the remaining required test channels using the RB offset configuration with highest output power for that channel.
 - iii. When the reported SAR for a required test channel is > 1.45 W/kg, SAR is required for all RB offset configurations for that channel.
 - b. Per Section 5.2.2, SAR is required for 50% RB allocation using the largest bandwidth following the same procedures outlined in Section 5.2.1.
 - c. Per Section 5.2.3, QPSK SAR is not required for the 100% allocation when the highest maximum output power for the 100% allocation is less than the highest maximum output power of the 1 RB and 50% RB allocations and the reported SAR for the 1 RB and 50% RB allocations is < 0.8 W/kg.
 - d. Per Section 5.2.4 and 5.3, SAR tests for higher order modulations and lower bandwidths configurations are not required when the conducted power of the required test configurations determined by Sections 5.2.1 through 5.2.3 is less than or equal to $\frac{1}{2}$ dB higher than the equivalent configuration using QPSK modulation and when the QPSK SAR for those configurations is < 1.45 W/kg.
 - e. A-MPR was disabled for all SAR tests by setting NS=01 on the base station simulator. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

15.3 SAR Summary Test Result:

Table 5: SAR Values of GSM 850MHz Band (Test date:2025-3-5 and 2025-4-10)

Test Positions		Channel		Test Mode	Power(dBm)		SAR 1g(W/Kg), Limit(1.6W/kg)		Plot No.
		CH.	MHz		Maximum Turn-up Power(dBm)	Measured output power(dBm)	Measured SAR 1g(W/kg)	Scaled SAR 1g(W/kg)	
Right Head	Cheek	251	848.8	Voice call	33	32.46	0.053	0.06	1
	Tilt	251	848.8	Voice call	33	32.46	0.022	0.02	
Left Head	Cheek	251	848.8	Voice call	33	32.46	0.047	0.05	--
	Tilt	251	848.8	Voice call	33	32.46	0.021	0.02	
Right Head	Cheek	251	848.8	GPRS 4 slots	30	29.13	0.033	0.04	--
	Tilt	251	848.8	GPRS 4 slots	30	29.13	0.015	0.02	
Left Head	Cheek	251	848.8	GPRS 4 slots	30	29.13	0.022	0.03	--
	Tilt	251	848.8	GPRS 4 slots	30	29.13	0.010	0.01	
Body-worn (5mm Separation)	Front side	251	848.8	GPRS 4 slots	30	29.13	0.420	0.51	--
Hotspot (10mm Separation)	Front Side	251	848.8	GPRS 4 slots	30	29.13	0.411	0.50	--
	Right Edge	251	848.8	GPRS 4 slots	30	29.13	0.341	0.42	--
	Left Edge	251	848.8	GPRS 4 slots	30	29.13	0.236	0.29	--
	Bottom Edge	251	848.8	GPRS 4 slots	30	29.13	0.600	0.73	2

Table 6: SAR Values of GSM 1900MHz Band (Test date:2025-3-12 and 2025-4-11)

Test Positions		Channel		Test Mode	Power(dBm)		SAR 1g(W/Kg), Limit(1.6W/kg)		Plot No.
		CH.	MHz		Maximum Turn-up Power(dBm)	Measured output power(dBm)	Measured SAR 1g(W/kg)	Scaled SAR 1g(W/kg)	
Right Head	Cheek	810	1909.8	Voice call	30	29.11	0.00200	0.01	--
	Tilt	810	1909.8	Voice call	30	29.11	0.00125	0.01	--
Left Head	Cheek	810	1909.8	Voice call	30	29.11	0.00316	0.01	3
	Tilt	810	1909.8	Voice call	30	29.11	0.00205	0.01	--
Right Head	Cheek	810	1909.8	GPRS 4 slots	26	25.68	0.00158	0.01	--
	Tilt	810	1909.8	GPRS 4 slots	26	25.68	0.00145	0.01	--
Left Head	Cheek	810	1909.8	GPRS 4 slots	26	25.68	0.00132	0.01	--
	Tilt	810	1909.8	GPRS 4 slots	26	25.68	0.00120	0.01	--
Body-worn (5mm Separation)	Front side	810	1909.8	GPRS 4 slots	26	25.68	0.515	0.55	--
Hotspot (10mm Separation)	Front Side	810	1909.8	GPRS 4 slots	26	25.68	0.457	0.49	--
	Right Edge	810	1909.8	GPRS 4 slots	26	25.68	0.352	0.38	--
	Left Edge	810	1909.8	GPRS 4 slots	26	25.68	0.225	0.24	--
	Bottom Edge	810	1909.8	GPRS 4 slots	26	25.68	1.06	1.14	4
	Bottom Edge	810	1909.8	GPRS 4 slots	26	25.68	1.055	1.14	--
	Bottom Edge	512	1850.2	GPRS 4 slots	26	24.72	0.741	0.99	--
	Bottom Edge	661	1880	GPRS 4 slots	26	25.22	0.722	0.86	--

Table 7: SAR Values of WCDMA BAND V (Test date:2025-3-5 and 2025-4-10)

Test Positions		Channel		Test Mode	Power(dBm)		SAR 1g(W/Kg), Limit(1.6W/kg)		Plot No.
		CH.	MHz		Maximum Turn-up Power(dBm)	Measured output power(dBm)	Measured SAR 1g(W/kg)	Scaled SAR 1g(W/kg)	
Right Head	Cheek	4182	846.6	RMC 12.2kbps	23	22.85	0.287	0.30	5
	Tilt	4233	846.6	RMC 12.2kbps	23	22.85	0.124	0.13	--
Left Head	Cheek	4233	846.6	RMC 12.2kbps	23	22.85	0.235	0.24	--
	Tilt	4233	846.6	RMC 12.2kbps	23	22.85	0.115	0.12	--
Body-worn (5mm Separation)	Front side	4233	846.6	RMC 12.2kbps	23	22.85	0.302	0.31	--
Hotspot (10mm Separation)	Front Side	4233	846.6	RMC 12.2kbps	23	22.85	0.288	0.30	--
	Right Edge	4233	846.6	RMC 12.2kbps	23	22.85	0.125	0.13	--
	Left Edge	4233	846.6	RMC 12.2kbps	23	22.85	0.133	0.14	--
	Bottom Edge	4233	846.6	RMC 12.2kbps	23	22.85	0.310	0.32	6

Table 8: SAR Values of WCDMA BAND II (Test date:2025-3-12 and 2025-4-11)

Test Positions		Channel		Test Mode	Power(dBm)		SAR 1g(W/Kg), Limit(1.6W/kg)		Plot No.
		CH.	MHz		Maximum Turn-up Power(dBm)	Measured output power(dBm)	Measured SAR 1g(W/kg)	Scaled SAR 1g(W/kg)	
Right Head	Cheek	9538	1907.6	RMC 12.2kbps	22	21.03	0.055	0.07	--
	Tilt	9538	1907.6	RMC 12.2kbps	22	21.03	0.046	0.06	--
Left Head	Cheek	9538	1907.6	RMC 12.2kbps	22	21.03	0.085	0.11	7
	Tilt	9538	1907.6	RMC 12.2kbps	22	21.03	0.031	0.04	--
Body-worn (5mm Separation)	Front side	9538	1907.6	RMC 12.2kbps	22	21.03	0.324	0.41	--
Hotspot (10mm Separation)	Front Side	9538	1907.6	RMC 12.2kbps	22	21.03	0.251	0.31	--
	Right Edge	9538	1907.6	RMC 12.2kbps	22	21.03	0.325	0.41	--
	Left Edge	9538	1907.6	RMC 12.2kbps	22	21.03	0.128	0.16	--
	Bottom Edge	9538	1907.6	RMC 12.2kbps	22	21.03	0.684	0.86	8

Table 9: SAR Values of LTE BAND 2, 20MHz ,QPSK (Test date:2025-3-12 and 2025-4-11)

Test Mode	Test Positions		Channel		Power(dBm)		MPR (dB)	SAR 1g(W/Kg), Limit(1.6W/kg)		Plot No.
			CH.	MHz	Maximum Turn-up Power(dBm)	Measured output power(dBm)		Measured SAR 1g(W/kg)	Scaled SAR 1g(W/kg)	
1RB #49	Right Head	Cheek	18900	1880	23	22.99	0	0.141	0.14	--
		Tilt	18900	1880	23	22.99	0	0.125	0.13	--
	Left Head	Cheek	18900	1880	23	22.99	0	0.159	0.16	9
		Tilt	18900	1880	23	22.99	0	0.133	0.13	--
	Body-worn (5mm Separation)	Front side	18900	1880	23	22.99	0	0.320	0.33	--
	Hotspot (10mm Separation)	Front Side	18900	1880	23	22.99	0	0.256	0.26	--
		Right Edge	18900	1880	23	22.99	0	0.756	0.76	--
		Left Edge	18900	1880	23	22.99	0	0.200	0.20	--
		Bottom Edge	18900	1880	23	22.99	0	1.02	1.02	10
		Bottom Edge	18900	1880	23	22.99	0	1.018	1.02	--
		Bottom Edge	18700	1860	23	22.32	0	0.745	0.87	--
		Bottom Edge	19100	1900	23	22.95	0	0.856	0.87	--
50%RB #24	Right Head	Cheek	18900	1880	22	21.99	1	0.088	0.09	--
		Tilt	18900	1880	22	21.99	1	0.056	0.06	--
	Left Head	Cheek	18900	1880	22	21.99	1	0.025	0.03	--
		Tilt	18900	1880	22	21.99	1	0.023	0.02	--
	Body-worn (5mm Separation)	Front side	18900	1880	22	21.99	1	0.156	0.16	--
	Hotspot (10mm Separation)	Front Side	18900	1880	22	21.99	1	0.147	0.15	--
		Right Edge	18900	1880	22	21.99	1	0.201	0.20	--
		Left Edge	18900	1880	22	21.99	1	0.155	0.16	--
		Bottom Edge	18900	1880	22	21.99	1	0.744	0.75	--

Table 10: SAR Values of LTE BAND 2, 1.4MHz ,QPSK (Test date:2025-3-12 and 2025-4-11)

Test Mode	Test Positions		Channel		Power(dBm)		MPR (dB)	SAR 1g(W/Kg), Limit(1.6W/kg)		Plot No.
			CH.	MHz	Maximum Turn-up Power(dBm)	Measured output power(dBm)		Measured SAR 1g(W/kg)	Scaled SAR 1g(W/kg)	
1RB #49	Right Head	Cheek	19193	1909.3	24	23.11	0	0.088	0.11	--
		Tilt	19193	1909.3	24	23.11	0	0.055	0.07	--
	Left Head	Cheek	19193	1909.3	24	23.11	0	0.074	0.09	--
		Tilt	19193	1909.3	24	23.11	0	0.041	0.05	--
	Body-worn (5mm Separation)	Front side	19193	1909.3	24	23.11	0	0.159	0.20	--
	Hotspot (10mm Separation)	Front Side	19193	1909.3	24	23.11	0	0.141	0.17	--
		Right Edge	19193	1909.3	24	23.11	0	0.360	0.44	--
		Left Edge	19193	1909.3	24	23.11	0	0.158	0.19	--
		Bottom Edge	19193	1909.3	24	23.11	0	0.744	0.91	--
	50%RB #0	Right Head	Cheek	19193	1909.3	24	22.96	1	0.041	0.05
Tilt			19193	1909.3	24	22.96	1	0.050	0.06	--
Left Head		Cheek	19193	1909.3	24	22.96	1	0.020	0.03	--
		Tilt	19193	1909.3	24	22.96	1	0.012	0.02	--
Body-worn (5mm Separation)		Front side	19193	1909.3	24	22.96	1	0.123	0.16	--
Hotspot (10mm Separation)		Front Side	19193	1909.3	24	22.96	1	0.111	0.14	--
		Right Edge	19193	1909.3	24	22.96	1	0.125	0.16	--
		Left Edge	19193	1909.3	24	22.96	1	0.088	0.11	--
		Bottom Edge	19193	1909.3	24	22.96	1	0.644	0.82	--

Table 11: SAR Values of LTE BAND 4, 20MHz ,QPSK (Test date:2025-3-7 and 2025-4-10)

Test Mode	Test Positions		Channel		Power(dBm)		MPR (dB)	SAR 1g(W/Kg), Limit(1.6W/kg)		Plot No.
			CH.	MHz	Maximum Turn-up Power(dBm)	Measured output power(dBm)		Measured SAR 1g(W/kg)	Scaled SAR 1g(W/kg)	
1RB #49	Right Head	Cheek	20050	1720	24	23.93	0	0.052	0.05	--
		Tilt	20050	1720	24	23.93	0	0.033	0.03	--
	Left Head	Cheek	20050	1720	24	23.93	0	0.082	0.08	11
		Tilt	20050	1720	24	23.93	0	0.056	0.06	--
	Body-worn (5mm Separation)	Front side	20050	1720	24	23.93	0	0.263	0.27	--
	Hotspot (10mm Separation)	Front Side	20050	1720	24	23.93	0	0.212	0.22	--
		Right Edge	20050	1720	24	23.93	0	0.320	0.33	--
		Left Edge	20050	1720	24	23.93	0	0.145	0.15	--
		Bottom Edge	20050	1720	24	23.93	0	0.410	0.42	12
50%RB #0	Right Head	Cheek	20050	1720	23	22.90	1	0.022	0.02	--
		Tilt	20050	1720	23	22.90	1	0.015	0.02	--
	Left Head	Cheek	20050	1720	23	22.90	1	0.031	0.03	--
		Tilt	20050	1720	23	22.90	1	0.020	0.02	--
	Body-worn (5mm Separation)	Front side	20050	1720	23	22.90	1	0.158	0.16	--
	Hotspot (10mm Separation)	Front Side	20050	1720	23	22.90	1	0.147	0.15	--
		Right Edge	20050	1720	23	22.90	1	0.156	0.16	--
		Left Edge	20050	1720	23	22.90	1	0.144	0.15	--
		Bottom Edge	20050	1720	23	22.90	1	0.236	0.24	--

Table 12: SAR Values of LTE BAND 5 , 10MHz ,QPSK (Test date:2025-3-5 and 2025-4-10)

Test Mode	Test Positions		Channel		Power(dBm)		MPR (dB)	SAR 1g(W/Kg), Limit(1.6W/kg)		Plot No.
			CH.	MHz	Maximum Turn-up Power(dBm)	Measured output power(dBm)		Measured SAR 1g(W/kg)	Scaled SAR 1g(W/kg)	
1RB #49	Right Head	Cheek	20600	844	25	24.50	0	0.294	0.33	13
		Tilt	20600	844	25	24.50	0	0.144	0.16	--
	Left Head	Cheek	20600	844	25	24.50	0	0.250	0.28	--
		Tilt	20600	844	25	24.50	0	0.132	0.15	--
	Body-worn (5mm Separation)	Front side	20600	844	25	24.50	0	0.234	0.26	--
	Hotspot (10mm Separation)	Front Side	20600	844	25	24.50	0	0.220	0.25	--
		Right Edge	20600	844	25	24.50	0	0.157	0.18	--
		Left Edge	20600	844	25	24.50	0	0.125	0.14	--
		Bottom Edge	20600	844	25	24.50	0	0.301	0.34	14
50%RB #49	Right Head	Cheek	20600	844	24	23.54	1	0.158	0.18	--
		Tilt	20600	844	24	23.54	1	0.101	0.11	--
	Left Head	Cheek	20600	844	24	23.54	1	0.122	0.14	--
		Tilt	20600	844	24	23.54	1	0.135	0.15	--
	Body-worn (5mm Separation)	Front side	20600	844	24	23.54	1	0.150	0.17	--
	Hotspot (10mm Separation)	Front Side	20600	844	24	23.54	1	0.147	0.16	--
		Right Edge	20600	844	24	23.54	1	0.111	0.12	--
		Left Edge	20600	844	24	23.54	1	0.052	0.06	--
		Bottom Edge	20600	844	24	23.54	1	0.156	0.17	--

Table 13: SAR Values of LTE BAND 7 , 20MHz ,QPSK (Test date:2025-2-28 and 2025-4-11)

Test Mode	Test Positions		Channel		Power(dBm)		MPR (dB)	SAR 1g(W/Kg), Limit(1.6W/kg)		Plot No.
			CH.	MHz	Maximum Turn-up Power(dBm)	Measured output power(dBm)		Measured SAR 1g(W/kg)	Scaled SAR 1g(W/kg)	
1RB #0	Right Head	Cheek	21350	2560	22	21.95	0	0.141	0.14	--
		Tilt	21350	2560	22	21.95	0	0.125	0.13	--
	Left Head	Cheek	21350	2560	22	21.95	0	0.156	0.16	15
		Tilt	21350	2560	22	21.95	0	0.131	0.13	--
	Body-worn (5mm Separation)	Front side	21350	2560	22	21.95	0	0.154	0.16	--
	Hotspot (10mm Separation)	Front Side	21350	2560	22	21.95	0	0.147	0.15	--
		Right Edge	21350	2560	22	21.95	0	0.108	0.11	--
		Left Edge	21350	2560	22	21.95	0	0.022	0.02	--
		Bottom Edge	21350	2560	22	21.95	0	0.201	0.20	16
50%RB #0	Right Head	Cheek	21350	2560	21	20.98	1	0.101	0.10	--
		Tilt	21350	2560	21	20.98	1	0.088	0.09	--
	Left Head	Cheek	21350	2560	21	20.98	1	0.056	0.06	--
		Tilt	21350	2560	21	20.98	1	0.032	0.03	--
	Body-worn (5mm Separation)	Front side	21350	2560	21	20.98	1	0.120	0.12	--
	Hotspot (10mm Separation)	Front Side	21350	2560	21	20.98	1	0.101	0.10	--
		Right Edge	21350	2560	21	20.98	1	0.088	0.09	--
		Left Edge	21350	2560	21	20.98	1	0.023	0.02	--
		Bottom Edge	21350	2560	21	20.98	1	0.105	0.11	--

Table 14: SAR Values of LTE BAND 7 , 5MHz ,QPSK (Test date:2025-2-28 and 2025-4-11)

Test Mode	Test Positions		Channel		Power(dBm)		MPR (dB)	SAR 1g(W/Kg), Limit(1.6W/kg)		Plot No.
			CH.	MHz	Maximum Turn-up Power(dBm)	Measured output power(dBm)		Measured SAR 1g(W/kg)	Scaled SAR 1g(W/kg)	
1RB #0	Right Head	Cheek	21100	2535	23	22.13	0	0.100	0.12	--
		Tilt	21100	2535	23	22.13	0	0.085	0.10	--
	Left Head	Cheek	21100	2535	23	22.13	0	0.078	0.10	--
		Tilt	21100	2535	23	22.13	0	0.025	0.03	--
	Body-worn (5mm Separation)	Front side	21100	2535	23	22.13	0	0.120	0.15	--
	Hotspot (10mm Separation)	Front Side	21100	2535	23	22.13	0	0.111	0.14	--
		Right Edge	21100	2535	23	22.13	0	0.025	0.03	--
		Left Edge	21100	2535	23	22.13	0	0.014	0.02	--
		Bottom Edge	21100	2535	23	22.13	0	0.102	0.12	--
50%RB #0	Right Head	Cheek	21100	2535	22	21.58	1	0.047	0.05	--
		Tilt	21100	2535	22	21.58	1	0.025	0.03	--
	Left Head	Cheek	21100	2535	22	21.58	1	0.036	0.04	--
		Tilt	21100	2535	22	21.58	1	0.008	0.01	--
	Body-worn (5mm Separation)	Front side	21100	2535	22	21.58	1	0.062	0.07	--
	Hotspot (10mm Separation)	Front Side	21100	2535	22	21.58	1	0.055	0.06	--
		Right Edge	21100	2535	22	21.58	1	0.026	0.03	--
		Left Edge	21100	2535	22	21.58	1	0.010	0.01	--
		Bottom Edge	21100	2535	22	21.58	1	0.087	0.10	--

Table 15: SAR Values of LTE BAND 12 , 10MHz ,QPSK (Test date:2025-3-3 and 2025-4-10)

Test Mode	Test Positions		Channel		Power(dBm)		MPR (dB)	SAR 1g(W/Kg), Limit(1.6W/kg)		Plot No.
			CH.	MHz	Maximum Turn-up Power(dBm)	Measured output power(dBm)		Measured SAR 1g(W/kg)	Scaled SAR 1g(W/kg)	
1RB #99	Right Head	Cheek	23130	711	25	24.12	0	0.100	0.12	17
		Tilt	23130	711	25	24.12	0	0.074	0.09	--
	Left Head	Cheek	23130	711	25	24.12	0	0.076	0.09	--
		Tilt	23130	711	25	24.12	0	0.025	0.03	--
	Body-worn (5mm Separation)	Front side	23130	711	25	24.12	0	0.045	0.06	--
	Hotspot (10mm Separation)	Front Side	23130	711	25	24.12	0	0.033	0.04	--
		Right Edge	23130	711	25	24.12	0	0.025	0.03	--
		Left Edge	23130	711	25	24.12	0	0.011	0.01	--
		Bottom Edge	23130	711	25	24.12	0	0.095	0.12	18
50%RB #0	Right Head	Cheek	23130	711	24	22.96	1	0.008	0.01	--
		Tilt	23130	711	24	22.96	1	0.007	0.01	--
	Left Head	Cheek	23130	711	24	22.96	1	0.005	0.01	--
		Tilt	23130	711	24	22.96	1	0.006	0.01	--
	Body-worn (5mm Separation)	Front side	23130	711	24	22.96	1	0.006	0.01	--
	Hotspot (10mm Separation)	Front Side	23130	711	24	22.96	1	0.002	0.01	--
		Right Edge	23130	711	24	22.96	1	0.003	0.01	--
		Left Edge	23130	711	24	22.96	1	0.001	0.01	--
		Bottom Edge	23130	711	24	22.96	1	0.004	0.01	--

Table 16: SAR Values of LTE BAND 17 , 10MHz ,QPSK (Test date:2025-3-3 and 2025-4-10)

Test Mode	Test Positions		Channel		Power(dBm)		MPR (dB)	SAR 1g(W/Kg), Limit(1.6W/kg)		Plot No.
			CH.	MHz	Maximum Turn-up Power(dBm)	Measured output power(dBm)		Measured SAR 1g(W/kg)	Scaled SAR 1g(W/kg)	
1RB #99	Right Head	Cheek	23800	711	25	24.47	0	0.100	0.11	19
		Tilt	23800	711	25	24.47	0	0.056	0.06	--
	Left Head	Cheek	23800	711	25	24.47	0	0.082	0.09	--
		Tilt	23800	711	25	24.47	0	0.036	0.04	--
	Body-worn (5mm Separation)	Front side	23800	711	25	24.47	0	0.088	0.10	--
	Hotspot (10mm Separation)	Front Side	23800	711	25	24.47	0	0.055	0.06	--
		Right Edge	23800	711	25	24.47	0	0.025	0.03	--
		Left Edge	23800	711	25	24.47	0	0.014	0.02	--
		Bottom Edge	23800	711	25	24.47	0	0.097	0.11	20
50%RB #0	Right Head	Cheek	23800	711	24	23.24	1	0.047	0.06	--
		Tilt	23800	711	24	23.24	1	0.032	0.04	--
	Left Head	Cheek	23800	711	24	23.24	1	0.025	0.03	--
		Tilt	23800	711	24	23.24	1	0.041	0.05	--
	Body-worn (5mm Separation)	Front side	23800	711	24	23.24	1	0.020	0.02	--
	Hotspot (10mm Separation)	Front Side	23800	711	24	23.24	1	0.014	0.02	--
		Right Edge	23800	711	24	23.24	1	0.007	0.01	--
		Left Edge	23800	711	24	23.24	1	0.006	0.01	--
		Bottom Edge	23800	711	24	23.24	1	0.005	0.01	--

Table 17: SAR Values of LTE BAND 38 , 20MHz ,QPSK (Test date:2025-2-28 and 2025-4-11)

Test Mode	Test Positions		Channel		Power(dBm)		MPR (dB)	SAR 1g(W/Kg), Limit(1.6W/kg)		Plot No.
			CH.	MHz	Maximum Turn-up Power(dBm)	Measured output power(dBm)		Measured SAR 1g(W/kg)	Scaled SAR 1g(W/kg)	
1RB #49	Right Head	Cheek	38150	2610	25	24.18	0	0.055	0.07	--
		Tilt	38150	2610	25	24.18	0	0.077	0.09	--
	Left Head	Cheek	38150	2610	25	24.18	0	0.091	0.11	21
		Tilt	38150	2610	25	24.18	0	0.025	0.03	--
	Body-worn (5mm Separation)	Front side	38150	2610	25	24.18	0	0.022	0.01	--
	Hotspot (10mm Separation)	Front Side	38150	2610	25	24.18	0	0.011	0.01	--
		Right Edge	38150	2610	25	24.18	0	0.025	0.03	--
		Left Edge	38150	2610	25	24.18	0	0.033	0.04	--
		Bottom Edge	38150	2610	25	24.18	0	0.109	0.13	22
50%RB #49	Right Head	Cheek	38150	2610	24	23.04	1	0.022	0.03	--
		Tilt	38150	2610	24	23.04	1	0.031	0.04	--
	Left Head	Cheek	38150	2610	24	23.04	1	0.008	0.01	--
		Tilt	38150	2610	24	23.04	1	0.007	0.01	--
	Body-worn (5mm Separation)	Front side	38150	2610	24	23.04	1	0.012	0.01	--
	Hotspot (10mm Separation)	Front Side	38150	2610	24	23.04	1	0.007	0.01	--
		Right Edge	38150	2610	24	23.04	1	0.002	0.01	--
		Left Edge	38150	2610	24	23.04	1	0.001	0.01	--
		Bottom Edge	38150	2610	24	23.04	1	0.003	0.01	--

Table 18: SAR Values of LTE BAND 40a , 10MHz ,QPSK (Test date:2025-3-14 and 2025-4-11)

Test Mode	Test Positions		Channel		Power(dBm)		MPR (dB)	SAR 1g(W/Kg), Limit(1.6W/kg)		Plot No.
			CH.	MHz	Maximum Turn-up Power(dBm)	Measured output power(dBm)		Measured SAR 1g(W/kg)	Scaled SAR 1g(W/kg)	
1RB #49	Right Head	Cheek	38750	2310	25	24.07	0	0.114	0.14	--
		Tilt	38750	2310	25	24.07	0	0.022	0.03	--
	Left Head	Cheek	38750	2310	25	24.07	0	0.120	0.15	23
		Tilt	38750	2310	25	24.07	0	0.055	0.07	--
	Body-worn (5mm Separation)	Front side	38750	2310	25	24.07	0	0.162	0.20	--
	Hotspot (10mm Separation)	Front Side	38750	2310	25	24.07	0	0.147	0.18	--
		Right Edge	38750	2310	25	24.07	0	0.052	0.06	--
		Left Edge	38750	2310	25	24.07	0	0.033	0.04	--
		Bottom Edge	38750	2310	25	24.07	0	0.233	0.29	24
50%RB #49	Right Head	Cheek	38750	2310	24	22.80	1	0.025	0.03	--
		Tilt	38750	2310	24	22.80	1	0.035	0.05	--
	Left Head	Cheek	38750	2310	24	22.80	1	0.041	0.05	--
		Tilt	38750	2310	24	22.80	1	0.036	0.05	--
	Body-worn (5mm Separation)	Front side	38750	2310	24	22.80	1	0.018	0.02	--
	Hotspot (10mm Separation)	Front Side	38750	2310	24	22.80	1	0.014	0.02	--
		Right Edge	38750	2310	24	22.80	1	0.008	0.01	--
		Left Edge	38750	2310	24	22.80	1	0.007	0.01	--
		Bottom Edge	38750	2310	24	22.80	1	0.005	0.01	--

Table 19: SAR Values of LTE BAND 40b , 10MHz ,QPSK (Test date:2025-3-14 and 2025-4-11)

Test Mode	Test Positions		Channel		Power(dBm)		MPR (dB)	SAR 1g(W/Kg), Limit(1.6W/kg)		Plot No.
			CH.	MHz	Maximum Turn-up Power(dBm)	Measured output power(dBm)		Measured SAR 1g(W/kg)	Scaled SAR 1g(W/kg)	
1RB #49	Right Head	Cheek	39200	2355	25	24.13	0	0.058	0.07	--
		Tilt	39200	2355	25	24.13	0	0.036	0.04	--
	Left Head	Cheek	39200	2355	25	24.13	0	0.127	0.16	25
		Tilt	39200	2355	25	24.13	0	0.101	0.12	--
	Body-worn (5mm Separation)	Front side	39200	2355	25	24.13	0	0.120	0.15	--
		Front Side	39200	2355	25	24.13	0	0.114	0.14	--
	Hotspot (10mm Separation)	Right Edge	39200	2355	25	24.13	0	0.085	0.10	--
		Left Edge	39200	2355	25	24.13	0	0.026	0.03	--
		Bottom Edge	39200	2355	25	24.13	0	0.207	0.25	26
50%RB #49	Right Head	Cheek	39200	2355	24	22.79	1	0.005	0.01	--
		Tilt	39200	2355	24	22.79	1	0.006	0.01	--
	Left Head	Cheek	39200	2355	24	22.79	1	0.010	0.01	--
		Tilt	39200	2355	24	22.79	1	0.011	0.01	--
	Body-worn (5mm Separation)	Front side	39200	2355	24	22.79	1	0.025	0.03	--
		Front Side	39200	2355	24	22.79	1	0.022	0.03	--
	Hotspot (10mm Separation)	Right Edge	39200	2355	24	22.79	1	0.031	0.04	--
		Left Edge	39200	2355	24	22.79	1	0.022	0.03	--
		Bottom Edge	39200	2355	24	22.79	1	0.014	0.02	--

Table 20: SAR Values of LTE BAND 41 , 5MHz ,QPSK (Test date:2025-2-28 and 2025-4-11)

Test Mode	Test Positions		Channel		Power(dBm)		MPR (dB)	SAR 1g(W/Kg), Limit(1.6W/kg)		Plot No.
			CH.	MHz	Maximum Turn-up Power(dBm)	Measured output power(dBm)		Measured SAR 1g(W/kg)	Scaled SAR 1g(W/kg)	
1RB #49	Right Head	Cheek	41215	2652.5	25	24.81	0	0.011	0.01	--
		Tilt	41215	2652.5	25	24.81	0	0.015	0.03	--
	Left Head	Cheek	41215	2652.5	25	24.81	0	0.020	0.02	--
		Tilt	41215	2652.5	25	24.81	0	0.014	0.01	--
	Body-worn (5mm Separation)	Front side	41215	2652.5	25	24.81	0	0.028	0.03	--
		Front Side	41215	2652.5	25	24.81	0	0.023	0.02	--
	Hotspot (10mm Separation)	Right Edge	41215	2652.5	25	24.81	0	0.008	0.01	--
		Left Edge	41215	2652.5	25	24.81	0	0.015	0.02	--
		Bottom Edge	41215	2652.5	25	24.81	0	0.074	0.08	--
50%RB #24	Right Head	Cheek	41215	2652.5	24	23.43	1	0.008	0.01	--
		Tilt	41215	2652.5	24	23.43	1	0.007	0.01	--
	Left Head	Cheek	41215	2652.5	24	23.43	1	0.006	0.01	--
		Tilt	41215	2652.5	24	23.43	1	0.005	0.01	--
	Body-worn (5mm Separation)	Front side	41215	2652.5	24	23.43	1	0.018	0.02	--
		Front Side	41215	2652.5	24	23.43	1	0.014	0.02	--
	Hotspot (10mm Separation)	Right Edge	41215	2652.5	24	23.43	1	0.010	0.01	--
		Left Edge	41215	2652.5	24	23.43	1	0.002	0.01	--
		Bottom Edge	41215	2652.5	24	23.43	1	0.062	0.07	--

Table 21: SAR Values of LTE BAND 41 , 20MHz ,QPSK (Test date:2025-2-28 and 2025-4-11)

Test Mode	Test Positions		Channel		Power(dBm)		MPR (dB)	SAR 1g(W/Kg), Limit(1.6W/kg)		Plot No.
			CH.	MHz	Maximum Turn-up Power(dBm)	Measured output power(dBm)		Measured SAR 1g(W/kg)	Scaled SAR 1g(W/kg)	
1RB #99	Right Head	Cheek	41140	2645	25	24.48	0	0.025	0.03	--
		Tilt	41140	2645	25	24.48	0	0.041	0.05	--
	Left Head	Cheek	41140	2645	25	24.48	0	0.083	0.09	27
		Tilt	41140	2645	25	24.48	0	0.024	0.03	--
	Body-worn (5mm Separation)	Front side	41140	2645	25	24.48	0	0.048	0.05	--
		Front Side	41140	2645	25	24.48	0	0.047	0.05	--
	Hotspot (10mm Separation)	Right Edge	41140	2645	25	24.48	0	0.014	0.02	--
		Left Edge	41140	2645	25	24.48	0	0.022	0.02	--
		Bottom Edge	41140	2645	25	24.48	0	0.129	0.15	28
50%RB #24	Right Head	Cheek	41140	2645	24	23.45	1	0.011	0.01	--
		Tilt	41140	2645	24	23.45	1	0.008	0.01	--
	Left Head	Cheek	41140	2645	24	23.45	1	0.010	0.01	--
		Tilt	41140	2645	24	23.45	1	0.007	0.01	--
	Body-worn (5mm Separation)	Front side	41140	2645	24	23.45	1	0.025	0.03	--
		Front Side	41140	2645	24	23.45	1	0.020	0.02	--
	Hotspot (10mm Separation)	Right Edge	41140	2645	24	23.45	1	0.011	0.01	--
		Left Edge	41140	2645	24	23.45	1	0.003	0.00	--
		Bottom Edge	41140	2645	24	23.45	1	0.075	0.09	--

Table 22: SAR Values of 2.4G WIFI (Test date:2025-3-14 and 2025-4-11)

Test Positions		Channel		Test Mode	Power(dBm)		SAR 1g(W/Kg), Limit(1.6W/kg)		Plot No.
		CH.	MHz		Maximum Turn-up Power(dBm)	Measured output power(dBm)	Measured SAR 1g(W/kg)	Scaled SAR 1g(W/kg)	
Right Head	Cheek	Mid	2437	DSSS	21	20.882	0.014	0.01	--
	Tilt	Mid	2437	DSSS	21	20.882	0.022	0.02	--
Left Head	Cheek	Mid	2437	DSSS	21	20.882	0.038	0.04	29
	Tilt	Mid	2437	DSSS	21	20.882	0.025	0.03	--
Body-worn (5mm Separation)	Front side	Mid	2437	DSSS	21	20.882	0.055	0.06	--
Hotspot (10mm Separation)	Front side	Mid	2437	DSSS	21	20.882	0.047	0.05	30
	Right Edge	Mid	2437	DSSS	21	20.882	0.004	0.01	--
	Left Edge	Mid	2437	DSSS	21	20.882	0.025	0.03	--
	Top Edge	Mid	2437	DSSS	21	20.882	0.008	0.01	--

Table 23: SAR Values of 5.2G WIFI (Test date:2025-3-17 and 2025-4-12)

Test Positions		Channel		Test Mode	Power(dBm)		SAR 1g(W/Kg), Limit(1.6W/kg)		Plot No.
		CH.	MHz		Maximum Turn-up Power(dBm)	Measured output power(dBm)	Measured SAR 1g(W/kg)	Scaled SAR 1g(W/kg)	
Right Head	Cheek	Low	5180	802.11a	17	16.288	0.044	0.05	--
	Tilt	Low	5180	802.11a	17	16.288	0.023	0.03	--
Left Head	Cheek	Low	5180	802.11a	17	16.288	0.074	0.09	31
	Tilt	Low	5180	802.11a	17	16.288	0.055	0.06	--
Body-worn (5mm Separation)	Front side	Low	5180	802.11a	17	16.288	0.078	0.09	--
Hotspot (10mm Separation)	Front side	Low	5180	802.11a	17	16.288	0.063	0.07	32
	Left Edge	Low	5180	802.11a	17	16.288	0.011	0.01	--
	Top Edge	Low	5180	802.11a	17	16.288	0.020	0.02	--

Table 24: SAR Values of 5.3G WIFI (Test date:2025-2-27 and 2025-4-12)

Test Positions		Channel		Test Mode	Power(dBm)		SAR 1g(W/Kg), Limit(1.6W/kg)		Plot No.
		CH.	MHz		Maximum Turn-up Power(dBm)	Measured output power(dBm)	Measured SAR 1g(W/kg)	Scaled SAR 1g(W/kg)	
Right Head	Cheek	Low	5260	802.11a	12	11.506	0.041	0.05	--
	Tilt	Low	5260	802.11a	12	11.506	0.025	0.03	--
Left Head	Cheek	Low	5260	802.11a	12	11.506	0.073	0.08	33
	Tilt	Low	5260	802.11a	12	11.506	0.056	0.06	--
Body-worn (5mm Separation)	Front side	Low	5260	802.11a	12	11.506	0.086	0.09	--
Hotspot (10mm Separation)	Front side	Low	5260	802.11a	12	11.506	0.081	0.09	34
	Left Edge	Low	5260	802.11a	12	11.506	0.014	0.02	--
	Top Edge	Low	5260	802.11a	12	11.506	0.022	0.02	--

Table 25: SAR Values of 5.8G WIFI (Test date:2025-3-10 and 2025-4-12)

Test Positions		Channel		Test Mode	Power(dBm)		SAR 1g(W/Kg), Limit(1.6W/kg)		Plot No.
		CH.	MHz		Maximum Turn-up Power(dBm)	Measured output power(dBm)	Measured SAR 1g(W/kg)	Scaled SAR 1g(W/kg)	
Right Head	Cheek	High	5825	802.11a	15	14.004	0.055	0.07	--
	Tilt	Low	5825	802.11a	15	14.004	0.036	0.05	--
Left Head	Cheek	Low	5825	802.11a	15	14.004	0.146	0.18	35
	Tilt	Low	5825	802.11a	15	14.004	0.114	0.14	--
Body-worn (5mm Separation)	Front side	Low	5825	802.11a	15	14.004	0.141	0.17	--
Hotspot (10mm Separation)	Front side	Low	5825	802.11a	15	14.004	0.138	0.17	36
	Left Edge	Low	5825	802.11a	15	14.004	0.125	0.16	--
	Top Edge	Low	5825	802.11a	15	14.004	0.087	0.11	--

Table 26: SAR Values of RFID (Test date:2025-3-5 and 2025-4-10)

Test Positions		Channel		Power(dBm)		SAR 1g(W/Kg), Limit(1.6W/kg)		Plot No.
		CH.	MHz	Maximum Turn-up Power(dBm)	Measured output power(dBm)	Measured SAR 1g(W/kg)	Scaled SAR 1g(W/kg)	
Body-worn (5mm Separation)	Front side	50	927.25	30	29.510	0.151	0.16	--
	Back side	50	927.25	30	29.510	0.130	0.14	--
Hotspot (10mm Separation)	Front side	50	927.25	30	29.510	0.145	0.16	--
	Back side	50	927.25	30	29.510	0.125	0.14	--
	Right Edge	50	927.25	30	29.510	0.200	0.22	--
	Left Edge	50	927.25	30	29.510	0.211	0.24	--
	Top Edge	50	927.25	30	29.510	0.316	0.35	37
	Bottom edge	50	927.25	30	29.510	0.101	0.11	--

Note:1. KDB941225 D01-Body SAR is not required for HSDPA when the average output of each RF channel with HSDPA active is less than 0.25dB higher than measured without HSDPA using 12.2kbps RMC or the maximum SAR for 12.2kbps RMC<75% of the SAR limit.

2. KDB941225 D01-Body SAR is not required for handset with HSUPA/HSDPA capabilities when the maximum average output of each RF channel with HSUPA/HSDPA active is less than 0.25dB higher than that measure without HSUPA/HSDPA using 12.2kbps RMC and The maximum SAR for 12.2kbps RMC is<75% of the SAR limit

Note: Scaled SAR=SAR Value*10(0.1*Tune up Power-Conducted Power)

15.4 Measurement variability consideration

Refer to FCC KDB 248227 section 5.2.1~5.2.2:

802.11b DSSS SAR Test Requirements:

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure.

SAR test reduction is determined according to the following:

1) When the reported SAR of the highest measured maximum output power channel (section 3.1) for the exposure configuration is ≤ 0.8 W/kg,

no further SAR testing is required for 802.11b DSSS in that exposure configuration.

2) When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg,

SAR is required for the third channel; i.e., all channels require testing.

2.4 GHz 802.11g/n OFDM SAR Test Exclusion Requirements

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied (section 5.3).

SAR is not required for the following 2.4 GHz OFDM conditions.

1) When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.

2) When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

Note: 802.11b DSSS SAR test is required. The highest reported SAR for DSSS* the ratio of OFDM to DSSS(Max output power) is $0.047 \times 0.788 = 0.040 \text{ W/Kg} < 1.2 \text{ W/Kg}$, so the OFDM SAR test is not required.

For 5G WiFi

1. Output Power and SAR measurement is not required for 802.11n/ac HT20/HT40/HT80 channels when the specified tune-up tolerances for 802.11n HT20/HT40 are lower than 802.11a by more than $\frac{1}{2}$ dB and the measured SAR is ≤ 1.2 W/Kg.

2. When the same transmission mode configurations have the same maximum output power on the same channel for the 802.11 a/g/n/ac modes, the channel in the lower order/sequence 802.11 mode (i.e. a, g, n then ac) is selected.

3. When the specified maximum output power is the same for both UNII band I and UNII band 2A, begin SAR measurement in UNII band 2A; and if the highest reported SAR for UNII band 2A is ≤ 1.2 W/kg, SAR is not required for UNII band I, if SAR for UNII band 2A > 1.2 W/kg, both bands should be tested independently for SAR.

According to KDB 865664 D01v01r04 section 2.8.1, repeated measurements are required following the procedures as below:

Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.

When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.

Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).

Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Repeated SAR:

Band	Position	Channel	Mode	measured SAR(W/kg)				
				Original	1st Repeated		2nd Repeated	
					Value	Ratio	Value	Ratio
GSM 1900MHz	Bottom Edge	810	GPRS 4 slots	1.06	1.055	1.005	NA	NA
LTE Band 2	Bottom Edge	20175	1RB	1.02	1.018	1.002	NA	NA

15.5 Simultaneous Transmission SAR Analysis.

List of Mode for Simultaneous Multi-band Transmission:

No.	Configurations	Head SAR	Body-worn SAR	Hotspot SAR
1	GSM(Voice) + WLAN 2.4GHz(Data)	Yes	-	-
2	GPRS (Data) + WLAN 2.4GHz(Data) +RFID	Yes	Yes	Yes
3	GSM(Voice) + WLAN 5GHz(Data)	Yes	-	-
4	GPRS (Data) + WLAN 5GHz(Data) +RFID	Yes	Yes	Yes
5	GSM(Voice) + Bluetooth(Data)	Yes	-	-
6	GPRS (Data) + Bluetooth(Data) +RFID	Yes	Yes	Yes
7	WCDMA (Voice) + WLAN 2.4GHz(Data)	Yes	-	-
8	WCDMA (Data) + WLAN 2.4GHz(Data) +RFID	-	Yes	Yes
9	WCDMA (Voice) + WLAN 5GHz(Data)	Yes	-	-
10	WCDMA (Data) + WLAN 5GHz(Data) +RFID	-	Yes	Yes
11	WCDMA (Voice) + Bluetooth(Data)	Yes	-	-
12	WCDMA (Data) + Bluetooth(Data) +RFID	-	Yes	Yes
13	LTE (Date) + WLAN 2.4GHz(Data) +RFID	Yes	Yes	Yes
14	LTE (Date) + WLAN 5GHz(Data) +RFID	Yes	Yes	Yes
15	LTE (Date) + Bluetooth(Data) +RFID	Yes	Yes	Yes

Remark:

1. GSM/ WCDMA/LTE share the same antenna, and cannot transmit simultaneously.
2. WLAN and Bluetooth share the same antenna, and cannot transmit simultaneously.
3. According to the KDB 447498 D01 v06, when standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)]·[$\sqrt{f(\text{GHz})/x}$]
W/kg for test separation distances ≤ 50 mm;

where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.

For simultaneous transmission analysis, Bluetooth SAR is estimated per KDB 447498 D01 v06 as below:

Bluetooth:

Tune-Up Power (dBm)	Max. Power (mW)	Distance (mm)	Frequency (GHz)	X	SAR(1g) 5mm	SAR(1g) 10mm
8	6.31	5/10	2.441	7.5	0.26	0.13

5. The maximum SAR summation is calculated based on the same configuration and test position

Head SAR Simultaneous WWAN and 2.4G WIFI

Position	WWAN (maximum)		2.4G WIFI	Summed SAR (W/kg)
	Band	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Right Cheek	GPRS850	0.06	0.01	0.07
Right Tilt	GPRS850	0.02	0.02	0.04
Left Cheek	GPRS850	0.05	0.04	0.09
Left Tilt	GPRS850	0.02	0.03	0.05
Right Cheek	GPRS1900	0.01	0.01	0.02
Right Tilt	GPRS1900	0.01	0.02	0.03
Left Cheek	GPRS1900	0.01	0.04	0.05
Left Tilt	GPRS1900	0.01	0.03	0.04
Right Cheek	WCDMA Band V	0.30	0.01	0.31
Right Tilt	WCDMA Band V	0.13	0.02	0.15
Left Cheek	WCDMA Band V	0.24	0.04	0.28
Left Tilt	WCDMA Band V	0.12	0.03	0.15
Right Cheek	WCDMA Band II	0.07	0.01	0.08
Right Tilt	WCDMA Band II	0.06	0.02	0.08
Left Cheek	WCDMA Band II	0.11	0.04	0.15
Left Tilt	WCDMA Band II	0.04	0.03	0.07
Right Cheek	LTE BAND 2(1RB)	0.14	0.01	0.15
Right Tilt	LTE BAND 2(1RB)	0.13	0.02	0.15
Left Cheek	LTE BAND 2(1RB)	0.16	0.04	0.20
Left Tilt	LTE BAND 2(1RB)	0.13	0.03	0.16
Right Cheek	LTE BAND 4(1RB)	0.05	0.01	0.06
Right Tilt	LTE BAND 4(1RB)	0.03	0.02	0.05
Left Cheek	LTE BAND 4(1RB)	0.08	0.04	0.12
Left Tilt	LTE BAND 4(1RB)	0.06	0.03	0.09
Right Cheek	LTE BAND 5(1RB)	0.33	0.01	0.34
Right Tilt	LTE BAND 5(1RB)	0.16	0.02	0.18
Left Cheek	LTE BAND 5(1RB)	0.28	0.04	0.32
Left Tilt	LTE BAND 5(1RB)	0.15	0.03	0.18
Right Cheek	LTE BAND 7(1RB)	0.14	0.01	0.15
Right Tilt	LTE BAND 7(1RB)	0.13	0.02	0.15
Left Cheek	LTE BAND 7(1RB)	0.16	0.04	0.20
Left Tilt	LTE BAND 7(1RB)	0.13	0.03	0.16
Right Cheek	LTE BAND 12(1RB)	0.12	0.01	0.13
Right Tilt	LTE BAND 12(1RB)	0.09	0.02	0.11
Left Cheek	LTE BAND 12(1RB)	0.09	0.04	0.13
Left Tilt	LTE BAND 12(1RB)	0.03	0.03	0.06
Right Cheek	LTE BAND 17(1RB)	0.11	0.01	0.12

Right Tilt	LTE BAND 17(1RB)	0.06	0.02	0.08
Left Cheek	LTE BAND 17(1RB)	0.09	0.04	0.13
Left Tilt	LTE BAND 17(1RB)	0.04	0.03	0.07
Right Cheek	LTE BAND 38(1RB)	0.07	0.01	0.08
Right Tilt	LTE BAND 38(1RB)	0.09	0.02	0.11
Left Cheek	LTE BAND 38(1RB)	0.11	0.04	0.15
Left Tilt	LTE BAND 38(1RB)	0.03	0.03	0.06
Right Cheek	LTE BAND 40a(1RB)	0.14	0.01	0.15
Right Tilt	LTE BAND 40a(1RB)	0.03	0.02	0.05
Left Cheek	LTE BAND 40a(1RB)	0.15	0.04	0.19
Left Tilt	LTE BAND 40a(1RB)	0.07	0.03	0.10
Right Cheek	LTE BAND 40b(1RB)	0.07	0.01	0.08
Right Tilt	LTE BAND 40b(1RB)	0.04	0.02	0.06
Left Cheek	LTE BAND 40b(1RB)	0.16	0.04	0.20
Left Tilt	LTE BAND 40b(1RB)	0.12	0.03	0.15
Right Cheek	LTE BAND 41(1RB)	0.03	0.01	0.04
Right Tilt	LTE BAND 41(1RB)	0.05	0.02	0.07
Left Cheek	LTE BAND 41(1RB)	0.09	0.04	0.13
Left Tilt	LTE BAND 41(1RB)	0.03	0.03	0.06

WWAN and 5G WIFI

Position	WWAN (maximum)		5G WIFI	Summed SAR (W/kg)
	Band	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Right Cheek	GPRS850	0.06	0.07	0.13
Right Tilt	GPRS850	0.02	0.05	0.07
Left Cheek	GPRS850	0.05	0.18	0.23
Left Tilt	GPRS850	0.02	0.14	0.16
Right Cheek	GPRS1900	0.01	0.07	0.08
Right Tilt	GPRS1900	0.01	0.05	0.06
Left Cheek	GPRS1900	0.01	0.18	0.19
Left Tilt	GPRS1900	0.01	0.14	0.15
Right Cheek	WCDMA Band V	0.30	0.07	0.37
Right Tilt	WCDMA Band V	0.13	0.05	0.18
Left Cheek	WCDMA Band V	0.24	0.18	0.42
Left Tilt	WCDMA Band V	0.12	0.14	0.26
Right Cheek	WCDMA Band II	0.07	0.07	0.14
Right Tilt	WCDMA Band II	0.06	0.05	0.11
Left Cheek	WCDMA Band II	0.11	0.18	0.29
Left Tilt	WCDMA Band II	0.04	0.14	0.18
Right Cheek	LTE BAND 2(1RB)	0.14	0.07	0.21

Right Tilt	LTE BAND 2(1RB)	0.13	0.05	0.18
Left Cheek	LTE BAND 2(1RB)	0.16	0.18	0.34
Left Tilt	LTE BAND 2(1RB)	0.13	0.14	0.27
Right Cheek	LTE BAND 4(1RB)	0.05	0.07	0.12
Right Tilt	LTE BAND 4(1RB)	0.03	0.05	0.08
Left Cheek	LTE BAND 4(1RB)	0.08	0.18	0.26
Left Tilt	LTE BAND 4(1RB)	0.06	0.14	0.20
Right Cheek	LTE BAND 5(1RB)	0.33	0.07	0.40
Right Tilt	LTE BAND 5(1RB)	0.16	0.05	0.21
Left Cheek	LTE BAND 5(1RB)	0.28	0.18	0.46
Left Tilt	LTE BAND 5(1RB)	0.15	0.14	0.29
Right Cheek	LTE BAND 7(1RB)	0.14	0.07	0.21
Right Tilt	LTE BAND 7(1RB)	0.13	0.05	0.18
Left Cheek	LTE BAND 7(1RB)	0.16	0.18	0.34
Left Tilt	LTE BAND 7(1RB)	0.13	0.14	0.27
Right Cheek	LTE BAND 12(1RB)	0.12	0.07	0.19
Right Tilt	LTE BAND 12(1RB)	0.09	0.05	0.14
Left Cheek	LTE BAND 12(1RB)	0.09	0.18	0.27
Left Tilt	LTE BAND 12(1RB)	0.03	0.14	0.17
Right Cheek	LTE BAND 17(1RB)	0.11	0.07	0.18
Right Tilt	LTE BAND 17(1RB)	0.06	0.05	0.11
Left Cheek	LTE BAND 17(1RB)	0.09	0.18	0.27
Left Tilt	LTE BAND 17(1RB)	0.04	0.14	0.18
Right Cheek	LTE BAND 38(1RB)	0.07	0.07	0.14
Right Tilt	LTE BAND 38(1RB)	0.09	0.05	0.14
Left Cheek	LTE BAND 38(1RB)	0.11	0.18	0.29
Left Tilt	LTE BAND 38(1RB)	0.03	0.14	0.17
Right Cheek	LTE BAND 40a(1RB)	0.14	0.07	0.21
Right Tilt	LTE BAND 40a(1RB)	0.03	0.05	0.08
Left Cheek	LTE BAND 40a(1RB)	0.15	0.18	0.33
Left Tilt	LTE BAND 40a(1RB)	0.07	0.14	0.21
Right Cheek	LTE BAND 40b(1RB)	0.07	0.07	0.14
Right Tilt	LTE BAND 40b(1RB)	0.04	0.05	0.09
Left Cheek	LTE BAND 40b(1RB)	0.16	0.18	0.34
Left Tilt	LTE BAND 40b(1RB)	0.12	0.14	0.26
Right Cheek	LTE BAND 41(1RB)	0.03	0.07	0.10
Right Tilt	LTE BAND 41(1RB)	0.05	0.05	0.10
Left Cheek	LTE BAND 41(1RB)	0.09	0.18	0.27
Left Tilt	LTE BAND 41(1RB)	0.03	0.14	0.17

WWAN and BT

Position	WWAN (maximum)		BT	Summed SAR (W/kg)
	Band	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Right Cheek	GSM850	0.06	0.26	0.32
Left Cheek	GSM1900	0.01	0.26	0.27
Right Cheek	WCDMA Band V	0.30	0.26	0.56
Left Cheek	WCDMA Band II	0.11	0.26	0.37
Left Cheek	LTE BAND 2(1RB)	0.16	0.26	0.42
Left Cheek	LTE BAND 4(1RB)	0.08	0.26	0.34
Right Cheek	LTE BAND 5(1RB)	0.33	0.26	0.59
Left Cheek	LTE BAND 7(1RB)	0.16	0.26	0.42
Right Cheek	LTE BAND 12(1RB)	0.12	0.26	0.38
Right Cheek	LTE BAND 17(1RB)	0.11	0.26	0.37
Left Cheek	LTE BAND 38(1RB)	0.11	0.26	0.37
Left Cheek	LTE BAND 40a(1RB)	0.15	0.26	0.41
Left Cheek	LTE BAND 40b(1RB)	0.16	0.26	0.42
Left Cheek	LTE BAND 41(1RB)	0.09	0.26	0.35

Remark: BT the 1g SAR value are not being captured by the measurement system, the 1g-SAR value are conservatively used for simultaneous transmission analysis.

Body SAR /Hotspot SAR Simultaneous WWAN and 2.4G WIFI

Position	WWAN (maximum)		2.4G WIFI	RFID	Summed SAR (W/kg)
	Band	Scaled SAR (W/kg)	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Front	GPRS850	0.51	0.06	0.16	0.73
Back		--	--	0.14	0.14
Front	GPRS1900	0.55	0.06	0.16	0.77
Back		--	--	0.14	0.14
Front	WCDMA Band V	0.31	0.06	0.16	0.53
Back		--	--	0.14	0.14
Front	WCDMA Band II	0.41	0.06	0.16	0.53
Back		--	--	0.14	0.14
Front	LTE BAND 2(1RB)	0.33	0.06	0.16	0.65
Back		--	--	0.14	0.14
Front	LTE BAND 4(1RB)	0.27	0.06	0.16	0.49
Back		--	--	0.14	0.14
Front	LTE BAND 5(1RB)	0.26	0.06	0.16	0.48
Back		--	--	0.14	0.14
Front	LTE BAND 7(1RB)	0.16	0.06	0.16	0.38
Back		--	--	0.14	0.14
Front	LTE BAND 12(1RB)	0.06	0.06	0.16	0.28
Back		--	--	0.14	0.14
Front	LTE BAND 17(1RB)	0.06	0.06	0.16	0.28
Back		--	--	0.14	0.14
Front	LTE BAND 38(1RB)	0.03	0.06	0.16	0.25
Back		--	--	0.14	0.14
Front	LTE BAND 40a(1RB)	0.20	0.06	0.16	0.42
Back		--	--	0.14	0.14
Front	LTE BAND 40b(1RB)	0.15	0.06	0.16	0.37
Back		--	--	0.14	0.14
Front	LTE BAND 41(1RB)	0.05	0.06	0.16	0.27
Back		--	--	0.14	0.14

WWAN and 5G WIFI

Position	WWAN (maximum)		5G WIFI	RFID	Summed SAR (W/kg)
	Band	Scaled SAR (W/kg)	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Front	GPRS850	0.51	0.17	0.16	0.84
Back		--	--	0.14	0.14
Front	GPRS1900	0.55	0.17	0.16	0.88
Back		--	--	0.14	0.14
Front	WCDMA Band V	0.31	0.17	0.16	0.64
Back		--	--	0.14	0.14
Front	WCDMA Band II	0.41	0.17	0.16	0.74
Back		--	--	0.14	0.14
Front	LTE BAND 2(1RB)	0.33	0.17	0.16	0.66
Back		--	--	0.14	0.14
Front	LTE BAND 4(1RB)	0.27	0.17	0.16	0.60
Back		--	--	0.14	0.14
Front	LTE BAND 5(1RB)	0.26	0.17	0.16	0.59
Back		--	--	0.14	0.14
Front	LTE BAND 7(1RB)	0.16	0.17	0.16	0.49
Back		--	--	0.14	0.14
Front	LTE BAND 12(1RB)	0.06	0.17	0.16	0.39
Back		--	--	0.14	0.14
Front	LTE BAND 17(1RB)	0.06	0.17	0.16	0.39
Back		--	--	0.14	0.14
Front	LTE BAND 38(1RB)	0.03	0.17	0.16	0.36
Back		--	--	0.14	0.14
Front	LTE BAND 40a(1RB)	0.20	0.17	0.16	0.53
Back		--	--	0.14	0.14
Front	LTE BAND 40b(1RB)	0.15	0.17	0.16	0.48
Back		--	--	0.14	0.14
Front	LTE BAND 41(1RB)	0.05	0.17	0.16	0.38
Back		--	--	0.14	0.14

WWAN and BT

Position	WWAN (maximum)		BT	RFID	Summed SAR (W/kg)
	Band	Scaled SAR (W/kg)	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Front	GPRS850	0.51	0.13	0.16	0.80
Back		--	0.13	0.14	0.27
Front	GPRS1900	0.55	0.13	0.16	0.84
Back		--	0.13	0.14	0.27
Front	WCDMA Band V	0.31	0.13	0.16	0.60
Back		--	0.13	0.14	0.27
Front	WCDMA Band II	0.41	0.13	0.16	0.70
Back		--	0.13	0.14	0.27
Front	LTE BAND 2(1RB)	0.33	0.13	0.16	0.62
Back		--	0.13	0.14	0.27
Front	LTE BAND 4(1RB)	0.27	0.13	0.16	0.56
Back		--	0.13	0.14	0.27
Front	LTE BAND 5(1RB)	0.26	0.13	0.16	0.54
Back		--	0.13	0.14	0.27
Front	LTE BAND 7(1RB)	0.16	0.13	0.16	0.45
Back		--	0.13	0.14	0.27
Front	LTE BAND 12(1RB)	0.06	0.13	0.16	0.35
Back		--	0.13	0.14	0.27
Front	LTE BAND 17(1RB)	0.06	0.13	0.16	0.35
Back		--	0.13	0.14	0.27
Front	LTE BAND 38(1RB)	0.03	0.13	0.16	0.32
Back		--	0.13	0.14	0.27
Front	LTE BAND 40a(1RB)	0.20	0.13	0.16	0.49
Back		--	0.13	0.14	0.27
Front	LTE BAND 40b(1RB)	0.15	0.13	0.16	0.44
Back		--	0.13	0.14	0.27
Front	LTE BAND 41(1RB)	0.05	0.13	0.16	0.34
Back		--	0.13	0.14	0.27

Remark: BT the 1g SAR value are not being captured by the measurement system, the 1g-SAR value are conservatively used for simultaneous transmission analysis.

Hotspot SAR Simultaneous WWAN and 2.4G WIFI

Position	WWAN (maximum)		2.4G WIFI	RFID	Summed SAR (W/kg)
	Band	Scaled SAR (W/kg)	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Front	GPRS850	0.50	0.05	0.16	0.71
Back		--	--	0.14	0.14
Right		0.42	0.01	0.22	0.65
Left		0.29	0.03	0.24	0.56
Top		--	0.01	0.35	0.36
Bottom		0.73	--	0.11	0.84
Front	GPRS1900	0.49	0.05	0.16	0.70
Back		--	--	0.14	0.14
Right		0.38	0.01	0.22	0.61
Left		0.24	0.03	0.24	0.51
Top		--	0.01	0.35	0.36
Bottom		1.14	--	0.11	1.25
Front	WCDMA Band V	0.30	0.05	0.16	0.51
Back		--	--	0.14	0.14
Right		0.13	0.01	0.22	0.36
Left		0.14	0.03	0.24	0.41
Top		--	0.01	0.35	0.36
Bottom		0.32	--	0.11	0.43
Front	WCDMA Band II	0.31	0.05	0.16	0.52
Back		--	--	0.14	0.14
Right		0.41	0.01	0.22	0.64
Left		0.16	0.03	0.24	0.43
Top		--	0.01	0.35	0.36
Bottom		0.86	--	0.11	0.97
Front	LTE BAND 2(1RB)	0.26	0.05	0.16	0.47
Back		--	--	0.14	0.14
Right		0.76	0.01	0.22	0.99
Left		0.20	0.03	0.24	0.47
Top		--	0.01	0.35	0.36
Bottom		1.02	--	0.11	1.13
Front	LTE BAND 4(1RB)	0.22	0.05	0.16	0.43
Back		--	--	0.14	0.14
Right		0.33	0.01	0.22	0.56
Left		0.15	0.03	0.24	0.42
Top		--	0.01	0.35	0.36
Bottom		0.42	--	0.11	0.53
Front	LTE BAND 5(1RB)	0.25	0.05	0.16	0.46
Back		--	--	0.14	0.14
Right		0.18	0.01	0.22	0.41
Left		0.14	0.03	0.24	0.41
Top		--	0.01	0.35	0.36
Bottom		0.34	--	0.11	0.45

Front	LTE BAND 7(1RB)	0.15	0.05	0.16	0.36
Back		--	--	0.14	0.14
Right		0.11	0.01	0.22	0.34
Left		0.02	0.03	0.24	0.29
Top		--	0.01	0.35	0.36
Bottom		0.20	--	0.11	0.31
Front	LTE BAND 12(1RB)	0.04	0.05	0.16	0.25
Back		--	--	0.14	0.14
Right		0.03	0.01	0.22	0.26
Left		0.01	0.03	0.24	0.28
Top		--	0.01	0.35	0.36
Bottom		0.12	--	0.11	0.23
Front	LTE BAND 17(1RB)	0.06	0.05	0.16	0.27
Back		--	--	0.14	0.14
Right		0.03	0.01	0.22	0.26
Left		0.02	0.03	0.24	0.29
Top		--	0.01	0.35	0.36
Bottom		0.11	--	0.11	0.22
Front	LTE BAND 38(1RB)	0.01	0.05	0.16	0.22
Back		--	--	0.14	0.14
Right		0.03	0.01	0.22	0.26
Left		0.04	0.03	0.24	0.31
Top		--	0.01	0.35	0.36
Bottom		0.13	--	0.11	0.24
Front	LTE BAND 40a(1RB)	0.18	0.05	0.16	0.39
Back		--	--	0.14	0.14
Right		0.06	0.01	0.22	0.29
Left		0.04	0.03	0.24	0.31
Top		--	0.01	0.35	0.36
Bottom		0.29	--	0.11	0.40
Front	LTE BAND 40b(1RB)	0.14	0.05	0.16	0.35
Back		--	--	0.14	0.14
Right		0.10	0.01	0.22	0.33
Left		0.03	0.03	0.24	0.30
Top		--	0.01	0.35	0.36
Bottom		0.25	--	0.11	0.36
Front	LTE BAND 41(1RB)	0.05	0.05	0.16	0.26
Back		--	--	0.14	0.14
Right		0.02	0.01	0.22	0.25
Left		0.02	0.03	0.24	0.29
Top		--	0.01	0.35	0.36
Bottom		0.15	--	0.11	0.26

WWAN and 5G WIFI

Position	WWAN (maximum)		5G WIFI	RFID	Summed SAR (W/kg)
	Band	Scaled SAR (W/kg)	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Front	GPRS850	0.50	0.17	0.16	0.83
Back		--	--	0.14	0.14
Right		0.42	--	0.22	0.64
Left		0.29	0.16	0.24	0.69
Top		--	0.11	0.35	0.46
Bottom		0.73	--	0.11	0.84
Front	GPRS1900	0.49	0.17	0.16	0.82
Back		--	--	0.14	0.14
Right		0.38	--	0.22	0.60
Left		0.24	0.16	0.24	0.64
Top		--	0.11	0.35	0.46
Bottom		1.14	--	0.11	1.25
Front	WCDMA Band V	0.30	0.17	0.16	0.63
Back		--	--	0.14	0.14
Right		0.13	--	0.22	0.35
Left		0.14	0.16	0.24	0.54
Top		--	0.11	0.35	0.46
Bottom		0.32	--	0.11	0.43
Front	WCDMA Band II	0.31	0.17	0.16	0.64
Back		--	--	0.14	0.14
Right		0.41	--	0.22	0.63
Left		0.16	0.16	0.24	0.56
Top		--	0.11	0.35	0.46
Bottom		0.86	--	0.11	0.97
Front	LTE BAND 2(1RB)	0.26	0.17	0.16	0.59
Back		--	--	0.14	0.14
Right		0.76	--	0.22	0.98
Left		0.20	0.16	0.24	0.60
Top		--	0.11	0.35	0.46
Bottom		1.02	--	0.11	1.13
Front	LTE BAND 4(1RB)	0.22	0.17	0.16	0.55
Back		--	--	0.14	0.14
Right		0.33	--	0.22	0.55
Left		0.15	0.16	0.24	0.55
Top		--	0.11	0.35	0.46
Bottom		0.42	--	0.11	0.53
Front	LTE BAND 5(1RB)	0.25	0.17	0.16	0.58
Back		--	--	0.14	0.14
Right		0.18	--	0.22	0.40
Left		0.14	0.16	0.24	0.54
Top		--	0.11	0.35	0.46
Bottom		0.34	--	0.11	0.45
Front	LTE BAND 7(1RB)	0.15	0.17	0.16	0.48
Back		--	--	0.14	0.14

Right		0.11	--	0.22	0.33
Left		0.02	0.16	0.24	0.42
Top		--	0.11	0.35	0.46
Bottom		0.20	--	0.11	0.31
Front	LTE BAND 12(1RB)	0.04	0.17	0.16	0.37
Back		--	--	0.14	0.14
Right		0.03	--	0.22	0.25
Left		0.01	0.16	0.24	0.41
Top		--	0.11	0.35	0.46
Bottom		0.12	--	0.11	0.23
Front	LTE BAND 17(1RB)	0.06	0.17	0.16	0.39
Back		--	--	0.14	0.14
Right		0.03	--	0.22	0.25
Left		0.02	0.16	0.24	0.42
Top		--	0.11	0.35	0.46
Bottom		0.11	--	0.11	0.22
Front	LTE BAND 38(1RB)	0.01	0.17	0.16	0.34
Back		--	--	0.14	0.14
Right		0.03	--	0.22	0.25
Left		0.04	0.16	0.24	0.44
Top		--	0.11	0.35	0.46
Bottom		0.13	--	0.11	0.24
Front	LTE BAND 40a(1RB)	0.18	0.17	0.16	0.51
Back		--	--	0.14	0.14
Right		0.06	--	0.22	0.28
Left		0.04	0.16	0.24	0.44
Top		--	0.11	0.35	0.46
Bottom		0.29	--	0.11	0.40
Front	LTE BAND 40b(1RB)	0.14	0.17	0.16	0.47
Back		--	--	0.14	0.14
Right		0.10	--	0.22	0.32
Left		0.03	0.16	0.24	0.43
Top		--	0.11	0.35	0.46
Bottom		0.25	--	0.11	0.36
Front	LTE BAND 41(1RB)	0.05	0.17	0.16	0.38
Back		--	--	0.14	0.14
Right		0.02	--	0.22	0.24
Left		0.02	0.16	0.24	0.42
Top		--	0.11	0.35	0.46
Bottom		0.15	--	0.11	0.26

WWAN and BT

Position	WWAN (maximum)		BT	RFID	Summed SAR (W/kg)
	Band	Scaled SAR (W/kg)	Scaled SAR (W/kg)	Scaled SAR (W/kg)	
Front	GPRS850	0.50	0.13	0.16	0.79
Back		--	0.13	0.14	0.27
Right		0.42	0.13	0.22	0.77
Left		0.29	0.13	0.24	0.66
Top		--	0.13	0.35	0.48
Bottom		0.73	0.13	0.11	0.97
Front	GPRS1900	0.49	0.13	0.16	0.78
Back		--	0.13	0.14	0.27
Right		0.38	0.13	0.22	0.73
Left		0.24	0.13	0.24	0.61
Top		--	0.13	0.35	0.48
Bottom		1.14	0.13	0.11	1.38
Front	WCDMA Band V	0.30	0.13	0.16	0.59
Back		--	0.13	0.14	0.27
Right		0.13	0.13	0.22	0.48
Left		0.14	0.13	0.24	0.51
Top		--	0.13	0.35	0.48
Bottom		0.32	0.13	0.11	0.56
Front	WCDMA Band II	0.31	0.13	0.16	0.60
Back		--	0.13	0.14	0.27
Right		0.41	0.13	0.22	0.76
Left		0.16	0.13	0.24	0.53
Top		--	0.13	0.35	0.48
Bottom		0.86	0.13	0.11	1.10
Front	LTE BAND 2(1RB)	0.26	0.13	0.16	0.55
Back		--	0.13	0.14	0.27
Right		0.76	0.13	0.22	1.11
Left		0.20	0.13	0.24	0.57
Top		--	0.13	0.35	0.48
Bottom		1.02	0.13	0.11	1.26
Front	LTE BAND 4(1RB)	0.22	0.13	0.16	0.51
Back		--	0.13	0.14	0.27
Right		0.33	0.13	0.22	0.68
Left		0.15	0.13	0.24	0.52
Top		--	0.13	0.35	0.48
Bottom		0.42	0.13	0.11	0.66
Front	LTE BAND 5(1RB)	0.25	0.13	0.16	0.54
Back		--	0.13	0.14	0.27
Right		0.18	0.13	0.22	0.53
Left		0.14	0.13	0.24	0.51
Top		--	0.13	0.35	0.48
Bottom		0.34	0.13	0.11	0.58
Front	LTE BAND 7(1RB)	0.15	0.13	0.16	0.44

Back		--	0.13	0.14	0.27
Right		0.11	0.13	0.22	0.46
Left		0.02	0.13	0.24	0.39
Top		--	0.13	0.35	0.48
Bottom		0.20	0.13	0.11	0.44
Front	LTE BAND 12(1RB)	0.04	0.13	0.16	0.33
Back		--	0.13	0.14	0.27
Right		0.03	0.13	0.22	0.38
Left		0.01	0.13	0.24	0.38
Top		--	0.13	0.35	0.48
Bottom		0.12	0.13	0.11	0.36
Front	LTE BAND 17(1RB)	0.06	0.13	0.16	0.35
Back		--	0.13	0.14	0.27
Right		0.03	0.13	0.22	0.38
Left		0.02	0.13	0.24	0.39
Top		--	0.13	0.35	0.48
Bottom		0.11	0.13	0.11	0.35
Front	LTE BAND 38(1RB)	0.01	0.13	0.16	0.30
Back		--	0.13	0.14	0.27
Right		0.03	0.13	0.22	0.38
Left		0.04	0.13	0.24	0.41
Top		--	0.13	0.35	0.48
Bottom		0.13	0.13	0.11	0.37
Front	LTE BAND 40a(1RB)	0.18	0.13	0.16	0.47
Back		--	0.13	0.14	0.27
Right		0.06	0.13	0.22	0.41
Left		0.04	0.13	0.24	0.41
Top		--	0.13	0.35	0.48
Bottom		0.29	0.13	0.11	0.53
Front	LTE BAND 40b(1RB)	0.14	0.13	0.16	0.43
Back		--	0.13	0.14	0.27
Right		0.10	0.13	0.22	0.45
Left		0.03	0.13	0.24	0.40
Top		--	0.13	0.35	0.48
Bottom		0.25	0.13	0.11	0.49
Front	LTE BAND 41(1RB)	0.05	0.13	0.16	0.34
Back		--	0.13	0.14	0.27
Right		0.02	0.13	0.22	0.37
Left		0.02	0.13	0.24	0.39
Top		--	0.13	0.35	0.48
Bottom		0.15	0.13	0.11	0.39

Remark: BT the 1g SAR value are not being captured by the measurement system, the 1g-SAR value are conservatively used for simultaneous transmission analysis.

16 SAR Measurement Reference

References

1. FCC 47 CFR Part 2 “Frequency Allocations and Radio Treaty Matters; General Rules and Regulations”
2. IEEE Std. C95.1-2005, “IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3kHz to 300GHz”, 2005
3. IEEE Std. 1528-2013, “IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques”, June 2013
4. IEC 62209-2, “Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices—Human models, instrumentation, and procedures – Part 2: Procedure to determine the specific absorption rate(SAR) for wireless communication devices used in close proximity to the human body(frequency range of 30MHz to 6GHz)”, April 2010
5. FCC KDB 447498 D01 v06, “Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies”, Oct 23th, 2015
6. FCC KDB 941225 D01 v03r01, “3G SAR Measurement Procedures”, Oct 23th, 2015
7. FCC KDB 941225 D05 v02r05, “SAR Evaluation Considerations for LTE Devices”, Dec 16th, 2015
8. FCC KDB 941225 D06 v02r01, “SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities”, Oct 23th, 2015
9. FCC KDB865664 D01 v01r04, “SAR Measurement Requirements 100MHz to 6GHz”, Aug 7th, 2015
10. FCC KDB865664 D02 v01r02, “RF Exposure Compliance Reporting and Documentation Considerations ”, Oct 23th, 2015
11. FCC KDB648474 D04 v01r03, “SAR Evaluation Considerations for Wireless Handsets”, Oct 23th, 2015
12. FCC KDB 248227 D01 v02r02, SAR Guidance for IEEE 802.11 (Wi-Fi) Transmitters, Oct 23th, 2015.

17 Maximum SAR measurement Plots

Plot 1

Communication System: UID 0, Generic GSM (0); Communication System Band: GPRS 850 (824.0 -849.0 MHz); Frequency: 848.8 MHz; Communication System PAR: 9.191 dB; PMF: 2.88104

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.899$ S/m; $\epsilon_r = 41.325$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: ES3DV3 - SN3089; ConvF(6.28, 6.28, 6.28) @ 848.8 MHz; Calibrated: 2024/7/4

Modulation Compensation:

Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -16.0, 32.0$

Electronics: DAE4 Sn881; Calibrated: 2024/7/4

Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1410

DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

KA25012101303 FCC ID Portable handset/R-Check/Area Scan (11x21x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.0546 W/kg

KA25012101303 FCC ID Portable handset/R-Check/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 5.120 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.0760 W/kg

SAR(1 g) = 0.053 W/kg; SAR(10 g) = 0.040 W/kg

Ratio of SAR at M2 to SAR at M1 = 76.3%

Maximum value of SAR (measured) = 0.0569 W/kg

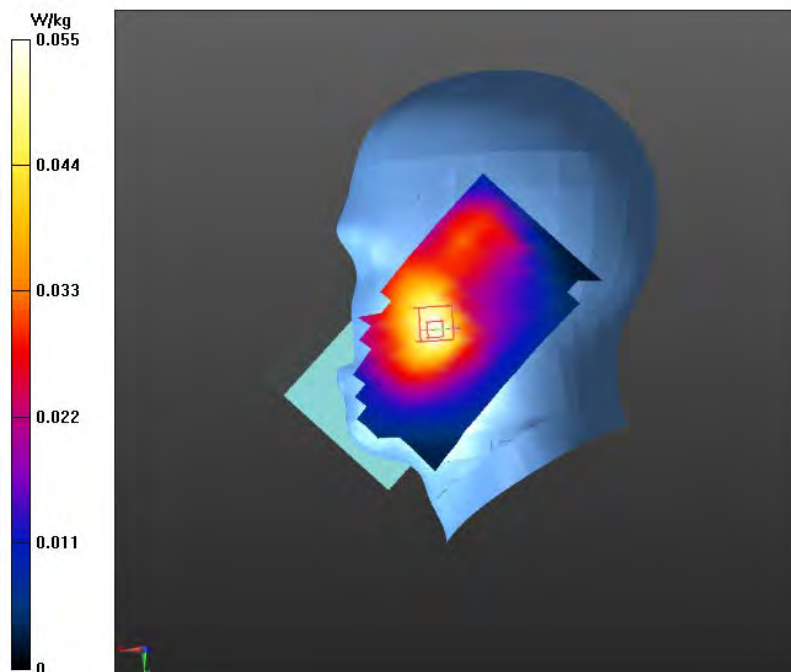

Plot 2

Communication System: UID 0, Generic GSM (0); Communication System Band: GPRS 850 (824.0 -849.0 MHz); Frequency: 848.8 MHz; Communication System PAR: 9.191 dB; PMF: 2.88104

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.899$ S/m; $\epsilon_r = 41.325$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: ES3DV3 - SN3089; ConvF(6.28, 6.28, 6.28) @ 848.8 MHz; Calibrated: 2024/7/4

Modulation Compensation:

Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$

Electronics: DAE4 Sn881; Calibrated: 2024/7/4

Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1410

DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

KA25012101303 FCC ID Portable handset/Bottom/Area Scan (18x12x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.607 W/kg

KA25012101303 FCC ID Portable handset/Bottom/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 22.48 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 1.16 W/kg

SAR(1 g) = 0.600 W/kg; SAR(10 g) = 0.354 W/kg

Smallest distance from peaks to all points 3 dB below = 16.5 mm

Ratio of SAR at M2 to SAR at M1 = 57.3%

Maximum value of SAR (measured) = 0.653 W/kg

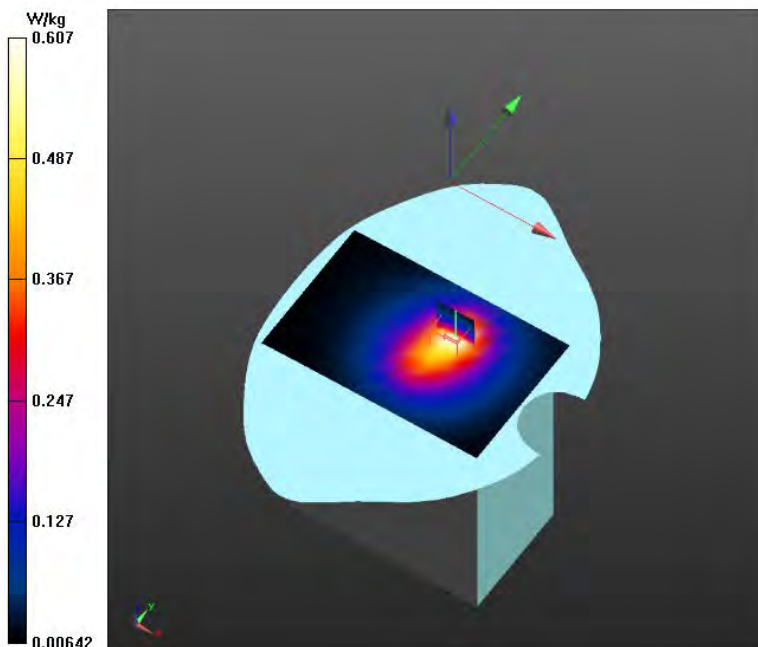

Plot 3


Communication System: UID 0, Generic GSM (0); Communication System Band: GPRS 1900 (1850.0 -1910 MHz); Frequency: 1909.8 MHz; Communication System PAR: 9.191 dB; PMF: 2.88104
Medium parameters used: $f = 1910$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 39.963$; $\rho = 1000$ kg/m³
Phantom section: Left Section
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: ES3DV3 - SN3089; ConvF(5.07, 5.07, 5.07) @ 1909.8 MHz; Calibrated: 2024/7/4
Modulation Compensation:
Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -16.0, 32.0$
Electronics: DAE4 Sn881; Calibrated: 2024/7/4
Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1119
DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

KA25012101303 FCC ID Portable handset/L-Check/Area Scan (21x11x1): Measurement grid: $dx=10$ mm, $dy=10$ mm
Maximum value of SAR (measured) = 0.00338 W/kg

KA25012101303 FCC ID Portable handset/L-Check/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 0.3610 V/m; Power Drift = 0.09 dB
Peak SAR (extrapolated) = 0.00565 W/kg
SAR(1 g) = 0.00316 W/kg; SAR(10 g) = 0.00181 W/kg
Ratio of SAR at M2 to SAR at M1 = 59.5%
Maximum value of SAR (measured) = 0.00393 W/kg

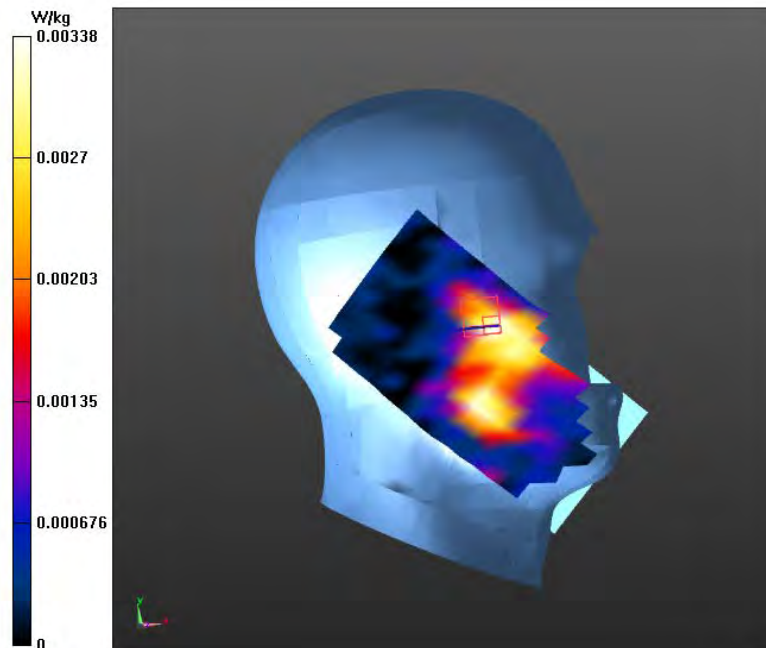

Plot 4

Communication System: UID 0, Generic GSM (0); Communication System Band: GPRS 1900 (1850.0 -1910 MHz); Frequency: 1909.8 MHz; Communication System PAR: 9.191 dB; PMF: 2.88104
Medium parameters used: $f = 1910$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 39.963$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: ES3DV3 - SN3089; ConvF(5.07, 5.07, 5.07) @ 1909.8 MHz; Calibrated: 2024/7/4
Modulation Compensation:
Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
Electronics: DAE4 Sn881; Calibrated: 2024/7/4
Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1119
DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

KA25012101303 FCC ID Portable handset/Bottom/Area Scan (18x12x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 1.12 W/kg

KA25012101303 FCC ID Portable handset/Bottom/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 30.00 V/m; Power Drift = -0.10 dB


Peak SAR (extrapolated) = 2.01 W/kg

SAR(1 g) = 1.06 W/kg; SAR(10 g) = 0.562 W/kg

Smallest distance from peaks to all points 3 dB below = 13.4 mm

Ratio of SAR at M2 to SAR at M1 = 54.1%

Maximum value of SAR (measured) = 1.19 W/kg

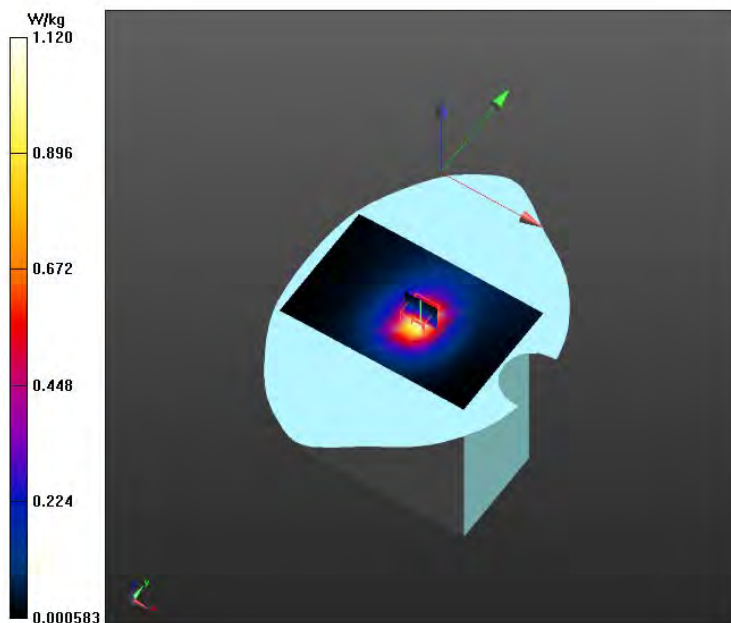

Plot 5

Communication System: UID 0, WCDMA (0); Communication System Band: WCDMA BAND5 RMC;
Frequency: 836.4 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005
Medium parameters used: $f = 836.41$ MHz; $\sigma = 0.89$ S/m; $\epsilon_r = 41.48$; $\rho = 1000$ kg/m³
Phantom section: Right Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: ES3DV3 - SN3089; ConvF(6.28, 6.28, 6.28) @ 836.4 MHz; Calibrated: 2024/7/4
Modulation Compensation:
Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -16.0, 32.0$
Electronics: DAE4 Sn881; Calibrated: 2024/7/4
Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1410
DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

KA25012101303 FCC ID Portable handset/R-Check/Area Scan (11x21x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.301 W/kg

KA25012101303 FCC ID Portable handset/R-Check/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 12.06 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.394 W/kg

SAR(1 g) = 0.287 W/kg; SAR(10 g) = 0.221 W/kg

Ratio of SAR at M2 to SAR at M1 = 78.1%

Maximum value of SAR (measured) = 0.305 W/kg

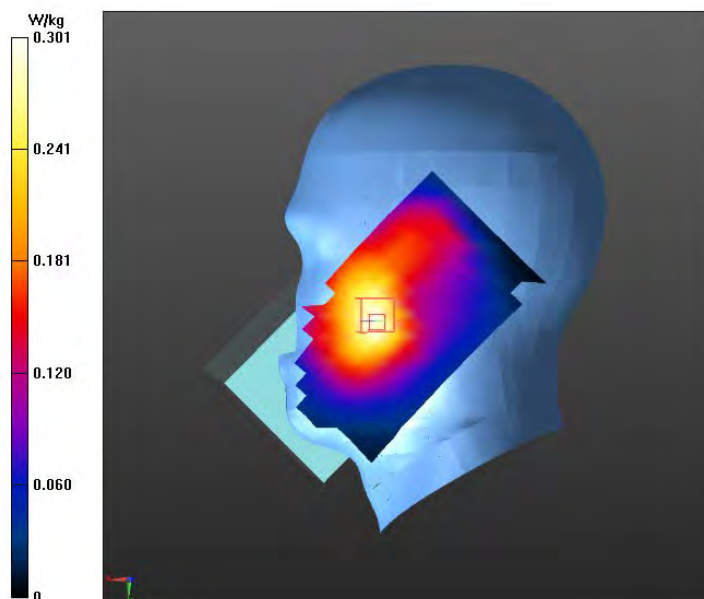

Plot 6

Communication System: UID 0, WCDMA (0); Communication System Band: WCDMA BAND5 RMC;
Frequency: 836.4 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005
Medium parameters used: $f = 836.41$ MHz; $\sigma = 0.89$ S/m; $\epsilon_r = 41.48$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: ES3DV3 - SN3089; ConvF(6.28, 6.28, 6.28) @ 836.4 MHz; Calibrated: 2024/7/4
Modulation Compensation:
Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
Electronics: DAE4 Sn881; Calibrated: 2024/7/4
Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1410
DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

KA25012101303 FCC ID Portable handset/Bottom/Area Scan (18x12x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.310 W/kg

KA25012101303 FCC ID Portable handset/Bottom/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 16.14 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 0.566 W/kg

SAR(1 g) = 0.310 W/kg; SAR(10 g) = 0.188 W/kg

Smallest distance from peaks to all points 3 dB below = 18.4 mm

Ratio of SAR at M2 to SAR at M1 = 59.5%

Maximum value of SAR (measured) = 0.338 W/kg

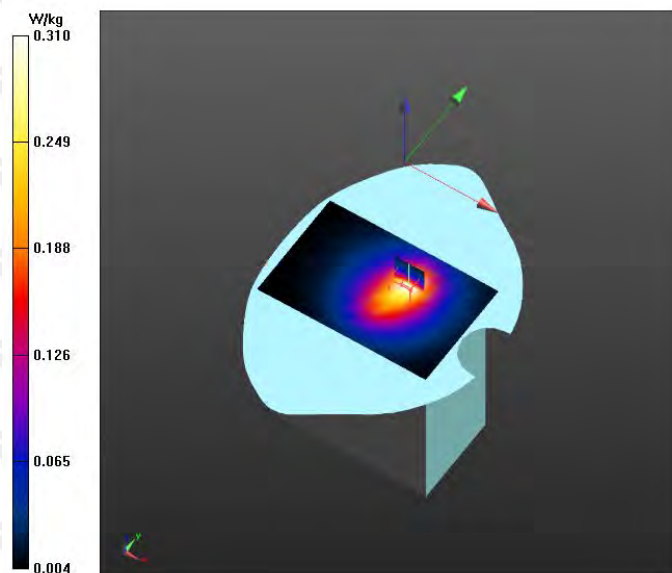

Plot 7

Communication System: UID 0, WCDMA (0); Communication System Band: WCDMA BAND2 RMC;
Frequency: 1907.6 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005
Medium parameters used: $f = 1908$ MHz; $\sigma = 1.358$ S/m; $\epsilon_r = 39.975$; $\rho = 1000$ kg/m³
Phantom section: Left Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: ES3DV3 - SN3089; ConvF(5.07, 5.07, 5.07) @ 1907.6 MHz; Calibrated: 2024/7/4
Modulation Compensation:
Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -16.0, 32.0$
Electronics: DAE4 Sn881; Calibrated: 2024/7/4
Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1119
DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

KA25012101303 FCC ID Portable handset/L-Check/Area Scan (21x11x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.0928 W/kg

KA25012101303 FCC ID Portable handset/L-Check/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 1.003 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.139 W/kg

SAR(1 g) = 0.085 W/kg; SAR(10 g) = 0.052 W/kg

Ratio of SAR at M2 to SAR at M1 = 63.7%

Maximum value of SAR (measured) = 0.0925 W/kg

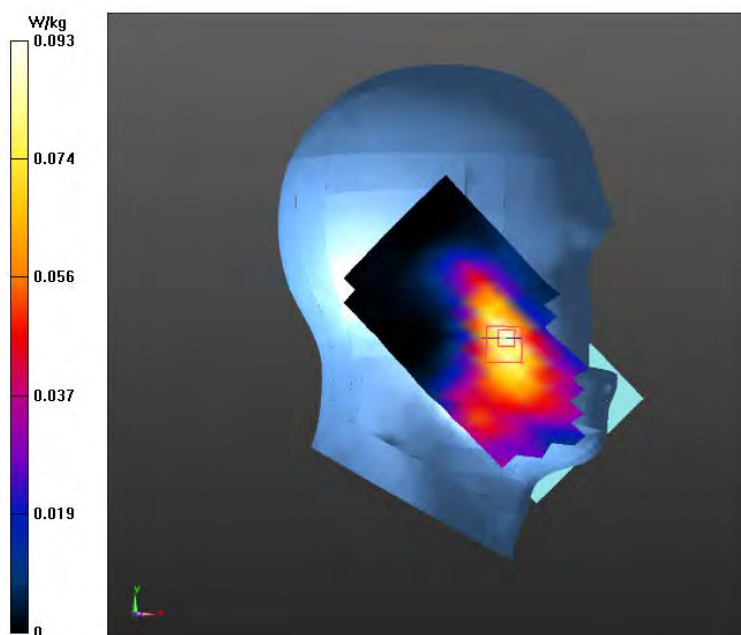

Plot 8

Communication System: UID 0, WCDMA (0); Communication System Band: WCDMA BAND2 RMC;
Frequency: 1907.6 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005
Medium parameters used: $f = 1908$ MHz; $\sigma = 1.358$ S/m; $\epsilon_r = 39.975$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: ES3DV3 - SN3089; ConvF(5.07, 5.07, 5.07) @ 1907.6 MHz; Calibrated: 2024/7/4
Modulation Compensation:
Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
Electronics: DAE4 Sn881; Calibrated: 2024/7/4
Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1119
DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

KA25012101303 FCC ID Portable handset/Bottom/Area Scan (18x12x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.719 W/kg

KA25012101303 FCC ID Portable handset/Bottom/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 23.44 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 1.22 W/kg

SAR(1 g) = 0.684 W/kg; SAR(10 g) = 0.372 W/kg

Smallest distance from peaks to all points 3 dB below = 14 mm

Ratio of SAR at M2 to SAR at M1 = 56.9%

Maximum value of SAR (measured) = 0.763 W/kg

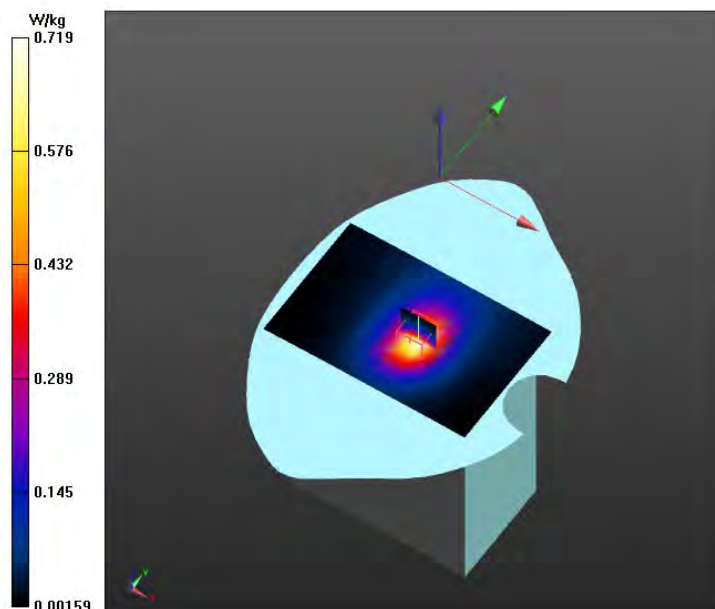

Plot 9

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 2, E-UTRA/FDD (1850.0 - 1910.0 MHz); Frequency: 1880 MHz; Communication System PAR: 0 dB; PMF: 1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.45$ S/m; $\epsilon_r = 39.74$; $\rho = 1000$ kg/m³
Phantom section: Left Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: ES3DV3 - SN3089; ConvF(5.07, 5.07, 5.07) @ 1880 MHz; Calibrated: 2024/7/4
Modulation Compensation:
Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -16.0, 32.0$
Electronics: DAE4 Sn881; Calibrated: 2024/7/4
Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1119
DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

KA25012101303 FCC ID Portable handset/L-Check/Area Scan (21x11x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.171 W/kg

KA25012101303 FCC ID Portable handset/L-Check/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.177 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 0.250 W/kg

SAR(1 g) = 0.159 W/kg; SAR(10 g) = 0.100 W/kg

Smallest distance from peaks to all points 3 dB below = 17.2 mm

Ratio of SAR at M2 to SAR at M1 = 65.5%

Maximum value of SAR (measured) = 0.174 W/kg

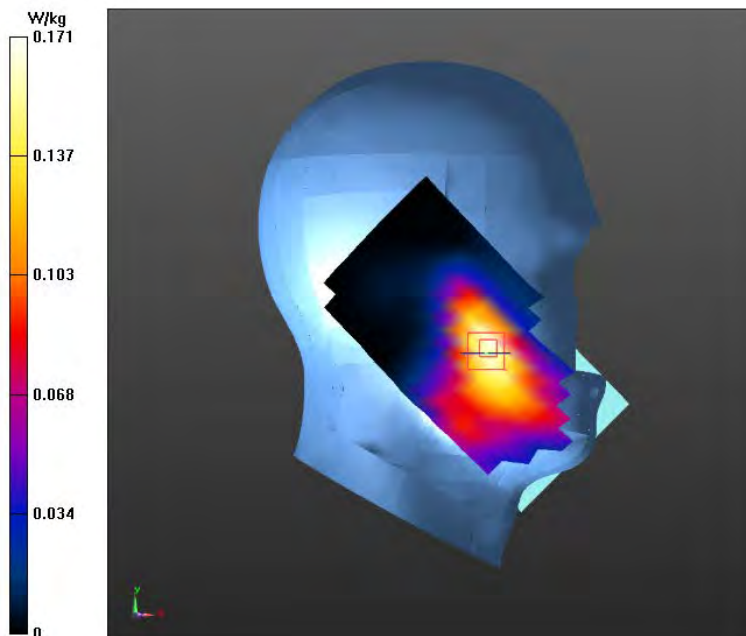

Plot 10

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 2, E-UTRA/FDD (1850.0 - 1910.0 MHz); Frequency: 1880 MHz; Communication System PAR: 0 dB; PMF: 1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.45$ S/m; $\epsilon_r = 39.74$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: ES3DV3 - SN3089; ConvF(5.07, 5.07, 5.07) @ 1880 MHz; Calibrated: 2024/7/4
Modulation Compensation:
Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
Electronics: DAE4 Sn881; Calibrated: 2024/7/4
Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1119
DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

KA25012101303 FCC ID Portable handset/Bottom/Area Scan (18x12x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 1.06 W/kg

KA25012101303 FCC ID Portable handset/Bottom/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 25.98 V/m; Power Drift = 0.16 dB


Peak SAR (extrapolated) = 1.79 W/kg

SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.559 W/kg

Smallest distance from peaks to all points 3 dB below = 14.2 mm

Ratio of SAR at M2 to SAR at M1 = 58.1%

Maximum value of SAR (measured) = 1.13 W/kg

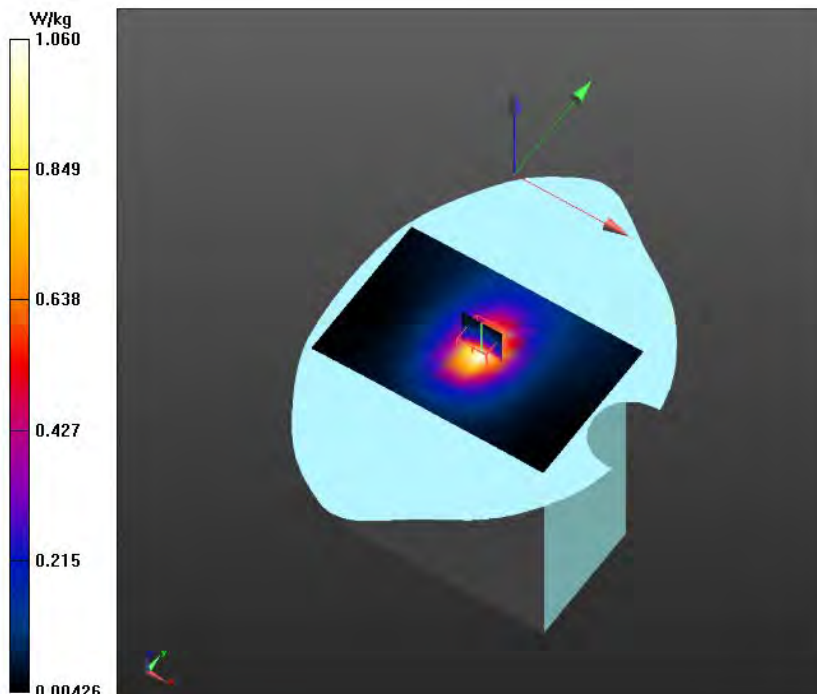

Plot 11

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 4, E-UTRA/FDD (1710.0 - 1755.0 MHz); Frequency: 1720 MHz; Communication System PAR: 0 dB; PMF: 1
Medium parameters used: $f = 1720$ MHz; $\sigma = 1.313$ S/m; $\epsilon_r = 41.368$; $\rho = 1000$ kg/m³
Phantom section: Left Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: ES3DV3 - SN3089; ConvF(5.35, 5.35, 5.35) @ 1720 MHz; Calibrated: 2024/7/4
Modulation Compensation:
Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -16.0, 32.0$
Electronics: DAE4 Sn881; Calibrated: 2024/7/4
Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1119
DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

KA25012101303 FCC ID Portable handset/L-Check/Area Scan (21x11x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.0822 W/kg

KA25012101303 FCC ID Portable handset/L-Check/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 1.585 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.124 W/kg

SAR(1 g) = 0.082 W/kg; SAR(10 g) = 0.052 W/kg

Ratio of SAR at M2 to SAR at M1 = 67.8%

Maximum value of SAR (measured) = 0.0881 W/kg

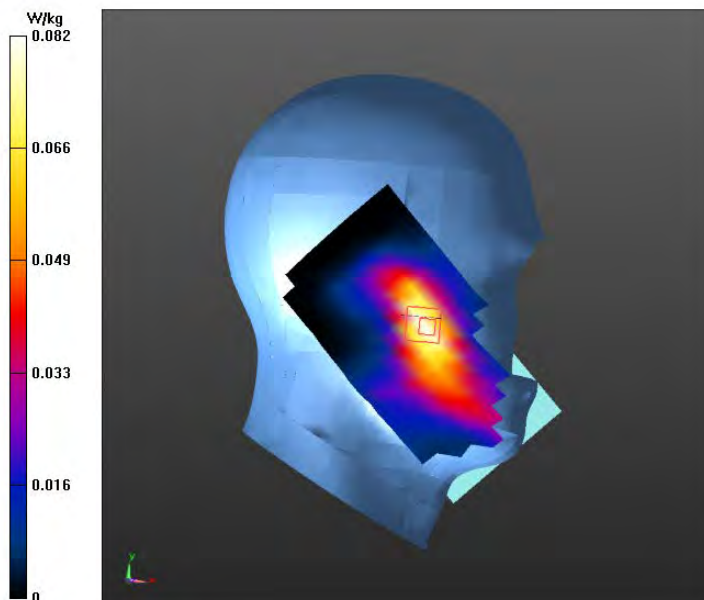

Plot 12

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 4, E-UTRA/FDD (1710.0 - 1755.0 MHz); Frequency: 1720 MHz; Communication System PAR: 0 dB; PMF: 1
Medium parameters used: $f = 1720$ MHz; $\sigma = 1.313$ S/m; $\epsilon_r = 41.368$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: ES3DV3 - SN3089; ConvF(5.35, 5.35, 5.35) @ 1720 MHz; Calibrated: 2024/7/4

Modulation Compensation:

Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$

Electronics: DAE4 Sn881; Calibrated: 2024/7/4

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1119

DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

KA25012101303 FCC ID Portable handset/Bottom/Area Scan (18x12x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.459 W/kg

KA25012101303 FCC ID Portable handset/Bottom/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 18.23 V/m; Power Drift = -0.10 dB


Peak SAR (extrapolated) = 0.706 W/kg

SAR(1 g) = 0.410 W/kg; SAR(10 g) = 0.232 W/kg

Smallest distance from peaks to all points 3 dB below = 14.3 mm

Ratio of SAR at M2 to SAR at M1 = 58.9%

Maximum value of SAR (measured) = 0.445 W/kg

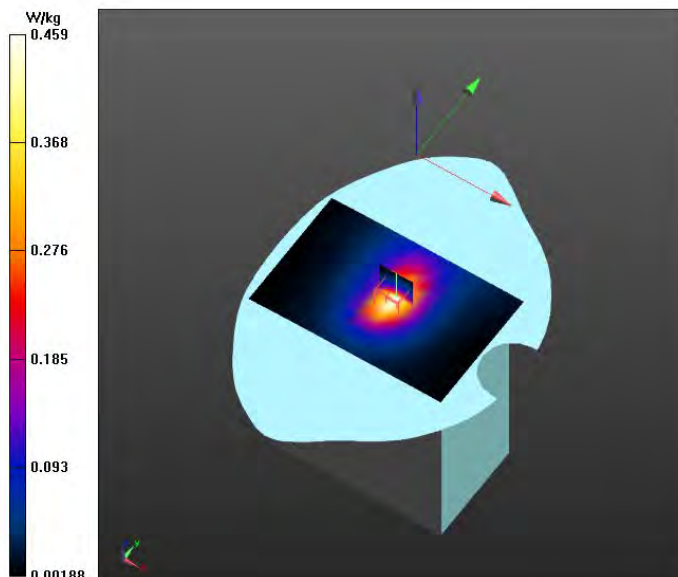

Plot 13

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 5, E-UTRA/FDD (824.0 - 849.0 MHz); Frequency: 844 MHz; Communication System PAR: 0 dB; PMF: 1
Medium parameters used (interpolated): $f = 844$ MHz; $\sigma = 0.896$ S/m; $\epsilon_r = 41.385$; $\rho = 1000$ kg/m³
Phantom section: Right Section
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: ES3DV3 - SN3089; ConvF(6.28, 6.28, 6.28) @ 844 MHz; Calibrated: 2024/7/4

Modulation Compensation:

Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -16.0, 32.0$

Electronics: DAE4 Sn881; Calibrated: 2024/7/4

Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1410

DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

KA25012101303 FCC ID Portable handset/R-Check/Area Scan (11x21x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.313 W/kg

KA25012101303 FCC ID Portable handset/R-Check/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 13.72 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.403 W/kg

SAR(1 g) = 0.294 W/kg; SAR(10 g) = 0.225 W/kg

Ratio of SAR at M2 to SAR at M1 = 77.8%

Maximum value of SAR (measured) = 0.312 W/kg

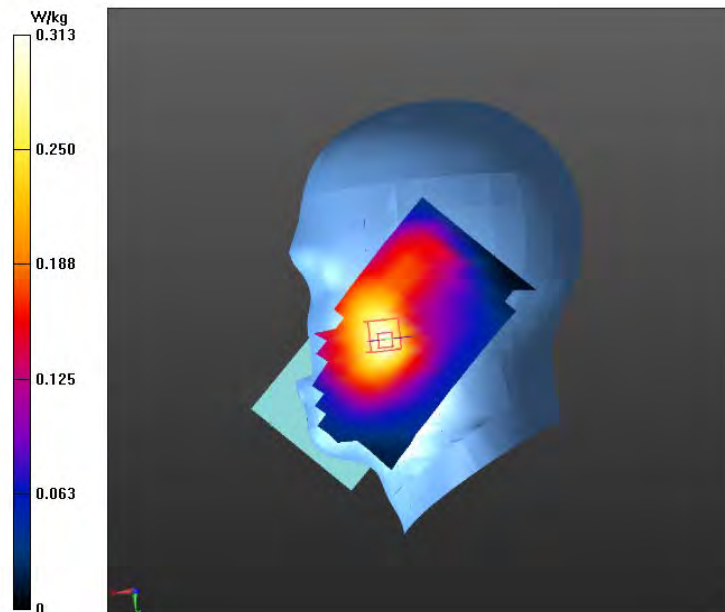

Plot 14

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 5, E-UTRA/FDD (824.0 - 849.0 MHz); Frequency: 844 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used (interpolated): $f = 844$ MHz; $\sigma = 0.896$ S/m; $\epsilon_r = 41.385$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: ES3DV3 - SN3089; ConvF(6.28, 6.28, 6.28) @ 844 MHz; Calibrated: 2024/7/4

Modulation Compensation:

Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$

Electronics: DAE4 Sn881; Calibrated: 2024/7/4

Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1410

DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

KA25012101303 FCC ID Portable handset/Bottom/Area Scan (18x12x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.320 W/kg

KA25012101303 FCC ID Portable handset/Bottom/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 16.36 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 0.535 W/kg

SAR(1 g) = 0.301 W/kg; SAR(10 g) = 0.185 W/kg

Smallest distance from peaks to all points 3 dB below = 18 mm

Ratio of SAR at M2 to SAR at M1 = 61.3%

Maximum value of SAR (measured) = 0.326 W/kg

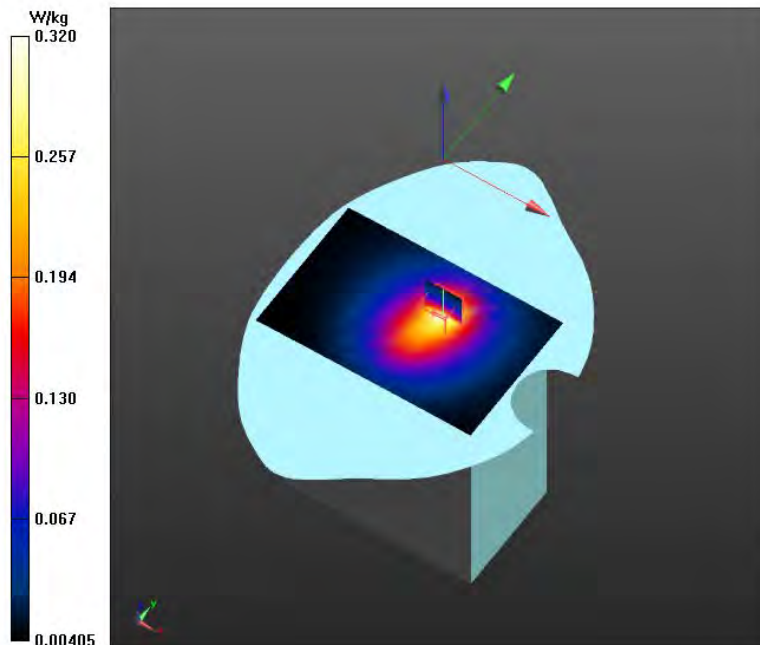

Plot 15

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 7, E-UTRA/FDD (2500.0 - 2570.0 MHz); Frequency: 2560 MHz; Communication System PAR: 0 dB; PMF: 1
Medium parameters used: $f = 2560$ MHz; $\sigma = 1.973$ S/m; $\epsilon_r = 38.995$; $\rho = 1000$ kg/m³
Phantom section: Left Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: ES3DV3 - SN3089; ConvF(4.57, 4.57, 4.57) @ 2560 MHz; Calibrated: 2024/7/4
Modulation Compensation:
Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -16.0, 32.0$
Electronics: DAE4 Sn881; Calibrated: 2024/7/4
Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1119
DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

KA25012101303 FCC ID Portable handset/L-Check/Area Scan (21x11x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.185 W/kg

KA25012101303 FCC ID Portable handset/L-Check/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.139 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 0.316 W/kg

SAR(1 g) = 0.156 W/kg; SAR(10 g) = 0.084 W/kg

Smallest distance from peaks to all points 3 dB below = 14.7 mm

Ratio of SAR at M2 to SAR at M1 = 50%

Maximum value of SAR (measured) = 0.167 W/kg

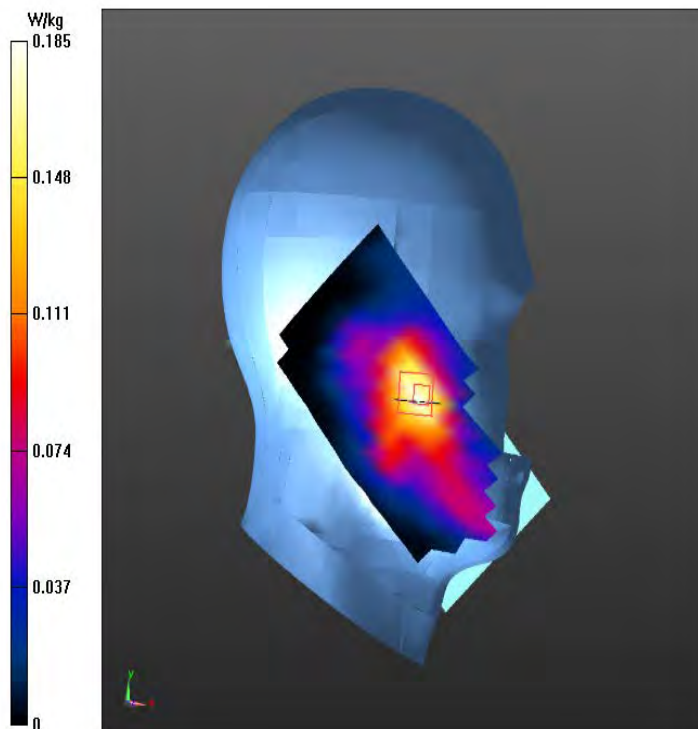

Plot 16

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 7, E-UTRA/FDD (2500.0 - 2570.0 MHz); Frequency: 2560 MHz; Communication System PAR: 0 dB; PMF: 1
Medium parameters used: $f = 2560$ MHz; $\sigma = 1.973$ S/m; $\epsilon_r = 38.995$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: ES3DV3 - SN3089; ConvF(4.57, 4.57, 4.57) @ 2560 MHz; Calibrated: 2024/7/4
Modulation Compensation:
Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
Electronics: DAE4 Sn881; Calibrated: 2024/7/4
Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1119
DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

KA25012101303 FCC ID Portable handset/Bottom/Area Scan (18x12x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.203 W/kg

KA25012101303 FCC ID Portable handset/Bottom/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 9.853 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.452 W/kg

SAR(1 g) = 0.201 W/kg; SAR(10 g) = 0.104 W/kg

Smallest distance from peaks to all points 3 dB below = 13.4 mm

Ratio of SAR at M2 to SAR at M1 = 46.4%

Maximum value of SAR (measured) = 0.213 W/kg

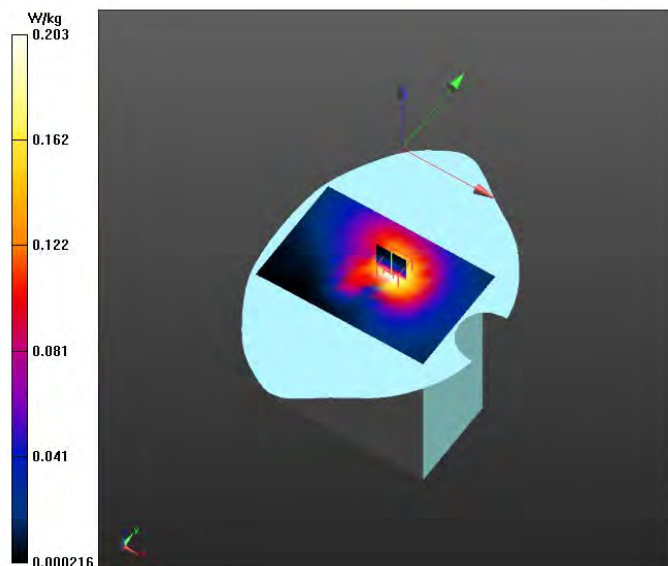

Plot 17

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 12, E-UTRA/FDD (698.0 - 716.0 MHz); Frequency: 711 MHz; Communication System PAR: 0 dB; PMF: 1
Medium parameters used (interpolated): $f = 711$ MHz; $\sigma = 0.861$ S/m; $\epsilon_r = 42.398$; $\rho = 1000$ kg/m³
Phantom section: Right Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: ES3DV3 - SN3089; ConvF(6.52, 6.52, 6.52) @ 711 MHz; Calibrated: 2024/7/4

Modulation Compensation:

Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -16.0, 32.0$

Electronics: DAE4 Sn881; Calibrated: 2024/7/4

Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1410

DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

KA25012101303 FCC ID Portable handset/R-Check/Area Scan (11x21x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.110 W/kg

KA25012101303 FCC ID Portable handset/R-Check/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 9.177 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.132 W/kg

SAR(1 g) = 0.100 W/kg; SAR(10 g) = 0.080 W/kg

Ratio of SAR at M2 to SAR at M1 = 81.5%

Maximum value of SAR (measured) = 0.105 W/kg

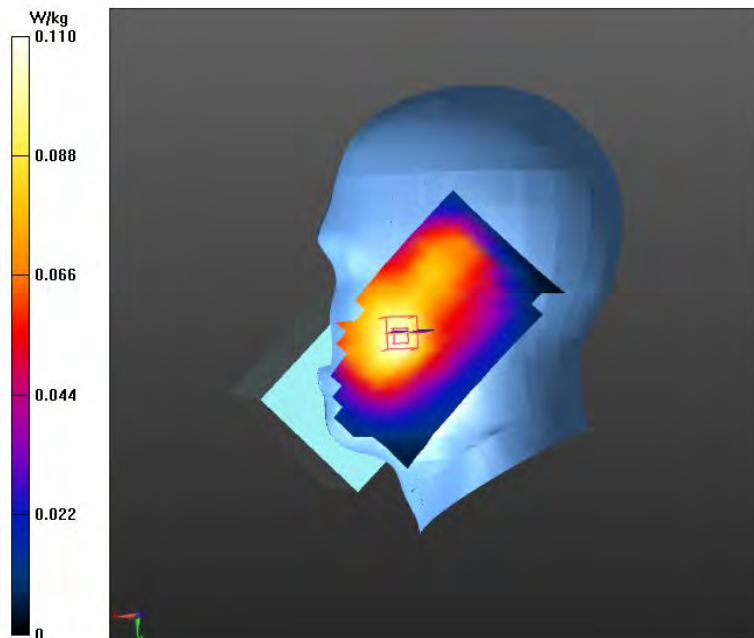

Plot 18

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 12, E-UTRA/FDD (698.0 - 716.0 MHz); Frequency: 711 MHz; Communication System PAR: 0 dB; PMF: 1

Medium parameters used (interpolated): $f = 711$ MHz; $\sigma = 0.861$ S/m; $\epsilon_r = 42.398$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: ES3DV3 - SN3089; ConvF(6.52, 6.52, 6.52) @ 711 MHz; Calibrated: 2024/7/4

Modulation Compensation:

Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$

Electronics: DAE4 Sn881; Calibrated: 2024/7/4

Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1410

DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

KA25012101303 FCC ID Portable handset/Bottom/Area Scan (18x12x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.0987 W/kg

KA25012101303 FCC ID Portable handset/Bottom/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 8.814 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 0.191 W/kg

SAR(1 g) = 0.095 W/kg; SAR(10 g) = 0.054 W/kg

Smallest distance from peaks to all points 3 dB below = 17 mm

Ratio of SAR at M2 to SAR at M1 = 55.9%

Maximum value of SAR (measured) = 0.102 W/kg

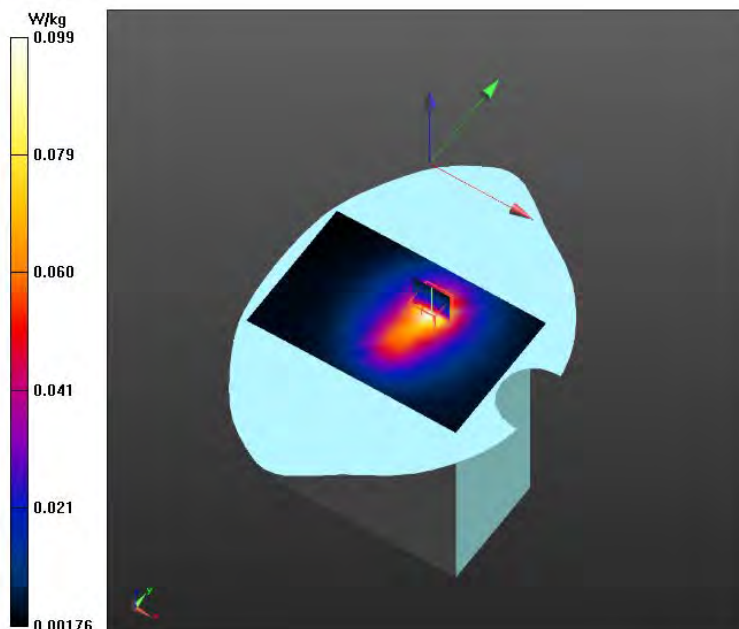

Plot 19

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 17, E-UTRA/FDD (704.0 - 716.0 MHz); Frequency: 711 MHz; Communication System PAR: 0 dB; PMF: 1
Medium parameters used (interpolated): $f = 711$ MHz; $\sigma = 0.861$ S/m; $\epsilon_r = 42.398$; $\rho = 1000$ kg/m³
Phantom section: Right Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: ES3DV3 - SN3089; ConvF(6.52, 6.52, 6.52) @ 711 MHz; Calibrated: 2024/7/4

Modulation Compensation:

Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -16.0, 32.0$

Electronics: DAE4 Sn881; Calibrated: 2024/7/4

Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1410

DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

KA25012101303 FCC ID Portable handset/R-Check/Area Scan (11x21x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.102 W/kg

KA25012101303 FCC ID Portable handset/R-Check/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 8.109 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.132 W/kg

SAR(1 g) = 0.100 W/kg; SAR(10 g) = 0.080 W/kg

Ratio of SAR at M2 to SAR at M1 = 81.1%

Maximum value of SAR (measured) = 0.105 W/kg

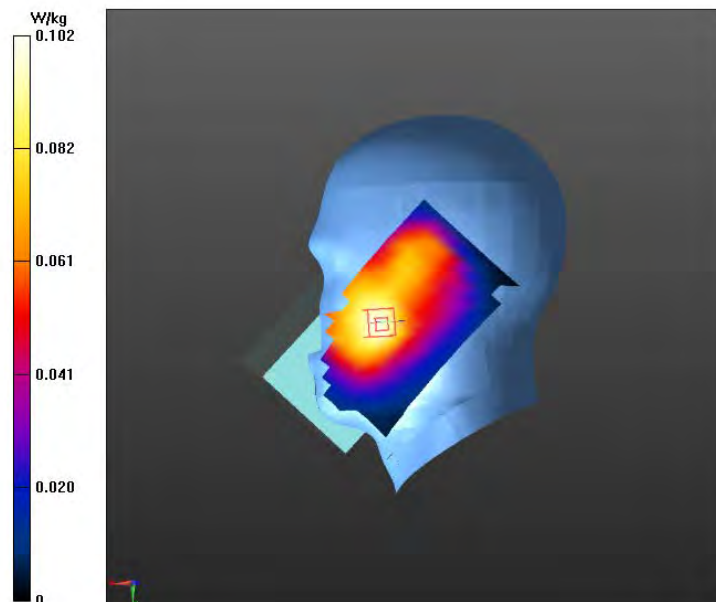

Plot 20

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 17, E-UTRA/FDD (704.0 - 716.0 MHz); Frequency: 711 MHz; Communication System PAR: 0 dB; PMF: 1
Medium parameters used (interpolated): $f = 711$ MHz; $\sigma = 0.861$ S/m; $\epsilon_r = 42.398$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: ES3DV3 - SN3089; ConvF(6.52, 6.52, 6.52) @ 711 MHz; Calibrated: 2024/7/4

Modulation Compensation:

Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$

Electronics: DAE4 Sn881; Calibrated: 2024/7/4

Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1410

DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

KA25012101303 FCC ID Portable handset/Bottom/Area Scan (18x12x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.100 W/kg

KA25012101303 FCC ID Portable handset/Bottom/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 8.941 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 0.197 W/kg

SAR(1 g) = 0.097 W/kg; SAR(10 g) = 0.055 W/kg

Smallest distance from peaks to all points 3 dB below = 17.2 mm

Ratio of SAR at M2 to SAR at M1 = 56%

Maximum value of SAR (measured) = 0.104 W/kg

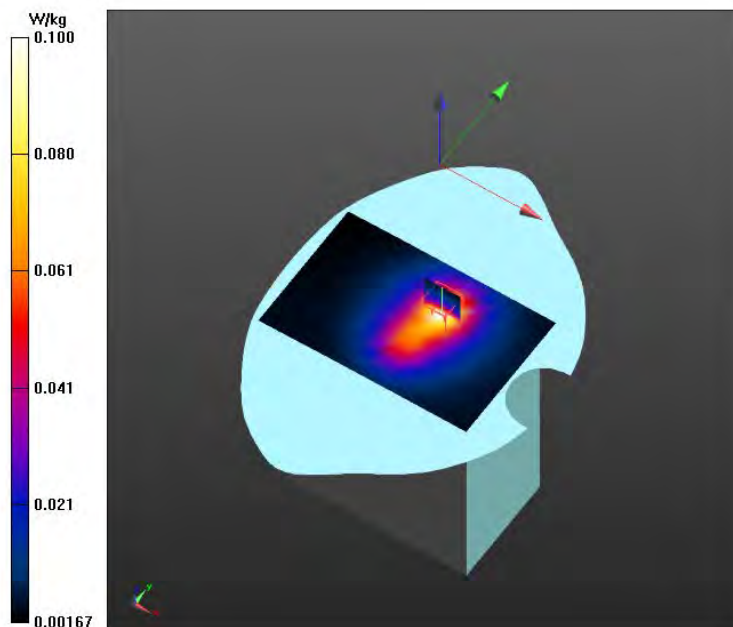

Plot 21

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 38, E-UTRA/TDD (2570.0 - 2620.0 MHz); Frequency: 2610 MHz; Communication System PAR: 0 dB; PMF: 1
Medium parameters used (interpolated): $f = 2610$ MHz; $\sigma = 2.024$ S/m; $\epsilon_r = 38.531$; $\rho = 1000$ kg/m³
Phantom section: Left Section
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: ES3DV3 - SN3089; ConvF(4.57, 4.57, 4.57) @ 2610 MHz; Calibrated: 2024/7/4

Modulation Compensation:

Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -16.0, 32.0$

Electronics: DAE4 Sn881; Calibrated: 2024/7/4

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1119

DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

KA25012101303 FCC ID Portable handset/L-Check/Area Scan (21x11x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.0930 W/kg

KA25012101303 FCC ID Portable handset/L-Check/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 0 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.194 W/kg

SAR(1 g) = 0.091 W/kg; SAR(10 g) = 0.048 W/kg

Ratio of SAR at M2 to SAR at M1 = 51.4%

Maximum value of SAR (measured) = 0.0974 W/kg

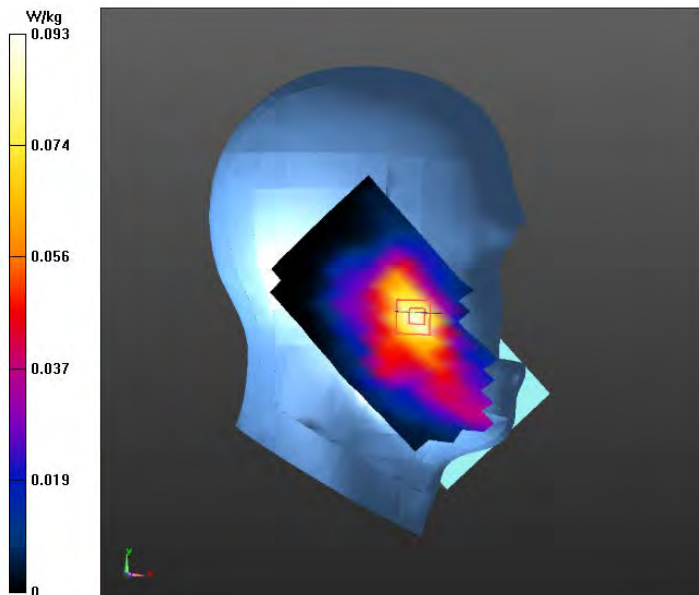

Plot 22

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 38, E-UTRA/TDD (2570.0 - 2620.0 MHz); Frequency: 2610 MHz; Communication System PAR: 0 dB; PMF: 1
Medium parameters used (interpolated): $f = 2610$ MHz; $\sigma = 2.024$ S/m; $\epsilon_r = 38.531$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: ES3DV3 - SN3089; ConvF(4.57, 4.57, 4.57) @ 2610 MHz; Calibrated: 2024/7/4
Modulation Compensation:
Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
Electronics: DAE4 Sn881; Calibrated: 2024/7/4
Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1119
DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

KA25012101303 FCC ID Portable handset/Bottom/Area Scan (18x12x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.108 W/kg

KA25012101303 FCC ID Portable handset/Bottom/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 4.513 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 0.235 W/kg

SAR(1 g) = 0.109 W/kg; SAR(10 g) = 0.055 W/kg

Smallest distance from peaks to all points 3 dB below = 17.8 mm

Ratio of SAR at M2 to SAR at M1 = 45%

Maximum value of SAR (measured) = 0.118 W/kg

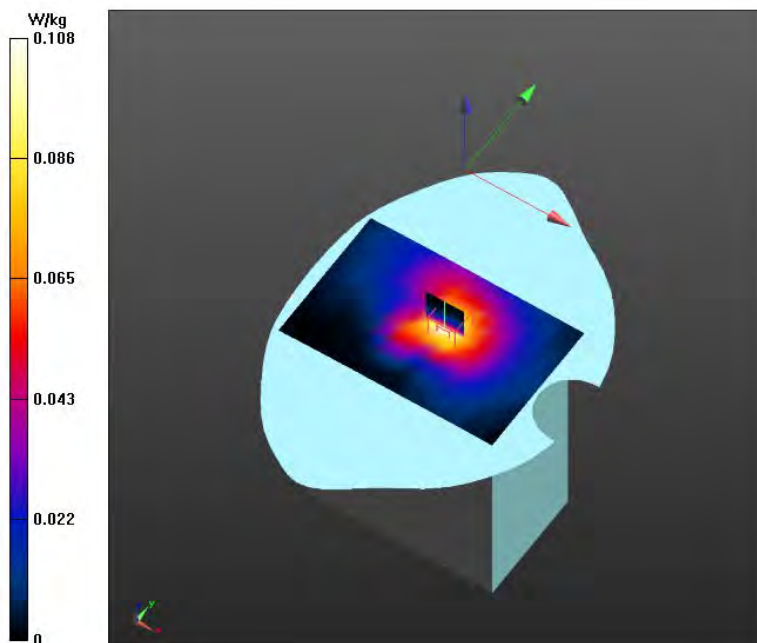

Plot 23

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 40a, E-UTRA/TDD (2300.0 - 2400.0 MHz); Frequency: 2310 MHz; Communication System PAR: 0 dB; PMF: 1
Medium parameters used: $f = 2310$ MHz; $\sigma = 1.72$ S/m; $\epsilon_r = 38.2$; $\rho = 1000$ kg/m³
Phantom section: Left Section
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: ES3DV3 - SN3089; ConvF(4.87, 4.87, 4.87) @ 2310 MHz; Calibrated: 2024/7/4
Modulation Compensation:
Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -16.0, 32.0$
Electronics: DAE4 Sn881; Calibrated: 2024/7/4
Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1119
DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

KA25012101303 FCC ID Portable handset/L-Check/Area Scan (21x11x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.131 W/kg

KA25012101303 FCC ID Portable handset/L-Check/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 0.215 W/kg

SAR(1 g) = 0.120 W/kg; SAR(10 g) = 0.066 W/kg

Smallest distance from peaks to all points 3 dB below = 15.4 mm

Ratio of SAR at M2 to SAR at M1 = 54.5%

Maximum value of SAR (measured) = 0.131 W/kg

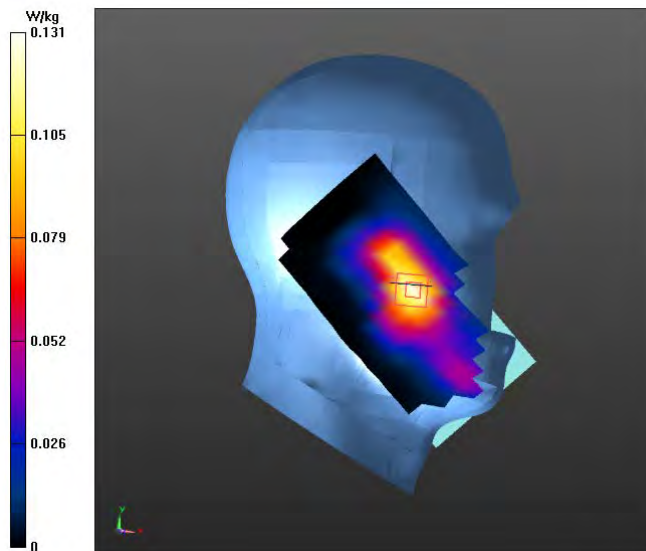

Plot 24

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 40a, E-UTRA/TDD (2300.0 - 2400.0 MHz); Frequency: 2310 MHz; Communication System PAR: 0 dB; PMF: 1
Medium parameters used: $f = 2310$ MHz; $\sigma = 1.72$ S/m; $\epsilon_r = 38.2$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: ES3DV3 - SN3089; ConvF(4.87, 4.87, 4.87) @ 2310 MHz; Calibrated: 2024/7/4
Modulation Compensation:
Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
Electronics: DAE4 Sn881; Calibrated: 2024/7/4
Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1119
DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

KA25012101303 FCC ID Portable handset/Bottom/Area Scan (18x12x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.245 W/kg

KA25012101303 FCC ID Portable handset/Bottom/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 10.07 V/m; Power Drift = -0.10 dB


Peak SAR (extrapolated) = 0.470 W/kg

SAR(1 g) = 0.233 W/kg; SAR(10 g) = 0.115 W/kg

Smallest distance from peaks to all points 3 dB below = 11.4 mm

Ratio of SAR at M2 to SAR at M1 = 49.7%

Maximum value of SAR (measured) = 0.262 W/kg

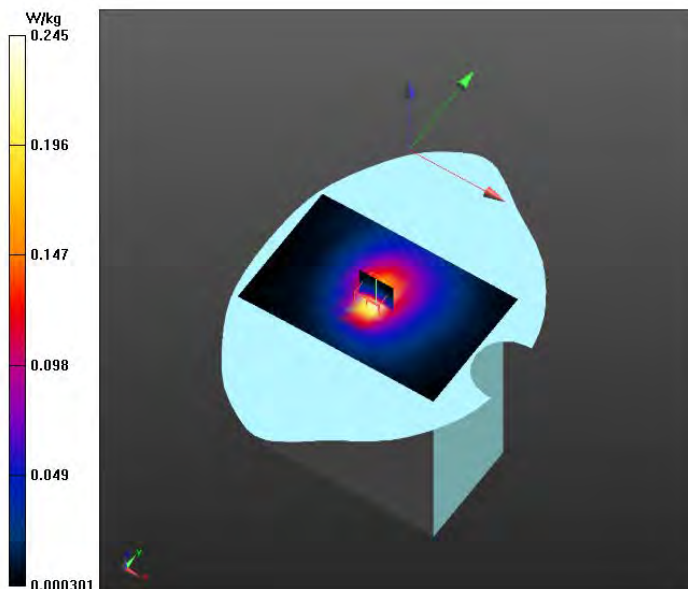

Plot 25

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 40b, E-UTRA/TDD (2300.0 - 2400.0 MHz); Frequency: 2355 MHz; Communication System PAR: 0 dB; PMF: 1
Medium parameters used (extrapolated): $f = 2355$ MHz; $\sigma = 1.761$ S/m; $\epsilon_r = 38.425$; $\rho = 1000$ kg/m³
Phantom section: Left Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: ES3DV3 - SN3089; ConvF(4.87, 4.87, 4.87) @ 2355 MHz; Calibrated: 2024/7/4
Modulation Compensation:
Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -16.0, 32.0$
Electronics: DAE4 Sn881; Calibrated: 2024/7/4
Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1119
DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

KA25012101303 FCC ID Portable handset/L-Check/Area Scan (21x11x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.130 W/kg

KA25012101303 FCC ID Portable handset/L-Check/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 0.228 W/kg

SAR(1 g) = 0.127 W/kg; SAR(10 g) = 0.070 W/kg

Smallest distance from peaks to all points 3 dB below = 15.3 mm

Ratio of SAR at M2 to SAR at M1 = 53.8%

Maximum value of SAR (measured) = 0.137 W/kg

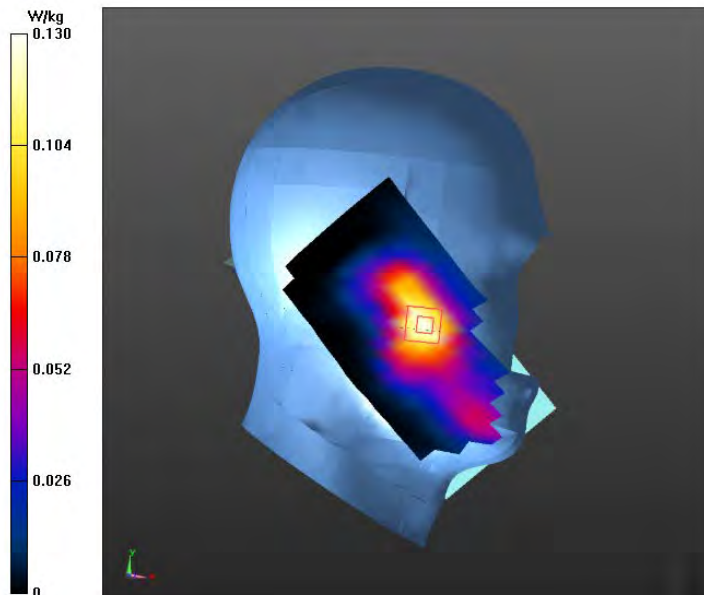

Plot 26

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 40b, E-UTRA/TDD (2300.0 - 2400.0 MHz); Frequency: 2355 MHz; Communication System PAR: 0 dB; PMF: 1
Medium parameters used (extrapolated): $f = 2355$ MHz; $\sigma = 1.761$ S/m; $\epsilon_r = 38.425$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: ES3DV3 - SN3089; ConvF(4.87, 4.87, 4.87) @ 2355 MHz; Calibrated: 2024/7/4
Modulation Compensation:
Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
Electronics: DAE4 Sn881; Calibrated: 2024/7/4
Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1119
DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

KA25012101303 FCC ID Portable handset/Bottom/Area Scan (18x12x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.198 W/kg

KA25012101303 FCC ID Portable handset/Bottom/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 8.062 V/m; Power Drift = 0.21 dB


Peak SAR (extrapolated) = 0.433 W/kg

SAR(1 g) = 0.207 W/kg; SAR(10 g) = 0.100 W/kg

Smallest distance from peaks to all points 3 dB below = 10 mm

Ratio of SAR at M2 to SAR at M1 = 49.8%

Maximum value of SAR (measured) = 0.234 W/kg

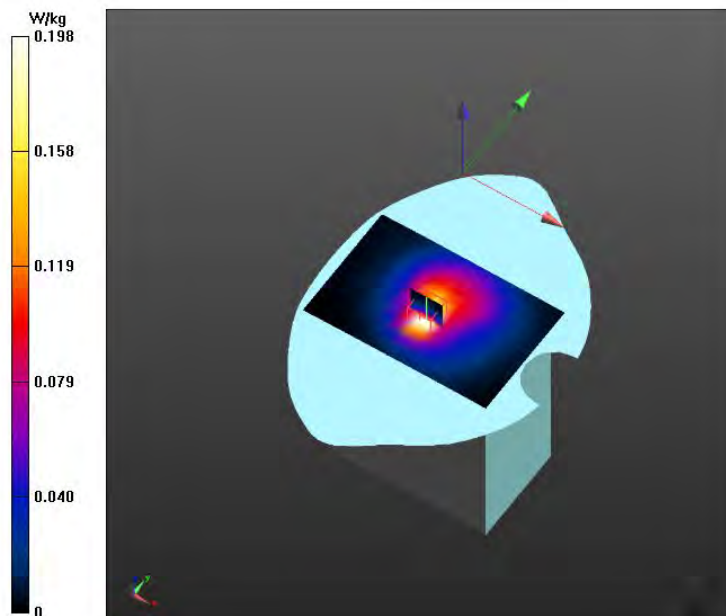

Plot 27

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 41, E-UTRA/TDD (2555.0 - 2655.0 MHz); Frequency: 2645 MHz; Communication System PAR: 0 dB; PMF: 1
Medium parameters used (interpolated): $f = 2645$ MHz; $\sigma = 2.014$ S/m; $\epsilon_r = 38.407$; $\rho = 1000$ kg/m³
Phantom section: Left Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: ES3DV3 - SN3089; ConvF(4.57, 4.57, 4.57) @ 2645 MHz; Calibrated: 2024/7/4
Modulation Compensation:
Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -16.0, 32.0$
Electronics: DAE4 Sn881; Calibrated: 2024/7/4
Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1119
DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

KA25012101303 FCC ID Portable handset/L-Check/Area Scan (21x11x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.0896 W/kg

KA25012101303 FCC ID Portable handset/L-Check/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 0 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.175 W/kg

SAR(1 g) = 0.083 W/kg; SAR(10 g) = 0.042 W/kg

Ratio of SAR at M2 to SAR at M1 = 48.9%

Maximum value of SAR (measured) = 0.0892 W/kg

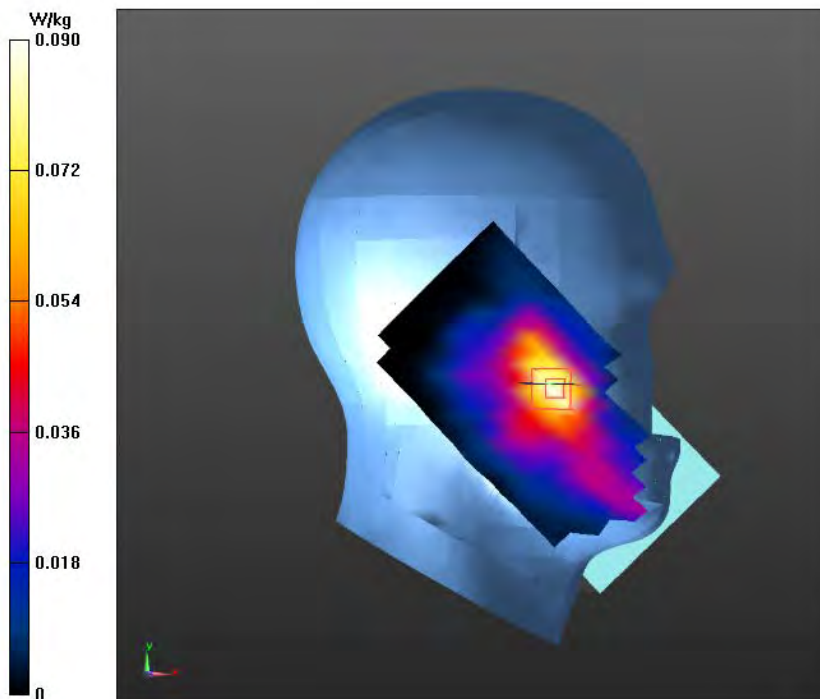

Plot 28

Communication System: UID 0, Generic LTE (0); Communication System Band: Band 41, E-UTRA/TDD (2555.0 - 2655.0 MHz); Frequency: 2645 MHz; Communication System PAR: 0 dB; PMF: 1
Medium parameters used (interpolated): $f = 2645$ MHz; $\sigma = 2.014$ S/m; $\epsilon_r = 38.407$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: ES3DV3 - SN3089; ConvF(4.57, 4.57, 4.57) @ 2645 MHz; Calibrated: 2024/7/4
Modulation Compensation:
Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
Electronics: DAE4 Sn881; Calibrated: 2024/7/4
Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1119
DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

KA25012101303 FCC ID Portable handset/Bottom/Area Scan (18x12x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.131 W/kg

KA25012101303 FCC ID Portable handset/Bottom/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.173 V/m; Power Drift = 0.19 dB


Peak SAR (extrapolated) = 0.288 W/kg

SAR(1 g) = 0.129 W/kg; SAR(10 g) = 0.064 W/kg

Smallest distance from peaks to all points 3 dB below = 16.4 mm

Ratio of SAR at M2 to SAR at M1 = 44.6%

Maximum value of SAR (measured) = 0.138 W/kg

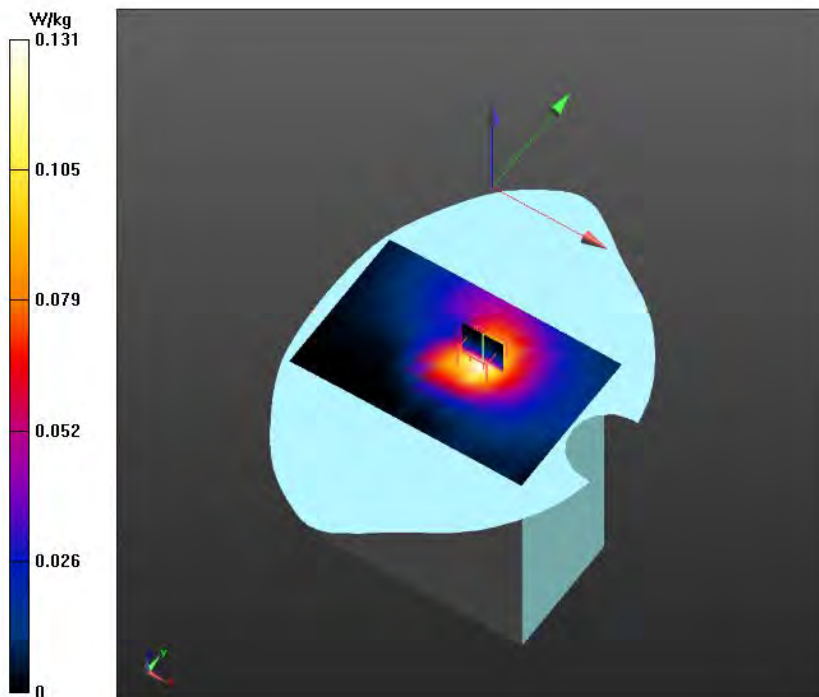

Plot 29

Communication System: UID 0, 2.4G WIFI (0); Communication System Band: FCC 2.4G WIFI 11B;
Frequency: 2437 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.883$ S/m; $\epsilon_r = 38.021$; $\rho = 1000$ kg/m³

Phantom section: Left Section

Measurement Standard: DASYS5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: ES3DV3 - SN3089; ConvF(4.7, 4.7, 4.7) @ 2437 MHz; Calibrated: 2024/7/4

Modulation Compensation:

Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -16.0, 32.0$

Electronics: DAE4 Sn881; Calibrated: 2024/7/4

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1119

DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

KA25012101303 FCC ID Portable handset/L-Check/Area Scan (21x11x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.0478 W/kg

KA25012101303 FCC ID Portable handset/L-Check/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 2.900 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.0800 W/kg

SAR(1 g) = 0.038 W/kg; SAR(10 g) = 0.019 W/kg

Ratio of SAR at M2 to SAR at M1 = 42.3%

Maximum value of SAR (measured) = 0.0423 W/kg

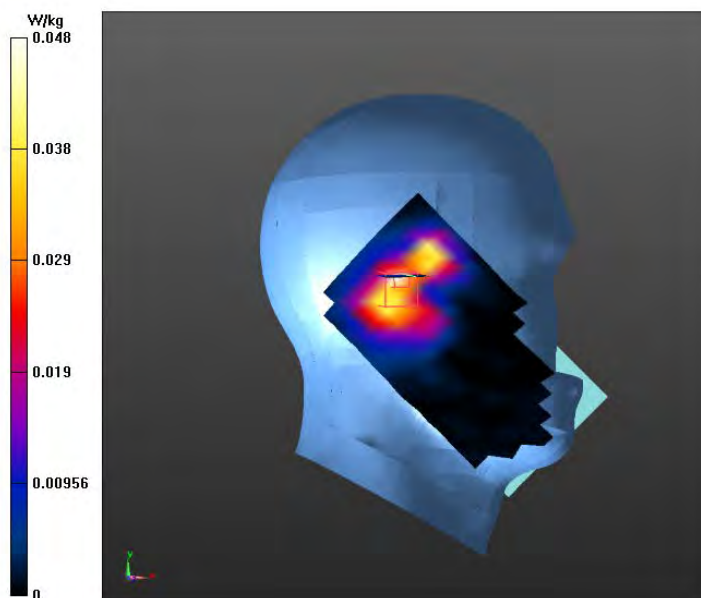

Plot 30

Communication System: UID 0, 2.4G WIFI (0); Communication System Band: FCC 2.4G WIFI 11B;
Frequency: 2437 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.883$ S/m; $\epsilon_r = 38.021$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: ES3DV3 - SN3089; ConvF(4.7, 4.7, 4.7) @ 2437 MHz; Calibrated: 2024/7/4

Modulation Compensation:

Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$

Electronics: DAE4 Sn881; Calibrated: 2024/7/4

Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1119

DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

KA25012101303 FCC ID Portable handset/Front/Area Scan (12x21x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.0499 W/kg

KA25012101303 FCC ID Portable handset/ Front/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 1.262 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.102 W/kg

SAR(1 g) = 0.055 W/kg; SAR(10 g) = 0.028 W/kg

Ratio of SAR at M2 to SAR at M1 = 45.9%

Maximum value of SAR (measured) = 0.0511 W/kg

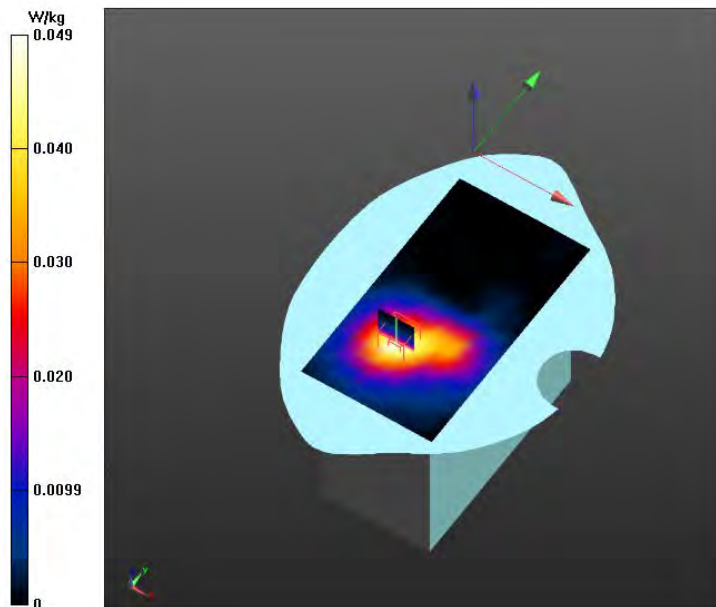

Plot 31

Communication System: UID 0, 5.2G WIFI (0); Communication System Band: FCC 5.2G WIFI a20;
Frequency: 5180 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005
Medium parameters used (interpolated): $f = 5180$ MHz; $\sigma = 4.441$ S/m; $\epsilon_r = 35.83$; $\rho = 1000$ kg/m³
Phantom section: Left Section
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: EX3DV4 - SN7769; ConvF(5.35, 5.35, 5.35) @ 5180 MHz; Calibrated: 2024/9/5
Modulation Compensation:
Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -16.0, 32.0$
Electronics: DAE4 Sn881; Calibrated: 2024/7/4
Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1119
DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

KA25012101303 FCC ID Portable handset/L-Check/Area Scan (21x11x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.0854 W/kg

KA25012101303 FCC ID Portable handset/L-Check/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 4.769 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.193 W/kg

SAR(1 g) = 0.074 W/kg; SAR(10 g) = 0.034 W/kg

Ratio of SAR at M2 to SAR at M1 = 45.6%

Maximum value of SAR (measured) = 0.0821 W/kg

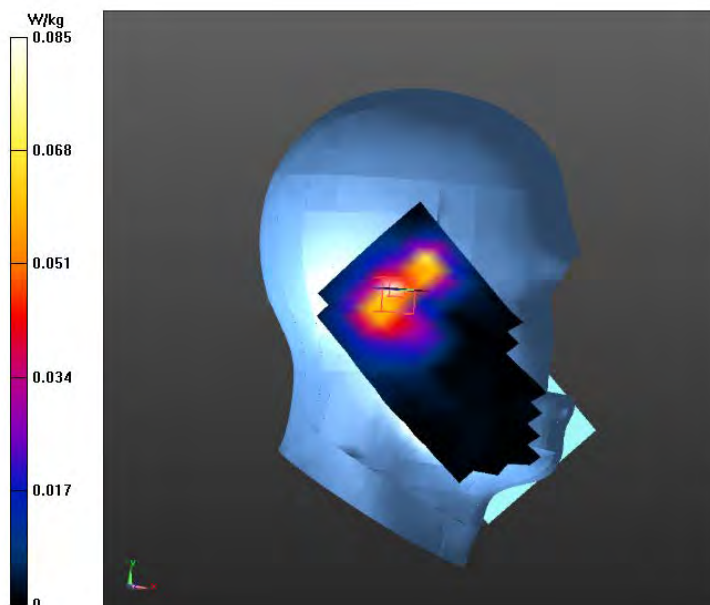

Plot 32

Communication System: UID 0, 5.2G WIFI (0); Communication System Band: FCC 5.2G WIFI a20;
Frequency: 5180 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005
Medium parameters used (interpolated): $f = 5180$ MHz; $\sigma = 4.441$ S/m; $\epsilon_r = 35.83$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: EX3DV4 - SN7769; ConvF(5.35, 5.35, 5.35) @ 5180 MHz; Calibrated: 2024/9/5
Modulation Compensation:
Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
Electronics: DAE4 Sn881; Calibrated: 2024/7/4
Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1119
DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

KA25012101303 FCC ID Portable handset/ Front/Area Scan (12x21x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.0637 W/kg

KA25012101303 FCC ID Portable handset/ Front/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 2.539 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.129 W/kg

SAR(1 g) = 0.063 W/kg; SAR(10 g) = 0.033 W/kg

Ratio of SAR at M2 to SAR at M1 = 47.4%

Maximum value of SAR (measured) = 0.0674 W/kg

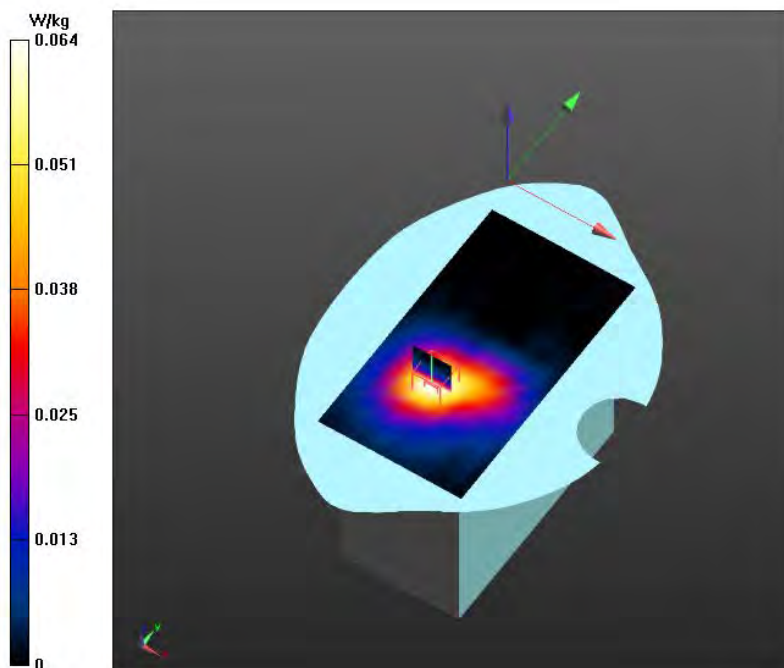

Plot 33

Communication System: UID 0, 5.3G WIFI (0); Communication System Band: FCC 5.3G WIFI a20;
Frequency: 5260 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005
Medium parameters used (interpolated): $f = 5260$ MHz; $\sigma = 4.621$ S/m; $\epsilon_r = 35.71$; $\rho = 1000$ kg/m³
Phantom section: Left Section
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: EX3DV4 - SN7769; ConvF(5.35, 5.35, 5.35) @ 5260 MHz; Calibrated: 2024/9/5
Modulation Compensation:
Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -16.0, 32.0$
Electronics: DAE4 Sn881; Calibrated: 2024/7/4
Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1119
DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

KA25012101303 FCC ID Portable handset/L-Check/Area Scan (21x11x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.0844 W/kg

KA25012101303 FCC ID Portable handset/L-Check/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 4.077 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.188 W/kg

SAR(1 g) = 0.073 W/kg; SAR(10 g) = 0.033 W/kg

Ratio of SAR at M2 to SAR at M1 = 42.7%

Maximum value of SAR (measured) = 0.0815 W/kg

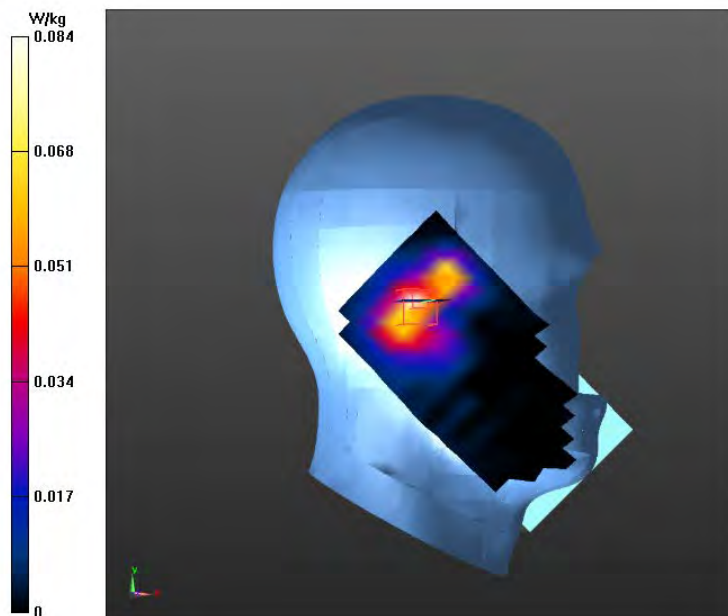

Plot 34

Communication System: UID 0, 5.3G WIFI (0); Communication System Band: FCC 5.3G WIFI a20;
Frequency: 5260 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005
Medium parameters used (interpolated): $f = 5260$ MHz; $\sigma = 4.621$ S/m; $\epsilon_r = 35.71$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: EX3DV4 - SN7769; ConvF(5.35, 5.35, 5.35) @ 5260 MHz; Calibrated: 2024/9/5
Modulation Compensation:
Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
Electronics: DAE4 Sn881; Calibrated: 2024/7/4
Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1119
DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

KA25012101303 FCC ID Portable handset/ Front/Area Scan (12x21x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.0890 W/kg

KA25012101303 FCC ID Portable handset/ Front/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm


Reference Value = 3.285 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.167 W/kg

SAR(1 g) = 0.081 W/kg; SAR(10 g) = 0.043 W/kg

Ratio of SAR at M2 to SAR at M1 = 48.2%

Maximum value of SAR (measured) = 0.0874 W/kg

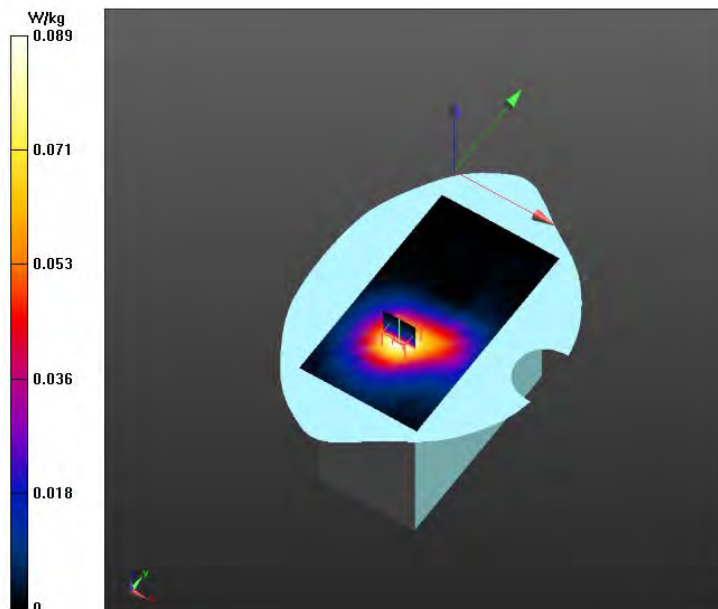

Plot 35

Communication System: UID 0, 5.8G WIFI (0); Communication System Band: FCC 5.8G WIFI a20;
Frequency: 5825 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005
Medium parameters used (interpolated): $f = 5825$ MHz; $\sigma = 5.361$ S/m; $\epsilon_r = 34.87$ $\rho = 1000$ kg/m³
Phantom section: Left Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: EX3DV4 - SN7769; ConvF(5.35, 5.35, 5.35) @ 5825 MHz; Calibrated: 2024/9/5
Modulation Compensation:
Sensor-Surface: 4mm (Mechanical Surface Detection), $z = -16.0, 32.0$
Electronics: DAE4 Sn881; Calibrated: 2024/7/4
Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1119
DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

KA25012101303 FCC ID Portable handset/L-Check/Area Scan (21x11x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.150 W/kg

KA25012101303 FCC ID Portable handset/L-Check/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.616 V/m; Power Drift = 0.10 dB


Peak SAR (extrapolated) = 0.324 W/kg

SAR(1 g) = 0.146 W/kg; SAR(10 g) = 0.072 W/kg

Smallest distance from peaks to all points 3 dB below = 13.3 mm

Ratio of SAR at M2 to SAR at M1 = 45.4%

Maximum value of SAR (measured) = 0.157 W/kg

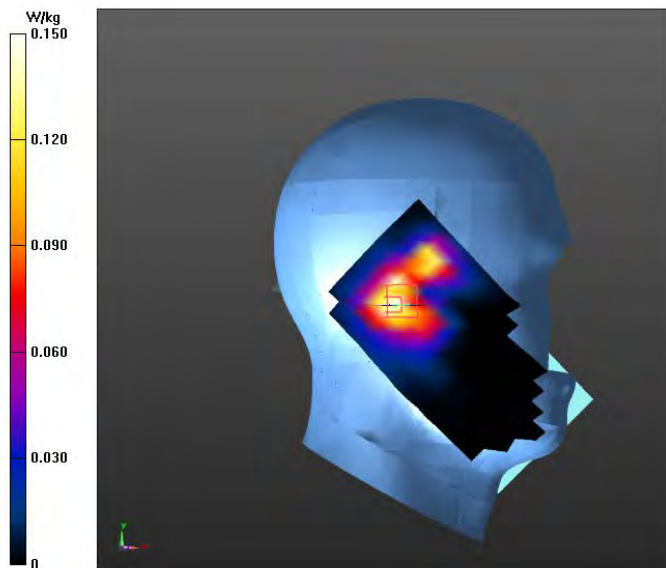

Plot 36

Communication System: UID 0, 5.8G WIFI (0); Communication System Band: FCC 5.8G WIFI a20;
Frequency: 5825 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005
Medium parameters used (interpolated): $f = 5825$ MHz; $\sigma = 5.361$ S/m; $\epsilon_r = 34.87$; $\rho = 1000$ kg/m³
Phantom section: Flat Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: EX3DV4 - SN7769; ConvF(5.35, 5.35, 5.35) @ 5825 MHz; Calibrated: 2024/9/5
Modulation Compensation:
Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$
Electronics: DAE4 Sn881; Calibrated: 2024/7/4
Phantom: SAM 1; Type: QD000P40CD; Serial: TP:1119
DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

KA25012101303 FCC ID Portable handset/ Front/Area Scan (12x21x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.145 W/kg

KA25012101303 FCC ID Portable handset/ Front/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.213 V/m; Power Drift = 0.19 dB


Peak SAR (extrapolated) = 0.287 W/kg

SAR(1 g) = 0.138 W/kg; SAR(10 g) = 0.074 W/kg

Smallest distance from peaks to all points 3 dB below = 19.9 mm

Ratio of SAR at M2 to SAR at M1 = 47.3%

Maximum value of SAR (measured) = 0.148 W/kg

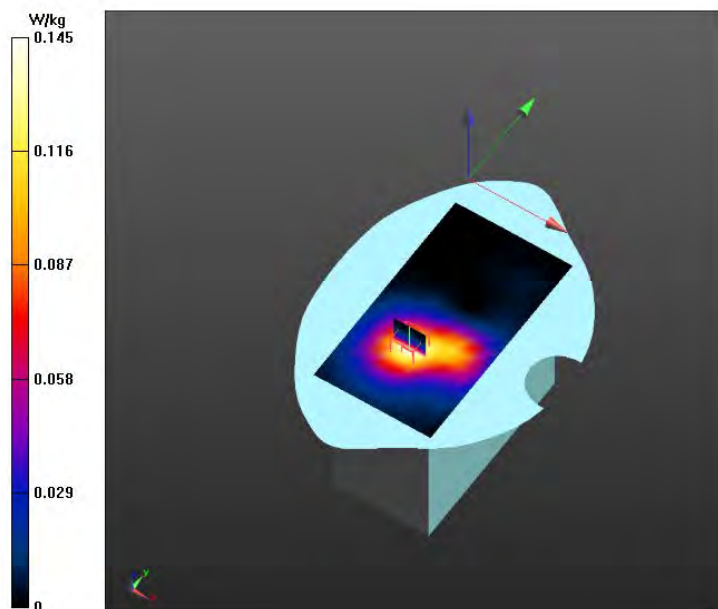

Plot 37

Communication System: UID 0, RFID-FCC ID (0); Communication System Band: RFID; Frequency: 927.25 MHz; Communication System PAR: 0 dB; PMF: 1.12202e-005

Medium parameters used: $f = 928$ MHz; $\sigma = 0.86$ S/m; $\epsilon_r = 40.55$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

Probe: ES3DV3 - SN3089; ConvF(6.2, 6.2, 6.2) @ 927.25 MHz; Calibrated: 2024/7/4

Modulation Compensation:

Sensor-Surface: 4mm (Mechanical Surface Detection), $z = 2.0, 32.0$

Electronics: DAE4 Sn881; Calibrated: 2024/7/4

Phantom: SAM 2; Type: QD000P40CD; Serial: TP:1410

DASY52 52.10.3(1513); SEMCAD X 14.6.13(7474)

KA25012101303 FCC ID Portable handset/Top/Area Scan (18x13x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 0.337 W/kg

KA25012101303 FCC ID Portable handset/Top/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 19.15 V/m; Power Drift = -0.14 dB


Peak SAR (extrapolated) = 0.622 W/kg

SAR(1 g) = 0.316 W/kg; SAR(10 g) = 0.254 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 48.1%


Maximum value of SAR (measured) = 0.457 W/kg

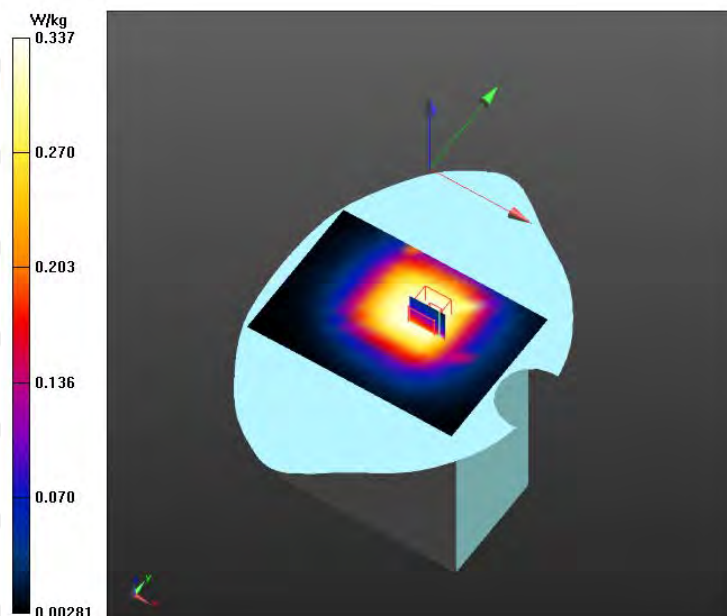

18 Calibration Reports-Probe and Dipole

The Probe, Dipole and DAE calibration please refer to the Attachment.

19 SAR System Photos and Liquid depth

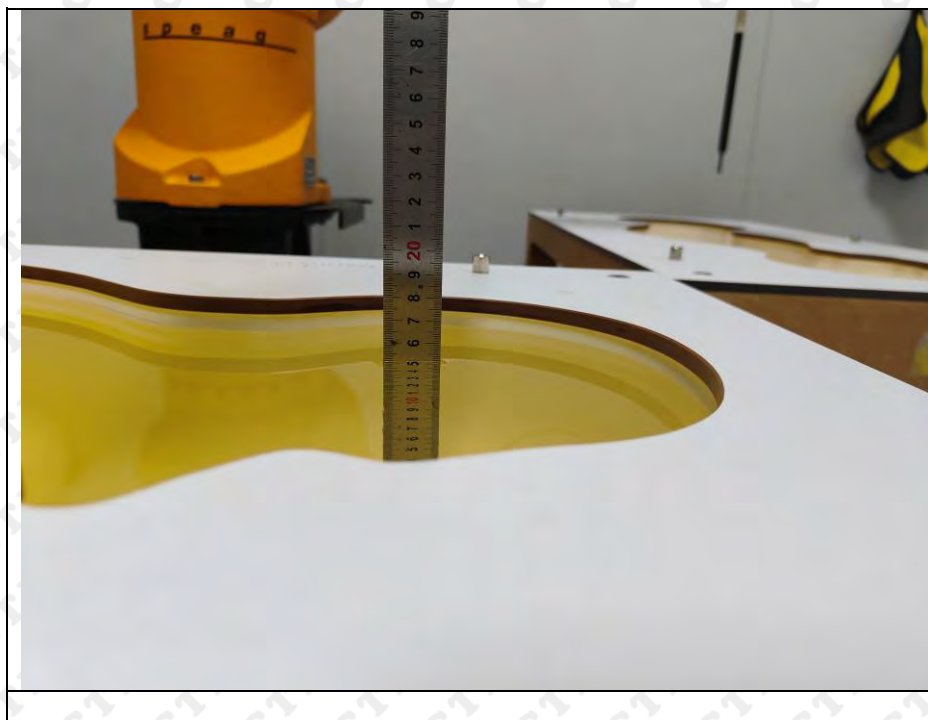


20 Setup Photo






Hotspot (Front side)

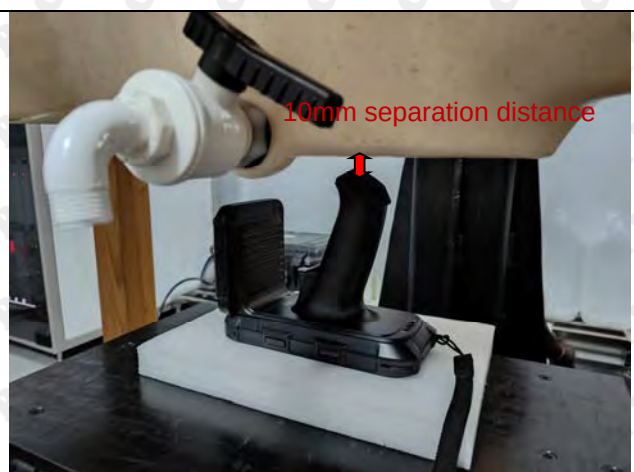


Hotspot (Back side)



Hotspot (Right edge)

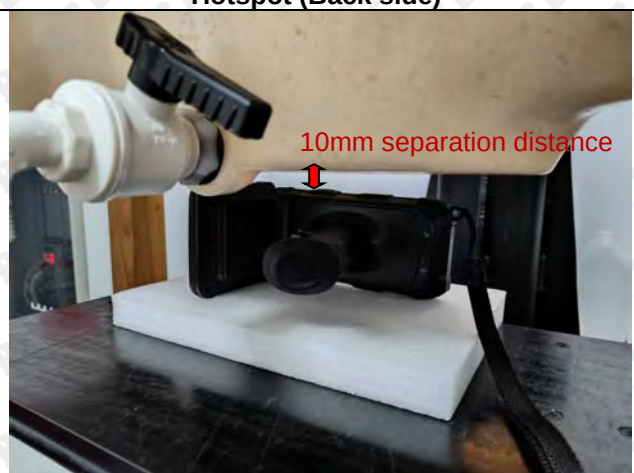

Hotspot (Left edge)

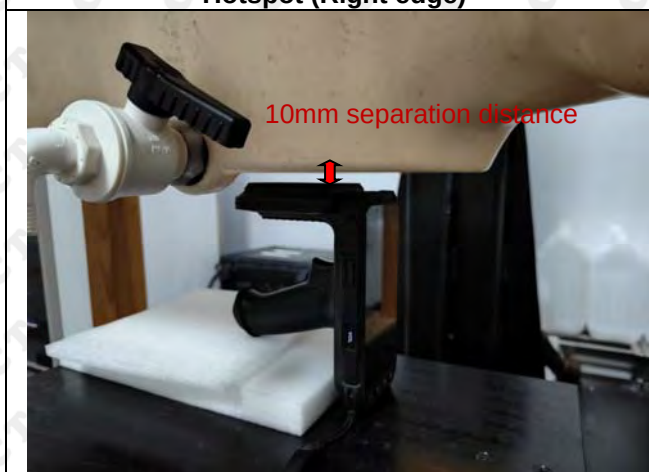

Hotspot (Top edge)



Hotspot (Bottom edge)

21 EUT Photos Front Side



Back Side



=====End of report=====