

TEST REPORT

Product Name: Mobile Computer
FCC ID: VUJ-ATM660
Trademark: N/A
Model Number: ATM660
Prepared For: ATID Co., Ltd
Address: #1402, 83, Gasan digital 1-ro, Geumcheon-gu, Seoul,
Republic of Korea.
Manufacturer: ATID Co., Ltd
Address: #1402, 83, Gasan digital 1-ro, Geumcheon-gu, Seoul,
Republic of Korea.
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao
Community, Xinqiao Street, Baoan District, Shenzhen,
Guangdong China
Sample Received Date: May. 8, 2021
Sample tested Date: May. 8, 2021 to May. 15, 2021
Issue Date: May. 15, 2021
Report No.: CTB210515007RFX
Test Standards 47 CFR Part 15 Subpart E
Test Results PASS
Remark: This is WIFI-5GHz band radio test report.

Compiled by:

Arron Liu

Arron Liu

Reviewed by:

Bin Mei

Bin Mei

Approved by:

Rita Xiao / Director

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	4
2. TEST SUMMARY	5
3. MEASUREMENT UNCERTAINTY	6
4. PRODUCT INFORMATION AND TEST SETUP	7
4.1 Product Information	7
4.2 Test Setup Configuration	8
4.3 Support Equipment	8
4.5 Test Mode	10
4.6 Test Environment	10
5. TEST FACILITY AND TEST INSTRUMENT USED	11
5.1 Test Facility	11
5.2 Test Instrument Used	11
6. AC POWER LINE CONDUCTED EMISSION	13
6.1 Block Diagram Of Test Setup	13
6.2 Limit	13
6.3 Test procedure	13
6.4 Test Result	15
7. RADIATED SPURIOUS EMISSIONS	17
7.1 Block Diagram Of Test Setup	17
7.2 Limit	17
7.3 Test procedure	18
7.4 Test Result	19
8. BAND EDGE	24
8.1 Block Diagram Of Test Setup	24
8.2 Limit	24
8.3 Test procedure	24
8.4 Test Result	25
9. CONDUCTED PEAK OUTPUT POWER	29
9.1 Block Diagram Of Test Setup	29
9.2 Limit	29

9.3	Test procedure	30
9.4	Test Result	31
10.	EMISSION BANDWIDTH& OCCUPIED BANDWIDTH	37
10.1	Block Diagram Of Test Setup	37
10.2	Limits	37
10.3	Test Procedure	37
10.4	Test Results	39
11.	POWER SPECTRAL DENSITY	46
11.1	Block Diagram Of Test Setup	46
11.2	Limit.....	46
11.3	Test procedure	46
11.4	Test Result	48
12.	FREQUENCY STABILITY	54
12.1	Block Diagram Of Test Setup	54
12.2	Limit.....	54
12.3	Test procedure	54
12.4	Test Result	54
13.	OPERATION IN THE ABSENCE OF INFORMATION TO THE TRANSMIT	61
13.1	Requirement.....	61
13.2	Test Results	61
14.	ANTENNA REQUIREMENT	62
15.	EUT PHOTOGRAPHS.....	63
16.	EUT TEST SETUP PHOTOGRAPHS	64

(Note: N/A means not applicable)

1. VERSION

Report No.	Issue Date	Description	Approved
CTB210515007RFX	May. 15, 2021	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart E Section 15.407 (b)(6)	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart E Section 15.205/15.407(b)	KDB789033	PASS
Band edge	47 CFR Part 15 Subpart E Section 15.205/15.407(b)	KDB789033	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart E Section 15.407 (a)	KDB789033	PASS
Emission Bandwidth & Occupied Bandwidth	47 CFR Part 15 Subpart E Section 15.407 (a)(e)	KDB789033	PASS
Power Spectral Density	47 CFR Part 15 Subpart E Section 15.407 (a)	KDB789033	PASS
Frequency stability	47 CFR Part 15 Subpart E Section 15.407 (g)	KDB789033	PASS
Operation in the absence of information to the transmit	47 CFR Part 15 Subpart E Section 15.407 (c)	47 CFR Part 15 Subpart E	PASS
Antenna Requirement	47 CFR Part 15 Subpart E Section 15.203	ANSI C63.10-2013	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

No.	Item	Uncertainty
1	Occupancy bandwidth	$U = \pm 54.3\text{Hz}$
2	Adjacent channel power	$U = \pm 1.3\text{dB}$
3	Conducted Adjacent channel power	$U = \pm 1.38\text{dB}$
4	Conducted output power Above 1G	$U = \pm 1.0\text{dB}$
5	Conducted output power below 1G	$U = \pm 0.9\text{dB}$
6	Power Spectral Density , Conduction	$U = \pm 1.0\text{dB}$
7	Conduction spurious emissions	$U = \pm 2.8\text{dB}$
8	Out of band emission	$U = \pm 54\text{Hz}$
9	3m chamber Radiated spurious emission(30MHz-1GHz)	$U = \pm 4.3\text{dB}$
10	3m chamber Radiated spurious emission(1GHz-18GHz)	$U = \pm 4.5\text{dB}$
11	humidity uncertainty	$U = \pm 5.3\%$
12	Temperature uncertainty	$U = \pm 0.59^{\circ}\text{C}$
13	Supply volyages	$U = \pm 3\%$
14	Time	$U = \pm 5\%$

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	ATM660
Model Description:	N/A
Wi-Fi Specification:	IEEE 802.11a/b/g/n/ac
Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	IEEE 802.11a/n/ac(20M): 5150MHz ~5250MHz/ 4 channel IEEE 802.11n/ac(40M): 5150MHz ~5250MHz/ 2 channel IEEE 802.11ac(80M): 5150MHz ~5250MHz/ 1 channel IEEE 802.11a/n/ac(20M): 5725MHz ~5850MHz/ 5 channel IEEE 802.11n/ac(40M): 5725MHz ~5850MHz/ 2 channel IEEE 802.11ac(80M): 5725MHz ~5850MHz/ 1 channel
Max. RF output power:	WiFi (5G): 10.619dBm
Type of Modulation:	WiFi: DSSS, OFDM
Antenna installation:	Internal antenna
Antenna Gain:	0.76dBi
Ratings:	DC 5.0V charging from adapter DC 3.8V from battery, 4800mAh

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

No.	Device Type	Brand	Model	Series No.	Data Cable	Power Cord
1.	---	---	---	---	---	---

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

For 802.11a/n/ac(20M) Operation in the 5150MHz ~5250 MHz band			
Channel	Frequency	Channel	Frequency
36	5180MHz	44	5220MHz
40	5200MHz	48	5240MHz
For 802.11a/n/ac(20M) Operation in the 5725MHz ~5850 MHz band			
Channel	Frequency	Channel	Frequency
149	5745MHz	161	5805MHz
153	5765MHz	165	5825MHz
157	5785MHz	NA	NA

For 802.11n/ac(40M) Operation in the 5150MHz ~5250 MHz band			
Channel	Frequency	Channel	Frequency
38	5190MHz	46	5230MHz
For 802.11n/ac(40M) Operation in the 5725MHz ~5850 MHz band			
Channel	Frequency	Channel	Frequency
151	5755MHz	159	5795MHz

For 802.11ac(80M) Operation in the 5150MHz ~5250 MHz band			
Channel	Frequency	Channel	Frequency
42	5210MHz	NA	NA
For 802.11ac(80M) Operation in the 5725MHz ~5850 MHz band			
Channel	Frequency	Channel	Frequency
155	5775MHz	NA	NA

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test Mode	Tx/Rx	RF Channel		
		Low(L)	Middle(M)	High(H)
802.11a/n/ac(20M)	5150MHz ~5250 MHz	Channel 36	Channel 40	Channel 48
		5180MHz	5200MHz	5240MHz
802.11n/ac(40M)	5150MHz ~5250 MHz	Channel 38	N/A	Channel 46
		5190MHz	N/A	5230MHz
802.11ac(80M)	5150MHz ~5250 MHz	N/A	Channel 42	N/A
		N/A	5210MHz	N/A
802.11a/n/ac(20M)	5725MHz ~5850 MHz	Channel 149	Channel 157	Channel 165
		5745MHz	5785MHz	5825MHz
802.11n/ac(40M)	5725MHz ~5850 MHz	Channel 151	N/A	Channel 159
		5755MHz	N/A	5795MHz
802.11ac(80M)	5725MHz ~5850 MHz	N/A	Channel 155	N/A
		N/A	5775MHz	N/A

4.6 Test Environment

Humidity(%):	55
Atmospheric Pressure(kPa):	101.1
Normal Voltage(DC):NV	3.8
Normal Temperature(°C):NT	25
Low Temperature(°C):LT	0
High Temperature(°C):HT	40

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Floor 1&2, Building A, No. 26 of Xinhe Road, Xinqiao Street, Baoan District, Shenzhen China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used


Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	Sep. 28, 2020	Sep. 28, 2021
2	Power Sensor	Agilent	U2021XA	MY56120032	Sep. 28, 2020	Sep. 28, 2021
3	Power Sensor	Agilent	U2021XA	MY56120034	Sep. 28, 2020	Sep. 28, 2021
4	Communication test set	R&S	CMW500	108058	Sep. 28, 2020	Sep. 28, 2021
5	Spectrum Analyzer	R&S	FSP40	100550	Sep. 28, 2020	Sep. 28, 2021
6	Signal Generator	Agilent	N5181A	MY49060920	Sep. 28, 2020	Sep. 28, 2021
7	Signal Generator	Agilent	N5182A	MY47420195	Sep. 28, 2020	Sep. 28, 2021
8	Communication test set	Agilent	E5515C	MY50102567	Oct. 10, 2020	Oct. 10, 2021
9	band rejection filter	Shenxiang	MSF2400-24 83.5MS-1154	20181015001	Sep. 28, 2020	Sep. 28, 2021
10	band rejection filter	Shenxiang	MSF5150-58 50MS-1155	20181015001	Sep. 28, 2020	Sep. 28, 2021
11	band rejection filter	Xingbo	XBLBQ-DZA 120	190821-1-1	Sep. 28, 2020	Sep. 28, 2021
12	BT&WI-FI Automatic test software	Microwave	MTS8310	Ver. 2.0.0.0	\	\
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	Sep. 28, 2020	Sep. 28, 2021
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	Sep. 28, 2020	Sep. 28, 2021
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	\	\
16	966 chamber	C.R.T.	966 Room	966	Nov. 9, 2019	Nov. 08, 2022
17	Receiver	R&S	ESPI	100362	Sep. 28, 2020	Sep. 28, 2021

18	Amplifier	HP	8447E	2945A02747	Sep. 28, 2020	Sep. 28, 2021
19	Amplifier	Agilent	8449B	3008A01838	Sep. 28, 2020	Sep. 28, 2021
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	Nov. 02, 2020	Nov. 01, 2021
21	Horn Antenna	Schwarzbeck	BBHA9120D	1911	Nov. 02, 2020	Nov. 01, 2021
22	Software	Fala	EZ-EMC	FA-03A2 RE	\	\
23	3-Loop Antenna	Daze	ZN30401	17014	Sep. 28, 2020	Sep. 28, 2021
24	loop antenna	ZHINAN	ZN30900A	/	Sep. 28, 2020	Sep. 28, 2021
25	Horn antenna	A/H/System	SAS-574	588	Sep. 28, 2020	Sep. 28, 2021
26	Amplifier	AEROFLEX	/	S/N/ 097	Sep. 28, 2020	Sep. 28, 2021

Conducted emissions Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
AMN	ROHDE&SCH WARZ	ESH3-Z5	100318	Sep. 28, 2020	Sep. 28, 2021
Pulse limiter	ROHDE&SCH WARZ	ESH3Z2	357881052	Sep. 28, 2020	Sep. 28, 2021
EMI TEST RECEIVER	ROHDE&SCH WARZ	ESCS30	834115/006	Sep. 28, 2020	Sep. 28, 2021
Coaxial cable	ZDECL	Z302S	18091804	Sep. 28, 2020	Sep. 28, 2021
ISN	TESEQ	NTFM81 58	183	Sep. 28, 2020	Sep. 28, 2021
EMI TEST RECEIVER	ROHDE&SCH WARZ	ESCI	100428/003	Sep. 28, 2020	Sep. 28, 2021
Software	Fala	EZ-EMC	EMC-CON 3A1.1	\	\

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

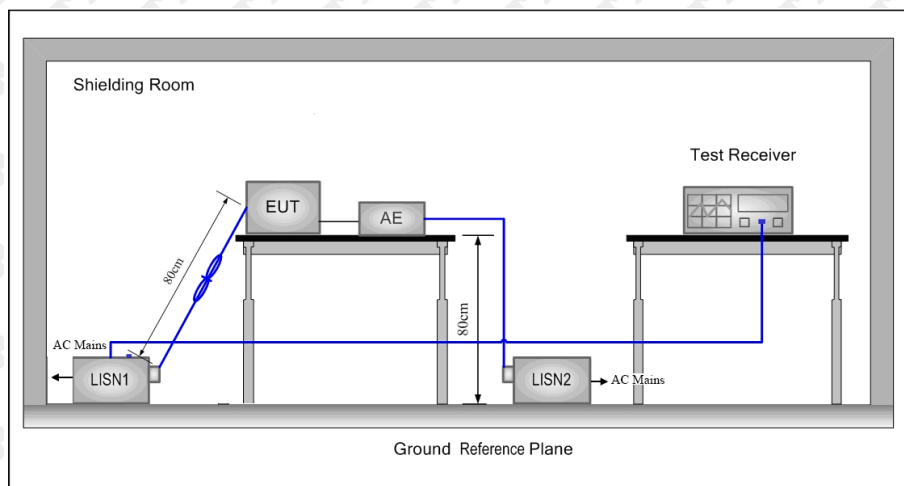

6.2 Limit

Frequency (MHz)	Maximum RF Line Voltage (dB μ V)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15 - 0.50	79	66	66-56*	56-46*
0.50 - 5.00	73	60	56	46
5.00 - 30.0	73	60	60	50

* Decreasing linearly with the logarithm of the frequency

6.3 Test procedure


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 Ω /50 μ H + 5 Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was

between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.


6.4 Test Result

Test Specification: Neutral

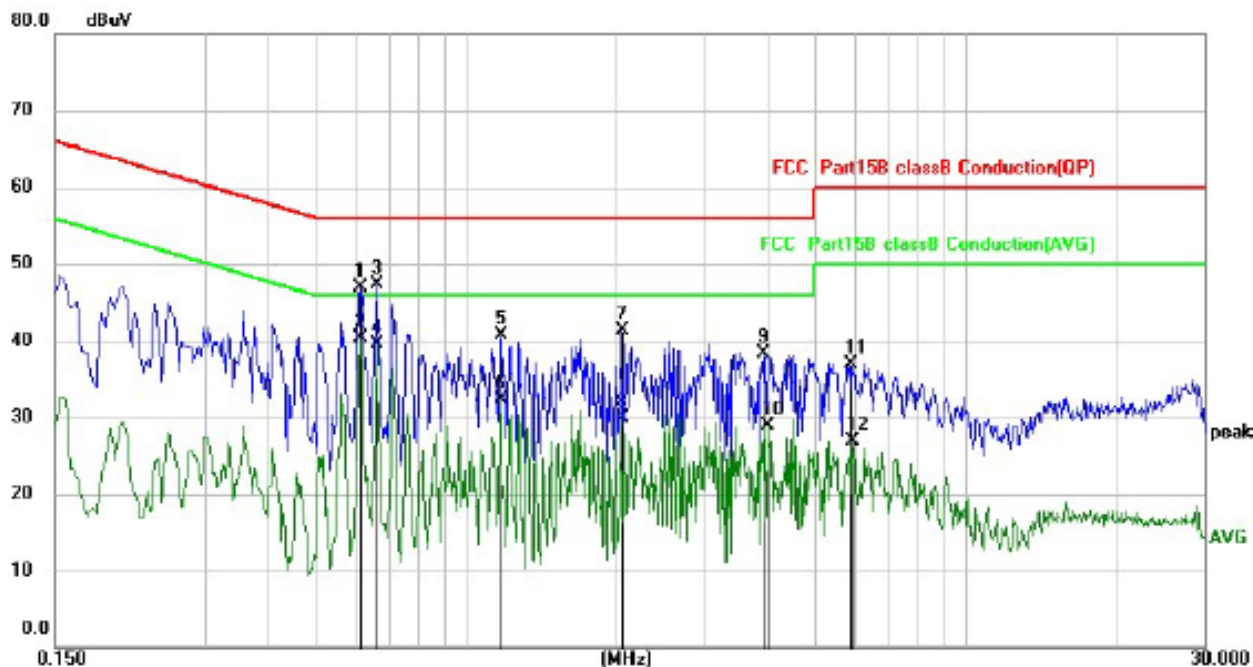

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector
1		0.6140	36.76	10.07	46.83	56.00	-9.17	QP
2	*	0.6140	30.19	10.07	40.26	46.00	-5.74	AVG
3		0.6620	37.18	10.08	47.26	56.00	-8.74	QP
4		0.6620	29.47	10.08	39.55	46.00	-6.45	AVG
5		1.1740	30.40	10.23	40.63	56.00	-15.37	QP
6		1.1740	22.16	10.23	32.39	46.00	-13.61	AVG
7		2.0460	31.07	10.23	41.30	56.00	-14.70	QP
8		2.0460	19.77	10.23	30.00	46.00	-16.00	AVG
9		3.9260	27.93	10.33	38.26	56.00	-17.74	QP
10		4.0260	18.51	10.33	28.84	46.00	-17.16	AVG
11		5.8620	26.57	10.42	36.99	60.00	-23.01	QP
12		5.9140	16.41	10.42	26.83	50.00	-23.17	AVG

Test Specification: Line

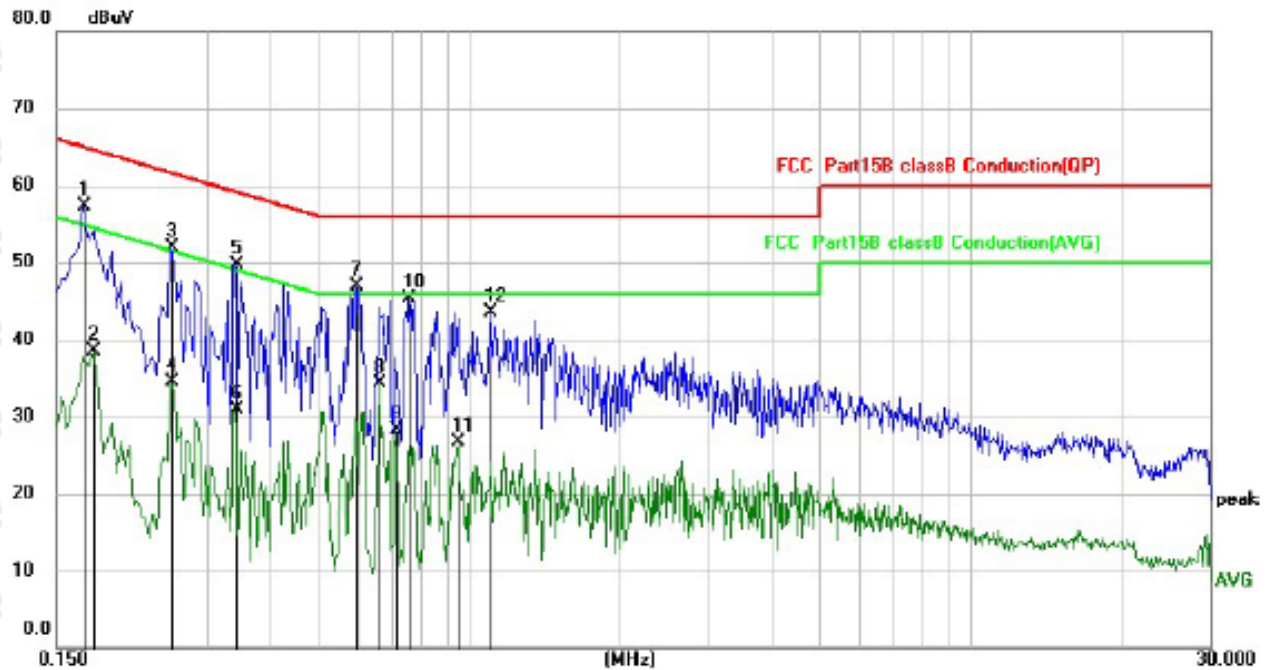

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1	*	0.1700	47.13	10.10	57.23	64.96	-7.73	QP
2		0.1780	28.32	10.10	38.42	54.58	-16.16	AVG
3		0.2540	41.83	10.13	51.96	61.63	-9.67	QP
4		0.2540	24.32	10.13	34.45	51.63	-17.18	AVG
5		0.3420	39.58	10.17	49.75	59.15	-9.40	QP
6		0.3420	20.65	10.17	30.82	49.15	-18.33	AVG
7		0.5940	36.64	10.23	46.87	56.00	-9.13	QP
8		0.6620	24.06	10.24	34.30	46.00	-11.70	AVG
9		0.7140	18.02	10.23	28.25	46.00	-17.75	AVG
10		0.7580	35.10	10.22	45.32	56.00	-10.68	QP
11		0.9500	16.58	10.17	26.75	46.00	-19.25	AVG
12		1.1019	33.26	10.15	43.41	56.00	-12.59	QP

Remark:

- Factor = Cable loss + LISN factor, Margin = Limit – Level
- All modes were tested at AC 120V and 240V, only the worst result of AC 120V 60Hz was reported.
- All the test modes completed for test. Only the worst result of was reported.

7. RADIATED SPURIOUS EMISSIONS

7.1 Block Diagram Of Test Setup

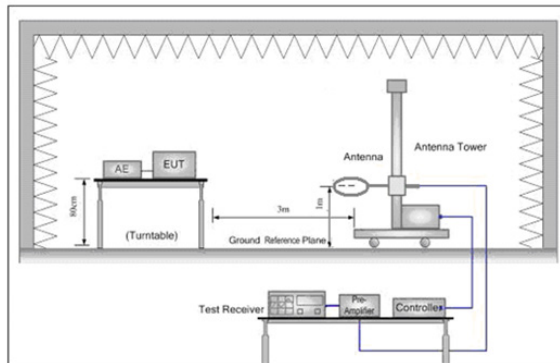


Figure 1. Below 30MHz

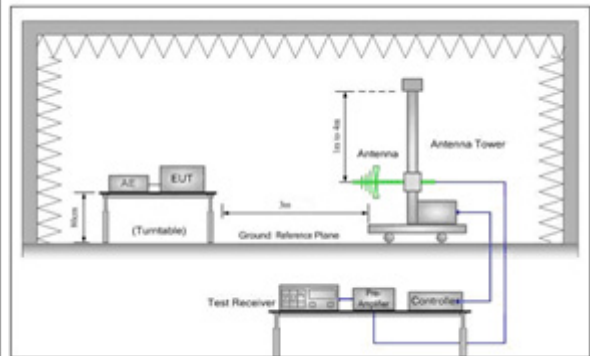


Figure 2. 30MHz to 1GHz

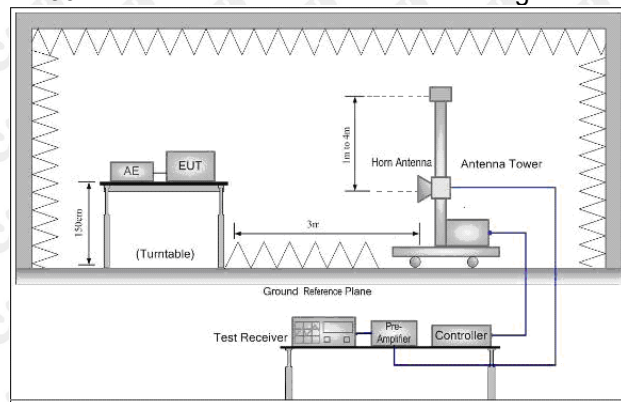


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (dBμV/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	$20\log 2400/F \text{ (kHz)} + 80$	Quasi-peak	3
0.490MHz-1.705MHz	$20\log 24000/F \text{ (kHz)} + 40$	Quasi-peak	3
1.705MHz-30MHz	$20\log 30 + 40$	Quasi-peak	3
30MHz-88MHz	40.0	Quasi-peak	3
88MHz-216MHz	43.5	Quasi-peak	3
216MHz-960MHz	46.0	Quasi-peak	3
960MHz-1GHz	54.0	Quasi-peak	3
Above 1GHz	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

If radiated measurements are performed, field strength is then converted to EIRP as follows:

(i) $EIRP = ((E \cdot d)^2) / 30$

where:

- E is the field strength in V/m;
 - d is the measurement distance in meters;
 - EIRP is the equivalent isotropically radiated power in watts.
- (ii) Working in dB units, the above equation is equivalent to:
- $$EIRP[dBm] = E[dB\mu V/m] + 20 \log(d[meters]) - 104.77$$

(iii) Or, if d is 3 meters:

$$EIRP[dBm] = E[dB\mu V/m] - 95.2$$

7.3 Test procedure

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- j. Repeat above procedures until all frequencies measured was complete.

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average


7.4 Test Result

30MHz-1GHz Test Results:

Modulation : 802.11a (the worst data)


Test Channel : 5780MHz

Antenna polarity: H

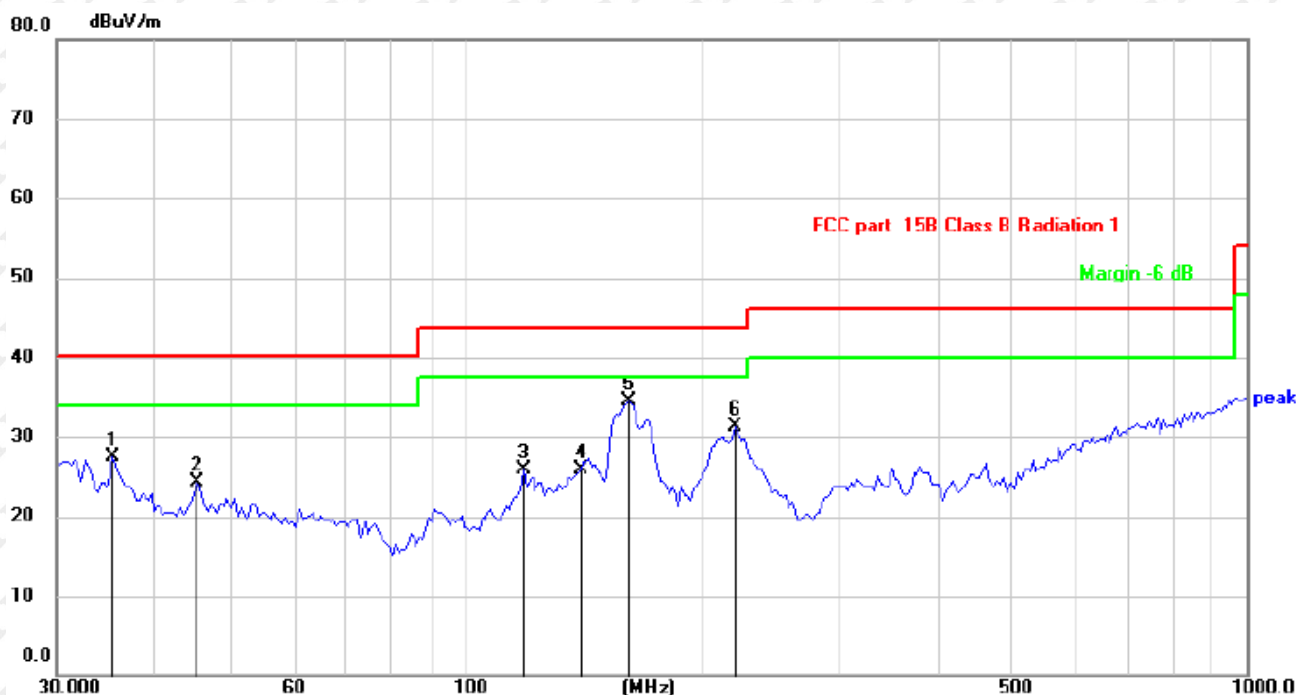

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		35.4369	34.84	-7.25	27.59	40.00	-12.41	QP
2		45.2959	31.21	-6.99	24.22	40.00	-15.78	QP
3		118.8092	34.51	-8.65	25.86	43.50	-17.64	QP
4		140.3420	33.29	-7.29	26.00	43.50	-17.50	QP
5	*	161.4739	41.34	-6.86	34.48	43.50	-9.02	QP
6		221.3919	40.96	-9.62	31.34	43.50	-12.16	QP

Antenna polarity: V

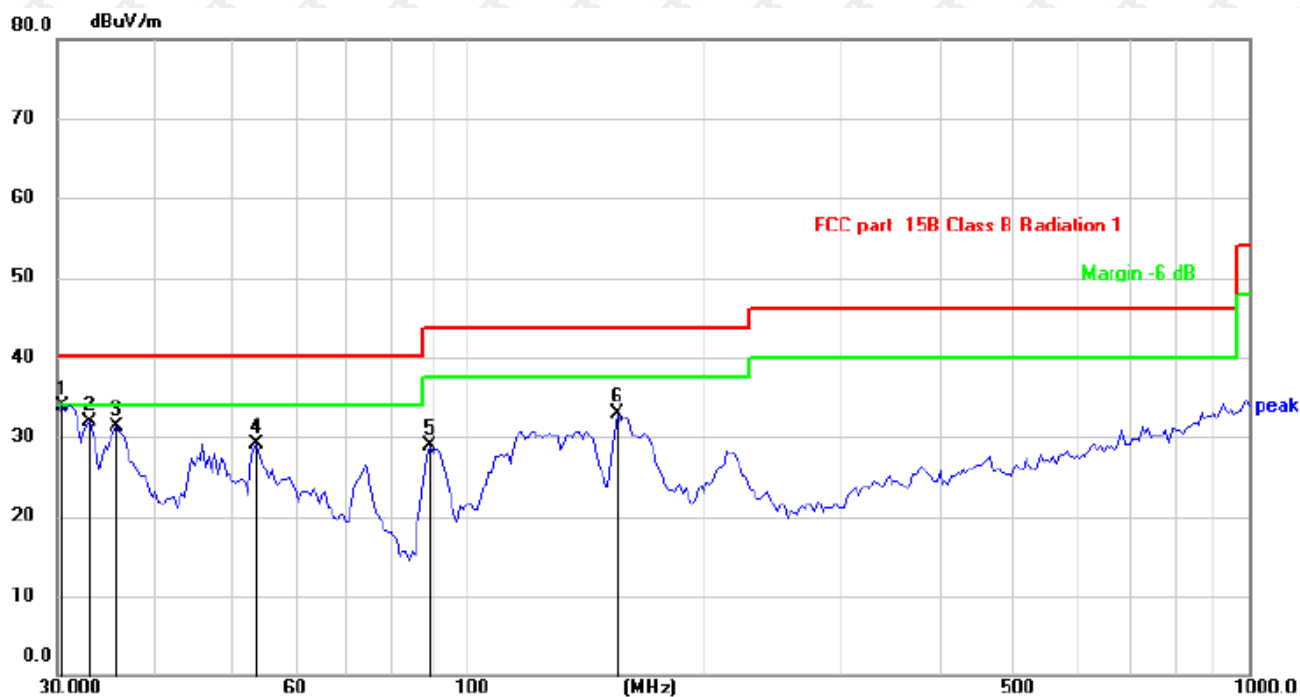

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1	*	30.5304	42.12	-8.27	33.85	40.00	-6.15	QP
2		33.0369	39.58	-7.72	31.86	40.00	-8.14	QP
3		35.7490	38.61	-7.22	31.39	40.00	-8.61	QP
4		53.9763	36.63	-7.50	29.13	40.00	-10.87	QP
5		89.7471	40.13	-11.29	28.84	43.50	-14.66	QP
6		155.9100	40.04	-7.23	32.81	43.50	-10.69	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement - Limit

Radiated Spurious Emission (Above 1GHz):

ANT 1

Modulation : 802.11(a) (the worst data)

Freq (MHz)	Rd_level (dBuV/m)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	detector	Height	Degree	Antenna polarization
Channel:5180MHz									
10360	43.62	16.39	60.01	74	-13.99	PK	6	1.4	H
10360	27.60	16.39	43.99	54	-10.01	AV	245	1.5	H
10360	44.70	16.39	61.09	74	-12.91	PK	251	1.7	V
10360	30.53	16.39	46.92	54	-7.08	AV	39	1.3	V
Channel:5240MHz									
10480	44.86	16.11	60.97	74	-13.03	PK	308	1.4	H
10480	29.61	16.11	45.72	54	-8.28	AV	121	1.7	H
10480	43.86	16.11	59.97	74	-14.03	PK	205	1.5	V
10480	29.09	16.11	45.20	54	-8.80	AV	235	1.4	V
Channel:5745MHz									
11490	43.24	17.46	60.70	74	-13.30	PK	308	1.4	H
11490	28.26	17.46	45.72	54	-8.28	AV	121	1.7	H
11490	44.50	17.46	61.96	74	-12.04	PK	205	1.5	V
11490	29.80	17.46	47.26	54	-6.74	AV	235	1.4	V
Channel:5825MHz									
11650	43.28	17.57	60.85	74	-13.15	PK	308	1.4	H
11650	28.87	17.57	46.44	54	-7.56	AV	121	1.7	H
11650	40.86	17.57	58.43	74	-15.57	PK	205	1.5	V
11650	28.81	17.57	46.38	54	-7.62	AV	235	1.4	V

Modulation : 802.11(n40) (the worst data)

Freq (MHz)	Rd_level (dBuV/m)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	detector	Height	Degree	Antenna polarization
Channel:5190MHz									
10380	43.92	16.34	60.26	74	-13.74	PK	6	1.4	H
10380	28.37	16.34	44.71	54	-9.29	AV	245	1.5	H
10380	40.30	16.34	56.64	74	-17.36	PK	251	1.7	V
10380	27.48	16.34	43.82	54	-10.18	AV	39	1.3	V
Channel:5230MHz									
10460	41.67	16.15	57.82	74	-16.18	PK	308	1.4	H
10460	28.93	16.15	45.08	54	-8.92	AV	121	1.7	H
10460	40.40	16.15	56.55	74	-17.45	PK	205	1.5	V
10460	25.24	16.15	41.39	54	-12.61	AV	235	1.4	V
Channel:5755MHz									
11510	40.98	17.49	58.47	74	-15.53	PK	308	1.4	H
11510	27.62	17.49	45.11	54	-8.89	AV	121	1.7	H
11510	40.33	17.49	57.82	74	-16.18	PK	205	1.5	V
11510	25.84	17.49	43.33	54	-10.67	AV	235	1.4	V
Channel:5795MHz									
11590	42.71	17.52	60.23	74	-13.77	PK	308	1.4	H
11590	28.39	17.52	45.91	54	-8.09	AV	121	1.7	H
11590	42.49	17.52	60.01	74	-13.99	PK	205	1.5	V
11590	24.85	17.52	42.37	54	-11.63	AV	235	1.4	V

Modulation : 802.11(VH80) (the worst data)


Freq (MHz)	Rd_level (dBuV/m)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over (dB)	detector	Height	Degree	Antenna polarization
Channel:5210MHz									
10420	41.64	16.25	57.89	74	-16.11	PK	6	1.4	H
10420	29.33	16.25	45.58	54	-8.42	AV	245	1.5	H
10420	39.49	16.25	55.74	74	-18.26	PK	251	1.7	V
10420	29.14	16.25	45.39	54	-8.61	AV	39	1.3	V
Channel:5775MHz									
11550	42.79	17.5	60.29	74	-13.71	PK	308	1.4	H
11550	26.29	17.5	43.79	54	-10.21	AV	121	1.7	H
11550	43.31	17.5	60.81	74	-13.19	PK	205	1.5	V
11550	27.15	17.5	44.65	54	-9.35	AV	235	1.4	V

Remark:

- 1.Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits
- 2.The EUT was tested in the low, high channel and the worst case position data was reported.
- 3.Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

8. BAND EDGE

8.1 Block Diagram Of Test Setup

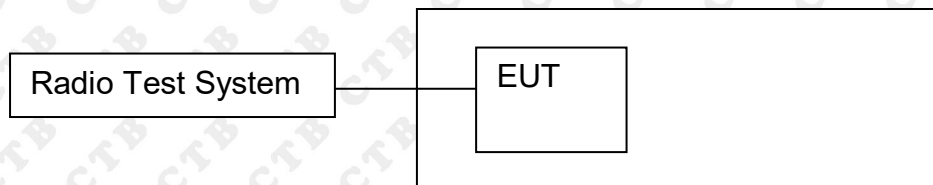

8.2 Limit

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.
- (6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.


8.3 Test procedure


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

8.4 Test Result


Test Graph

5150-5250MHz

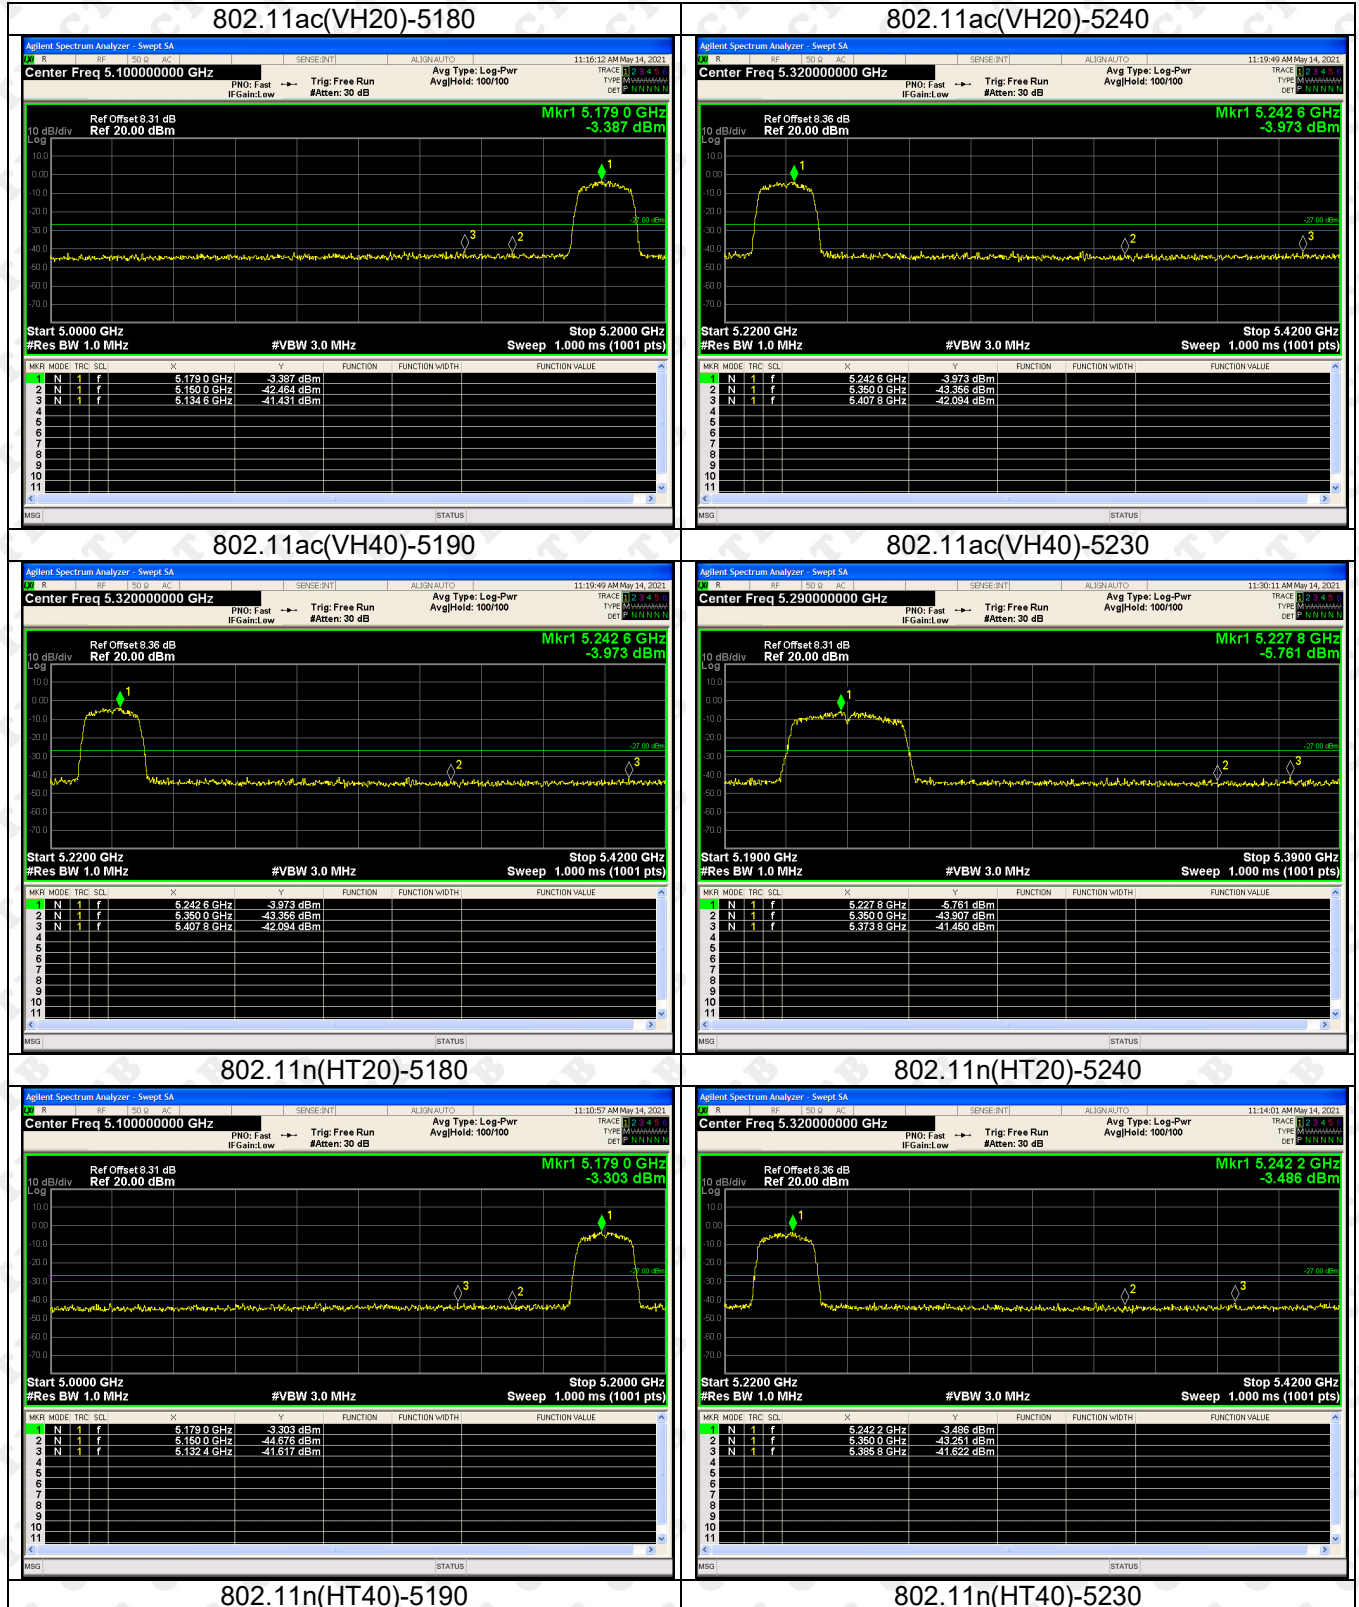


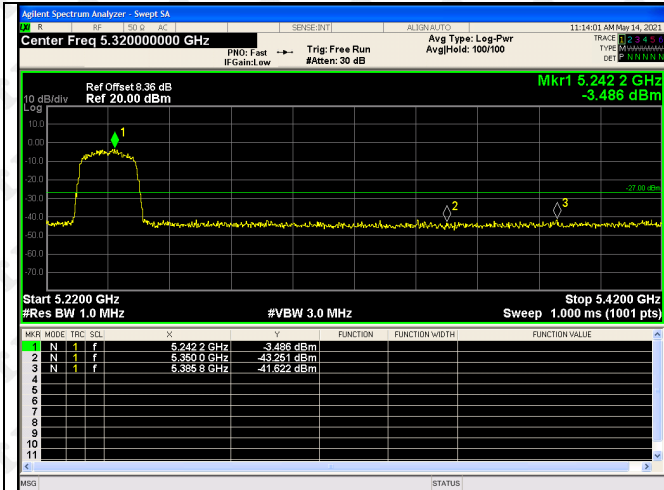



802.11ac(VH80)-5210

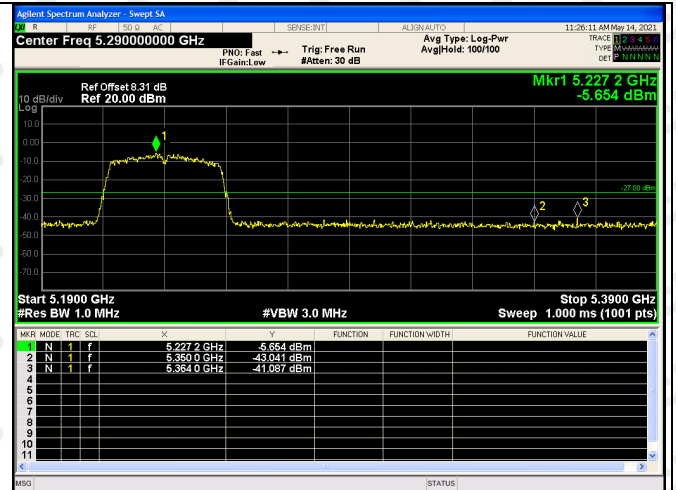


802.11a(VH20)-5180

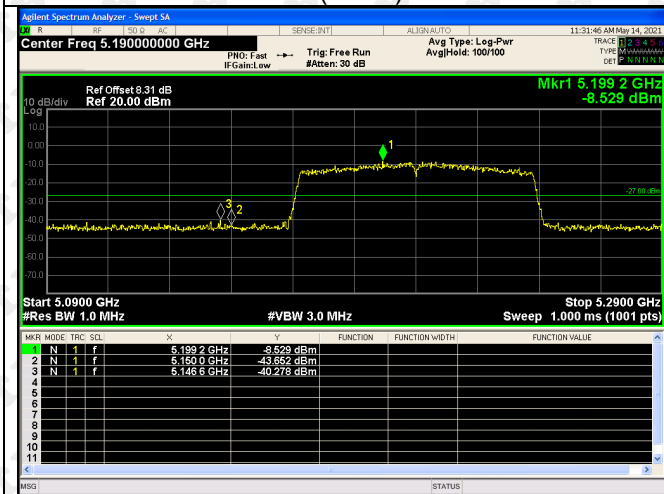


802.11a(VH20)-5240

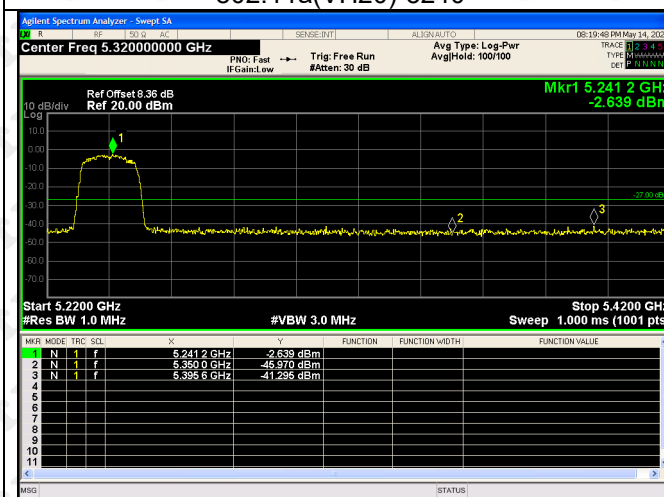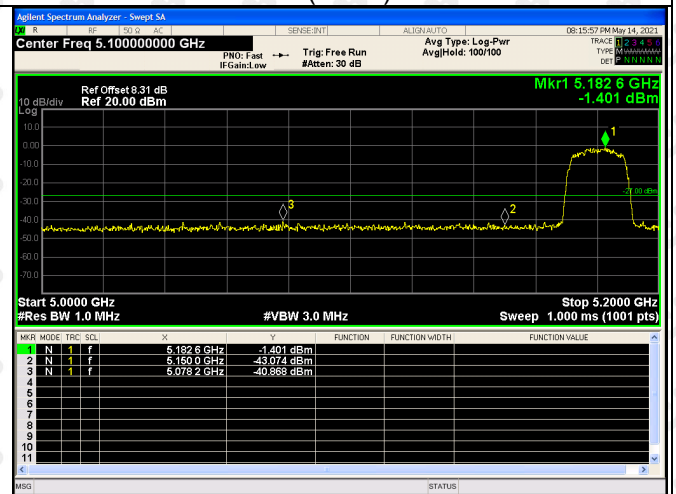


5725-5850MHz

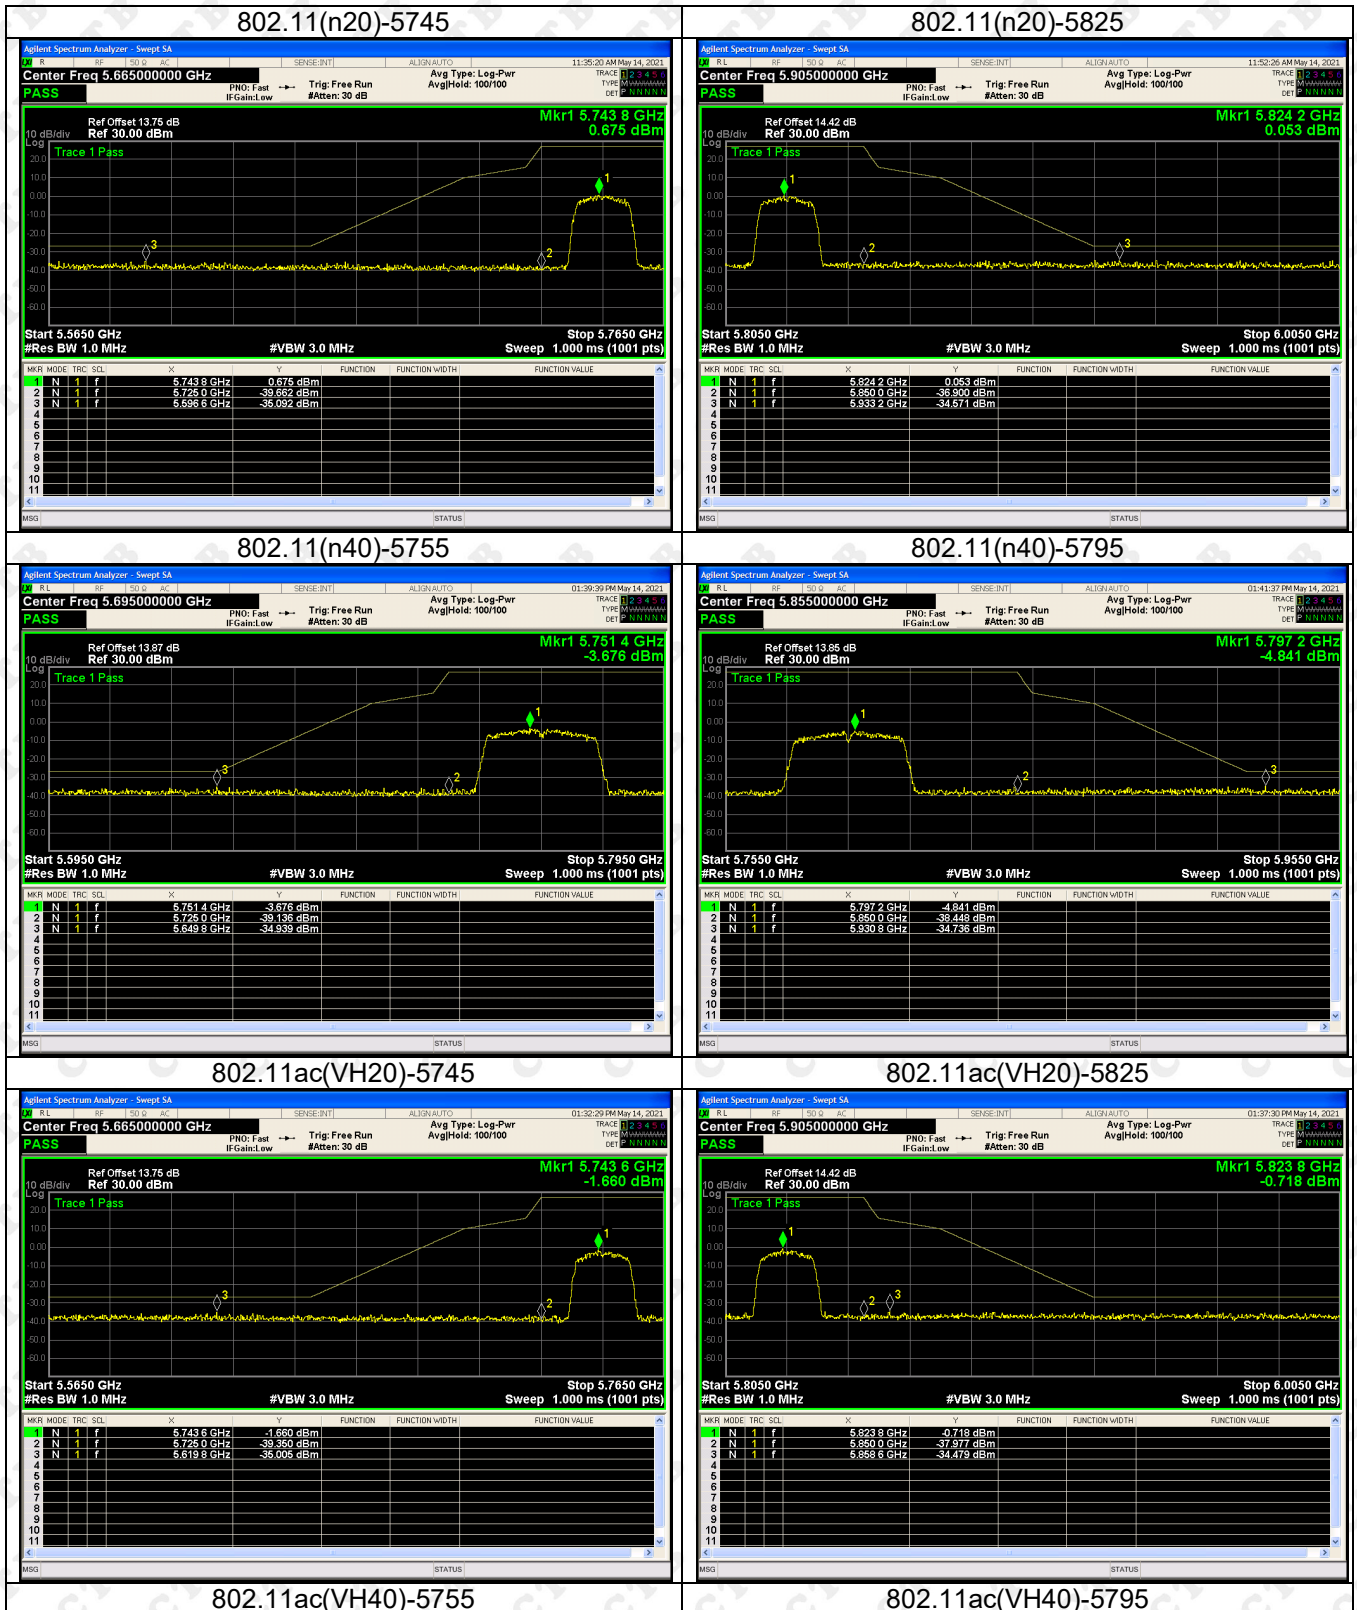


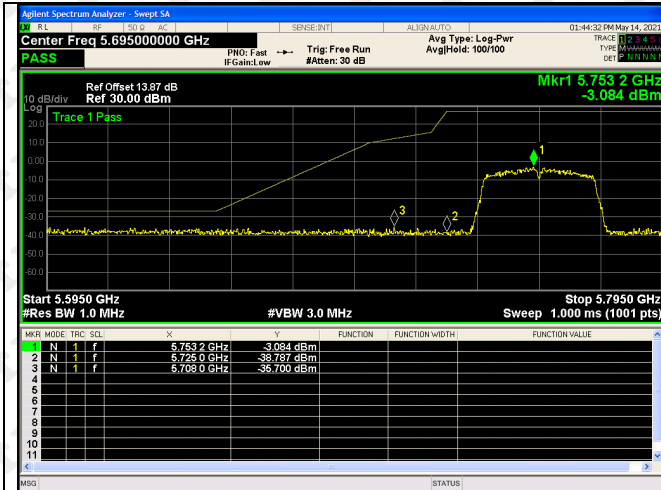


802.11ac(VH80)-5775

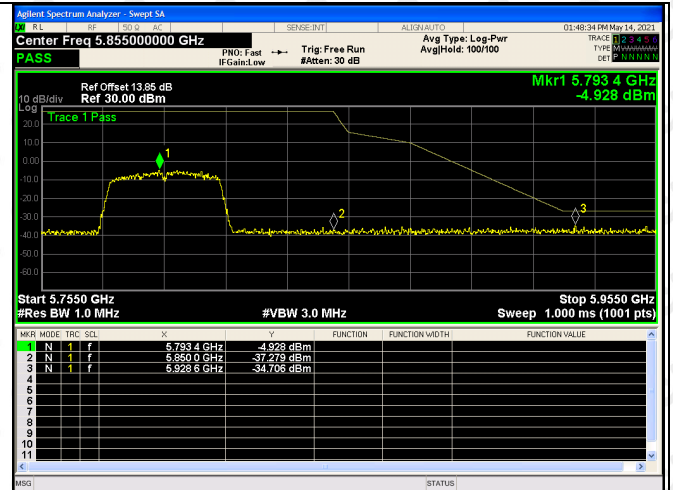

802.11a(VH20)-5745

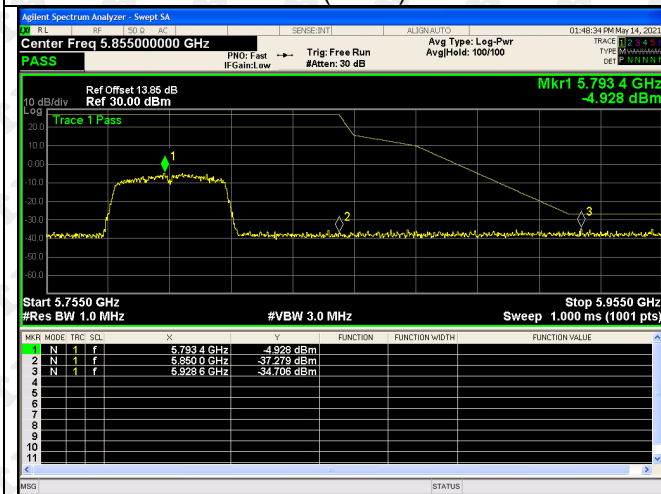


802.11a(VH20)-5825

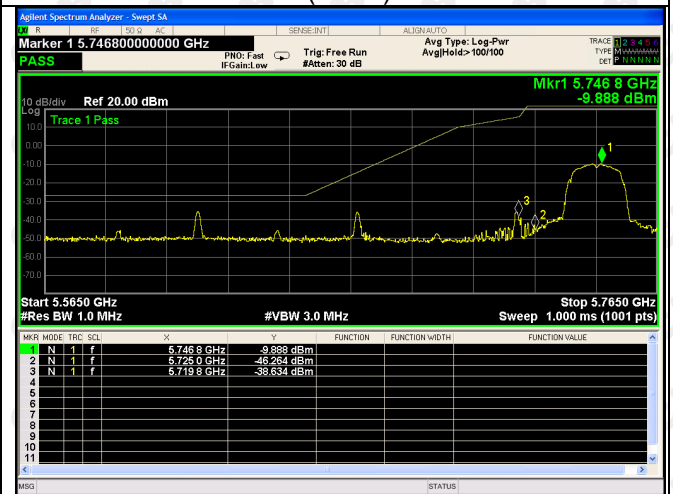

9. CONDUCTED PEAK OUTPUT POWER

9.1 Block Diagram Of Test Setup

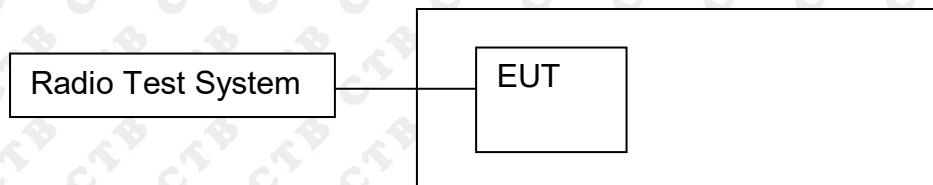

9.2 Limit

(1) For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p.

at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(4) The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

(5) The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less.

Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

(h) Transmit Power Control (TPC) and Dynamic Frequency Selection (DFS).

(1) Transmit power control (TPC). U-NII devices operating in the 5.25-5.35 GHz band and the 5.47-5.725 GHz band shall employ a TPC mechanism. The U-NII device is required to have the capability to operate at least 6 dB below the mean EIRP value of 30 dBm. A TPC mechanism is not required for systems with an e.i.r.p. of less than 500 mW.

9.3 Test procedure

According to KDB789033 D02v02r01 sectionE, the following is the measurement procedure.

- (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- (ii) Set RBW = 1 MHz.
- (iii) Set VBW $\geq$ 3 MHz.
- (iv) Number of points in sweep $\geq 2 \times \text{span} / \text{RBW}$. (This ensures that bin-to-bin spacing is $\leq \text{RBW}/2$, so that narrowband signals are not lost between frequency bins.)
- (v) Sweep time = auto.
- (vi) Detector = power averaging (rms), if available. Otherwise, use sample detector mode.
- (vii) If transmit duty cycle $< 98\%$, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle $\geq 98\%$, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run."
- (viii) Trace average at least 100 traces in power averaging (rms) mode.
- (ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the spectrum.


9.4 Test Result

Test mode1	Test Channel (MHz)	Output Power dBm	Limit dBm
802.11a20	5180	7.063	23.98
	5200	7.772	23.98
	5240	7.946	23.98
802.11ac20	5180	6.243	23.98
	5200	6.608	23.98
	5240	6.286	23.98
802.11ac40	5190	6.717	23.98
	5230	6.599	23.98
802.11ac80	5210	6.642	23.98
802.11n(HT20)	5180	6.274	23.98
	5200	6.473	23.98
	5240	6.308	23.98
802.11n(HT40)	5190	6.721	23.98
	5230	6.757	23.98


Test mode1	Test Channel (MHz)	Output Power dBm	Limit dBm
802.11a20	5745	7.975	30
	5785	7.321	30
	5825	7.053	30
802.11ac20	5745	8.152	30
	5785	6.418	30
	5825	8.658	30
802.11ac40	5755	9.209	30
	5795	8.723	30
802.11ac80	5775	9.024	30
802.11n(HT20)	5745	10.619	30
	5785	8.802	30
	5825	10.373	30
802.11n(HT40)	5755	8.193	30
	5795	7.4	30

5150-5250MHz


802.11n(HT20)-5180

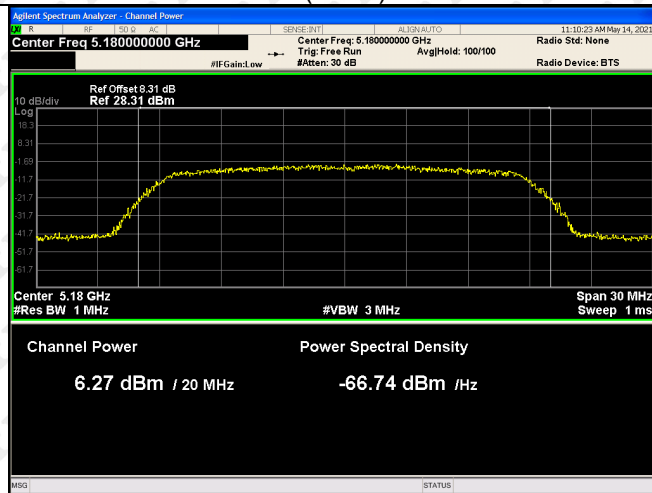


802.11n(HT20)-5200

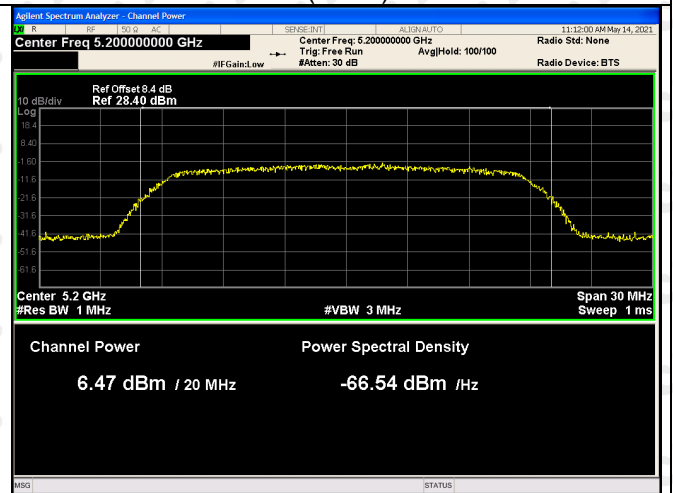


802.11n(HT20)-5240

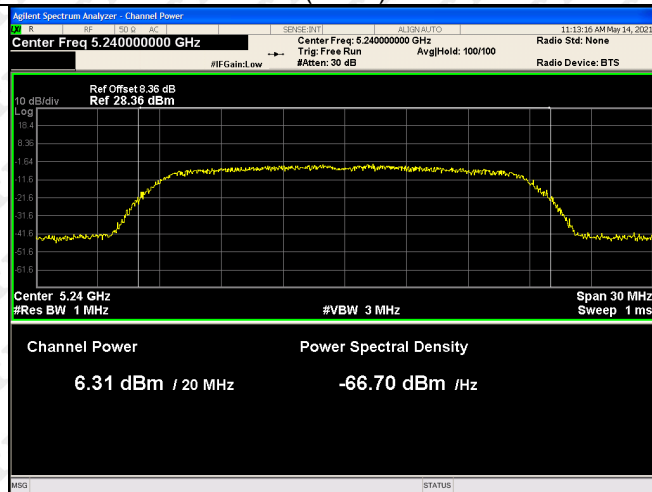


802.11n(HT40)-5190

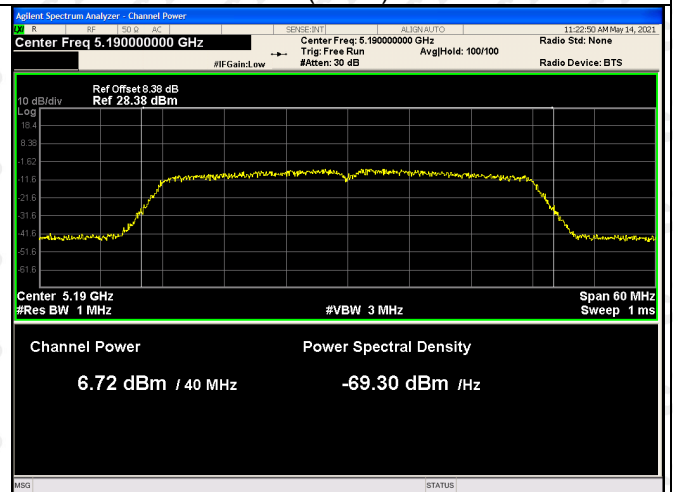

802.11n(HT40)-5230

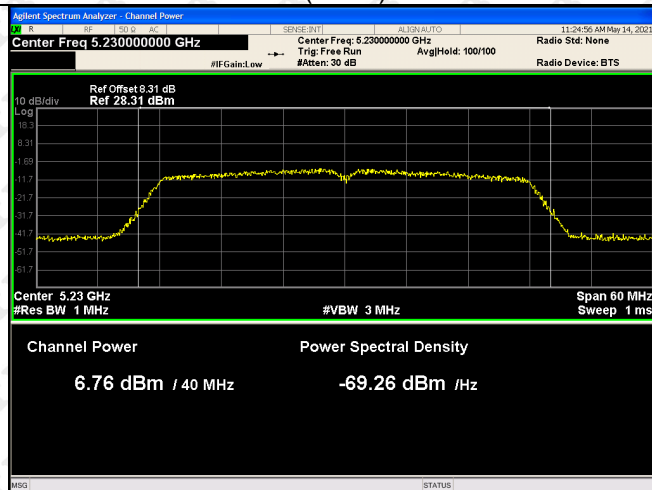


802.11ac(VH20)-5180

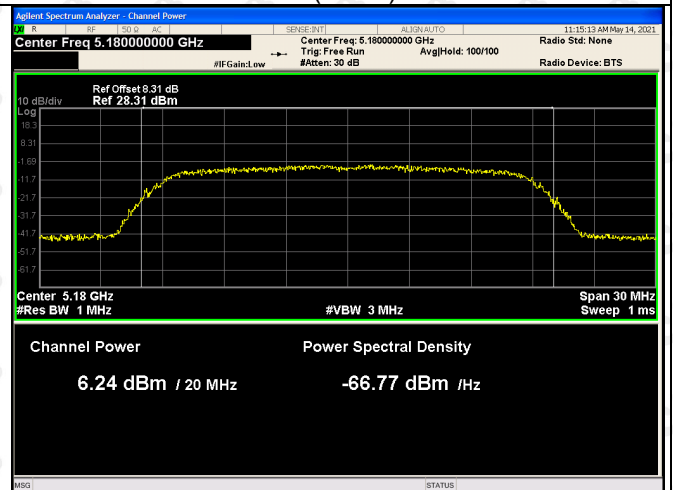


802.11ac(VH20)-5200


802.11ac(VH20)-5240

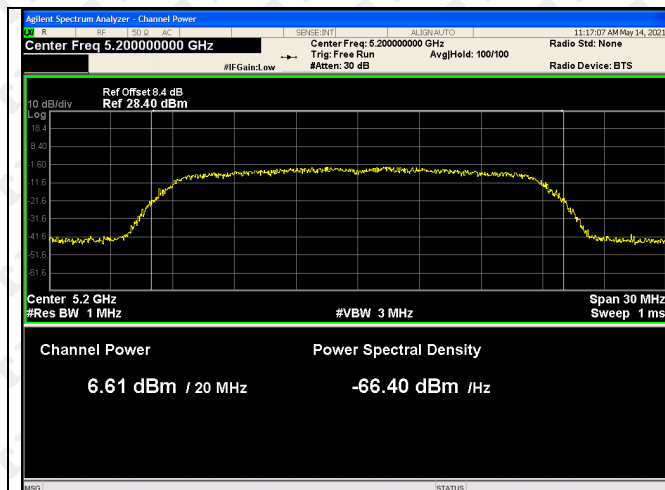


802.11ac(VH40)-5190

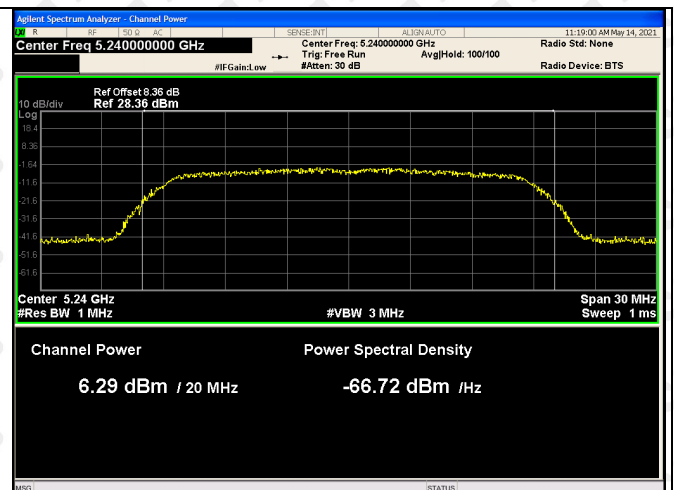


802.11ac(VH40)-5230

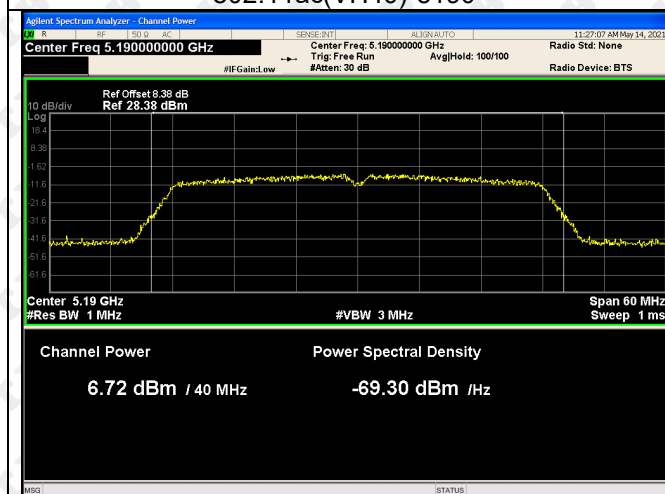


802.11ac(VH80)-5210

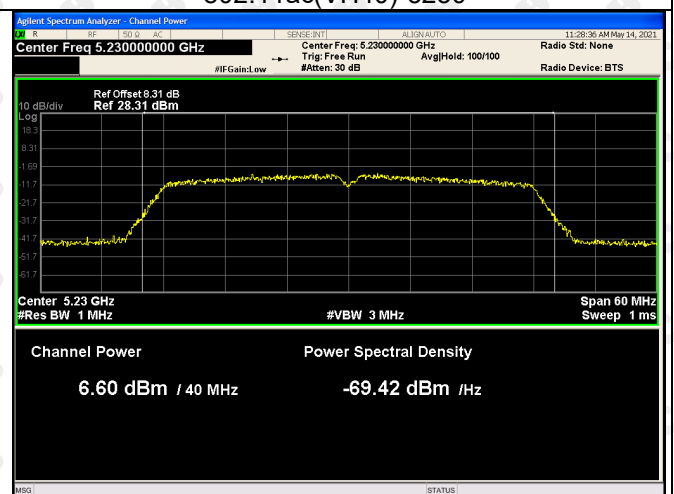

802.11a(HT20)-5180

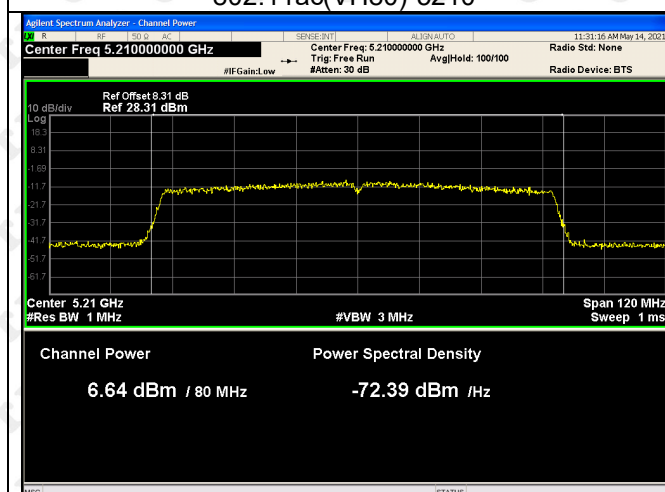


802.11a(HT20)-5200

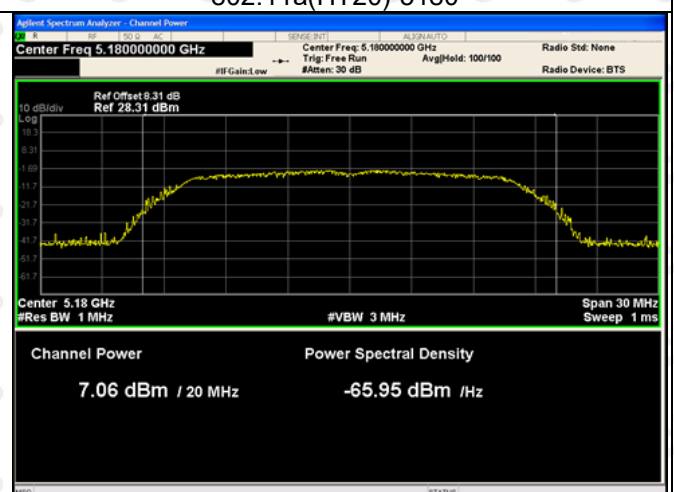


802.11a(HT20)-5240




5725-5850MHz

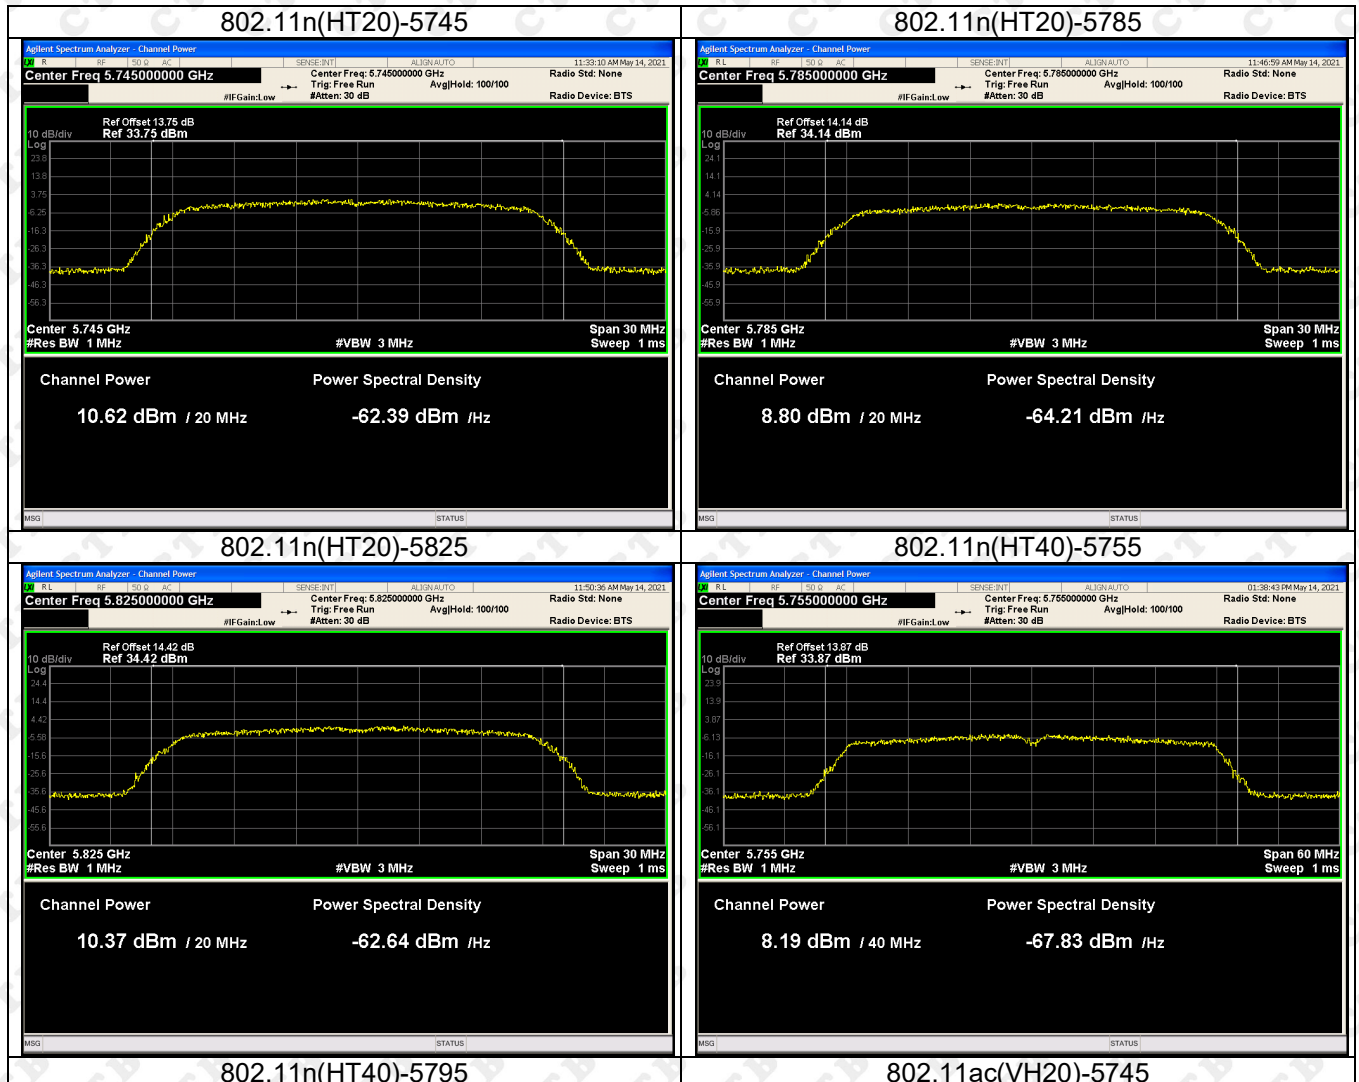


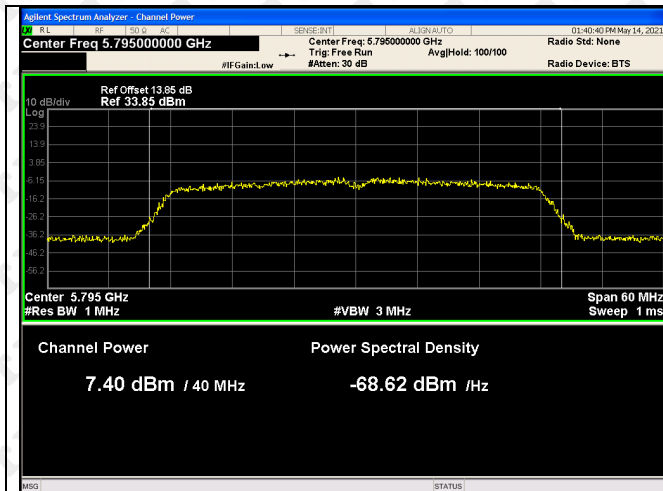


802.11ac(VH20)-5785

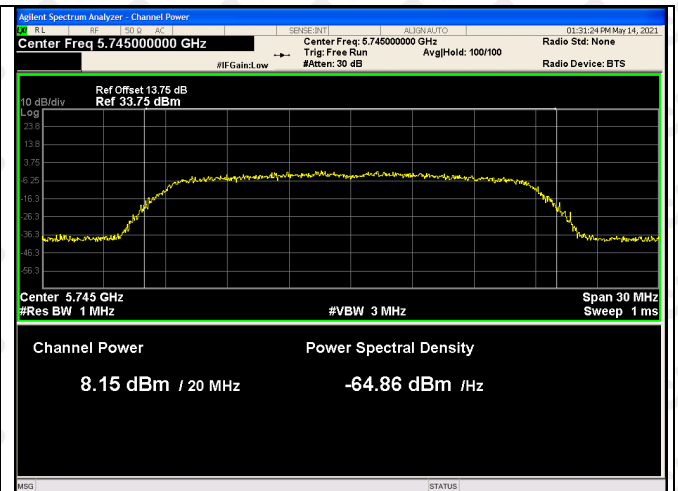


802.11ac(VH20)-5825

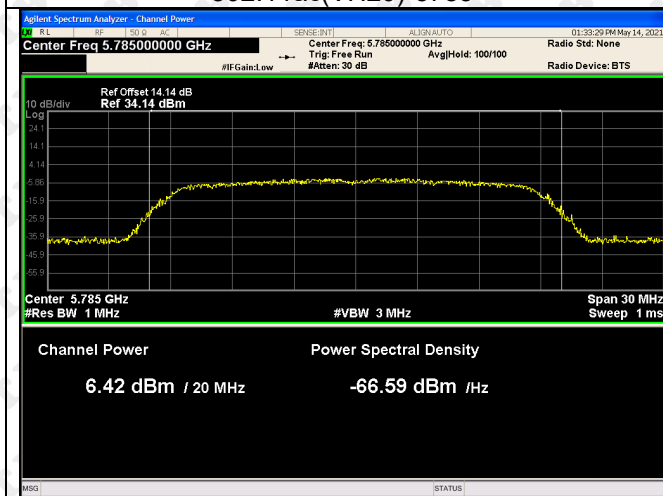


802.11ac(VH40)-5755

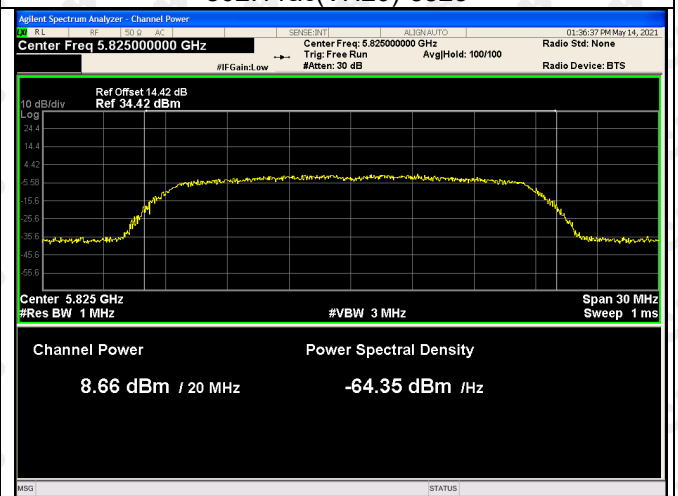


802.11ac(VH40)-5795

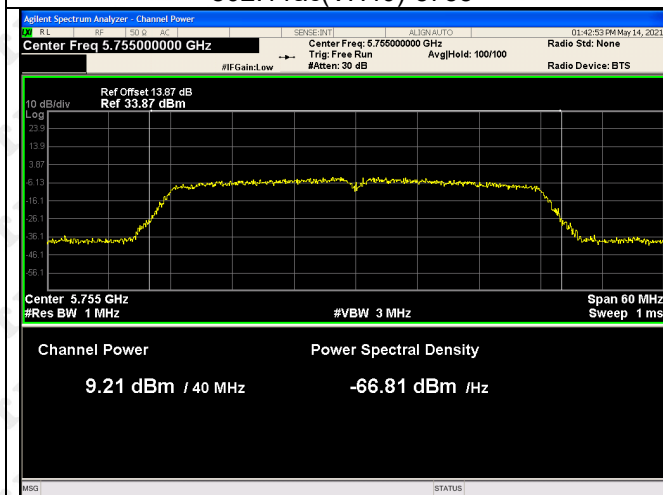

802.11ac(VH80)-5775

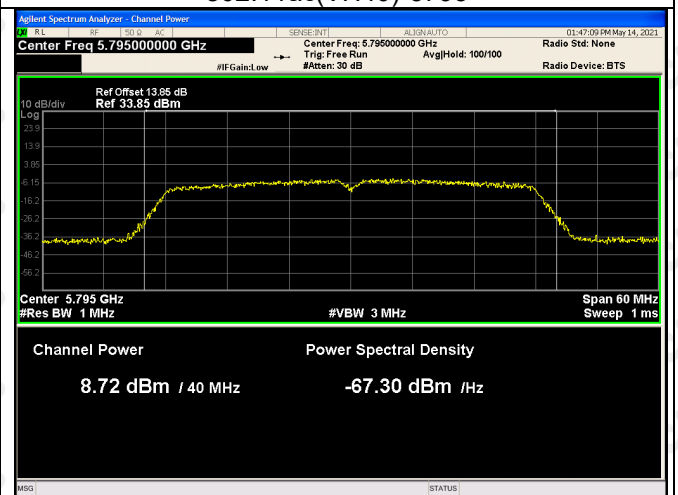



802.11a(HT20)-5745

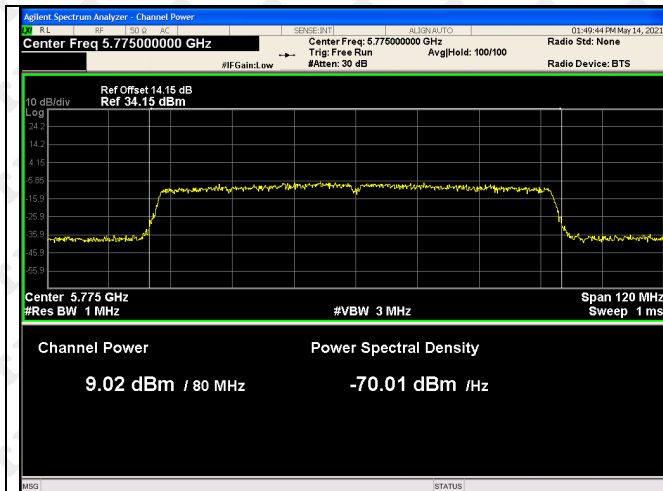

802.11a(HT20)-5785




802.11a(HT20)-5825

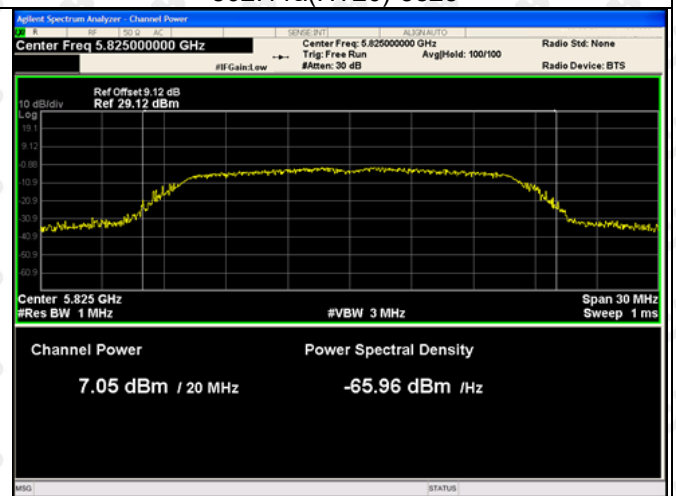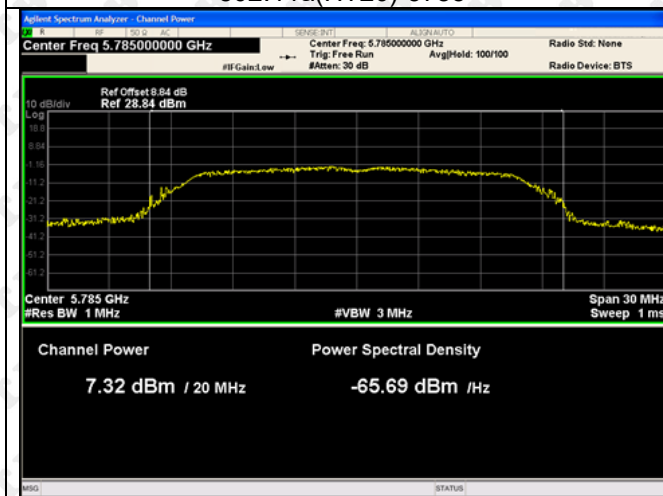

10. EMISSION BANDWIDTH& OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

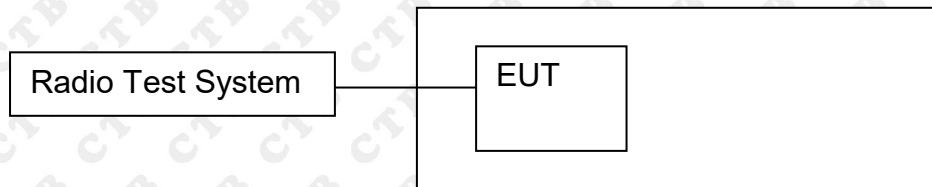

10.2 Limits

(1) For the band 5.15-5.25 GHz.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(e) Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

10.3 Test Procedure

According to KDB789033 D02v02r01 sectionE, the following is the measurement procedure.

1. Emission Bandwidth (EBW)

- Set RBW = approximately 1% of the emission bandwidth.
- Set the VBW > RBW.
- Detector = Peak.
- Trace mode = max hold.
- Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

2. Minimum Emission Bandwidth for the band 5.725–5.85 GHz

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 kHz for the band 5.725–5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- Set RBW = 100 kHz.
- Set the video bandwidth (VBW) $\geq 3 * \text{RBW}$.

- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described in this section. For devices that use channel aggregation refer to III.A and III.C for determining emission bandwidth.

D. 99% Occupied Bandwidth

The 99% occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. Measurement of the 99% occupied bandwidth is *required* only as a condition for using the optional band-edge measurement techniques described in II.G.3.d). Measurements of 99% occupied bandwidth may also optionally be used in lieu of the EBW to define the minimum frequency range over which the 789033 D02 General UNII Test Procedures New Rules v02r01 Page 4 spectrum is integrated when measuring maximum conducted output power as described in II.E. However, the EBW must be measured to determine bandwidth dependent limits on maximum conducted output power in accordance with Section 15.407(a).

The following procedure shall be used for measuring (99%) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1% to 5% of the OBW
4. Set VBW $\geq 3 * RBW$
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99% power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99% power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

10.4 Test Results


Test mode	Test Channel (MHz)	26dB Bandwidth (MHz)	Limit (MHz)
802.11a20	5180	20.436	≥ 0.5
	5200	20.211	≥ 0.5
	5240	20.19	≥ 0.5
802.11ac20	5180	20.213	≥ 0.5
	5200	20.411	≥ 0.5
	5240	19.964	≥ 0.5
802.11ac40	5190	39.736	≥ 0.5
	5230	39.984	≥ 0.5
802.11ac80	5210	79.051	≥ 0.5
802.11n(HT20)	5180	20.304	≥ 0.5
	5200	20.057	≥ 0.5
	5240	20.259	≥ 0.5
802.11n(HT40)	5190	39.882	≥ 0.5
	5230	39.406	≥ 0.5

Test mode	Test Channel (MHz)	6dB Bandwidth (MHz)	99% Bandwidth (MHz)	Limit (MHz)
802.11a20	5745	12.584	16.316	≥ 0.5
	5785	13.775	16.353	≥ 0.5
	5825	13.862	16.336	≥ 0.5
802.11ac20	5745	14.994	17.518	≥ 0.5
	5785	16.944	17.546	≥ 0.5
	5825	15.02	17.533	≥ 0.5
802.11ac40	5755	33.79	35.848	≥ 0.5
	5795	32.622	35.904	≥ 0.5
802.11ac80	5775	75.12	75.420	≥ 0.5
802.11n(HT20)	5745	14.976	17.529	≥ 0.5
	5785	14.578	17.527	≥ 0.5
	5825	15.072	17.532	≥ 0.5
802.11n(HT40)	5755	35.049	35.847	≥ 0.5
	5795	33.823	35.857	≥ 0.5


Test Graph1

5150-5250MHz


802.11n(HT20)-5180

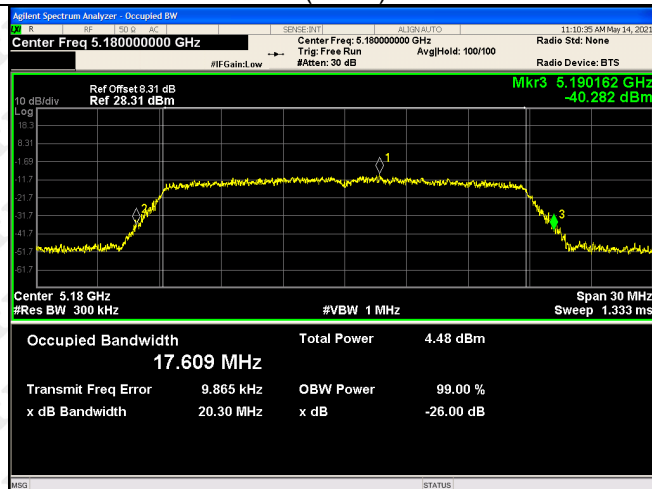


802.11n(HT20)-5200

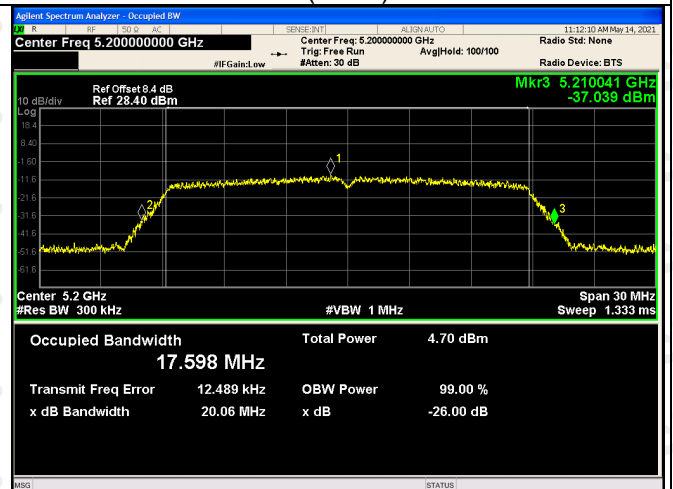


802.11n(HT20)-5240

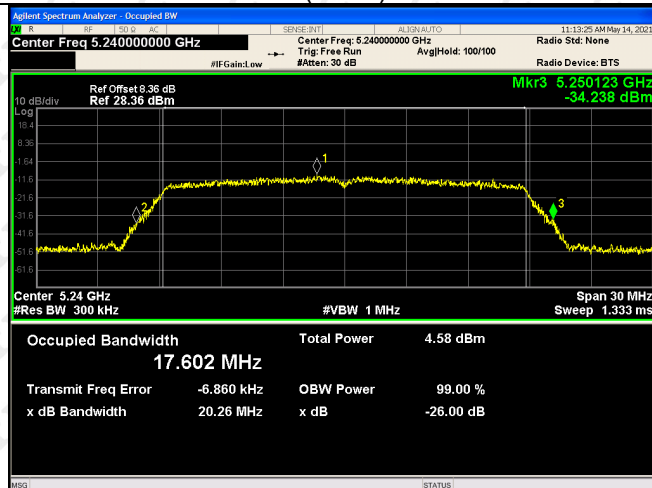


802.11n(HT40)-5190

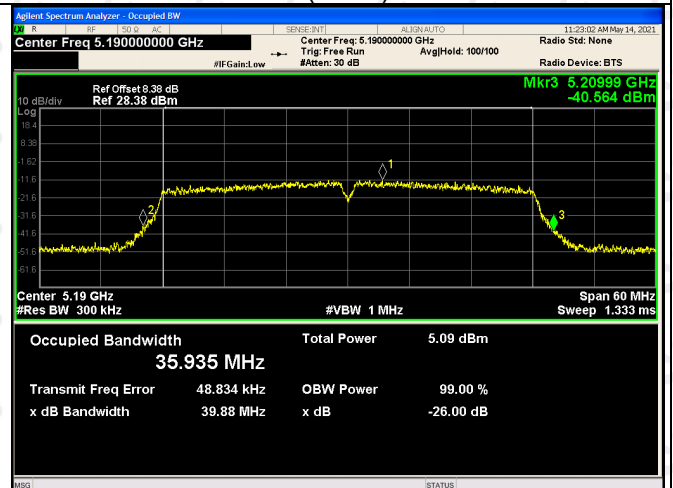

802.11n(HT40)-5230

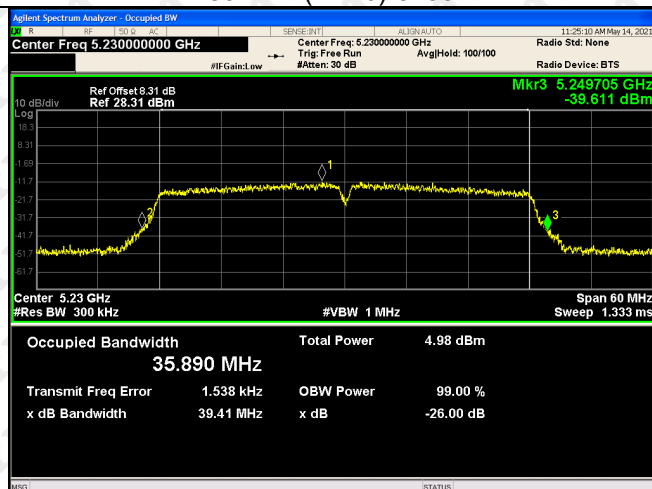

802.11ac(VH20)-5180

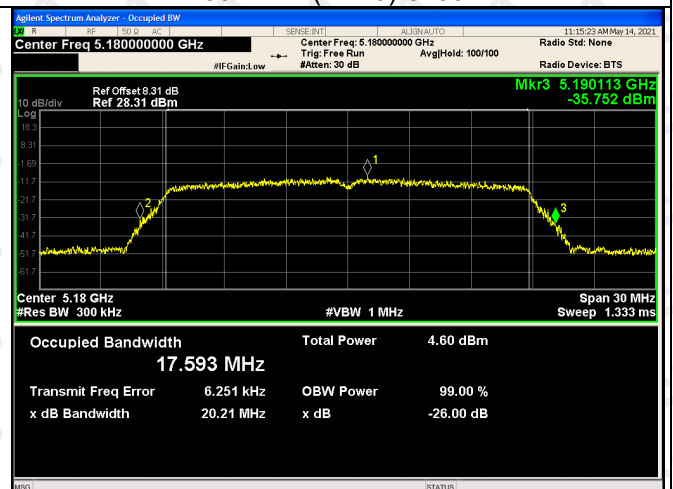

802.11ac(VH20)-5200

802.11ac(VH20)-5240