

243 Jubug-Ri, Yangji-Myeon, Yongin-Si, Gyeonggi-Do, Korea 449-822 Tel: +82-31-323-6008 Fax: +82-31-323-6010 http://www.ltalab.com



Dates of Tests: January 02 ~ February 08, 2013

Test Report S/N: LR500111302A

Test Site: LTA Co., Ltd.

CERTIFICATION OF COMPLIANCE

FCC ID

APPLICANT

VUJAT911

ATID Co., Ltd.

Equipment Class : Part 15 Spread Spectrum Transmitter (DSS)

Manufacturing Description : Industrial PDA
Manufacturer : ATID Co., Ltd.

Model name : AT911

Varient Model name : Smart Eagle

Test Device Serial No.: : Identical prototype

Rule Part(s) : FCC Part 15.247 Subpart C; ANSI C-63.4-2003

Frequency Range : 2402 ~ 2480MHz

RF power : Max 1.86 dBm – Conducted

Data of issue : February 13, 2013

This test report is issued under the authority of:

The test was supervised by:

Kyu-Hyun Lee, Manager

Jung-Moo Her, Test Engineer

This test result only responds to the tested sample. It is not allowed to copy this report even partly without the allowance of the test laboratory. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.



NVLAP LAB Code.: 200723-0

TABLE OF CONTENTS

3. TEST REPORT	5
3.1 SUMMARY OF TESTS	5
3.2 FREQUENCY HOPPING SYSTEM REQUIREMENTS	6
3.3 TECHNICAL CHARACTERISTICS TEST	8
3.3.1 CARRIER FREQUENCY SEPARATION	8
3.3.2 NUMBER OF HOPPING FREQUENCIES	10
3.3.3 20 dB BANDWIDTH	
3.3.4 TIME OF OCCUPANCY (Dwell Time)	
3.3.5 TRANSMITTER OUTPUT POWER	
3.3.6 BAND – EDGE & SPURIOUS	
3.3.7 FIELD STRENGTH OF HARMONICS	34
3.3.8 AC CONDUCTED EMISSIONS	38

1. General information's

1-1 Test Performed

Company name : LTA Co., Ltd.

Address : 243, Jubug-ri, Yangji-Myeon, Youngin-Si, Kyunggi-Do, Korea. 449-822

Web site : http://www.ltalab.com
E-mail : chahn@ltalab.com
Telephone : +82-31-323-6008
Facsimile +82-31-323-6010

Quality control in the testing laboratory is implemented as per ISO/IEC 17025 which is the "General requirements for the competents of calibration and testing laboratory".

1-2 Accredited agencies

LTA Co., Ltd. is approved to perform EMC testing by the following agencies:

Agency	Country	Accreditation No.	Validity	Reference
NVLAP	U.S.A	200723-0	2013-09-30	ECT accredited Lab.
RRL	KOREA	KR0049	2013-04-24	EMC accredited Lab.
FCC	U.S.A	610755	2014-04-27	FCC filing
FCC	U.S.A	649054	2013-04-13	FCC CAB
VCCI	JAPAN	R2133(10m), C2307	2014-06-21	VCCI registration
VCCI	JAPAN	T-2009	2013-12-23	VCCI registration
VCCI	JAPAN	G-563	2015-05-28	VCCI registration
IC	CANADA	5799A-1	2015-06-21	IC filing

2. Information's about test item

2-1 Client & Manufacturer

Company name : ATID Co., Ltd

Address : #1210 Byuksan/Gyungin digital valley II #481 – 10 Gasan-Dong

Gumchon-Gu Seoul KOREA

Tel / Fax : Tel : 82-2-544-1436 / Fax :82-2-544-1438

2-2 Equipment Under Test (EUT)

Trade name : ATID

Model name : AT911

Serial number : Identical prototype

Date of receipt : December 05, 2012

EUT condition : Pre-production, not damaged

Antenna type : PIFA antenna with Max. -1.573 dBi gain

Frequency Range : 2402 ~ 2480MHz

RF output power : Max. 1.86 dBm - Conducted

Number of channels : 79

Duty cycle : 80.96 % Channel spacing : 1MHz

Channel Access Protocol : Frequency Hopping Spread Spectrum (FHSS)

Power Source : 3.7 Vdc from Battery (Li-Ion Polymer Battery)

Power for Adaptor. : Input: 100-240VAC, 0.3A Output: 5.0VDC, 2A

Firmware Version : V 1.0

2-3 Tested frequency

Bluetooth	LOW	MID	HIGH
Frequency (MHz)	2402	2441	2480

3. Test Report

3.1 Summary of tests

FCC Part Section(s)	Parameter	Limit	Test Condition	Status (note 1)
15.247(a)	Carrier Frequency Separation	> 25 kHz		С
15.247(a)	Number of Hopping Frequencies	> 15 hops		С
15.247(a)	20 dB Bandwidth 99% Bandwidth	> 1.5 MHz		С
15.247(a)	Dwell Time	< 0.4 seconds	Conducted	С
15.247(b)	Transmitter Output Power	< 250 mWatt		С
15.247(d)	Conducted Spurious emission	> 20 dBc		С
15.247(d)	Band Edge	> 20 dBc		С
15.249 / 15.209	Field Strength of Harmonics	< 54 dBuV (at 3m)	D. II. I	С
15.109	Field Strength	-	Radiated	С
15.207 /15.107	AC Conducted Emissions	EN 55022	Line Conducted	С
15.203	Antenna requirement	-	-	С

<u>Note 1</u>: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable

<u>Note 2</u>: The data in this test report are traceable to the national or international standards.

Note 1: Antenna Requirement

→ The ATID Co., Ltd., FCC ID: VUJAT911 unit complies with the

requirement of §15.203.

The antenna type is PIFA antenna.

Note 2: The sample was tested according to the following specification: FCC Parts 15.247; ANSI C-63.4-2003

Note3: TEST METHODOLOGY

The measurement procedure described in the American National Standard for Testing Unlicensed Wireless Devices(ANSI C63.10-2009) and FCC Public Notice DA 00-705 dated March 30, 2000 entitled "Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems" were used in the measurement of the ATID Co., Ltd., FCC ID: VUJAT911

3.2 Frequency Hopping System Requirements

3.2.1 Standard Applicable


According to FCC Part 15.247(a)(1), The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

- (g) Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.
- (h) The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.


3.2.2 EUT Pseudorandom Frequency Hopping Sequence

The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage, and the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones. Number of shift register stages: 9

Length of pseudo-random sequence: 29-1 = 511 bits Longest sequence of zeros: 8 (non-inverted signal)



Linear Feedback Shift Register for Generation of the PRBS sequence



Each frequency used equally on the average by each transmitter.

The system receiver have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

3.2.3 Frequency Hopping System

This transmitter device is frequency hopping device, and complies with FCC part 15.247 rule.

This device uses Bluetooth radio which operates in 2400-2483.5 MHz band. Bluetooth uses a radio technology called frequency-hopping spread spectrum, which chops up the data being sent and transmits chunks of it on up to 79 bands (1 MHz each; centred from 2402 to 2480 MHz) in the range 2,400-2,483.5 MHz. The transmitter switches hop frequencies 1,600 times per second to assure a high degree of data security. All Bluetooth devices participating in a given piconet are synchronized to the frequency-hopping channel for the piconet. The frequency hopping sequence is determined by the master's device address and the phase of the hopping sequence (the frequency to hop at a specific time) is determined by the master's internal clock. Therefore, all slaves in a piconet must know the master's device address and must synchronize their clocks with the master's clock.

Adaptive Frequency Hopping (AFH) was introduced in the Bluetooth specification to provide an effective way for a Bluetooth radio to counteract normal interference. AFH identifies "bad" channels, where either other wireless devices are interfering with the Bluetooth signal or the Bluetooth signal is interfering with another device. The AFH-enabled Bluetooth device will then communicate with other devices within its piconet to share details of any identified bad channels. The devices will then switch to alternative available "good" channels, away from the areas of interference, thus having no impact on the bandwidth used.

3.3 Transmitter requirements

3.3.1 Carrier Frequency Separation

Procedure:

The test follows DA000705. The carrier frequency separation was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

After the trace being stable, the reading value between the peaks of the adjacent channels using the marker-delta function was recorded as the measurement results.

The spectrum analyzer is set to:

Span = $2 \sim 3$ MHz (wide enough to capture the peaks of two adjacent channels)

RBW = 10 kHz (1% of the span or more) Sweep = auto

VBW = 10 kHz Detector function = peak

Trace = max hold

Measurement Data:

Test Results		
Carrier Frequency Separation (MHz) Result		
1.0014	Complies	

⁻ See next pages for actual measured spectrum plots.

Minimum Standard:

The EUT shall have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of 20dB bandwidth of the hopping channel, whichever is greater.

Measurement Setup






Figure 1: Measurement setup for the carrier frequency separation

<u>Carrier Frequency Separation</u> <u>Basic Mode</u>

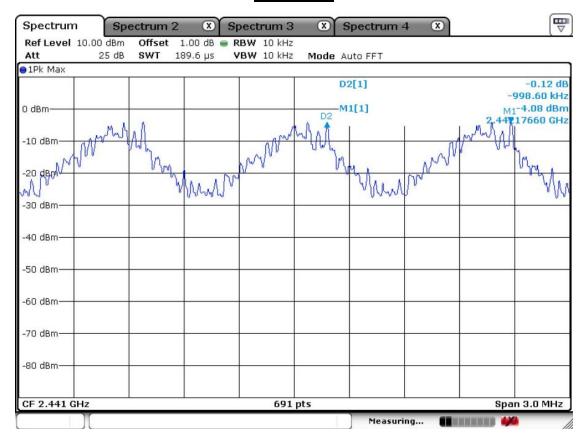

EDR Mode

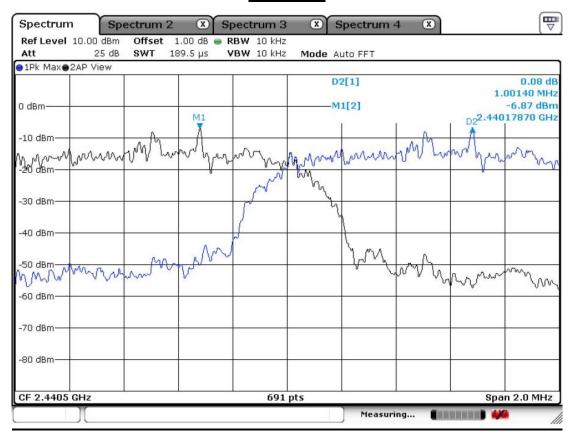

3.3.2 Number of Hopping Frequencies

Procedure:

The test follows DA000705. The number of hopping frequencies was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

To get higher resolution, four frequency ranges within the 2400 ~ 2483.5 MHz FH band were examined.

The spectrum analyzer is set to (Bluetooth):

Frequency range Start = 2400.0MHz, Stop = 2483.5 MHzRBW = 100 kHz (1% of the span or more) Sweep = auto

 $VBW = 100 \text{ kHz} (VBW \ge RBW)$ Detector function = peak

Trace = $\max \text{ hold}$ Span > 40MHz

Measurement Data: Complies

- See next pages for actual measured spectrum plots.


Minimum Standard:

At least 15 hopes

Measurement Setup

Same as the Chapter 3.2.1 (Figure 1)

Number of Hopping Frequencies

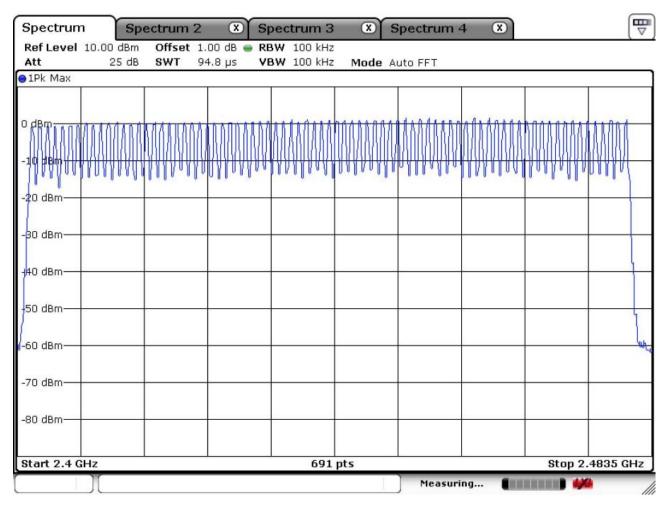

3.3.3 20 dB Bandwidth

Procedure:

The bandwidth at 20 dB below the highest inband spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels...

After the trace being stable, Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission.

The spectrum analyzer is set to (Bluetooth):

Center frequency = the highest, middle and the lowest channels

Span = 3 MHz (approximately 2 or 3 times of the 20 dB bandwidth)

RBW = 30 kHz Sweep = auto

 $VBW = 30 \text{ kHz} (VBW \ge RBW)$ Detector function = peak

 $Trace = max \ hold$

Measurement Data: Basic Mode

Frequency (MHz)	Channel No.	Test Results	s(MHz)
	Channel No.	20dB Bandwidth	99% Bandwidth
2402	0	0.903	0.925
2441	39	0.851	0.920
2480	78	0.851	0.925

Measurement Data: EDR Mode

Frequency (MHz)	Channel No	Test Results	s(MHz)
	Channel No.	20dB Bandwidth	99% Bandwidth
2402	0	1.289	1.172
2441	39	1.289	1.177
2480	78	1.289	1.172

⁻ See next pages for actual measured spectrum plots.


Minimum Standard:


N/A

Measurement Setup

Same as the Chapter 3.2.1 (Figure 1)

Channel 1 of basic mode

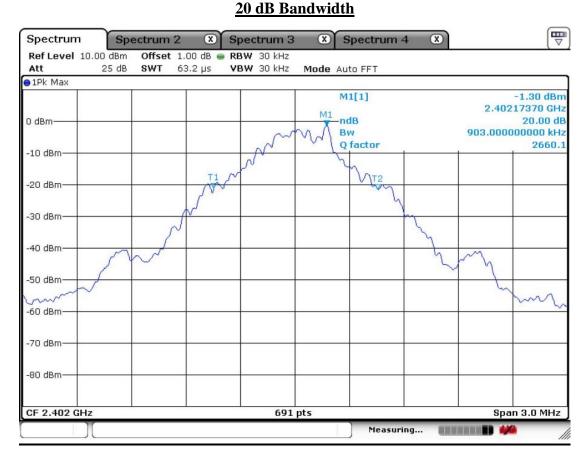

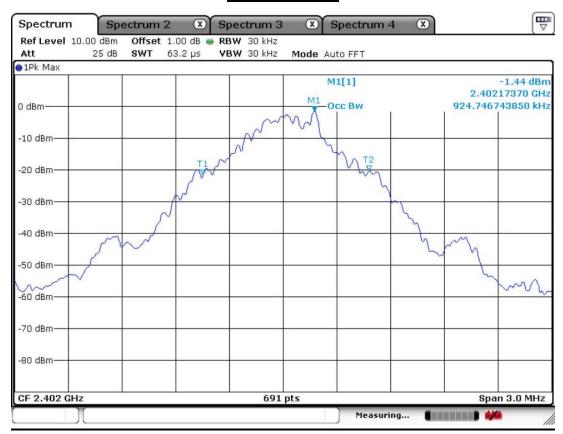



Channel 2 of basic mode 20 dB Bandwidth







Channel 3 of basic mode 20 dB Bandwidth

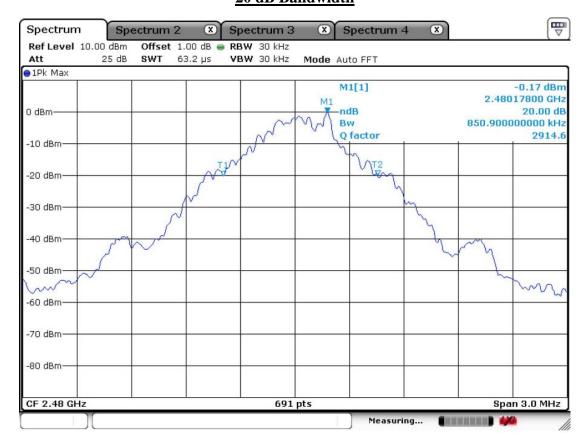

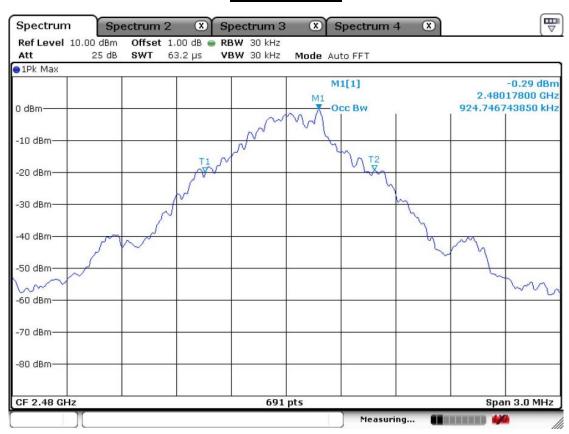



<u>Channel 1 at EDR mode</u> <u>20 dB Bandwidth</u>

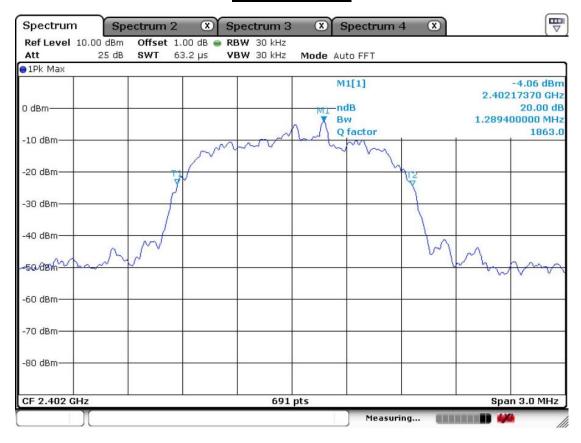

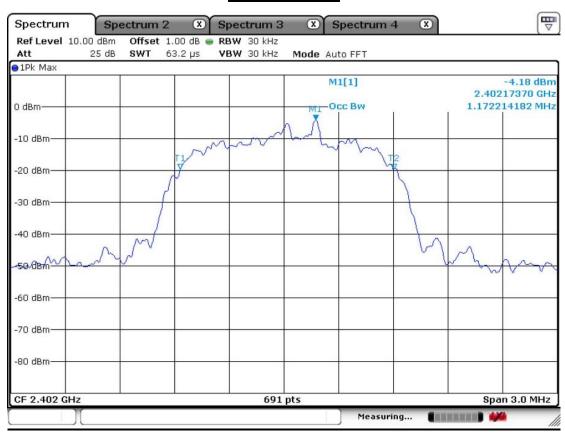



Channel 2 at EDR mode 20 dB Bandwidth

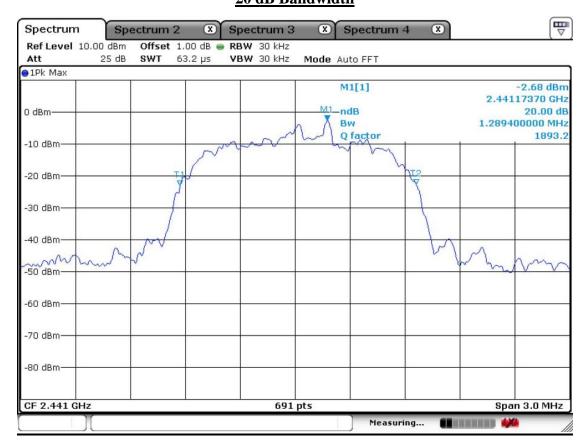

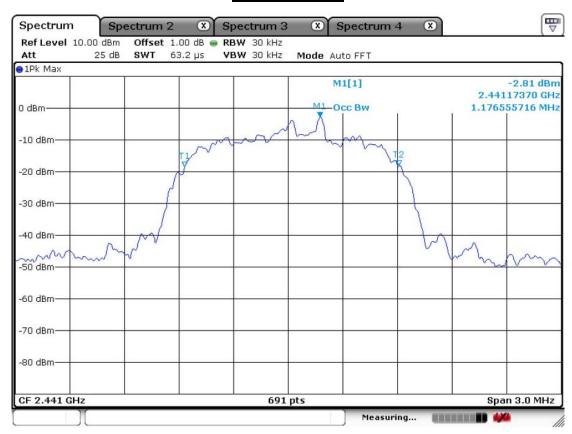

Channel 3 at EDR mode 20 dB Bandwidth

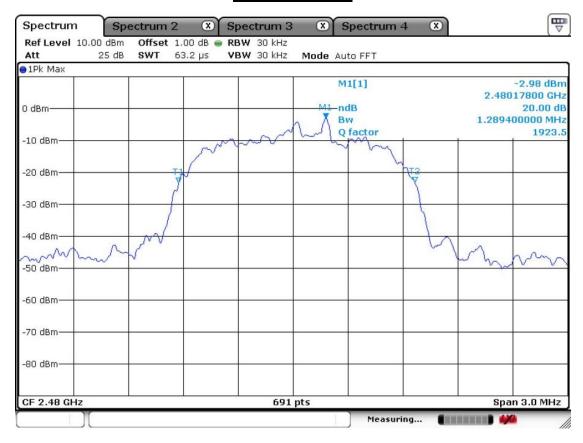

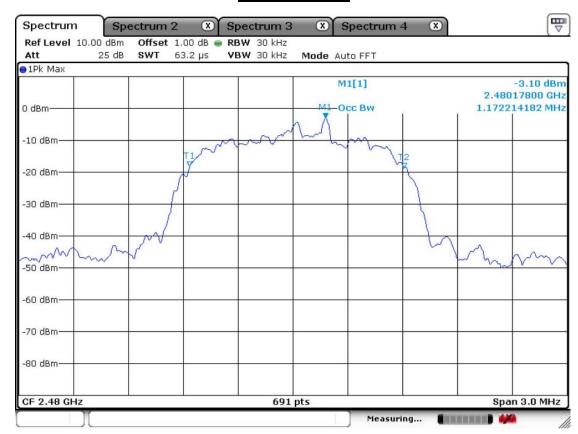

3.3.4 Time of Occupancy (Dwell Time)

Procedure:

The test follows DA000705. The dwell time was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

The spectrum analyzer is set to:

Center frequency = 2441 MHz Span = zero

RBW = 100 KHz $VBW = 100 \text{ KHz} (VBW \ge RBW)$

Trace = max hold Detector function = peak

Measurement Data (Bluetooth):

Mode	Number of transmission ina 31.6s (79Hopping*0.4)	Length of Transmission Time (msec)	Result (msec)	Limit (msec)
DH1	30(Times / 3sec) *10.533 = 315.99	0.514	162.42	400
DH3	16(Times / 3sec) *10.533 = 168.53	1.783	300.49	400
DH5	12(Times / 3sec) *10.533 = 126.40	3.051	385.65	400
EDR 3Mbps DH5	12(Times / 3sec) *10.533 = 126.40	3.072	388.30	400


- See next pages for actual measured spectrum plots.
- dwell time = $\{(\text{number of hopping per second / number of slot}) \times \text{duration time per channel}\} \times 0.4 \text{ ms}$


Minimum Standard:

0.4 seconds within a 30 second period per any frequency


Measurement Setup


Same as the Chapter 3.2.1 (Figure 1)

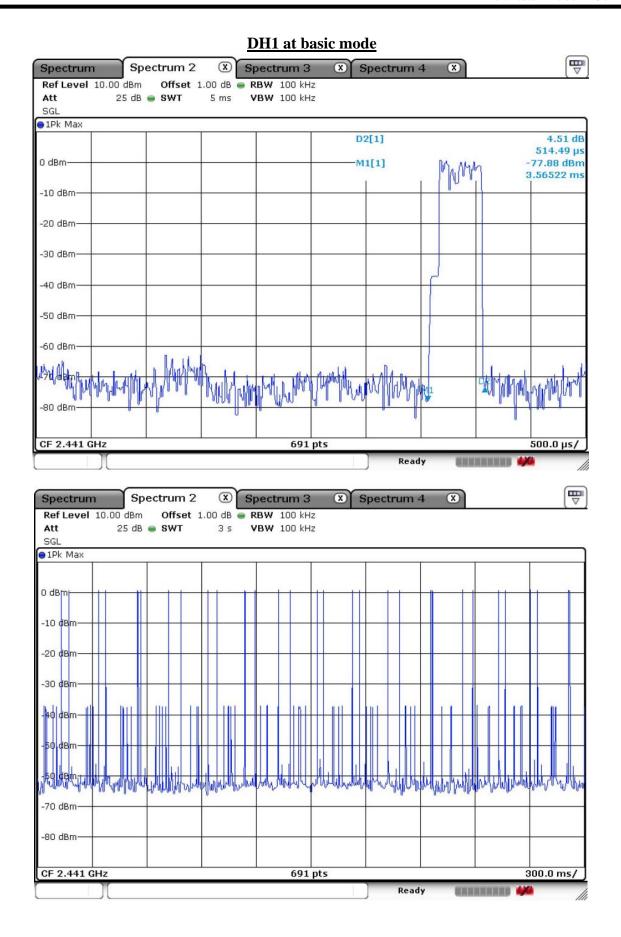

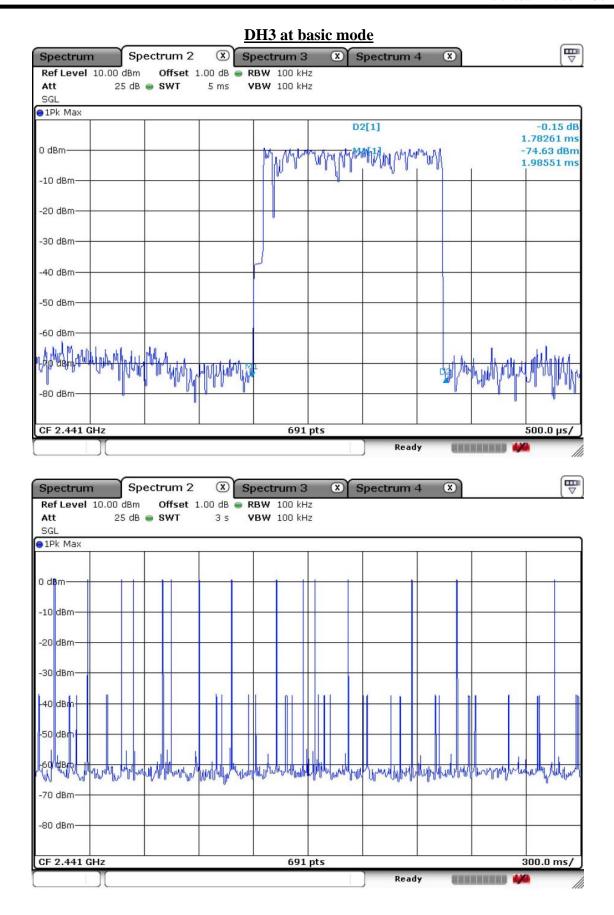



DH5 at basic mode

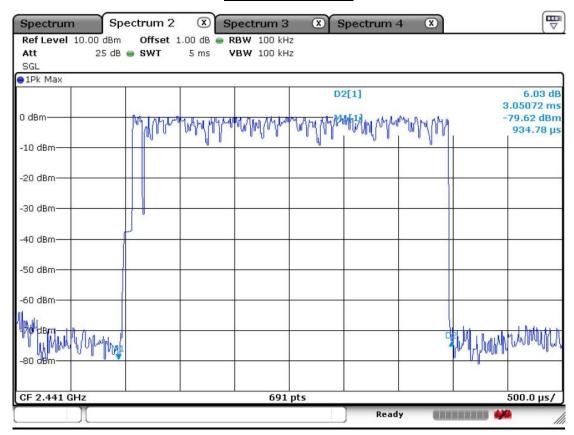

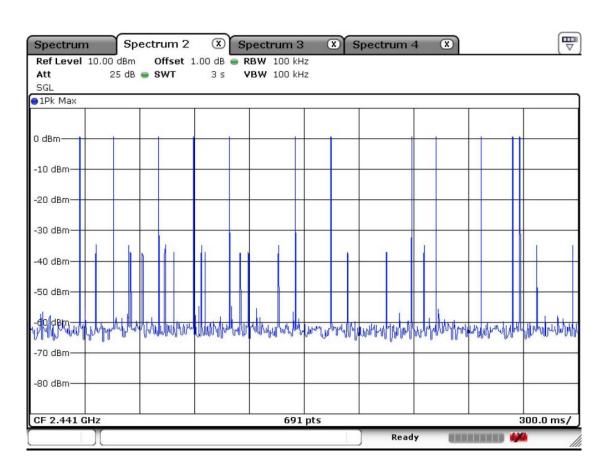

DH5 at EDR mode with 3Mbps

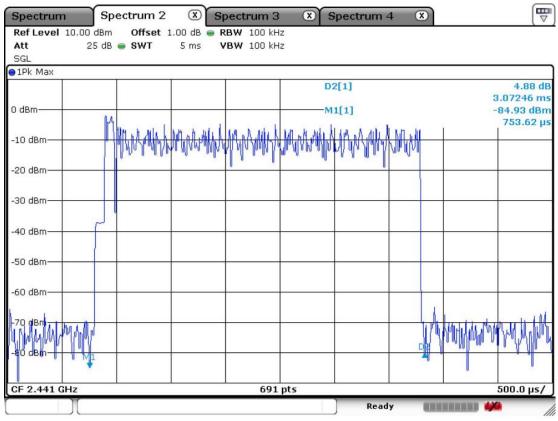

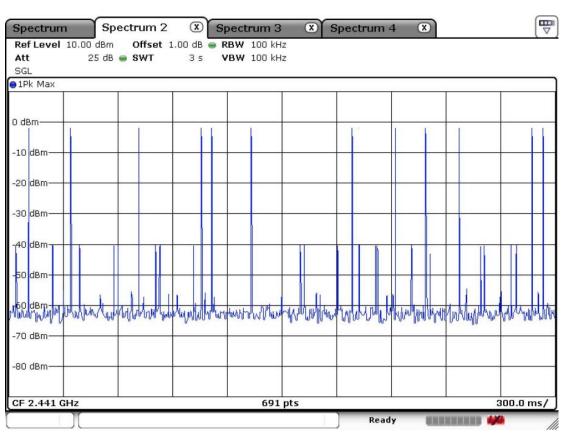

3.3.5 Transmitter Output Power

Procedure:

The test follows DA000705. The peak output power was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels..

After the trace being stable, Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

Span = 10 MHz (approximately 5 times of the 20 dB bandwidth)

RBW = 3 MHz (greater than the 20dB bandwidth of the emission being measured)

 $VBW = 3 \text{ MHz} (VBW \ge RBW)$ Detector function = peak

Trace = $\max \text{ hold}$ Sweep = auto

Measurement Data: Basic Mode

Frequency (MHz)	Ch		Test Results	
	Ch.	dBm	mW	Result
2402	0	0.14	1.03	Complies
2441	39	1.48	1.41	Complies
2480	78	1.24	1.33	Complies

Measurement Data: EDR Mode

Frequency	Ch		Test Results	
(MHz)	Ch.	dBm	mW	Result
2402	0	0.28	1.07	Complies
2441	39	1.75	1.50	Complies
2480	78	1.86	1.53	Complies


⁻ See next pages for actual measured spectrum plots.


Minimum Standard:	< 250 mW

Measurement Setup


Same as the Chapter 3.2.1 (Figure 1)


Channel 1 Basic mode

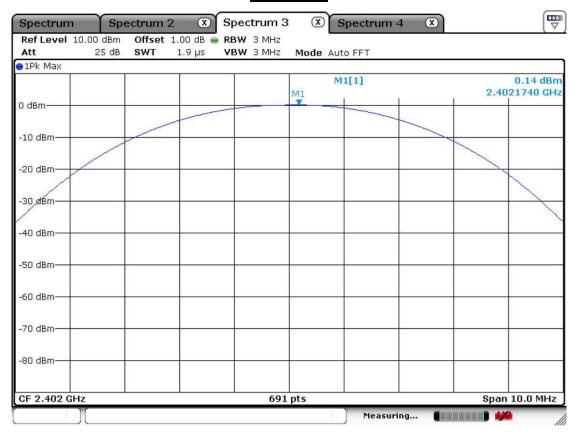

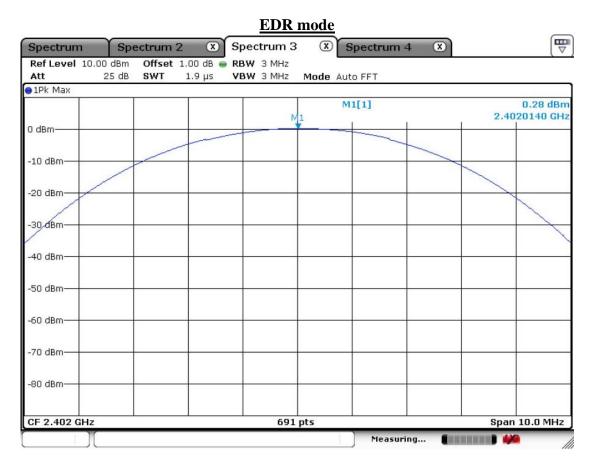


Channel 2 Basic mode

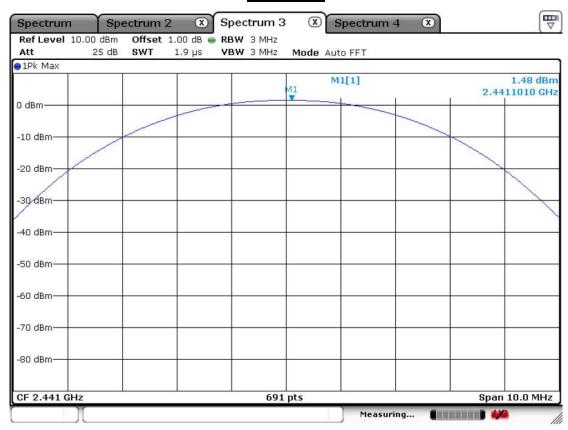


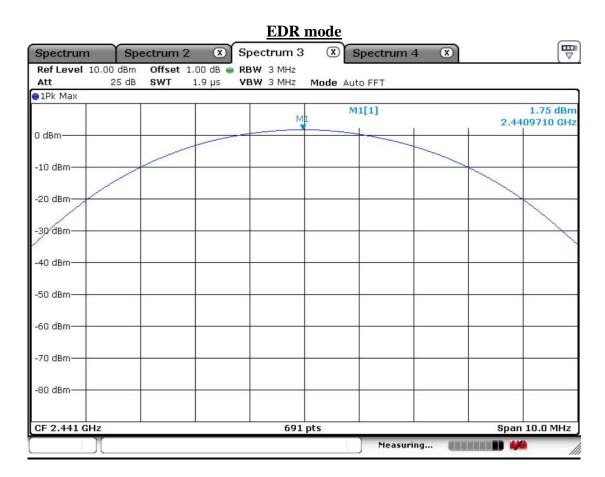

Channel 3 Basic mode

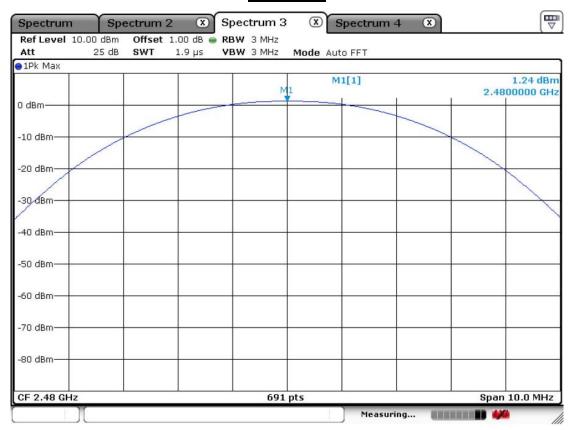

EDR mode

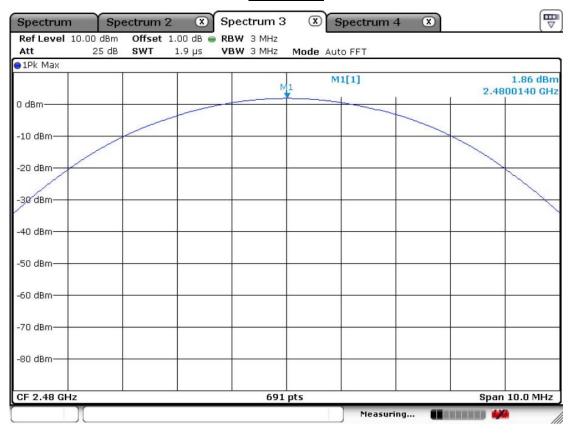

Ref. No.: LR500111302A

3.3.6 Band Edge

Procedure:

The bandwidth at 20dB down from the highest inband spectral density is measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels.

After the trace being stable, Use the marker-to-peak function to measure 20 dB down both sides of the intentional emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 100 kHz VBW = 100 kHz

Span = $10\sim30 \text{ MHz}$ Detector function = peak

Trace = \max hold Sweep = auto

Measurement Data: Complies

- All conducted emission in any 100kHz bandwidth outside of the spread spectrum band was at least 20dB lower than the highest inband spectral density. Therefore the applying equipment meets the requirement.


- See next pages for actual measured spectrum plots.

Minimum Standard:	> 20 dBc


Measurement Setup

Same as the Chapter 3.2.1 (Figure 1)

Band – edge Lower edge

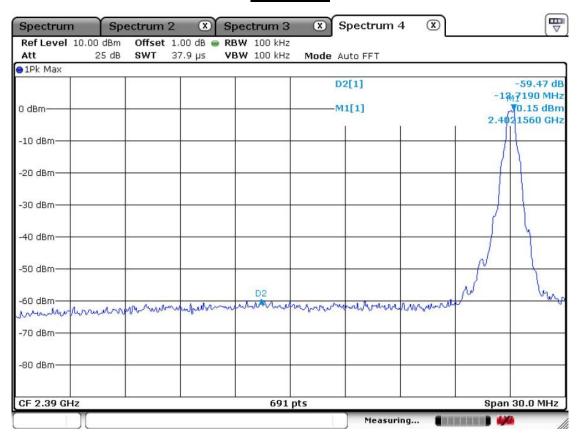

Upper edge

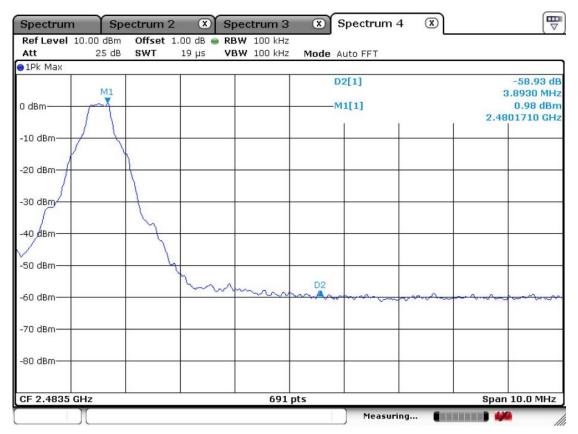

Band-edges in the restricted band 2310-2390 MHz measurement


	Reading		C	Correction	Limits	Result	Margin	
Frequency	[dBuV/m]	Pol.	Factor		[dBuV/m]	[dBuV/m]	[dB]	
[MHz]	AV / Peak	Poi.	Antenna	Amp. Gain + Cable Loss	AV / Peak	AV / Peak	AV / Peak	
2366.4	34.5 47.3	Н	28.2	27.5	54.0 74.0	35.2 48.0	18.8 26.0	

Band-edges in the restricted band 2483.5-2500 MHz measurement


Fraguanay	Read	ding		C	Correction	Lim	nits	Res	sult	Mar	gin
Frequency	[dBuV/m]		Pol.		Factor	[dBuV/m]		[dBuV/m]		[dB]	
[MHz]	AV / Peak		POI.	Antenna	Amp. Gain + Cable Loss	AV /	' Peak	AV /	Peak	AV /	Peak
2497.2	34.2	45.2	Н	28.2	27.5	54.0	74.0	34.9	45.9	19.1	28.1

Note: This EUT was tested in 3 orthogonal positions and the worst-case data was presented.


<u>Unwanted Emission – Low channel</u> <u>Frequency Range = 30 MHz ~ 26.5 GHz</u>

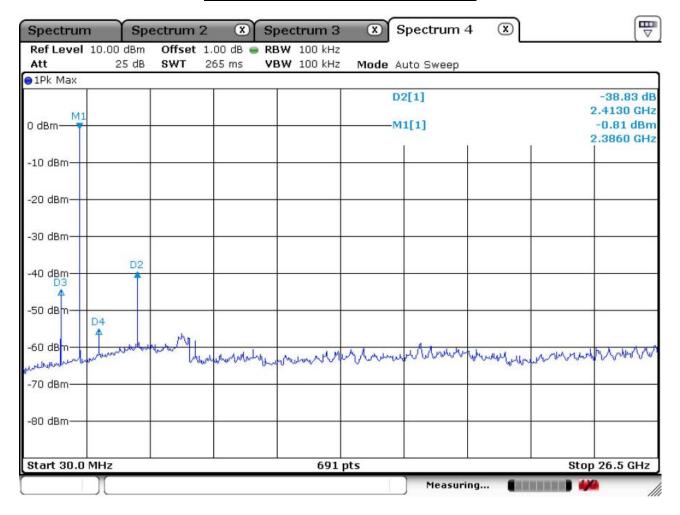

<u>Unwanted Emission – Middle channel</u> <u>Frequency Range = 30 MHz ~ 26.5 GHz</u>

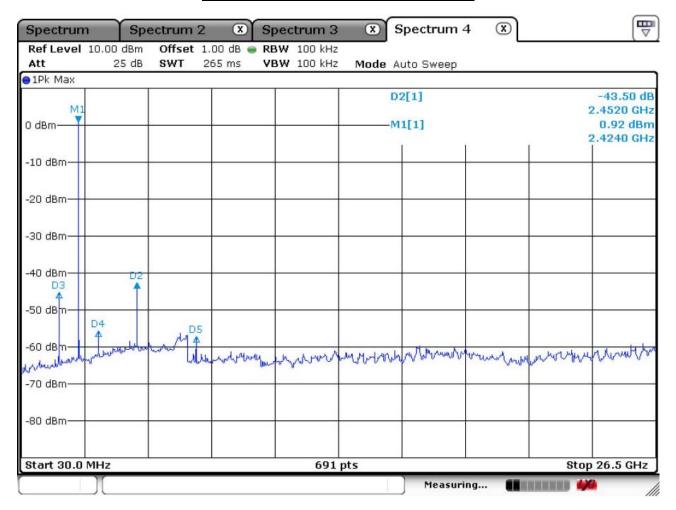

<u>Unwanted Emission – High channel</u> Frequency Range = 30 MHz ~ 26.5 GHz

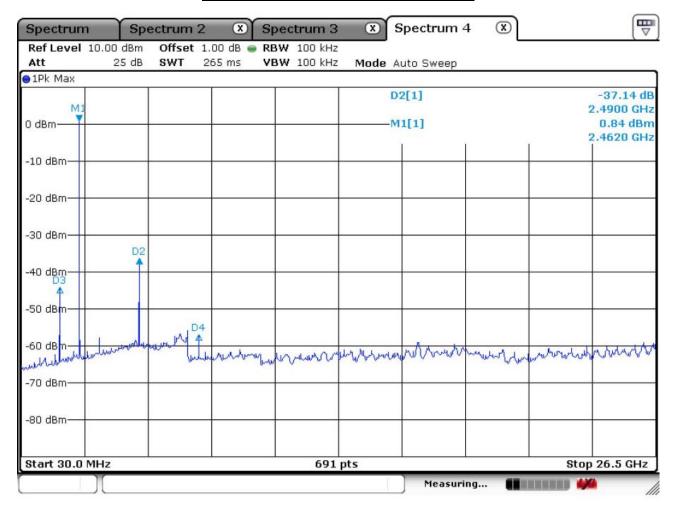

3.3.7 Field Strength of Harmonics

Procedure:

Radiated emissions from the EUT were measured according to the dictates of DA000705. The EUT was placed on a 0.8m high wooden table inside a shielded enclosure. An antenna was placed near the EUT and measurements of frequencies and amplitudes of field strengths were recorded for reference during final measurements. For final radiated testing, measurements were performed in OATS. Measurements were performed with the EUT oriented in 3 orthogonal axis and rotated 360 degrees to determine worst-case orientation for maximum emissions.

- (a) In the frequency range of 9kHz to 30 MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 3m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- (b) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is carried from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

The spectrum analyzer is set to:

Center frequency = the worst channel

Frequency Range = 9 KHz ~ 10th harmonic.


 $RBW = 120 \text{ kHz} (9 \text{ KHz} \sim 1 \text{ GHz})$ $VBW \geq RBW$

= 1 MHz $(1 \text{ GHz} \sim 10^{\text{th}} \text{ harmonic})$


Span = 100 MHz Detector function = peak

Trace = $\max \text{ hold}$ Sweep = auto


below 30MHz

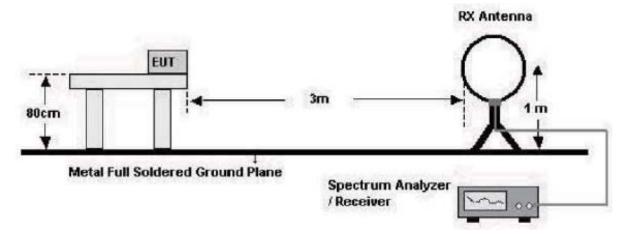

below 1GHz (30MHz to 1GHz)

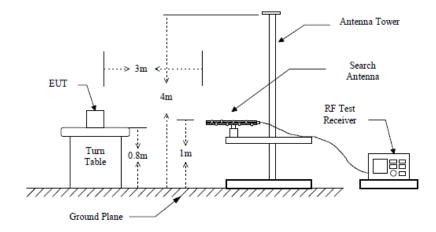

above 1GHz

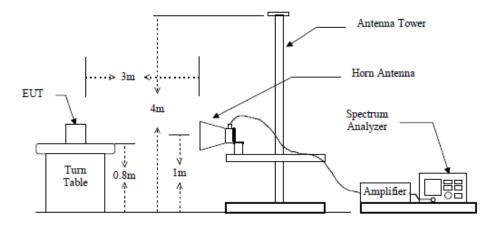

Measurement Data: Complies

- See next pages for actual measured data.
- No other emissions were detected at a level greater than 20dB below limit include from 9KHz to 30MHz.

Minimum Standard: FCC Part 15.109

Frequency (MHz)	Limit (uV/m) @ 10m
0.009 ~ 0.490	2400/F (kHz) @ 300m
0.490 ~ 1.705	24000/F (kHz) @ 30m
1.705 ~ 30	30 @ 30m
30 ~ 88	90
88 ~ 216	150
216 ~ 960	210
Above 960	300

^{**} Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88MHz, 174-216MHz or 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

Measurement Data: (Above 1GHz)

F	Frequency [dBuV/m] P			(Correction		Limits	Result	Margin
Frequency			Pol.		Factor		[dBuV/m]	[dBuV/m]	[dB]
[MHz]	AV /	Peak		Antenna	Amp.Gain+Cable		AV/Peak	AV/Peak	AV / Peak
		No	emissi	ons were de	tected at a level great	ter than 20	dB below limit		
Frequency	Read	ling		C	Correction		Limits	Result	Margin
rrequericy	[dBuV	//m]	Pol.	Factor		D.C.F	[dBuV/m]	[dBuV/m]	[dB]
[MHz]	AV / F	Peak		Antenna	Amp.Gain+Cable		AV/Peak	AV/Peak	AV / Peak
		No	emissi	ons were de	tected at a level great	ter than 20	dB below limit		
Frequency	Read	ling		Correction			Limits	Result	Margin
rrequericy	[dBuV	//m]	Pol.		Factor	D.C.F	[dBuV/m]	[dBuV/m]	[dB]
[MHz]	AV / F	Peak		Antenna	Amp.Gain+Cable		AV/Peak	AV/Peak	AV / Peak
		No	emissi	ons were de	tected at a level great	ter than 20	dB below limit		

- No other emissions were detected at a level greater than 20dB below limit.
- D.C.F (Duty Cycle Correction Factor) = 20log(The worst Case DWELL Time/100ms)

 $= 20\log(3.072 \text{ms}/100 \text{ms}) = -30.25$

Measurement Data: (9kHz - 30MHz)

Frequency	Reading		(Limits		Result		Mar	gin		
,	[dBuV/m]		Pol.		Factor	[dBuV	/m]	[dBu	V/m]	[dl	B]
[MHz]	AV / Peak			Antenna	Amp.Gain+Cable	AV / Peak		AV / Peak		AV /	Peak
-	-	-	-	-	-	-	-	-	-	-	1
	No emissions were detected at a level greater than 20dB below limit.										
-	-	-	-	-	-	-	1	-	-	-	1
-	-	-	-	-	-	-	-	-	-	-	-

^{*}No emissions were detected at a level greater than 20dB below limit.

Radiated Emissions - BT mode



243 Jubug-ri, yangji-Myeon, Youngin-si, Gyeonggi-do 449-822 Korea Tel:+82-31-3236008,9 Fax:+82-31-3236010

Temp Humi : 1 / 26 Tested by: PARK.H.W

Data: 101
80
FCC CLASS A

1 2 3 45
1 6 6
1 2 3 45
1 0 6 6

	Freq	Reading	C.F	Result	Limit QP	Margin	Height	Angle	Polarity
	MHz	dBuV/m	dB/m	dBuV/m	dBuV/m	dВ	CIM	deg	
1	37.18	47.70	-16.70	31.00	39.00	8.00	100	76	VERTICAL
2	133.15	46.48	-14.48	32.00	43.50	11.50	400	55	HORIZONTAL
3	195.98	49.91	-15.91	34.00	43.50	9.50	100	89	VERTICAL
4	281.14	45.66	-12.25	33.41	46.40	12.99	100	87	VERTICAL
5	291.23	42.97	-11.85	31.12	46.40	15.28	369	294	HORIZONTAL
6	835.74	34.33	0.99	35.32	46.40	11.08	138	27	VERTICAL

Frequency (MHz)

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

3.3.8 AC Conducted Emissions

Procedure:

AC power line conducted emissions from the EUT were measured according to the dictates of ANSI C63.4:2003.

The conducted emissions are measured in the shielded room with a spectrum analyzer in peak hold. While the measurement, EUT had its hopping function disabled at the middle channels in line with Section 15.31(m). Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation and Exerciser operation. The highest emissions relative to the limit are listed.

Measurement Data: Complies

- Refer to the next page.
- No other emissions were detected at a level greater than 20dB below limit
- It gave the worse case emissions

- Minimum Standard: FCC Part 15.107

Frequency Range	Conducted L	imit (dBuV)
(MHz)	Quasi-Peak	Average
0.15 ~ 0.5	79 dBuV	66 dBuV
0.5 ~ 30	73 dBuV	60 dBuV

^{*} Decreases with the logarithm of the frequency


Radiated Emissions - BT mode - LINE



243 Jubug-ri, yangji-Myeon, Youngin-si, Gyeonggi-do 449-822 Korea Tel:+82-31-3236008,9 Fax:+82-31-3236010

EUT / Model No. : AT911 Phase : LINE

Test Mode : B/T mode Test Power : 120 / 60

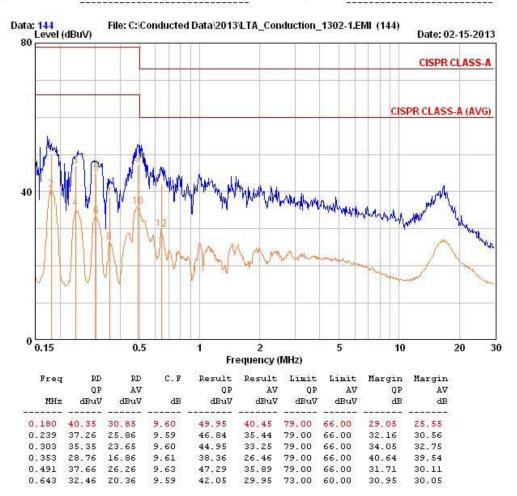

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss

Radiated Emissions – BT mode - NEUTRAL




243 Jubug-ri, yangji-Myeon, Youngin-si, Gyeonggi-do 449-822 Korea Tel:+82-31-3236008,9 Fax:+82-31-3236010

EUT / Model No. : AT911 Phase : NEUTRAL

Test Mode : B/T mode Test Power : 120 / 60

Temp./Humi. : 18 / 35 Test Engineer : PARK H W

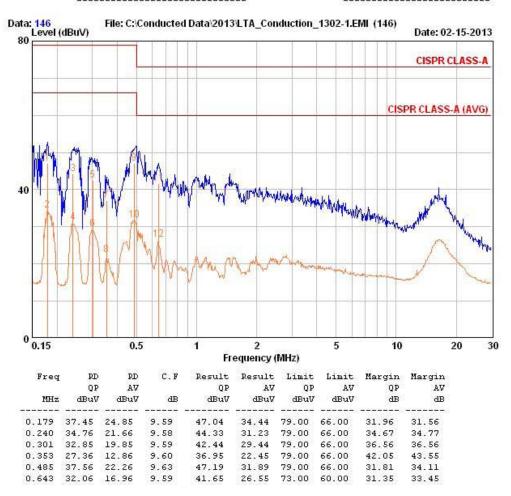

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss

APPENDIX

TEST EQUIPMENT USED FOR TESTS

	Description	Model No.	Serial No.	Manufacturer	Interval	Last Cal. Date
1	Spectrum Analyzer (~30GHz)	FSV-30	100757	R&S	1 year	2013-01-15
2	Spectrum Analyzer (~2.9GHz)	8594E	3649A03649	НР	2 year	2012-03-26
3	Signal Generator (~3.2GHz)	8648C	3623A02597	НР	1 year	2012-03-26
4	Signal Generator (1~20GHz)	83711B	US34490456	НР	1 year	2012-03-26
5	Attenuator (3dB)	8491A	37822	НР	2 year	2012-09-22
6	Attenuator (10dB)	8491A	63196	НР	2 year	2012-09-22
7	Test Receiver (~30MHz)	ESHS10	828404/009	R&S	1 year	2012-03-26
8	EMI Test Receiver (~7GHz)	ESCI7	100722	R&S	1 year	2012-09-22
9	RF Amplifier (~1.3GHz)	8447D	2439A09058	НР	2 year	2012-09-22
10	RF Amplifier (1~18GHz)	8449B	3008A02126	НР	2 year	2012-03-26
11	Horn Antenna (1~18GHz)	BBHA 9120D	9120D122	SCHWARZBECK	2 year	2012-12-21
12	Horn Antenna (18 ~ 40GHz)	SAS-574	154	Schwarzbeck	2 year	2012-03-15
13	Horn Antenna (18 ~ 40GHz)	SAS-574	155	Schwarzbeck	2 year	2012-03-15
14	TRILOG Antenna	VULB 9160	9160-3172	SCHWARZBECK	2 year	2012-09-20
15	Hygro-Thermograph	THB-36	0041557-01	ISUZU	1 year	2012-09-26
16	Splitter (SMA)	ZFSC-2-2500	SF617800326	Mini-Circuits	-	-
17	Power Divider	11636A	6243	НР	2 year	2012-09-22
18	DC Power Supply	6622A	3448A03079	НР	-	-
19	Frequency Counter	5342A	2826A12411	НР	1 year	2012-03-26
20	Power Meter	EPM-441A	GB32481702	НР	1 year	2012-03-26
21	Power Sensor	8481A	US41030291	НР	1 year	2012-09-22
22	Audio Analyzer	8903B	3729A18901	НР	1 year	2012-09-22
23	Modulation Analyzer	8901B	3749A05878	НР	1 year	2012-09-22
24	TEMP & HUMIDITY Chamber	YJ-500	LTAS06041	JinYoung Tech	1 year	2012-09-22
25	Stop Watch	HS-3	601Q09R	CASIO	2 year	2012-03-26
26	LISN	ENV216	100408	R&S	1 year	2012-09-22
27	UNIVERSAL RADIO COMMUNICATION TESTER	CMU200	106243	R&S	2 year	2012-06-27
28	Highpass Filter	WHKX1.5/15G-10SS	74	Wainwright Instruments	-	-
29	Highpass Filter	WHKX3.0/18G-10SS	118	Wainwright Instruments	-	-
30	Active Loop Antenna	FMZB 1519	1519-031	SCHWARZBECK	1 year	2012-12-14