



Most Technology Service Co., Ltd.  
Tel: (86) 755-26825180 Fax: (86) 755-86170310  
Http:// www. szmost.com Email: szmost@szmost.com

**Test Report**

Product Name: GPS PORTABLE NAVIGATION DEVICE

FCC ID: VUP-G58C001

MODEL NO. : 58C-1, 58C-2, 58C-3, 58C

Applicant:

YF INTERNATIONAL LIMITED  
7TH FL., CHINA ACADEMY OF SCIENCE&TECHNOLOGY DEV.,  
HIGH TECH SOUTH STREET 1, CHINA

**Date Received:** 12/06/2008

**Date Tested:** 12/05-06/2008

APPLICANT: YF INTERNATIONAL LIMITED  
FCC ID: VUP-G58C001

Cover Sheet



Most Technology Service Co., Ltd.  
Tel: (86) 755-26825180 Fax: (86) 755-86170310  
Http:// www. szmost.com Email: szmost@szmost.com

## TABLE OF CONTENTS

**APPLICANT:** YF INTERNATIONAL LIMITED

**FCC ID:** VUP-G58C001

### TEST REPORT CONTAINING:

PAGE 1.....TEST EQUIPMENT LIST  
PAGE 2.....TEST PROCEDURE  
PAGE 3-5.....POWER LINE CONDUCTED INTERFERENCE AND PLOTS  
PAGE 6-7.....RADIATION INTERFERENCE TEST DATA  
PAGE 8-11.....OCCUPIED BANDWIDTH AND PLOTS

### EXHIBIT INCLUDED:

PAGE 1.....BLOCK DIAGRAM  
PAGE 2.....SCHEMATIC  
PAGE 3.....USERS MANUAL  
PAGE 4.....LABEL SAMPLE  
PAGE 5.....LABEL LOCATION  
PAGE 6.....EXTERNAL PHOTOGRAPHS  
PAGE 7.....INTERNAL PHOTOGRAPHS  
PAGE 8.....OPERATIONAL DESCRIPTION  
PAGE 9.....TEST SET UP PHOTOGRAPHS

**APPLICANT:** YF INTERNATIONAL LIMITED  
**FCC ID:** VUP-G58C001

TABLE OF CONTENTS



Most Technology Service Co., Ltd.  
Tel: (86) 755-26825180 Fax: (86) 755-86170310  
Http:// www. szmost.com Email: szmost@szmost.com

## EMC Equipment List

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
EMI Test Receiver	ROHDE&SCHWARZ	ESCI	100492	Apr 05,2008	1 Year
LISN	ROHDE&SCHWARZ	ENV216	100093	Apr 05,2008	1 Year
EMI Test Receiver	ROHDE&SCHWARZ	ESCI	101202	Apr 05,2008	1 Year
Spectrum Analyzer	ANRITSU	MS2651B	6200238316	Apr 05,2008	1 Year
50 Coaxial Switch	ANRITSU CORP	MP59B	6200283933	Apr 05,2008	1 Year
Bilog Antenna	Sunol	JB3	A121206	Apr 05,2008	1 Year
Horn Antenna	EMCO	3115	640201028-06	Apr 05,2008	1 Year
50 Coaxial Switch	ANRITSU CORP	MP59B	6200283933	Apr 05,2008	1 Year
Cable	Resenberger	N/A	NO.1	Apr 05,2008	1 Year
Cable	SCHWARZBECK	N/A	NO.2	Apr 05,2008	1 Year
Cable	SCHWARZBECK	N/A	NO.3	Apr 05,2008	1 Year
Single Phase Power Line Filter	Kikusui	LIN40MA-PC R-L	LM002352	Apr 05,2008	1 Year
AC Power Source	Kikusui	AC40MA	LM003232	Apr 05,2008	1 Year
Test analyzer	Kikusui	KHA1000	LM003720	Apr 05,2008	1 Year
ESD Tester	Kikusui	KES4021	LM003537	Apr 05,2008	1 Year
Signal Generator	IFR	2032	203002/100	Apr 05,2008	1 Year
Amplifier	A&R	150W1000	301584	NCR	NCR
Dual Directional Coupler	A&R	DC6080	301508	Apr 05,2008	1 Year
Power Head	A&R	PH2000	301193	Apr 05,2008	1 Year
Power Meter	A&R	PM2002	302799	Apr 05,2008	1 Year
Field Monitor	A&R	FM5004	300329	Apr 05,2008	1 Year
Field Probe	A&R	FP5000	300221	Apr 05,2008	1 Year
EMCPRO System	EM Test	UCS-500-M4	V0648102026	Apr 05,2008	1 Year
EMCPRO System	EM Test	UCS-500-M4	V0648102026	Apr 05,2008	1 Year

Remark:

Test Firm Name: Most Technology Service Co., Ltd.

Test Firm Address:

No. 5, 2nd Langshan Road, North District, Hi-tech Industrial Park, Nanshan, Shenzhen, Guangdong, China

FCC Registered Test Site Number: 490827



Most Technology Service Co., Ltd.  
Tel: (86) 755-26825180 Fax: (86) 755-86170310  
Http:// www. szmost.com Email: szmost@szmost.com

## TEST PROCEDURE

**GENERAL:** This report shall NOT be reproduced except in full without the written approval of MOST TECHNOLOGY SERVICE CO., LTD. The EUT was transmitting a test signal during the testing.

**POWER LINE CONDUCTED INTERFERENCE:** The test procedure used was ANSI Standard C63.4-2003 using a 50 uH LISN. Both Lines were observed. The bandwidth of the receiver was 10kHz with an appropriate sweep speed. The ambient temperature of the EUT was 25 with a humidity of 58%.

**RADIATION INTERFERENCE:** The test procedure used was ANSI Standard C63.4-2003 using a ANRITSU spectrum analyzer with a pre-selector. The analyzer was calibrated in dB above a micro volt at the output of the antenna. The resolution bandwidth was 100 kHz and the video bandwidth was 300 kHz up to 1 GHz and 1 MHz with a video BW of 3 MHz above 1 GHz. The ambient temperature of the EUT was 25 with a humidity of 58%.

**FORMULA OF CONVERSION FACTORS:** The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBuV) to the antenna correction factor supplied by the antenna manufacturer and cable loss. The antenna correction factors and cable loss are stated in terms of dB. The gain of the Pre-selector was accounted for in the Spectrum Analyzer Meter Reading.

Example:

Freq (MHz) METER READING + ACF + CABLE = FS  
33 20 dBuV + 10.36 dB + 0.9 dB = 31.26 dBuV/m @ 3m

**ANSI STANDARD C63.4-2003 10.1.7 MEASUREMENT PROCEDURES:** The EUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The EUT was placed in the center of the table (1.5m side). The table used for radiated measurements is capable of continuous rotation. The spectrum was scanned from 30 MHz to 10th harmonic of the fundamental.

Peak readings were taken in three (3) orthogonal planes and the highest readings were converted to average readings based on the duration of "ON" time.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

The situation was similar for the conducted measurement except that the table did not rotate. The EUT was setup as described in ANSI Standard C63.4-2003 10.1.7 with the EUT 40 cm from the vertical ground wall.



Most Technology Service Co., Ltd.  
Tel: (86) 755-26825180 Fax: (86) 755-86170310  
Http:// www. szmost.com Email: szmost@szmost.com

**APPLICANT:** YF INTERNATIONAL LIMITED

**FCC ID:** VUP-G58C001

**NAME OF TEST:** POWER LINE CONDUCTED INTERFERENCE

**RULES PART NUMBER:** 15.207

**REQUIREMENTS:**

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency.

**TEST PROCEDURE:** ANSI STANDARD C63.4-2003

THE HIGHEST EMISSION READ FOR LINE 1 WAS 61.64dB<sub>UV</sub> @ 0.158MHz.

THE HIGHEST EMISSION READ FOR LINE 2 WAS 60.48dB<sub>UV</sub> @ 0.155MHz.

THE PLOTS ON THE NEXT PAGE REPRESENT THE EMISSIONS READ FOR POWER LINE CONDUCTED FOR THIS DEVICE.

APPLICANT: YF INTERNATIONAL LIMITED  
FCC ID: VUP-G58C001


### Conducted Emission Measurement

File :58C

Data :#15

Date: 08/12/06/

Time: 11/07/09

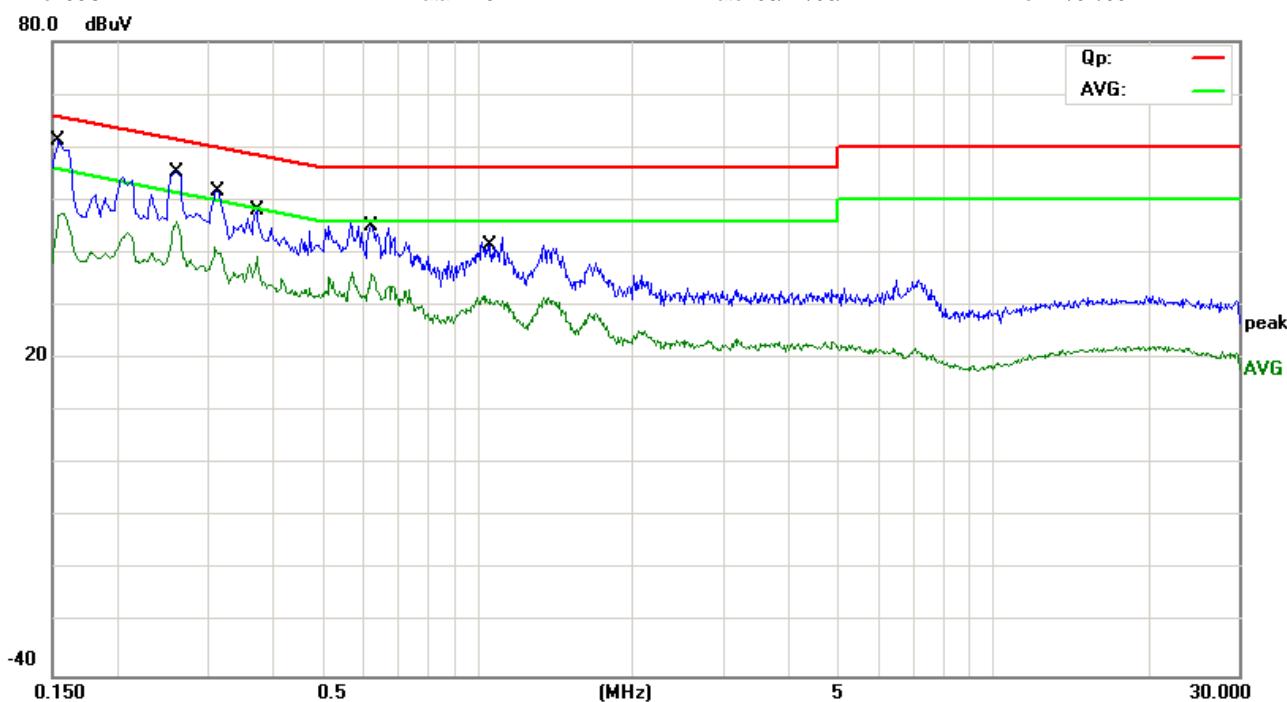

Site site #1

Phase: N

Temperature: 26

Limit: FCC Part 15C Conduction

Power: DC 5V Adaptor AC 120V/60Hz Humidity: 60 %

EUT: GPS Portable Navigation Device

M/N: 58C-1

Mode: ON(Bluetooth Mode)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	*	0.1556	51.14	9.34	60.48	65.70	-5.22	QP	
2		0.1556	38.03	9.34	47.37	55.70	-8.33	AVG	
3		0.2580	43.40	11.61	55.01	61.50	-6.49	QP	
4		0.2580	33.34	11.61	44.95	51.50	-6.55	AVG	
5		0.3115	40.28	11.26	51.54	59.93	-8.39	QP	
6		0.3115	29.30	11.26	40.56	49.93	-9.37	AVG	
7		0.3711	36.73	10.86	47.59	58.48	-10.89	QP	
8		0.3711	26.34	10.86	37.20	48.48	-11.28	AVG	
9		0.6260	34.92	10.00	44.92	56.00	-11.08	QP	
10		0.6260	25.83	10.00	35.83	46.00	-10.17	AVG	
11		1.0660	28.53	9.93	38.46	56.00	-17.54	QP	
12		1.0660	20.73	9.93	30.66	46.00	-15.34	AVG	

\*:Maximum data    x:Over limit    !:over margin

APPLICANT: YF INTERNATIONAL LIMITED  
 FCC ID: VUP-G58C001

Conducted Emission Measurement


File :58C

Data :#16

Date: 08/12/06/

Time: 11/09/32

80.0 dBuV

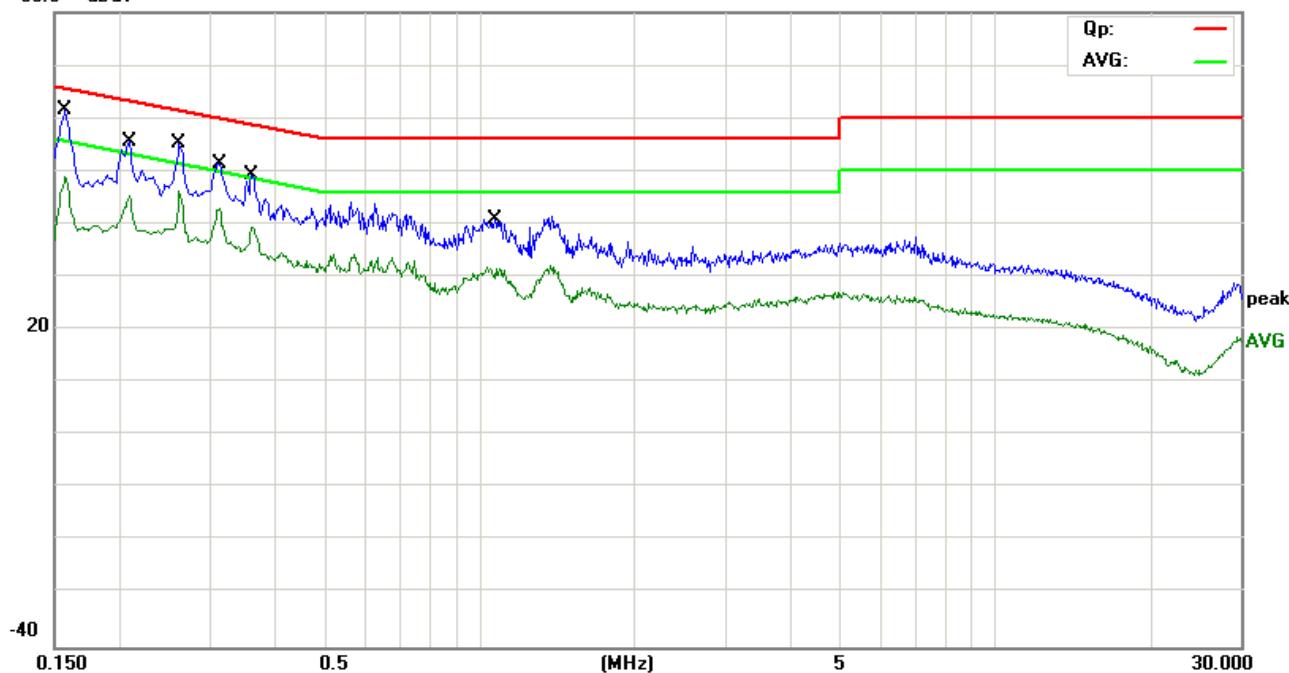

Site site #1

Phase: **L1**

Temperature: 26

Limit: FCC Part 15C Conduction

Power: DC 5V Adaptor AC 120V/60Hz Humidity: 60 %

EUT: GPS Portable Navigation Device

M/N: 58C-1

Mode: ON(Bluetooth Mode)

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	*	0.1580	52.16	9.48	61.64	65.57	-3.93	QP	
2		0.1580	39.41	9.48	48.89	55.57	-6.68	AVG	
3		0.2083	43.03	11.94	54.97	63.27	-8.30	QP	
4		0.2083	32.41	11.94	44.35	53.27	-8.92	AVG	
5		0.2620	43.52	11.59	55.11	61.37	-6.26	QP	
6		0.2620	34.65	11.59	46.24	51.37	-5.13	AVG	
7		0.3115	40.03	11.26	51.29	59.93	-8.64	QP	
8		0.3115	31.45	11.26	42.71	49.93	-7.22	AVG	
9		0.3620	38.22	10.92	49.14	58.68	-9.54	QP	
10		0.3620	28.52	10.92	39.44	48.68	-9.24	AVG	
11		1.0740	31.06	9.93	40.99	56.00	-15.01	QP	
12		1.0740	19.75	9.93	29.68	46.00	-16.32	AVG	

\*:Maximum data    x:Over limit    !:over margin

APPLICANT: YF INTERNATIONAL LIMITED  
FCC ID: VUP-G58C001



Most Technology Service Co., Ltd.  
Tel: (86) 755-26825180 Fax: (86) 755-86170310  
Http:// www. szmost.com Email: szmost@szmost.com

**APPLICANT:** YF INTERNATIONAL LIMITED

**FCC ID:** VUP-G58C001

**NAME OF TEST:** RADIATION INTERFERENCE

**RULES PART NUMBER:** 15.249, 15.209

**REQUIREMENTS:**

FIELD STRENGTH of Fundamental:	FIELD STRENGTH of Harmonics	S15.209
902-928 MHz		30-88 MHz 40 dBuV/m @3m
2.4-2.4835 GHz		88-216 MHz 43.5
94 dBuV/m @3m	54 dBuV/m @3m	216-960 MHz 46 ABOVE 960 MHz 54dBuV/m

EMISSIONS RADIATED OUTSIDE OF THE SPECIFIED FREQUENCY BANDS, EXCEPT FOR HARMONICS, SHALL BE ATTENUATED BY AT LEAST 50 Db BELOW THE LEVEL OF THE FUNDAMENTAL OR TO THE GENERAL RADIATED EMISSION LIMITS IN 15.209, WHICHEVER IS THE LESSER ATTENUATION.

**REMARK: Emissions attenuated more than 20 dB below the permissible value are not reported.**

Frequency (MHz)	Antenna Polarization	Emission Level (dBuV/m)			FCC 15 Subpart C Limit(dBuV/m)
		Avg	QP	Peak	
Low frequency (2402.00MHz)					
31.39	Vertical	---	--	30.19	40.0
2402.00	Vertical	---	---	85.76	94.0
4804.00	Vertical	---	---	32.07	54.0
7206.10	Vertical	---	---	30.26	54.0
9608.20	Vertical	---	---	29.04	54.0
239.91	Horizontal	---	32.14	34.27	46.0
2402.00	Horizontal	---	---	85.59	94.0
4804.01	Horizontal	---	---	32.34	54.0
7206.00	Horizontal	---	---	30.83	54.0
9608.00	Horizontal	---	---	29.32	54.0
Middle frequency (2441.00MHz)					
31.39	Vertical	---	---	30.41	40.0
2441.00	Vertical	---	---	85.35	94.0
4882.10	Vertical	---	---	32.91	54.0
7323.03	Vertical	---	---	30.27	54.0
9764.30	Vertical	---	---	29.08	54.0
239.91	Horizontal	---	32.51	34.10	46.0
2441.00	Horizontal	---	---	84.34	94.0
4882.10	Horizontal	---	---	29.26	54.0
7323.20	Horizontal	---	---	30.10	54.0
9764.00	Horizontal	---	---	31.04	54.0

APPLICANT: YF INTERNATIONAL LIMITED  
FCC ID: VUP-G58C001



Most Technology Service Co., Ltd.  
Tel: (86) 755-26825180 Fax: (86) 755-86170310  
Http:// www. szmost.com Email: szmost@szmost.com

**APPLICANT:** YF INTERNATIONAL LIMITED

**FCC ID:** VUP-G58C001

**NAME OF TEST:** RADIATION INTERFERENCE

**RULES PART NUMBER:** 15.249, 15.209

**REQUIREMENTS:**

FIELD STRENGTH of Fundamental:	FIELD STRENGTH of Harmonics	S15.209
902-928 MHz 2.4-2.4835 GHz		30-88 MHz 40 dBuV/m @3m 88-216 MHz 43.5 216-960 MHz 46
94 dBuV/m @3m	54 dBuV/m @3m	ABOVE 960 MHz 54dBuV/m

EMISSIONS RADIATED OUTSIDE OF THE SPECIFIED FREQUENCY BANDS, EXCEPT FOR HARMONICS, SHALL BE ATTENUATED BY AT LEAST 50 Db BELOW THE LEVEL OF THE FUNDAMENTAL OR TO THE GENERAL RADIATED EMISSION LIMITS IN 15.209, WHICHEVER IS THE LESSER ATTENUATION.

**REMARK:** Emissions attenuated more than 20 dB below the permissible value are not reported.

**Continued:**

Frequency (MHz)	Antenna Polarization	Emission Level (dBuV/m)			FCC 15 Subpart C Limit(dBuV/m)
		Avg	QP	Peak	
High frequency (2480.00MHz)					
31.39	Vertical	---	---	31.01	40.0
2480.00	Vertical	---	---	85.23	94.0
4960.10	Vertical	---	---	30.29	54.0
7440.01	Vertical	---	---	32.18	54.0
9920.00	Vertical	---	---	30.31	54.0
239.91	Horizontal	---	32.13	34.28	46.0
2480.00	Horizontal	---	---	84.61	94.0
4960.10	Horizontal	---	---	31.20	54.0
7440.20	Horizontal	---	---	29.20	54.0
9920.00	Horizontal	---	---	30.66	54.0

Emissions attenuated more than 20 dB below the permissible value are not reported.

**TEST PROCEDURE:** ANSI Standard C63.4-2003 using a ANRITSU spectrum analyzer with a pre-selector and an appropriate antenna. The resolution bandwidth of spectrum analyzer was 100 kHz below 1 GHz and 1 MHz above 1 GHz. An appropriate sweep speed was used. When an emission was found, the table was rotated to produce the maximum signal strength. The antenna was placed in both the horizontal and vertical planes and the worse case emissions were reported. The spectrum was searched to at least the tenth (10) harmonic of the fundamental.

APPLICANT: YF INTERNATIONAL LIMITED  
FCC ID: VUP-G58C001



Most Technology Service Co., Ltd.  
Tel: (86) 755-26825180 Fax: (86) 755-86170310  
Http:// www. szmost.com Email: szmost@szmost.com

**APPLICANT:** YF INTERNATIONAL LIMITED

**FCC ID:** VUP-G58C001

**NAME OF TEST:** Occupied Bandwidth and Band Edge Compliance

**RULES PART NUMBER:** 15.249, 15.209

**REQUIREMENTS:** The field strength of any emissions appearing outside the band edges and up to 10 kHz above and below the band edges shall be attenuated at least 50 dB below the level of the carrier or to the general limits of 15.209.


Band edge emissions plots are included on the following pages

**METHOD OF MEASUREMENT:** A small sample of the transmitter output was fed into the Spectrum analyzer and the attached plot was printed. The vertical scale is set to -10 dB per division.

**TEST RESULTS:** The unit does meet the FCC requirements.

APPLICANT: YF INTERNATIONAL LIMITED  
FCC ID: VUP-G58C001

Low

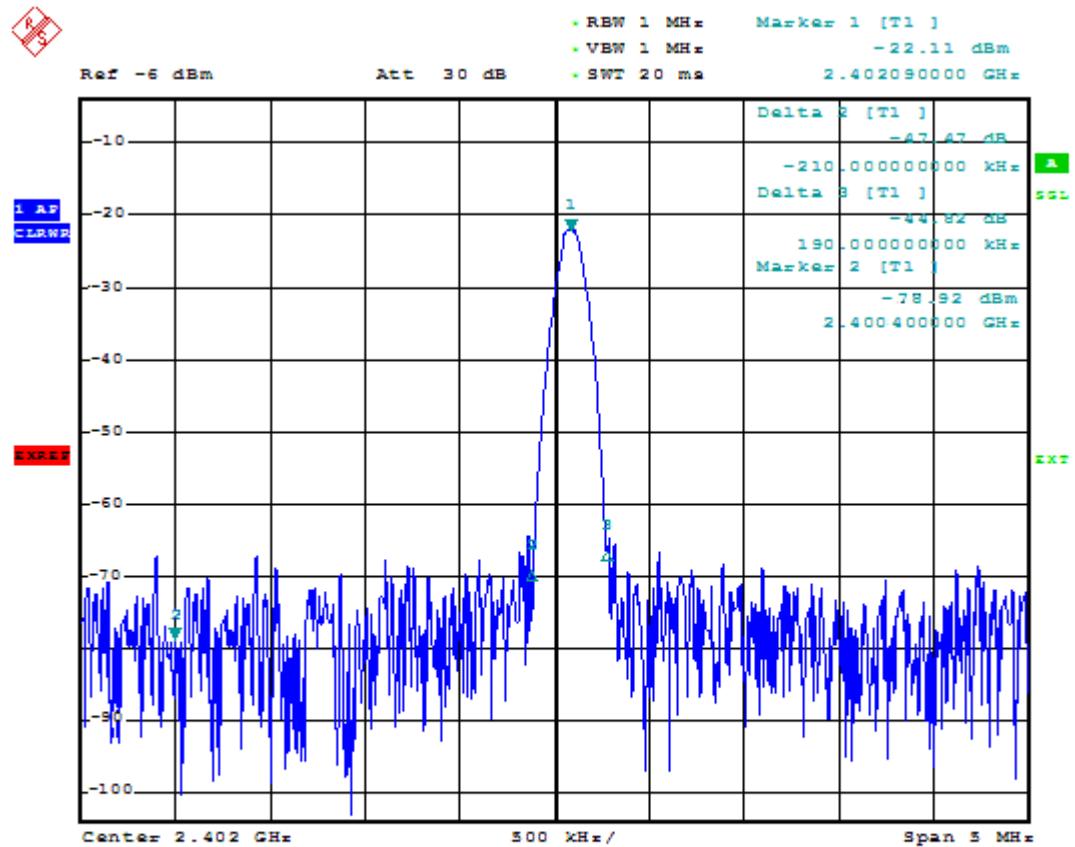

For band frequency 2.400GHz, test level is -78.92dBmW,

For transmitting frequency 2.402GHz, test level is -21.12dBuV,

-78.92dBuV+21.12dBuV=57.80dB>50dB,

So, the EUT's Band-edge test is meet 15.249(d) request.




Most Technology Service Co., Ltd.


Tel: (86) 755-26825180 Fax: (86) 755-86170310

Http:// www. szmost. com Email: szmost@szmost. com

### Middle

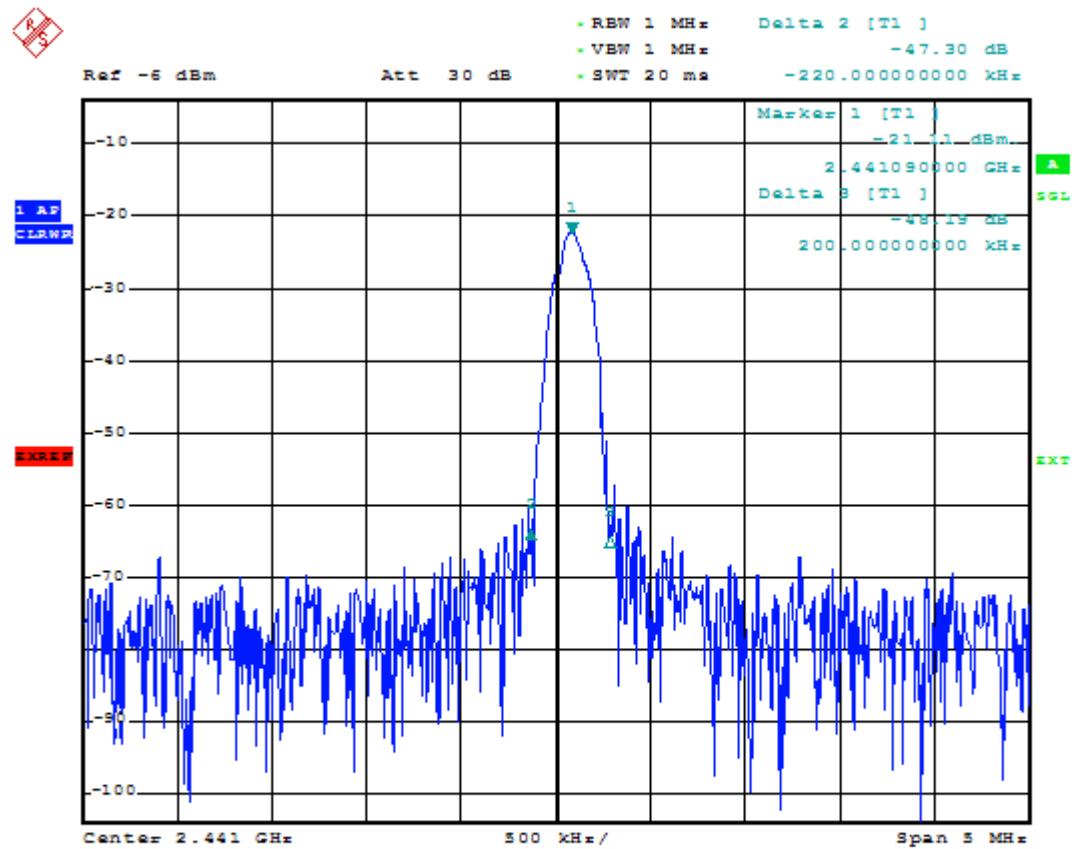

High

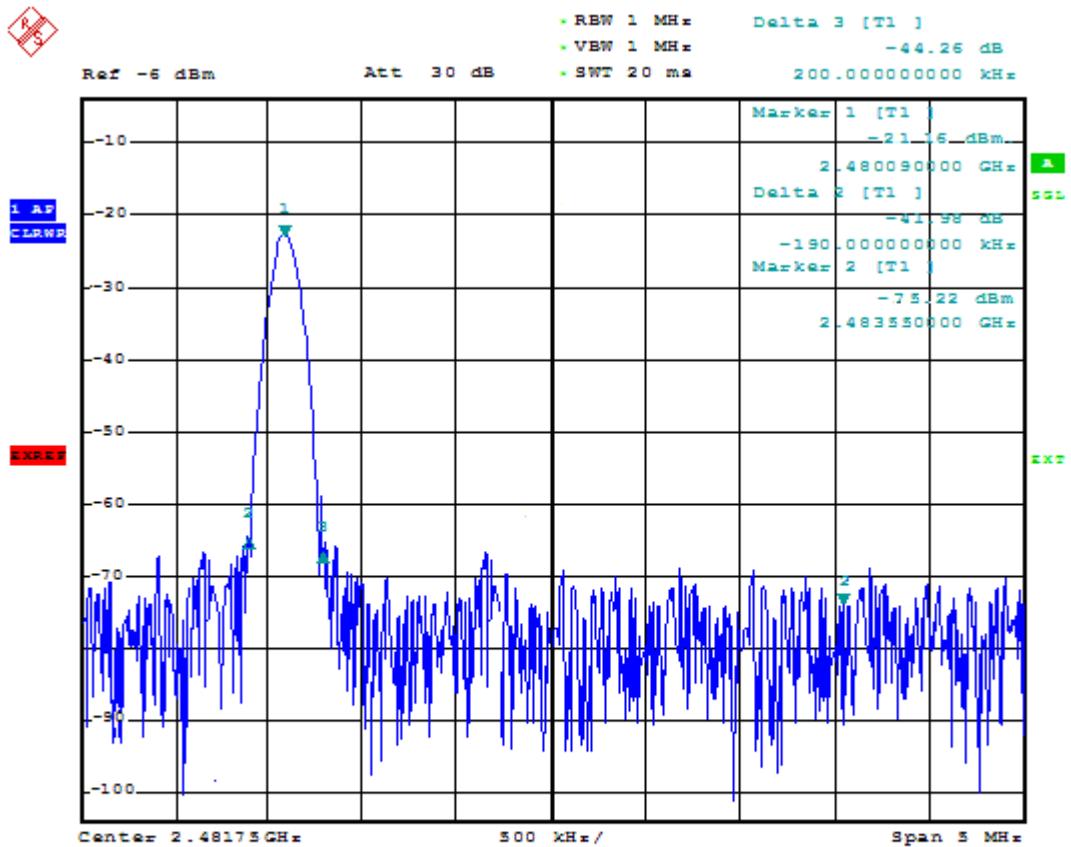

For band frequency 2.4835GHz, test level is -75.22dBmW,

For transmitting frequency 2.480GHz, test level is -21.16dBmW,

-75.22dBmV+21.16dBmV=54.06dB>50dB,

So, the EUT's Band-edge test is meet 15.249(d) request.