# Test Report of FCC Part 15 C for FCC Certificate On Behalf of

# YF INTERNATIONAL LIMITED

Product description: Bluetooth GPS Navigation

Model No.: YFN43C302B-32C-2

FCC ID: VUP-N43C302B

Prepared for: YF INTERNATIONAL LIMITED

7th Fl., China Academy of Science & Technology Development, High

Tech South Street 1, Shenzhen, GuangDong, China

Prepared by: Bontek Compliance Laboratory Ltd

Rm 802~804, 8/F, Jinmin Bld., Zizhu 6<sup>th</sup> Rd., Zhuzi Lin, Futian,

Shenzhen 518040, P.R. China.

Tel: 86-755-82871080 Fax: 86-755-82871368

**Report No.:** BCT07KR-731E

**Issue Date:** December 14, 2007

Test Date: November 28~December 13, 2007

Test by: Reviewed By:

Kendy Wang

Kendy Wang

Tonv Wu

# **TABLE OF CONTENTS**

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
1.2 RELATED SUBMITTAL(S) / GRANT (S)	4
1.3 TEST METHODOLOGY	
1.4 TEST FACILITY	
2. SYSTEM TEST CONFIGURATION	6
2.1 EUT CONFIGURATION	6
2.2 EUT EXERCISE	6
2.3 GENERAL TEST PROCEDURES	6
2.4 LIST OF MEASURING EQUIPMENTS USED	
3. SUMMARY OF TEST RESULTS	
4. ANTENNA REQUIREMENT	
4.1 STANDARD APPLICABLE	
4.2 ANTENNA CONNECTED CONSTRUCTION	
5. TEST OF CONDUCTED EMISSION	10
5.1 APPLICABLE STANDARD	
5.2 TEST SETUP DIAGRAM	
5.3 INSTRUMENT SETTING	
5.4 TEST EQUIPMENT LIST AND DETAILS5.5 TEST PROCEDURE	
5.6 TEST DATA	
6. TEST OF HOPPING CHANNEL BANDWIDTH	
6.1 APPLICABLE STANDARD	
6.2 EUT SETUP	
6.3 TEST EQUIPMENT LIST AND DETAILS	14
6.4 TEST PROCEDURE	
6.5 TEST RESULT	
7. TEST OF HOPPING CHANNEL SEPARATION	
7.1 APPLICABLE STANDARD	
7.2 EUT SETUP	
7.3 TEST EQUIPMENT LIST AND DETAILS	
7.4 TEST PROCEDURE	
8. TEST OF NUMBER OF HOPPING FREQUENCY	
8.1 Applicable Standard	
8.2 EUT SETUP	
8.3 TEST EQUIPMENT LIST AND DETAILS	
8.4 TEST PROCEDURE	
8.5 TEST RESULT	
9. TEST OF DWELL TIME OF EACH FREQUENCY	
9.1 APPLICABLE STANDARD	
9.2 EUT SETUP 9.3 TEST EQUIPMENT LIST AND DETAILS	
9.4 TEST PROCEDURE	
9.5 TEST RESULT	
10. TEST OF MAXIMUM PEAK OUTPUT POWER	26
10.1 Applicable Standard	26
10.2 EUT SETUP	
10.3 TEST EQUIPMENT LIST AND DETAILS	
10.4 TEST PROCEDURE	
TO TEST INESULT	

11. TEST OF BAND EDGES EMISSION	29
11.1 APPLICABLE STANDARD	29
11.2 EUT SETUP	29
11.3 TEST EQUIPMENT LIST AND DETAILS	
11.4 Test Procedure	30
11.5 TEST RESULT	30
40 TEGT OF ORUBIOUS PARIATER EMISSION	22
12. TEST OF SPURIOUS RADIATED EMISSION	
12.1 APPLICABLE STANDARD	33 33
12.1 APPLICABLE STANDARD	
12.1 APPLICABLE STANDARD	
12.1 APPLICABLE STANDARD	

#### 1. GENERAL INFORMATION

## 1.1 Product Description for Equipment Under Test (EUT)

Applicant: YF INTERNATIONAL LIMITED

Address of applicant: 7th Fl., China Academy of Science & Technology

Development, High Tech South Street 1, Shenzhen,

GuangDong, China

Manufacturer: YF INTERNATIONAL LIMITED

Address of manufacturer: 7th Fl., China Academy of Science & Technology

Development, High Tech South Street 1, Shenzhen,

GuangDong, China

Equipment Under Test: Bluetooth GPS Navigation

Model No.: YFN43C302B-32C-2

Type of Modulation: FHSS

Frequency Band: 2401 MHz ~ 2480 MHz

Bluetooth Specification: Bluetooth specification V1.2

Number of Channels: 79

Channel Bandwidth: 1 MHz

Range of operation: Max 10m line of sight

Antenna Type: Built-in Antenna

Temperature Range (Operating): -20 ~ 65 °C

Output Power Class: Class 2

Power Supply: DC 12V or 24 V from car adaptor

Remark: \* The test data gathered are from the production sample provided by the manufacturer.

# 1.2 Related Submittal(s) / Grant (s)

This submittal(s) is a test report based on the Electromagnetic Interference (EMI) tests performed on the EUT. The EMI measurements were performed according to the measurement procedure described in ANSI C63.4 - 2003.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.207, and 15.247 rules.

## 1.3 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4 - 2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. Radiated testing was performed at an antenna to EUT distance 3 meters.

# 1.4 Test Facility

All measurement required was performed at laboratory of Shenzhen Huatongwei International Inspection Co., Ltd at Keji Nan No.12 Road, Hi-tech Park, Shenzhen, China and SGS-CSTC Standards Technical Services Co., Ltd ShenZhen Branch EMC Lab at No.1 Workshop, M-10, Middle Section, Science&Technology Park, Shenzhen 518057, Cina

The test facility is recognized, certified, or accredited by the following organizations:

## FCC – Registration No.: 662850

Shenzhen Huatongwei International Inspection Co., Ltd, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 662850, November 17, 2003.

#### FCC - Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd ShenZhen Branch EMC Lab, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 556682.

#### 2. SYSTEM TEST CONFIGURATION

The tests documented in this report were performed in accordance with ANSI C63.4-2003 and FCC CFR 47 Part 15 Subpart C.

## 2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

#### 2.2 EUT Exercise

The calibrated antennas used to sample the radiated field strength are mounted on a non-conductive, motorized antenna mast 3 or 10 meters from the leading edge of the turntable.

#### 2.3 General Test Procedures

Conducted Emissions The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 7.1 of ANSI C63.4-2003. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak detector mode.

Radiated Emissions The EUT is a placed on as turntable, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4-2003.

# 2.4 List of Measuring Equipments Used

Items	Equipment	Manufacturer	Model No.	Serial No.	Last Cal	Calibration Period
For Rad	For Radiated Spurious Emission (30~25GHz) test: SGS-CSTC Shenzhen Branch					
1	EMI Test Receiver	ROHDE & SCHWARZ	ESI 26	100079	2007/6	1 year
2	Horn Antenna	R/S	CH14-H052	1091698	2007/6	1 year
3	3m Semi- Anechoic Chamber	ETS	N/A	N/A	2007/6	1 year
For other	test: Shenzhen Huatong	gwei International I	nspection Co.,	Ltd		
1	EMI Test Receiver	ROHDE & SCHWARZ	ESCS30	100038	2006/11	1 year
2	EMI Test Receiver	ROHDE & SCHWARZ	ESI 26	100009	2006/11	1 year
3	Receiver/ Spectrum Analyzer	ROHDE & SCHWARZ	ESCI	100106	2006/11	1 year
4	Spectrum Analyzer	Agilent	E7405A	US41160415	2006/11	1 year
5	Artificial Mains	ROHDE & SCHWARZ	ESH2-Z5	100028	2006/11	1 year
6	Pulse Limiter	ROHDE & SCHWARZ	ESHSZ2	100044	2006/11	1 year
7	LISN	COM Power	LI-200	12212	2006/11	1 year
8	LISN	COM Power	LI-200	12019	2006/11	1 year
9	3m/5m Semi- Anechoic Chamber	ETS	N/A	N/A	2006/11	1 year
10	Ultra-Broadband Antenna	R/S	HL562	100015	2006/11	1 year
11	Horn Antenna	R/S	HF906	100039	2006/11	1 year
12	RF Test Panel	R/S	TS / RSP	335015/ 0017	N/A	N/A
13	Turntable	ETS	2088	2149	N/A	N/A
14	Antenna Mast	ETS	2075	2346	N/A	N/A

Report No.:BCT07KR-731E Page 7 of 41

# 3. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
15.203/15.247(b)/(c)	Antenna Requirement	Pass
15.207	AC Power Line Conducted Emission	Pass
15.247(a)(1)	Hopping Channel Bandwidth	Pass
15.247(a)(1)	Hopping Channel Separation	Pass
15.247(a)(1)	Number of Hopping Frequency Used	Pass
15.247(a)(1)(iii)	Dwell Time of Each Frequency	Pass
15.247(b)(1)	Maximum Peak Output Power	Pass
15.247(d)	Band Edges Emission	Pass
15.247(d)	Spurious Radiated Emission	Pass

Report No.:BCT07KR-731E Page 8 of 41

## 4. ANTENNA REQUIREMENT

## 4.1 Standard Applicable

Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Section 15.247(b)/(c):

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

If the intentional radiator is used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

#### 4.2 Antenna Connected Construction

The antenna connector is designed with permanent attachment and no consideration of replacement.

Report No.:BCT07KR-731E Page 9 of 41


#### 5. TEST OF CONDUCTED EMISSION

## 5.1 Applicable Standard

Section 15.207: For a Low-power Radio-frequency Device is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency Range (MHz)	Limits ( dBuV)		
r requericy range (wiriz)	Quasi-Peak	Average	
0.150~0.500	66~56	56∼46	
0.500~5.000	56	46	
5.000~30.00	60	50	

#### 5.2 Test Setup Diagram

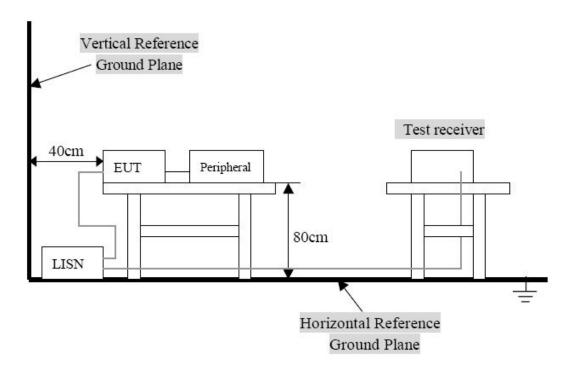

#### 5.3 Instrument Setting

The test receiver was set with the following configurations:

Test Receiver Setting:

Report No.:BCT07KR-731E Page 10 of 41

# 5.4 Test Equipment List and Details

See section 2.4 of this report.

#### 5.5 Test Procedure

- 1. Configure the EUT according to ANSI C63.4.
- 2. The EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
- 3. Connect EUT to the power mains through a line impedance stabilization network (LISN)
- 4. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
- 5. The frequency range from 150 KHz to 30 MHz was searched.
- 6. Use the Channel & Power Controlling software to make the EUT working on selected channel and expected output power, then use the "H" Patter Generator software to make the supporting equipments stay on working condition.
- 7. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- 8. The measurement has to be done between each power line and ground at the power terminal for each RF channel. Only one RF channel has to be investigated since this test is independent with the RF channel selection.

#### 5.6 Test Data

Temperature ( $^{\circ}$ ) : 22~23	EUT: Bluetooth GPS Navigation
Humidity (%RH ): 50~54	M/N: YFN43C302B-32C-2
Barometric Pressure ( mbar ): 950~1000	Operation Condition: Charging Mode

Report No.:BCT07KR-731E Page 11 of 41

#### **CONDUCTED EMISSION TEST DATA**

EUT: Bluetooth GPS Navigation

Operating Condition: Charging Mode

Test Site: HTW 3# Shielded Room

Operator: Andy

Test Specification: DC 5V from adaptor (AC 120V/60Hz)

Comment: Live Line

Start of Test: 12/13/07 11:23:54AM

## SCAN TABLE: "Voltage (9K-30M)QP"


Short Description: 150K-30M Voltage

Start Stop Step Detector Meas. IF Transducer

Frequency Frequency Width Time Bandw.

150.0 kHz 30.0 MHz 5.0 kHz QuasiPeak 1.0 s 9 kHz ESH2-Z5\_100028O

Average

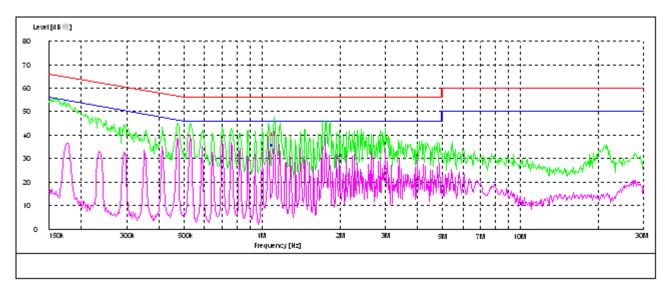

#### MEASUREMENT RESULT: "BCT1213305\_fin"

12/13/07 11:26AM

Frequency Level Transd Limit Margin Detector Line PE MHz dBµV dΒ dΒμV dΒ 0.482300 42.00 10.3 56 14.2 QΡ L1 **GND** 1.117237 40.90 10.6 56 15.1 QP Ν **GND** 

#### MEASUREMENT RESULT: " BCT1213305\_fin2"

12/13/07 11:26AM

Level Transd Limit Margin Detector Line PE Frequency MHz dBµV dΒ dΒμV dΒ 39.00 0.480090 10.3 46 7.2 ΑV **GND** L1 35.90 1.117237 10.6 46 10.1 ΑV L1 **GND** 

#### **CONDUCTED EMISSION TEST DATA**

EUT: Bluetooth GPS Navigation

Operating Condition: Charging Mode

Test Site: HTW 3# Shielded Room

Operator: Andy

Test Specification: DC 5V from adaptor (AC 120V/60Hz)

Comment: Neutral Line

Start of Test: 12/13/07 11:27:37AM

### SCAN TABLE: "Voltage (9K-30M)QP"


Short Description: 150K-30M Voltage

Start Stop Step Detector Meas. IF Transducer

Frequency Frequency Width Time Bandw.

150.0 kHz 30.0 MHz 5.0 kHz QuasiPeak 1.0 s 9 kHz ESH2-Z5\_100028O

Average

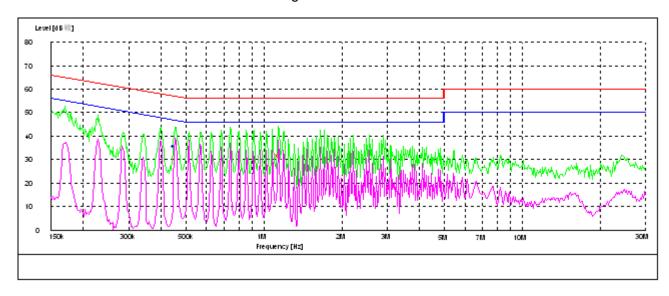

#### MEASUREMENT RESULT: "BCT1213306\_fin"

12/13/07 11:30AM

Frequency Level Transd Limit Margin Detector Line PE

 $\dot{M}Hz$   $\dot{d}B\mu V$   $\dot{d}B$   $\dot{d}B\mu V$   $\dot{d}B$ 

1.144260 31.70 10.6 56 24.3 QP N GND

#### MEASUREMENT RESULT: " BCT1213306\_fin2"

12/13/07 11:30AM

Frequency Level Transd Limit Margin Detector Line PE

MHz dBµV dB dBµV dB


0.454044 35.80 10.4 47 11.0 AV L1 GND

# 6. Test of Hopping Channel Bandwidth

# 6.1 Applicable Standard

Section 15.247(a)(1): Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

#### 6.2 EUT Setup



# 6.3 Test Equipment List and Details

See section 2.4.

#### 6.4 Test Procedure

- 1. The transmitter output was connected to the spectrum analyzer through an attenuator.
- 2. Set RBW of spectrum analyzer to 30KHz and VBW to 100KHz.
- 3. Set Detector to Peak, Trace to Max Hold and Sweep Time is Auto.
- 4. The spectrum width with level higher than 20dB below the peak level.
- 5. Repeat above 1~3 points for the middle and highest channel of the EUT.


#### 6.5 Test Result

Temperature ( °C ) : 22~23	EUT: Bluetooth GPS Navigation
Humidity (%RH ): 50~54	M/N: YFN43C302B-32C-2
Barometric Pressure ( mbar ): 950~1000	Operation Condition: Tx/Rx Mode


Modulation Type	Channel No.	Frequency (MHz)	20dB Bandwidth (kHz)	Min. Limit (kHz)
FHSS	LOW	2402.20	870	>25
FHSS	Mid	2441.25	875	>25
FHSS	High	2480.30	925	>25

Report No.:BCT07KR-731E Page 14 of 41

#### Channel Low:

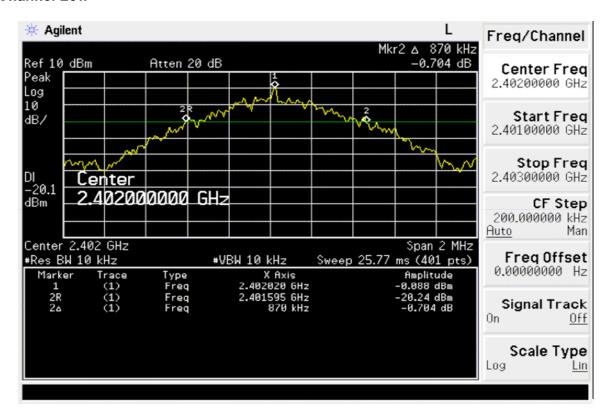


#### Channel Mid:

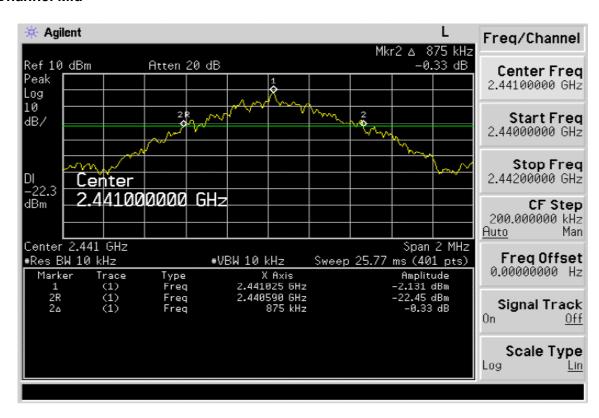

Report No.:BCT07KR-731E Page 15 of 41

# Channel High:

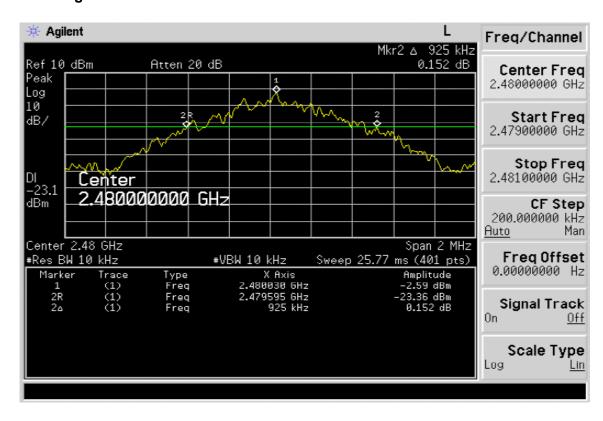


# 7. Test of Hopping Channel Separation

# 7.1 Applicable Standard

Section 15.247(a)(1): Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

# 7.2 EUT Setup



#### 7.3 Test Equipment List and Details

See section 2.4.


#### 7.4 Test Procedure

- 1. The transmitter output was connected to the spectrum analyzer through an attenuator.
- 2. Set RBW of spectrum analyzer to 100KHz and VBW to 100KHz.
- 3. Set Detector to Peak, Trace to Max Hold and Sweep Time is Auto.
- 4. The Hopping Channel Separation is defined as the separation between 2 neighboring hopping frequencies.
- 5. Repeat above 1~3 points for the middle and highest channel of the EUT.

#### 7.5 Test Result

Temperature ( °C ) : 22~23	EUT: Bluetooth GPS Navigation
Humidity (%RH ): 50~54	M/N: YFN43C302B-32C-2
Barometric Pressure ( mbar ): 950~1000	Operation Condition: Tx/Rx Mode

Report No.:BCT07KR-731E Page 17 of 41

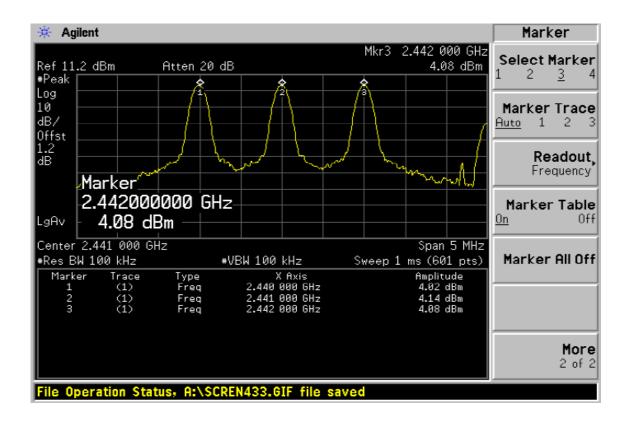


# 8. Test of Number of Hopping Frequency

# 8.1 Applicable Standard

Section 15.247(a)(1)(iii): For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 15 non-overlapping hopping channels. Frequency hopping system which use fewer than 75 hopping frequencies may employ intelligent hopping techniques to avoid interference to other transmissions. Frequency hopping system may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 non-overlapping channels are used.

#### 8.2 EUT Setup



# 8.3 Test Equipment List and Details

See section 2.4.

#### **8.4 Test Procedure**


- 1. The transmitter output was connected to the spectrum analyzer through an attenuator.
- 2. Set RBW of spectrum analyzer to 100KHz and VBW to 100KHz.
- 3. Set Detector to Peak, Trace to Max Hold and Sweep Time is Auto.
- 4. Observe frequency hopping in 2400MHz~2483.5MHz, there are at least 32 non-overlapping channels.
- 5. Repeat above 1~3 points for the middle and highest channel of the EUT.

#### 8.5 Test Result

Temperature ( $^{\circ}$ ) : 22~23	EUT: Bluetooth GPS Navigation
Humidity (%RH ): 50~54	M/N: YFN43C302B-32C-2
Barometric Pressure ( mbar ): 950~1000	Operation Condition: Tx/Rx Mode

Report No.:BCT07KR-731E Page 19 of 41

Modulation Type	Frequency (MHz)	Number of Hopping Channel (Channels)	Min. Limit (kHz)
FHSS	2401.9~2480.00	79	>15

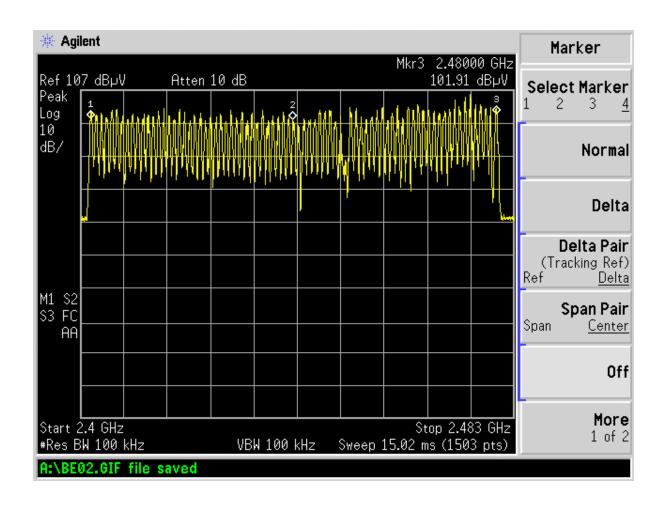


Report No.:BCT07KR-731E Page 20 of 41

# 9. Test of Dwell Time of Each Frequency

# 9.1 Applicable Standard

Section 15.247(a)(1)(iii): For frequency hopping systems operating in the 2400-2483.5 MHz band The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4seconds multiplied by the number of hopping channels employed.

### 9.2 EUT Setup



## 9.3 Test Equipment List and Details

See section 2.4.

#### 9.4 Test Procedure

- 1. The transmitter output was connected to the spectrum analyzer through an attenuator.
- 2. Set RBW of spectrum analyzer to 1000kHz and VBW to 1000kHz.
- 3. Set Detector to Peak, Trace to Max Hold and Sweep Time is more than once pulse time.
- 4. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- 5. Measure the maximum time duration of one single pulse.

#### 9.5 Test Result

Temperature ( °C ) : 22~23	EUT: Bluetooth GPS Navigation
Humidity (%RH ): 50~54	M/N: YFN43C302B-32C-2
Barometric Pressure ( mbar ): 950~1000	Operation Condition: Tx/Rx Mode

Report No.:BCT07KR-731E Page 21 of 41

Modulation Type	Channel No.	Frequency (MHz)	Dwell Time (ms)	Limit (ms)
FHSS	Low	2402.20	268.80	400
FHSS	Mid	2441.25	268.80	400
FHSS	High	2480.30	275.20	400

A period time = 0.4 (ms) \* 79 = 31.6 (s) CH Low:

DH1 time slot = 0.42 (ms) \* (1600/79) \* 31.6 = 268.80 (ms)

CH Mid:


DH1 time slot = 0.42 (ms) \* (1600/79) \* 31.6 = 268.80 (ms)

CH High:


DH1 time slot = 0.43 (ms) \* (1600/79) \* 31.6 = 275.20(ms)

Report No.:BCT07KR-731E


#### **Channel Low:**

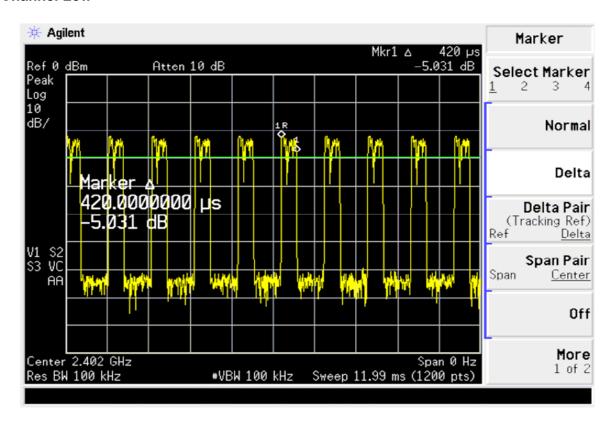

#### Channel Mid:

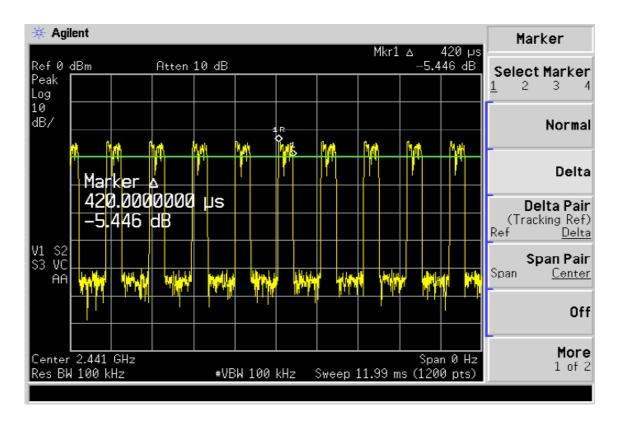

# Channel High:

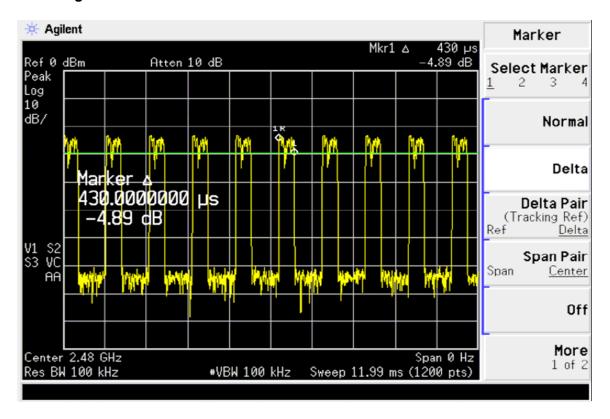


# 10. Test of Maximum Peak Output Power

# 10.1 Applicable Standard

Section 15.247(b)(1): For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels and The maximum peak output power shall not exceed 1 watt. For all other frequency hopping systems in this frequency band, The maximum peak output power shall not exceed 0.125 watt.

# 10.2 EUT Setup



# 10.3 Test Equipment List and Details

See section 2.4.

#### **10.4 Test Procedure**

- 1. The transmitter output was connected to the peak power meter and recorded the peak value.
- 2. Peak power meter parameter set to auto attenuator and filter is the same as.
- 3. Repeated the 1 for the middle and highest channel of the EUT.


#### 10.5 Test Result

Temperature ( °C ) : 22~23	EUT: Bluetooth GPS Navigation
Humidity (%RH ): 50~54	M/N: YFN43C302B-32C-2
Barometric Pressure ( mbar ): 950~1000	Operation Condition: Tx/Rx Mode


Modulation Type	Channel No.	Frequency (MHz)	Output Power (dBm)	Limits (dBm)	Margin (dB)
FHSS	Low	2402.15	2.992	20.9	17.90
FHSS	Mid	2441.13	2.883	20.9	18.01
FHSS	High	2480.16	2.629	20.9	18.27

Report No.:BCT07KR-731E Page 26 of 41

#### **Channel Low:**

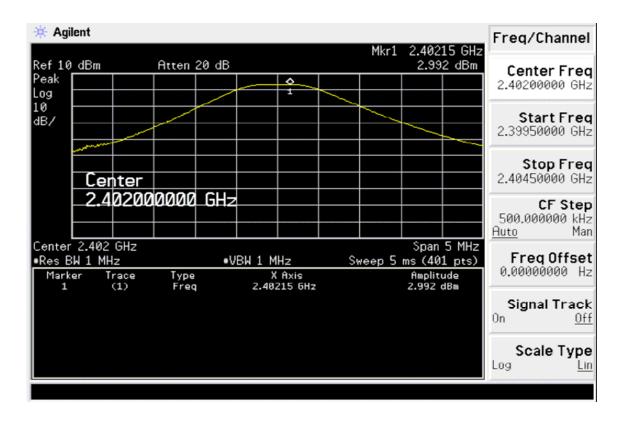


#### Channel Mid:

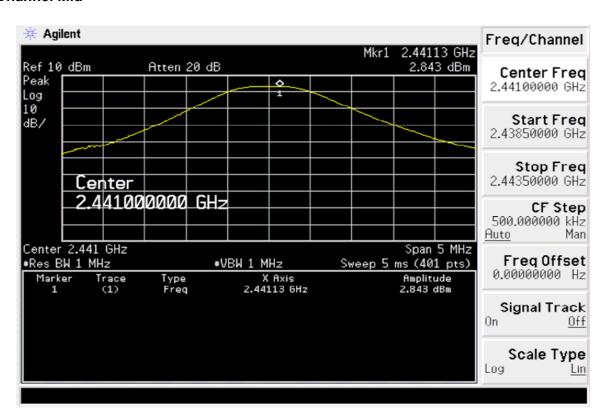

Report No.:BCT07KR-731E Page 27 of 41

# Channel High:

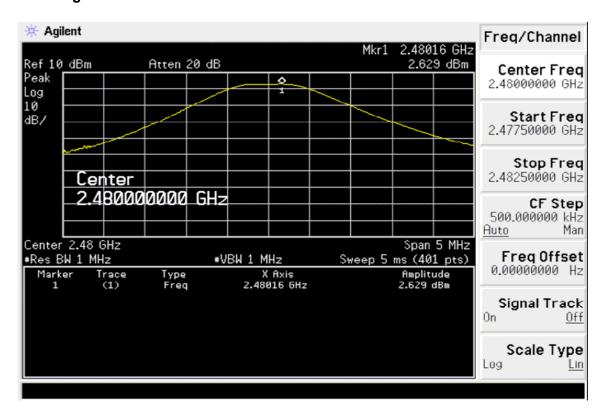


# 11. Test of Band Edges Emission

# 11.1 Applicable Standard


Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. In addition, radiated emissions that fall in the restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified in Section 15.209.

# 11.2 EUT Setup

#### **Radiated Measurement Setup**

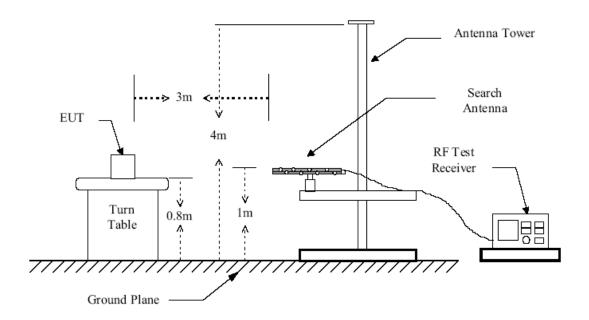

#### **Conducted Measurement Setup**



Report No.:BCT07KR-731E Page 29 of 41

## 11.3 Test Equipment List and Details

See section 2.4.

#### 11.4 Test Procedure

#### **Conducted Measurement**

- 1. The transmitter is set to the lowest channel.
- 2. The transmitter output was connected to the spectrum analyzer via a cable and cable loss is used as the offset of the spectrum analyzer.
- 3. Set both RBW and VBW of spectrum analyzer to 100KHz with convenient frequency span including 100MHz bandwidth from lower band edge. Then detector set to peak and max hold this trace.
- 4. The lowest band edges emission was measured and recorded.
- 5. The transmitter set to the highest channel and repeated 2~4.

#### **Radiated Measurement**

- 1. Configure the EUT according to ANSI C63.4.
- 2. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emission field strength of both horizontal and vertical polarization.
- 4. For band edge emission, the antenna tower was scan (from 1 M to 4 M) and then the turn table was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. For band edge emission, use 10Hz VBW and 1MHz RBW for reading under AV and use 1MHz VBW and 1MHz RBW for reading under PK.

# 11.5 Test Result


Temperature ( °C ) : 22~23	EUT: Bluetooth GPS Navigation
Humidity (%RH ): 50~54	M/N: YFN43C302B-32C-2
Barometric Pressure ( mbar ): 950~1000	Operation Condition: Tx/Rx Mode

Report No.:BCT07KR-731E Page 30 of 41


#### **Radiated Test Result**

Frequency (MHz)	Antenna Polarization	Emission Read Value (dBµV/m)	Limits (dBµV/m)	
<2400	Н	26.3	54	
>2483.5	Н	25.8	54	

# **Conducted Test Result**

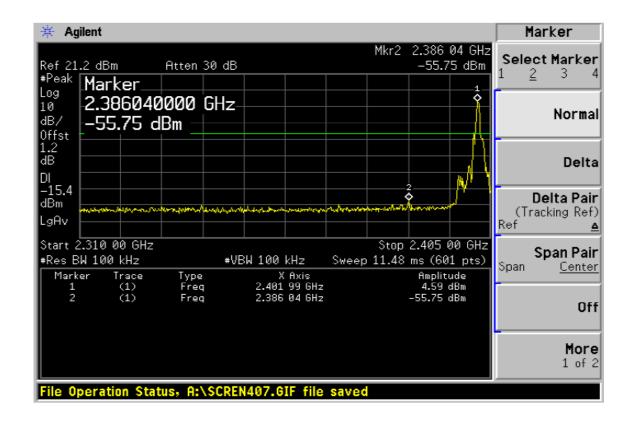

Report No.:BCT07KR-731E Page 31 of 41

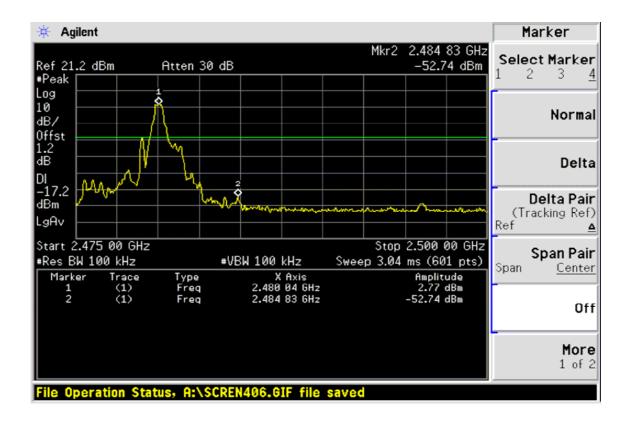

Report No.:BCT07KR-731E Page 32 of 41

# 12. Test of Spurious Radiated Emission

# 12.1 Applicable Standard

Section 15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. In addition, radiated emissions that fall in the restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified in Section 15.209.

# 12.2 EUT Setup

#### **Radiated Measurement Setup**

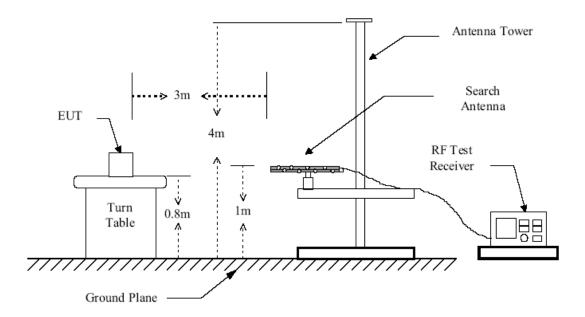


Figure 1: Frequencies measured below 1 GHz configuration

Report No.:BCT07KR-731E Page 33 of 41


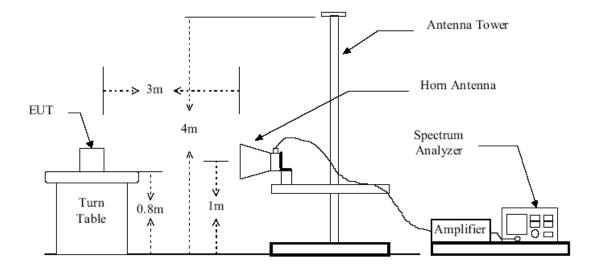


Figure 2: Frequencies measured above 1 GHz configuration

#### **Conducted Measurement Setup**



# 12.3 Test Equipment List and Details

See section 2.4.

#### 12.4 Test Procedure

## **Radiated Measurement**

- 1. Configure the EUT according to ANSI C63.4.
- 2. The EUT was placed on the top of the turntable 0.8 meter above ground.
- 3. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 4. Power on the EUT and all the supporting units.
- 5. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 6. The height of the broadband receiving antenna was varied between one meter and four

Report No.:BCT07KR-731E Page 34 of 41

meters above ground to find the maximum emission field strength of both horizontal and vertical polarization.

- 7. For each suspected emission, the antenna tower was scanned (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 8. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.

#### **Conducted Measurement**

- 1. For emission above 1GHz, conducted measurement method is used.
- 2. The transmitter is set to the lowest channel.
- 3. The transmitter output was connected to the spectrum analyzer via a cable and cable loss is used as the offset of the spectrum analyzer.
- 4. Set RBW to 1 MHz and VBW to 3 MHz, Then detector set to peak and max hold this trace.
- 5. The lowest band edges emission was measured and recorded.
- 6. The transmitter set to the highest channel and repeated 2~4.

#### 12.5 Test Result

Temperature ( $^{\circ}$ C ) : 22~23	EUT: Bluetooth GPS Navigation
Humidity (%RH ): 50~54	M/N: YFN43C302B-32C-2
Barometric Pressure ( mbar ): 950~1000	Operation Condition: Tx / Rx & ChaegingMode

# Spurious Emission (30~1000MHz)

Maximum Frequency		Polarity	Limit	Margin		
(MHz)	Polarity	Value dBµV/m	Transd	Result dBµV/m	dBμV/m	dBμV/m
90.14	V	47.41	15.29	32.12	43.50	11.38
201.69	V	45.00	16.43	28.57	43.50	14.93
328.76	V	38.54	12.56	25.98	46.00	20.02
401.51	V	42.60	10.83	31.77	46.00	14.23
500.45	V	38.50	9.76	28.74	46.00	17.26
882.63	V	36.58	3.91	32.67	46.00	13.33
104.69	Н	45.93	14.74	31.19	43.50	12.31
214.30	Н	41.87	16.02	25.85	43.50	17.65
350.10	Н	36.71	11.98	24.73	46.00	21.27
401.51	Н	48.25	10.83	37.42	46.00	8.58
447.10	Н	40.67	10.44	30.23	46.00	15.77
622.67	Н	40.94	7.97	32.97	46.00	13.03

Remark: Transd.=Antenna Factor+Cable Loss-Pre-amplifier

Report No.:BCT07KR-731E Page 36 of 41

#### **Harmonics**

Channel High								
Maximum Frequency	Polarity and Level				Limit (dBµV/m)		Margin (dBμV/m)	
(MHz)	Polarity	Value dBµV/m	Transd	Result dBµV/m	Peak	AV	Peak	AV
4960.0	Н	49.3	24.1	25.2	74.0	54.0	48.8	28.8
4960.0	V	50.2	24.5	25.7	74.0	54.0	48.8	28.3
7440.0	Н	49.8	24.6	25.2	74.0	54.0	48.8	28.8
7440.0	V	52.4	24.8	27.6	74.0	54.0	46.4	26.4
9920.0								
9920.0								
12400.0								
14880.0								
17360.0								
19840.0								
22320.0								
24800.0								

Remark: 1. Transd.=Antenna Factor+Cable Loss-Pre-amplifier

2. Datas of measurement within this frequency range shown " -" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

	Channel Mid								
Maximum Frequency		Polarity and Level				Limit (dBµV/m)		Margin (dBµV/m)	
(MHz)	Polarity	Value dBµV/m	Transd	Result dBµV/m	Peak	AV	Peak	AV	
4882.0	Н	48.3	24.1	24.2	74.0	54.0	49.8	29.8	
4882.0	V	49.2	24.6	24.6	74.0	54.0	49.4	29.4	
7323.0	Н	50.7	24.9	25.8	74.0	54.0	48.2	28.2	
7323.0	V	51.0	24.7	26.3	74.0	54.0	47.7	27.7	
9764.0									
9764.0									
12205.0									
14646.0									
17087.0									
19524.0									
21969.0									
24410.0									

Report No.:BCT07KR-731E Page 37 of 41

#### Remark: 1. Transd.=Antenna Factor+Cable Loss-Pre-amplifier

2. Datas of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.


	Channel Low								
Maximum Frequency	Polarity and Level				Limit (dBµV/m)		Margin (dBμV/m)		
(MHz)	Polarity	Value dBµV/m	Transd	Result dBµV/m	Peak	AV	Peak	AV	
4804.0	Н	48.0	24.2	23.8	74.0	54.0	50.2	30.2	
4804.0	V	49.5	24.4	25.1	74.0	54.0	48.9	28.9	
7206.0	Н	48.6	24.6	24.0	74.0	54.0	50	30	
7206.0	V	50.0	24.8	25.2	74.0	54.0	48.8	28.8	
9608.0									
9608.0									
12010.0									
14412.0									
16814.0									
19216.0									
21618.0									
24020.0									

Remark: 1. Transd.=Antenna Factor+Cable Loss-Pre-amplifier


<sup>2.</sup> Datas of measurement within this frequency range shown "-" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

# **CONDUCTED TEST RESULT(1~10GHz)**

#### Channel Low(30MHz - 3GHz):

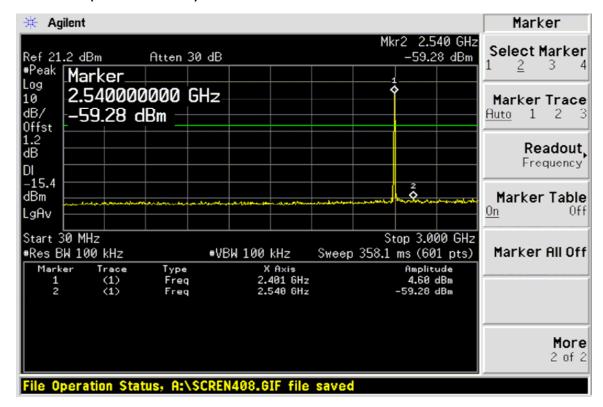


# Channel Low(3GHz - 26.5GHz):

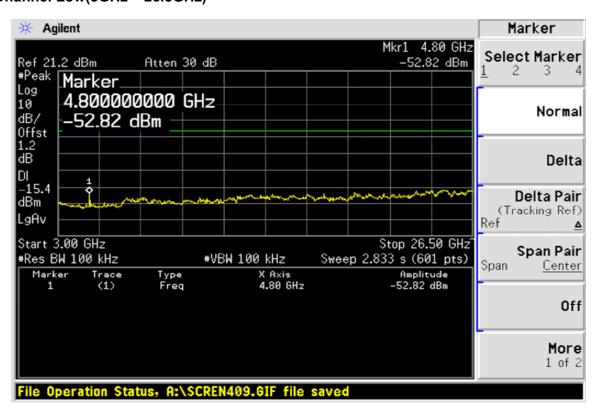


Report No.:BCT07KR-731E Page 39 of 41

#### Channel Mid(30MHz - 3GHz) :

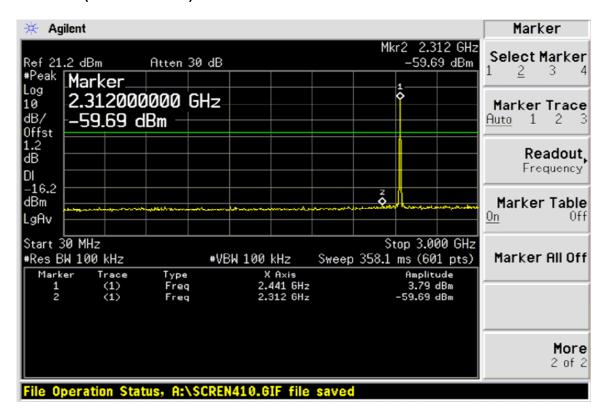


#### Channel Mid(3GHz - 26.5GHz):

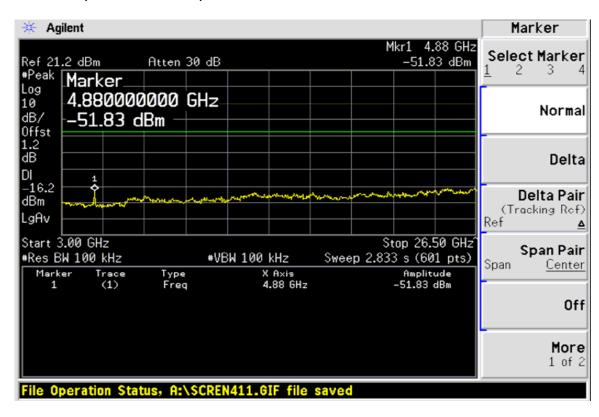


Report No.:BCT07KR-731E Page 40 of 41

#### Channel High(30MHz - 3GHz):

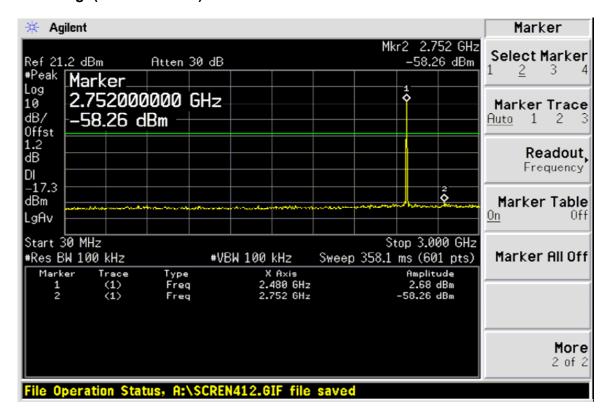

#### Channel High(3GHz - 26.5GHz):

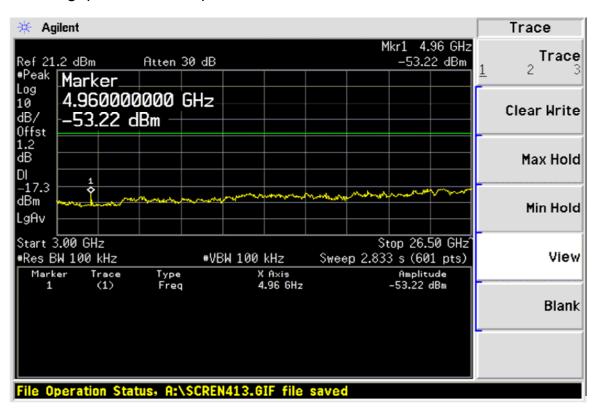

Report No.:BCT07KR-731E Page 41 of 41