

No.198 Kezhu Road, Science Town Economic& Technology Development District Guangzhou, China 510663 Telephone: +86 (0) 20 8215 5555 Fax: +86 (0) 20 8207 5059

Email: sas internet operations@sas.com

Report No.:SZEMO080804218RFF

Page: 1 of 34 FCC ID: VUY1062B

FCC TEST REPORT

SZEMO080804218RF **Application No:** Applicant/ Manufacture/Factory: Vocentrix(HK) Limited

Applicant Address: Flat5-6, 11/F, Harry Ind Bidg, 49-51 Au Pui Wan St, Fotan, Shatin, HK

Manufacture/Factory Address: 112, Arising Sun, Ind. City, Iincun, Tangxia, Dongguan, China

VUY1062B FCC ID:

2.410GHz to 2.475GHz **Fundamental Frequency:**

Equipment under Test (EUT):

Baby monitor Name:

BU 08279, BU 08302. Item No.:

Please refer to section 2 of this report which indicates which item was

actually tested and which were electrically identical.

FCC PART 15, SUBPART C and SUBPART B: 2008 Standards:

27 August 2008 Date of Receipt:

28 August to 16 September 2008 Date of Test:

& 21 to 22 September 2009

22 September 2009 Date of Issue:

Test Result: PASS *

Authorized Signature:

Robinson Lo Laboratory Manager

This report refers to the General Conditions for Inspection and Testing Services, printed overleaf

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the SGS PRODUCT CERTIFICATION MARK. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

This document is issued by the Company under its General Conditions of Service printed overleaf or available on request and accessible at http://www.sgs.com/terms and conditions.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law." Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This document cannot be reproduced except in full, without prior approval of the Company.

In the configuration tested, the EUT complied with the standards specified above.



Report No.: SZEMO080804218RFF

Page: 2 of 2

2 Test Summary

Test	Test Requirement	Stanadard Paragraph	Result
Conducted Emissions	FCC PART 15:2008	Section 15.107 / 15.207	PASS
Radiated Emission	FCC PART 15:2008	Section 15.209	PASS
Transmit spurious Emission	FCC PART 15:2008	Section 15.205/15.209	PASS*
Maximum Peak Output Power	FCC PART 15 :2008	Section 15.247 (b)	PASS
6dB Bandwidth	FCC PART 15 :2008	Section 15.247 (a2)	PASS
Edges Measurement	FCC PART 15 2008	Section 15.247(d)	PASS
Power Spectral Density Measurement	FCC PART 15 :2008	Section 15.247 (e)	PASS
Antenna requirement.	FCC PART 15:2008	Section 15.247 (b)	PASS

Remark:

Item No.: BU 08279, BU 08302

Only the Item BU 08279 was tested, since the electrical circuit design, layout, components used and internal wiring were identical for the above items.

The EUT passed the Transmit spurious Emission test after retest.



Report No.: SZEMO080804218RFF

Page: 3 of 2

3 Contents

			Page
1	COVEF	R PAGE	1
2	TEST S	SUMMARY	2
3	CONTE	ENTS	3
4	GENEF	RAL INFORMATION	4
	4.1 Gene	ERAL DESCRIPTION OF E.U.T.	/
		EST LOCATION	
		THER INFORMATION REQUESTED BY THE CUSTOMER	
_			
5	TEST F	RESULTS	5
	5.1 TE	EST INSTRUMENTS	5
	5.2 E.	U.T. OPERATION	5
		ST PROCEDURE & MEASUREMENT DATA	
	5.3.1	Conducted Emissions	6
	5.3.2	Radiated Emissions	9
	5.3.3	Transmit Spurious Emissions	12
	5.3.4	6dB Bandwidth	18
	5.3.5	Maximum Peak Output Power:	21
	5.3.6	Band Edges Measurement	24
	<i>5.3.7</i>	Power Spectral Density Measurement	
	5.3.8	Antenna Requirement	34
	Standar	rd requirement	34
	EUT Ar	ntenna	34



Report No.: SZEMO080804218RFF

Page: 4 of 2

4 General Information

4.1 General Description of E.U.T.

Name: Baby monitor

Item No.: BU 08279, BU 08302 Frequency Range 2.410GHz to 2.475GHz

Antenna Type; Integral

Verify the Frequency and Channel

Channel	Frequency (MHz)
Lowest	2410
Middle	2440
Highest	2475

Note:

- 1. Section 15.31(m): Measurements on intentional radiators or receivers shall be performed at three frequencies for operating frequency range over 10 MHz. The locations of these frequencies one near the top, one near the middle and one near the bottom.
- 2. So all the items as followed in testing report are need to test these three frequencies:

Low channel: 2410 MHz.

Middle channel: 2440 MHz.

High channel: 2475 MHz.

4.2 Test Location

No.198 Kezhu Road, Science Town Economic& Technology Development District Guangzhou, China 510663

Telephone: +86 (0) 20 8215 5555 Fax: +86 (0) 20 8207 5059

4.3 Other Information Requested by the Customer

None.



Report No.: SZEMO080804218RFF

Page: 5 of 2

5 Test Results

5.1 Test Instruments

	RE in Chamber					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (dd-mm-yy)	Cal.Due date (dd-mm-yy)
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	16-06-2009	15-06-2010
2	EMI Test Receiver	Rohde & Schwarz	ESIB26	SEL0023	12-12-2008	11-12-2009
3	EMI Test software	AUDIX	E3	SEL0050	N/A	N/A
4	Coaxial cable	SGS	N/A	SEL0028	18-06-2009	17-06-2010
5	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0014	12-08-2009	11-08-2010
6	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	18-06-2009	17-06-2010
7	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0005	12-08-2009	11-08-2010
8	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	12-08-2009	11-08-2010
9	Pre-amplifier (1-18GHz)	Rohde & Schwarz	AFS42-00101 800-25-S-42	SEL0081	18-06-2009	17-06-2010
10	Pre-amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	SEL0080	18-06-2009	17-06-2010
11	Band filter	Amindeon	82346	SEL0094	18-06-2009	17-06-2010
12	Active Loop Antenna	Beijing Daze	ZN30900A	SEL0097	15-06-2009	14-06-2010

5.2 E.U.T. Operation

EUT supply: AC adapter: Input: AC 120V 60Hz 6VA
Output: DC 5V 180mA
Or 3x1.5V(AAA)=4.5V

Operating Environment:

Temperature: 24.0 C Humidity: 50 % RH Atmospheric Pressure: 1010 mbar

Operation:

Test the EUT as a product which Direct Sequence Spread Spectrum. the fundamental frequencies are from 2.410GHz to 2.475GHz. The test procedure provided by applicant enabled the EUT to transmit and receive data at lowest channel 2.410GHz), middle channel 2.440GHz), and highest channel 2.475GHz, frequencies individually. Pre-test all the frequencies mode and their power status, compliance test in the worse case: above three channels.

FCC ID: VUY1062B



Report No.: SZEMO080804218RFF

Page: 6 of 2

5.3 Test Procedure & Measurement Data

5.3.1 Conducted Emissions

Test Requirement: FCC Part15 C Section 15.207

Test Method: ANSI C63.4:2003 Frequency Range: 150KHz to 30MHz

Class / Severity: Class B

Receiver setup: RBW=9KHz VBW=30KHz detector: Peak

Operating Environment:

Temperature: 24 °C Humidity: 50 % RH Atmospheric Pressure: 1010 Mbar


EUT Operation:

Test in normal mode. For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental fraguency component of

input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied

between 85% and 115% of the nominal rated supply voltage.

Plan View of Test Setup

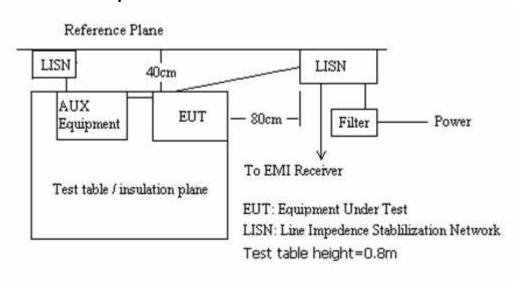



Report No.: SZEMO080804218RFF

Page: 7 of 2


5.3.1.1 Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected. For EUT communicating with on mode.

The following Quasi-Peak and Average measurements were performed on the EUT:

Livel Line

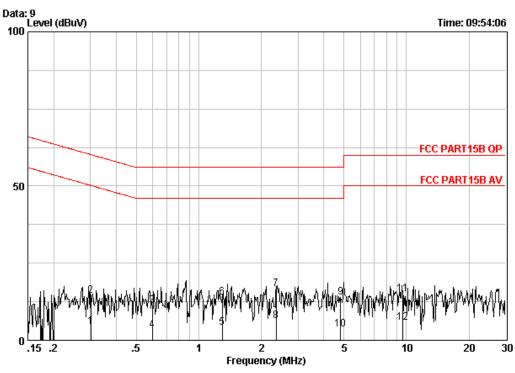

Site : Shielding Room

Condition : FCC PART15B QP CE LINE

EUT : Baby monitor
Jop No : 4218RF
Line : N/A
Test mode : on mode


est mode . on mode	Freq MHz	Cable Loss dB	LISN Factor dB	Read Level	Level	Limit Line ————————————————————————————————————	Over Limit	Remark
1	0.30188	0.05	-0.04	4.25	4.26	50.19	-45.93	Average
2	0.30188	0.05	-0.04	14.34	14.34	60.19	-45.85	QP
3	0.59794	0.06	-0.04	11.08	11.10	56.00	-44.90	QP
4	0.59794	0.06	-0.04	3.25	3.27	46.00	-42.73	Average
5	1.296	0.09	-0.05	3.99	4.03	46.00	-41.97	Average
6	1.296	0.09	-0.05	13.90	13.94	56.00	-42.06	QP
7 @	2.358	0.13	-0.07	16.62	16.68	56.00	-39.32	QP
8	2.358	0.13	-0.07	6.25	6.31	46.00	-39.69	Average
9	4.822	0.17	-0.11	13.90	13.96	56.00	-42.04	QP
10	4.822	0.17	-0.11	3.57	3.63	46.00	-42.37	Average
11	9.552	0.22	-0.27	15.04	14.99	60.00	-45.01	QP
12	9.552	0.22	-0.27	5.88	5.82	50.00	-44.18	Average



Report No.: SZEMO080804218RFF

Page: 8 of 2

Neutral Line

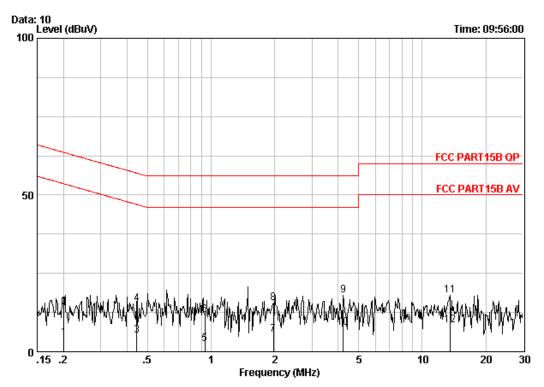

Site : Shielding Room

Condition : FCC PART15B QP CE NEUTRAL

EUT : Baby monitor
Jop No : 4218RF
Line : N/A

	Cable	LISN	Read		Limit	Over	
Freq	Loss	Factor	Level	Level	Line	Limit	Remark
MHz	dB	dB	dBuV	dBuV	dBuV	dB	
0.20075	0.04	-0.04	4.27	4.26	53.58	-49.32	Average
0.20075	0.04	-0.04	14.26	14.26	63.58	-49.32	QP
0.44443	0.06	-0.04	5.26	5.28	46.98	-41.70	Average
0.44443	0.06	-0.04	15.25	15.27	56.98	-41.71	QP
0.93314	0.08	-0.04	2.35	2.39	46.00	-43.61	Average
0.93314	0.08	-0.04	11.69	11.72	56.00	-44.28	QP
1.970	0.12	-0.06	5.34	5.40	46.00	-40.60	Average
1.970	0.12	-0.06	15.40	15.46	56.00	-40.54	QP
4.224	0.16	-0.10	17.80	17.85	56.00	-38.15	QP
4.224	0.16	-0.10	7.54	7.60	46.00	-38.40	Average
13.551	0.24	-0.42	18.03	17.85	60.00	-42.15	QP
13.551	0.24	-0.42	8.52	8.34	50.00	-41.66	Average
	MHz 0.20075 0.20075 0.44443 0.44443 0.93314 0.93314 1.970 1.970 4.224 4.224 13.551	MHz dB 0.20075 0.04 0.20075 0.04 0.44443 0.06 0.44443 0.06 0.93314 0.08 0.93314 0.08 1.970 0.12 1.970 0.12 4.224 0.16 4.224 0.16 13.551 0.24	MHz dB dB 0.20075 0.04 -0.04 0.20075 0.04 -0.04 0.44443 0.06 -0.04 0.44443 0.06 -0.04 0.93314 0.08 -0.04 0.93314 0.08 -0.04 1.970 0.12 -0.06 1.970 0.12 -0.06 4.224 0.16 -0.10 4.224 0.16 -0.10 13.551 0.24 -0.42	MHz Loss Factor Level 0.20075 0.04 -0.04 4.27 0.20075 0.04 -0.04 14.26 0.44443 0.06 -0.04 5.26 0.44443 0.06 -0.04 15.25 0.93314 0.08 -0.04 2.35 0.93314 0.08 -0.04 11.69 1.970 0.12 -0.06 5.34 1.970 0.12 -0.06 15.40 4.224 0.16 -0.10 7.54 13.551 0.24 -0.42 18.03	MHz Loss Factor Level Level 0.20075 0.04 -0.04 4.27 4.26 0.20075 0.04 -0.04 14.26 14.26 0.44443 0.06 -0.04 5.26 5.28 0.44443 0.06 -0.04 15.25 15.27 0.93314 0.08 -0.04 2.35 2.39 0.93314 0.08 -0.04 11.69 11.72 1.970 0.12 -0.06 5.34 5.40 1.970 0.12 -0.06 15.40 15.46 4.224 0.16 -0.10 17.80 17.85 4.224 0.16 -0.10 7.54 7.60 13.551 0.24 -0.42 18.03 17.85	MHz Loss Factor Level Level Line 0.20075 0.04 -0.04 4.27 4.26 53.58 0.20075 0.04 -0.04 14.26 14.26 63.58 0.44443 0.06 -0.04 5.26 5.28 46.98 0.44443 0.06 -0.04 15.25 15.27 56.98 0.93314 0.08 -0.04 2.35 2.39 46.00 1.970 0.12 -0.06 5.34 5.40 46.00 1.970 0.12 -0.06 15.40 15.46 56.00 4.224 0.16 -0.10 17.80 17.85 56.00 4.224 0.16 -0.10 7.54 7.60 46.00 13.551 0.24 -0.42 18.03 17.85 60.00	Freq Loss Factor Level Level Line Limit MHz dB dB dBuV dBuV dBuV dBuV dBuV dB 0.20075 0.04 -0.04 4.27 4.26 53.58 -49.32 0.20075 0.04 -0.04 14.26 14.26 63.58 -49.32 0.44443 0.06 -0.04 5.26 5.28 46.98 -41.70 0.93314 0.08 -0.04 15.25 15.27 56.98 -41.71 0.93314 0.08 -0.04 2.35 2.39 46.00 -43.61 0.93314 0.08 -0.04 11.69 11.72 56.00 -44.28 1.970 0.12 -0.06 5.34 5.40 46.00 -40.60 1.970 0.12 -0.06 15.40 15.46 56.00 -38.15 4.224 0.16 -0.10 7.54 7.60 46.00 -38.40 13.551 0.24 </td

TEST RESULTS: The unit does meet the FCC requirements.



Report No.: SZEMO080804218RFF

Page: 9 of 2

5.3.2 Radiated Emissions

Test Requirement: FCC Part15 C 15.209 and 15.205

Test Method: ANSI C63.4: 2003

Test Status:

On mode: Keep the EUT in communicating mode

Test site: Measurement Distance: 3m (Semi-Anechoic Chamber)

Test Range 30MHz to 13GHz

Receiver setup: Frequency range **RBW VBW**

100KHz 30MHz-1GHz 300KHz above 1GHz 1MHz 3MHz

Limit: 40.0 dBµV/m between 30MHz & 88MHz

> 43.5 dBµV/m between 88MHz & 216MHz 46.0 dBµV/m between 216MHz & 960MHz $54.0 \text{ dB}\mu\text{V/m}$ between 960MHz & 1000MHz. Above 1GHz: Peak value limit 74dBuV/m

> > Average value limit 54dBuV/m


Test Procedure: The procedure used was ANSI Standard C63.4-2003. The receiver was scanned from 30MHz to 13GHz. When an emission was found, the table was rotated to produce the maximum signal strength. An initial pre-scan was performed for in peak detection mode using the receiver. The EUT was measured for both the Horizontal and Vertical polarities and performed a pre-test three orthogonal planes. For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. The worst case emissions were reported.




Report No.: SZEMO080804218RFF

Page: 10 of 2

Test Configuration

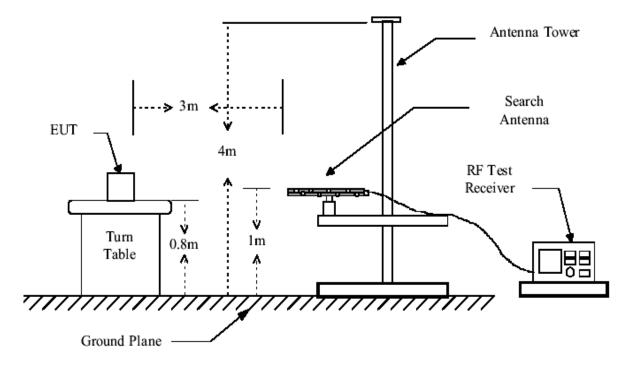

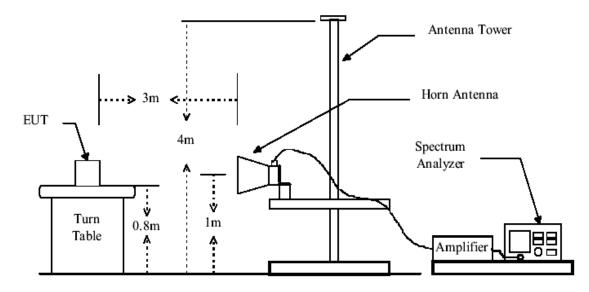

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier . The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor





Page: 11 of 2

The following test results were performed on the EUT: On mode:

Horizontal

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Remark
149.31	1.32	8.91	27.46	29.93	12.70	43.50	-30.80	QP
159.01	1.33	9.56	27.39	34.66	18.16	43.50	-25.34	QP
191.02	1.39	10.11	27.20	31.50	15.80	43.50	-27.70	QP
254.07	1.69	12.40	26.90	36.46	23.65	46.00	-22.35	QP
285.11	1.84	13.26	26.77	36.16	24.49	46.00	-21.51	QP
357.86	2.08	15.59	27.14	28.91	19.44	46.00	-26.56	QP
1035.2	3.08	27.43	37.96	51.28	43.83	74.00	-30.17	PK
1446.5	3.67	27.77	38.20	52.01	45.25	74.00	-28.75	PK
3752.4	4.97	32.25	37.97	47.23	46.48	74.00	-27.52	PK
6757.5	7.55	36.36	37.87	42.37	48.41	74.00	-25.59	PK

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Remark
44.55	0.70	9.61	28.10	38.38	20.59	40.00	-19.41	QP
159.98	1.34	9.60	27.38	34.63	18.19	43.50	-25.31	QP
191.02	1.39	10.11	27.20	31.53	15.83	43.50	-27.67	QP
223.03	1.53	11.38	27.04	32.82	18.69	46.00	-27.31	QP
254.07	1.69	12.40	26.90	34.63	21.82	46.00	-24.18	QP
287.05	1.84	13.35	26.77	30.58	19.00	46.00	-27.00	QP
1035.2	3.08	27.43	37.96	52.14	44.69	74.00	-29.31	PK
4466.2	6.45	34.06	38.09	45.27	47.69	74.00	-26.31	PK
6616.5	7.42	36.17	37.94	44.19	49.84	74.00	-24.16	PK
12350.3	10.22	39.01	34.05	38.47	53.65	74.00	-20.35	PK



Report No.: SZEMO080804218RFF

Page: 12 of 2

5.3.3 Transmit Spurious Emissions

Test Requirement: FCC Part15 C Section 15.247, 15.209 and 15.205

Test Method: ANSI C63.4: 2003, KDB558074

Test Status:

Transmitting mode: Keep the EUT continuously transmitting with modulation.

Test channel: Lowest channel, Middle channel, Highest channel

Pre-scan the EUT was placed on X axes, Y axes, Z axes; and found the Test procedure:

EUT was placed on X axes which it is worse case.

Test site: Measurement Distance: 3m (Semi-Anechoic Chamber)

Test Range 30MHz to 25GHz

Receiver setup: **RBW VBW** Remark Frequency range

30MHz-1GHz 100KHz 300KHz QP value above 1GHz 1MHz 3MHz Peak value above 1GHz 1MHz 10Hz Average value

Limit: 40.0 dBµV/m between 30MHz & 88MHz

> $43.5 \text{ dB}\mu\text{V/m}$ between 88MHz & 216MHz46.0 dBµV/m between 216MHz & 960MHz $54.0 \text{ dB}\mu\text{V/m}$ between 960MHz & 1000MHz. Above 1GHz: Peak value limit 74dBuV/m

> > Average value limit 54dBuV/m


Test Procedure: The procedure used was ANSI Standard C63.4-2003. The receiver was scanned from 30MHz to 25GHz. When an emission was found, the table was rotated to produce the maximum signal strength. An initial pre-scan was performed for in peak detection mode using the receiver. The EUT was measured for both the Horizontal and Vertical polarities and performed a pre-test three orthogonal planes. For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. The worst case emissions were reported.




Report No.: SZEMO080804218RFF

Page: 13 of 2

Test Configuration

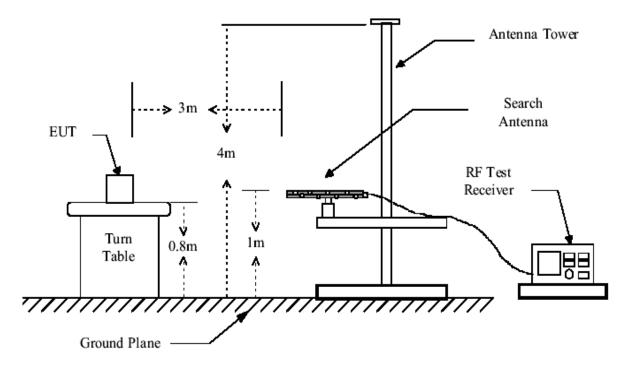

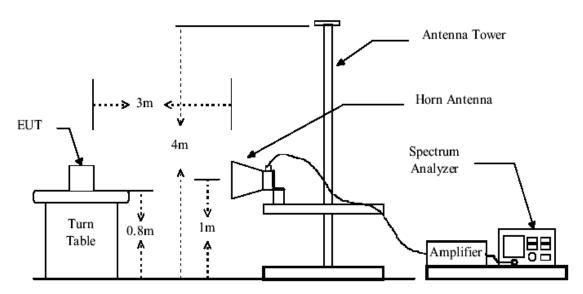

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier . The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor





Page: 14 of 2

Lowest channel: (2410MHz)

Horizontal

Horizoniai				
Frequency (MHz)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	remark
125.80	35.74	43.50	7.76	QP
495.62	36.18	46.00	9.82	QP
2386	60.27	74.00	13.73	PK
2400	67.58	74.00	6.42	PK
4825	54.60	74.00	19.40	PK
7239	56.92	74.00	17.08	PK
9653	56.11	74.00	17.89	PK
12050	58.37	74.00	15.63	PK
14464	59.84	74.00	14.16	PK
2386	43.59	54.00	10.41	AV
2400	48.19	54.00	5.81	AV
4825	39.57	54.00	14.43	AV
7239	41.89	54.00	12.11	AV
9653	41.08	54.00	12.92	AV
12050	43.34	54.00	10.66	AV
14464	44.81	54.00	9.19	AV

Frequency (MHz)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	remark
357.45	33.58	46.00	12.42	QP
593.47	35.16	46.00	10.84	QP
2385.69	58.69	74.00	15.31	PK
2400	64.81	74.00	9.19	PK
4825	54.77	74.00	19.23	PK
7239	57.07	74.00	16.93	PK
9653	55.79	74.00	18.21	PK
12050	57.97	74.00	16.03	PK
14464	59.34	74.00	14.66	PK
2385.69	41.38	54.00	12.62	AV
2400	46.67	54.00	7.33	AV
4825	39.74	54.00	14.26	AV
7239	42.04	54.00	11.96	AV
9653	40.76	54.00	13.24	AV
12050	42.94	54.00	11.06	AV
14464	44.31	54.00	9.69	AV



Report No.: SZEMO080804218RFF

Page: 15 of 2

Middle channel: (2440MHz)

Horizontal

Frequency (MHz)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	remark
315.27	35.22	46.00	10.78	QP
624.57	36.59	46.00	9.41	QP
2385.6	58.41	74.00	15.59	PK
2410	60.58	74.00	13.42	PK
4893	55.36	74.00	18.64	PK
7324	57.22	74.00	16.78	PK
9772	55.70	74.00	18.30	PK
12203	58.90	74.00	15.10	PK
14651	62.90	74.00	11.10	PK
2385.6	41.37	54.00	12.63	AV
2410	43.52	54.00	10.48	AV
4893	40.33	54.00	13.67	AV
7324	42.19	54.00	11.81	AV
9772	40.67	54.00	13.33	AV
12203	43.87	54.00	10.13	AV
14651	47.87	54.00	6.13	AV

Frequency (MHz)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	remark
186.54	32.58	46.00	13.42	QP
721.43	35.41	46.00	10.59	QP
2400	55.95	74.00	18.05	PK
2480	58.69	74.00	15.31	PK
4893	55.01	74.00	18.99	PK
7324	57.03	74.00	16.97	PK
9772	54.65	74.00	19.35	PK
12203	57.69	74.00	16.31	PK
14651	61.91	74.00	12.09	PK
2400	42.18	54.00	11.82	AV
2480	44.58	54.00	9.42	AV
4893	39.98	54.00	14.02	AV
7324	42.00	54.00	12.00	AV
9772	39.62	54.00	14.38	AV
12203	42.66	54.00	11.34	AV
14651	46.88	54.00	7.12	AV



Report No.: SZEMO080804218RFF

Page: 16 of 2

Highest channel: (2475MHz)

Horizontal

Tiorizoniai	ı	1.1	N.A	
Frequency (MHz)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	remark
366.59	35.89	46.00	10.11	QP
854.17	33.48	46.00	12.52	QP
2483.5	66.58	74.00	7.42	PK
2495.6	62.11	74.00	11.89	PK
4961	53.80	74.00	20.20	PK
7426	57.04	74.00	16.96	PK
9908	56.56	74.00	17.44	PK
12390	60.21	74.00	13.79	PK
14855	60.01	74.00	13.99	PK
2483.5	48.95	54.00	5.05	AV
2495.6	45.37	54.00	8.63	AV
4961	38.77	54.00	15.23	AV
7426	42.01	54.00	11.99	AV
9908	41.53	54.00	12.47	AV
12390	45.18	54.00	8.82	AV
14855	44.98	54.00	9.02	AV

Frequency (MHz)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	remark
198.5	34.18	43.50	9.32	QP
562.4	33.48	46.00	12.52	QP
2483.5	65.85	74.00	8.15	PK
2495.8	61.47	74.00	12.53	PK
4961	53.12	74.00	20.88	PK
7426	56.91	74.00	17.09	PK
9908	56.50	74.00	17.50	PK
12390	59.14	74.00	14.86	PK
14855	59.31	74.00	14.69	PK
2483.5	47.15	54.00	6.85	AV
2495.8	43.51	54.00	10.49	AV
4961	38.09	54.00	15.91	AV
7426	41.88	54.00	12.12	AV
9908	41.47	54.00	12.53	AV
12390	44.11	54.00	9.89	AV
14855	44.28	54.00	9.72	AV



Report No.: SZEMO080804218RFF

Page: 17 of 2

Remark:

According to 15.35 (b) When average radiated emission measurements are specified in the regulations, including emission measurements below 1000 MHz, there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules, e.g., see Section 15.255.

Section 15.205 Restricted bands of operation.

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the

frequency bands listed below:

riequency bands listed below.				
MHz	MHz	MHz	GHz	
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15	
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46	
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75	
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5	
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2	
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5	
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7	
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4	
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5	
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2	
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4	
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12	
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0	
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8	
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5	
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)	
13.36 - 13.41				

TEST RESULTS: The unit does meet the FCC requirements.





Page: 18 of 2

5.3.4 6dB Bandwidth

Test Requirement: FCC Part15 C Section 15.247(a2)
Test Method: ANSI C63.4: 2003, KDB558074

Test Status:

Transmitting mode: Keep the EUT continuously transmitting with modulation.

Receiver or spectrum

setup:

Equipment Mode	Spectrum Analyzer	
Detector Function	Peak Mode	
RBW	100KHz	
VBW	300KHz	

Test channel: Lowest channel, Middle channel, Highest channel

Requirements 15.247 (a2) For direct sequence systems, the minimum 6 dB bandwidth

shall be at least 500 kHz.

Method of measurement: The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB. Analyzer and the attached plot was taken. The EUT was setup to ANSI C63.4,2003, tested to DTS test procedure of Oct 2002 KDB558074 for compliance with FCC 47CFR 15.247 requirements.

Test results:

Channel	CHANNEL FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
Lowest	2.410	1.63	0.50	Pass
Middle	2.440	1.57	0.50	Pass
Highest	2.475	1.58	0.50	Pass

Conclusion:: The unit does meet the FCC requirements.

Please refer to the graph as below:



Report No.: SZEMO080804218RFF


Page: 19 of 2

Lowest channel: (2410MHz)



Date: 21.SEP.2009 15:54:14

Middle channel: (2440MHz)

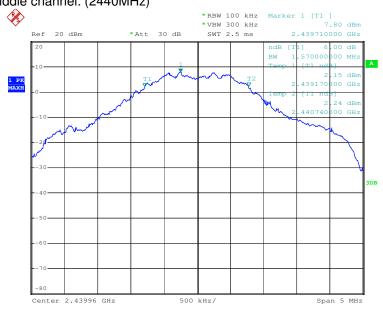


Date: 21.SEP.2009 15:40:22



Report No.: SZEMO080804218RFF

Page: 20 of 2

Highest channel: (2475MHz)

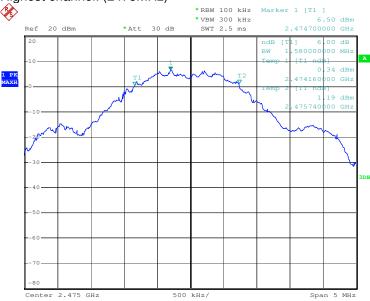

Date: 21.SEP.2009 15:53:01



Report No.: SZEMO080804218RFF

Page: 21 of 2

5.3.5 Maximum Peak Output Power:

Test Requirement: FCC Part15 C Section 15.247(b)
Test Method: ANSI C63.4: 2003, KDB558074

Test Status:

Transmitting mode: Keep the EUT continuously transmitting with modulation.

Receiver or spectrum

setup:

Equipment Mode	Spectrum Analyzer	
Detector Function	Peak Mode	
RBW	3MHz	
VBW	10MHz	

Test channel: Lowest channel, Middle channel, Highest channel

Requirements The Limit of Maximum Peak Output Power Measurement is 30dBm.

Test results


i Cot i Coulto					
Channel	Channel Frequency (GHz)	Read peak power (dBm)	Cable loss (dB)	Peak power (dBm)	Limit (dBm)
Lowest	2.410	8.49	0.50	8.99	30.0
Middle	2.440	6.82	0.50	7.32	30.0
Highest	2.475	6.51	0.50	7.01	30.0






Page: 22 of 2

Please refer to the measurement graph and data. Lowest channel:

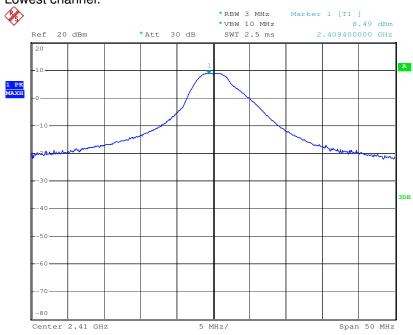

Date: 3.SEP.2008 10:48:50

Middle channel:

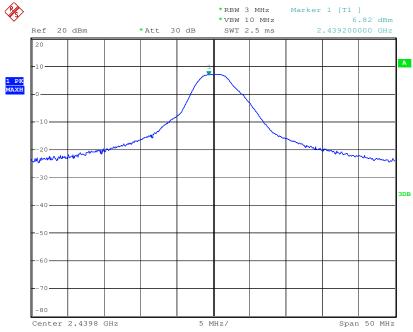


Date: 3.SEP.2008 09:11:58



Report No.: SZEMO080804218RFF

Page: 23 of 2

Highest channel:

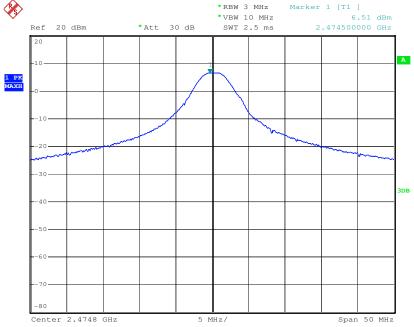

Date: 3.SEP.2008 09:48:43

Conclusion: The EUT meets the requirements of this section.



Report No.: SZEMO080804218RFF

Page: 24 of 2

5.3.6 Band Edges Measurement

Test Requirement: FCC Part15 C Section 15.247(d)
Test Method: ANSI C63.4: 2003, KDB558074

Test Status:

Transmitting mode: Keep the EUT continuously transmitting with modulation.

Receiver or spectrum

setup:

Equipment Mode	Spectrum Analyzer	
Detector Function	Peak Mode	
RBW	100KHz	
VBW	300KHz	

Test channel: Lowest channel, Middle channel, Highest channel

Requirements In any 100 kHz bandwidth outside the frequency band in which the spread

spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the

desired power, based on either an RF conducted or a radiated

measurement.

Test Result:


Please refer to the measurement graph and data.






Page: 25 of 2

Lowest channel:

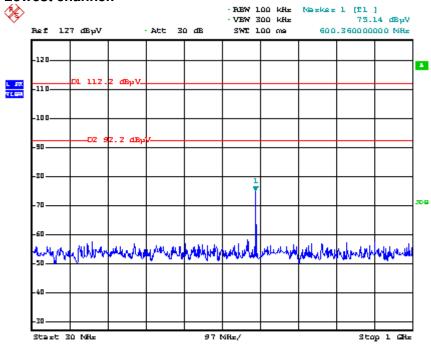

Date: 3.SEP.2008 10:11:09

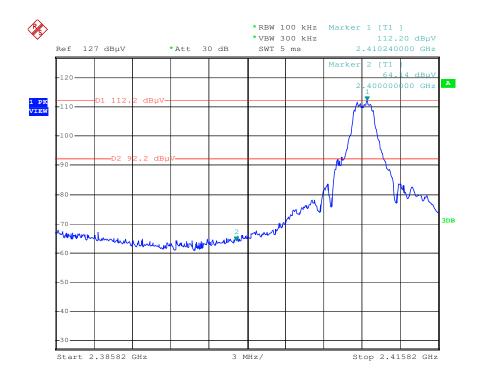


Date: 3.SEP.2008 10:08:13



Report No.: SZEMO080804218RFF

Page: 26 of 2

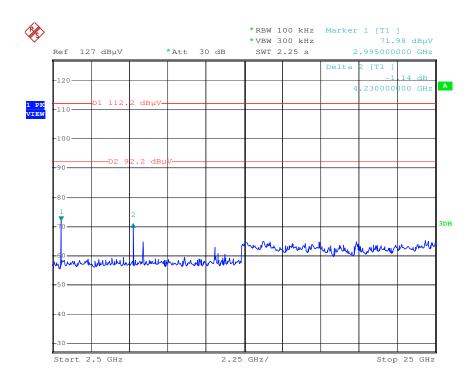

Date: 3.SEP.2008 10:12:23




Stop 2.31 GHz



Report No.: SZEMO080804218RFF


Page: 27 of 2

Middle channel:

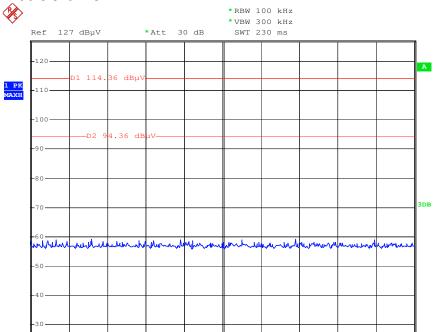

Date: 21.SEP.2009 15:48:23

Start 30 MHz

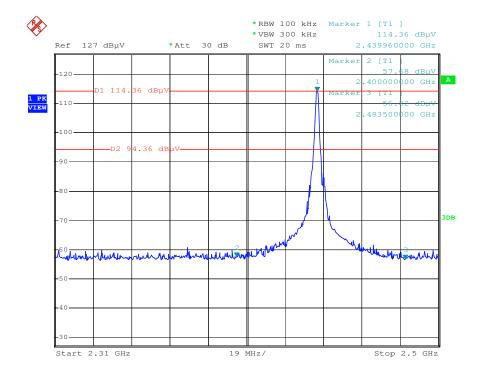


Date: 21.SEP.2009 15:47:48



Report No.: SZEMO080804218RFF

Page: 28 of 2

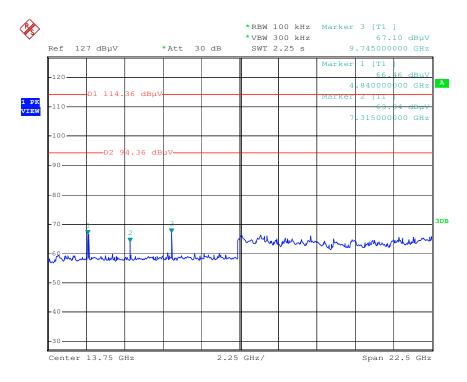


Date: 21.SEP.2009 15:49:31






Page: 29 of 2

Highest channel:

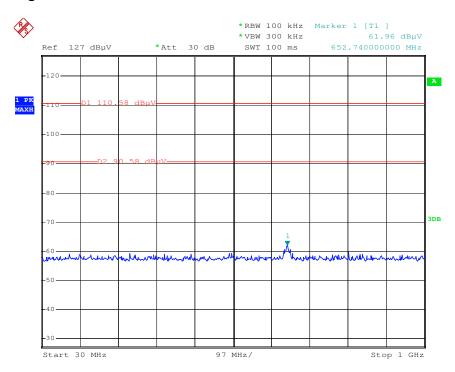

Date: 3.SEP.2008 09:59:47

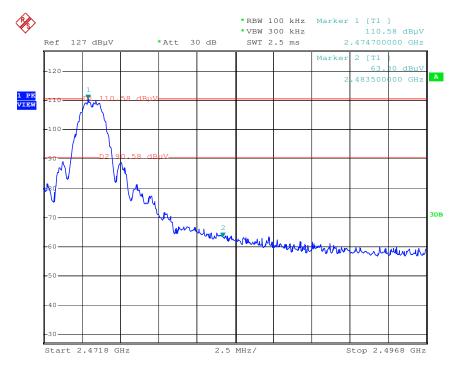

Date: 3.SEP.2008 09:58:12

SGS


SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEMO080804218RFF

Page: 30 of 2





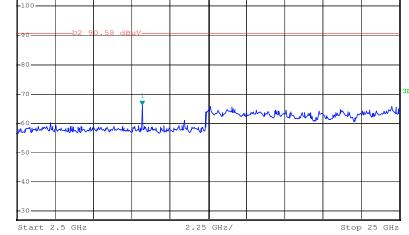

Date: 3.SEP.2008 10:00:51



Report No.: SZEMO080804218RFF

Page: 31 of 2

5.3.7 Power Spectral Density Measurement

Test Requirement: FCC Part15 C Section 15.247(d)
Test Method: ANSI C63.4: 2003, KDB558074

Test Status:

Transmitting mode: Keep the EUT continuously transmitting with modulation.

Receiver or spectrum

setup:

Equipment Mode	Spectrum Analyzer		
Detector Function	Peak Mode		
RBW	3KHz		
VBW	10KHz		
Span	300KHz		
Sweep Time	100S		

Test channel: Lowest channel, Middle channel, Highest channel

Requirements For direct sequence systems, the peak power spectral density conducted

from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission

Test Result:

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 KHz BW (dBm)	MAXIMUM Limit (dBm)	PASS/FAIL
Lowest	2.410	-2.89	8.00	Pass
Middle	2.440	-7.50	8.00	Pass
Highest	2.475	-7.27	8.00	Pass

Conclusion:

The EUT meets the requirements of this section.






Page: 32 of 2

Test Result:

Please refer to the measurement graph and data. Lowest channel

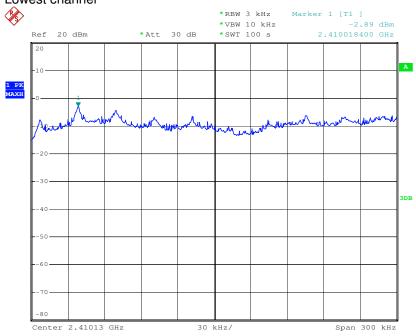

Date: 25.SEP.2008 10:09:48

Middle channel




Date: 25.SEP.2008 10:46:22



Report No.: SZEMO080804218RFF

Page: 33 of 2

Highest channel

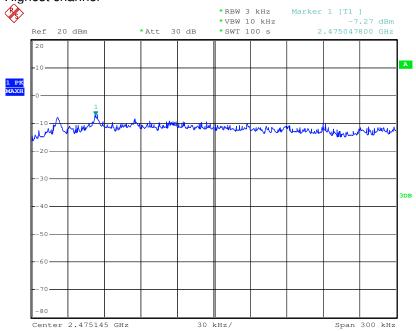

Date: 25.SEP.2008 10:35:53



Report No.: SZEMO080804218RFF

Page: 34 of 2

5.3.8 Antenna Requirement

Standard requirement

15.203 requirement:

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

15.247(c) (1)(i) requirement:

(i) Systems operating in the 2400-2483.5 MHz band that are used exclusively for fixed. point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna

The best case gain of the antenna is 0 dBi.