

849 NW STATE ROAD 45 NEWBERRY, FL 32669 USA

PH: 888.472.2424 OR 352.472.5500

FAX: 352.472.2030

EMAIL: <u>INFO@TIMCOENGR.COM</u> HTTP://WWW.TIMCOENGR.COM

FCC PART 15.227 TEST REPORT LOW POWER UNLICENSED TRANSMITTER

Applicant Guangdong Alpha Animation and Culture Co., I			
Address	Auldey Ind Area, Wenguan Road, (Central)		
	Chenghai		
	Shantou Guangdong 515800 China		
FCC ID	VVAAD291040		
Product Description	27 MHz TRANSMITTER		
Date Sample Received	10/15/2008		
Date Tested	10/15/2008		
Tested By	JOE SCOGLIO		
Approved By	MARIO DE ARANZETA		
Timco Report No.	2127ZUT8TestReport.doc		
Test Results	⊠ Pass ☐ Fail		

THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.



TABLE OF CONTENTS

GENERAL REMARKS	3
REPORT SUMMARY	4
TEST ENVIRONMENT	4
TEST SETUP	
DUT SPECIFICATION	5
TEST EQUIPMENT LIST	6
TEST PROCEDURES	7
RADIATION INTERFERENCE	8
OCCUPIED BANDWIDTH	9

APPLICANT: Guangdong Alpha Animation and Culture Co., Ltd.

FCC ID: VVAAD291040

GENERAL REMARKS

The attached report shall not be reproduced except in full without the written permission of Timco Engineering Inc.

Summary

The device under test does:

fulfill the general approval requirements as identified in this test report not fulfill the general approval requirements as identified in this test report

Attestations

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025 requirements.

Testing Certificate # 0955-01

I attest that the necessary measurements were made, under my supervision, at:

Timco Engineering Inc. 849 NW State Road 45 Newberry, Fl 32669



Authorized Signatory Name:

Mario de Aranzeta C.E.T. Compliance Engineer/ Lab. Supervisor

Date: 10/15/2008

APPLICANT: Guangdong Alpha Animation and Culture Co., Ltd.

FCC ID: VVAAD291040

REPORT: G\GUANGDONG_VVA\2127ZUT8\2127ZUT8TestReport.doc

Page 3 of 9 mdea 09.20.2007

REPORT SUMMARY

Disclaimer	The test results only relate to the item tested.
Applicable Rule(s)	FCC Pt 15.227, ANSI C63.4: 2003

TEST ENVIRONMENT

Test Facility	The test sites are located at 849 NW State Road 45 Newberry, FL 32669 USA.
Test Condition:	Temperature: 26°C
	Relative humidity: 50%

TEST SETUP

Test Exercise (e.g software description, test signal, etc.):	The DUT was placed in continuous transmit mode of operation.
Deviation from the standard(s)	No deviation from the standard(s)
Modification to the DUT:	No modification was made to the DUT.
Supporting Peripheral Equipment	Not applicable. The device is a stand-alone remote control radio.

APPLICANT: Guangdong Alpha Animation and Culture Co., Ltd.

FCC ID: VVAAD291040

DUT SPECIFICATION

Applicant	Guangdong Alpha Animation and Culture Co., Ltd.			
Description	27 MHz TRANSM	MITTER		
FCC ID	VVAAD291040			
Frequency Range	27.145 MHz – 27	7.145 MHz		
DUT Power Source	☐ 110-120Vac/50- 60Hz			
	☐ DC Power			
	☐ Battery Operated Exclusively			
Test Item	☐ Prototype	☐ Pre-Production	☐ Production	
Type of Equipment	Fixed Mobile Portable			

APPLICANT: Guangdong Alpha Animation and Culture Co., Ltd.

FCC ID: VVAAD291040

TEST EQUIPMENT LIST

Device	Manufacturer	Model Serial		Cal/Char	Due Date
			Number	Date	
3/10-Meter	TEI	N/A	N/A	Listed	3/19/10
OATS				3/20/07	
3-Meter	TEI	N/A	N/A	Listed	1/10/09
OATS				1/11/06	
Antenna:	Eaton	94455-1	1057	CAL	1/15/2010
Biconnical				1/15/2008	
Antenna:	Electro-	BIA-25	1171	CAL 7/18/07	7/18/09
Biconnical	Metrics				
Analyzer	HP	85650A	2811A01279	CAL 5/17/07	5/17/09
Blue Tower					
Quasi-Peak					
Adapter					
Analyzer	HP	85685A	2926A00983	CAL 5/17/07	5/17/09
Blue Tower					
RF					
Preselector					
Analyzer	HP	8568B	2928A04729	CAL 5/17/07	5/17/09
Blue Tower			2848A18049		
Spectrum					
Analyzer					
LISN	Electro- Metrics	EM-7820	2682	CAL 7/23/07	7/23/09
Antenna:	Eaton	96005	1243	CAL	12/14/09
Log-Periodic				12/13/07	., ,
Antenna:	EMC Test	EMCO 6512	9706-1211	CAL 4/27/06	4/27/09
Passive Loop	Systems				

APPLICANT: Guangdong Alpha Animation and Culture Co., Ltd.

FCC ID: VVAAD291040

TEST PROCEDURES

Radiated Spurious Emissions: The test procedure used was ANSI C63.4-2003 using a spectrum analyzer with a preselector. The bandwidth of the spectrum analyzer was 100 kHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The resolution bandwidth was 100 kHz and the video bandwidth was always greater than the RBW.

Occupied Bandwidth: A small sample of the transmitter output was fed into the spectrum analyzer and the following plot was generated. The vertical scale is set to 10 dB per division.

Formula Of Conversion Factors: The field strength at 3m was established by adding the meter reading of the spectrum analyzer to the antenna correction factor supplied by the antenna manufacturer plus the coax loss. The antenna correction factors are stated in terms of dB/m. The gain of the preselector was accounted for in the spectrum analyzer reading.

Example:

Freq	Meter Reading	ACF	Cable Loss	Field Strength
MHz	dBuV	dB/m	dB	dBuV/m@3 m
33	20	+10.36	+1.2	= 31.56

ANSI C63.4-2003 Measurement Procedures: The unit under test was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The table used for radiated measurements is capable of continuous rotation. When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and verticals planes.

For measurements below 30 MHz, a loop antenna was used and rotated in horizontal and vertical positions to maximize emissions. Emissions attenuated more than 20 dB below the permissible value are not reported.

APPLICANT: Guangdong Alpha Animation and Culture Co., Ltd.

FCC ID: VVAAD291040

RADIATION INTERFERENCE

Rules Part No.: 15.227

Requirements:

Frequency MHz	Limits
Fundamental Frequency	80.0 dBµV/m measured @ 3 meters
30 – 88	40.0 dBμV/m measured @ 3 meters
80 - 216	43.5 dBμV/m measured @ 3 meters
216 – 960	46.0 dBμV/m measured @ 3 meters
Above 960	54.0 dBμV/m measured @ 3 meters

Test Data:

Tuned	Emission	Meter	Ant	Coax	Correction	Field	Margin
Frequency	Frequency	Reading	Po1	Loss	Factor	Strength	dB
MHz	MHz	dBuV		dB	dB	dBuV/m	
27.145	27.10	10.1	Н	0.80	34.16	45.06	34.94
27.145	27.10	13.8	V	0.80	34.16	48.76	31.24
27.145	54.20	15.0	Н	1.01	10.07	26.08	13.92
27.145	54.20	20.7	V	1.01	9.51	31.22	8.78
27.145	81.40	16.1	H	1.24	8.64	25.98	14.02
27.145	81.40	20.6	V	1.24	8.74	30.58	9.42
27.145	108.50	5.1	H	1.46	10.29	16.85	26.65
27.145	108.50	13.2	V	1.46	10.82	25.48	18.02
27.145	135.70	8.2	H	1.65	14.34	24.19	19.31
27.145	135.70	13.5	V	1.65	14.94	30.09	13.41
27.145	162.80	3.5	H	1.84	16.26	21.60	21.90
27.145	162.80	10.0	V	1.84	17.23	29.07	14.43
27.145	190.00	14.0	H	2.03	14.10	30.13	13.37
27.145	190.00	14.9	V	2.03	14.50	31.43	12.07
27.145	217.10	10.2	H	2.19	11.65	24.04	21.96
27.145	217.10	13.8	V	2.19	11.45	27.44	18.56
27.145	244.30	9.7	H	2.32	12.32	24.34	21.66
27.145	244.30	12.0	V	2.32	12.36	26.68	19.32
27.145	271.40	4.5	H	2.46	13.64	20.60	25.40
27.145	271.40	9.8	V	2.46	13.53	25.79	20.21

APPLICANT: Guangdong Alpha Animation and Culture Co., Ltd.

FCC ID: VVAAD291040

 $REPORT: \qquad G \backslash GUANGDONG_VVA \backslash 2127ZUT8 \backslash 2127ZUT8 TestReport.doc$


OCCUPIED BANDWIDTH

Rules Part No.: 15.227

Requirements: The field strength of any emissions appearing outside of 26.96 and

27.28MHz shall be attenuated to the general limits of 15.209.

Test Data: Please refer to the following plot.

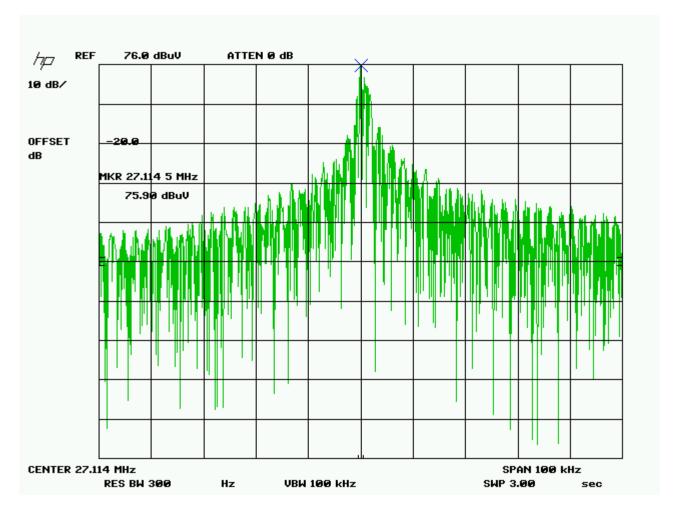

APPLICANT: Guangdong Alpha Animation and Culture Co., Ltd.

FCC ID: VVAAD291040