



# FCC PART 18 EMI MEASUREMENT AND TEST REPORT

For

## **NVC LIGHTING TECHNOLOGY CORPORATION**

Shiqiaotou Dongya village, Ruhu, HuiZhou, Guangdong, China

**FCC ID: VVOT30915** 

This Report Concerns:		Equipment Type: CFL	
Test Engineer:	Phoenix Liu Phoenix Liu		
Report Number:	RSZ07112651		
Test Date:	2007-12-10		
Report Date:	2007-12-26		
Reviewed By:	EMC Manager: Green Xu Green . Thu		
Prepared By:	Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008		

**Note:** This test report is for the customer shown above and their specific product only. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Shenzhen). This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the Federal Government.

# **TABLE OF CONTENTS**

GENERAL INFORMATION	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
Objective	
RELATED SUBMITTAL(S)/GRANT(S)	3
TEST METHODOLOGY	
TEST FACILITY	
SYSTEM TEST CONFIGURATION	5
JUSTIFICATION	
EQUIPMENT MODIFICATIONS	
External I/O Cable	
CONFIGURATION OF TEST SETUP	
BLOCK DIAGRAM OF TEST SETUP	5
CONDUCTED EMISSIONS	6
MEASUREMENT UNCERTAINTY	6
EUT Setup	6
EMI TEST RECEIVER SETUP	7
TEST EQUIPMENT LIST AND DETAILS	
TEST PROCEDURE	7
TEST RESULTS SUMMARY	
TEST DATA	
PLOT(S) OF TEST DATA	8

#### **GENERAL INFORMATION**

#### **Product Description for Equipment under Test (EUT)**

The *NVC LIGHTING TECHNOLOGY CORPORATION*'s model: *T3-ESP-9W*, *T3-ESP-13W*, or the "EUT" as referred to in this report is a *CFL* which measures approximately: **T3-ESP-9W**: 4.5 cm L x 4.5 cm W x 10.0 cm H, **T3-ESP-13W**: 4.5 cm L x 4.5 cm W x 12.0 cm H, rated input voltage: AC 120V/60Hz.

\* All measurement and test data in this report was gathered from production sample serial number: 0711028 (Assigned by BACL, Shenzhen). The EUT was received on 2007-11-26.

## **Objective**

The following test report is prepared on behalf of *NVC LIGHTING TECHNOLOGY CORPORATION* in accordance with Part 2, Subpart J, and Part 18, Subparts A, B and C of the Federal Communication Commissions rules and regulations.

The objective of the manufacturer is to determine compliance with FCC Part 18 limits.

### **Related Submittal(s)/Grant(s)**

No related submittal(s).

#### **Test Methodology**

All measurements contained in this report were conducted with MP-5, FCC Methods of Measurements of Radio Noise Emissions from ISM Equipment, February 1986. All measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

#### **Test Facility**

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located in the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on November 04, 2004. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Report No.: RSZ07112651 Page 3 of 12 FCC Part 18 Report

Additionally, Bay Area Compliance Laboratories Corp. (Shenzhen) is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (Lab Code 200707-0).



NVLAP LAB CODE 200707-0

The current scope of accreditations can be found at <a href="http://ts.nist.gov/Standards/scopes/2007070.htm">http://ts.nist.gov/Standards/scopes/2007070.htm</a>

Report No.: RSZ07112651 Page 4 of 12 FCC Part 18 Report

## **SYSTEM TEST CONFIGURATION**

## **Justification**

The system was configured for testing in a typical fashion (as normally used by a typical user).


## **Equipment Modifications**

No modifications were made to the unit tested.


## **External I/O Cable**

Cable Description	Length (M)	From/Port	То
Unshielded Detachable AC Power Cable	1.5	EUT	LISN

## **Configuration of Test Setup**



## **Block Diagram of Test Setup**

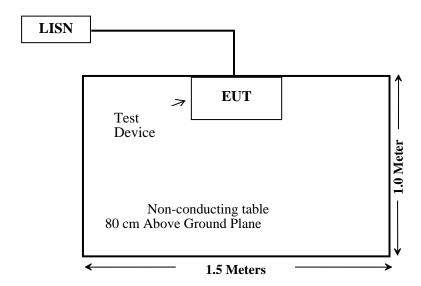


## **CONDUCTED EMISSIONS**

## **Measurement Uncertainty**

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at Bay Area Compliance Laboratories Corp. (Shenzhen) is  $\pm 2.4$  dB.

## **EUT Setup**

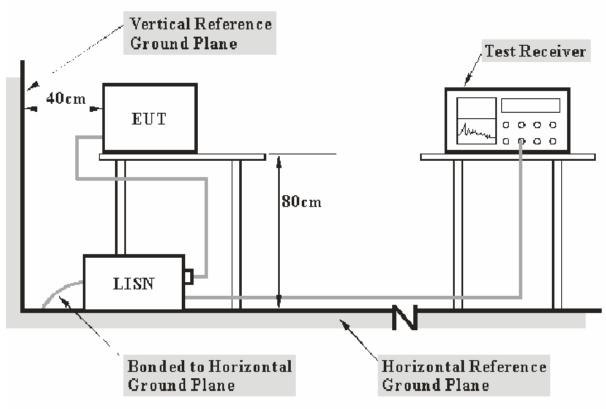

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with MP-5: 1986 measurement procedure. Specification used was with the FCC Part 18 limits.

The EUT was connected to a 120 VAC/ 60Hz power source.

Report No.: RSZ07112651 Page 6 of 12 FCC Part 18 Report

## **EMI Test Receiver Setup**

The EMI test receiver was set to investigate the spectrum from 450 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

## **Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Com-Power	L.I.S.N.	LI-200	12005	N/A	N/A
Com-Power	L.I.S.N.	LI-200	12208	N/A	N/A
Rohde & Schwarz	EMI Test Receiver	ESCS30	DE25330	2007-03-26	2008-03-26
Rohde & Schwarz	L.I.S.N.	ESH2-Z5	892107/021	2007-03-26	2008-03-26

<sup>\*</sup> Com-Power's LISN were used as the supporting equipment.

#### **Test Procedure**

During the conducted emission test, the EUT power cord was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak detection mode.

## **Test Results Summary**

According to the recorded data in following table, the EUT complied with the FCC Part 18, with the worst margin reading of:

T3-ESP-9W: **5.80** at **0.510 MHz** in the **Neutral** conductor mode.

T3-ESP-13W: 11.30 dB at 0.480 MHz in the Hot conductor mode.

<sup>\*</sup> **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

## **Test Data**

## **Environmental Conditions**

Temperature:	25 ° C
Relative Humidity:	56%
ATM Pressure:	100.0kPa

Testing was performed by Phoenix Liu on 2007-12-10.

Model:T3-ESP-9W

Line Conducted Emissions			FCC Part 18.307		
Frequency (MHz)	Amplitude (dBµV)	Detector (QP/AV)	Conductor (Hot/Neutral)	Limit (dBµV)	Margin (dB)
0.510	42.20	QP	Neutral	48.00	5.80
0.490	41.40	QP	Hot	48.00	6.60
0.605	41.10	QP	Neutral	48.00	6.90
0.580	40.80	QP	Hot	48.00	7.20
0.700	39.00	QP	Neutral	48.00	9.00
0.790	36.90	QP	Neutral	48.00	11.10
0.755	35.40	QP	Hot	48.00	12.60
0.845	34.20	QP	Hot	48.00	13.80
1.635	31.00	QP	Neutral	48.00	17.00
2.250	30.80	QP	Neutral	48.00	17.20
1.750	30.70	QP	Hot	48.00	17.30
2.210	29.60	QP	Hot	48.00	18.40

Model:T3-ESP-13W

Line Conducted Emissions			FCC Part 18.307		
Frequency (MHz)	Amplitude (dBµV)	Detector (QP/AV)	Conductor (Hot/Neutral)	Limit (dBµV)	Margin (dB)
0.480	36.70	QP	Hot	48.00	11.30
0.580	36.40	QP	Hot	48.00	11.60
0.470	36.20	QP	Neutral	48.00	11.80
0.570	36.10	QP	Neutral	48.00	11.90
0.710	34.80	QP	Hot	48.00	13.20
0.690	34.30	QP	Neutral	48.00	13.70
2.210	33.40	QP	Hot	48.00	14.60
0.895	32.80	QP	Neutral	48.00	15.20
1.885	32.40	QP	Hot	48.00	15.60
1.535	31.80	QP	Neutral	48.00	16.20
2.210	31.60	QP	Neutral	48.00	16.40
1.120	31.60	QP	Hot	48.00	16.40

## Plot(s) of Test Data

Plot(s) of Test Data is presented hereinafter as reference.


Report No.: RSZ07112651 Page 8 of 12 FCC Part 18 Report

10. Dec 07 20:41

EUT: CFL M/N: T3-ESP-9W

Manuf: NVC Op Cond: ON

Operator: Phoenix Liu
Test Spec: AC120V/60Hz Hot
Comment: Temp: 25 Humi 56%

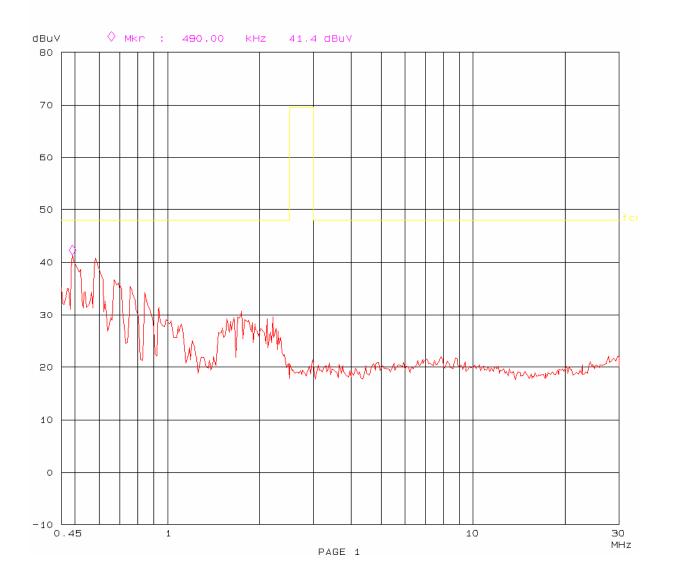


10. Dec 07 20:25

EUT: CFL M/N: T3-ESP-9W Manuf: NVC

Manuf: NVC Op Cond: ON

Op Cona: ON Operator: Phoenix Liu
Test Spec: AC120V/60Hz N
Comment: Temp: 25 Humi 56%

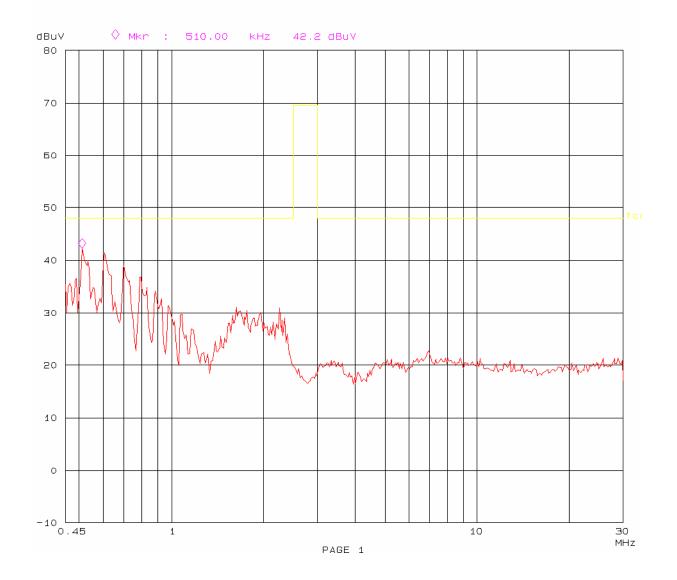


Report No.: RSZ07112651 Page 10 of 12 FCC Part 18 Report

10. Dec 07 20:52

EUT: CFL M/N: T3-ESP-13W Manuf: NVC

Op Cond: ON

Operator: Phoenix Liu
Test Spec: AC120V/60Hz Hot
Comment: Temp: 25 Humi 56%

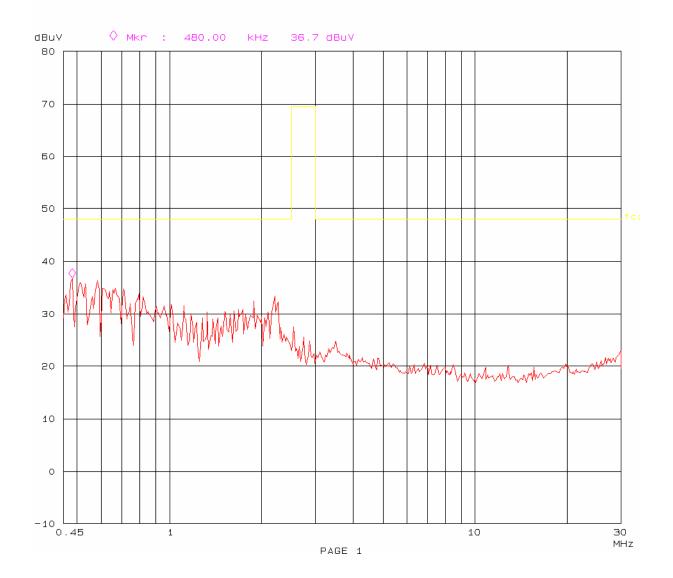


10. Dec 07 21:04

EUT: CFL M/N: T3-ESP-13W Manuf: NVC

Manuf: NVC Op Cond: ON

Operator: Phoenix Liu

Test Spec: AC120V/60Hz Neutral Comment: Temp: 25 Humi 56%

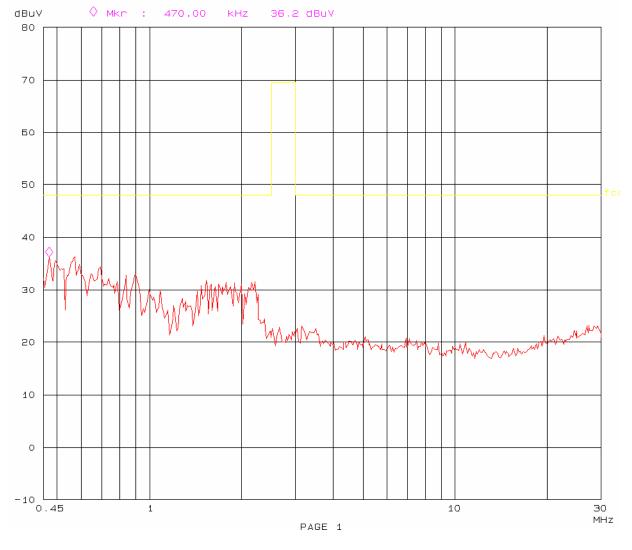

\*\*\*\*\* END OF REPORT \*\*\*\*\*