

FCC Part 15E Measurement and Test Report

For

LM Technologies Ltd.

Unit 19, Spectrum House, 32-34, Gordon House Road, London, NW5 1LP,

United Kingdom

FCC ID: VVXLM842

FCC Rule(s):	<u>FCC Part 15.407</u>
Product Description:	<u>LM842 WiFi and Bluetooth 5.0 Dual Mode Combination USB Adapter</u>
Tested Model:	<u>LM842</u>
Report No.:	<u>WTX19X12087485W-1</u>
Sample Receipt Date:	<u>Dec.17, 2019</u>
Tested Date:	<u>Dec.18, 2019 to Jan.19, 2020</u>
Issued Date:	<u>Jan.19, 2020</u>
Tested By:	<u>Mike Shi / Engineer</u> 
Reviewed By:	<u>Silin Chen / EMC Manager</u> 
Approved & Authorized By:	<u>Jandy So / PSQ Manager</u> 
Prepared By:	

Shenzhen SEM Test Technology Co., Ltd.

1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,
Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM Test Technology Co., Ltd.

TABLE OF CONTENTS

1. GENERAL INFORMATION.....	4
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
1.2 TEST STANDARDS.....	5
1.3 TEST METHODOLOGY.....	5
1.4 TABLE FOR PARAMETERS OF TEST SOFTWARE SETTING	5
1.5 EUT OPERATING DURING TEST	6
1.6 TEST FACILITY	6
1.7 EUT SETUP AND TEST MODE.....	7
1.8 MEASUREMENT UNCERTAINTY	8
1.9 TEST EQUIPMENT LIST AND DETAILS	9
2. SUMMARY OF TEST RESULTS	11
3. RF EXPOSURE	12
3.1 STANDARD APPLICABLE.....	12
3.2 TEST RESULT.....	12
4. ANTENNA REQUIREMENT	13
4.1 STANDARD APPLICABLE.....	13
4.2 EVALUATION INFORMATION	13
5. CONDUCTED EMISSIONS	14
5.1 TEST PROCEDURE.....	14
5.2 BASIC TEST SETUP BLOCK DIAGRAM.....	14
5.3 TEST RECEIVER SETUP	14
5.4 SUMMARY OF TEST RESULTS/PLOTS	14
6. POWER SPECTRAL DENSITY	17
6.1 STANDARD APPLICABLE.....	17
6.2 TEST PROCEDURE.....	17
6.3 SUMMARY OF TEST RESULTS/PLOTS	18
7. EMISSION BANDWIDTH AND OCCUPIED BANDWIDTH.....	36
7.1 STANDARD APPLICABLE.....	36
7.2 TEST PROCEDURE.....	36
7.3 SUMMARY OF TEST RESULTS/PLOTS	38
8. MAXIMUM CONDUCTED OUTPUT POWER.....	56
8.1 STANDARD APPLICABLE.....	56
8.2 TEST PROCEDURE.....	56
8.3 SUMMARY OF TEST RESULTS/PLOTS	57
9. RADIATED SPURIOUS EMISSIONS.....	74
9.1 STANDARD APPLICABLE.....	74
9.2 TEST PROCEDURE.....	74
9.3 TEST RECEIVER SETUP	76
9.4 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	76
9.5 SUMMARY OF TEST RESULTS/PLOTS	76
10. FREQUENCY STABILITY	97
10.1 STANDARD APPLICABLE.....	97
10.2 TEST PROCEDURE.....	97
10.3 SUMMARY OF TEST RESULTS/PLOTS	97

Report version

Version No.	Date of issue	Description
Rev.00	Jan.19, 2020	Original
/	/	/

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: LM Technologies Ltd.
 Address of applicant: Unit 19, Spectrum House, 32-34, Gordon House Road,
 London, NW5 1LP, United Kingdom

Manufacturer: LM Technologies Ltd.
 Address of manufacturer: Unit 19, Spectrum House, 32-34, Gordon House Road,
 London, NW5 1LP, United Kingdom

General Description of EUT	
Product Name:	LM842 WiFi and Bluetooth 5.0 Dual Mode Combination USB Adapter
Brand Name:	LM Technologies
Model No.:	LM842
Adding Model(s):	842-8420, 842-8421, 842-8422, 842-8423, 842-8424
Rated Voltage:	DC 5V
Power Adapter:	/
Software Version:	/
Hardware Version:	/
<i>Note: The test data is gathered from a production sample, provided by the manufacturer. The appearance of others models listed in the report is different from main-test model LM842, but the circuit and the electronic construction do not change, declared by the manufacturer.</i>	

Technical Characteristics of EUT	
Support Standards:	802.11a, 802.11n(HT20) , 802.11n-HT40, 802.11ac-VH80
Frequency Range:	5150-5250MHz, 5725-5850MHz
RF Output Power (Max.):	5150-5250MHz:13.71dBm (Conducted) 5725-5850MHz:13.15dBm (Conducted)
Type of Modulation:	BPSK, QPSK,16QAM,64QAM, 256QAM
Data Rate:	6-54Mbps, up to 200Mbps
Type of Antenna:	Integral Antenna
Antenna Gain:	Antenna A: Band 1:3.77dBi; Band 4: 1.22dBi Antenna B: Band 1:3.3dBi; Band 4: 1.53dBi

1.2 Test Standards

The tests were performed according to following standards:

FCC Rules Part 15.407: General technical requirements.

ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.

KDB789033 D02 v02r01: GUIDELINES FOR COMPLIANCE TESTING OF UNLICENSED NATIONAL INFORMATION INFRASTRUCTURE (U-NII) DEVICES PART 15, SUBPART E

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB789033 D02 v02r01. The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Table for parameters of Test Software setting

Enter “Win7_MP_Kit_RTL11ac_8822CU_USB_v2.00_20190702 for Win7” into the calculator to enter the engineer mode, you can start to test. During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Mode	Ant.	Test Frequency (MHz)												
		NCB: 20MHz												
		5180	5200	5240	5260	5300	5320	5500	5580	5700	5720	5745	5785	5825
802.11a 6Mbps	ANT 1	70	70	70	/	/	/	/	/	/	/	60	60	60
	ANT 2	62	62	62	/	/	/	/	/	/	/	55	55	55
802.11n-HT20 MCS0	ANT 1	70	70	70	/	/	/	/	/	/	/	60	60	60
	ANT 2	62	62	62	/	/	/	/	/	/	/	55	55	55
Mode	Ant.	NCB: 40MHz												
		5190	5230	5270	5310	5510	5550	5670	5710	5755	5795			
802.11n-HT40 MCS0	ANT 1	72	72	/	/	/	/	/	/	/	70	70		
	ANT 2	64	64	/	/	/	/	/	/	/	81	81		
Mode	Ant.	NCB: 80MHz												
		5210	5290	5530	5610	5690	5775							
802.11ac-VH80 MCS0/Nss2	ANT 1	72	/	/	/	/	/	66						
	ANT 2	64	/	/	/	/	/	81						

1.5 EUT Operating during test

EUT was programmed to be in continuously transmitting mode. During the test, EUT operation to normal function and programs under Android were executed.

1.6 Test Facility

FCC – Registration No.: 125990

Shenzhen SEM Test Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Shenzhen SEM Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

1.7 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11a	5180MHz,5200MHz,5240MHz, 5745MHz, 5785MHz,5825MHz
TM2	802.11n-HT20	5180MHz,5200MHz,5240MHz,5745MHz, 5785MHz,5825MHz
TM3	802.11n-HT40	5190MHz,5230MHz, 5755MHz,5795MHz
TM4	802.11ac-VH80	5210MHz ,5775 MHz

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	50~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
USB extension cable	1.2	Shielded	With Ferrite

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Notebook	Lenovo	E445	/

1.8 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-18GHz $\pm 3.92\text{dB}$

1.9 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2019-04-30	2020-04-29
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2019-04-30	2020-04-29
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2019-04-30	2020-04-29
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2019-04-30	2020-04-29
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2019-04-30	2020-04-29
SEMT-1011	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2019-05-05	2021-05-04
SEMT-1042	Horn Antenna	ETS	3117	00086197	2019-05-05	2021-05-04
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2019-05-05	2021-05-04
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2019-05-05	2021-05-04
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2019-04-30	2020-04-29
SEMT-1003	L.I.S.N	Schwarz beck	NSLK8126	8126-224	2019-04-30	2020-04-29
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2019-04-30	2020-04-29
SEMT-1168	Pre-amplifier	Direction Systems Inc.	PAP-0126	14141-12838	2019-04-30	2020-04-29
SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-14153	2019-04-30	2020-04-29
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2019-04-30	2020-04-29
SEMT-1170	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2019-05-05	2021-05-04
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2019-04-30	2020-04-29
SEMT-1048	RF Limiter	ATTEN	AT-BSF-2400~2500	/	2019-04-30	2020-04-29
SEMT-1076	RF Switcher	Top Precision	RCS03-A2	/	2019-04-30	2020-04-29
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	2019-03-18	2020-03-17
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	2019-03-18	2020-03-17
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	2019-03-18	2020-03-17
SEMT-C004	Cable	Zheng DI	2M0RFC	/	2019-03-18	2020-03-17
SEMT-C005	Cable	Zheng DI	1M0RFC	/	2019-03-18	2020-03-17
SEMT-C006	Cable	Zheng DI	1M0RFC	/	2019-03-18	2020-03-17

Software List			
Description	Manufacturer	Model	Version
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

*Remark: indicates software version used in the compliance certification testing

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§15.203; §15.405	Antenna Requirement	Compliant
§15.207; §15.407(b)(6)	Conducted Emission	Compliant
§15.407(a)(1),(2)	Power Spectral Density	Compliant
§15.407(e)	Emission Bandwidth and Occupied Bandwidth	Compliant
§15.407(a)(1),(2)	Maximum Conducted Output Power	Compliant
§15.407(b)(1),(2),(3),(4)	Undesirable emission	Compliant
§15.205; §15.407(b)(1),(2),(3)	Radiated Emission	Compliant
§15.407(g)	Frequency Stability	Compliant
§15.407(h)	Dynamic Frequency Selection (DFS)	Compliant

N/A: not applicable

3. RF Exposure

3.1 Standard Applicable

According to §1.1307 and §2.1093, the portable transmitter must comply the RF exposure requirements.

3.2 Test Result

This product complied with the requirement of the RF exposure, please see the MPE Report.

4. Antenna Requirement

4.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

4.2 Evaluation Information

This product has two integral antennas, fulfill the requirement of this section.

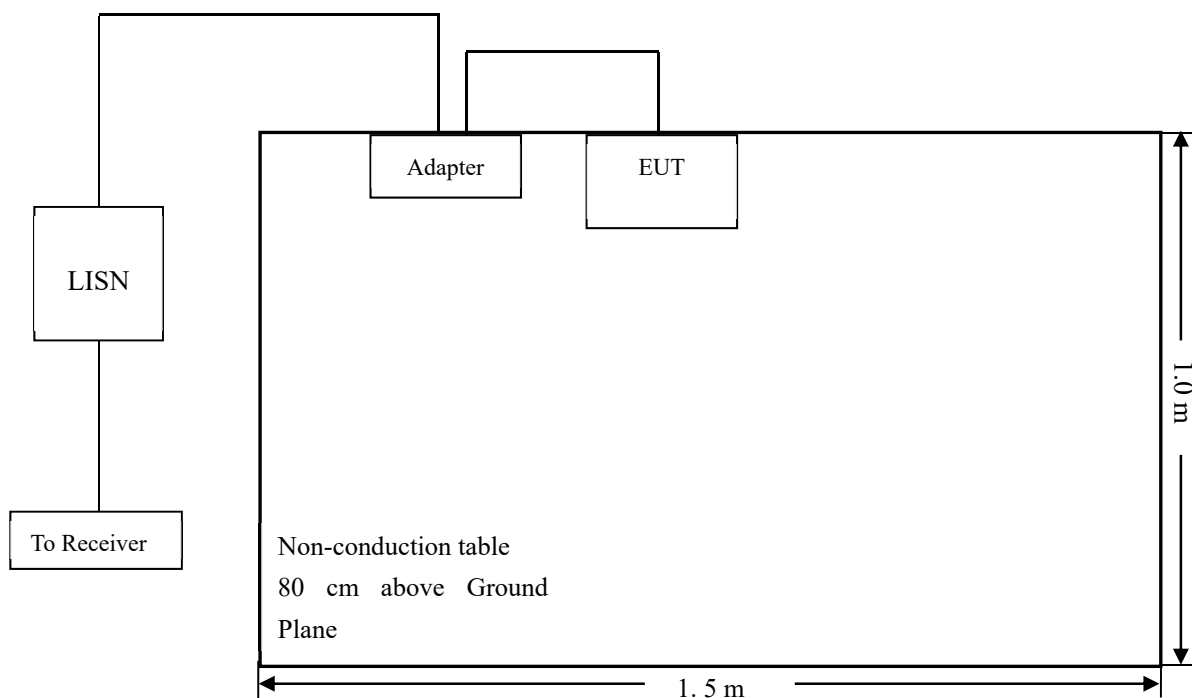
5. Conducted Emissions

5.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

5.2 Basic Test Setup Block Diagram



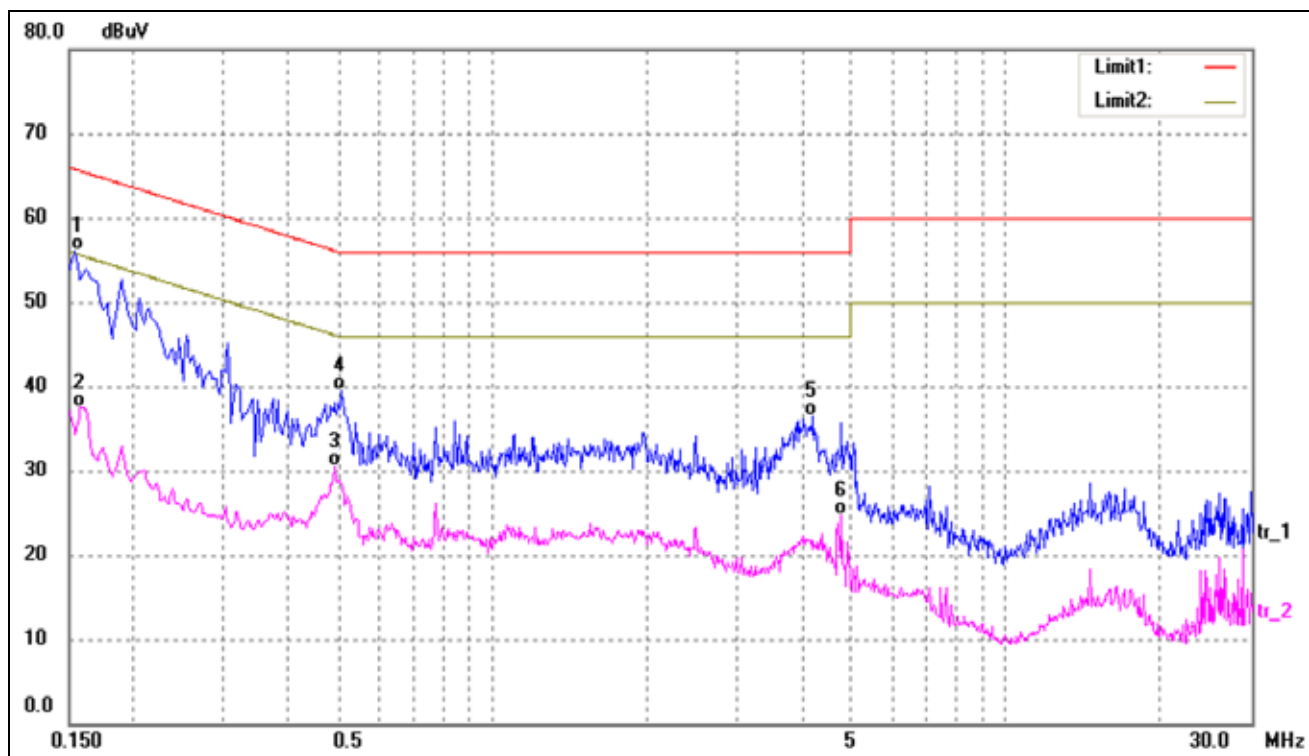
5.3 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency	150 kHz
Stop Frequency	30 MHz
Sweep Speed	Auto
IF Bandwidth.....	10 kHz
Quasi-Peak Adapter Bandwidth	9 kHz
Quasi-Peak Adapter Mode	Normal

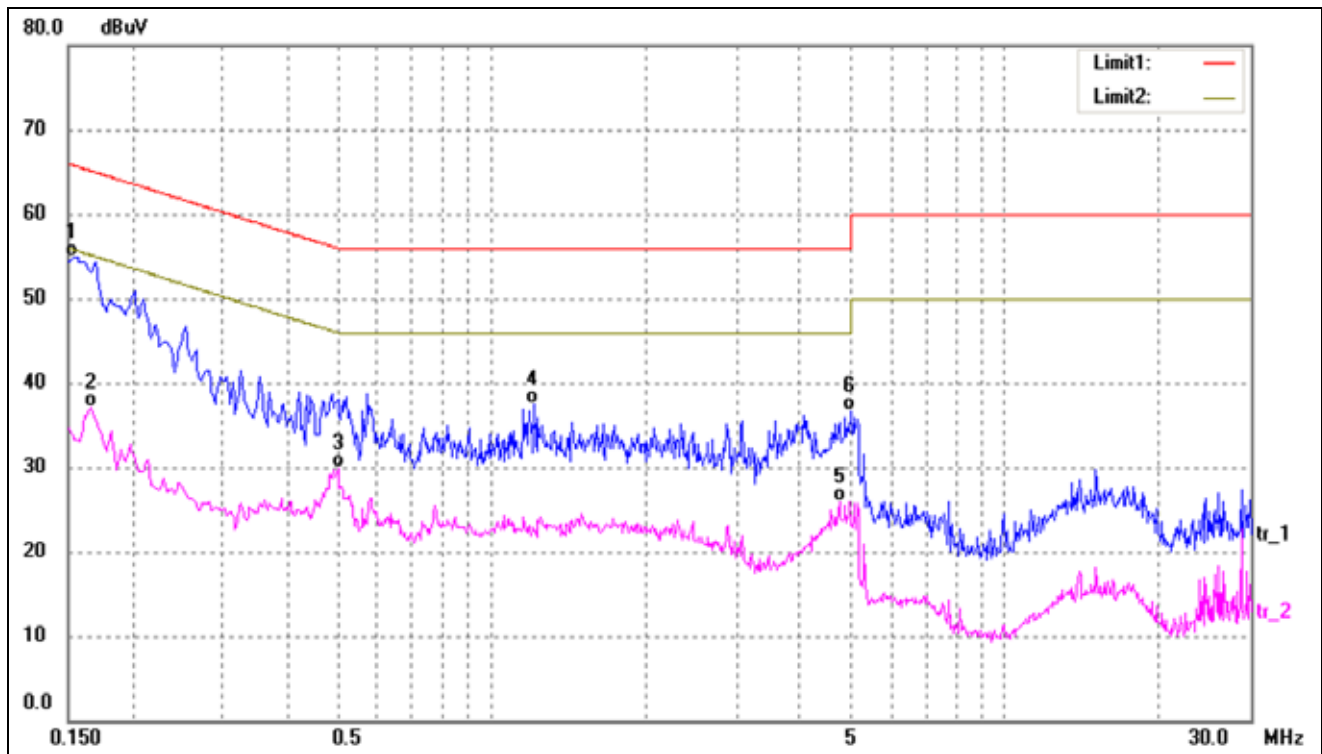
5.4 Summary of Test Results/Plots

Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------



No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.1540	46.13	9.95	56.08	65.78	-9.70	QP
2	0.1580	27.55	9.95	37.50	55.57	-18.07	AVG
3	0.4940	20.53	10.02	30.55	46.10	-15.55	AVG
4	0.5100	29.39	10.02	39.41	56.00	-16.59	QP
5	4.2020	26.17	10.31	36.48	56.00	-19.52	QP
6	4.7900	14.31	10.37	24.68	46.00	-21.32	AVG

Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------



No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.1540	45.01	9.95	54.96	65.78	-10.82	QP
2	0.1660	27.13	9.95	37.08	55.16	-18.08	AVG
3	0.5020	19.81	10.02	29.83	46.00	-16.17	AVG
4	1.2140	27.18	10.38	37.56	56.00	-18.44	QP
5	4.7500	15.59	10.36	25.95	46.00	-20.05	AVG
6	5.0260	26.39	10.38	36.77	60.00	-23.23	QP

6. Power Spectral Density

6.1 Standard Applicable

Section 15.407(a) Power limits:

(1) For the band 5.15-5.25 GHz.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

6.2 Test Procedure

According to 789033 D02 v02r01 General UNII Test Procedures New Rules v02, the following is the measurement procedure.

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “ provided that the measured power is integrated over the full reference bandwidth ” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth ($< 1 \text{ MHz}$, or $< 500 \text{ kHz}$) and integrated over 1 MHz, or 500kHz bandwidth, the following adjustments to the procedures apply:

- a) Set $RBW \geq 1/T$, where T is defined in section II.B.1.a).
- b) Set $VBW \geq 3 RBW$.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/RBW)$ to the measured result, whereas $RBW (< 500 \text{ kHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10\log(1\text{MHz}/RBW)$ to the measured result, whereas $RBW (< 1 \text{ MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 kHz for the sections 5.c) and 5.d) above, since $RBW=100 \text{ kHz}$ is available on nearly all spectrum analyzers.

6.3 Summary of Test Results/Plots

U-NII-1:5150-5250MHz (Antenna A)			
Operating mode	Test Channel	Power Spectral Density dBm/MHz	Limit (dBm/MHz)
802.11a	5180	5.36	11
	5200	5.32	11
	5240	5.38	11

U-NII-1:5150-5250MHz (Antenna B)			
Operating mode	Test Channel	Power Spectral Density dBm/MHz	Limit (dBm/MHz)
802.11a	5180	5.67	11
	5200	6.23	11
	5240	5.77	11

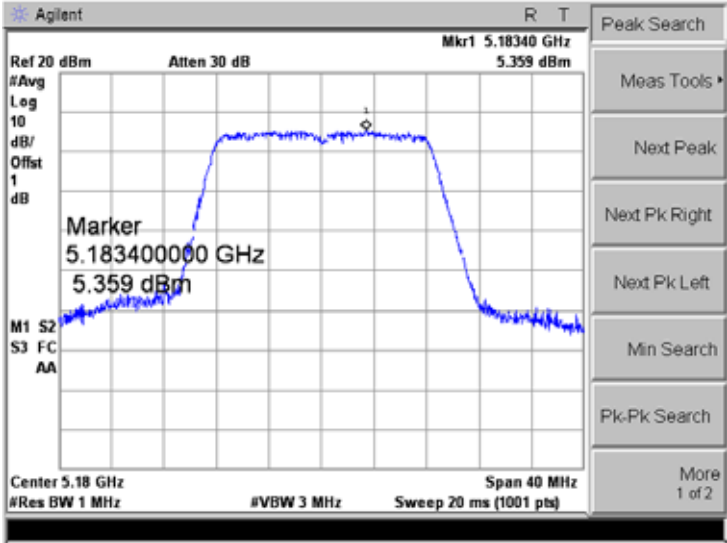
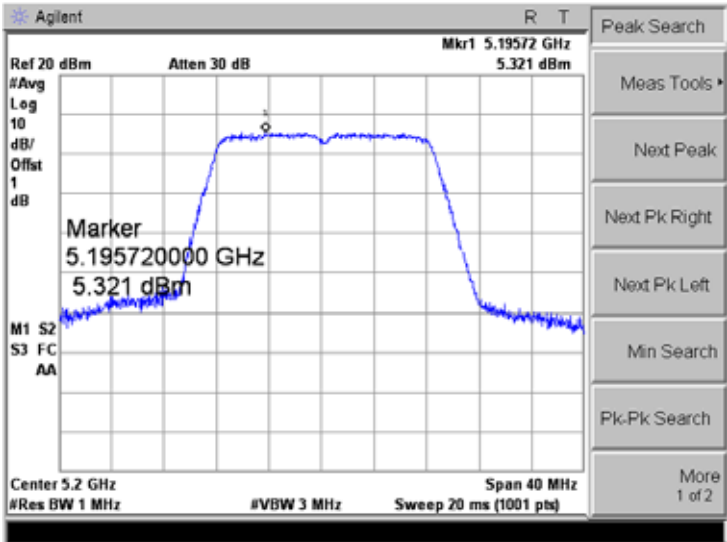
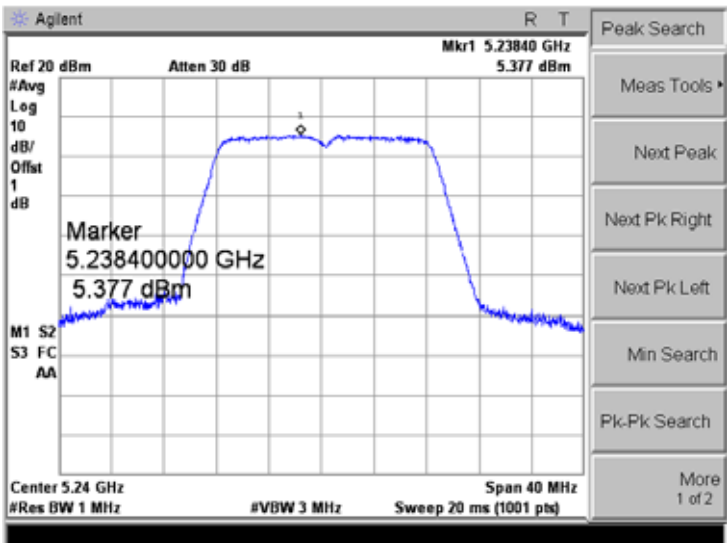
U-NII-1:5150-5250MHz (Antenna A+ Antenna B)					
Operating mode	Test Channel	ANT A Power Spectral Density dBm/MHz	ANT B Power Spectral Density dBm/MHz	ANT A+B Power Spectral Density dBm/MHz	Limit (dBm/MHz)
802.11n-HT20	5180	5.28	6.03	8.68	11
	5200	5.45	6.08	8.79	11
	5240	5.70	5.93	8.83	11
802.11n-HT40	5190	1.63	2.84	5.29	11
	5230	1.59	3.42	5.61	11
802.11ac-HT80	5210	-0.88	0.37	2.80	11

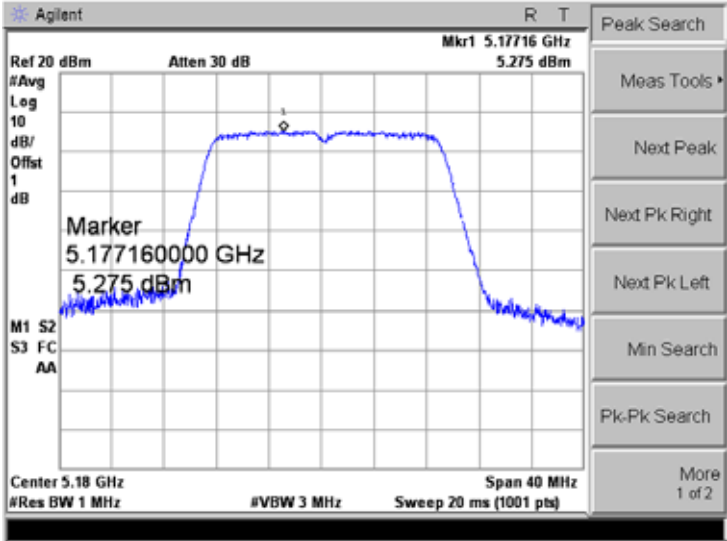
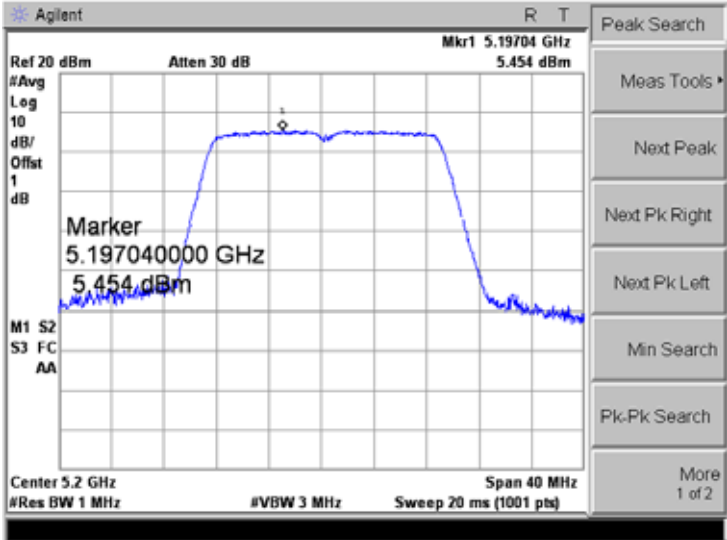
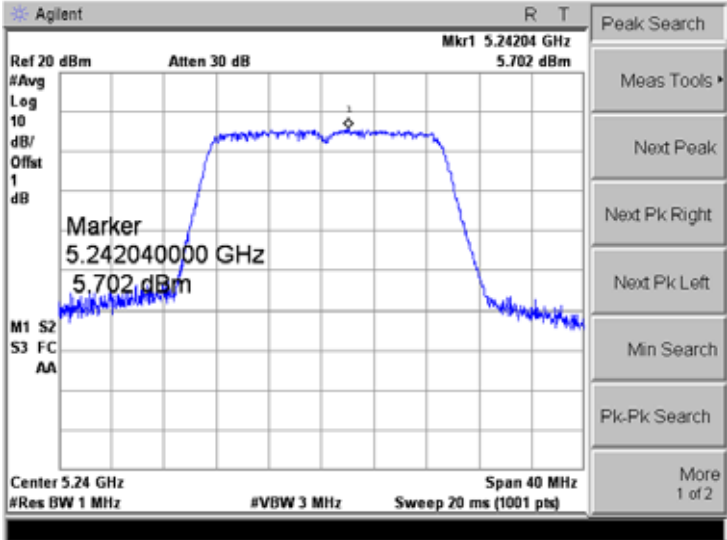
U-NII-3: 5725-5850MHz(Antenna A)					
Operating mode	Test Channel	Power Spectral Density dBm/300kHz	Factor	Power Spectral Density* dBm/500kHz	Limit dBm/500kHz
802.11a	5745	1.36	2.22	3.58	30
	5785	1.46	2.22	3.68	30
	5825	1.54	2.22	3.76	30
*Note: Maximum PSD=PSD(dBm/300kHz)+10log(500kHz/300kHz)=2.22					

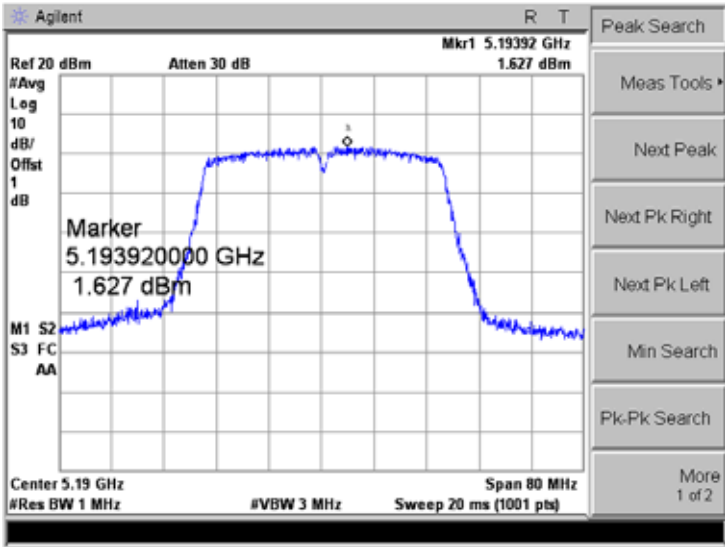
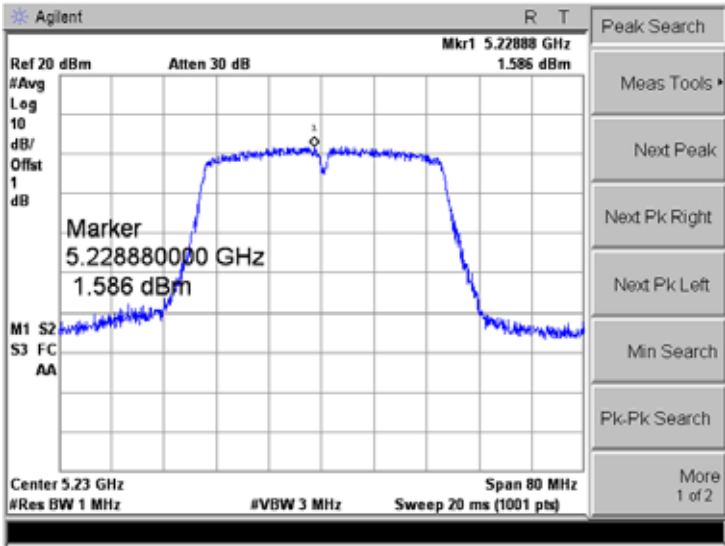
U-NII-3: 5725-5850MHz (Antenna B)					
Operating mode	Test Channel	Power Spectral Density dBm/300kHz	Factor	Power Spectral Density* dBm/500kHz	Limit dBm/500kHz
802.11a	5745	2.31	2.22	4.53	30
	5785	1.55	2.22	3.77	30
	5825	2.55	2.22	4.77	30
*Note: Maximum PSD=PSD(dBm/300kHz)+10log(500kHz/300kHz)=2.22					

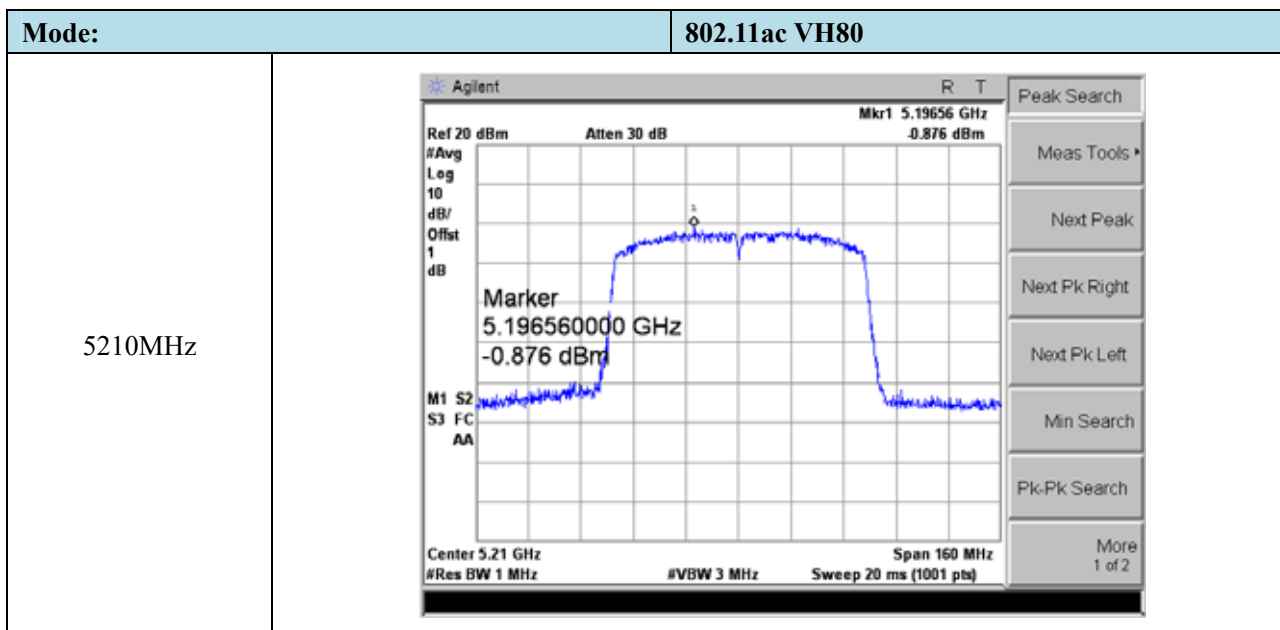
U-NII-3: 5725-5850MHz (Antenna A+ Antenna B)						
Operating mode	Test Channel	ANT A Power Spectral Density dBm/300kHz	ANT B Power Spectral Density dBm/300kHz	Factor	ANT A+B Power Spectral Density* dBm/500kHz	Limit dBm/500kHz
802.11n-HT20	5745	1.58	0.93	2.22	3.80	30
	5785	0.29	1.21	2.22	2.51	30
	5825	0.76	1.20	2.22	2.98	30
802.11n HT40	5755	-1.52	-1.87	2.22	0.70	30
	5795	-1.86	-2.47	2.22	0.36	30
802.11ac VH80	5775	-5.19	-4.94	2.22	-2.97	30
*Note: Maximum PSD=PSD(dBm/300kHz)+10log(500kHz/300kHz)=2.22						

➤ Antenna A: 5150-5250MHz

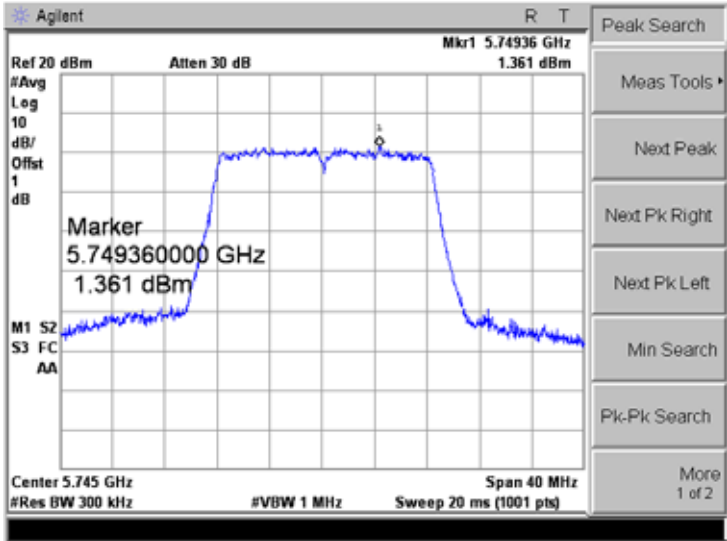
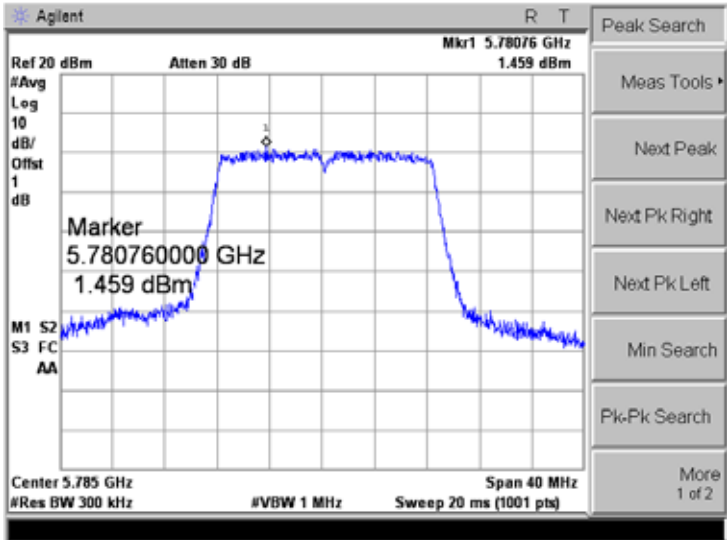
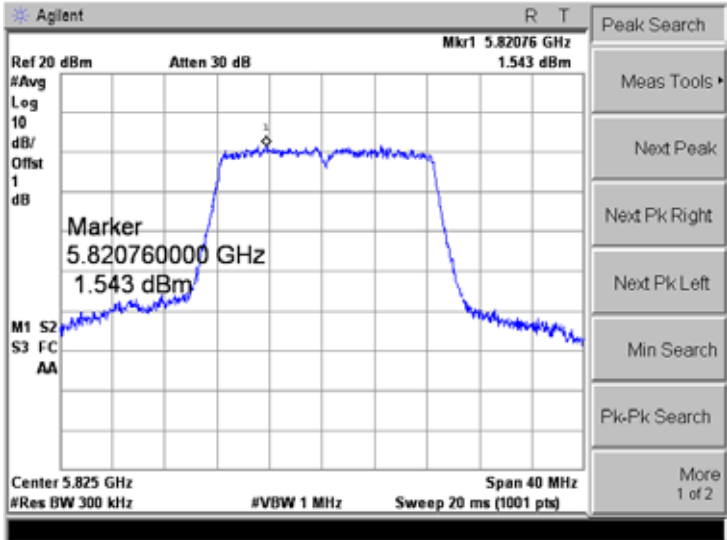
Mode:	802.11a
5180MHz	
5200MHz	
5240MHz	

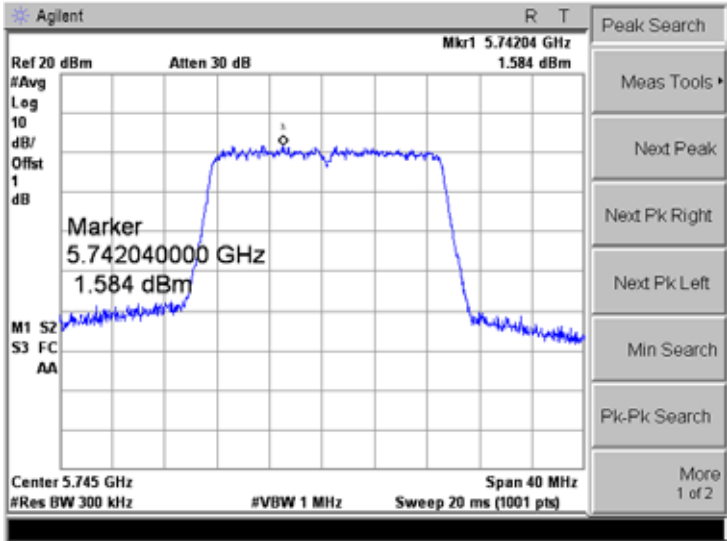
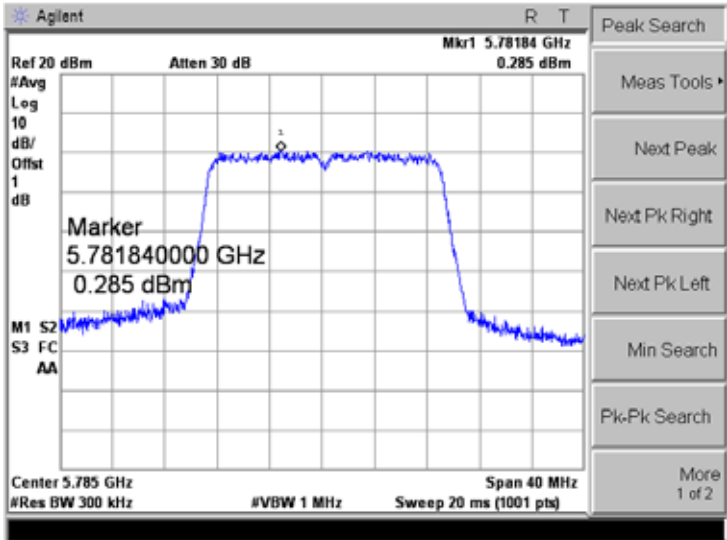
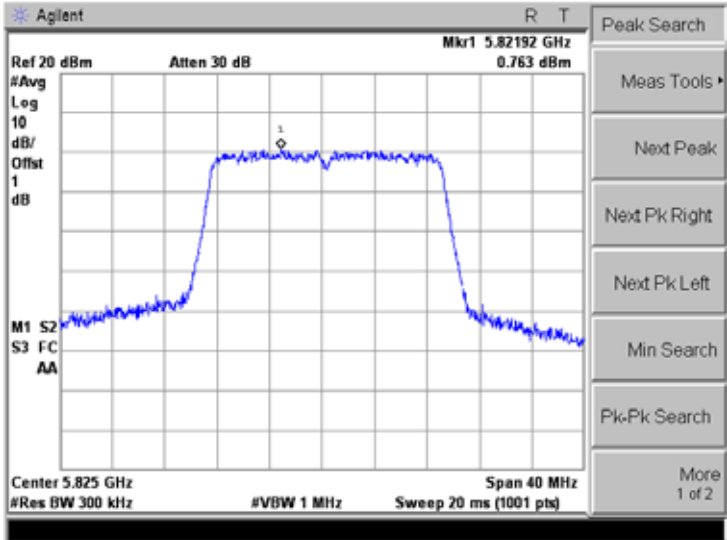
Mode:	802.11n-HT20
5180MHz	
5200MHz	
5240MHz	

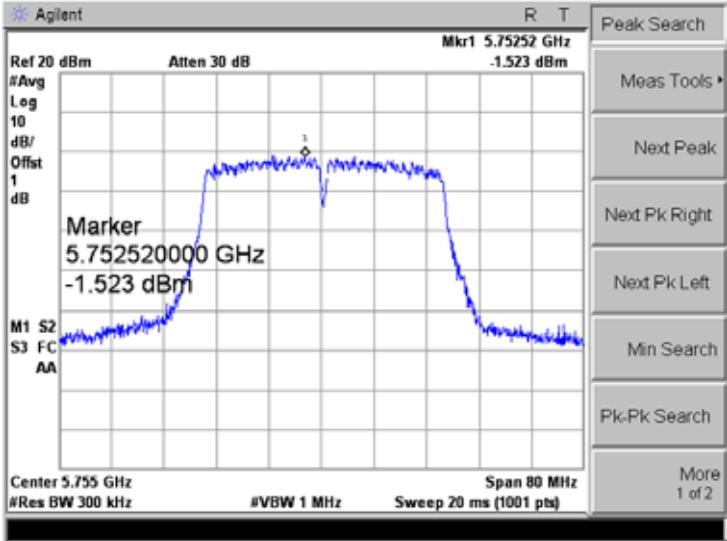
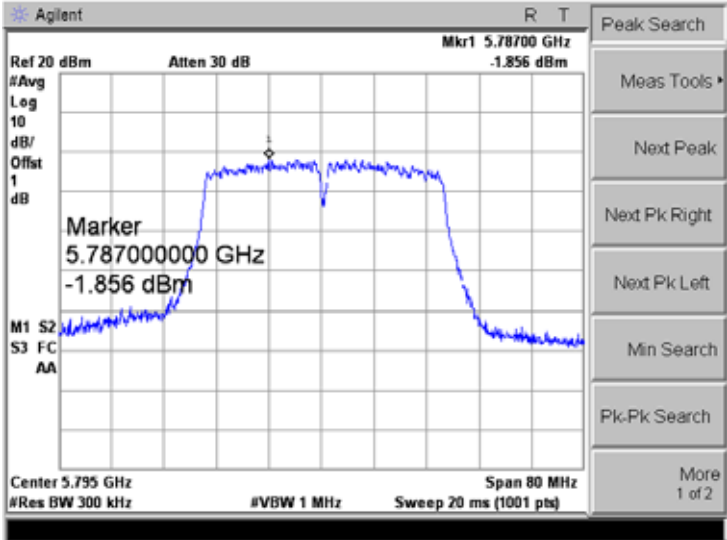
Mode:	802.11n-HT40
5190 MHz	 Agilent Spectrum Analyzer screenshot for 5190 MHz. The display shows a signal with a peak at 5.193920000 GHz and 1.627 dBm. The center frequency is 5.19 GHz, span is 80 MHz, and resolution bandwidth is 1 MHz. The interface includes a Peak Search menu with options like Meas Tools, Next Peak, Next Pk Right, Next Pk Left, Min Search, Pk-Pk Search, and More 1 of 2.
5230 MHz	 Agilent Spectrum Analyzer screenshot for 5230 MHz. The display shows a signal with a peak at 5.228880000 GHz and 1.586 dBm. The center frequency is 5.23 GHz, span is 80 MHz, and resolution bandwidth is 1 MHz. The interface includes a Peak Search menu with options like Meas Tools, Next Peak, Next Pk Right, Next Pk Left, Min Search, Pk-Pk Search, and More 1 of 2.

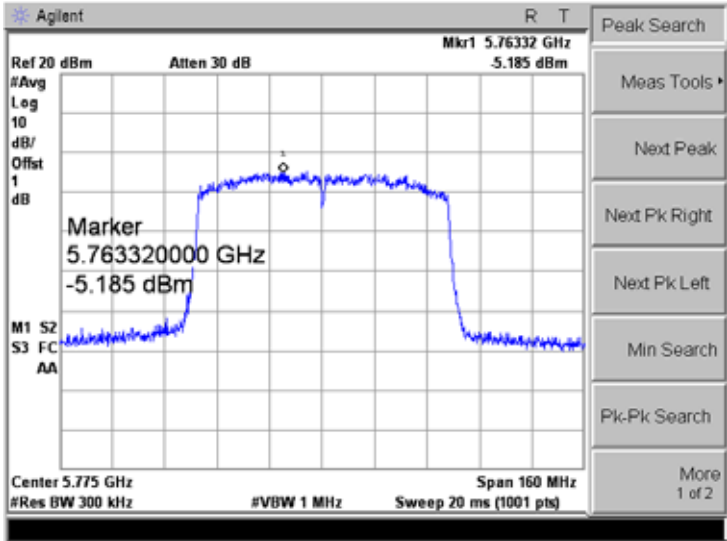


➤ Antenna A: 5725-5850MHz

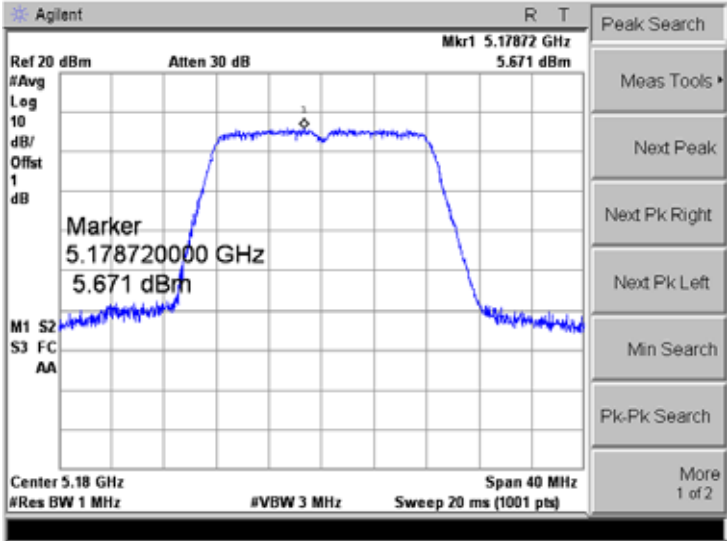
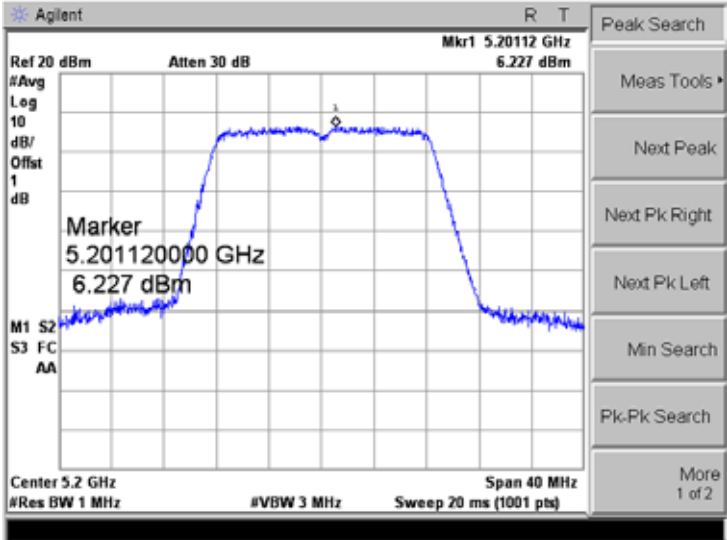
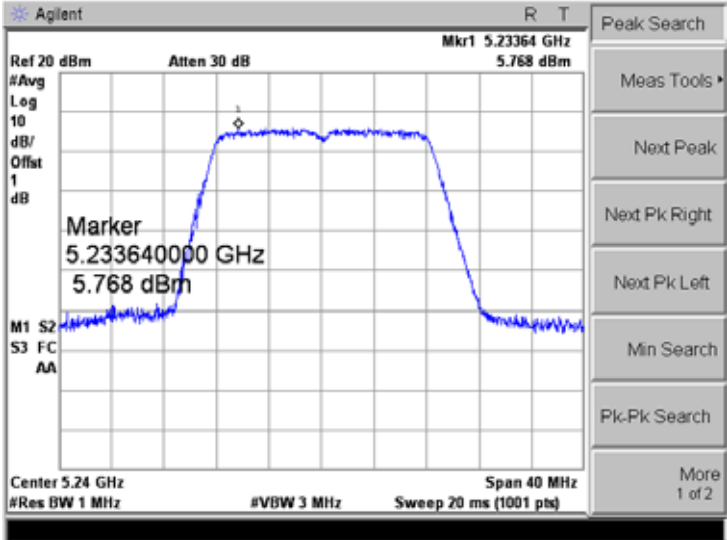
Mode:	802.11a
5745MHz	
5785MHz	
5825MHz	

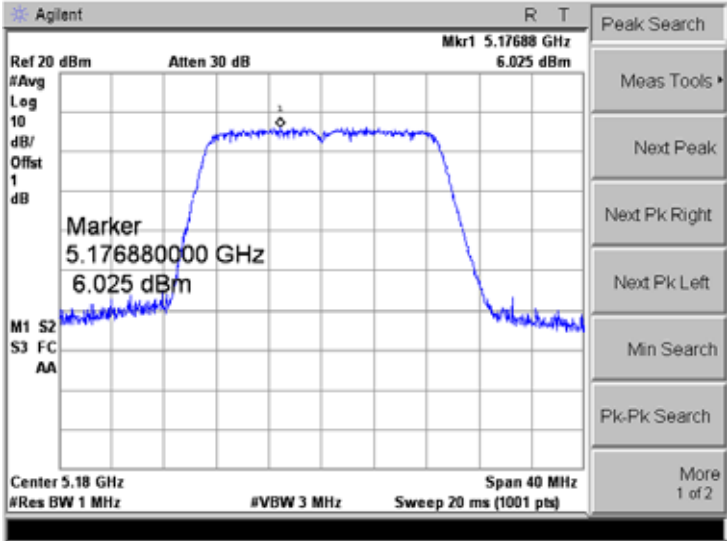
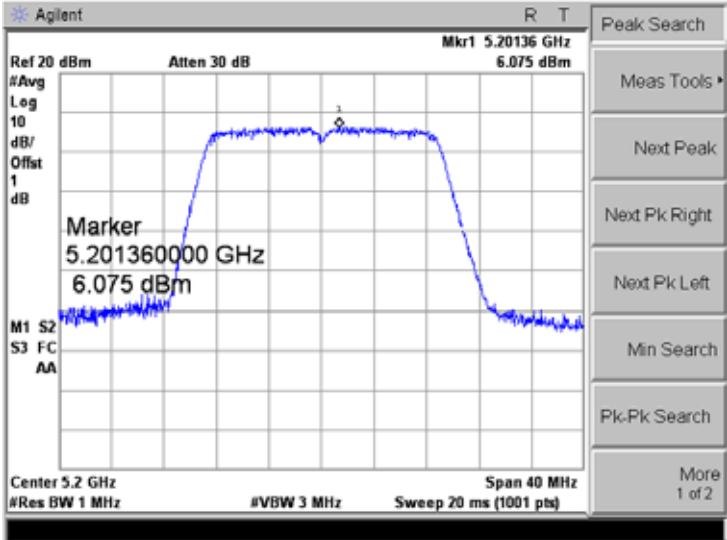
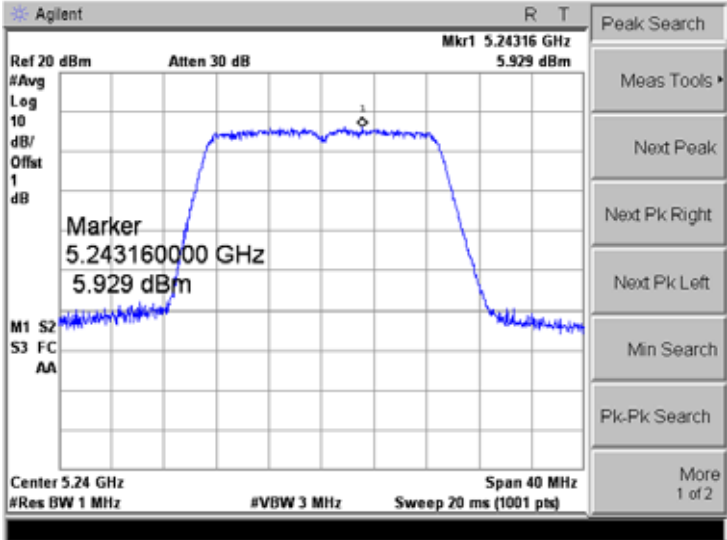
Mode:	802.11n-HT20
5745MHz	
5785MHz	
5825MHz	

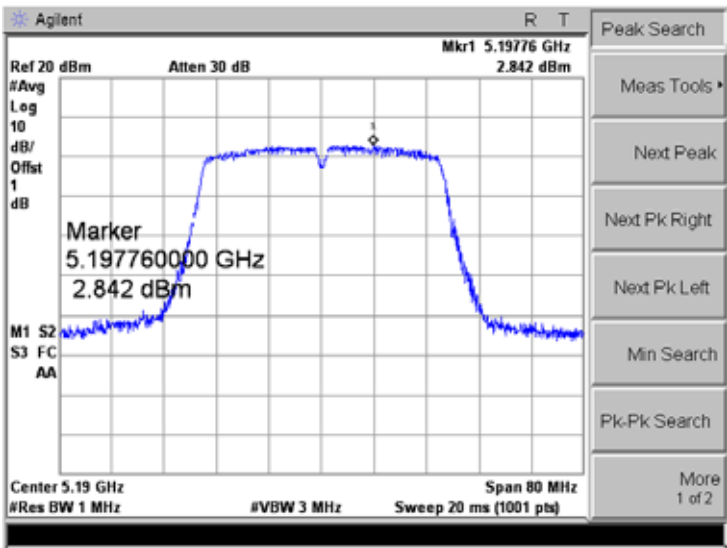
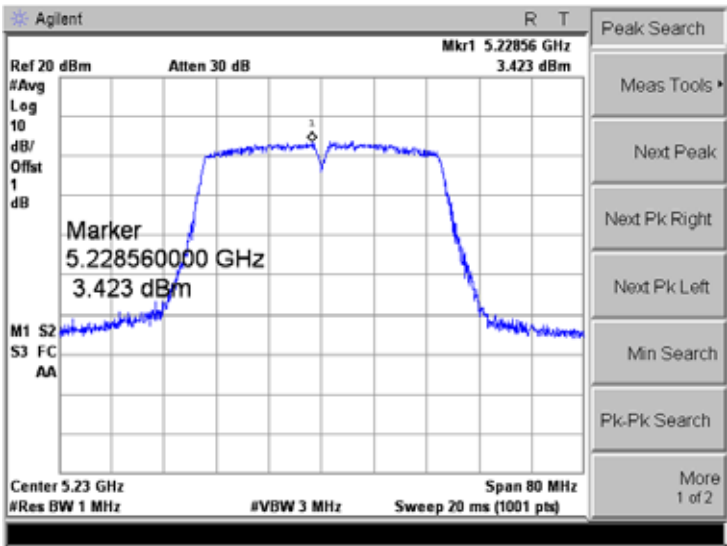
Mode:	802.11n-HT40
5755 MHz	 Agilent R T Ref 20 dBm Atten 30 dB Mkr1 5.75252 GHz -1.523 dBm #Avg Log 10 dB/ Offst 1 dB Marker 5.752520000 GHz -1.523 dBm M1 S2 S3 FC AA Center 5.755 GHz Span 80 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 20 ms (1001 pts)
5795 MHz	 Agilent R T Ref 20 dBm Atten 30 dB Mkr1 5.78700 GHz -1.856 dBm #Avg Log 10 dB/ Offst 1 dB Marker 5.787000000 GHz -1.856 dBm M1 S2 S3 FC AA Center 5.795 GHz Span 80 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 20 ms (1001 pts)

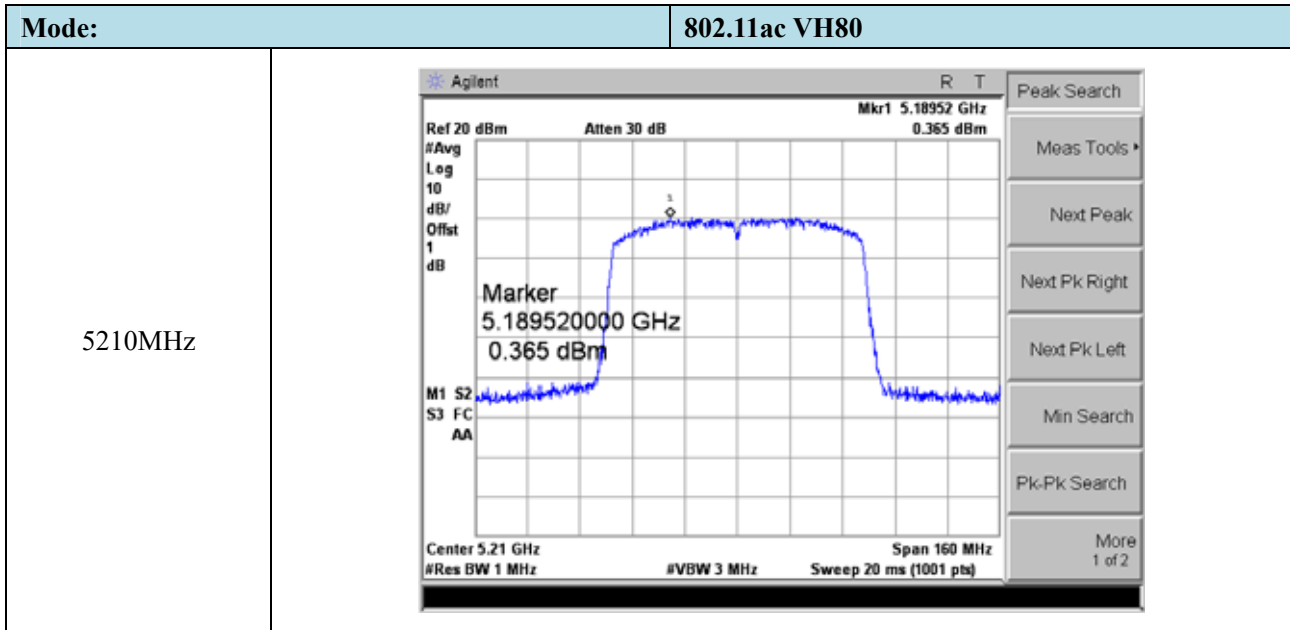
Mode:	802.11ac VH80
5775 MHz	 The screenshot displays an Agilent Spectrum Analyzer interface. The main display shows a signal spectrum with a prominent peak. A marker is placed on the peak, indicating a frequency of 5.763320000 GHz and a power level of -5.185 dBm. The center frequency is set to 5.775 GHz, and the span is 160 MHz. The resolution bandwidth (RBW) is 300 kHz, and the video bandwidth (VBW) is 1 MHz. The sweep time is 20 ms. The interface includes various measurement and search tools on the right side, such as Peak Search, Meas Tools, Next Peak, Next Pk Right, Next Pk Left, Min Search, Pk-Pk Search, and More.

➤ Antenna B: 5150-5250MHz

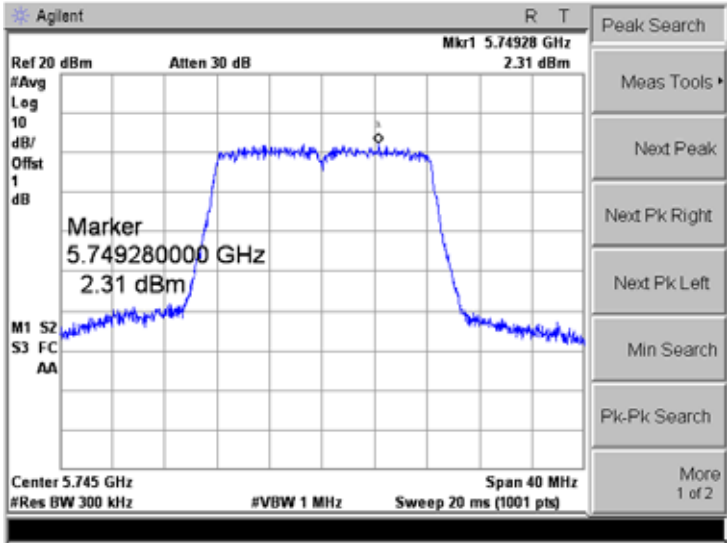
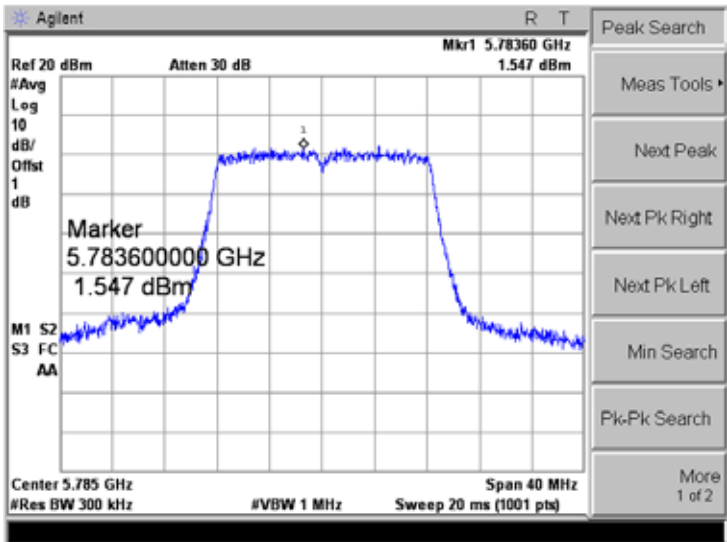
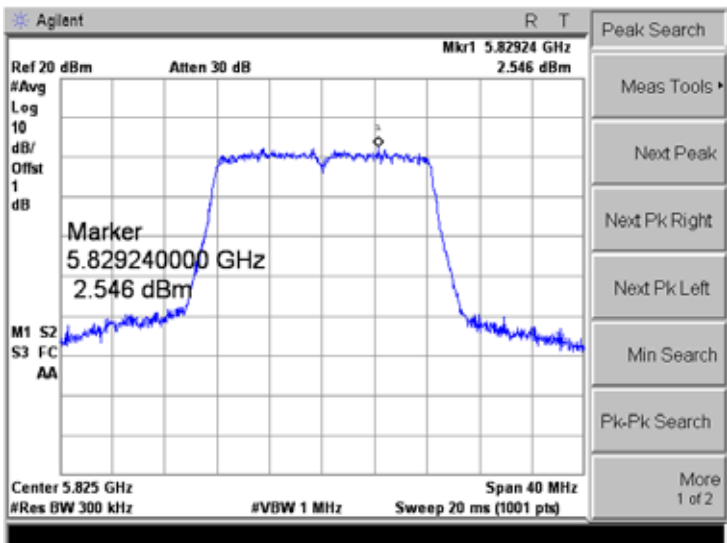
Mode:	802.11a
5180MHz	 Agilent Spectrum Analyzer screenshot for 5180MHz. The plot shows a signal between 5150 and 5250 MHz. A marker is placed at 5.178720000 GHz with a power level of 5.671 dBm. The center frequency is 5.18 GHz, resolution bandwidth is 1 MHz, and span is 40 MHz.
5200MHz	 Agilent Spectrum Analyzer screenshot for 5200MHz. The plot shows a signal between 5150 and 5250 MHz. A marker is placed at 5.201120000 GHz with a power level of 6.227 dBm. The center frequency is 5.2 GHz, resolution bandwidth is 1 MHz, and span is 40 MHz.
5240MHz	 Agilent Spectrum Analyzer screenshot for 5240MHz. The plot shows a signal between 5150 and 5250 MHz. A marker is placed at 5.233640000 GHz with a power level of 5.768 dBm. The center frequency is 5.24 GHz, resolution bandwidth is 1 MHz, and span is 40 MHz.

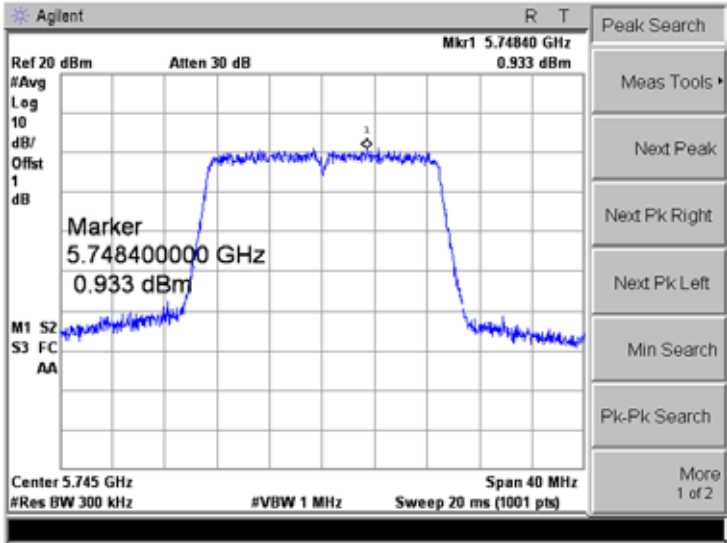
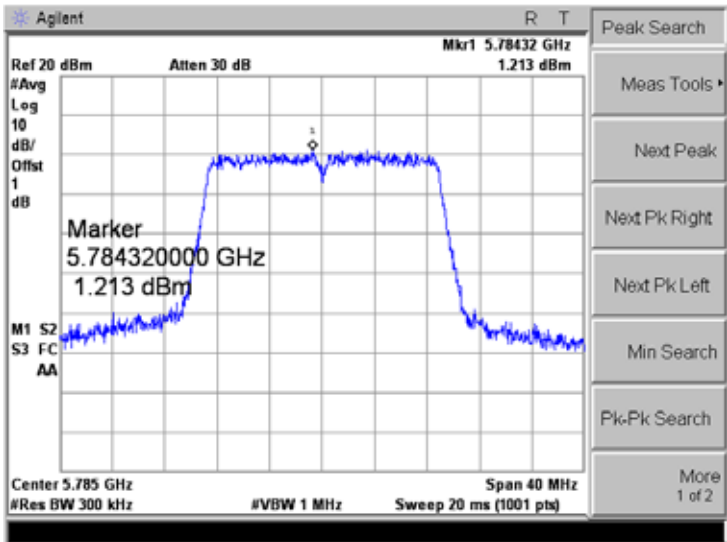
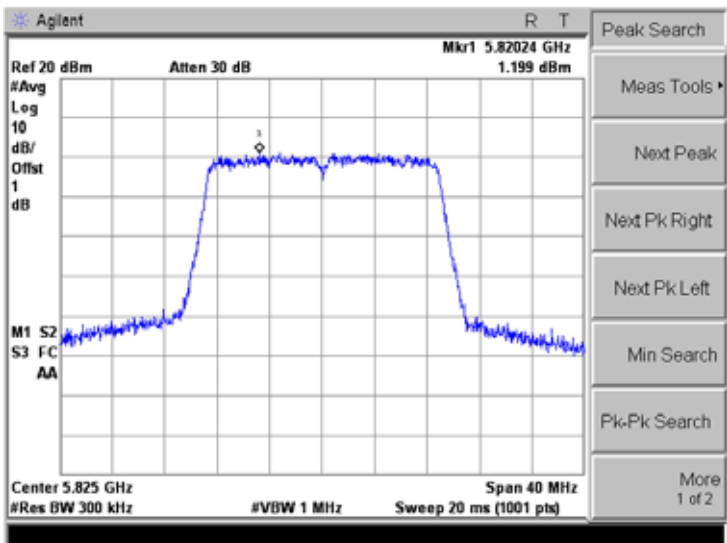
Mode:	802.11n-HT20
5180MHz	
5200MHz	
5240MHz	

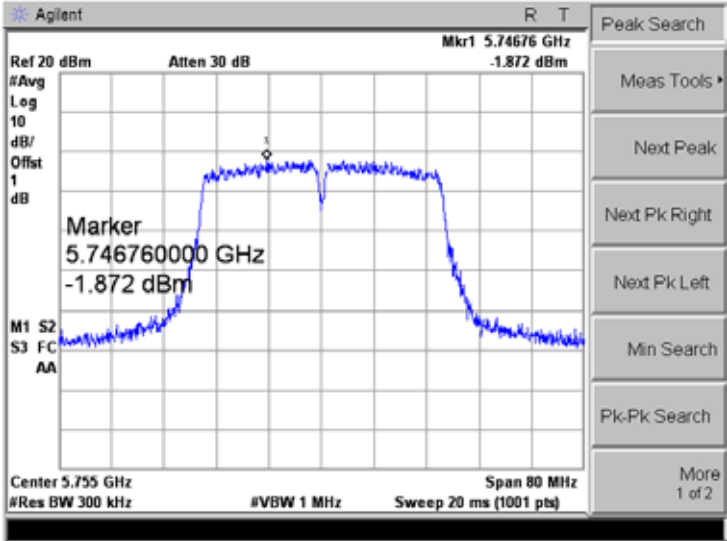
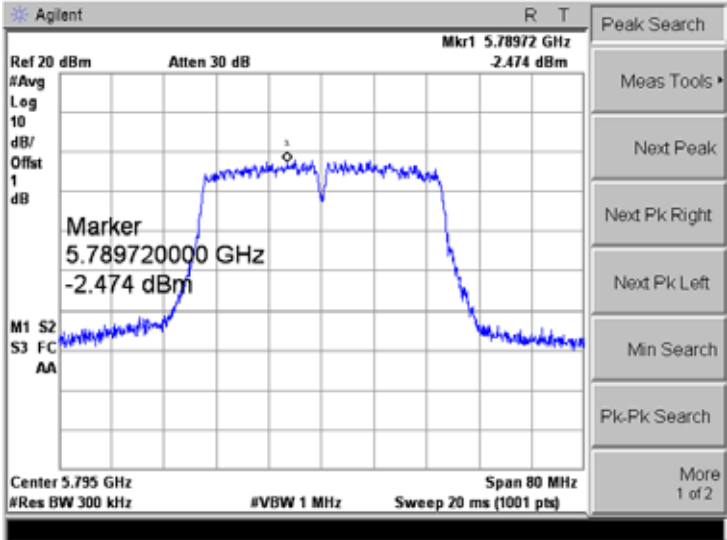
Mode:	802.11n-HT40
5190 MHz	
5230 MHz	

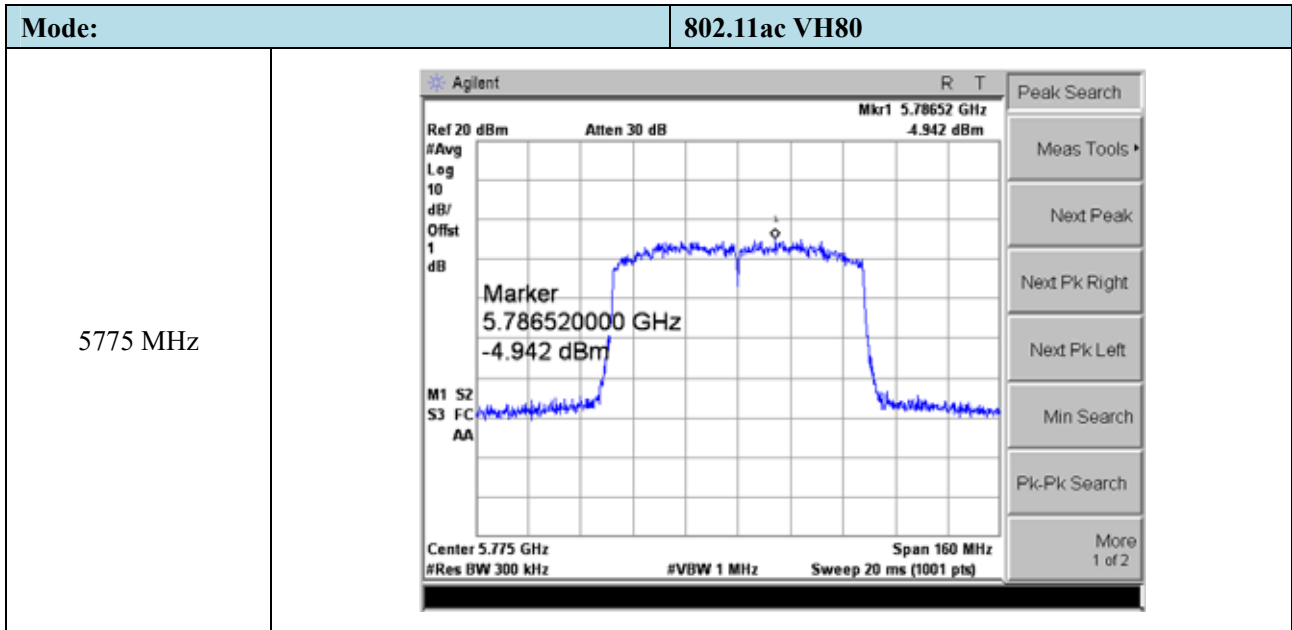


➤ Antenna 1: 5725-5850MHz

Mode:	802.11a
5745MHz	
5785MHz	
5825MHz	

Mode:	802.11n-HT20
5745MHz	
5785MHz	
5825MHz	

Mode:	802.11n-HT40
5755 MHz	 Agilent R T Ref 20 dBm Atten 30 dB Mkr1 5.74676 GHz -1.872 dBm #Avg Log 10 dB/Offset 1 dB Marker 5.746760000 GHz -1.872 dBm M1 S2 S3 FC AA Center 5.755 GHz Span 80 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 20 ms (1001 pts)
5795 MHz	 Agilent R T Ref 20 dBm Atten 30 dB Mkr1 5.78972 GHz -2.474 dBm #Avg Log 10 dB/Offset 1 dB Marker 5.789720000 GHz -2.474 dBm M1 S2 S3 FC AA Center 5.795 GHz Span 80 MHz #Res BW 300 kHz #VBW 1 MHz Sweep 20 ms (1001 pts)



7. Emission Bandwidth and Occupied Bandwidth

7.1 Standard Applicable

According to 15.407(a) and (e):

(1) For the band 5.15-5.25 GHz.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(e) Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

7.2 Test Procedure

According to 789033 D02 v02r0r section C&D, the following is the measurement procedure.

1. Emission Bandwidth (EBW)

a) Set RBW = approximately 1% of the emission bandwidth.

b) Set the VBW > RBW.

c) Detector = Peak.

d) Trace mode = max hold.

e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare

this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

2. Minimum Emission Bandwidth for the band 5.725-5.85 GHz

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.715-5.85 GHz. The following procedure shall be used for measuring this bandwidth:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described above.

D. 99 Percent Occupied Bandwidth

The 99-percent occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5 % of the total mean power of the given emission. Measurement of the 99-percent occupied bandwidth is required only as a condition for using the optional band-edge measurement techniques described in section II.G.3.d). Measurements of 99-percent occupied bandwidth may also optionally be used in lieu of the EBW to 789033 D02 v02r01 General UNII Test Procedures New Rules v01 define the minimum frequency range over which the spectrum is integrated when measuring maximum conducted output power as described in section II.E. However, the EBW must be measured to determine bandwidth dependent limits on maximum conducted output power in accordance with 15.407(a).

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW $\geq 3 * RBW$
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

7.3 Summary of Test Results/Plots

U-NII-1:5150-5250MHz(Antenna A)				
Test Mode	Test Channel MHz	26 dB Bandwidth MHz	99% Bandwidth MHz	verdict
802.11a	5180	18.215	16.3202	Pass
	5200	18.174	16.3583	Pass
	5240	18.235	16.3211	Pass
802.11n-HT20	5180	19.269	17.5475	Pass
	5200	19.323	17.5802	Pass
	5240	19.280	17.5483	Pass
802.11n-HT40	5190	39.600	35.9410	Pass
	5230	39.323	35.9544	Pass
802.11ac-HT80	5210	78.741	74.6519	Pass

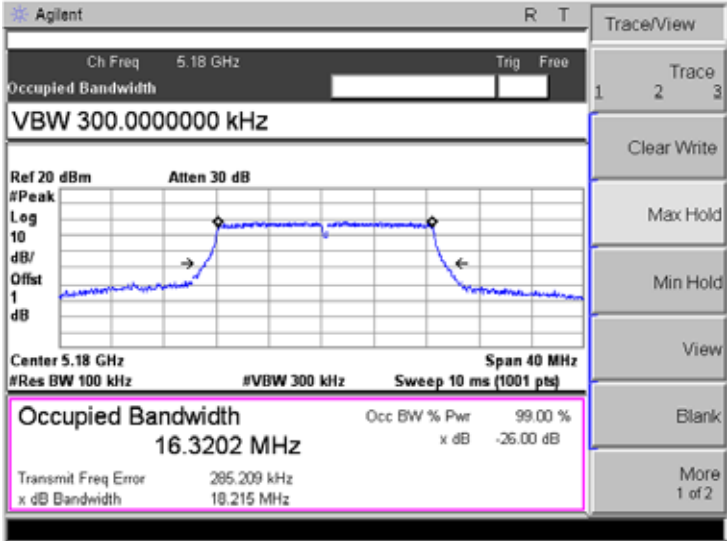
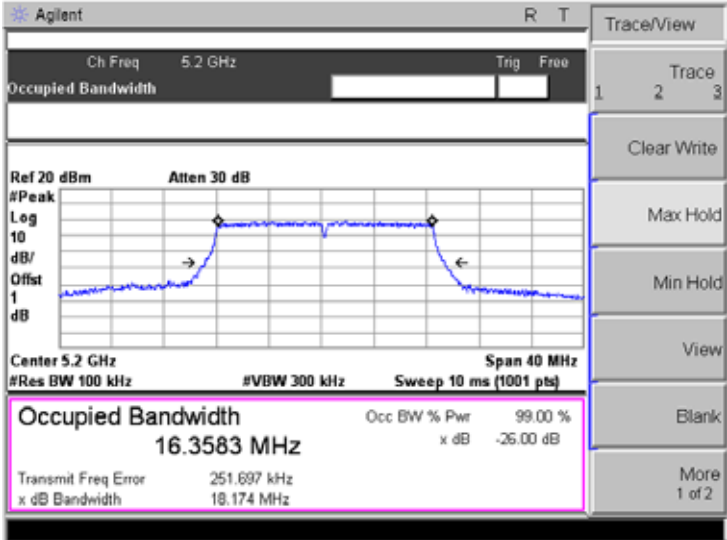
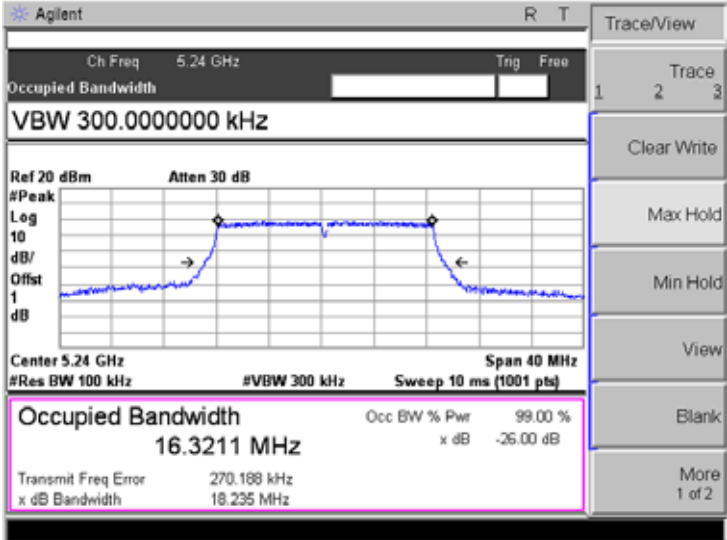
U-NII-3: 5725-5850MHz(Antenna A)				
Test Mode	Test Channel MHz	6 dB Bandwidth MHz	99% Bandwidth MHz	Limit kHz
802.11a	5745	16.452	16.3265	≥500
	5785	16.429	16.3140	≥500
	5825	16.424	16.3251	≥500
802.11n-HT20	5745	17.668	17.5282	≥500
	5785	17.653	17.5362	≥500
	5825	17.656	17.5403	≥500
802.11n-HT40	5755	36.403	35.9303	≥500
	5795	36.411	35.9483	≥500
802.11ac VH80	5775	74.697	74.6269	≥500

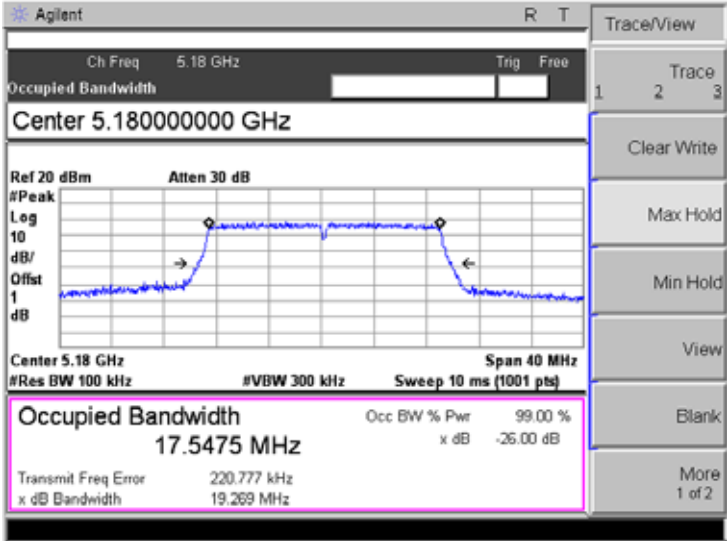
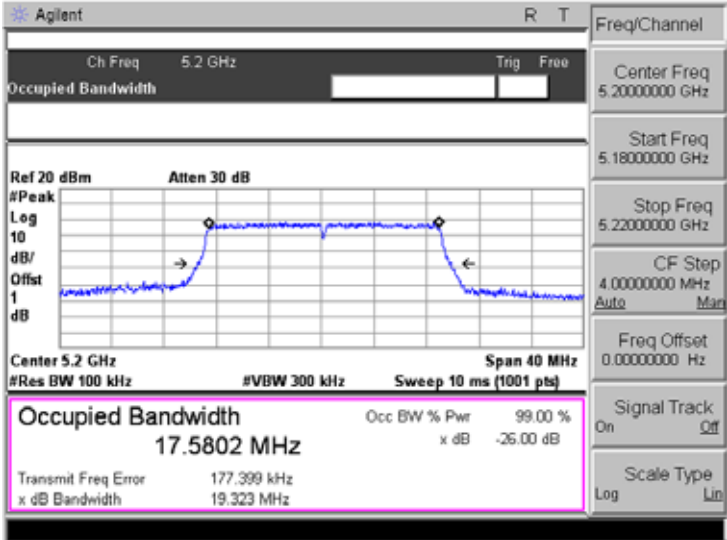
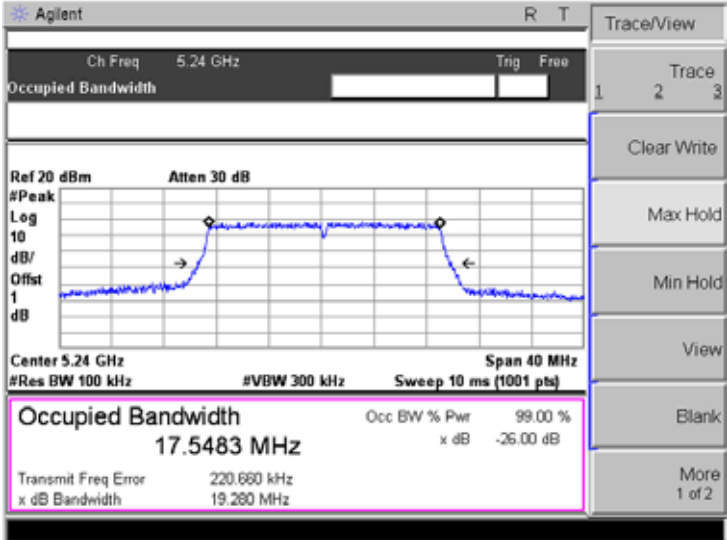
U-NII-1:5150-5250MHz(Antenna B)				
Test Mode	Test Channel MHz	26 dB Bandwidth MHz	99% Bandwidth MHz	verdict
802.11a	5180	18.153	16.3151	Pass
	5200	18.200	16.3153	Pass
	5240	18.125	16.3243	Pass
802.11n-HT20	5180	19.280	17.5330	Pass
	5200	19.264	17.5333	Pass
	5240	19.189	17.5338	Pass
802.11n-HT40	5190	39.284	35.9340	Pass
	5230	39.049	35.9191	Pass
802.11ac-HT80	5210	78.815	74.5969	Pass

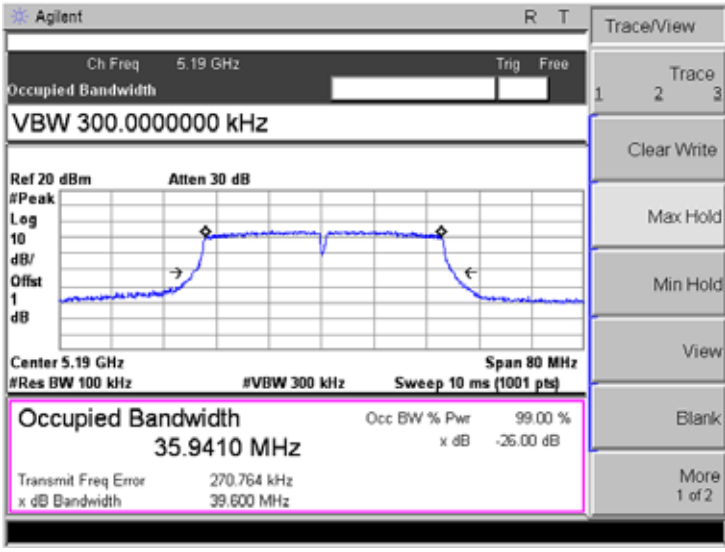
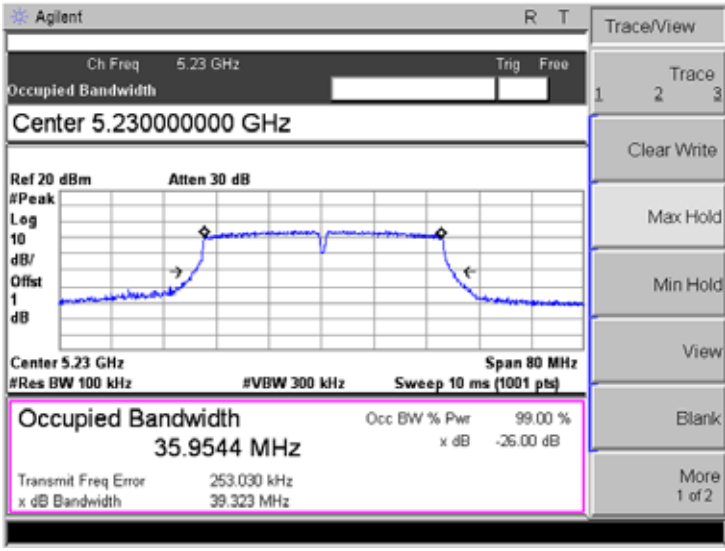


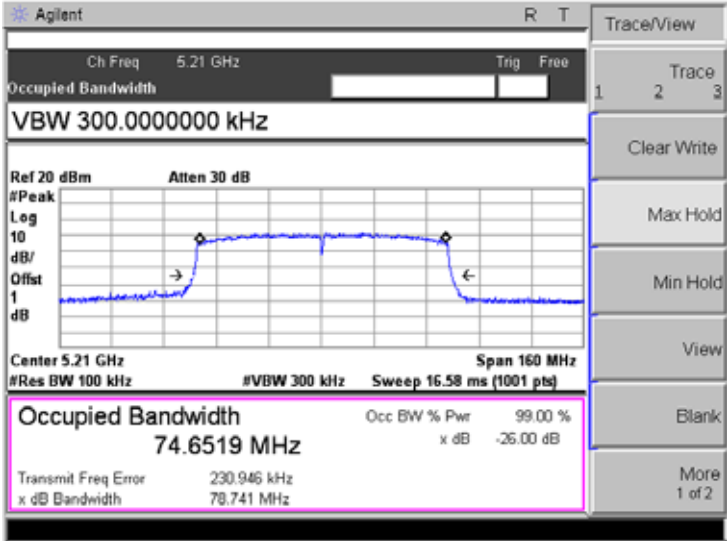
U-NII-3: 5725-5850MHz(Antenna 1)				
Test Mode	Test Channel MHz	6 dB Bandwidth MHz	99% Bandwidth MHz	Limit kHz
802.11a	5745	16.425	16.3086	≥500
	5785	16.440	16.3204	≥500
	5825	16.422	16.3159	≥500
802.11n-HT20	5745	17.699	17.5408	≥500
	5785	17.687	17.5411	≥500
	5825	17.669	17.5360	≥500
802.11n-HT40	5755	36.387	35.9313	≥500
	5795	36.376	35.9271	≥500
802.11ac VH80	5775	75.228	74.6697	≥500

➤ Antenna A: 5150-5250MHz

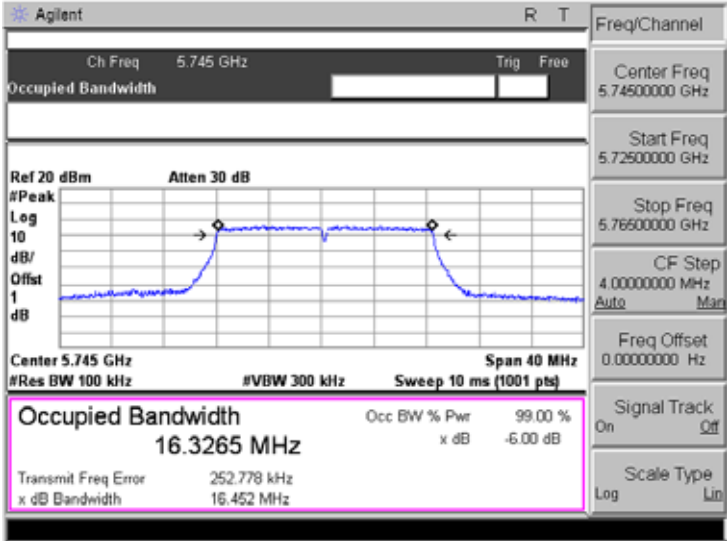
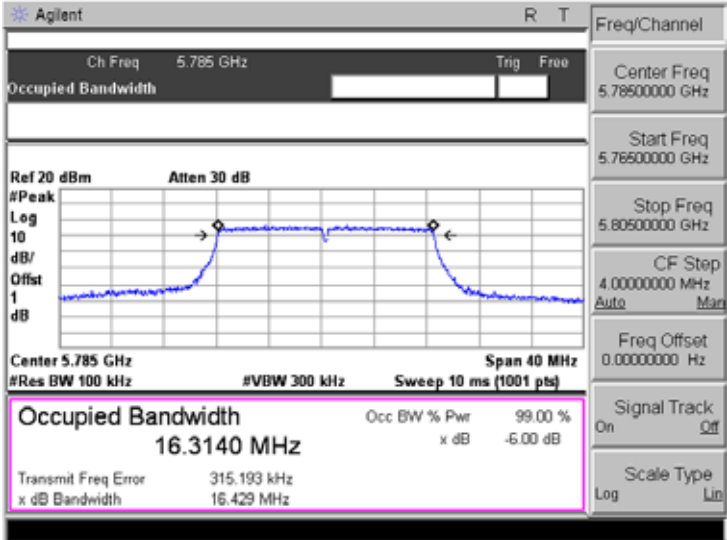
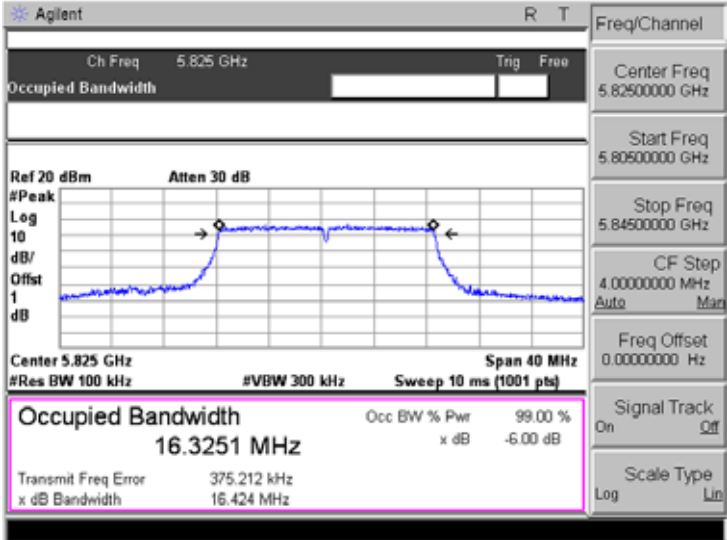
Mode:	802.11a
5180MHz	
5200MHz	
5240MHz	

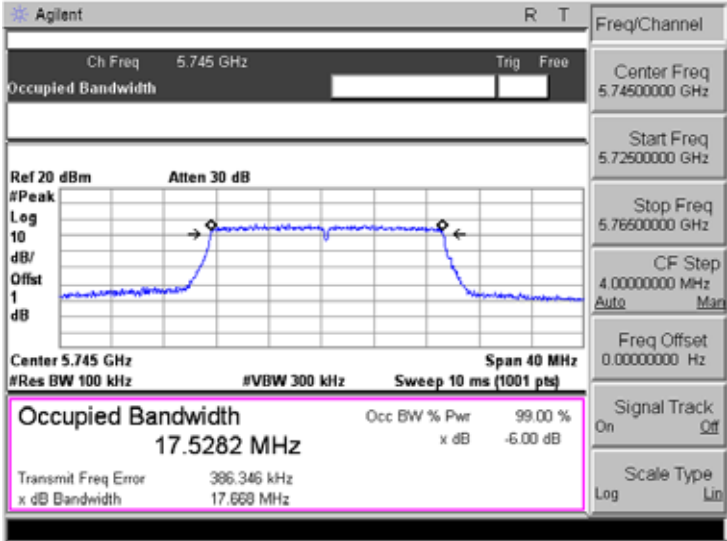
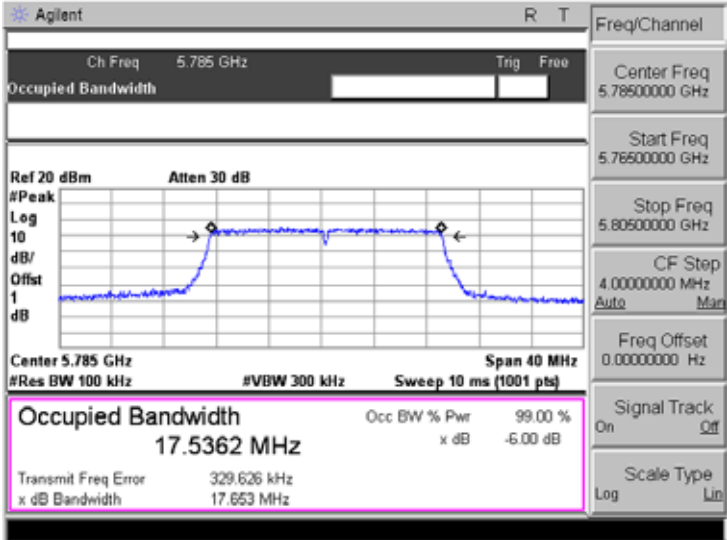
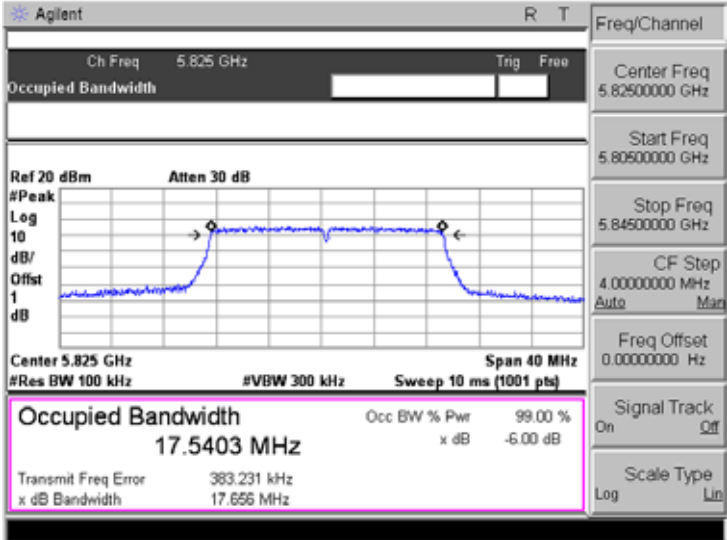
Mode:	802.11n-HT20
5180MHz	
5200MHz	
5240MHz	

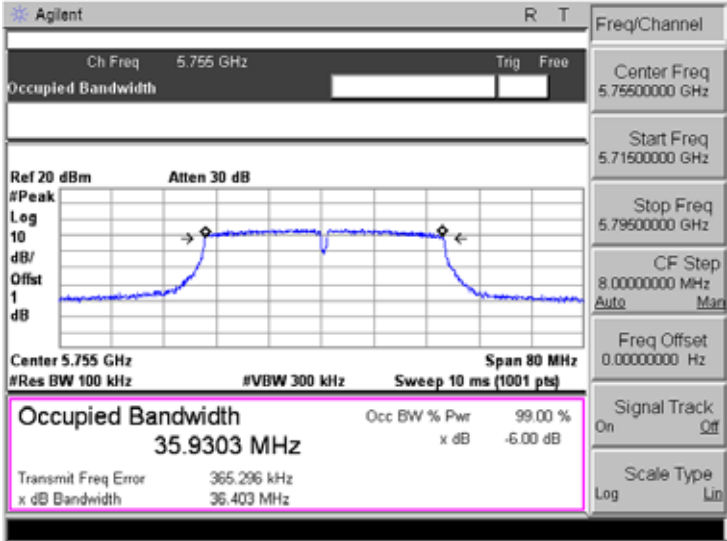
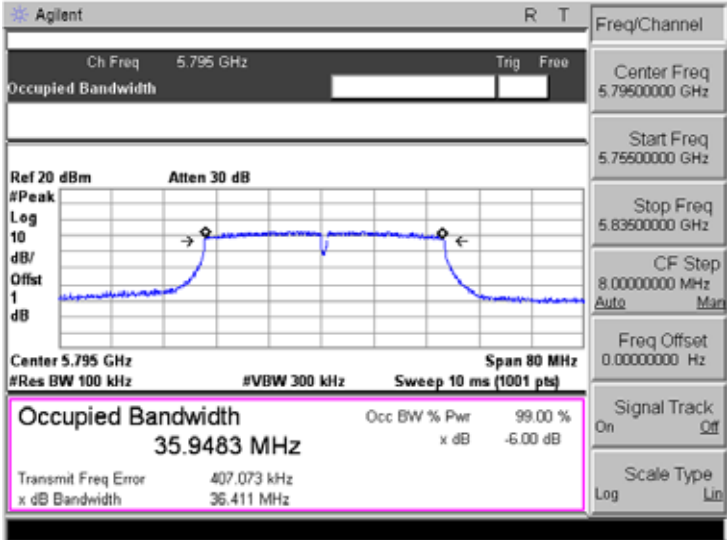
Mode:	802.11n-HT40
5190 MHz	 Agilent R T Ch Freq 5.19 GHz Trig Free Occupied Bandwidth VBW 300.000000 kHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offset 1 dB Center 5.19 GHz Span 80 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Occupied Bandwidth 35.9410 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error 270.764 kHz x dB Bandwidth 39.600 MHz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
5230 MHz	 Agilent R T Ch Freq 5.23 GHz Trig Free Occupied Bandwidth Center 5.23000000 GHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offset 1 dB Center 5.23 GHz Span 80 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Occupied Bandwidth 35.9544 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error 253.030 kHz x dB Bandwidth 39.323 MHz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2

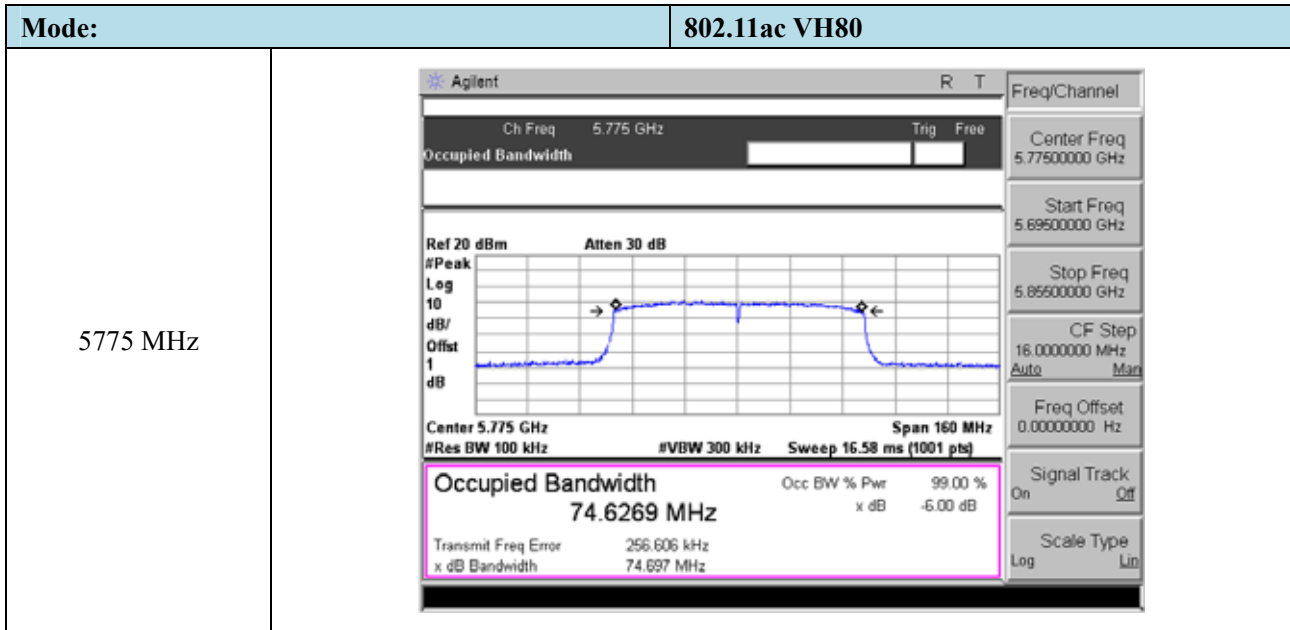
Mode:	802.11ac VH80
5210MHz	 Agilent R T Ch Freq 5.21 GHz Trig Free Occupied Bandwidth VBW 300.000000 kHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/Offst 1 dB Center 5.21 GHz Span 160 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 16.58 ms (1001 pts) Occupied Bandwidth 74.6519 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error 230.946 kHz x dB Bandwidth 78.741 MHz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2

➤ Antenna A: 5725-5850MHz

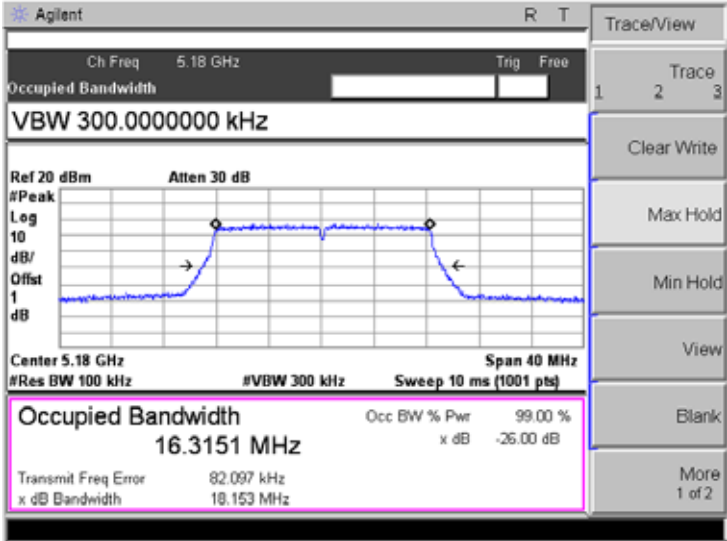
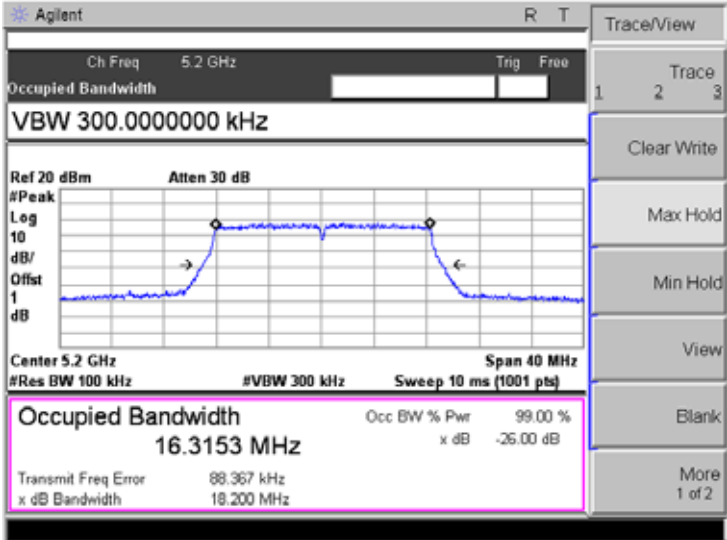
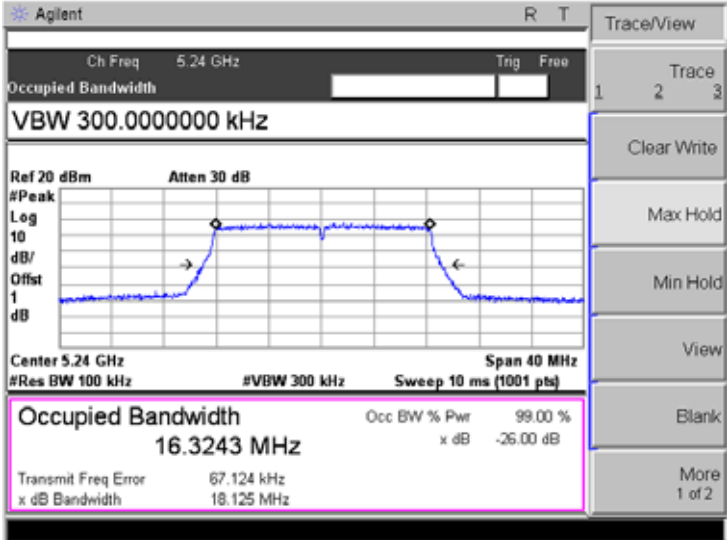
Mode:	802.11a
5745MHz	 Agilent R T Ch Freq 5.745 GHz Trig Free Occupied Bandwidth Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.745 GHz Span 40 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Occupied Bandwidth 16.3265 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error 252.778 kHz x dB Bandwidth 16.452 MHz Freq/Channel Center Freq 5.74500000 GHz Start Freq 5.72500000 GHz Stop Freq 5.76500000 GHz CF Step 4.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
5785MHz	 Agilent R T Ch Freq 5.785 GHz Trig Free Occupied Bandwidth Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.785 GHz Span 40 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Occupied Bandwidth 16.3140 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error 315.193 kHz x dB Bandwidth 16.429 MHz Freq/Channel Center Freq 5.78500000 GHz Start Freq 5.76500000 GHz Stop Freq 5.80500000 GHz CF Step 4.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
5825MHz	 Agilent R T Ch Freq 5.825 GHz Trig Free Occupied Bandwidth Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.825 GHz Span 40 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Occupied Bandwidth 16.3251 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error 375.212 kHz x dB Bandwidth 16.424 MHz Freq/Channel Center Freq 5.82500000 GHz Start Freq 5.80500000 GHz Stop Freq 5.84500000 GHz CF Step 4.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin

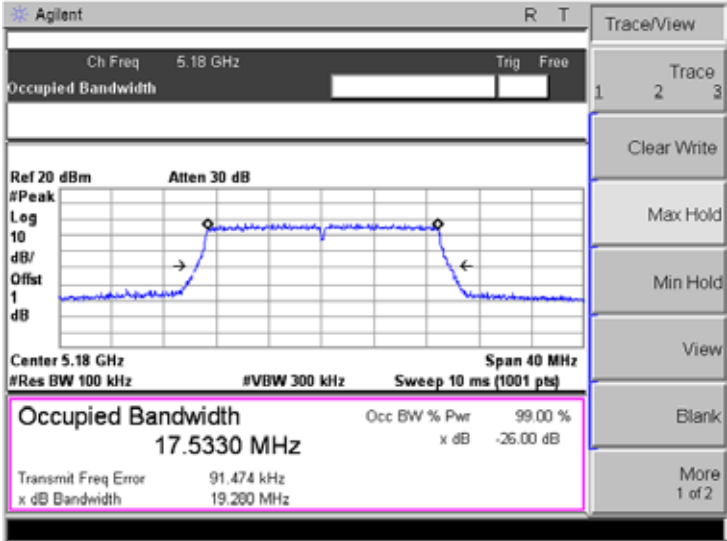
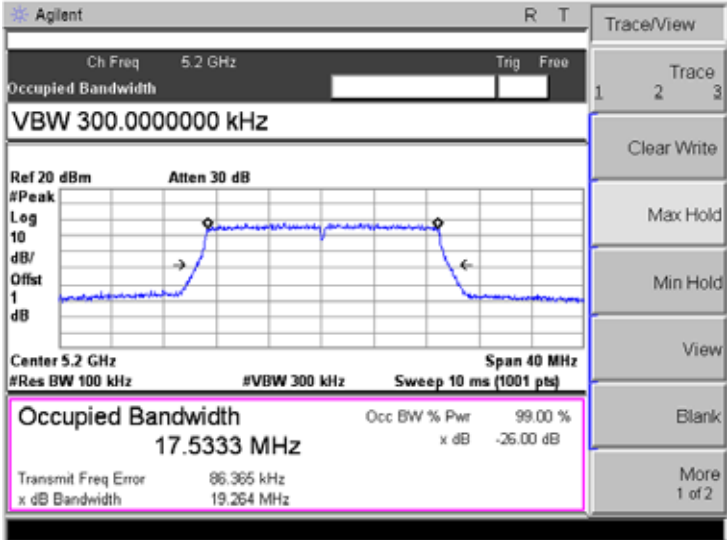
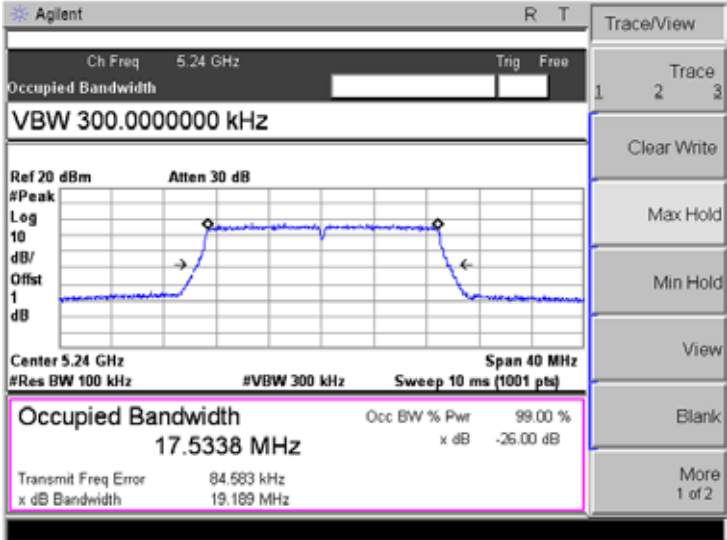
Mode:	802.11n-HT20
5745MHz	 Agilent R T Ch Freq 5.745 GHz Trig Free Occupied Bandwidth Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.745 GHz Span 40 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Occupied Bandwidth 17.5282 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error 386.346 kHz x dB Bandwidth 17.668 MHz Freq/Channel Center Freq 5.74500000 GHz Start Freq 5.72500000 GHz Stop Freq 5.76500000 GHz CF Step 4.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
5785MHz	 Agilent R T Ch Freq 5.785 GHz Trig Free Occupied Bandwidth Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.785 GHz Span 40 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Occupied Bandwidth 17.5362 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error 329.626 kHz x dB Bandwidth 17.653 MHz Freq/Channel Center Freq 5.78500000 GHz Start Freq 5.76500000 GHz Stop Freq 5.80500000 GHz CF Step 4.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
5825MHz	 Agilent R T Ch Freq 5.825 GHz Trig Free Occupied Bandwidth Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.825 GHz Span 40 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Occupied Bandwidth 17.5403 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error 383.231 kHz x dB Bandwidth 17.656 MHz Freq/Channel Center Freq 5.82500000 GHz Start Freq 5.80500000 GHz Stop Freq 5.84500000 GHz CF Step 4.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin

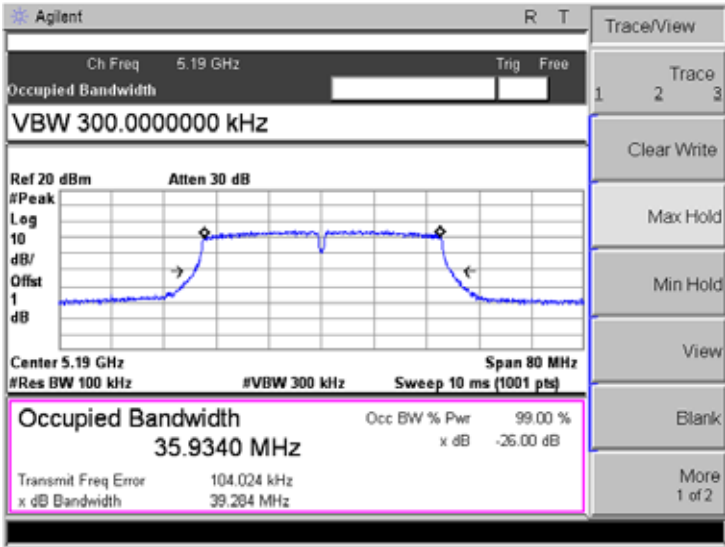
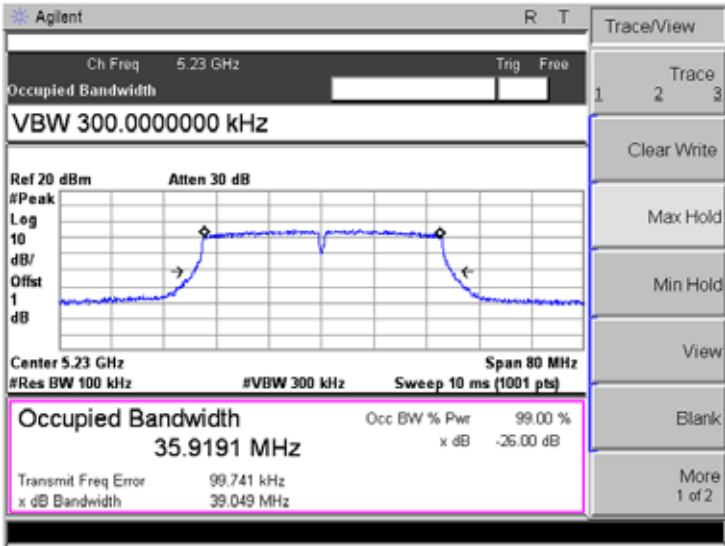
Mode:	802.11n-HT40
5755 MHz	 Agilent R T Ch Freq 5.755 GHz Trig Free Occupied Bandwidth Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.755 GHz Span 80 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Occupied Bandwidth 35.9303 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error 365.296 kHz x dB Bandwidth 36.403 MHz Freq/Channel Center Freq 5.75500000 GHz Start Freq 5.71500000 GHz Stop Freq 5.79500000 GHz CF Step 8.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
5795 MHz	 Agilent R T Ch Freq 5.795 GHz Trig Free Occupied Bandwidth Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.795 GHz Span 80 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Occupied Bandwidth 35.9483 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error 407.073 kHz x dB Bandwidth 36.411 MHz Freq/Channel Center Freq 5.79500000 GHz Start Freq 5.75500000 GHz Stop Freq 5.83500000 GHz CF Step 8.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin

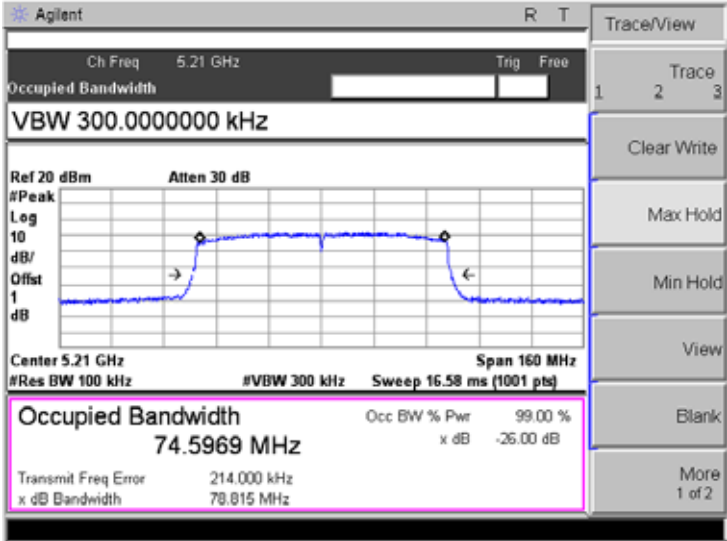


➤ Antenna 1: 5150-5250MHz

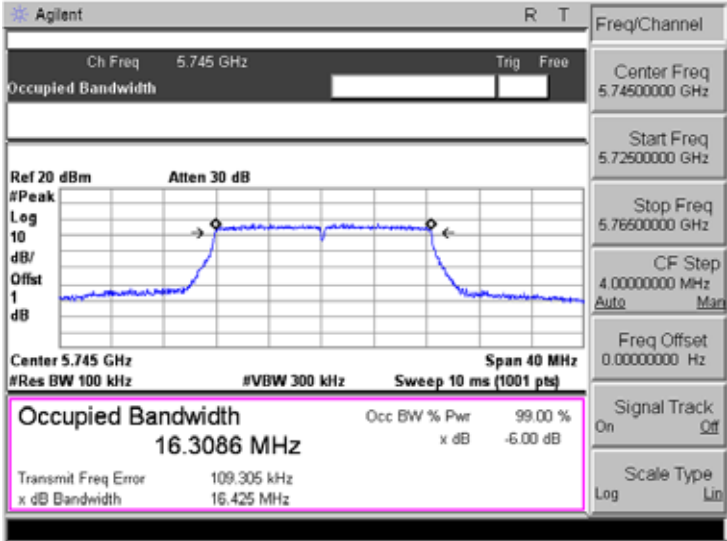
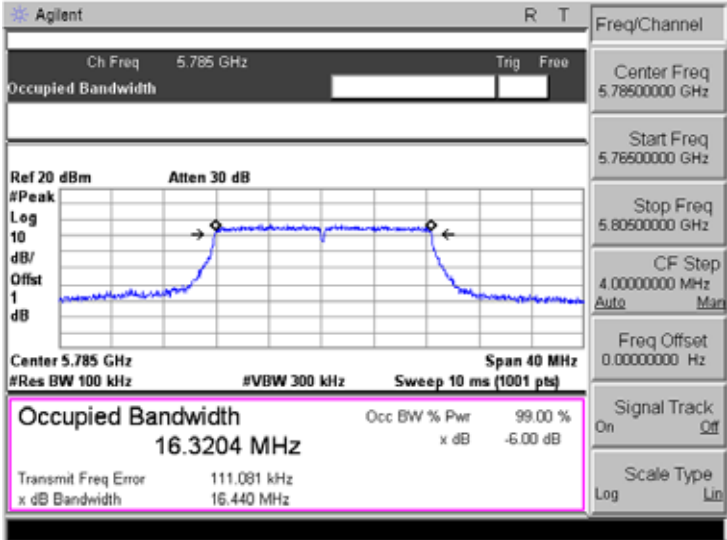
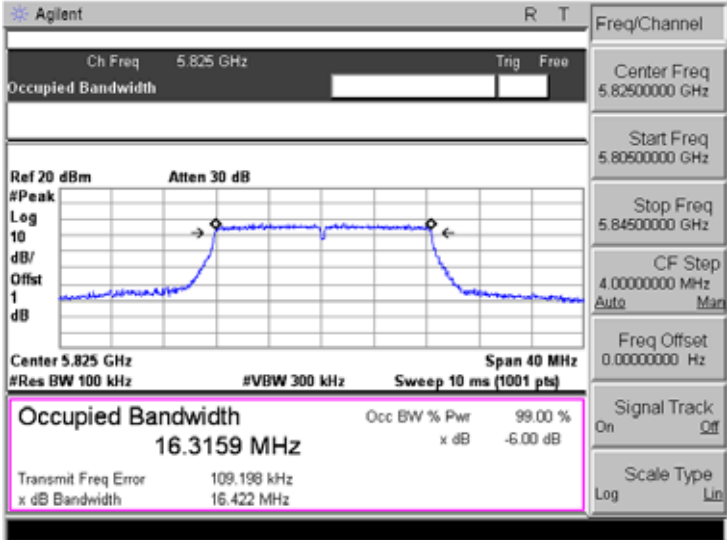
Mode:	802.11a
5180MHz	 Agilent R T Trace/View Ch Freq 5.18 GHz Trig Free Occupied Bandwidth VBW 300.000000 kHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.18 GHz Span 40 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Occupied Bandwidth 16.3151 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error 82.097 kHz x dB Bandwidth 18.153 MHz Trace/View: 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
5200MHz	 Agilent R T Trace/View Ch Freq 5.2 GHz Trig Free Occupied Bandwidth VBW 300.000000 kHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.2 GHz Span 40 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Occupied Bandwidth 16.3153 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error 88.367 kHz x dB Bandwidth 18.200 MHz Trace/View: 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
5240MHz	 Agilent R T Trace/View Ch Freq 5.24 GHz Trig Free Occupied Bandwidth VBW 300.000000 kHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.24 GHz Span 40 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Occupied Bandwidth 16.3243 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error 67.124 kHz x dB Bandwidth 18.125 MHz Trace/View: 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2

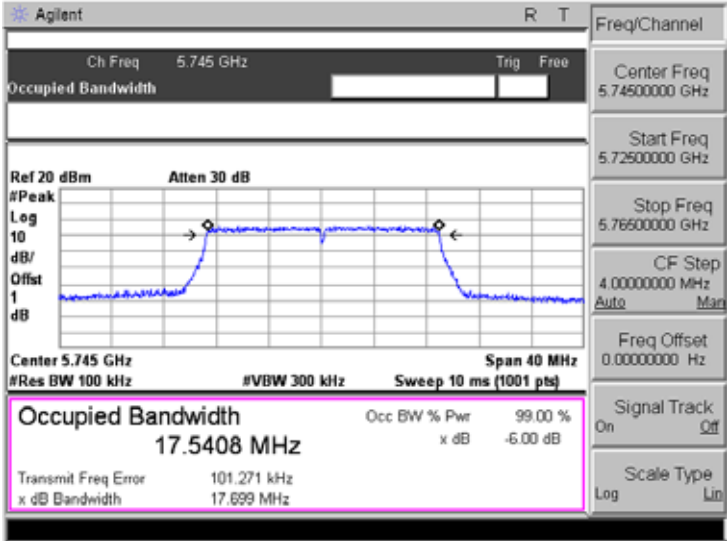
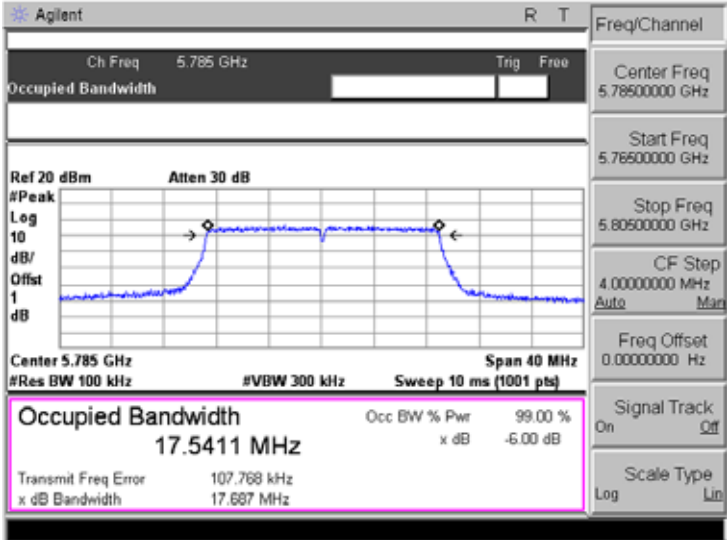
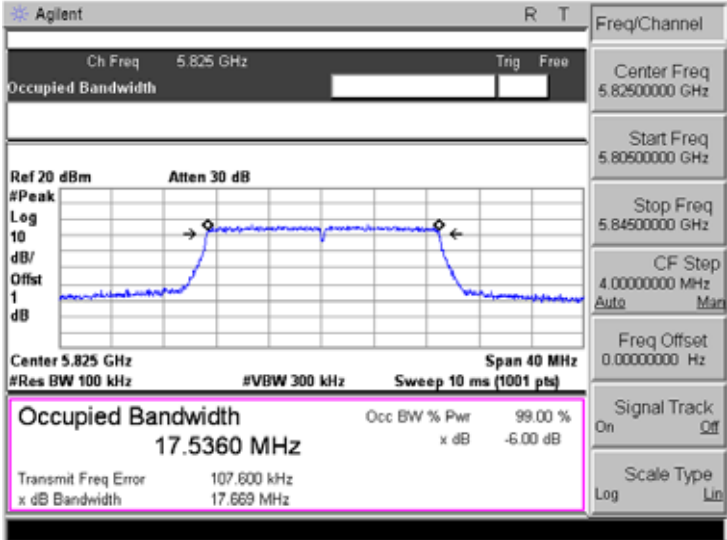
Mode:	802.11n-HT20
5180MHz	
5200MHz	
5240MHz	

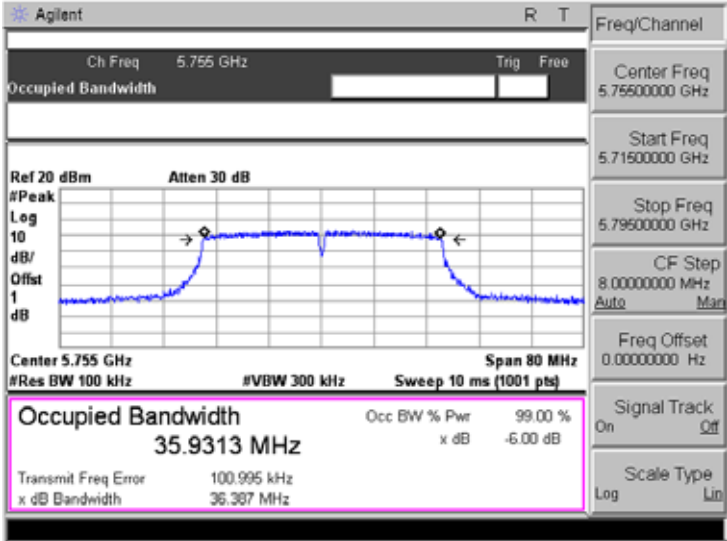
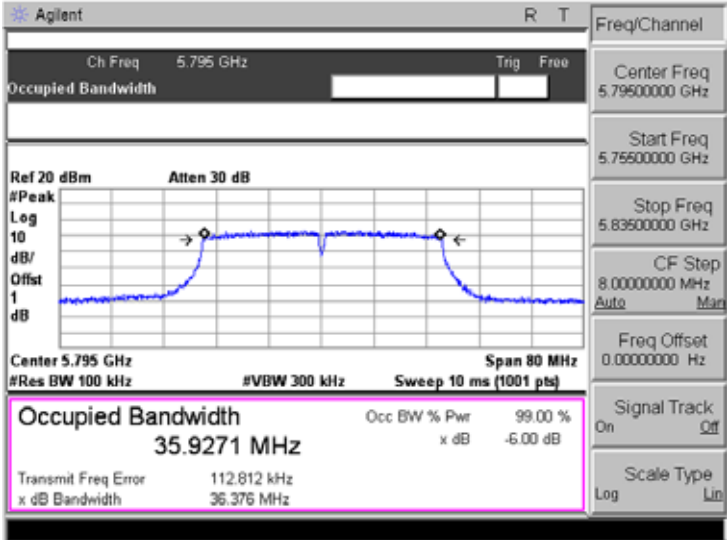
Mode:	802.11n-HT40
5190 MHz	
5230 MHz	

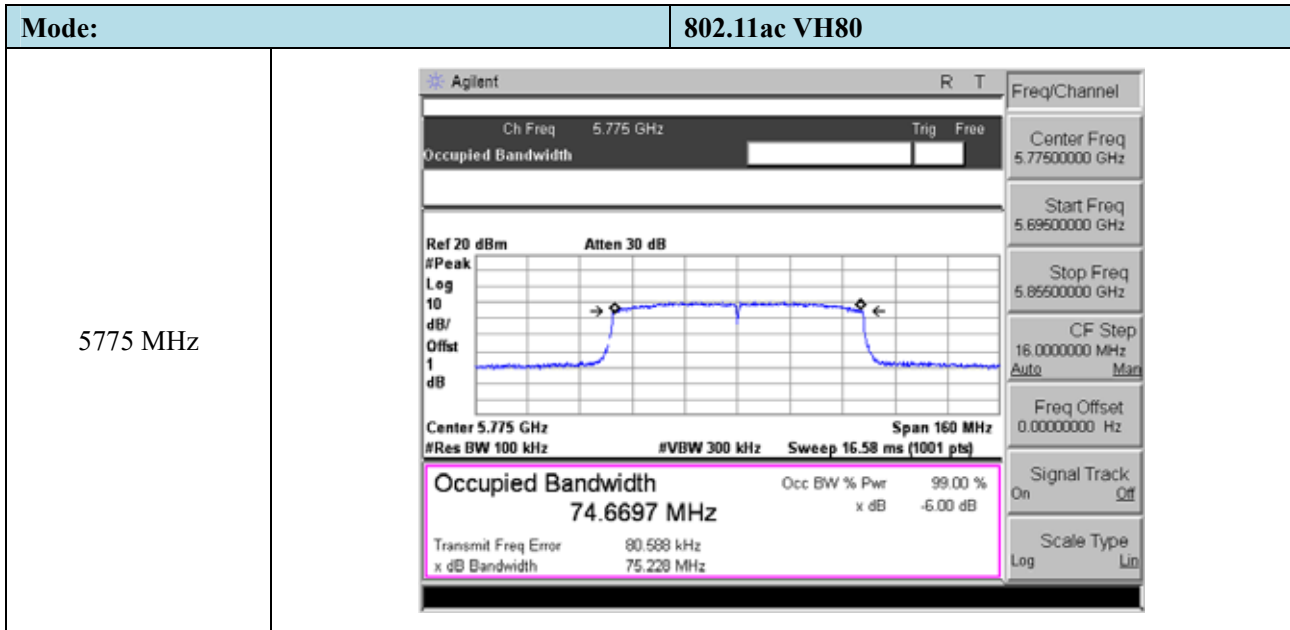
Mode:	802.11ac VH80
5210MHz	 Agilent R T Ch Freq 5.21 GHz Trig Free Occupied Bandwidth VBW 300.000000 kHz Ref 20 dBm Atten 30 dB #Peak Log 10 dB/Offset 1 dB Center 5.21 GHz Span 160 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 16.58 ms (1001 pts) Occupied Bandwidth 74.5969 MHz Occ BW % Pwr 99.00 % x dB -26.00 dB Transmit Freq Error 214.000 kHz x dB Bandwidth 78.815 MHz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2

➤ Antenna B: 5725-5850MHz

Mode:	802.11a
5745MHz	 Agilent R T Ch Freq 5.745 GHz Trig Free Occupied Bandwidth Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.745 GHz Span 40 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Occupied Bandwidth 16.3086 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error 109.305 kHz x dB Bandwidth 16.425 MHz Freq/Channel Center Freq 5.74500000 GHz Start Freq 5.72500000 GHz Stop Freq 5.76500000 GHz CF Step 4.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
5785MHz	 Agilent R T Ch Freq 5.785 GHz Trig Free Occupied Bandwidth Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.785 GHz Span 40 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Occupied Bandwidth 16.3204 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error 111.081 kHz x dB Bandwidth 16.440 MHz Freq/Channel Center Freq 5.78500000 GHz Start Freq 5.76500000 GHz Stop Freq 5.80500000 GHz CF Step 4.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
5825MHz	 Agilent R T Ch Freq 5.825 GHz Trig Free Occupied Bandwidth Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.825 GHz Span 40 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Occupied Bandwidth 16.3159 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error 109.198 kHz x dB Bandwidth 16.422 MHz Freq/Channel Center Freq 5.82500000 GHz Start Freq 5.80500000 GHz Stop Freq 5.84500000 GHz CF Step 4.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin

Mode:	802.11n-HT20
5745MHz	 Agilent R T Ch Freq 5.745 GHz Trig Free Occupied Bandwidth Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.745 GHz Span 40 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Occupied Bandwidth 17.5408 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error 101.271 kHz x dB Bandwidth 17.699 MHz Freq/Channel Center Freq 5.74500000 GHz Start Freq 5.72500000 GHz Stop Freq 5.76500000 GHz CF Step 4.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
5785MHz	 Agilent R T Ch Freq 5.785 GHz Trig Free Occupied Bandwidth Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.785 GHz Span 40 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Occupied Bandwidth 17.5411 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error 107.768 kHz x dB Bandwidth 17.687 MHz Freq/Channel Center Freq 5.78500000 GHz Start Freq 5.76500000 GHz Stop Freq 5.80500000 GHz CF Step 4.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
5825MHz	 Agilent R T Ch Freq 5.825 GHz Trig Free Occupied Bandwidth Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.825 GHz Span 40 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Occupied Bandwidth 17.5360 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error 107.600 kHz x dB Bandwidth 17.669 MHz Freq/Channel Center Freq 5.82500000 GHz Start Freq 5.80500000 GHz Stop Freq 5.84500000 GHz CF Step 4.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin

Mode:	802.11n-HT40
5755 MHz	 Agilent R T Ch Freq 5.755 GHz Trig Free Occupied Bandwidth Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.755 GHz Span 80 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Occupied Bandwidth 35.9313 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error 100.995 kHz x dB Bandwidth 36.387 MHz Freq/Channel Center Freq 5.75500000 GHz Start Freq 5.71500000 GHz Stop Freq 5.79500000 GHz CF Step 8.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin
5795 MHz	 Agilent R T Ch Freq 5.795 GHz Trig Free Occupied Bandwidth Ref 20 dBm Atten 30 dB #Peak Log 10 dB/ Offst 1 dB Center 5.795 GHz Span 80 MHz #Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts) Occupied Bandwidth 35.9271 MHz Occ BW % Pwr 99.00 % x dB -6.00 dB Transmit Freq Error 112.812 kHz x dB Bandwidth 36.376 MHz Freq/Channel Center Freq 5.79500000 GHz Start Freq 5.75500000 GHz Stop Freq 5.83500000 GHz CF Step 8.00000000 MHz Auto Man Freq Offset 0.00000000 Hz Signal Track On Off Scale Type Log Lin



8. Maximum Conducted Output Power

8.1 Standard Applicable

Section 15.407(a) Power limits:

(1) For the band 5.15-5.25 GHz.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

8.2 Test Procedure

According to KDB789033 D02 v02r01 section E, the following is the measurement procedure.

- (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- (ii) Set RBW = 1 MHz.
- (iii) Set VBW $\geq$ 3 MHz.
- (iv) Number of points in sweep $\geq$ 2 Span / RBW. (This ensures that bin-to-bin spacing is $\leq$ RBW/2, so that narrowband signals are not lost between frequency bins.)
- (v) Sweep time = auto.

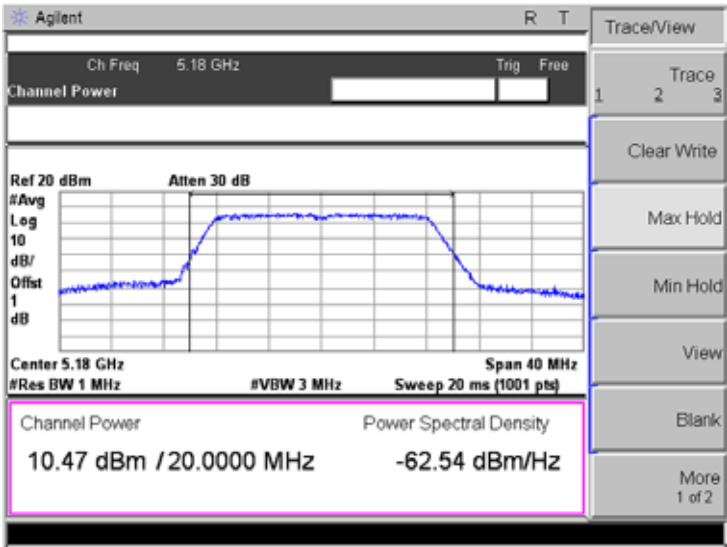
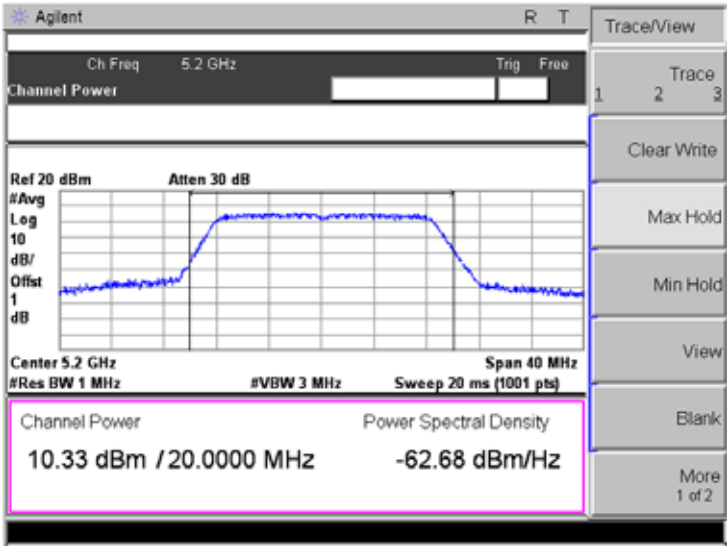
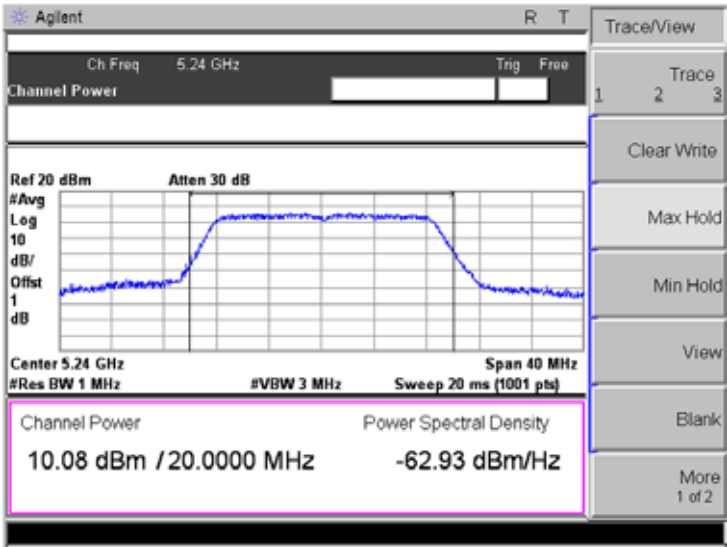
- (vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- (vii) If transmit duty cycle < 98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle ≥ 98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run”.
- (viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- (ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument’s band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at 1 MHz intervals extending across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the spectrum.

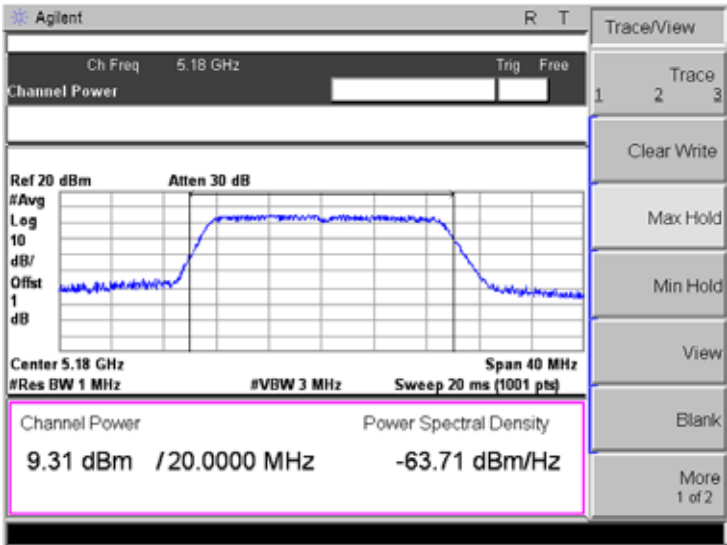
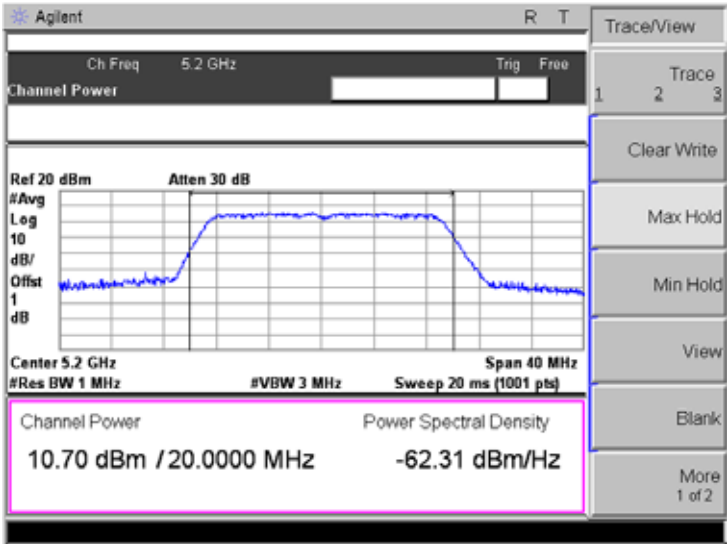
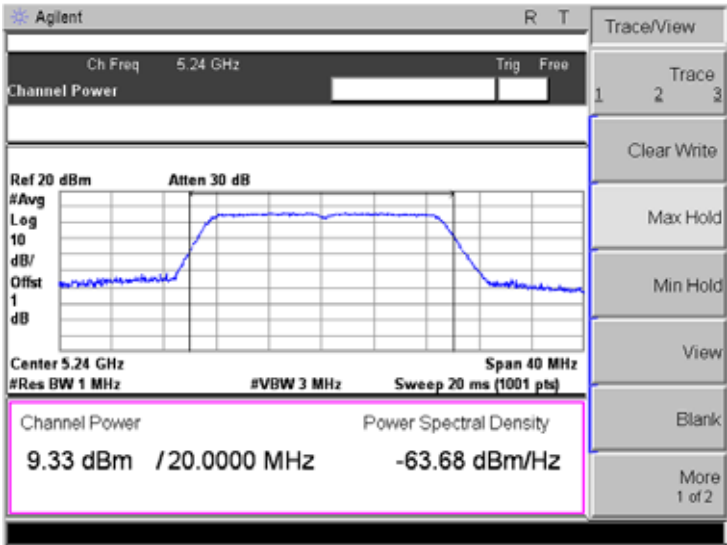
8.3 Summary of Test Results/Plots

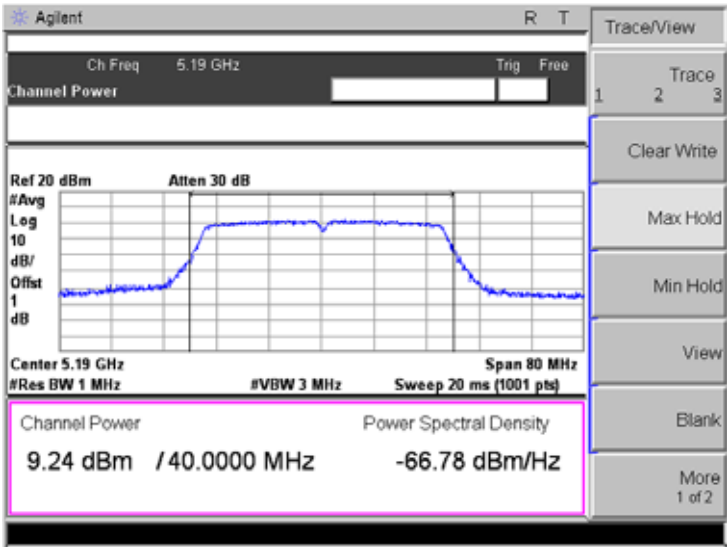
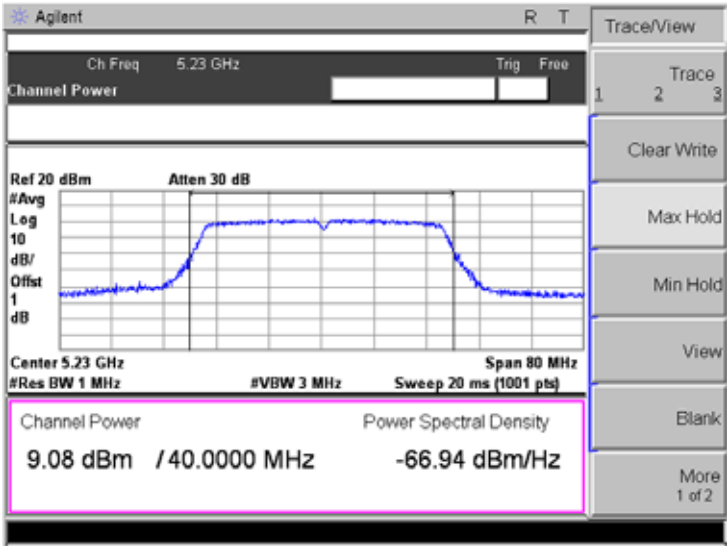
U-NII-1:5150-5250MHz								
Test mode	Frequency MHz	ANT A Power dBm	ANT B Power dBm	ANT A Power mW	ANT B Power mW	Total Power dBm	Output Power mW	Limit mW
802.11a	5180	10.47	10.95	11.14	12.45	/	/	250
	5200	10.33	10.58	10.79	11.43	/	/	250
	5240	10.08	10.70	10.19	11.75	/	/	250
802.11n-HT20	5180	9.31	10.55	8.53	11.35	12.98	19.88	250
	5200	10.70	10.70	11.75	11.75	13.71	23.50	250
	5240	9.33	10.20	8.57	10.47	12.80	19.04	250
802.11n-HT40	5190	9.24	10.67	8.39	11.67	13.02	20.06	250
	5230	9.08	10.69	8.09	11.72	12.97	19.81	250
802.11ac VH80	5210	8.58	10.60	7.21	11.48	12.72	18.69	250

U-NII-3: 5725-5850MHz								
Test mode	Frequency MHz	ANT A Power dBm	ANT B Power dBm	ANT A Power mW	ANT B Power mW	Total Power dBm	Output Power mW	Limit mW
802.11a	5745	9.80	10.41	9.55	10.99	/	/	250
	5785	9.78	9.94	9.51	9.86	/	/	250
	5825	10.23	10.61	10.54	11.51	/	/	250
802.11n-HT20	5745	9.48	10.72	8.87	11.80	13.15	20.67	250
	5785	9.96	9.41	9.91	8.73	12.70	18.64	250
	5825	10.06	9.27	10.14	8.45	12.69	18.59	250
802.11n-HT40	5755	10.17	9.39	10.40	8.69	12.81	19.09	250
	5795	9.20	9.54	8.32	8.99	12.38	17.31	250
802.11ac VH80	5775	9.59	9.32	9.10	8.55	12.47	17.65	250

➤ Antenna A: 5150-5250MHz

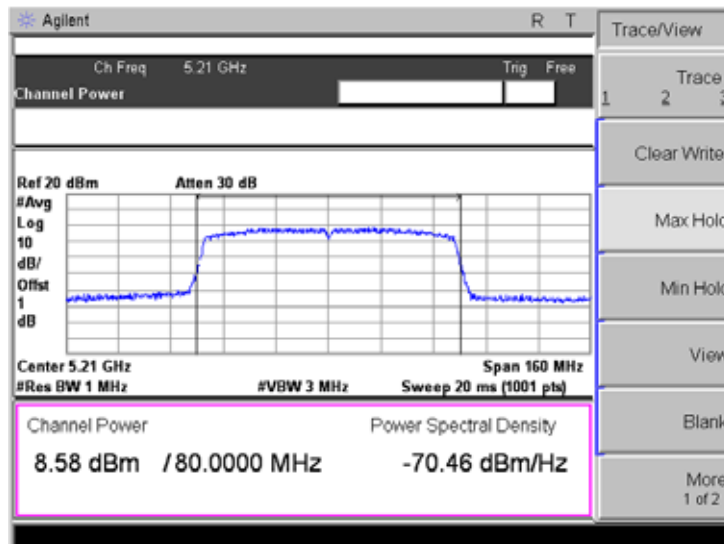
Mode:	802.11a
5180MHz	
5200MHz	
5240MHz	

Mode:	802.11n-HT20
5180MHz	
5200MHz	
5240MHz	

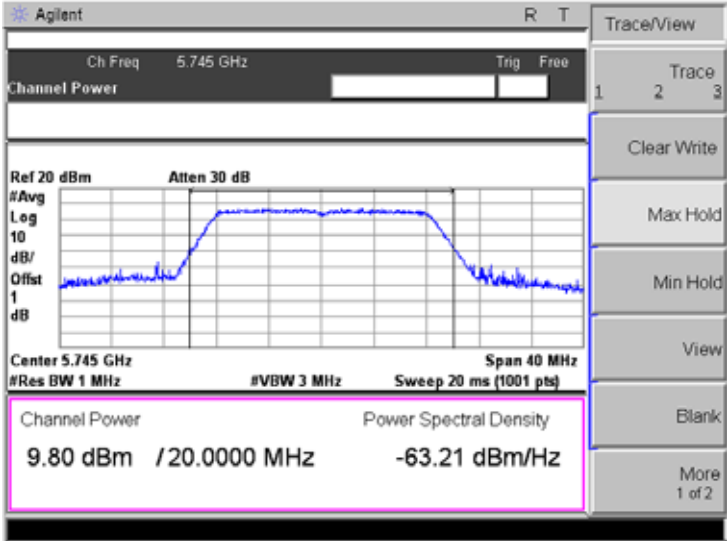
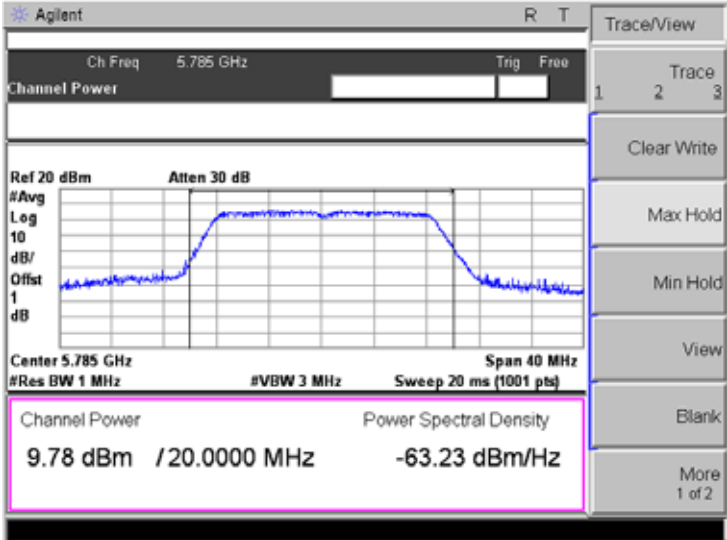
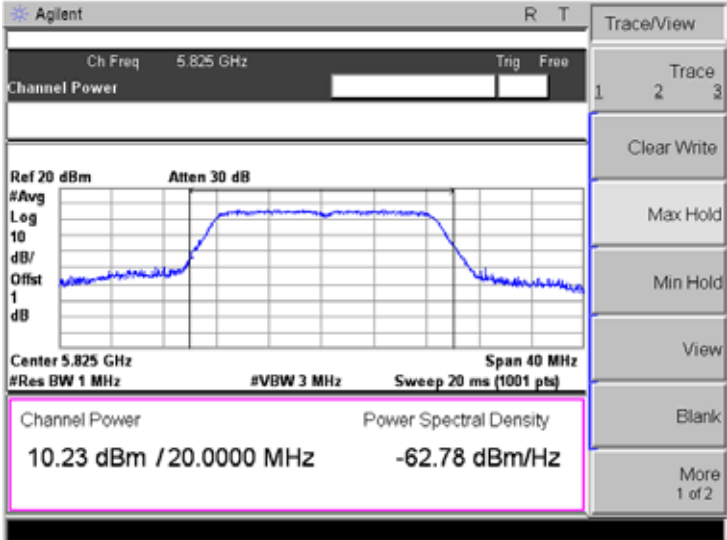
Mode:	802.11n-HT40
5190 MHz	
5230 MHz	

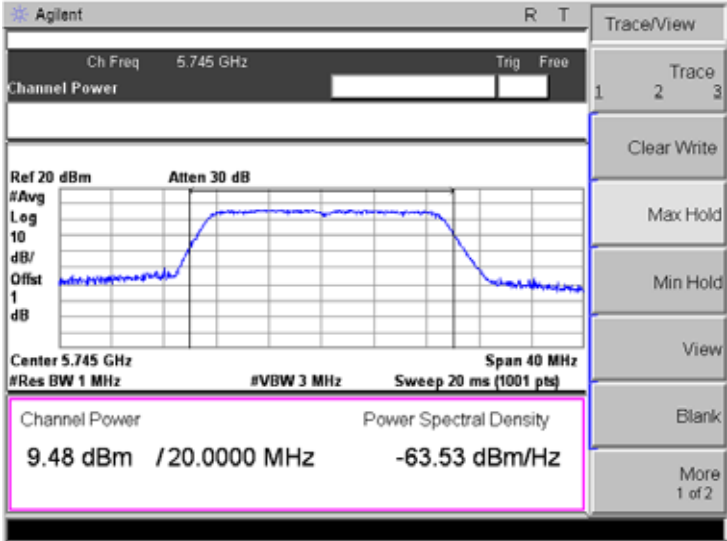
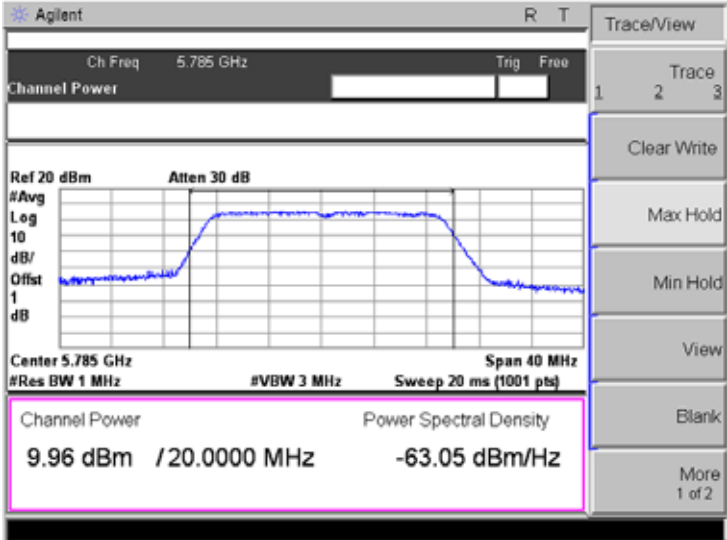
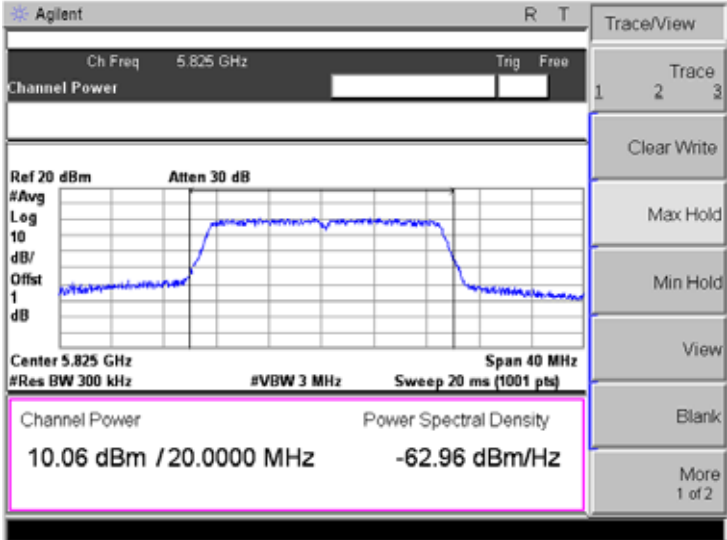
Mode:	802.11ac VH80
-------	---------------

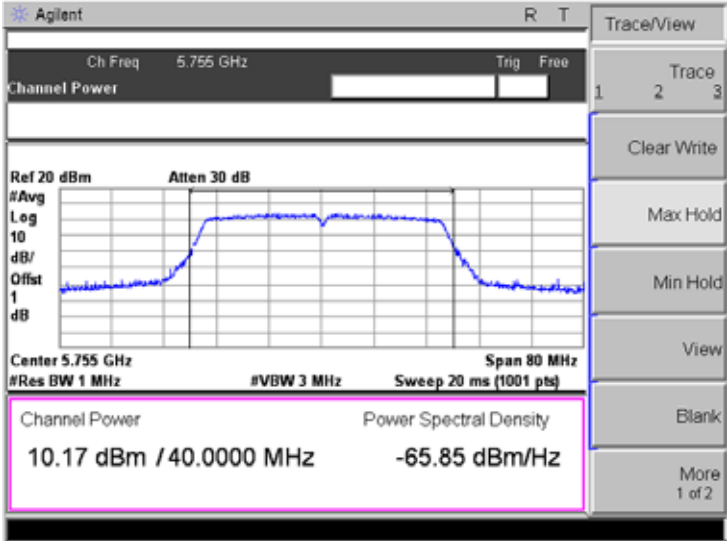
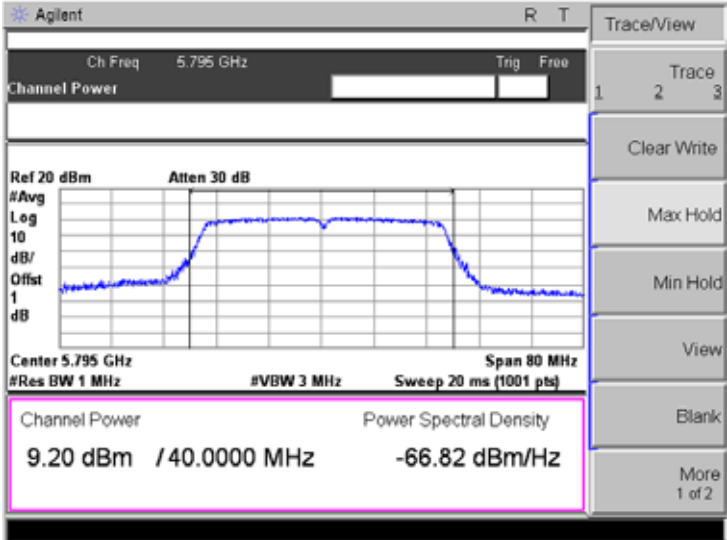
5210MHz



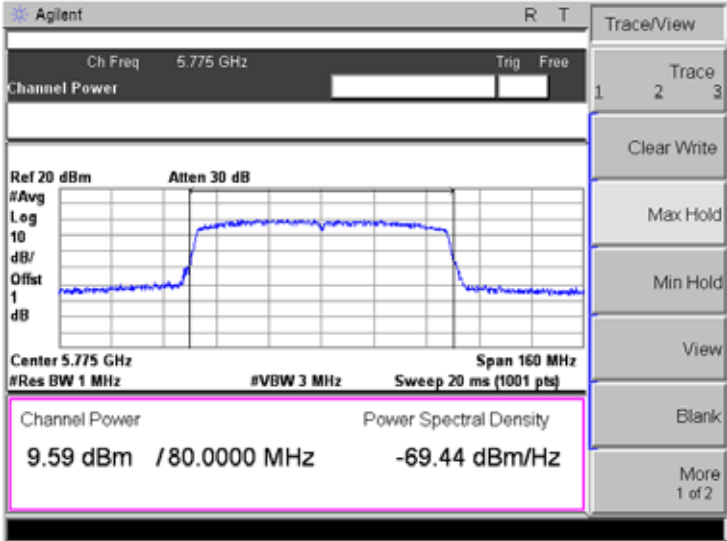
➤ Antenna A: 5725-5850MHz

Mode:	802.11a
5745MHz	
5785MHz	
5825MHz	

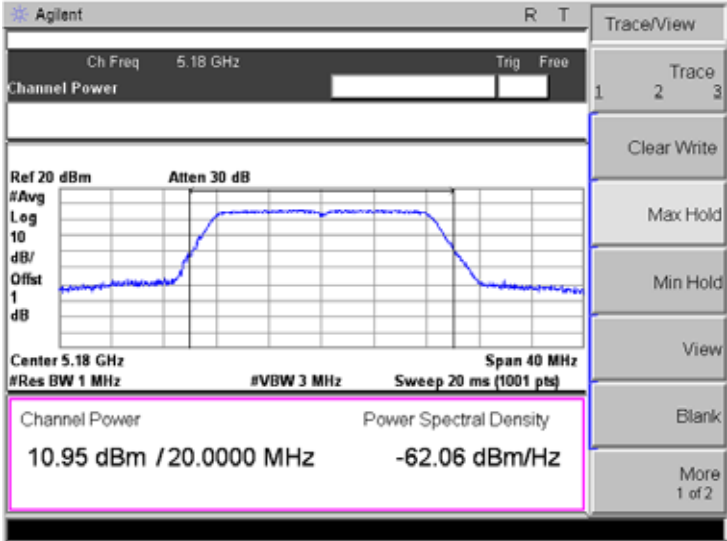
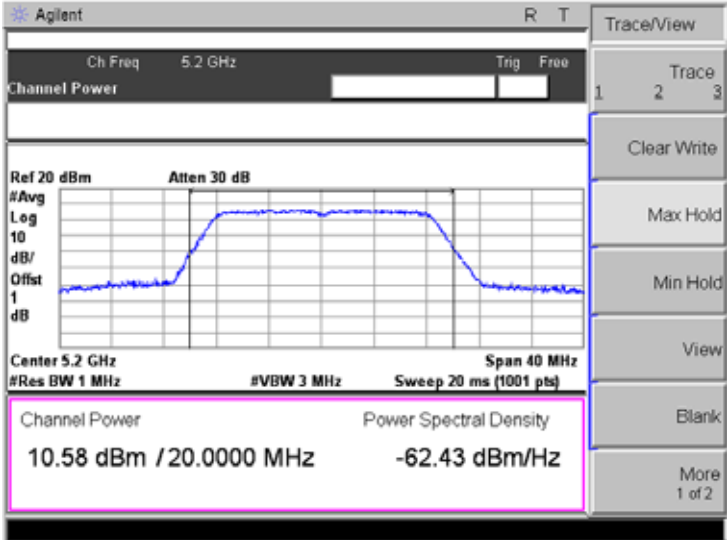
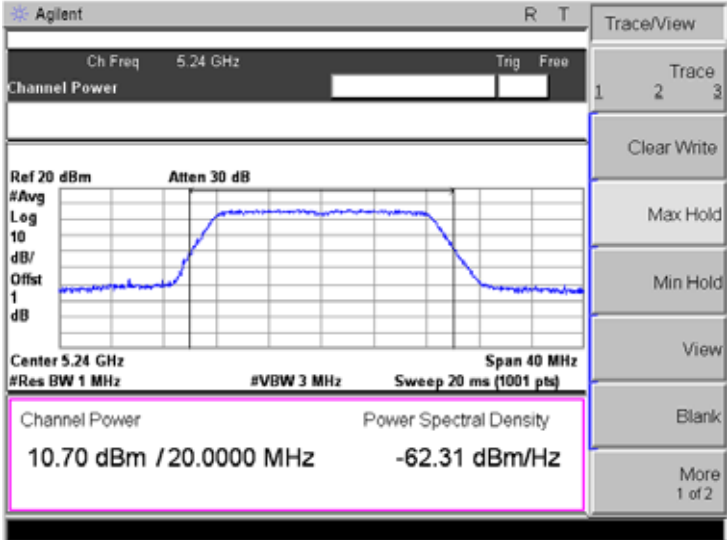
Mode:	802.11n-HT20
5745MHz	
5785MHz	
5825MHz	

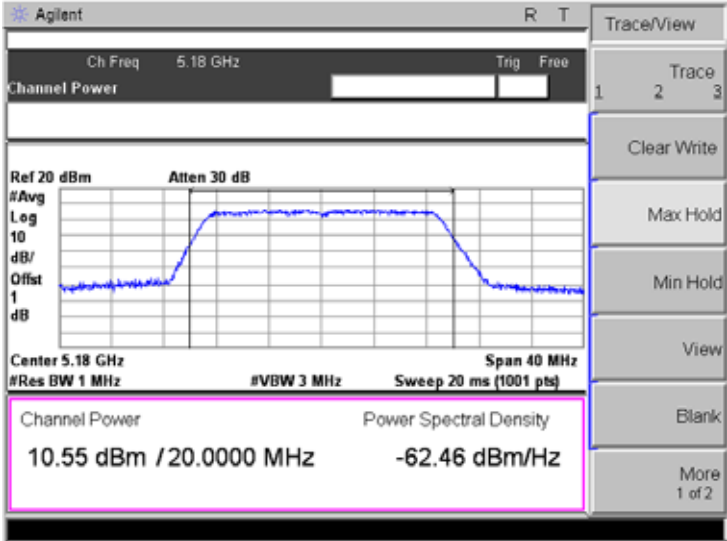
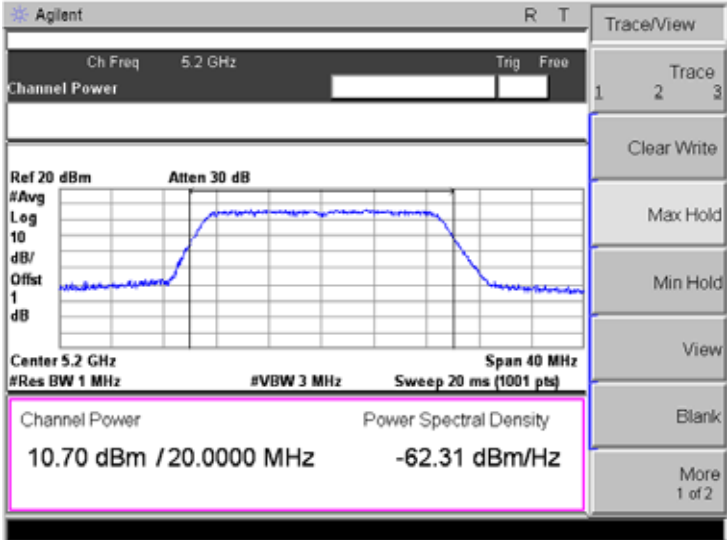
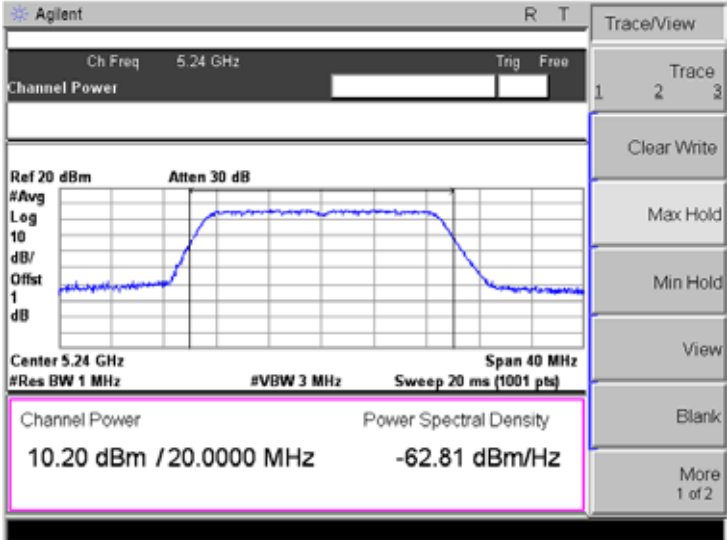
Mode:	802.11n-HT40
5755 MHz	
5795 MHz	

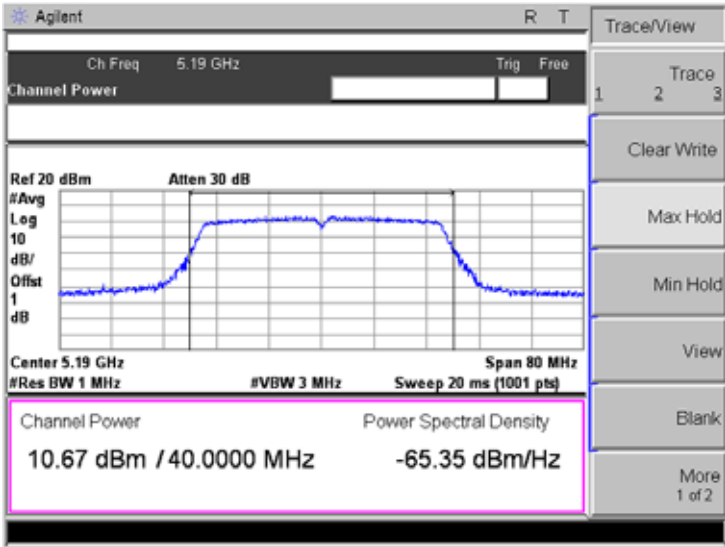
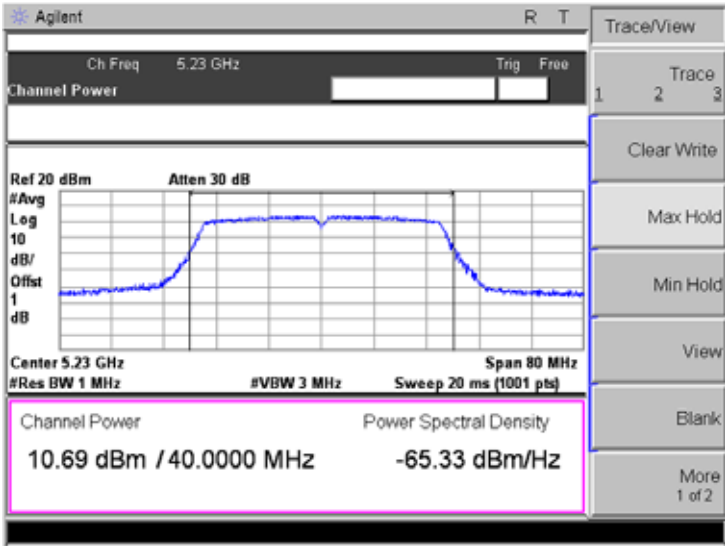


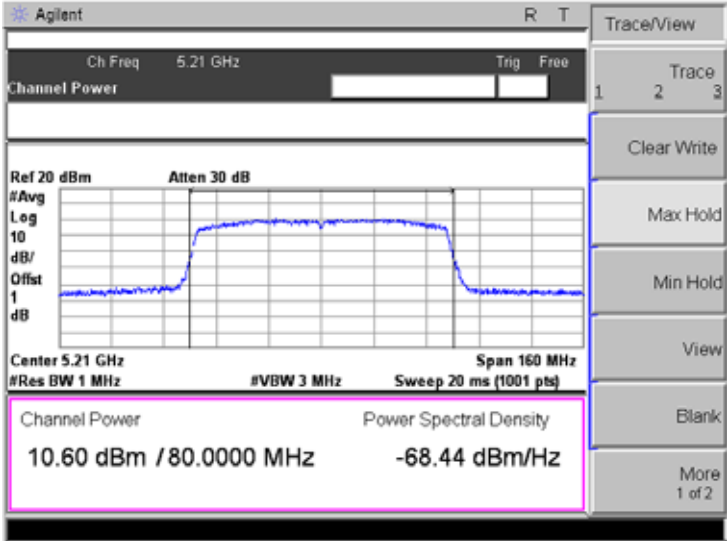
Mode:	802.11ac VH80
5775 MHz	 The image shows an Agilent Channel Power measurement screen. The main display area shows a spectral plot with a blue trace. The plot has a grid and labels for 'Ref 20 dBm', 'Atten 30 dB', '#Avg', 'Log', '10 dB/Offset', and '1 dB'. Below the plot, the following parameters are displayed: Center 5.775 GHz, Span 160 MHz, #Res BW 1 MHz, #VBW 3 MHz, and Sweep 20 ms (1001 pts). At the bottom, a pink box highlights the measurement results: Channel Power 9.59 dBm / 80.0000 MHz and Power Spectral Density -69.44 dBm/Hz. On the right side of the screen, there is a 'Trace/View' menu with options: Trace 1, 2, 3; Clear Write; Max Hold; Min Hold; View; Blank; and More 1 of 2.

➤ Antenna B: 5150-5250MHz

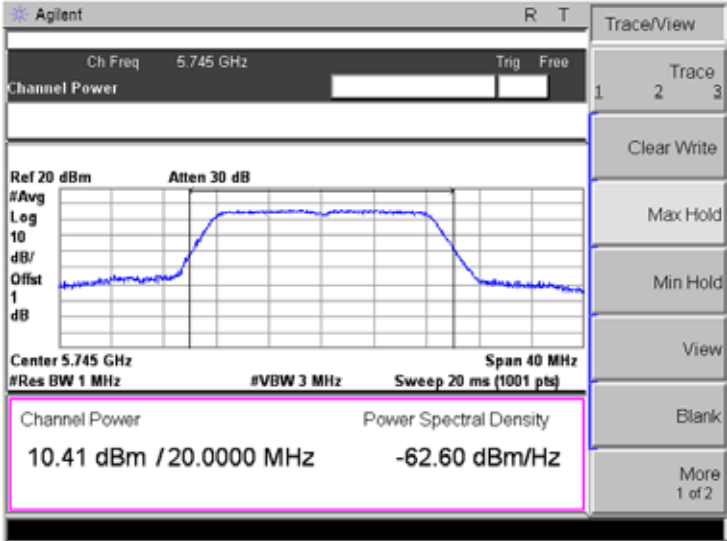
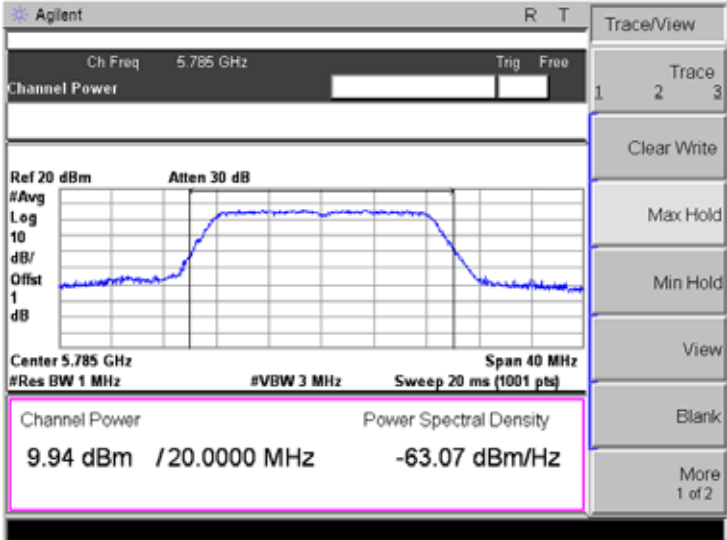
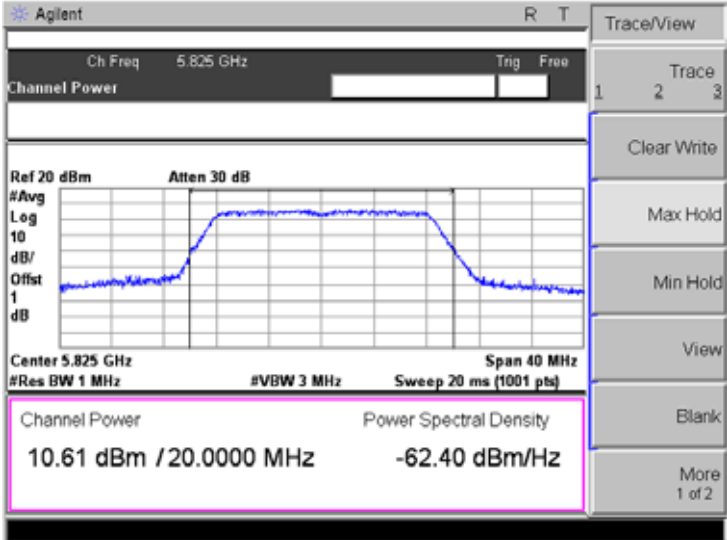
Mode:	802.11a
5180MHz	
5200MHz	
5240MHz	

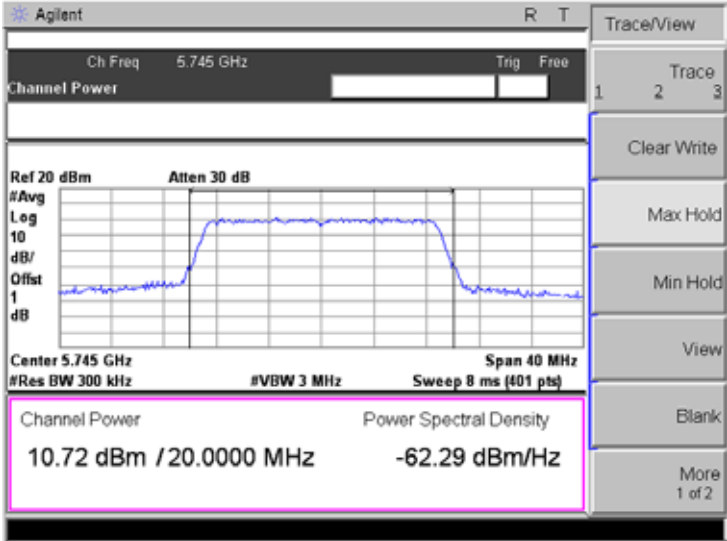
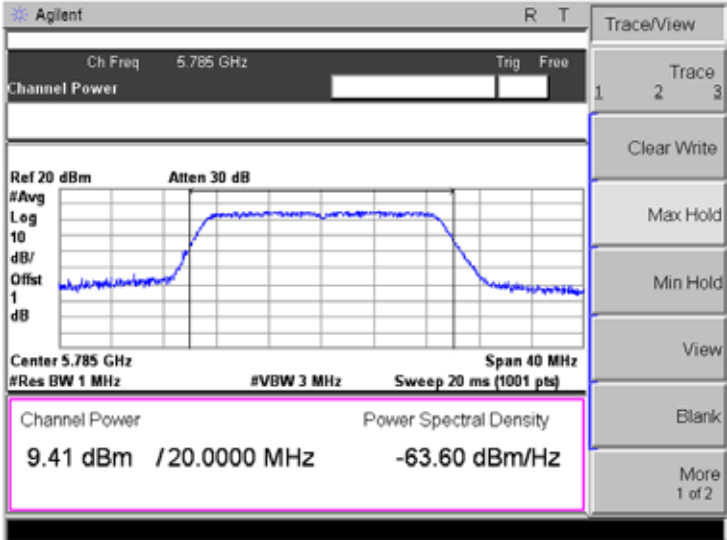
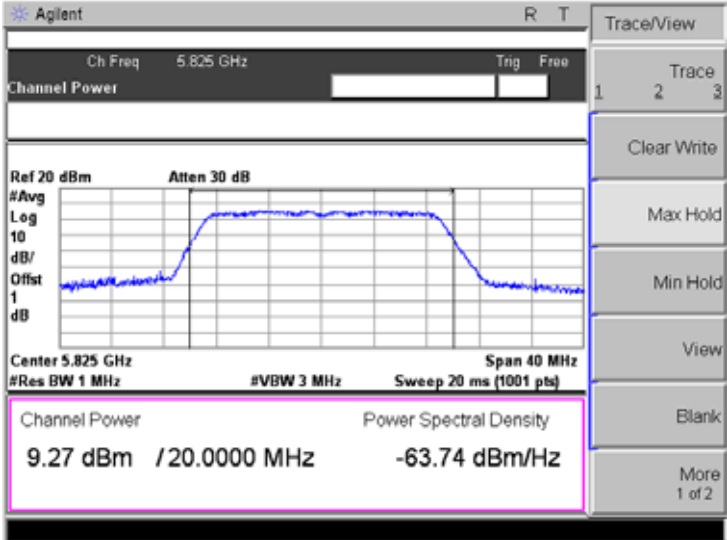
Mode:	802.11n-HT20
5180MHz	
5200MHz	
5240MHz	

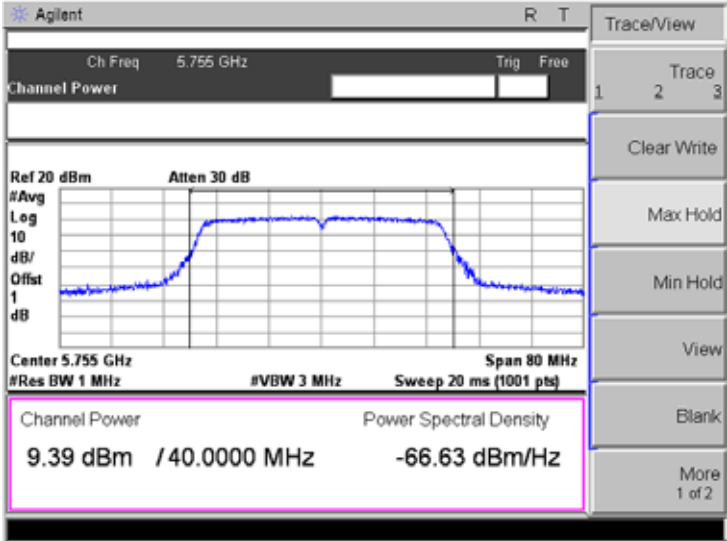
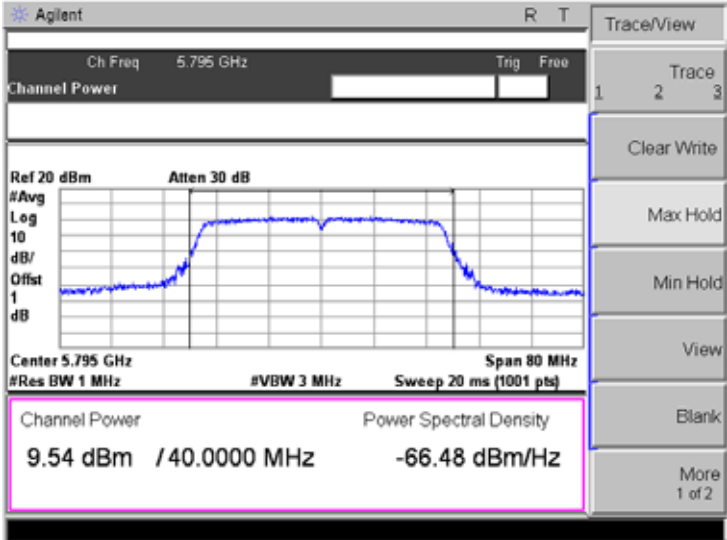
Mode:	802.11n-HT40
5190 MHz	
5230 MHz	

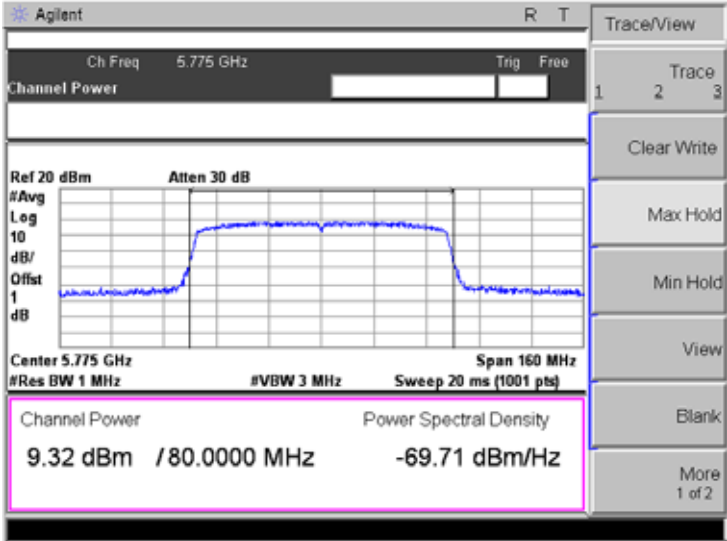
Mode:	802.11ac VH80
5210MHz	

➤ Antenna B: 5725-5850MHz

Mode:	802.11a
5745MHz	
5785MHz	
5825MHz	

Mode:	802.11n-HT20
5745MHz	
5785MHz	
5825MHz	

Mode:	802.11n-HT40
5755 MHz	 Agilent R T Ch Freq 5.755 GHz Trig Free Channel Power Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offst 1 dB Center 5.755 GHz Span 80 MHz #Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts) Channel Power Power Spectral Density 9.39 dBm / 40.0000 MHz -66.63 dBm/Hz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2
5795 MHz	 Agilent R T Ch Freq 5.795 GHz Trig Free Channel Power Ref 20 dBm Atten 30 dB #Avg Log 10 dB/ Offst 1 dB Center 5.795 GHz Span 80 MHz #Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts) Channel Power Power Spectral Density 9.54 dBm / 40.0000 MHz -66.48 dBm/Hz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2

Mode:	802.11ac VH80
5775 MHz	 Agilent R T Ch Freq 5.775 GHz Trig Free Channel Power Ref 20 dBm Atten 30 dB #Avg Log 10 dB/Offset 1 dB Center 5.775 GHz Span 160 MHz #Res BW 1 MHz #VBW 3 MHz Sweep 20 ms (1001 pts) Channel Power Power Spectral Density 9.32 dBm / 80.0000 MHz -69.71 dBm/Hz Trace/View Trace 1 2 3 Clear Write Max Hold Min Hold View Blank More 1 of 2

9. Radiated Spurious Emissions

9.1 Standard Applicable

According to §15.407(b), undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
 - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

According to §15.407(b)(6), Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.

According to §15.407(b)(7), The provisions of §15.205 apply to intentional radiators operating under this section.
789033 D02 v02r01 General UNII Test Procedures New Rules v01

If radiated measurements are performed, field strength is then converted to EIRP as follows:

$$\text{EIRP} = ((E \cdot d)^2) / 30$$

where:

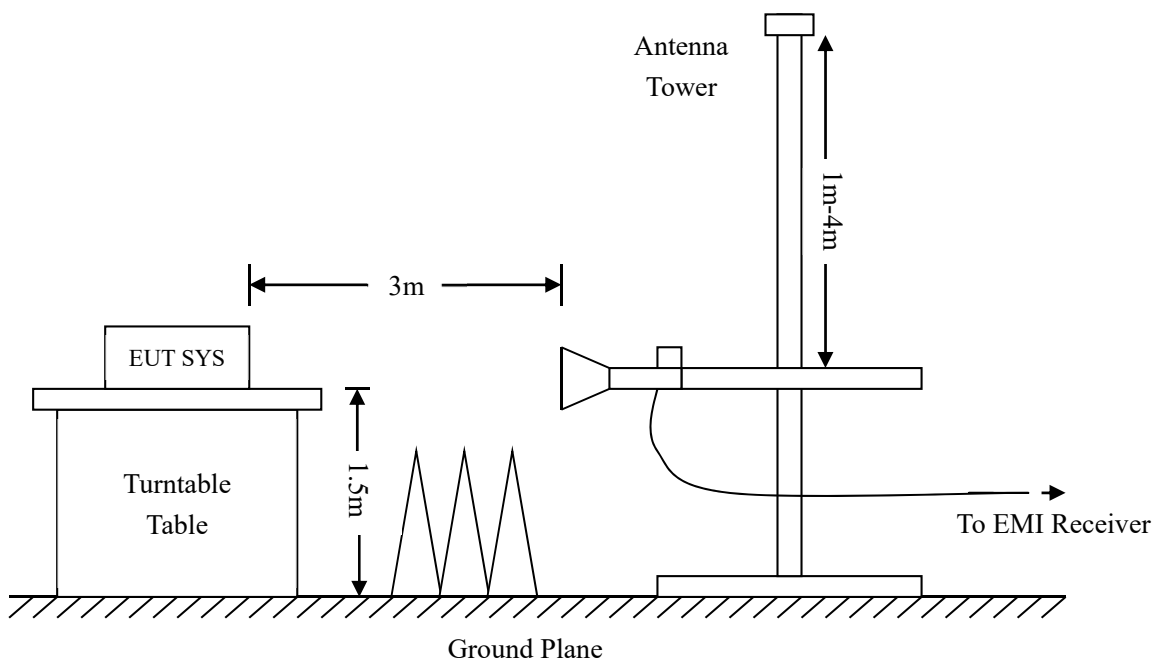
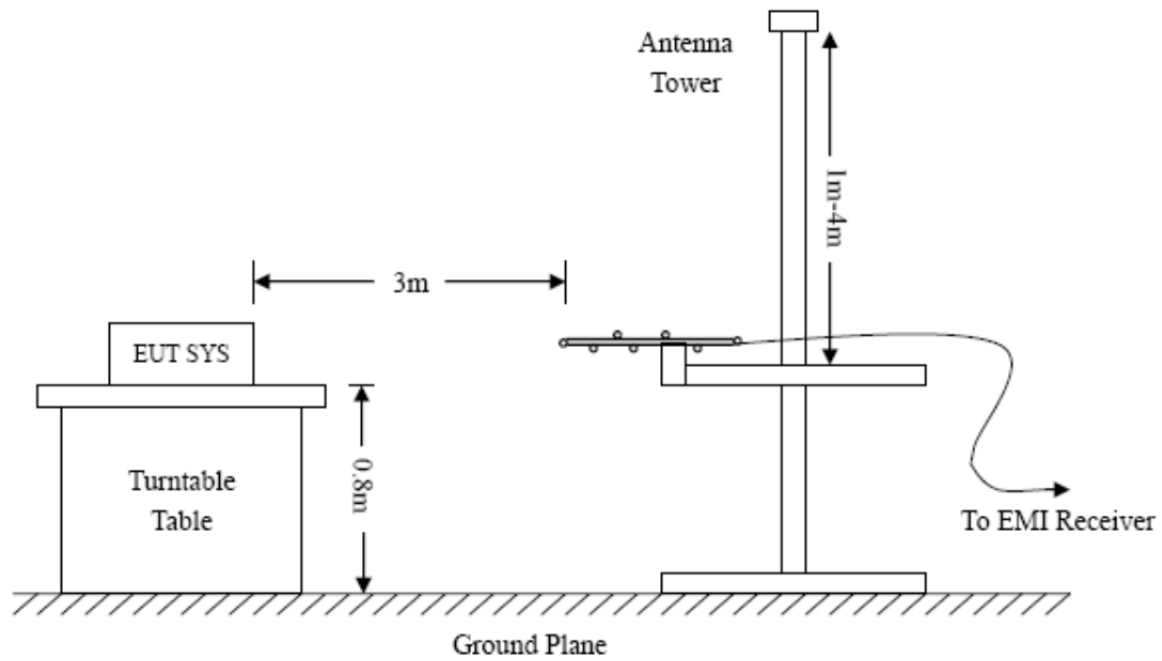
- E is the field strength in V/m;
- d is the measurement distance in meters;
- EIRP is the equivalent isotropically radiated power in watts.

9.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.407(b)(6) and FCC Part 15.209 Limit..

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.



9.3 Test Receiver Setup

During the radiated emission test for above 1GHz, the test receiver was set with the following configurations:

For peak detector:

RBW = 1000kHz, VBW = 3000kHz, Sweep Time = Auto

For average detector:

RBW = 1000kHz, VBW = 10Hz, Sweep Time = Auto

9.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

9.5 Summary of Test Results/Plots

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

➤ Spurious Emission From 30 MHz to 1 GHz

➤ Worst case Antenna B

➤ 5150-5250MHz

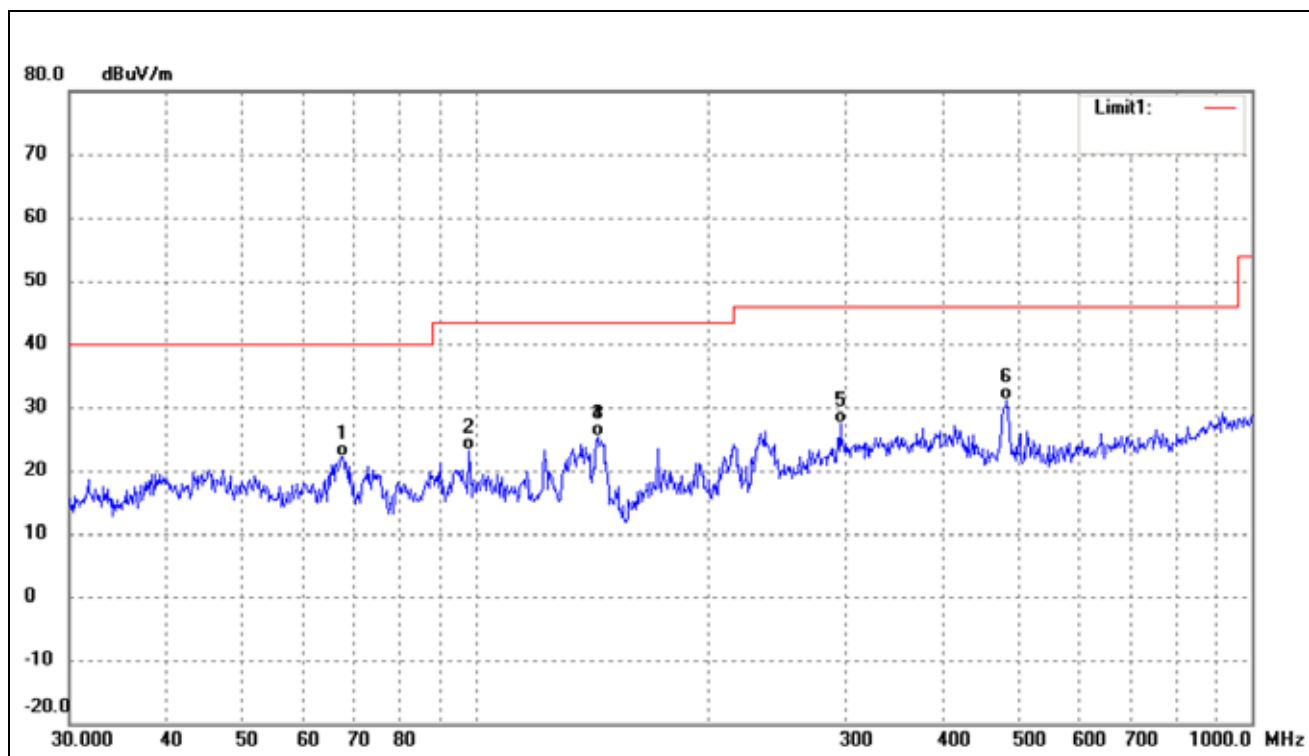
802.11a

Test Channel	5180MHz(Worst case)	Polarity:	Horizontal
--------------	---------------------	-----------	------------



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	38.8879	35.25	-14.59	20.66	40.00	-19.34	QP
2	65.5727	37.87	-16.21	21.66	40.00	-18.34	QP
3	143.3261	39.71	-16.99	22.72	43.50	-20.78	QP
4	274.1939	44.90	-10.02	34.88	46.00	-11.12	QP
5	295.1469	39.86	-8.24	31.62	46.00	-14.38	QP
6	482.2156	44.23	-8.04	36.19	46.00	-9.81	QP

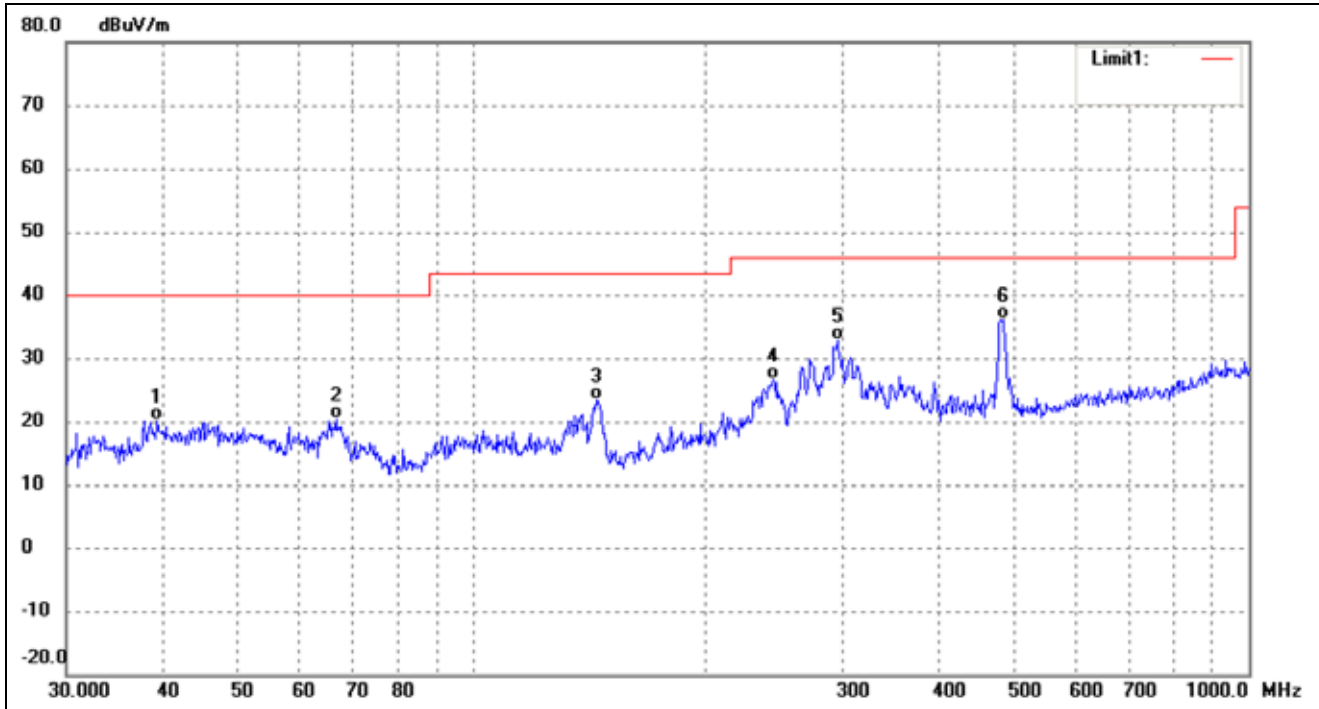
802.11a			
Test Channel	5180MHz(Worst case)	Polarity:	Vertical



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	67.4382	38.72	-16.49	22.23	40.00	-17.77	QP
2	98.1419	38.45	-15.29	23.16	43.50	-20.34	QP
3	143.8295	42.33	-16.94	25.39	43.50	-18.11	QP
4	143.8295	42.33	-16.94	25.39	43.50	-18.11	QP
5	295.1469	35.73	-8.24	27.49	46.00	-18.51	QP
6	483.9094	39.04	-8.02	31.02	46.00	-14.98	QP

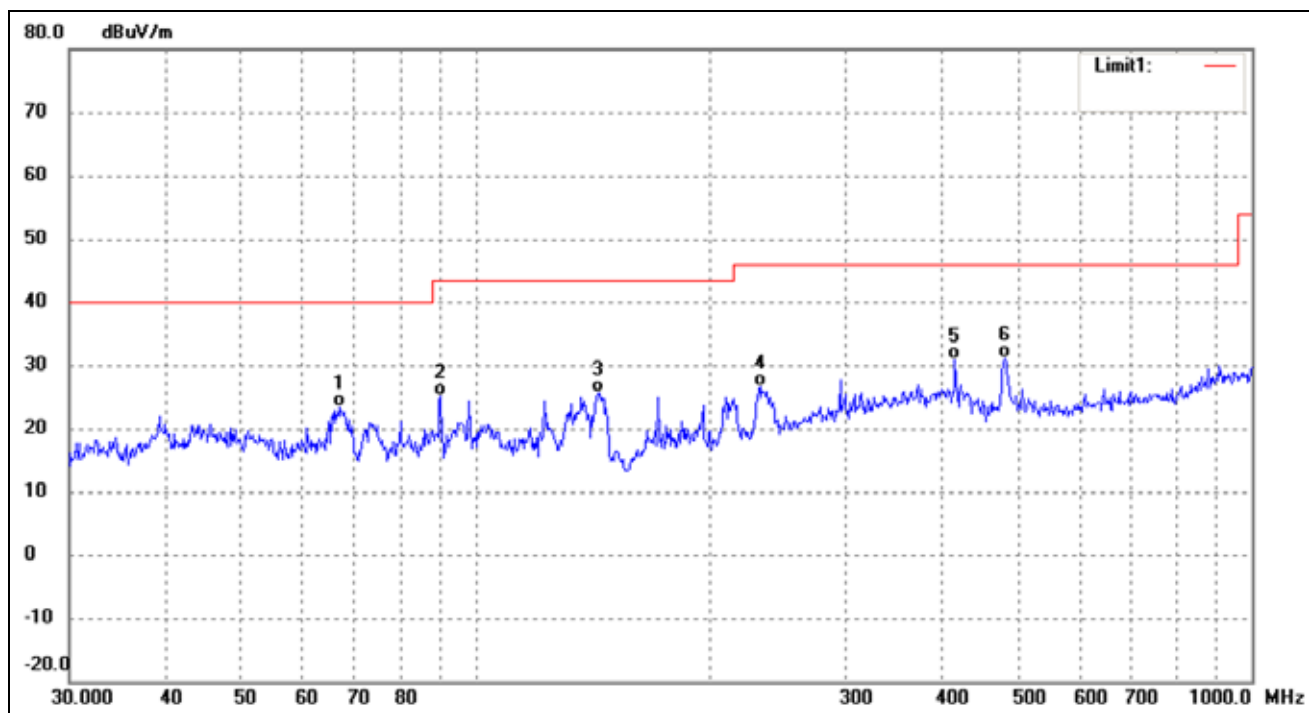
802.11n-HT40

Test Channel	5190MHz(worst case)	Polarity:	Horizontal
--------------	---------------------	-----------	------------



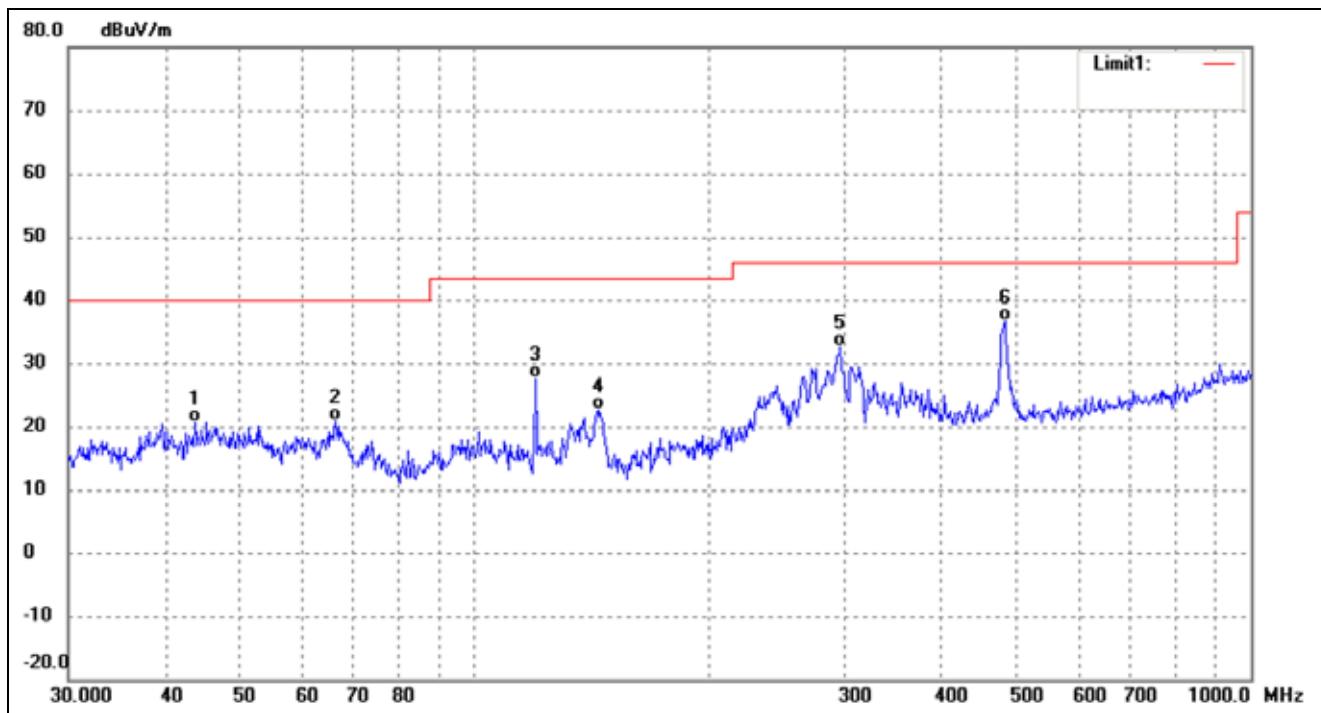
No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	39.2991	34.67	-14.42	20.25	40.00	-19.75	QP
2	66.7325	36.72	-16.39	20.33	40.00	-19.67	QP
3	144.3348	40.28	-16.89	23.39	43.50	-20.11	QP
4	244.2321	37.45	-10.87	26.58	46.00	-19.42	QP
5	295.1469	41.03	-8.24	32.79	46.00	-13.21	QP
6	482.2156	44.26	-8.04	36.22	46.00	-9.78	QP

802.11n-HT40			
Test Channel	5190MHz(worst case)	Polarity:	Vertical



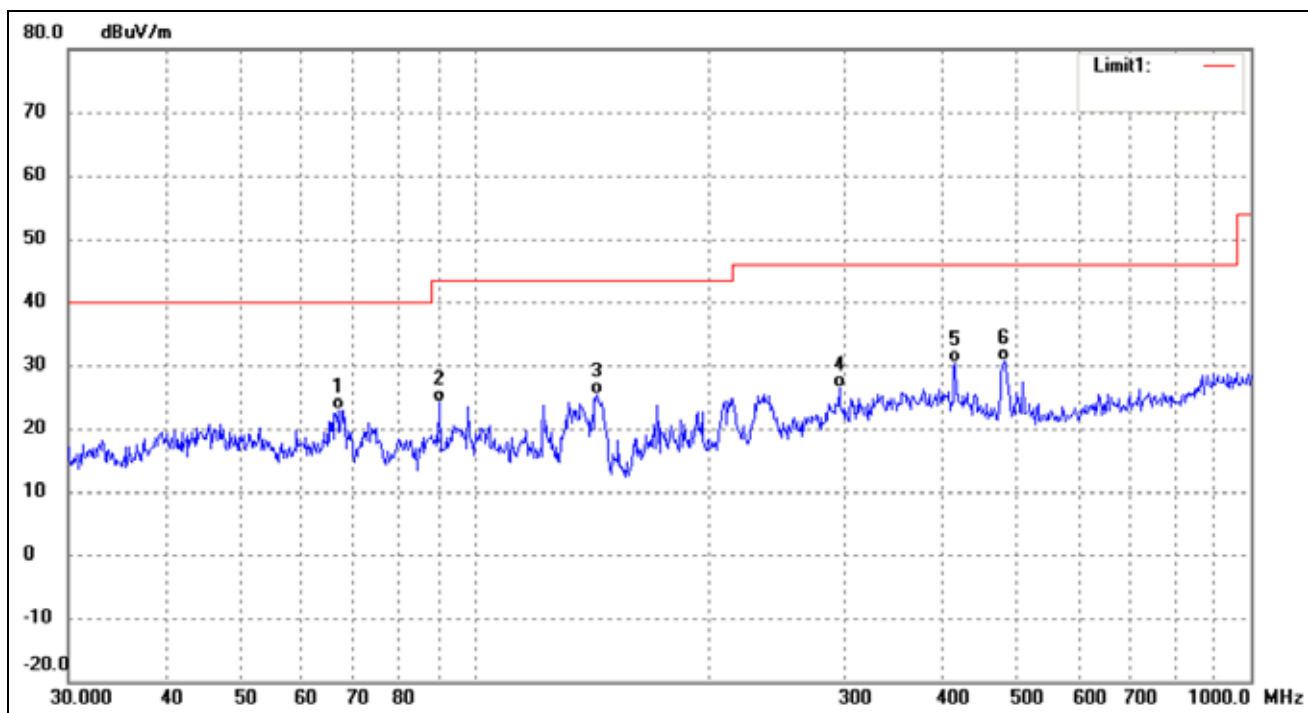
No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	66.7325	39.71	-16.39	23.32	40.00	-16.68	QP
2	90.2205	41.99	-16.86	25.13	43.50	-18.37	QP
3	143.8295	42.58	-16.94	25.64	43.50	-17.86	QP
4	233.3487	38.11	-11.53	26.58	46.00	-19.42	QP
5	414.7223	38.65	-7.89	30.76	46.00	-15.24	QP
6	480.5276	39.09	-8.05	31.04	46.00	-14.96	QP

802.11ac-HT80			
Test Channel	5210MHz(worst case)	Polarity:	Horizontal



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	43.6585	34.59	-13.99	20.60	40.00	-19.40	QP
2	66.2662	37.28	-16.32	20.96	40.00	-19.04	QP
3	119.8556	43.14	-15.61	27.53	43.50	-15.97	QP
4	144.8418	39.49	-16.84	22.65	43.50	-20.85	QP
5	296.1836	40.77	-8.15	32.62	46.00	-13.38	QP
6	482.2156	44.63	-8.04	36.59	46.00	-9.41	QP

802.11ac-HT80			
Test Channel	5210MHz(worst case)	Polarity:	Vertical

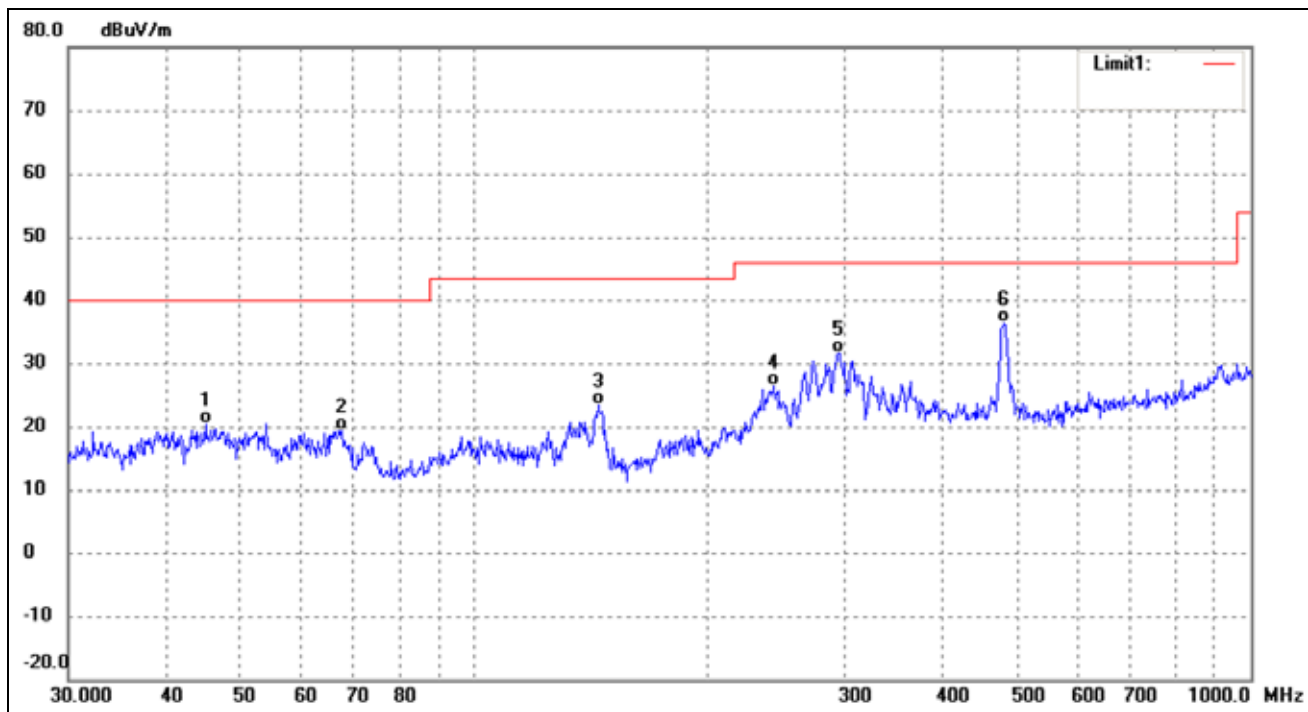


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	66.7325	39.23	-16.39	22.84	40.00	-17.16	QP
2	90.2205	41.02	-16.86	24.16	43.50	-19.34	QP
3	143.8295	42.37	-16.94	25.43	43.50	-18.07	QP
4	295.1469	34.70	-8.24	26.46	46.00	-19.54	QP
5	416.1791	38.18	-7.89	30.29	46.00	-15.71	QP
6	480.5276	38.76	-8.05	30.71	46.00	-15.29	QP

➤ Antenna B: 5725-5850MHz

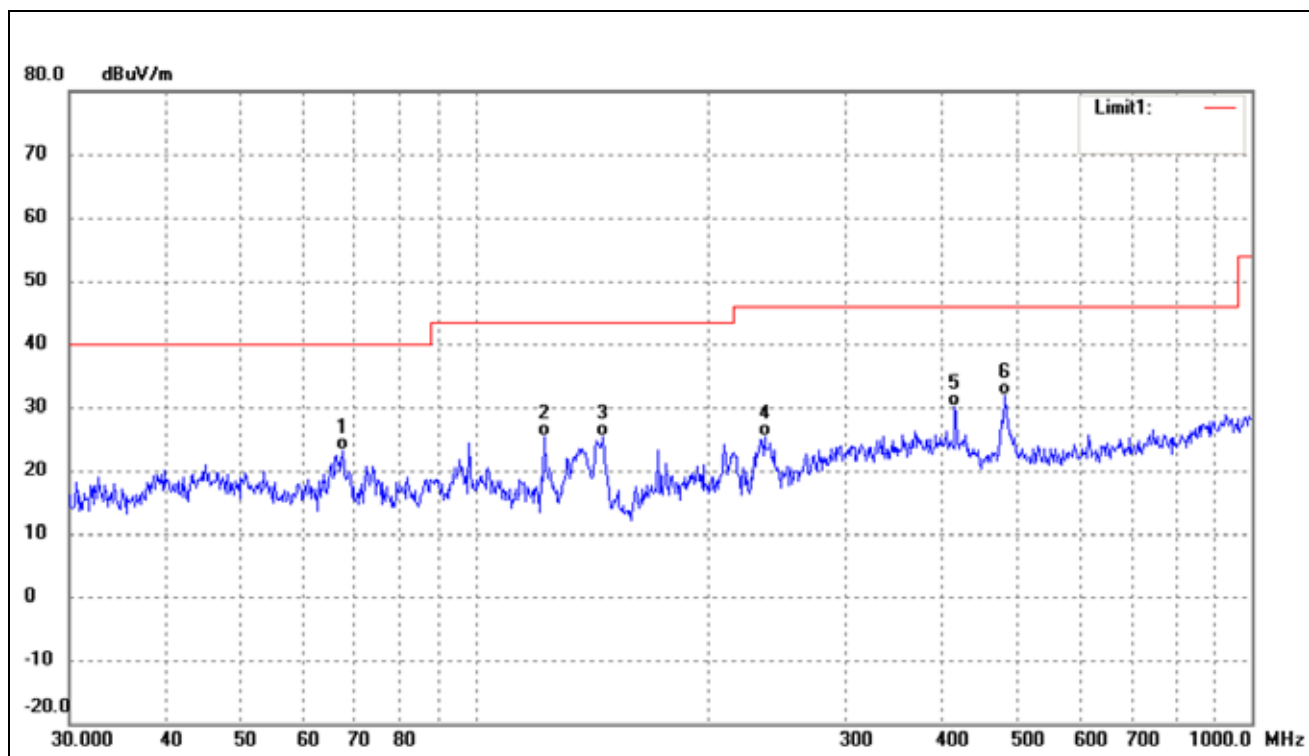
802.11a

Test Channel	5745MHz(worst case)	Polarity:	Horizontal
--------------	---------------------	-----------	------------



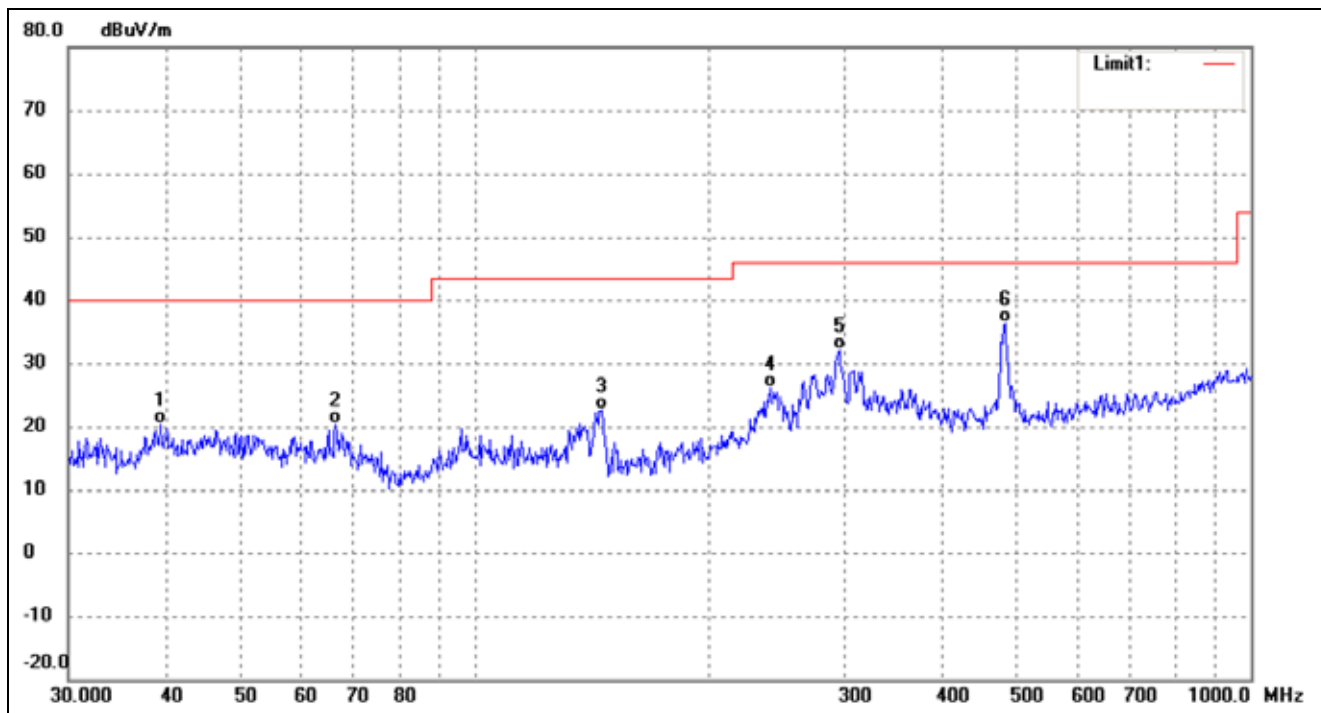
No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	45.0583	34.23	-13.93	20.30	40.00	-19.70	QP
2	67.4382	35.93	-16.49	19.44	40.00	-20.56	QP
3	144.3348	40.23	-16.89	23.34	43.50	-20.16	QP
4	243.3772	37.25	-10.92	26.33	46.00	-19.67	QP
5	294.1137	40.02	-8.34	31.68	46.00	-14.32	QP
6	480.5276	44.42	-8.05	36.37	46.00	-9.63	QP

802.11a			
Test Channel	5745MHz(worst case)	Polarity:	Vertical



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	67.4382	39.51	-16.49	23.02	40.00	-16.98	QP
2	122.8340	41.73	-16.34	25.39	43.50	-18.11	QP
3	145.8611	42.23	-16.75	25.48	43.50	-18.02	QP
4	235.8164	36.85	-11.38	25.47	46.00	-20.53	QP
5	414.7223	38.05	-7.89	30.16	46.00	-15.84	QP
6	480.5276	39.82	-8.05	31.77	46.00	-14.23	QP

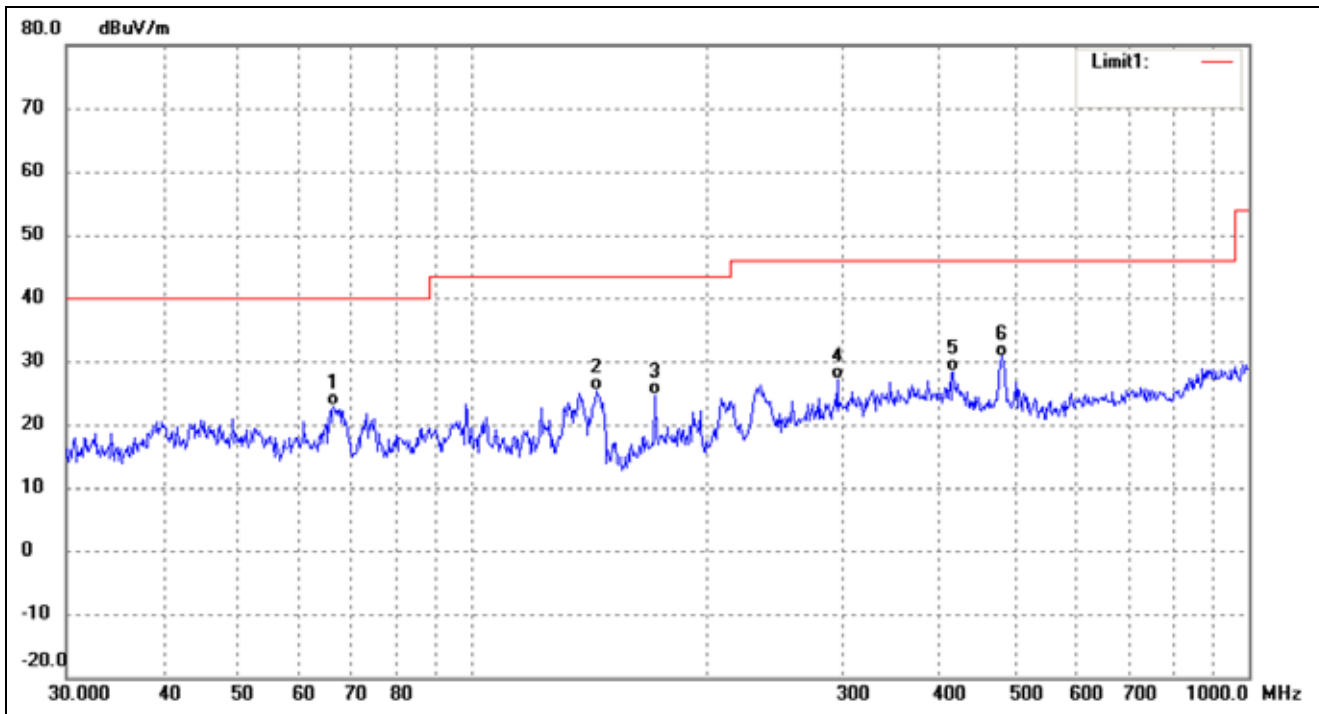
802.11ac-HT80			
Test Channel	5775MHz(worst case)	Polarity:	Horizontal



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	39.4372	34.70	-14.37	20.33	40.00	-19.67	QP
2	66.2662	36.71	-16.32	20.39	40.00	-19.61	QP
3	145.8611	39.48	-16.75	22.73	43.50	-20.77	QP
4	240.8304	37.18	-11.07	26.11	46.00	-19.89	QP
5	295.1469	40.33	-8.24	32.09	46.00	-13.91	QP
6	482.2156	44.31	-8.04	36.27	46.00	-9.73	QP

802.11ac-HT80

Test Channel	5775MHz(worst case)	Polarity:	Vertical
--------------	---------------------	-----------	----------



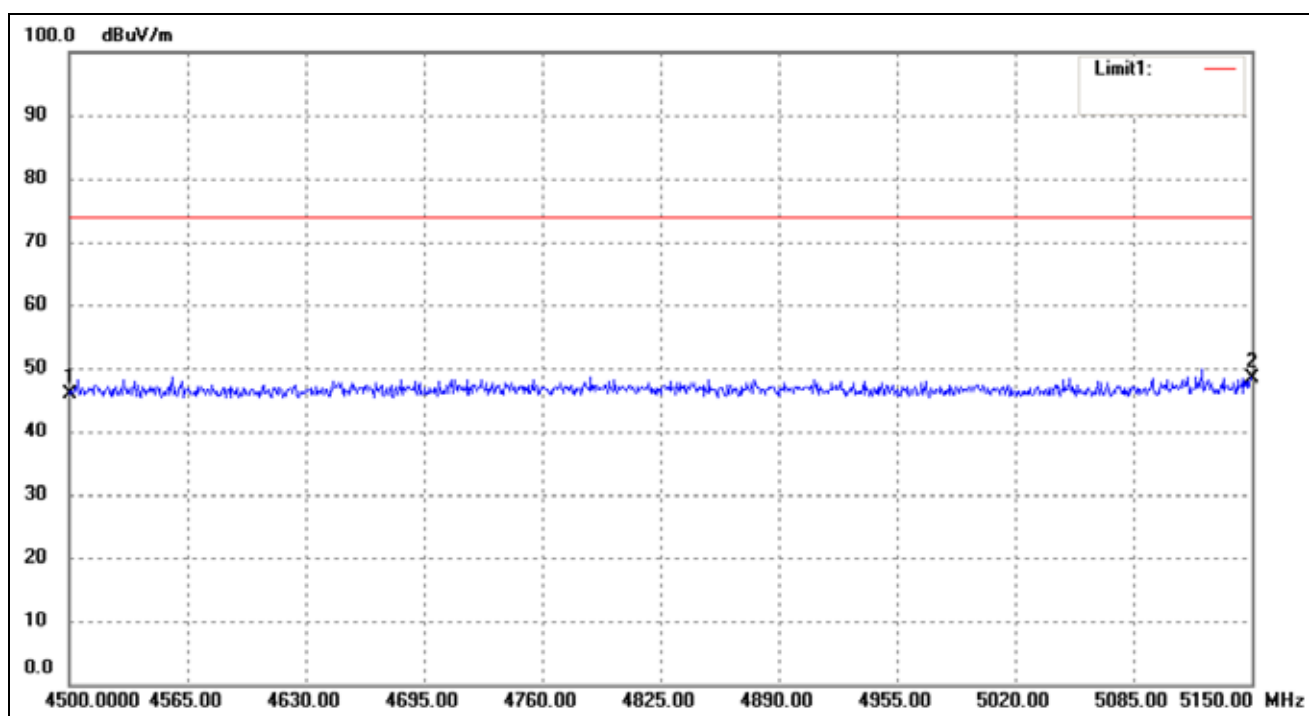
No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	66.2662	39.18	-16.32	22.86	40.00	-17.14	QP
2	144.3348	42.20	-16.89	25.31	43.50	-18.19	QP
3	171.9946	40.13	-15.51	24.62	43.50	-18.88	QP
4	295.1469	35.45	-8.24	27.21	46.00	-18.79	QP
5	416.1791	36.21	-7.89	28.32	46.00	-17.68	QP
6	480.5276	38.80	-8.05	30.75	46.00	-15.25	QP

➤ Spurious Emission above 1GHz

Worst case at 802.11a

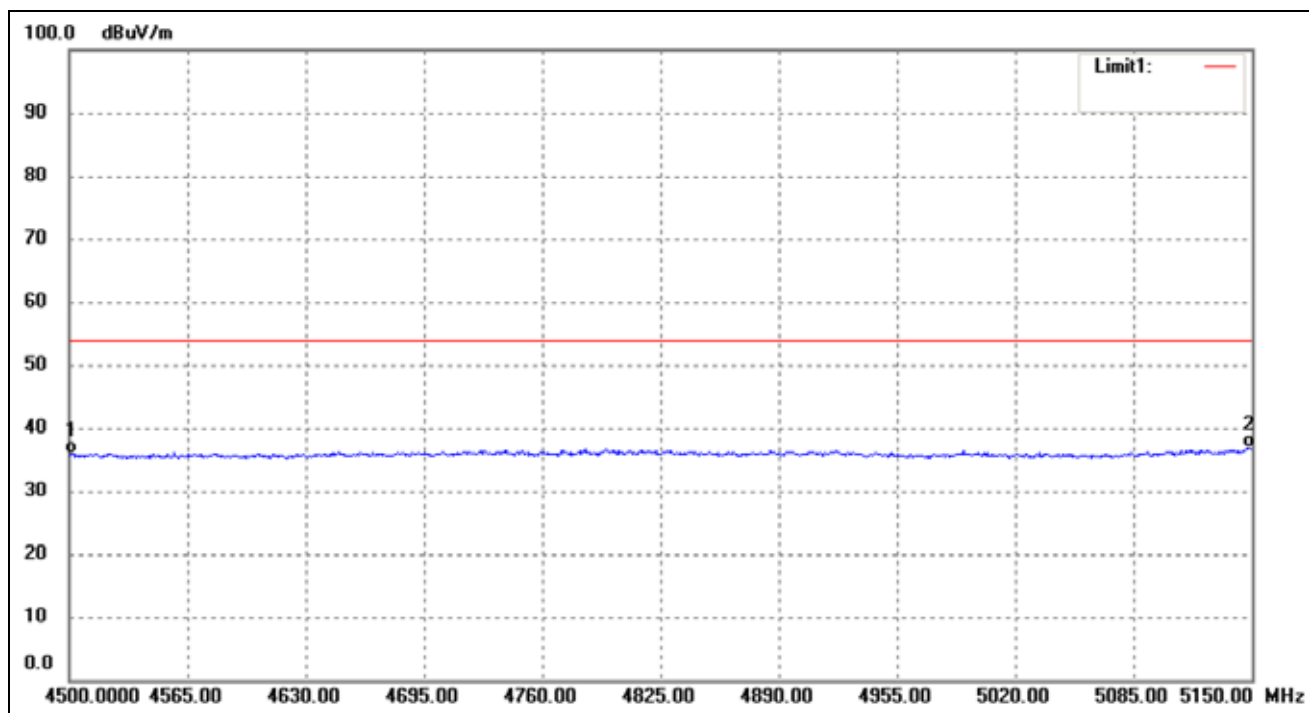
➤ Antenna A

802.11a- Restricted Bandedge			
Test Channel	band 5.15-5.25GHz	Polarity:	Vertical(worst case)



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4500.000	50.69	-4.71	45.98	74.00	-28.02	peak
2	5150.000	52.65	-4.32	48.33	74.00	-25.67	peak

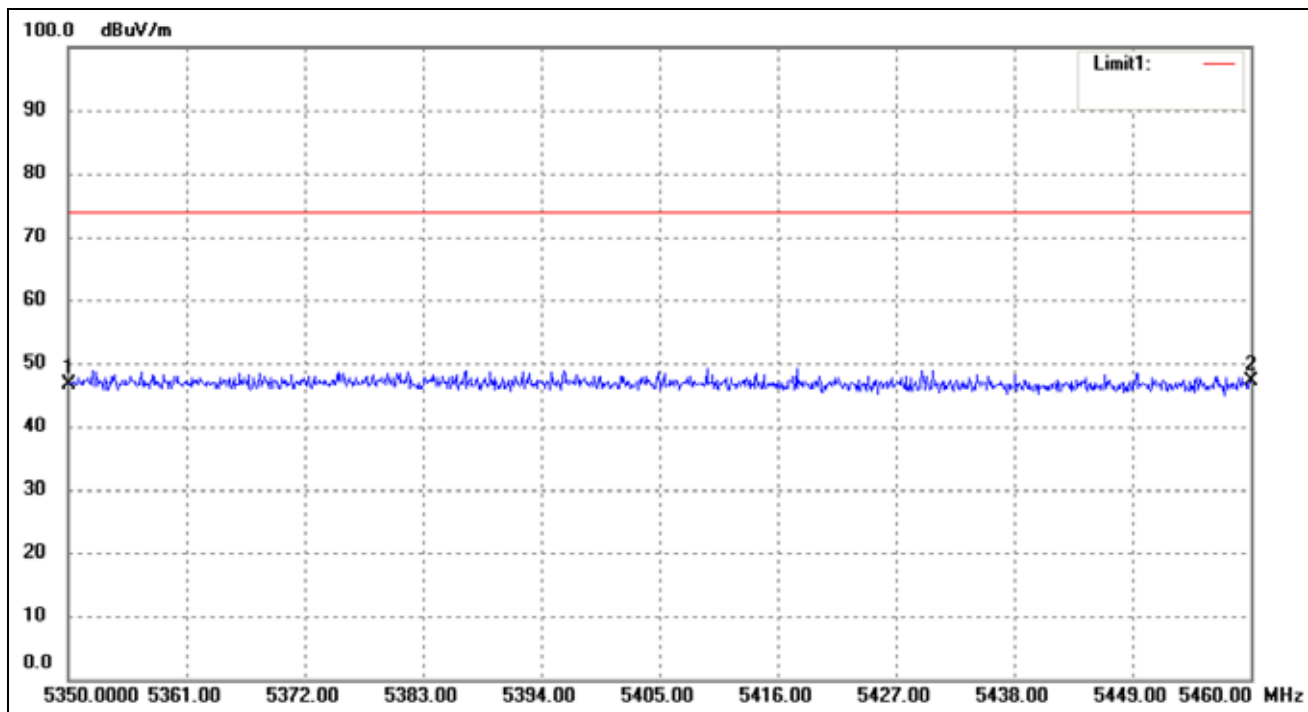
802.11a- Restricted Bandedge			
Test Channel	band 5.35-5.46GHz	Polarity:	Vertical(worst case)



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4500.000	40.50	-4.71	35.79	54.00	-18.21	AVG
2	5150.000	41.12	-4.32	36.80	54.00	-17.20	AVG

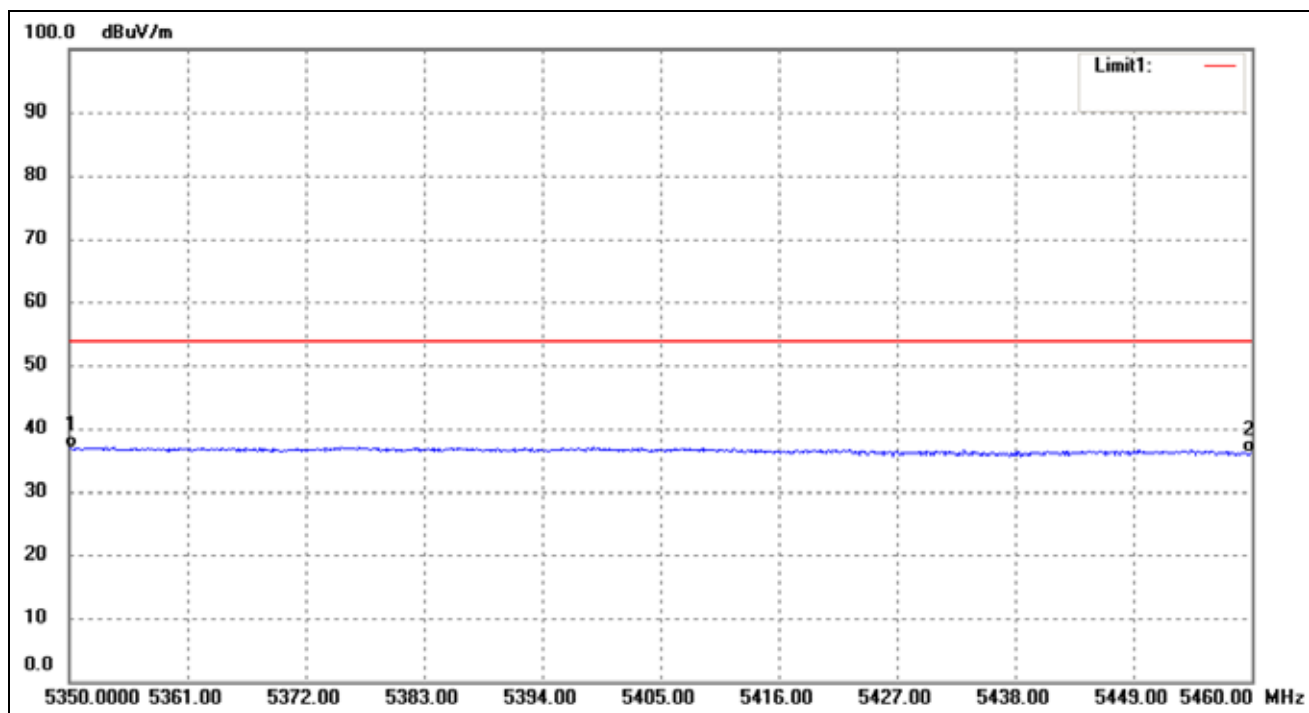
802.11a- Restricted Bandedge

Test Channel	band 5.35-5.46GHz	Polarity:	Vertical(worst case)
--------------	-------------------	-----------	----------------------



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	50.84	-4.21	46.63	74.00	-27.37	peak
2	5460.000	51.37	-4.16	47.21	74.00	-26.79	peak

802.11a- Restricted Bandedge			
Test Channel	band 5.35-5.46GHz	Polarity:	Vertical(worst case)



No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5350.000	41.14	-4.21	36.93	54.00	-17.07	AVG
2	5460.000	40.35	-4.16	36.19	54.00	-17.81	AVG

Note: The Restricted Bandedge was tested in Horizontal /Vertical and the worst case position data was reported.

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11a)
Worst case
- Antenna B
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5180MHz)							
10360	57.24	7.11	64.35	74	-9.65	H	PK
15540	39.29	8.22	47.51	54	-6.49	H	AV
10360	58.94	7.11	66.05	74	-7.95	V	PK
15540	37.75	8.22	45.97	54	-8.03	V	AV
Middle Channel (5200MHz)							
10400	57.56	7.22	64.78	74	-9.22	H	PK
15600	35.42	8.67	44.09	54	-9.91	H	AV
10400	57.11	7.22	64.33	74	-9.67	V	PK
15600	38.16	8.67	46.83	54	-7.17	V	AV
High Channel (5240MHz)							
10480	55.74	7.69	63.43	74	-10.57	H	PK
15720	38.98	8.93	47.91	54	-6.09	H	AV
10480	60.31	7.69	68.00	74	-6.00	V	PK
15720	39.46	8.93	48.39	54	-5.61	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5745MHz)							
11490	57.27	9.45	66.72	74	-7.28	H	PK
17235	34.91	10.36	45.27	54	-8.73	H	AV
11490	55.37	9.45	64.82	74	-9.18	V	PK
17235	36.25	10.36	46.61	54	-7.39	V	AV
Middle Channel (5785MHz)							
11570	57.87	9.62	67.49	74	-6.51	H	PK
17355	36.61	10.67	47.28	54	-6.72	H	AV
11570	57.53	9.62	67.15	74	-6.85	V	PK
17355	36.09	10.67	46.76	54	-7.24	V	AV
High Channel (5825MHz)							
11650	55.96	9.84	65.80	74	-8.20	H	PK
17475	33.17	10.95	44.12	54	-9.88	H	AV
11650	55.24	9.84	65.08	74	-8.92	V	PK
17475	36.62	10.95	47.57	54	-6.43	V	AV

➤ Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-35.74	-27
Highest	Above 5350	-42.68	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-37.39	-27
	5715 to 5725	-40.45	-17
Highest	5850 to 5860	-40.56	-17
	Above 5860	-43.49	-27
Note: the data just list the worst cases			

➤ For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11HT20)

➤ Antenna A & Antenna B

➤ Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5180MHz)							
10360	56.42	7.11	63.53	74	-10.47	H	PK
15540	39.72	8.22	47.94	54	-6.06	H	AV
10360	60.47	7.11	67.58	74	-6.42	V	PK
15540	38.43	8.22	46.65	54	-7.35	V	AV
Middle Channel (5200MHz)							
10400	59.86	7.22	67.08	74	-6.92	H	PK
15600	35.71	8.67	44.38	54	-9.62	H	AV
10400	57.40	7.22	64.62	74	-9.38	V	PK
15600	37.04	8.67	45.71	54	-8.29	V	AV
High Channel (5240MHz)							
10480	55.21	7.69	62.90	74	-11.10	H	PK
15720	39.25	8.93	48.18	54	-5.82	H	AV
10480	60.20	7.69	67.89	74	-6.11	V	PK
15720	38.00	8.93	46.93	54	-7.07	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5745MHz)							
11490	57.47	9.45	66.92	74	-7.08	H	PK
17235	36.69	10.36	47.05	54	-6.95	H	AV
11490	55.31	9.45	64.76	74	-9.24	V	PK
17235	36.40	10.36	46.76	54	-7.24	V	AV
Middle Channel (5785MHz)							
11570	57.03	9.62	66.65	74	-7.35	H	PK
17355	35.19	10.67	45.86	54	-8.14	H	AV
11570	56.45	9.62	66.07	74	-7.93	V	PK
17355	37.21	10.67	47.88	54	-6.12	V	AV
High Channel (5825MHz)							
11650	55.23	9.84	65.07	74	-8.93	H	PK
17475	34.84	10.95	45.79	54	-8.21	H	AV
11650	57.01	9.84	66.85	74	-7.15	V	PK
17475	36.64	10.95	47.59	54	-6.41	V	AV

➤ Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-32.14	-27
Highest	Above 5350	-37.76	-27

Note: the data just list the worst cases

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-46.34	-27
	5715 to 5725	-34.78	-17
Highest	5850 to 5860	-35.70	-17
	Above 5860	-41.45	-27

Note: the data just list the worst cases

- For the frequency band 5.15-5.25GHz 5.725-5.850GHz (802.11n HT40)
- Antenna A & Antenna B
- Harmonics And Spurious Emissions

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5190MHz)							
10380	59.19	7.25	66.44	74	-7.56	H	PK
15570	37.51	8.33	45.84	54	-8.16	H	AV
10380	59.44	7.25	66.69	74	-7.31	V	PK
15570	38.80	8.33	47.13	54	-6.87	V	AV
High Channel (5230MHz)							
10460	57.34	7.54	64.88	74	-9.12	H	PK
15690	39.47	8.86	48.33	54	-5.67	H	AV
10460	60.81	7.54	68.35	74	-5.65	V	PK
15690	37.43	8.86	46.29	54	-7.71	V	AV

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel (5755MHz)							
11510	55.60	9.65	65.25	74	-8.75	H	PK
17265	36.81	10.87	47.68	54	-6.32	H	AV
11510	57.22	9.65	66.87	74	-7.13	V	PK
17265	36.34	10.87	47.21	54	-6.79	V	AV
High Channel (5795MHz)							
11590	55.62	9.81	65.43	74	-8.57	H	PK
17385	33.77	10.89	44.66	54	-9.34	H	AV
11590	57.74	9.81	67.55	74	-6.45	V	PK
17385	36.69	10.89	47.58	54	-6.42	V	AV

- Out of Band edge 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-36.79	-27
Highest	Above 5350	-40.55	-27
Note: the data just list the worst cases			

➤ Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-40.25	-27
	5715 to 5725	-40.65	-17
Highest	5850 to 5860	-42.88	-17
	Above 5860	-40.54	-27
Note: the data just list the worst cases			

Note: this EUT was tested in the low, high channel and the worst case position data was reported.

- For the frequency band 5.15-5.25GHz, 5.725-5.850GHz (802.11ac VHT80)
- Antenna A & Antenna B
- Harmonics And Spurious Emissions
-

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
5210MHz							
10420	58.48	7.33	65.81	74	-8.19	H	PK
15630	36.17	8.75	44.92	54	-9.08	H	AV
10420	57.39	7.33	64.72	74	-9.28	V	PK
15630	36.15	8.75	44.90	54	-9.10	V	AV

➤

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB	(dBuV/m)	(dBuV/m)	(dB)	H/V	
5775MHz							
11550	56.52	9.54	66.06	74	-7.94	H	PK
17325	37.91	10.59	48.50	54	-5.50	H	AV
11550	56.72	9.54	66.26	74	-7.74	V	PK
17325	34.40	10.59	44.99	54	-9.01	V	AV

- Out of Band edge for 5150-5250MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5150	-32.37	-27
Highest	Above 5350	-31.81	-27
Note: the data just list the worst cases			

- Out of Band edge for 5725-5850MHz

Test CH.	Test Segment	Result	Limit
	MHz	dBm/MHz	dBm/MHz
Lowest	Below 5715	-43.81	-27
	5715 to 5725	-31.45	-17
Highest	5850 to 5860	-29.63	-17
	Above 5860	-39.04	-27
Note: the data just list the worst cases			

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

10. Frequency Stability

10.1 Standard Applicable

According to §15.407(g), manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

10.2 Test Procedure

According to §2.1055, the following test procedure was performed.

The Frequency Stability is measured directly with a Frequency Domain Analyzer. Frequency Deviation in ppm is calculated from the measured peak to peak value.

The Carrier Frequency Stability over Power Supply Voltage and over Temperature is measured with a Frequency Domain Analyzer in histogram mode.

10.3 Summary of Test Results/Plots

ANT A

U-NII-1:5150-5250MHz worst case at 802.11a middle channel				
Voltage(%)	Power(VDC)	TEMP(°C)	Freq.Dev(Hz)	Deviation
100%	5	-30	109	0.0209
100%		-20	130	0.0249
100%		-10	137	0.0264
100%		0	129	0.0248
100%		+10	128	0.0246
100%		+20	154	0.0295
100%		+30	90	0.0173
100%		+40	150	0.0288
100%		+50	89	0.0170
Low Battery power	4.5	+20	161	0.0310
High Battery power	5.5	+20	141	0.0271

U-NII-1:5725-5850MHz worst case at 802.11a middle channel				
Voltage(%)	Power(VDC)	TEMP(°C)	Freq.Dev(Hz)	Deviation
100%	5	-30	86	0.0148
100%		-20	125	0.0216
100%		-10	137	0.0236
100%		0	127	0.0220
100%		+10	115	0.0198
100%		+20	151	0.0261
100%		+30	98	0.0169
100%		+40	155	0.0268
100%		+50	84	0.0146
Low Battery power	4.5	+20	156	0.0270
High Battery power	5.5	+20	145	0.0251

ANT B

U-NII-1:5150-5250MHz worst case at 802.11a middle channel				
Voltage(%)	Power(VDC)	TEMP(°C)	Freq.Dev(Hz)	Deviation
100%	5	-30	88	0.0170
100%		-20	127	0.0244
100%		-10	143	0.0275
100%		0	133	0.0256
100%		+10	120	0.0230
100%		+20	150	0.0288
100%		+30	102	0.0196
100%		+40	155	0.0297
100%		+50	81	0.0156
Low Battery power	4.5	+20	155	0.0297
High Battery power	5.5	+20	148	0.0284

U-NII-1:5725-5850MHz worst case at 802.11a middle channel				
Voltage(%)	Power(VDC)	TEMP(°C)	Freq.Dev(Hz)	Deviation
100%	5	-30	94	0.0162
100%		-20	121	0.0208
100%		-10	143	0.0246
100%		0	133	0.0230
100%		+10	116	0.0201
100%		+20	152	0.0263
100%		+30	104	0.0179
100%		+40	156	0.0269
100%		+50	84	0.0145
Low Battery power	4.5	+20	155	0.0268
High Battery power	5.5	+20	144	0.0248

***** END OF REPORT *****