

MEASUREMENT REPORT

FCC ID : VW3FAST380BA
Applicant : SAGEMCOM BROADBAND SAS
Application Type : Certification
Product : Tri-band WIFI7 router
Model No. : Fast 380ba
Brand Name : Sagemcom
FCC Classification : Digital Transmission System (DTS)
FCC Rule Part(s) : Part15 Subpart C (Section 15.247)
Received Date : September 18, 2024
Test Date : September 20 ~ 27, 2024

Tested By : *Owen Tsai*
(Owen Tsai)
Reviewed By : *Paddy Chen*
(Paddy Chen)
Approved By : *Chenz Ker*
(Chenz Ker)



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Taiwan) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
2409TW0114-U3	1.0	Original Report	2024-10-18	

Note:

The original report number is 2406RSU024-U1 from MRT Technology (Suzhou) Co., Ltd.
The bottom of PCB change absorbers to shielding cover, DDR bottom shielding, 5G FEM GND via
and WiFi 6G Bottom shielding layout change, so evaluate the power, band edge and Spurious
emissions to do spot check testing.

CONTENTS

Description	Page
1. INTRODUCTION	7
1.1. Scope	7
1.2. MRT Test Location	7
2. PRODUCT INFORMATION	8
2.1. Feature of Equipment under Test	8
2.2. Product Specification Subjective to this Report	9
2.3. Working Frequencies for this report	10
2.4. Description of Available Antennas	11
2.5. Test Mode	12
2.6. Configuration of Test System	13
2.7. Test System Details	14
2.8. Description of Test Software	14
2.9. Applied Standards	14
2.10. Duty Cycle	15
2.11. Test Configuration	16
2.12. EMI Suppression Device(s)/Modifications	16
2.13. Labeling Requirements	16
3. DESCRIPTION of TEST	17
3.1. Evaluation Procedure	17
3.2. AC Line Conducted Emissions	17
3.3. Radiated Emissions	18
4. ANTENNA REQUIREMENTS	19
5. TEST EQUIPMENT CALIBRATION DATE	20
6. MEASUREMENT UNCERTAINTY	21
6.1. Decision Rules	21
6.2. Measurement Uncertainty	21
7. TEST RESULT	22
7.1. Summary	22
7.2. 6dB Bandwidth Measurement	23
7.2.1. Test Limit	23
7.2.2. Test Procedure used	23
7.2.3. Test Setting	23
7.2.4. Test Setup	23

7.2.5. Test Result.....	24
7.3. Output Power Measurement.....	25
7.3.1. Test Limit	25
7.3.2. Test Procedure Used.....	25
7.3.3. Test Setting.....	25
7.3.4. Test Setup	25
7.3.5. Test Result.....	26
7.4. Power Spectral Density Measurement.....	28
7.4.1. Test Limit	28
7.4.2. Test Procedure Used.....	28
7.4.3. Test Setting.....	28
7.4.4. Test Setup	29
7.4.5. Test Result.....	30
7.5. Conducted Band Edge and Out-of-Band Emissions	31
7.5.1. Test Limit	31
7.5.2. Test Procedure Used.....	31
7.5.3. Test Setting.....	31
7.5.4. Test Setup	32
7.5.5. Test Result.....	33
7.6. Radiated Spurious Emission Measurement.....	34
7.6.1. Test Limit	34
7.6.2. Test Procedure Used.....	34
7.6.3. Test Setting.....	34
7.6.4. Test Setup	36
7.6.5. Test Result.....	37
7.7. Radiated Restricted Band Edge Measurement.....	47
7.7.1. Test Limit	47
7.7.2. Test Procedure Used.....	48
7.7.3. Test Setting.....	48
7.7.4. Test Setup	49
7.7.5. Test Result.....	50
7.8. AC Conducted Emissions Measurement	70
7.8.1. Test Limit	70
7.8.2. Test Setup	70
7.8.3. Test Result.....	71
8. CONCLUSION	72
Appendix A : Test Setup Photograph	73
Appendix B : External Photograph.....	73

Appendix C : Internal Photograph.....73

General Information

Applicant	SAGEMCOM BROADBAND SAS
Applicant Address	4 ALLEE DES MESSAGERIES 92271 BOIS-COLOMBES CEDEX - FRANCE
Manufacturer	SAGEMCOM BROADBAND SAS
Manufacturer Address	4 ALLEE DES MESSAGERIES 92271 BOIS-COLOMBES CEDEX - FRANCE
Test Site	MRT Technology (Taiwan) Co., Ltd
Test Site Address	No. 38, Fuxing Second Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C)
MRT FCC Registration No.	291082
FCC Rule Part(s)	Part 15.247
Test Device Serial No.	#1-1 <input type="checkbox"/> Production <input checked="" type="checkbox"/> Pre-Production <input type="checkbox"/> Engineering

Test Facility / Accreditations

1. MRT facility is a FCC registered (Reg. No. 291082) test facility with the site description report on file and is designated by the FCC as an Accredited Test Firm.
2. MRT facility is an IC registered (MRT Reg. No. 21723) test laboratory with the site description on file at Industry Canada.
3. MRT Lab is accredited to ISO 17025 by the Taiwan Accreditation Foundation (TAF Cert. No. 3261) in EMC, Telecommunications and Radio testing for FCC (Designation Number: TW3261), Industry Canada, EU and TELEC Rules.


1. INTRODUCTION

1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada and Certification and Engineering Bureau.

1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taoyuan City. These measurement tests were conducted at the MRT Technology (Taiwan) Co., Ltd. Facility located at No.38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 33377, Taiwan (R.O.C).

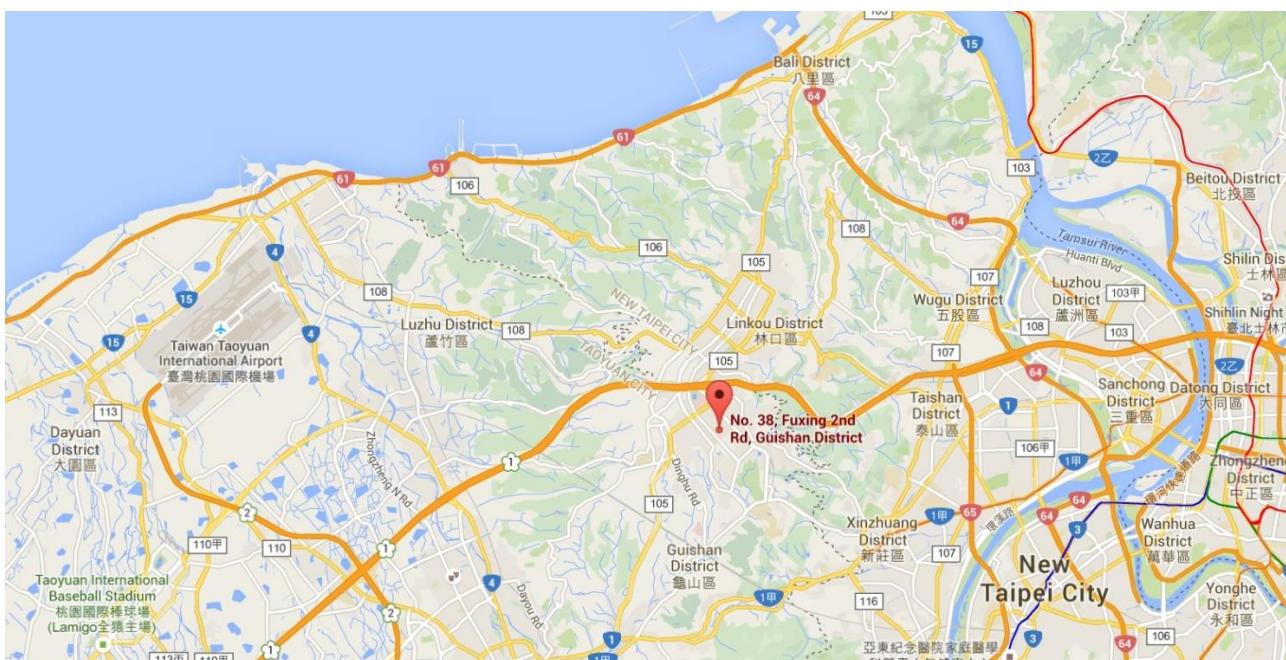

2. PRODUCT INFORMATION

2.1. Feature of Equipment under Test

Product Name:	Tri-band WIFI7 router
Model No.:	Fast 380ba
Brand Name:	Sagemcom
Wi-Fi Specification:	802.11a/b/g/n/ac/ax/be
EUT Identification No.:	#1-1 (Conducted) #1-2 (Radiated)
Accessory	
Power Adapter#1	Brand: Sagemcom Model No: ADS-50DG-12 12049EPCU-L Input: AC 100-127V, 50-60Hz, Max 1.2A Output: 12.0V--4.1A DC Cable Out: Non-Shielded, 1.8m
Power Adapter#2	Brand: Sagemcom Model No: MS-V4100R120-050A0-US Input: AC 100-127V, 50-60Hz, Max 1.3A Output: 12.0V--4.1A 49.2W DC Cable Out: Non-Shielded, 1.8m
Power Adapter#3	Brand: Sagemcom Model No: NBS42G120410VU Input: AC 100-127V, 50-60Hz, Max 1.5A Output: 12.0V--4.1A DC Cable Out: Non-Shielded, 1.8m
Remark:	
1. The information of EUT was provided by the manufacturer, and the accuracy of the information shall be the responsibility of the manufacturer. 2. For this report, we select Adapter 1# for testing	

2.2. Product Specification Subjective to this Report

Frequency Range:	802.11b/g/n-HT20/ax-HE20/be-EHT20: 2412 ~ 2462MHz 802.11n-HT40/ax-HE40/be-EHT40: 2422 ~ 2452MHz	
Channel Number:	802.11b/g/n-HT20/ax-HE20/be-EHT20: 11 802.11n-HT40/ax-HE40/be-EHT40: 7	
Type of Modulation:	802.11b: DSSS 802.11g/n: OFDM 802.11ax/be: OFDMA	
Data Rate:	802.11b: 1/2/5.5/11Mbps 802.11g: 6/9/12/18/24/36/48/54Mbps 802.11n: up to 300Mbps 802.11ax: up to 574Mbps 802.11be: up to 688Mbps	
Channel Puncturing Function	<input type="checkbox"/> Supported	<input checked="" type="checkbox"/> Unsupported
Support RU	<input checked="" type="checkbox"/> Full RU	<input type="checkbox"/> Partial RU

Note: For other features of this EUT, test report will be issued separately.

2.3. Working Frequencies for this report

802.11b/g/n-HT20/ax-HE20/be-EHT20

Channel	Frequency	Channel	Frequency	Channel	Frequency
01	2412 MHz	02	2417 MHz	03	2422 MHz
04	2427 MHz	05	2432 MHz	06	2437 MHz
07	2442 MHz	08	2447 MHz	09	2452 MHz
10	2457 MHz	11	2462 MHz	--	--

802.11n-HT40/ax-HE40/be-EHT40

Channel	Frequency	Channel	Frequency	Channel	Frequency
03	2422 MHz	04	2427 MHz	05	2432 MHz
06	2437 MHz	07	2442 MHz	08	2447 MHz
09	2452 MHz	--	--	--	--

2.4. Description of Available Antennas


Antenna Type	Frequency Band (GHz)	Antenna Gain (dBi)				Directional Gain (dBi)	
		Ant 0	Ant 1	Ant 2	Ant 3	For Power	For PSD
Wi-Fi Internal Antenna							
PCB Antenna	2412 ~ 2462	3.80	3.62	--	--	3.80	5.43
	5180 ~ 5825	5.36	5.31	4.62	5.30	5.36	5.71
	5925 ~ 7125	5.47	4.91	5.28	5.12	5.47	5.89
Note 1: The antenna gain and directional gain refer to manufacturer's antenna specification.							
Note 2: The EUT supports Cyclic Delay Diversity (CDD) mode for 802.11a/b/g/n/ac/ax.							
Note 3: Software automatically backs power down based on CDD power for beamforming operation.							

2.5. Test Mode

CDD Mode
Mode 1: Transmit by 802.11b_Nss=1 (1Mbps) (CDD mode)
Mode 2: Transmit by 802.11g_Nss=1 (6Mbps) (CDD mode)
Mode 3: Transmit by 802.11n-HT20_Nss=1 (MCS0) (CDD mode)
Mode 4: Transmit by 802.11n-HT40_Nss=1 (MCS0) (CDD mode)
Mode 5: Transmit by 802.11ax-HE20_Nss=1 (MCS0) (CDD mode)
Mode 6: Transmit by 802.11ax-HE40_Nss=1 (MCS0) (CDD mode)
Mode 7: Transmit by 802.11be-EHT20_Nss=1 (MCS0) (CDD mode)
Mode 8: Transmit by 802.11be-EHT40_Nss=1 (MCS0) (CDD mode)
Remark:
<ol style="list-style-type: none">1. For Radiated emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power.2. For CDD mode, this device supports 2 Nss and power level is the same of spatial multiplexing. The worst case is Nss=1.3. As Designated by manufacturer, the lowest data rate was the worst condition, so all the tests were done with lowest data rate.

2.6. Configuration of Test System

The device was tested per the guidance ANSI C63.10: 2013 was used to reference the appropriate EUT setup for radiated emissions testing and AC line conducted testing.

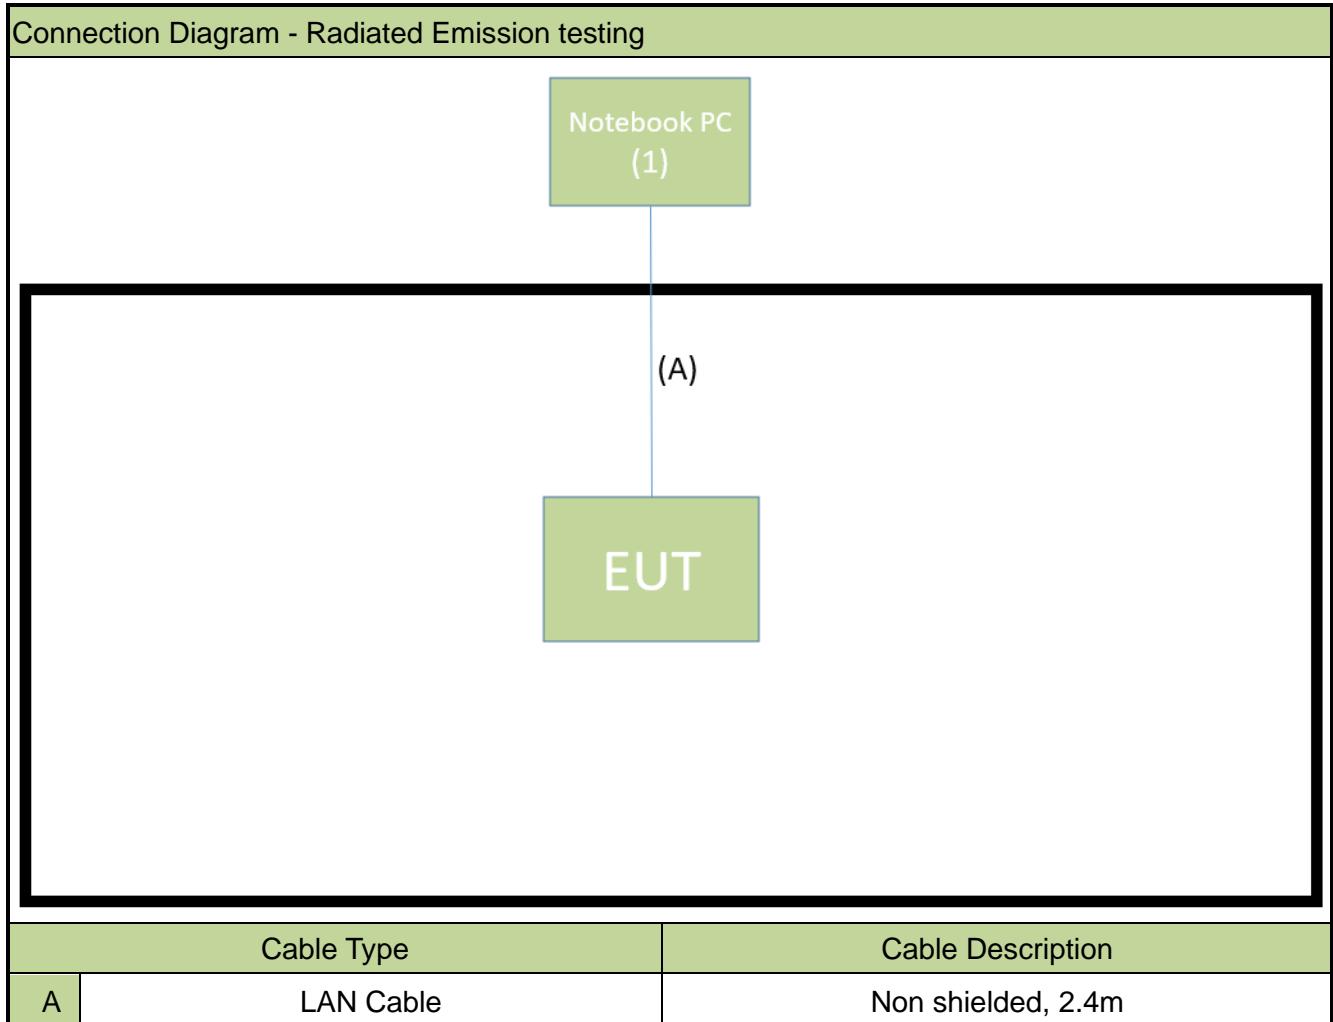

2.7. Test System Details

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

	Product	Manufacturer	Model No.	Serial No.	Power Cord
1	Notebook PC	Lenovo	21DH00A3TW	N/A	Non-Shielded, 0.8m

2.8. Description of Test Software

The test utility software used during testing was “accessMTool.exe”, and the version was 3.3.0.6.

Note: Final power setting please refer to operational description.

2.9. Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:


- FCC Part 15.247
- KDB 662911 D01v02r01
- ANSI C63.10-2013

2.10. Duty Cycle

2.4GHz WLAN (DTS) operation is possible in 20MHz and 40MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Test Mode	Duty Cycle
802.11b	95.03%
802.11g	94.95%
802.11n-HT20	98.17%
802.11n-HT40	96.55%
802.11ax-HE20	96.39%
802.11ax-HE40	95.62%
802.11be-EHT20	98.04%
802.11be-EHT40	95.95%



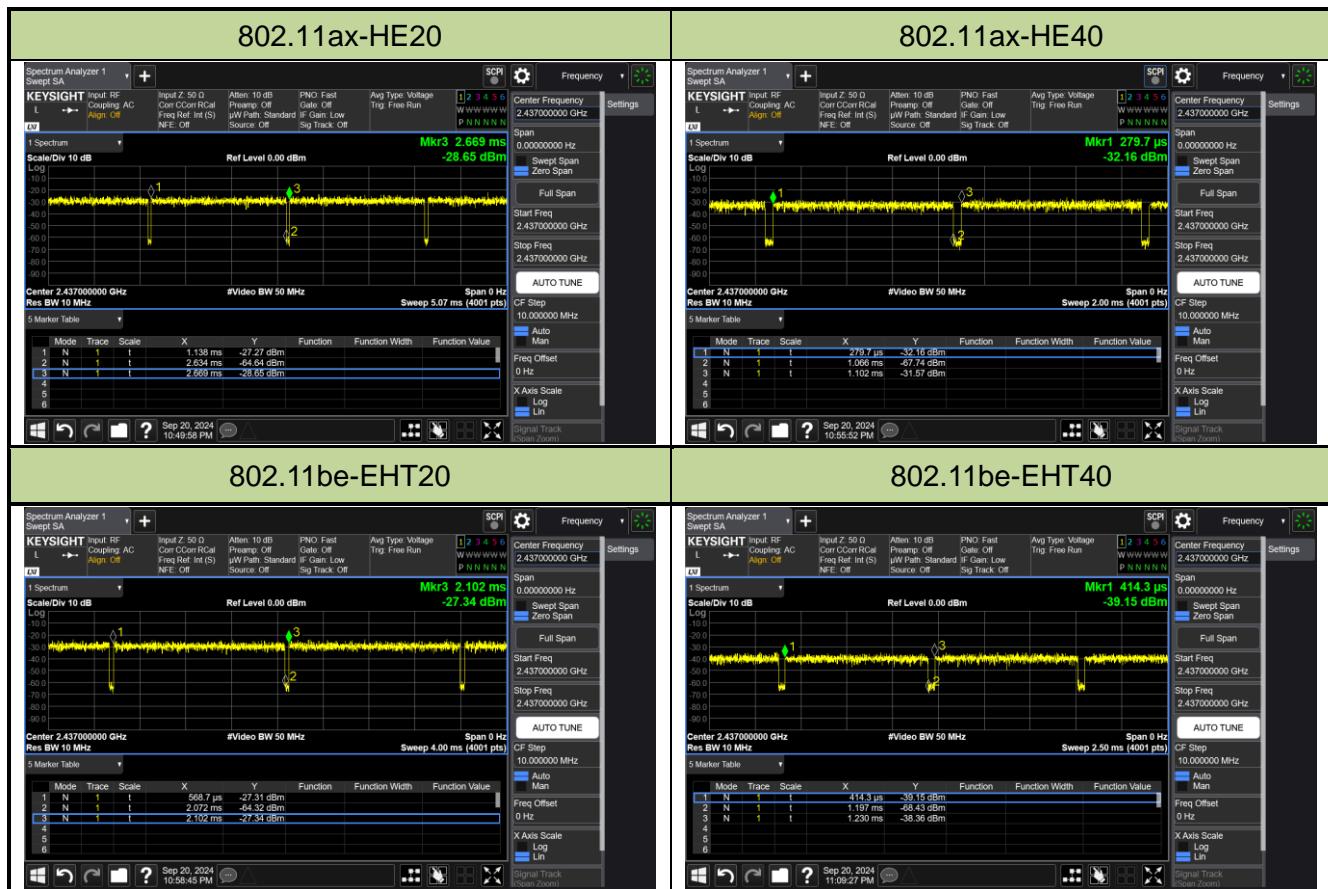

2.11. Test Configuration

The device was tested per the guidance of ANSI C63.10-2013. ANSI C63.10-2013 was used to reference the appropriate EUT setup for radiated spurious emissions testing and AC line conducted testing.

2.12. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

2.13. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

3. DESCRIPTION of TEST

3.1. Evaluation Procedure

The measurement procedures described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013), and the guidance was used in the measurement.

3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 8'x4'x4' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying power lines, the mode of operation or data exchange speed, or support equipment whichever determined the worst-case emission. Once the worst-case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-40GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions. According to 3dB Beam-Width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

4. ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

"An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section."

- The antenna of the device is **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The unit complies with the requirement of §15.203.

5. TEST EQUIPMENT CALIBRATION DATE

Radiated Emissions

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Acitive Loop Antenna	SCHWARZBECK	FMZB 1519B	MRTTWA00002	1 year	2025/5/7
Broadband TRILOG Antenna	SCHWARZBECK	VULB 9162	MRTTWA00001	1 year	2024/10/31
Broadband Hornantenna	RFSPIN	DRH18-E	MRTTWA00087	1 year	2025/5/20
Broadband Preamplifier	EMC Instruments corporation	EMC118A45SE	MRTTWA00088	1 year	2025/5/14
Breitband Hornantenna	SCHWARZBECK	BBHA 9170	MRTTWA00004	1 year	2025/3/26
Broadband Amplifier	SCHWARZBECK	BBV 9721	MRTTWA00006	1 year	2025/3/21
EMI Test Receiver	R&S	ESR3	MRTTWA00009	1 year	2025/3/5
Signal Analyzer	R&S	FSVA3044	MRTTWA00092	1 year	2025/6/20
Antenna Cable	HUBERSUHNER	SF106	MRTTWE00034	1 year	2025/6/25

Conducted Test Equipment

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
X-Series USB Peak and Average Power Sensor	KEYSIGHT	U2021XA	MRTTWA00014	1 year	2025/4/16
X-Series USB Peak and Average Power Sensor	KEYSIGHT	U2021XA	MRTTWA00015	1 year	2025/3/12
EXA Signal Analyzer	KEYSIGHT	N9010A	MRTTWA00012	1 year	2025/9/24
EXA Signal Analyzer	KEYSIGHT	N9010B	MRTTWA00074	1 year	2025/8/12

Software	Version	Function
e3	9.160520a	EMI Test Software

6. MEASUREMENT UNCERTAINTY

6.1. Decision Rules

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4: 2012 Clause 8.2.

(Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

6.2. Measurement Uncertainty

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

Radiated Emission Measurement
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 9kHz ~ 1GHz: $\pm 4.25\text{dB}$ 1GHz ~ 40GHz: $\pm 4.45\text{dB}$
Conducted Power (Carrier Power / Power Density)
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): $\pm 0.84\text{dB}$
Conducted Spurious Emission
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): $\pm 2.65\text{ dB}$
Occupied Bandwidth
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): $\pm 3.3\%$
Temp. / Humidity
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): $\pm 0.82^\circ\text{C} / \pm 3\%$

7. TEST RESULT

7.1. Summary

FCC Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.247(a)(2)	6dB Bandwidth	$\geq 500\text{kHz}$	Conducted	N/A	Section 7.2
15.247(b)(3)	Output Power	$\leq 30\text{dBm}$		Pass	Section 7.3
15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$		N/A	Section 7.4
15.247(d)	Band Edge / Out-of-Band Emissions	$\geq 30\text{dBc}$ (Average)		N/A	Section 7.5
15.205 15.209	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209	Radiated	Pass	Section 7.6 & 7.7
15.207	AC Conducted Emissions 150kHz - 30MHz	< FCC 15.207 limits	Line Conducted	N/A	Section 7.8

Notes:

- 1) Determining compliance is based on the test results met the regulation limits or requirements declared by clients, and the test results don't take into account the value of measurement uncertainty.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 3) Output power test was verified over all data rates of each mode (data refers to operational description), and then choose the maximum power output (low data rate) for final test of each channel.
- 4) For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst-case emissions.
- 5) EUT supports one configuration only in 802.11ax/be full RU mode, i.e. 242 tone in 11ax-HE20 and 484 tone in 11ax-HE40.

7.2. 6dB Bandwidth Measurement

7.2.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.


7.2.2. Test Procedure used

ANSI C63.10 - 2013 Section 11.8

7.2.3. Test Setting

1. The Spectrum's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. Set RBW = 100 kHz
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = max hold
6. Sweep = auto couple
7. Allow the trace was allowed to stabilize

7.2.4. Test Setup

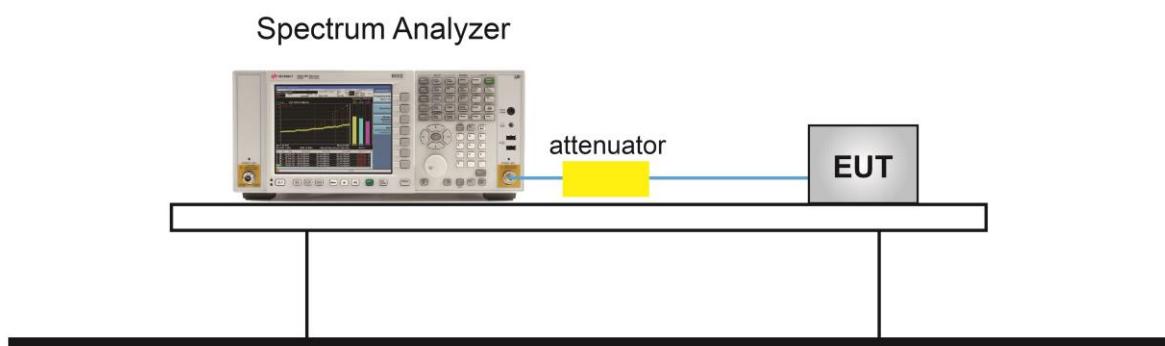

7.2.5. Test Result

Note: Refer to the original report is 2406RSU024-U1.

7.3. Output Power Measurement

7.3.1. Test Limit

The maximum output power shall be less 1 Watt (30dBm).

The conducted output power limit specified in paragraph FCC Part 15.247(b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs FCC Part 15.247(b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

7.3.2. Test Procedure Used


ANSI C63.10 - 2013 Section 11.9.2.3.2

7.3.3. Test Setting

Average Power Measurement

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

7.3.4. Test Setup

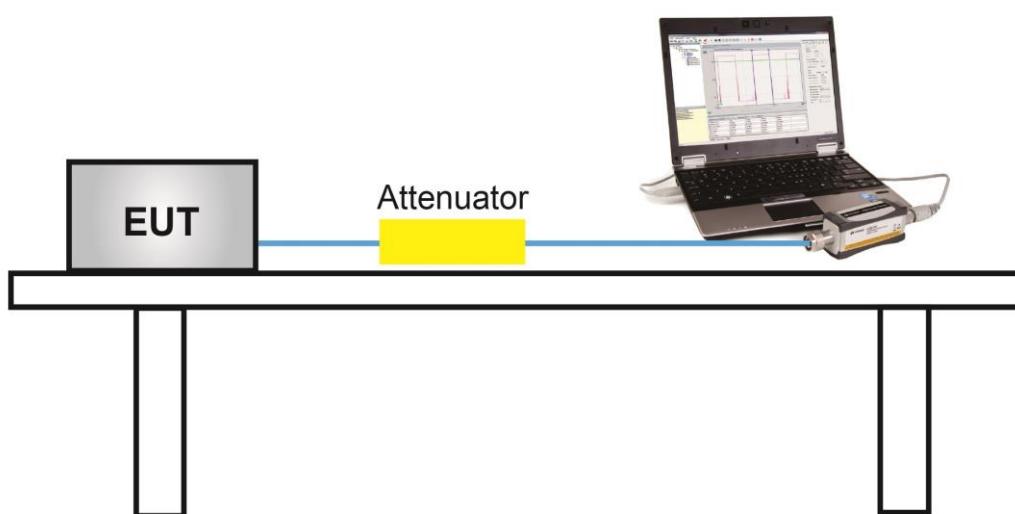

7.3.5. Test Result

Product	Tri-band WIFI7 router	Temperature	25°C
Test Engineer	Peter	Relative Humidity	54%
Test Site	SR6	Test Date	2024/9/27

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Ant 0 Average Power (dBm)	Ant 1 Average Power (dBm)	Total Average Power (dBm)	Limit (dBm)	Result
CDD Mode								
802.11b	1Mbps	01	2412	24.33	23.37	26.89	≤ 30.00	Pass
802.11b	1Mbps	06	2437	26.54	26.32	29.44	≤ 30.00	Pass
802.11b	1Mbps	11	2462	24.58	23.94	27.28	≤ 30.00	Pass
802.11g	6Mbps	01	2412	20.18	20.26	23.23	≤ 30.00	Pass
802.11g	6Mbps	02	2417	20.77	20.64	23.72	≤ 30.00	Pass
802.11g	6Mbps	03	2422	21.78	21.52	24.66	≤ 30.00	Pass
802.11g	6Mbps	04	2427	22.98	23.19	26.10	≤ 30.00	Pass
802.11g	6Mbps	06	2437	24.67	25.58	28.16	≤ 30.00	Pass
802.11g	6Mbps	10	2457	22.39	22.67	25.54	≤ 30.00	Pass
802.11g	6Mbps	11	2462	20.99	21.13	24.07	≤ 30.00	Pass
802.11n-HT20	MCS0	01	2412	19.66	19.71	22.70	≤ 30.00	Pass
802.11n-HT20	MCS0	02	2417	21.56	21.41	24.50	≤ 30.00	Pass
802.11n-HT20	MCS0	06	2437	24.32	24.88	27.62	≤ 30.00	Pass
802.11n-HT20	MCS0	10	2457	21.46	21.84	24.66	≤ 30.00	Pass
802.11n-HT20	MCS0	11	2462	20.67	21.02	23.86	≤ 30.00	Pass
802.11n-HT40	MCS0	03	2422	18.69	18.57	21.64	≤ 30.00	Pass
802.11n-HT40	MCS0	06	2437	19.23	19.27	22.26	≤ 30.00	Pass
802.11n-HT40	MCS0	09	2452	18.29	18.76	21.54	≤ 30.00	Pass

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Ant 0 Average Power (dBm)	Ant 1 Average Power (dBm)	Total Average Power (dBm)	Limit (dBm)	Result
CDD Mode								
802.11ax-HE20	MCS0	01	2412	20.22	20.01	23.13	≤ 30.00	Pass
802.11ax-HE20	MCS0	02	2417	21.95	22.12	25.05	≤ 30.00	Pass
802.11ax-HE20	MCS0	06	2437	23.78	24.27	27.04	≤ 30.00	Pass
802.11ax-HE20	MCS0	11	2462	20.76	20.89	23.84	≤ 30.00	Pass
802.11ax-HE40	MCS0	03	2422	19.05	19.11	22.09	≤ 30.00	Pass
802.11ax-HE40	MCS0	06	2437	18.83	19.07	21.96	≤ 30.00	Pass
802.11ax-HE40	MCS0	09	2452	18.89	19.12	22.02	≤ 30.00	Pass
802.11be-EHT20	MCS0	01	2412	20.16	19.97	23.08	≤ 30.00	Pass
802.11be-EHT20	MCS0	02	2417	21.19	21.15	24.18	≤ 30.00	Pass
802.11be-EHT20	MCS0	06	2437	23.57	24.10	26.85	≤ 30.00	Pass
802.11be-EHT20	MCS0	11	2462	20.75	21.00	23.89	≤ 30.00	Pass
802.11be-EHT40	MCS0	03	2422	18.78	18.71	21.76	≤ 30.00	Pass
802.11be-EHT40	MCS0	06	2437	19.00	18.79	21.91	≤ 30.00	Pass
802.11be-EHT40	MCS0	09	2452	18.95	19.11	22.04	≤ 30.00	Pass

Note: Total Average Power (dBm) = $10 \log \{10^{(\text{Ant 0 Average Power /10})} + 10^{(\text{Ant 1 Average Power /10})}\}$.

7.4. Power Spectral Density Measurement

7.4.1. Test Limit

The maximum permissible power spectral density is 8dBm in any 3 kHz band.

The same method of determining the conducted output power shall be used to determine the power spectral density.


7.4.2. Test Procedure Used

ANSI C63.10 - 2013 Section 11.10.5

7.4.3. Test Setting

1. Measure the duty cycle (x) of the transmitter output signal.
2. Set instrument center frequency to DTS channel center frequency.
3. Set span to at least 1.5 times the OBW.
4. RBW = 10 kHz.
5. VBW = 30 kHz.
6. Detector = RMS.
7. Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span}/\text{RBW}$.
8. Sweep time = auto couple.
9. Don't use sweep triggering. Allow sweep to "free run".
10. Employ trace averaging (RMS) mode over a minimum of 100 traces.
11. Use the peak marker function to determine the maximum amplitude level.
12. Add $10 \log (1/x)$, where x is the duty cycle measured in step (a), to the measured PSD to compute the average PSD during the actual transmission time.

7.4.4. Test Setup

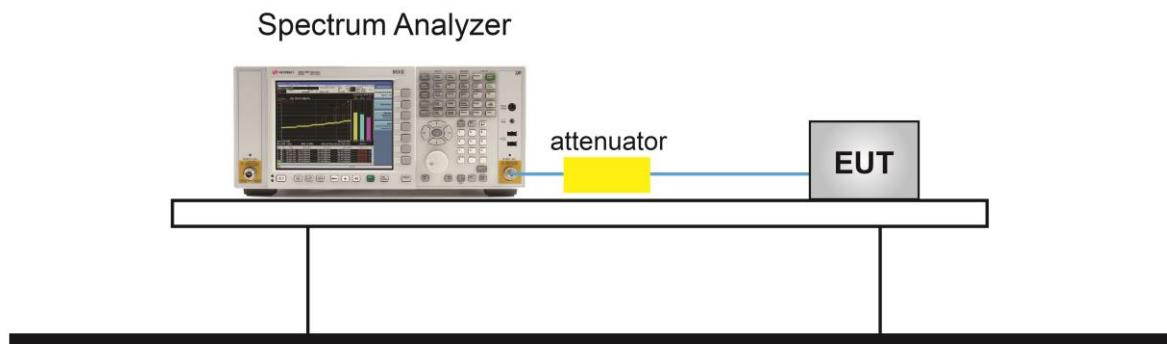

7.4.5. Test Result

Note: Refer to the original report is 2406RSU024-U1.

7.5. Conducted Band Edge and Out-of-Band Emissions

7.5.1. Test Limit

The limit for out-of-band spurious emissions at the band edge is 30dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth per the PSD procedure.

7.5.2. Test Procedure Used

ANSI C63.10 - 2013 Section 11.11

7.5.3. Test Setting


Reference level measurement

1. Set instrument center frequency to DTS channel center frequency
2. Set the span to \geq 1.5 times the DTS bandwidth
3. Set the RBW = 100 kHz
4. Set the VBW \geq 3 x RBW
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Allow trace to fully stabilize

Emission level measurement

1. Set the center frequency and span to encompass frequency range to be measured
2. RBW = 100kHz
3. VBW = 300kHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

7.5.4. Test Setup

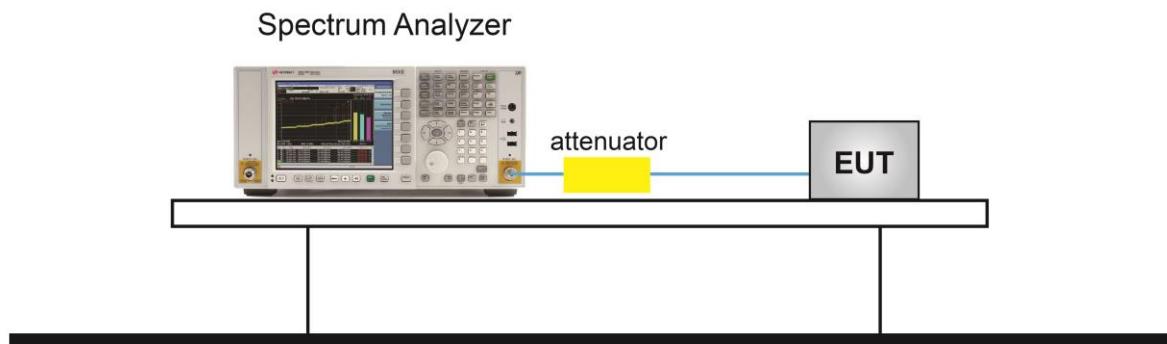

7.5.5. Test Result

Note: Refer to the original report is 2406RSU024-U1.

7.6. Radiated Spurious Emission Measurement

7.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [Uv/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.6.2. Test Procedure Used

ANSI C63.10 - 2013 - Section 11.11 & 11.12

ANSI C63.10 - 2013 Section 6.3 (General Requirements)

ANSI C63.10 - 2013 Section 6.4 (Standard test method below 30MHz)

ANSI C63.10 - 2013 Section 6.5 (Standard test method above 30MHz to 1GHz)

ANSI C63.10 - 2013 Section 6.6 (Standard test method above 1GHz)

7.6.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000MHz	1MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set $VBW \geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

7.6.4. Test Setup

Below 1GHz Test Setup:

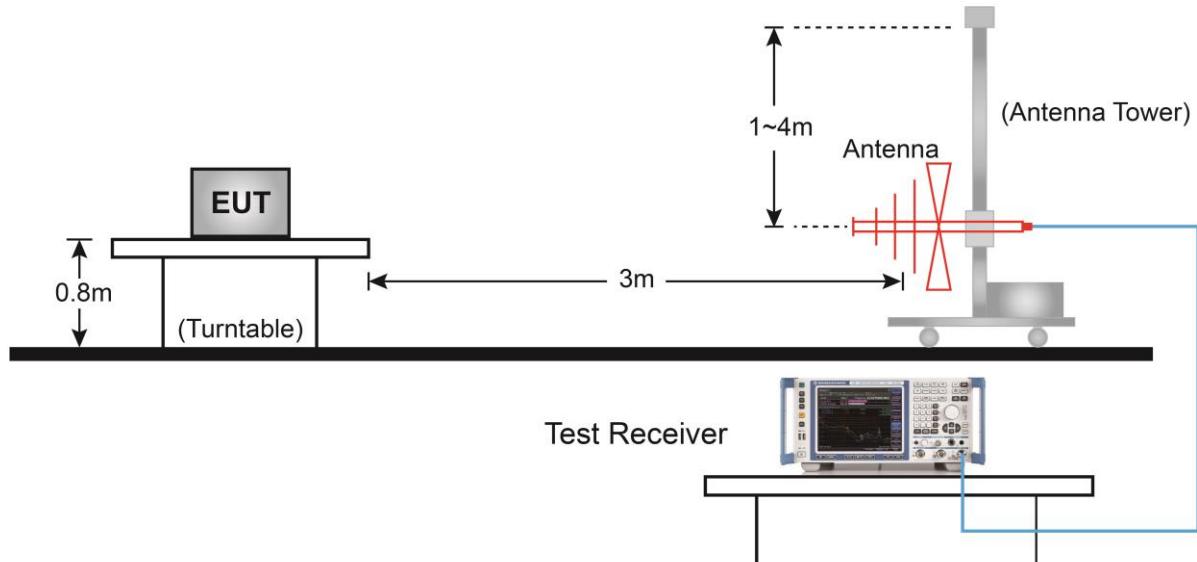


Above 1GHz Test Setup:

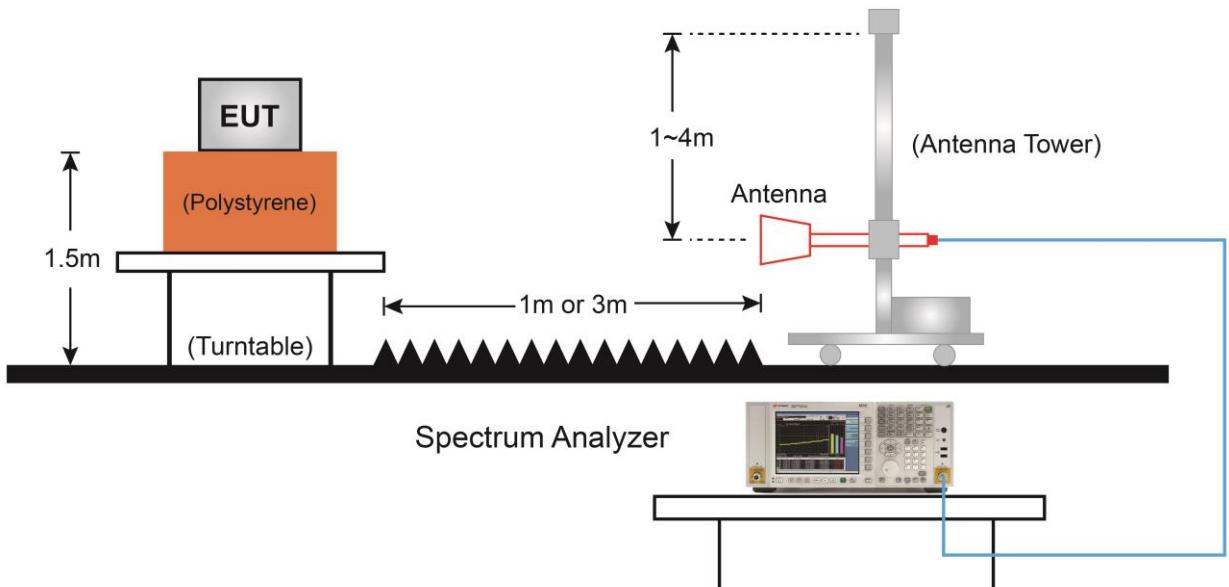

7.6.5. Test Result

EUT	Tri-band WIFI7 router	Date of Test	2024-09-21
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

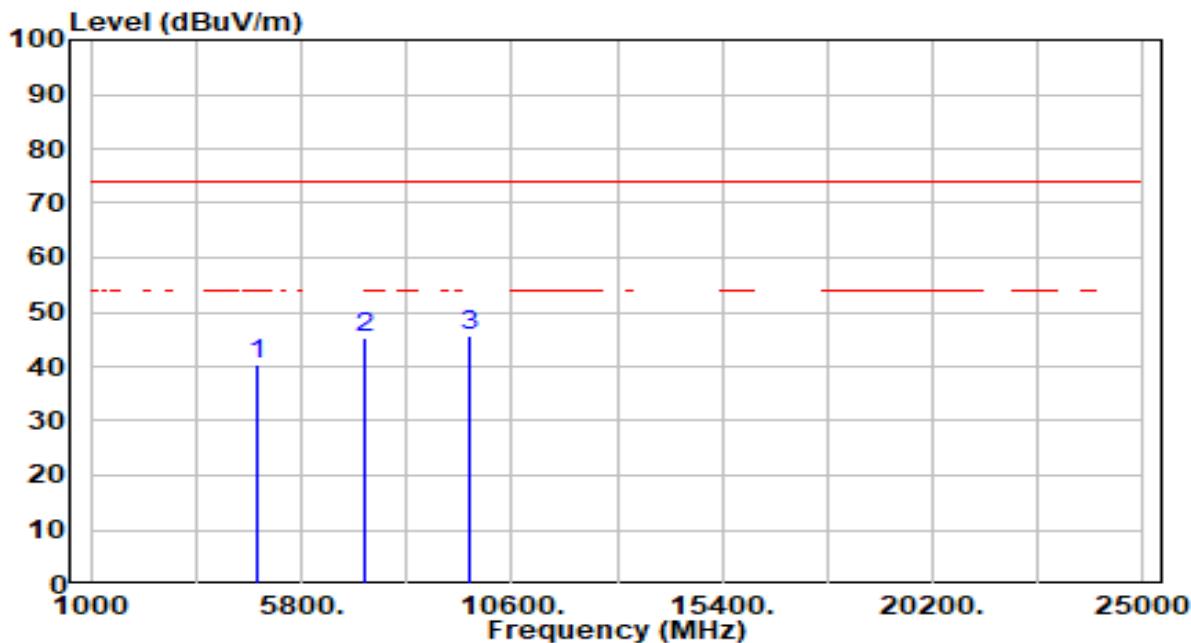


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	40.28	0.15	40.43	-33.57	74.00	100	254	Peak
2	7236.000	39.30	5.81	45.12	-28.88	74.00	100	119	Peak
3 *	9648.000	40.55	5.16	45.72	-28.28	74.00	100	313	Peak

Note:

1. "*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Tri-band WIFI7 router	Date of Test	2024-09-21
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

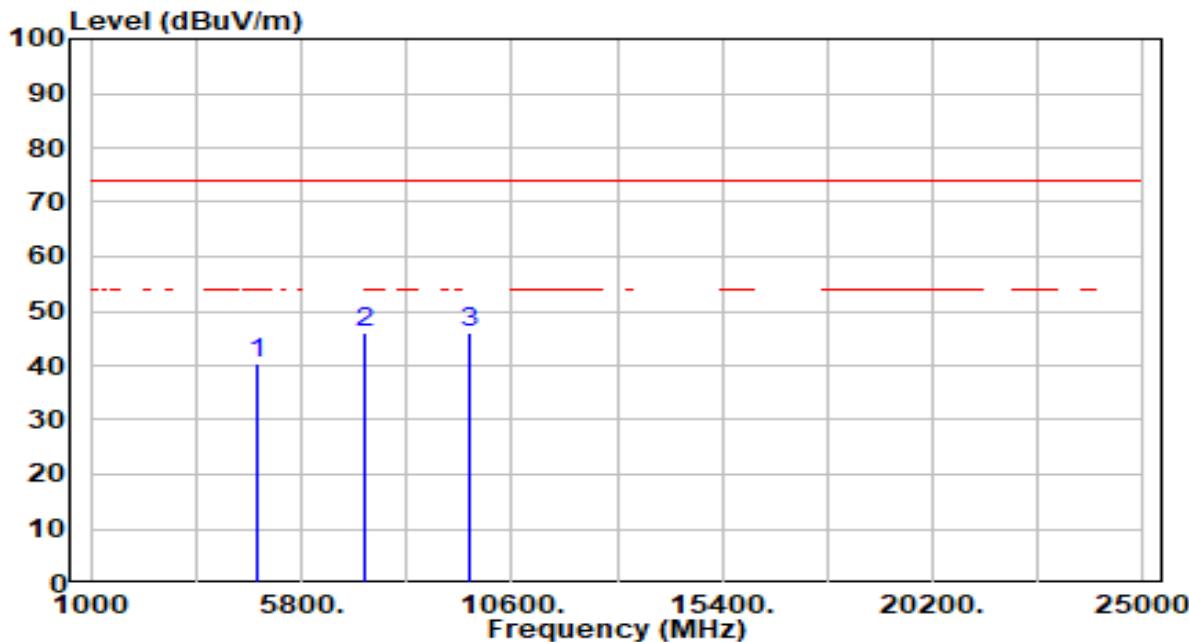


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	40.19	0.15	40.34	-33.66	74.00	100	229	Peak
2	* 7236.000	40.31	5.81	46.12	-27.88	74.00	100	251	Peak
3	9648.000	40.73	5.16	45.90	-28.10	74.00	100	225	Peak

Note:

1. "*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Tri-band WIFI7 router	Date of Test	2024-09-21
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

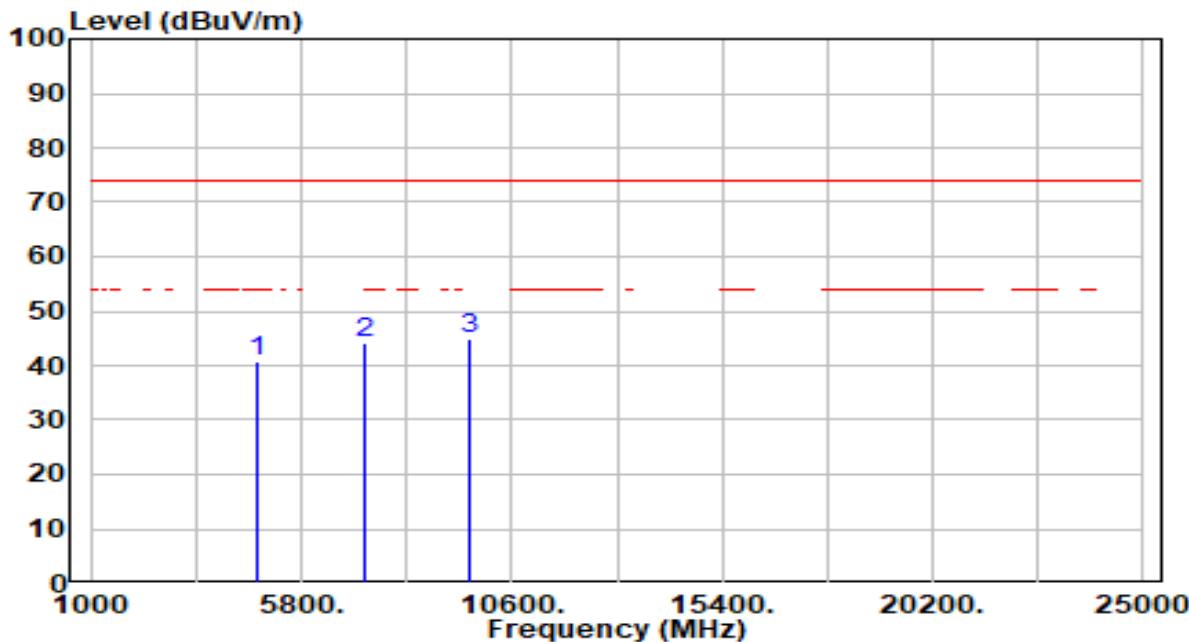


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	40.76	0.15	40.91	-33.09	74.00	100	199	Peak
2	7236.000	38.41	5.81	44.23	-29.77	74.00	100	11	Peak
3 *	9648.000	39.89	5.16	45.06	-28.94	74.00	100	301	Peak

Note:

1. "*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Tri-band WIFI7 router	Date of Test	2024-09-21
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

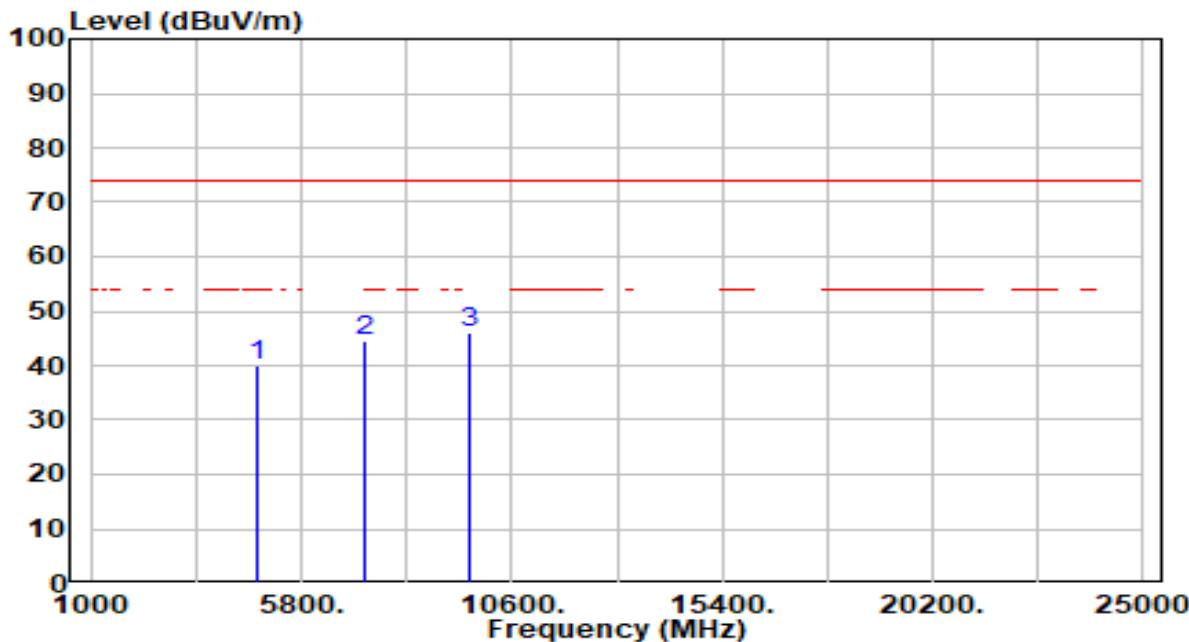


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	39.90	0.15	40.05	-33.95	74.00	100	120	Peak
2	7236.000	38.54	5.81	44.35	-29.65	74.00	100	201	Peak
3 *	9648.000	40.79	5.16	45.96	-28.04	74.00	100	77	Peak

Note:

1. "*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Tri-band WIFI7 router	Date of Test	2024-09-21
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

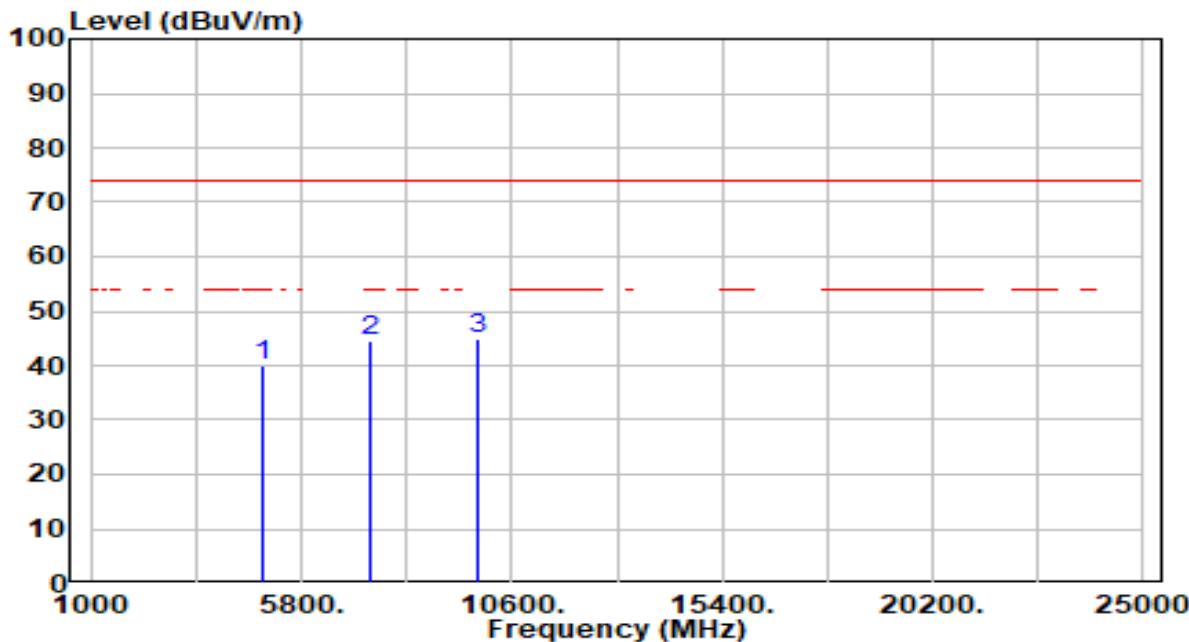


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	39.87	0.31	40.18	-33.82	74.00	100	25	Peak
2	7356.000	38.64	5.82	44.46	-29.54	74.00	100	93	Peak
3 *	9808.000	39.71	5.21	44.92	-29.08	74.00	100	259	Peak

Note:

1. "*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Tri-band WIFI7 router	Date of Test	2024-09-21
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

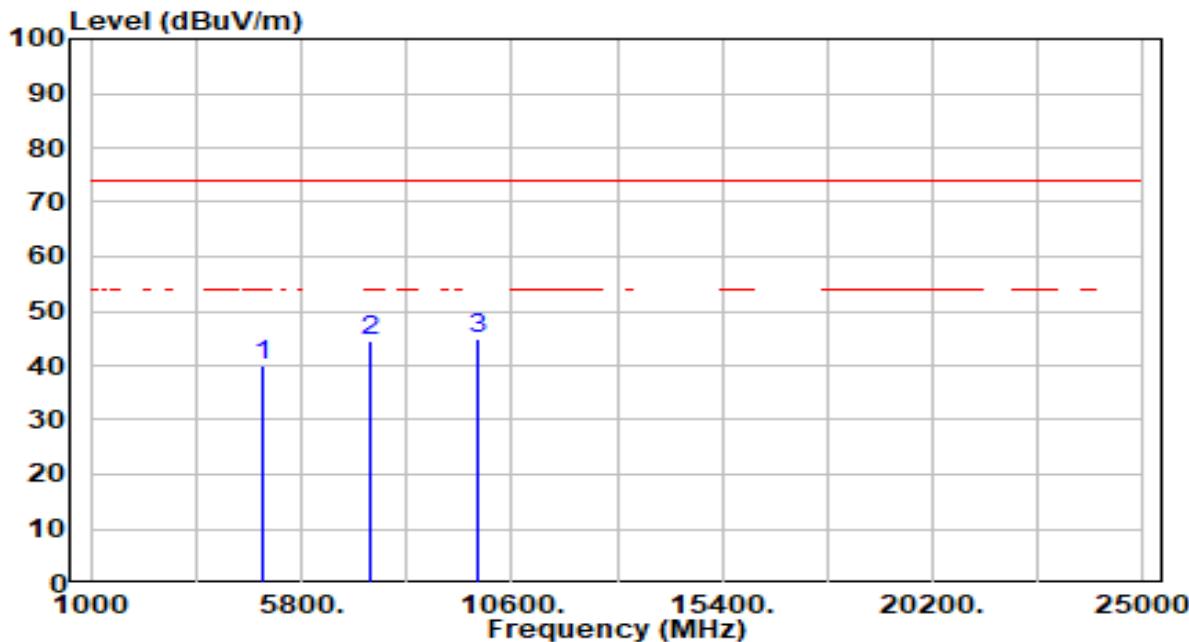


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4904.000	39.74	0.31	40.05	-33.95	74.00	100	294	Peak
2	7356.000	38.62	5.82	44.44	-29.56	74.00	100	335	Peak
3 *	9808.000	39.62	5.21	44.83	-29.17	74.00	100	154	Peak

Note:

1. "*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Tri-band WIFI7 router	Date of Test	2024-09-21
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

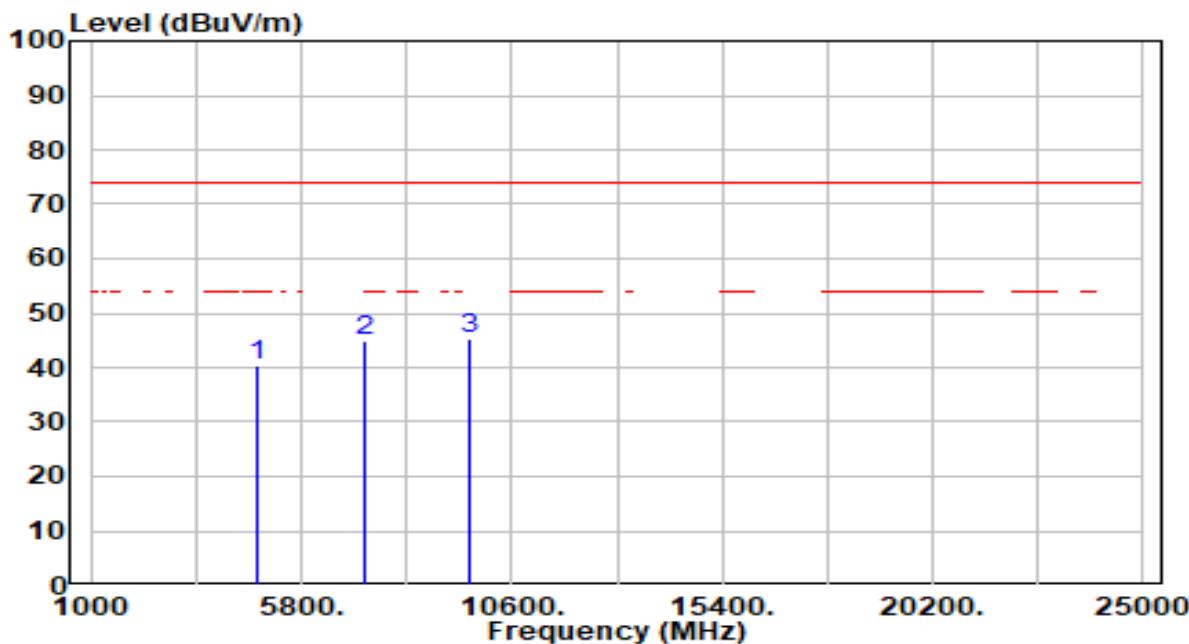


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	40.31	0.15	40.46	-33.54	74.00	100	174	Peak
2	7236.000	39.27	5.81	45.08	-28.92	74.00	100	244	Peak
3 *	9648.000	39.95	5.16	45.11	-28.89	74.00	100	104	Peak

Note:

1. "*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Tri-band WIFI7 router	Date of Test	2024-09-21
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

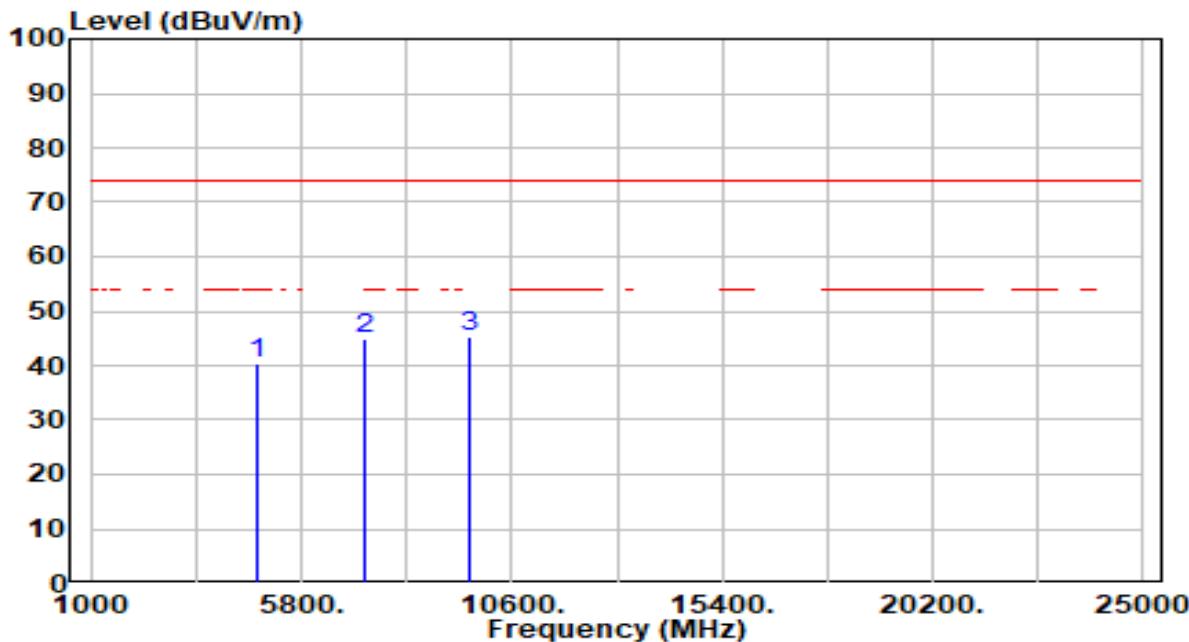


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4824.000	40.25	0.15	40.40	-33.60	74.00	100	53	Peak
2	7236.000	38.95	5.81	44.76	-29.24	74.00	100	35	Peak
3 *	9648.000	40.09	5.16	45.26	-28.74	74.00	100	250	Peak

Note:

1. "*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Tri-band WIFI7 router	Date of Test	2024-09-21
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

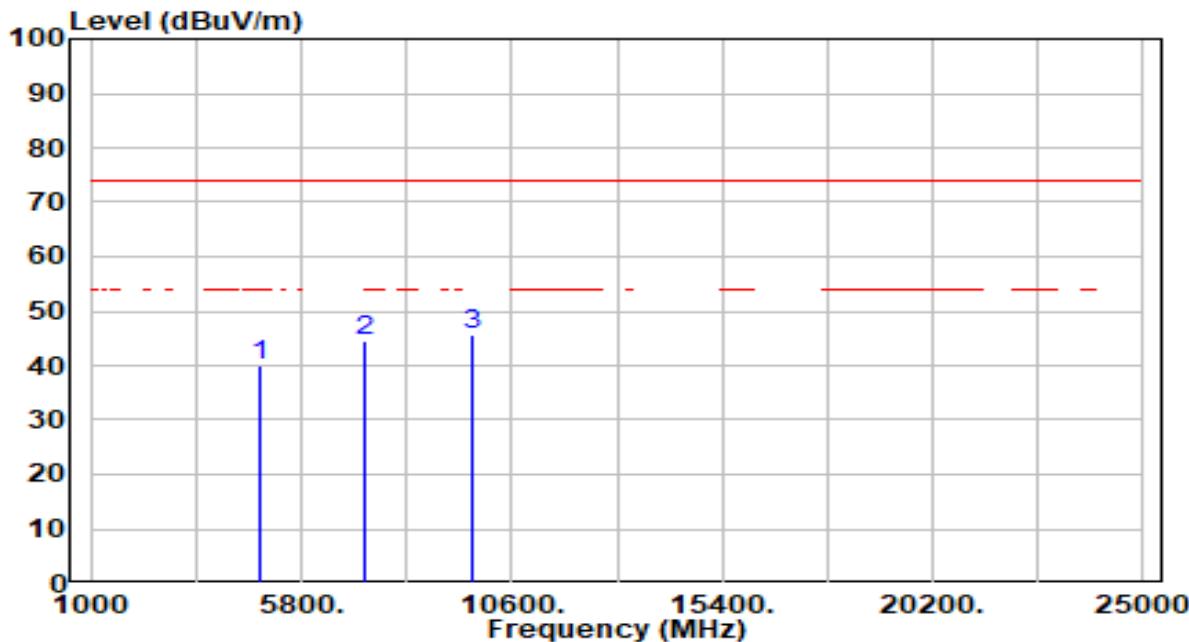


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	39.79	0.19	39.98	-34.02	74.00	100	79	Peak
2	7266.000	38.66	5.81	44.47	-29.53	74.00	100	231	Peak
3 *	9688.000	40.43	5.18	45.61	-28.39	74.00	100	79	Peak

Note:

1. "*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Tri-band WIFI7 router	Date of Test	2024-09-21
Factor	DRH18-E & BBHA 9170	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

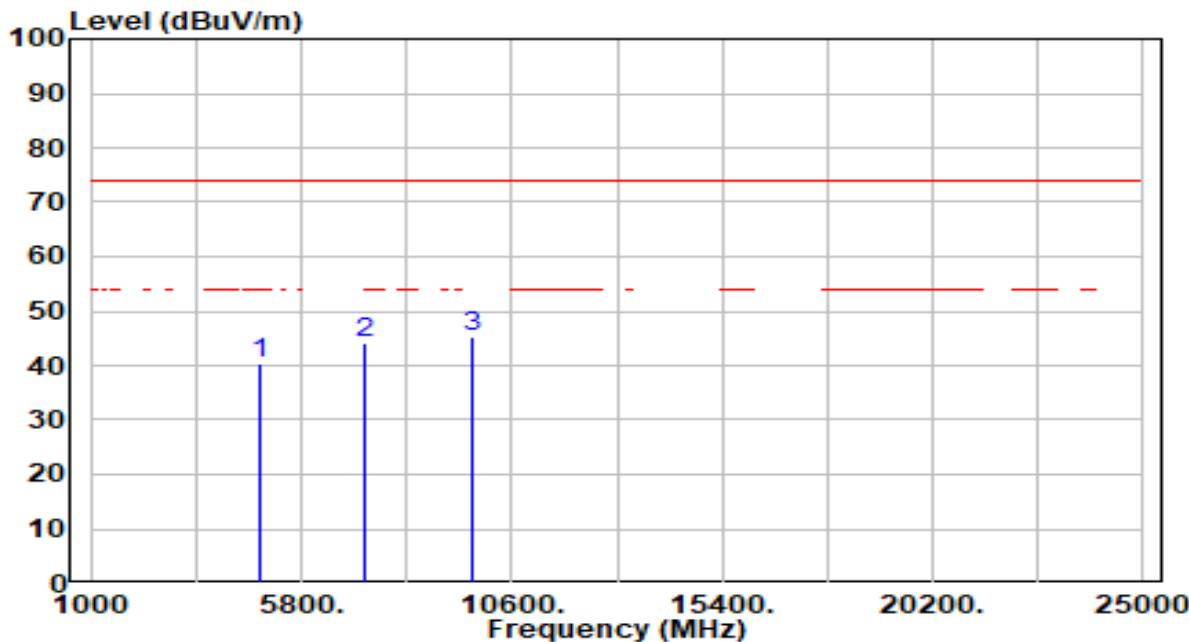

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	4844.000	40.06	0.19	40.25	-33.75	74.00	100	231	Peak
2	7266.000	38.35	5.81	44.17	-29.83	74.00	100	252	Peak
3 *	9688.000	40.19	5.18	45.36	-28.64	74.00	100	73	Peak

Note:

1. "*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.7. Radiated Restricted Band Edge Measurement

7.7.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.7.2. Test Procedure Used

ANSI C63.10-2013 Section 6.3 & 6.6 & 11.13


7.7.3. Test Setting

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize


Average Measurements above 1GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

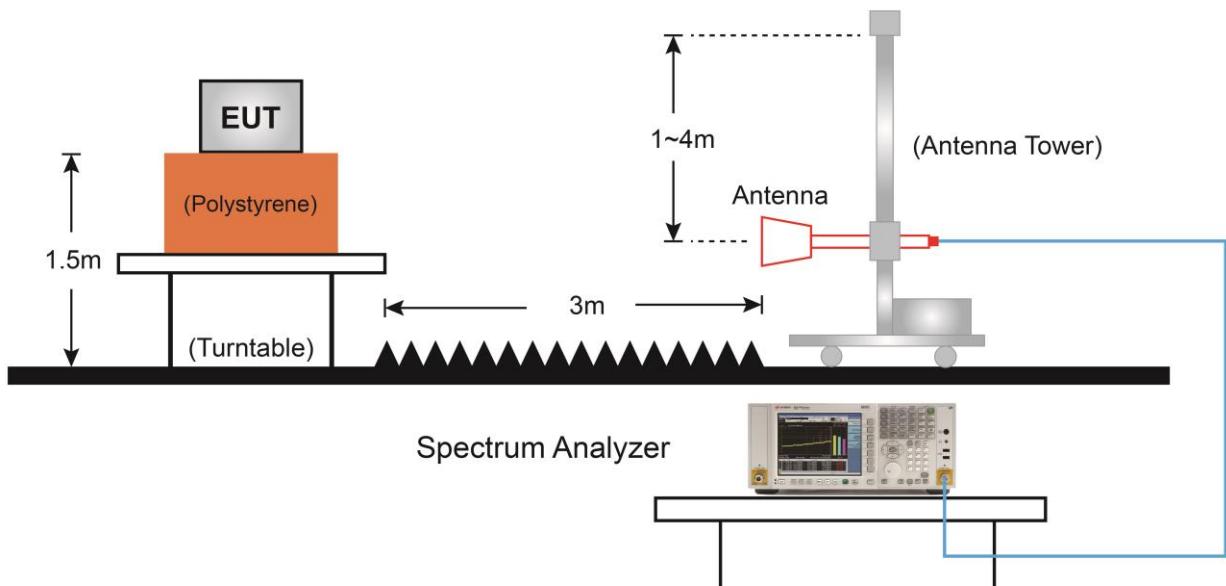7.7.4. Test Setup

7.7.5. Test Result

EUT	Tri-band WIFI7 router	Date of Test	2024-09-21
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

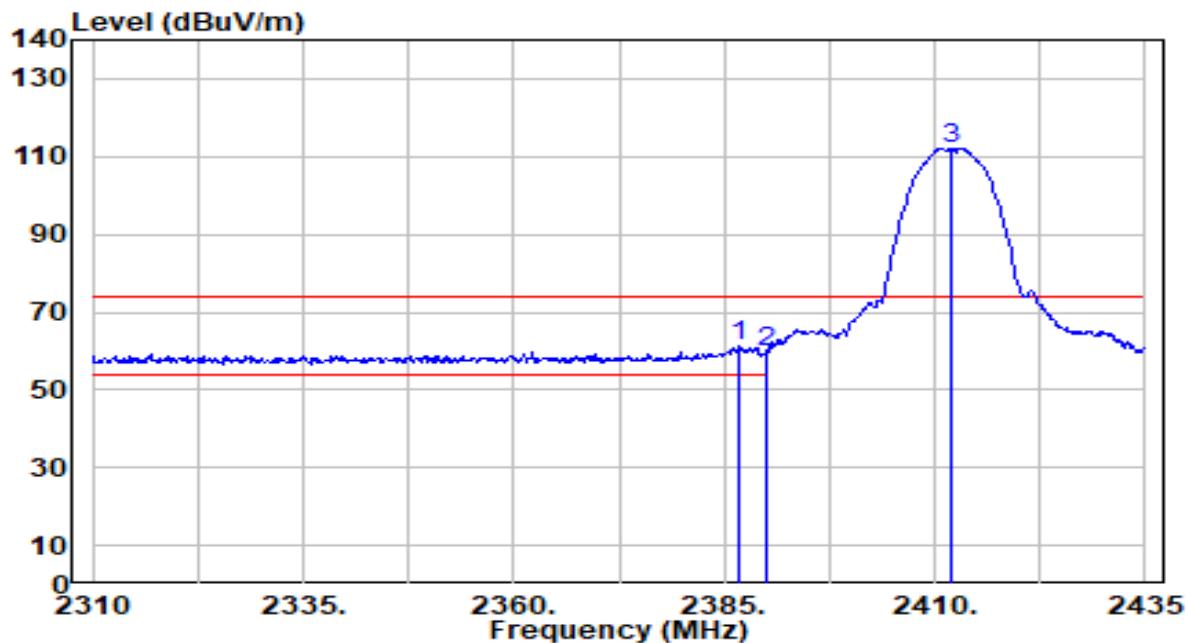


No	Frequency (MHz)	Reading (dB _{UV})	C.F (dB/m)	Measurement (dB _{UV} /m)	Margin (dB)	Limit (dB _{UV} /m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2386.875	30.83	30.54	61.37	-12.63	74.00	300	296	Peak
2	2390.000	29.19	30.55	59.74	-14.26	74.00	300	296	Peak
3	2412.000	81.63	30.61	112.24	N/A	N/A	300	296	Peak

Note:

1. "*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dB_{UV}/m) = Reading(dB_{UV}) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Tri-band WIFI7 router	Date of Test	2024-09-21
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

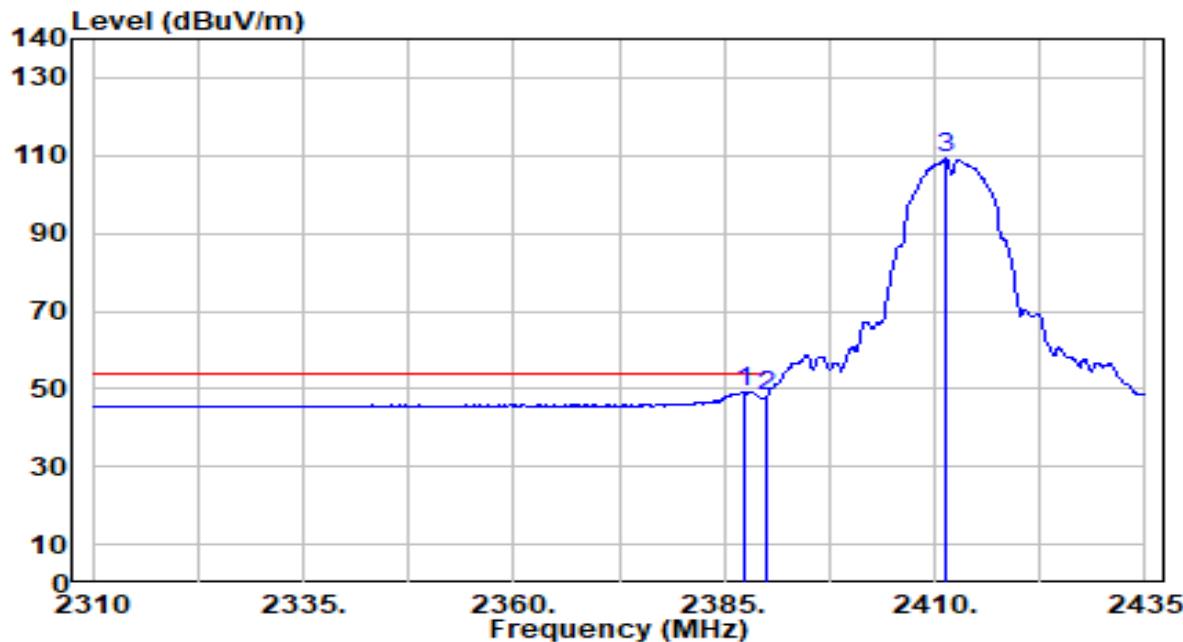


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1 *	2387.250	18.53	30.54	49.07	-4.93	54.00	300	296	Average
2	2390.000	17.27	30.55	47.82	-6.18	54.00	300	296	Average
3	2411.250	78.51	30.61	109.12	N/A	N/A	300	296	Average

Note:

1. "*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Tri-band WIFI7 router	Date of Test	2024-09-21
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

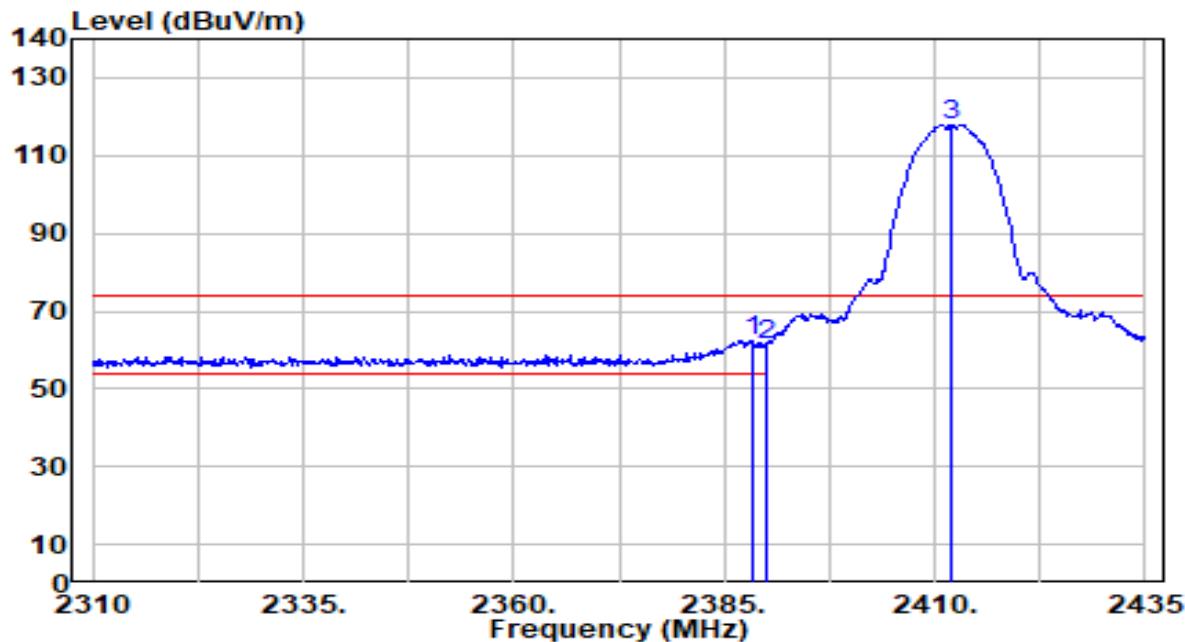


No	Frequency (MHz)	Reading (dB _{BuV})	C.F (dB/m)	Measurement (dB _{BuV/m})	Margin (dB)	Limit (dB _{BuV/m})	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.375	31.74	30.54	62.28	-11.72	74.00	100	341	Peak
2	2390.000	30.48	30.55	61.03	-12.97	74.00	100	341	Peak
3	2412.000	87.39	30.61	118.00	N/A	N/A	100	341	Peak

Note:

1. "*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dB_{BuV/m}) = Reading(dB_{BuV}) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Tri-band WIFI7 router	Date of Test	2024-09-21
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11b_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

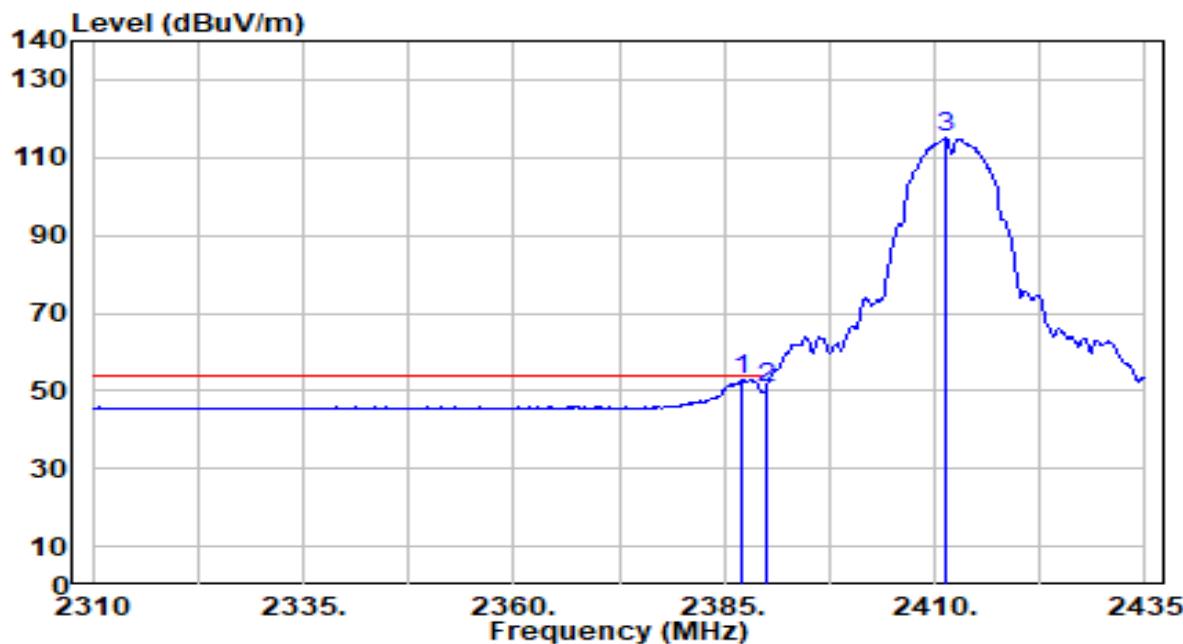


No	Frequency (MHz)	Reading (dB _B V)	C.F (dB/m)	Measurement (dB _B V/m)	Margin (dB)	Limit (dB _B V/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.125	22.22	30.54	52.76	-1.24	54.00	100	341	Average
2	2390.000	20.19	30.55	50.74	-3.26	54.00	100	341	Average
3	2411.250	84.34	30.61	114.94	N/A	N/A	100	341	Average

Note:

1. "*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dB_BV/m) = Reading(dB_BV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Tri-band WIFI7 router	Date of Test	2024-09-21
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

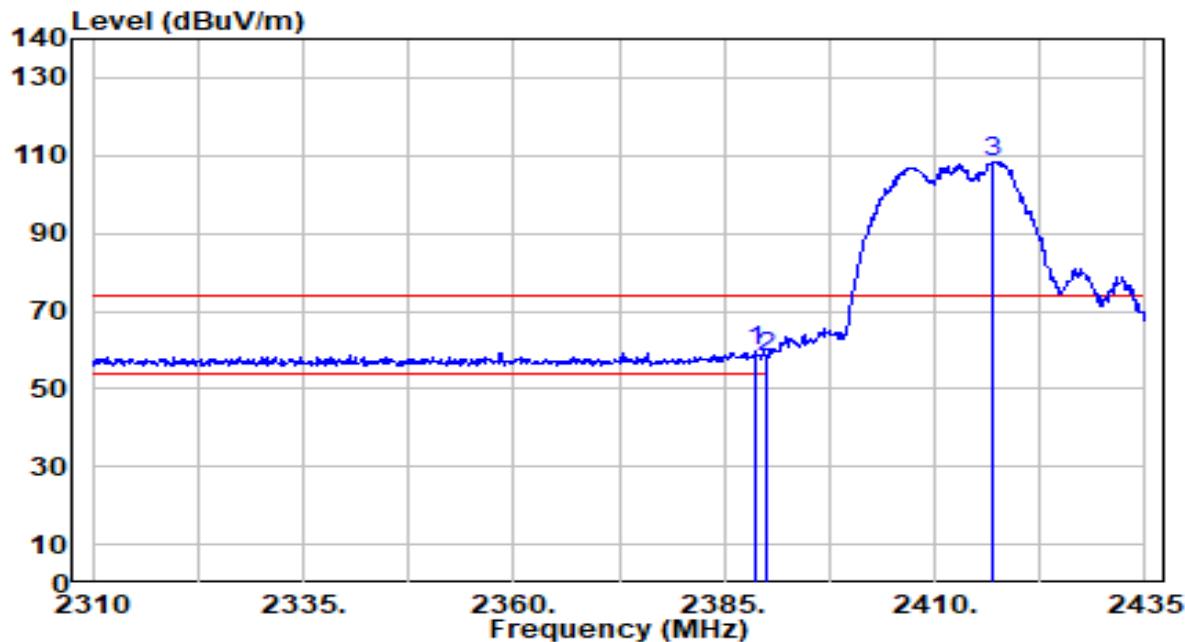


No	Frequency (MHz)	Reading (dB _B uV)	C.F (dB/m)	Measurement (dB _B uV/m)	Margin (dB)	Limit (dB _B uV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.625	29.01	30.54	59.56	-14.44	74.00	300	296	Peak
2	2390.000	27.78	30.55	58.33	-15.67	74.00	300	296	Peak
3	2416.875	77.94	30.62	108.56	N/A	N/A	300	296	Peak

Note:

1. "*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dB_BuV/m) = Reading(dB_BuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Tri-band WIFI7 router	Date of Test	2024-09-21
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

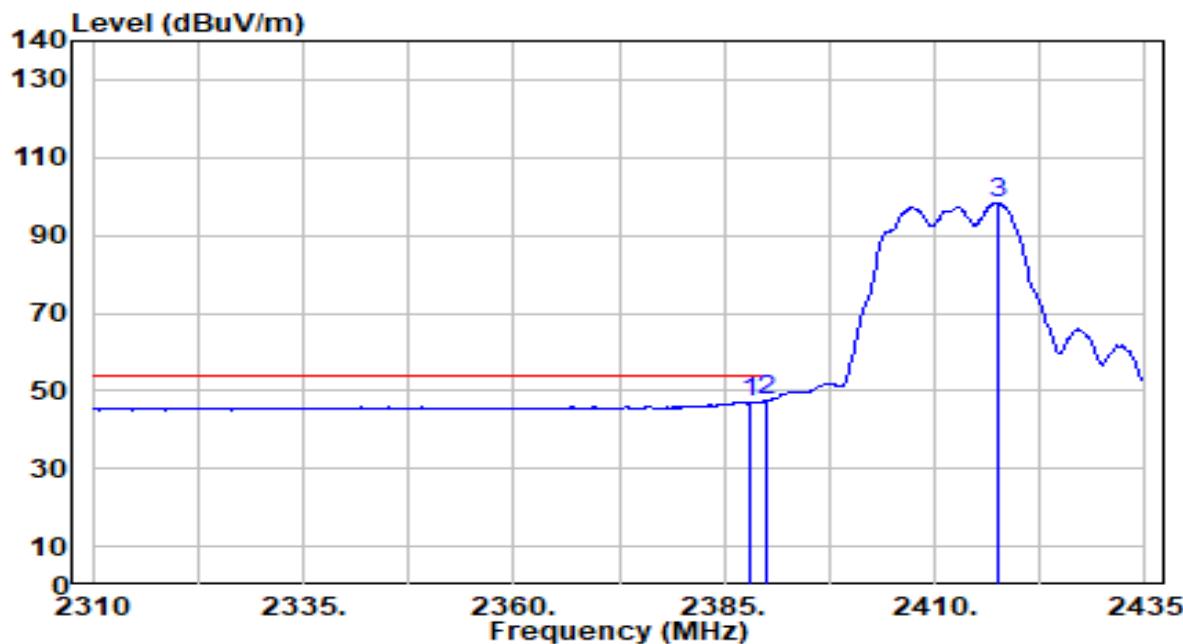


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.125	16.55	30.54	47.09	-6.91	54.00	300	296	Average
2	* 2390.000	16.81	30.55	47.35	-6.65	54.00	300	296	Average
3	2417.500	67.62	30.63	98.25	N/A	N/A	300	296	Average

Note:

1. "*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Tri-band WIFI7 router	Date of Test	2024-09-21
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

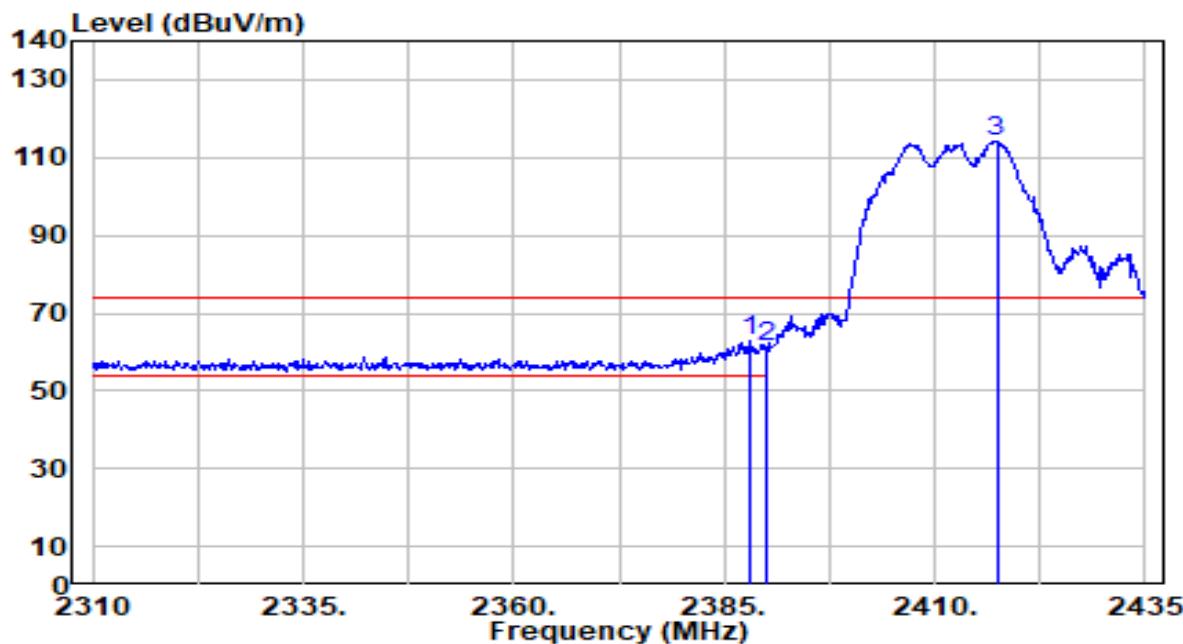


No	Frequency (MHz)	Reading (dB _{BuV})	C.F (dB/m)	Measurement (dB _{BuV/m})	Margin (dB)	Limit (dB _{BuV/m})	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.125	32.31	30.54	62.85	-11.15	74.00	100	341	Peak
2	2390.000	30.85	30.55	61.39	-12.61	74.00	100	341	Peak
3	2417.375	83.75	30.63	114.37	N/A	N/A	100	341	Peak

Note:

1. "*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dB_{BuV/m}) = Reading(dB_{BuV}) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Tri-band WIFI7 router	Date of Test	2024-09-21
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11g_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

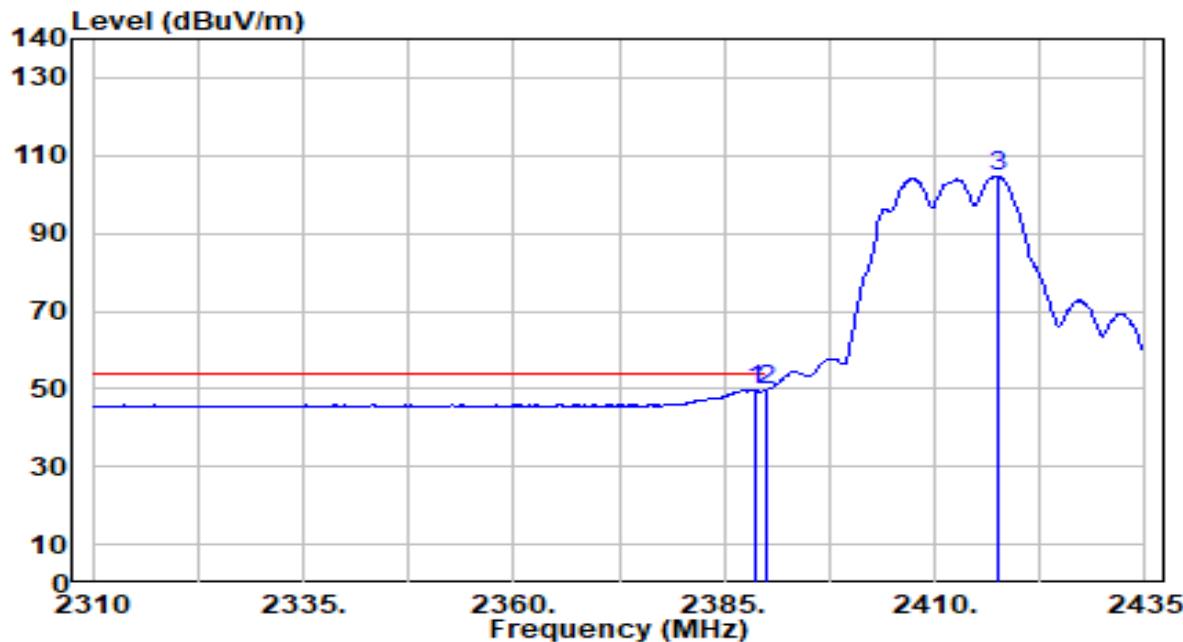


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1 *	2388.750	19.24	30.54	49.78	-4.22	54.00	100	341	Average
2	2390.000	19.06	30.55	49.61	-4.39	54.00	100	341	Average
3	2417.500	74.05	30.63	104.68	N/A	N/A	100	341	Average

Note:

1. "*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Tri-band WIFI7 router	Date of Test	2024-09-21
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

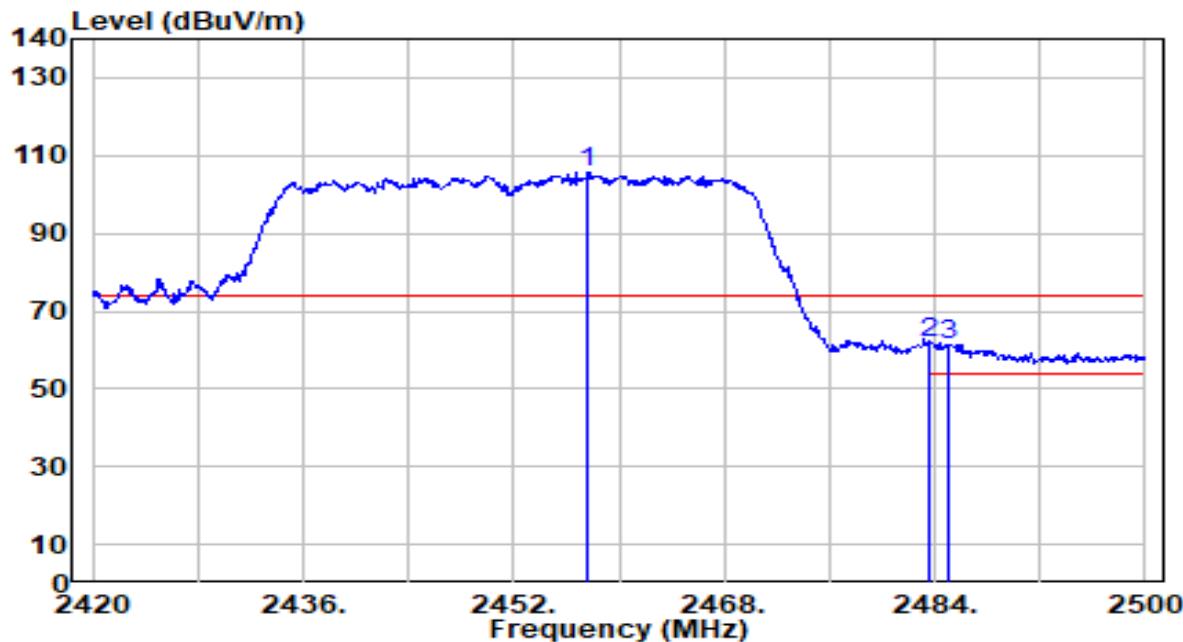


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2457.680	74.84	30.74	105.58	N/A	N/A	130	358	Peak
2	* 2483.500	30.74	30.81	61.55	-12.45	74.00	130	358	Peak
3	2485.040	30.70	30.82	61.52	-12.48	74.00	130	358	Peak

Note:

1. "*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Tri-band WIFI7 router	Date of Test	2024-09-21
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

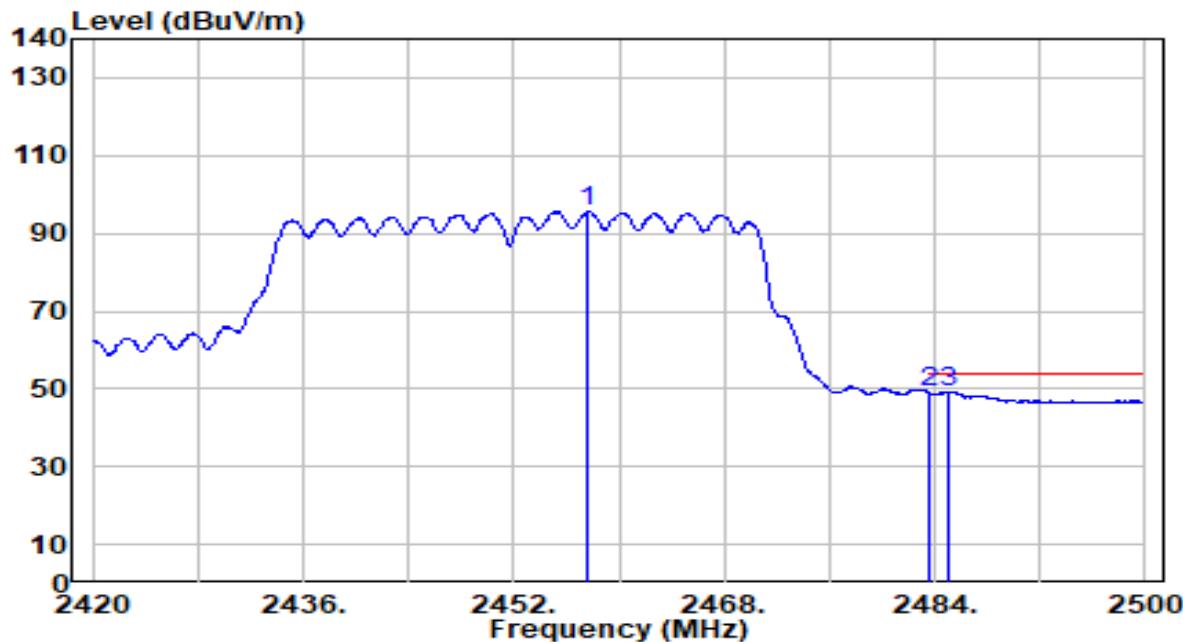


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2457.680	64.82	30.74	95.56	N/A	N/A	130	158	Average
2	2483.500	18.25	30.81	49.07	-4.93	54.00	130	158	Average
3 *	2485.040	18.56	30.82	49.38	-4.62	54.00	130	158	Average

Note:

1. "*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Tri-band WIFI7 router	Date of Test	2024-09-21
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

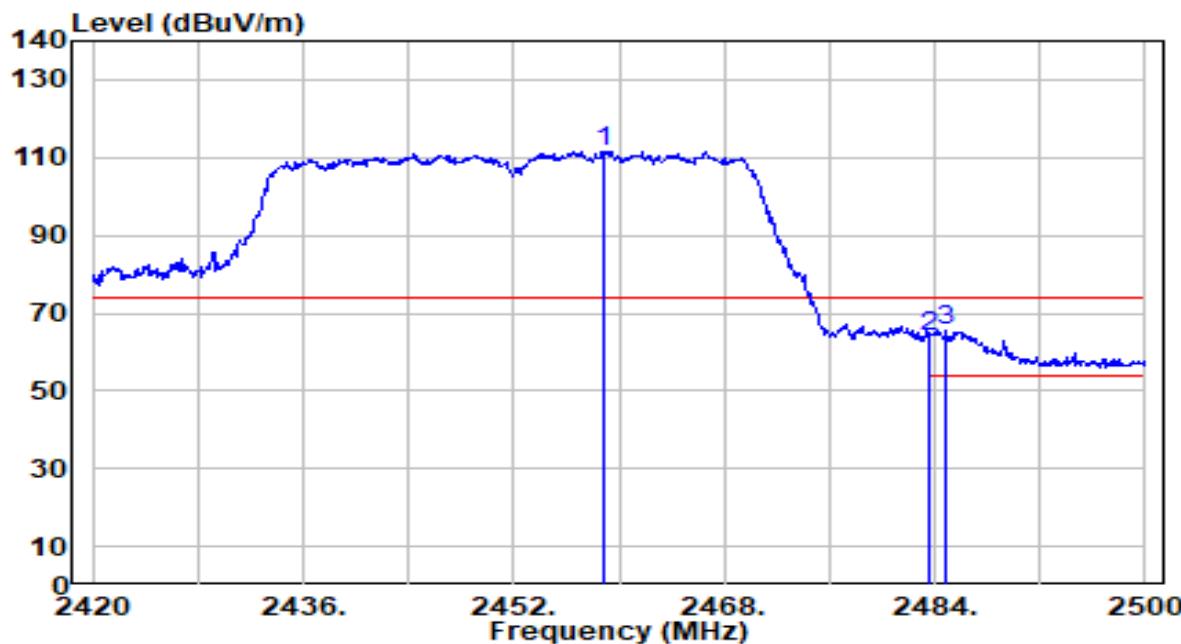


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2458.800	80.89	30.74	111.63	N/A	N/A	100	330	Peak
2	2483.500	33.26	30.81	64.07	-9.93	74.00	100	330	Peak
3 *	2484.880	34.44	30.82	65.25	-8.75	74.00	100	330	Peak

Note:

1. "*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Tri-band WIFI7 router	Date of Test	2024-09-21
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11n-40MHz_TX_CH 9_ANT 0+1	Test Voltage	AC 120V/60Hz

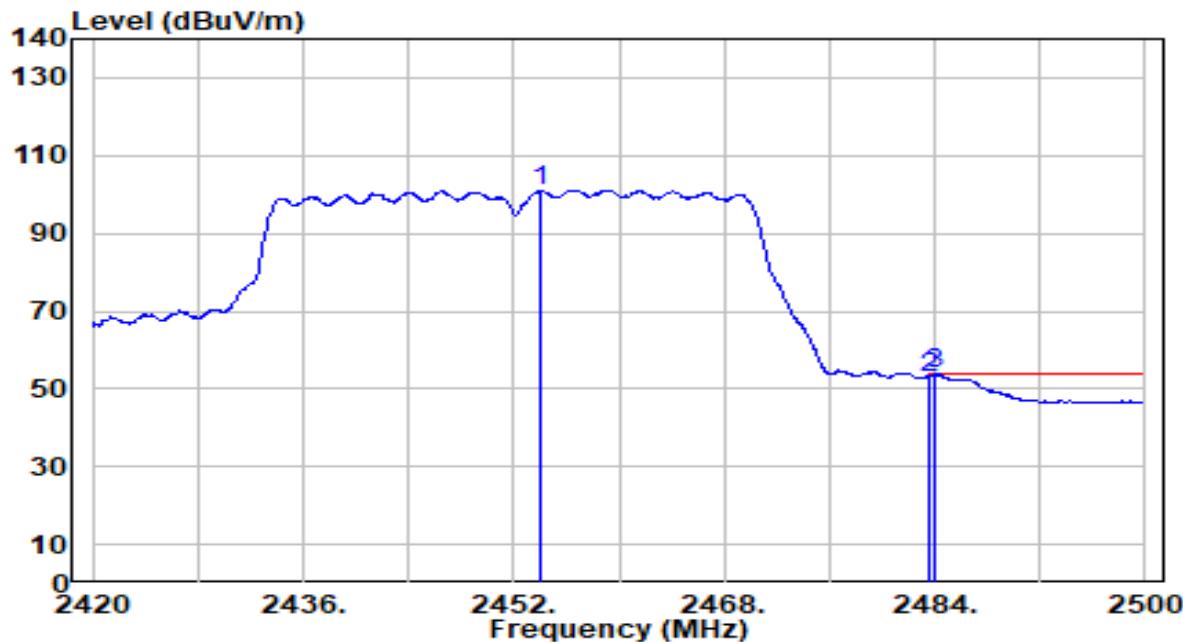


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2454.000	70.44	30.73	101.17	N/A	N/A	100	330	Average
2	2483.500	22.24	30.81	53.05	-0.95	54.00	100	330	Average
3 *	2484.000	23.05	30.81	53.86	-0.14	54.00	100	330	Average

Note:

1. "*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Tri-band WIFI7 router	Date of Test	2024-09-21
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

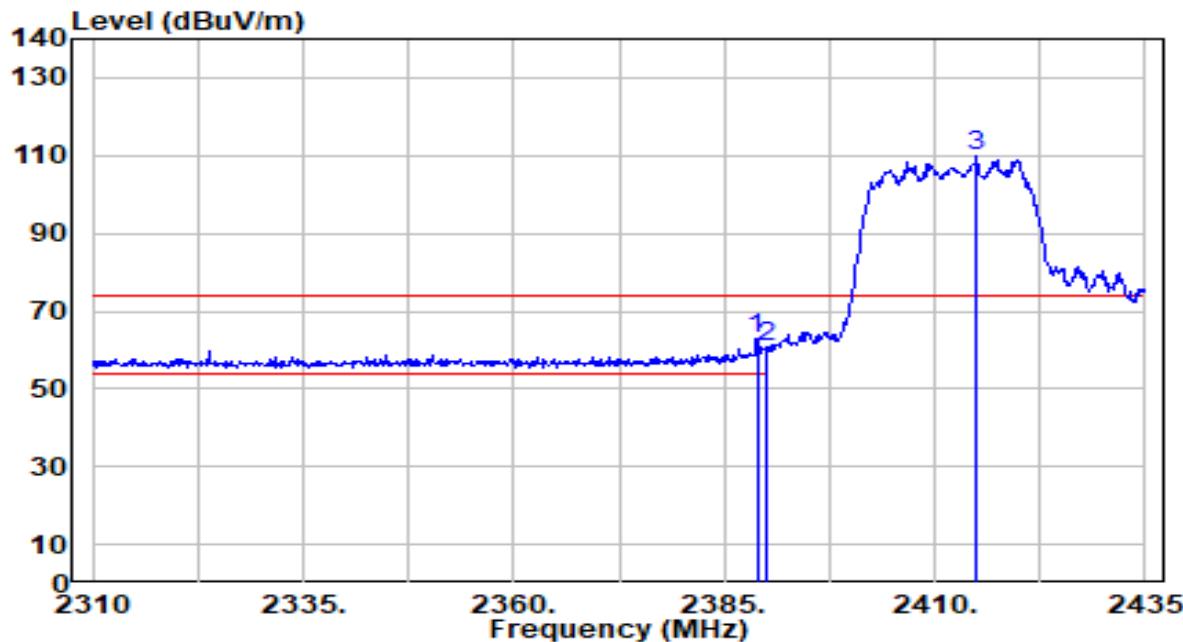


No	Frequency (MHz)	Reading (dB _{BuV})	C.F (dB/m)	Measurement (dB _{BuV/m})	Margin (dB)	Limit (dB _{BuV/m})	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1 *	2388.875	32.29	30.54	62.84	-11.16	74.00	300	296	Peak
2	2390.000	30.28	30.55	60.83	-13.17	74.00	300	296	Peak
3	2414.875	79.19	30.62	109.81	N/A	N/A	300	296	Peak

Note:

1. "*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dB_{BuV/m}) = Reading(dB_{BuV}) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Tri-band WIFI7 router	Date of Test	2024-09-21
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

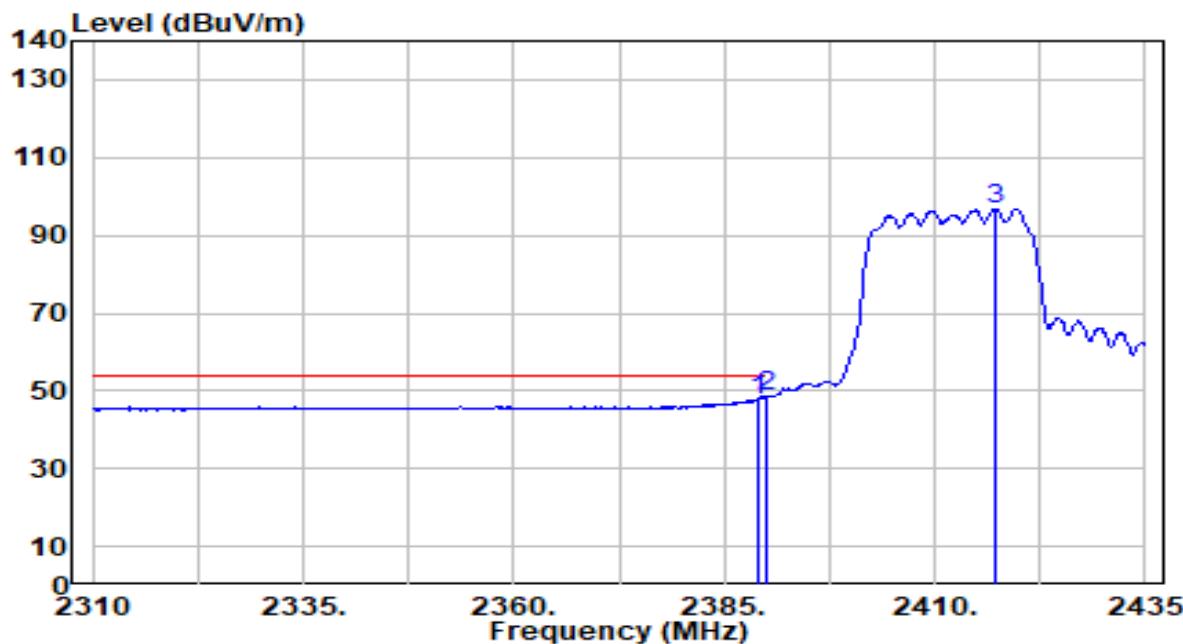


No	Frequency (MHz)	Reading (dB _{BuV})	C.F (dB/m)	Measurement (dB _{BuV/m})	Margin (dB)	Limit (dB _{BuV/m})	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.000	17.16	30.54	47.71	-6.29	54.00	300	296	Average
2	* 2390.000	18.07	30.55	48.62	-5.38	54.00	300	296	Average
3	2417.250	66.30	30.62	96.92	N/A	N/A	300	296	Average

Note:

1. "*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dB_{BuV/m}) = Reading(dB_{BuV}) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Tri-band WIFI7 router	Date of Test	2024-09-21
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

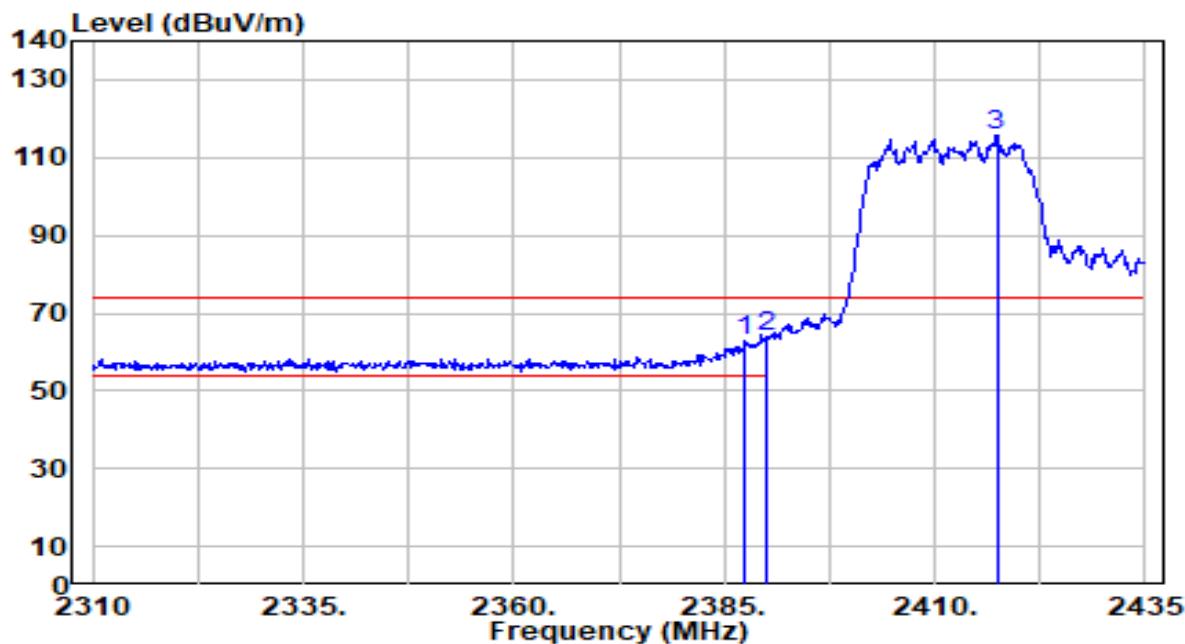


No	Frequency (MHz)	Reading (dB _{BuV})	C.F (dB/m)	Measurement (dB _{BuV/m})	Margin (dB)	Limit (dB _{BuV/m})	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2387.500	32.22	30.54	62.76	-11.24	74.00	100	341	Peak
2	* 2390.000	33.40	30.55	63.95	-10.05	74.00	100	341	Peak
3	2417.375	85.33	30.63	115.95	N/A	N/A	100	341	Peak

Note:

1. "*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dB_{BuV/m}) = Reading(dB_{BuV}) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Tri-band WIFI7 router	Date of Test	2024-09-21
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_CH 1_ANT 0+1	Test Voltage	AC 120V/60Hz

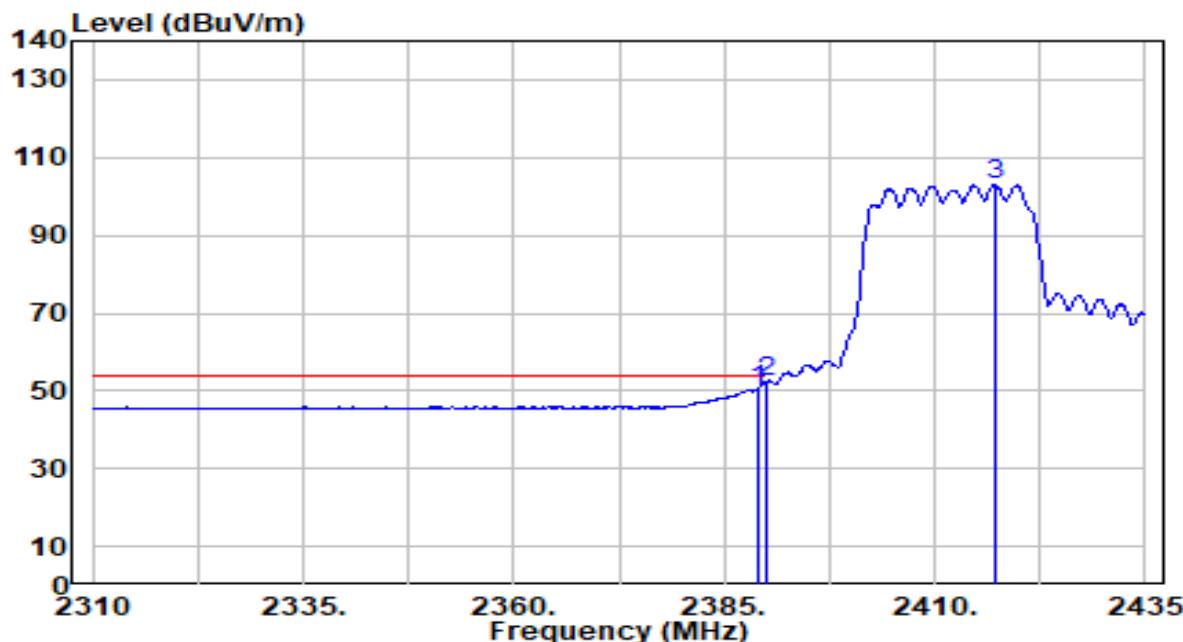


No	Frequency (MHz)	Reading (dB _B uV)	C.F (dB/m)	Measurement (dB _B uV/m)	Margin (dB)	Limit (dB _B uV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2389.000	19.87	30.54	50.41	-3.59	54.00	100	341	Average
2	* 2390.000	21.67	30.55	52.22	-1.78	54.00	100	341	Average
3	2417.250	72.31	30.62	102.94	N/A	N/A	100	341	Average

Note:

1. "*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dB_BuV/m) = Reading(dB_BuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Tri-band WIFI7 router	Date of Test	2024-09-21
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

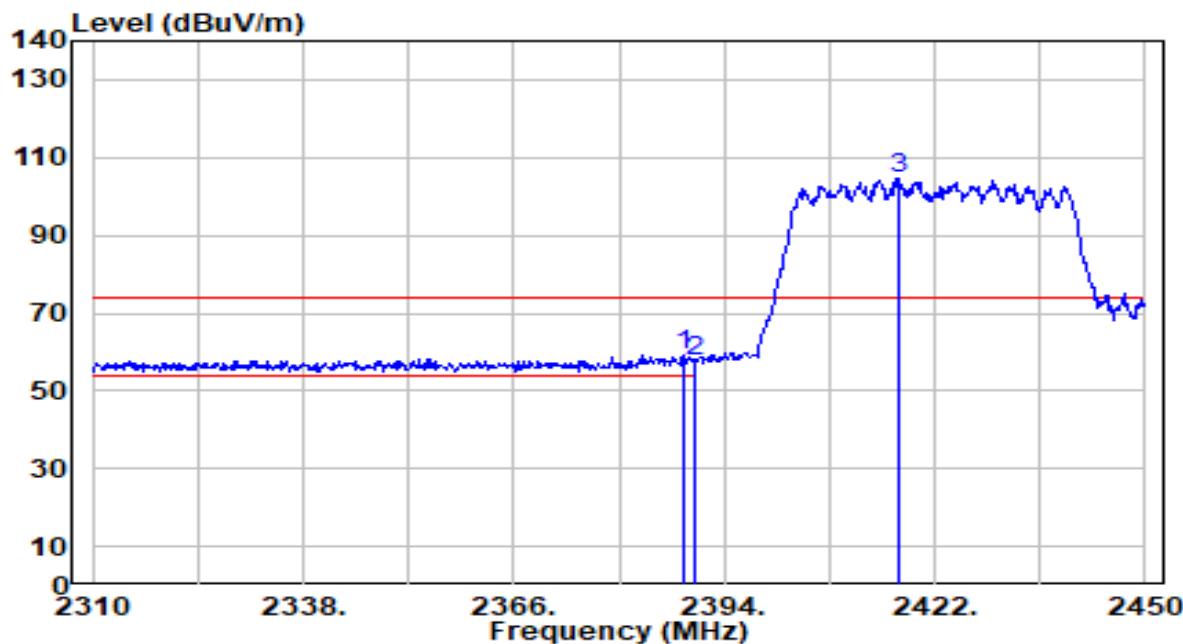


No	Frequency (MHz)	Reading (dB _B uV)	C.F (dB/m)	Measurement (dB _B uV/m)	Margin (dB)	Limit (dB _B uV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.540	28.43	30.54	58.98	-15.02	74.00	300	296	Peak
2	2390.000	26.94	30.55	57.48	-16.52	74.00	300	296	Peak
3	2417.240	74.22	30.62	104.85	N/A	N/A	300	296	Peak

Note:

1. "*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dB_BuV/m) = Reading(dB_BuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Tri-band WIFI7 router	Date of Test	2024-09-21
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

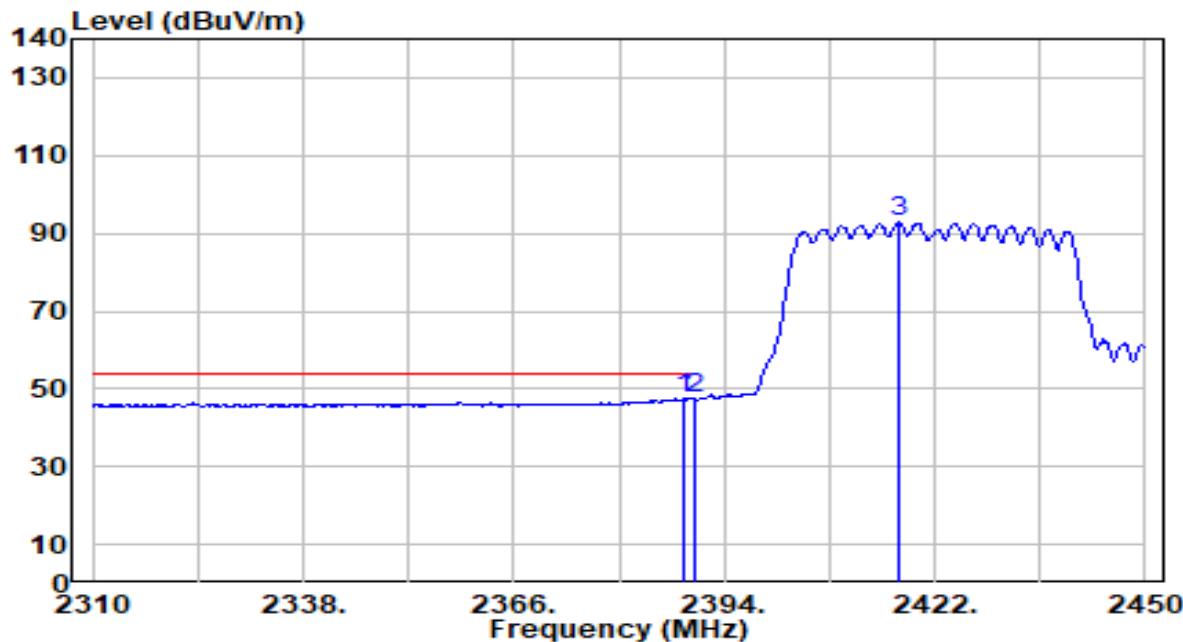


No	Frequency (MHz)	Reading (dB _B U)	C.F (dB/m)	Measurement (dB _B U/m)	Margin (dB)	Limit (dB _B U/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.540	16.85	30.54	47.39	-6.61	54.00	300	296	Average
2	* 2390.000	16.84	30.55	47.39	-6.61	54.00	300	296	Average
3	2417.100	62.16	30.62	92.78	N/A	N/A	300	296	Average

Note:

1. "*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dB_BU/m) = Reading(dB_BU) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Tri-band WIFI7 router	Date of Test	2024-09-21
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

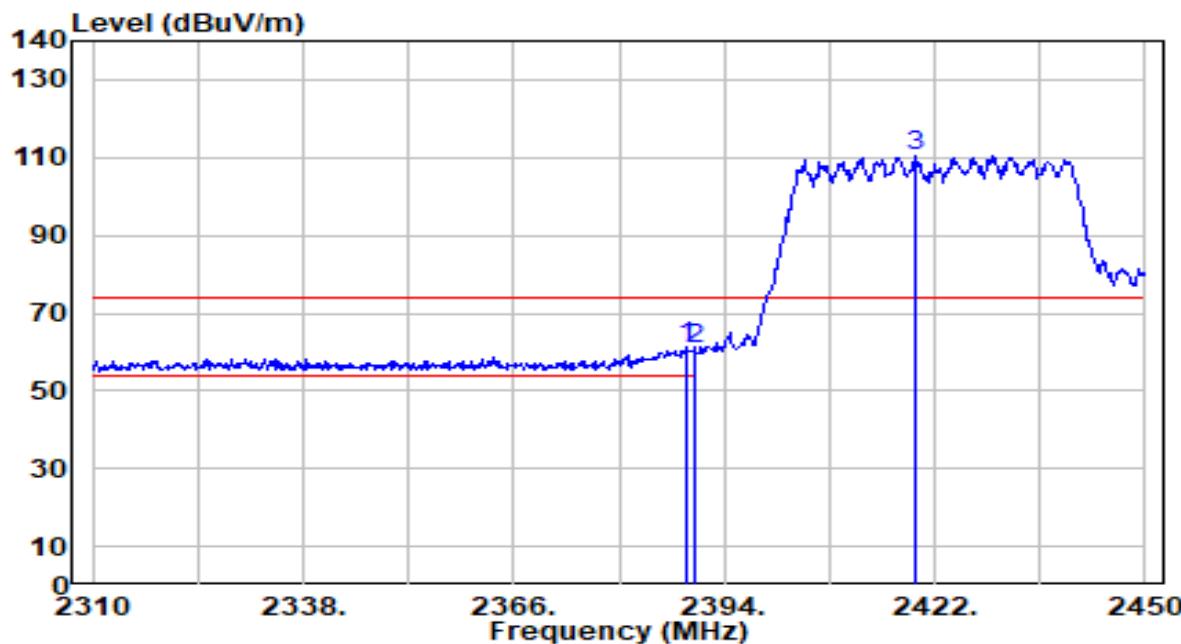


No	Frequency (MHz)	Reading (dB _{BuV})	C.F (dB/m)	Measurement (dB _{BuV/m})	Margin (dB)	Limit (dB _{BuV/m})	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.820	30.70	30.54	61.25	-12.75	74.00	100	341	Peak
2	2390.000	30.07	30.55	60.62	-13.38	74.00	100	341	Peak
3	2419.480	80.01	30.63	110.64	N/A	N/A	100	341	Peak

Note:

1. "*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dB_{BuV/m}) = Reading(dB_{BuV}) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Tri-band WIFI7 router	Date of Test	2024-09-21
Factor	DRH18-E	Temp. / Humidity	20°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11be-40MHz_TX_CH 3_ANT 0+1	Test Voltage	AC 120V/60Hz

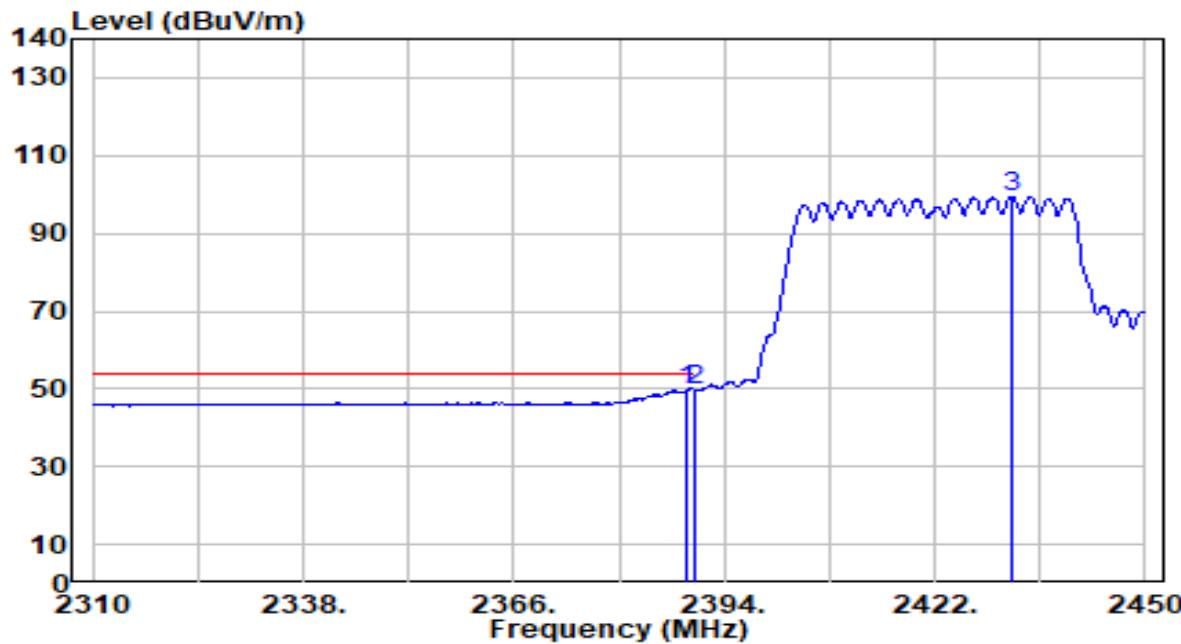

No	Frequency (MHz)	Reading (dB _B uV)	C.F (dB/m)	Measurement (dB _B uV/m)	Margin (dB)	Limit (dB _B uV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	2388.960	19.08	30.54	49.63	-4.37	54.00	100	341	Average
2 *	2390.000	19.34	30.55	49.89	-4.11	54.00	100	341	Average
3	2432.360	68.63	30.67	99.30	N/A	N/A	100	341	Average

Note:

1. "*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dB_BuV/m) = Reading(dB_BuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.8. AC Conducted Emissions Measurement


7.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.8.2. Test Setup

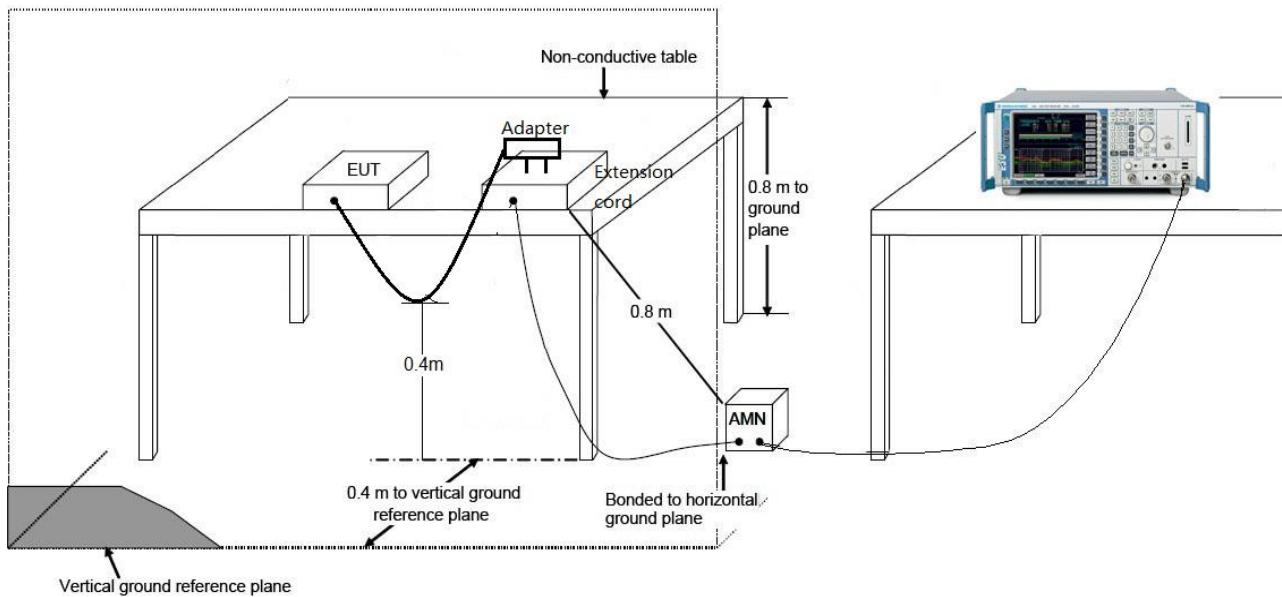

7.8.3. Test Result

Note: Refer to the original report is 2406RSU024-U1.

8. CONCLUSION

The data collected relate only the item(s) tested and show that the device is compliance with Part 15C of the FCC Rules.

Appendix A : Test Setup Photograph

Refer to "2409TW0114-UT" file.

Appendix B : External Photograph

Refer to "2409TW0114-UE" file.

Appendix C : Internal Photograph

Refer to "2409TW0114-UI" file.

The End