


Site	SIP-AC2	Test Date	2024-07-01
Test Engineer	Oliver Cheng	Temp./Humidity	24.3°C/65.2%
Factor	BBHA 9120D_02042_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11a at 5180MHz		

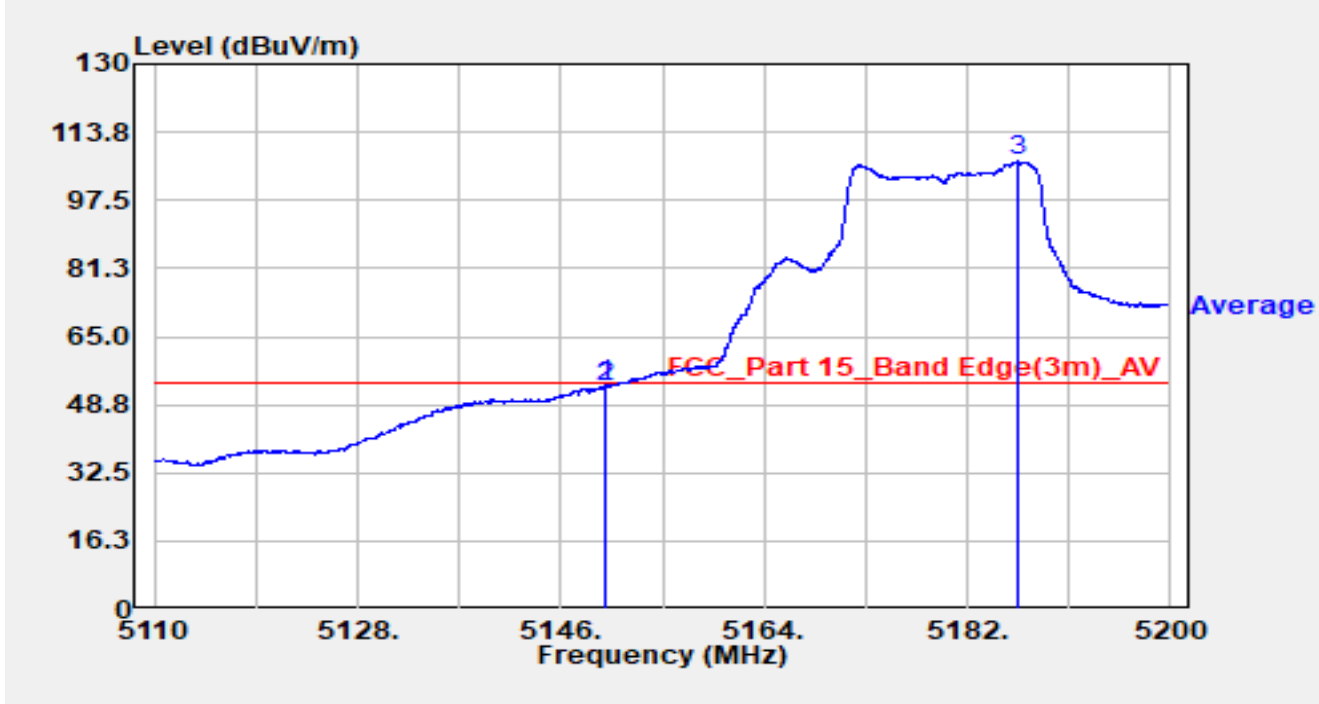


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.825	54.98	-1.75	53.23	-0.77	54.00	Average
2		5150.000	54.60	-1.72	52.88	-1.12	54.00	Average
3		5186.455	70.11	36.78	106.89	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2024-07-01
Test Engineer	Oliver Cheng	Temp./Humidity	24.3°C/65.2%
Factor	BBHA 9120D_02042_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11a at 5180MHz		

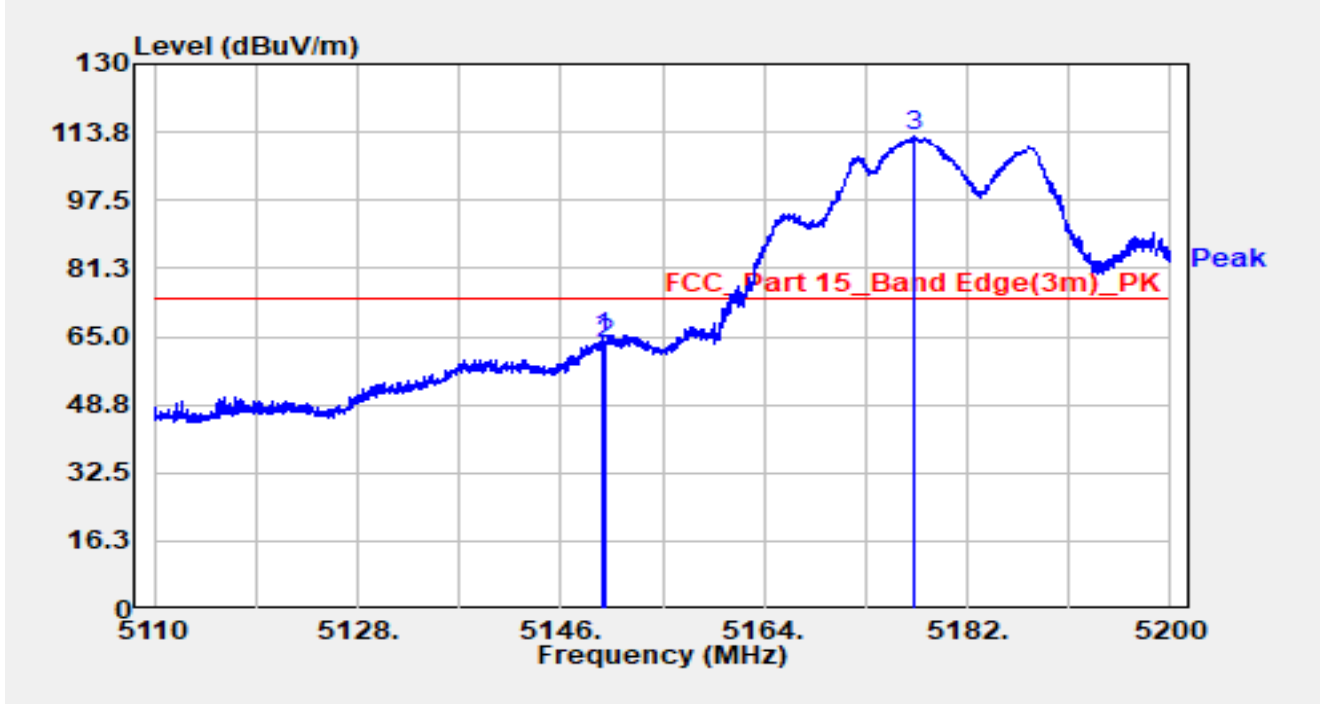


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.780	66.28	-1.76	64.52	-9.48	74.00	Peak
2		5150.000	65.10	-1.72	63.38	-10.62	74.00	Peak
3		5177.185	69.34	43.27	112.61	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2024-07-01
Test Engineer	Oliver Cheng	Temp./Humidity	24.3°C/65.2%
Factor	BBHA 9120D_02042_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11a at 5180MHz		

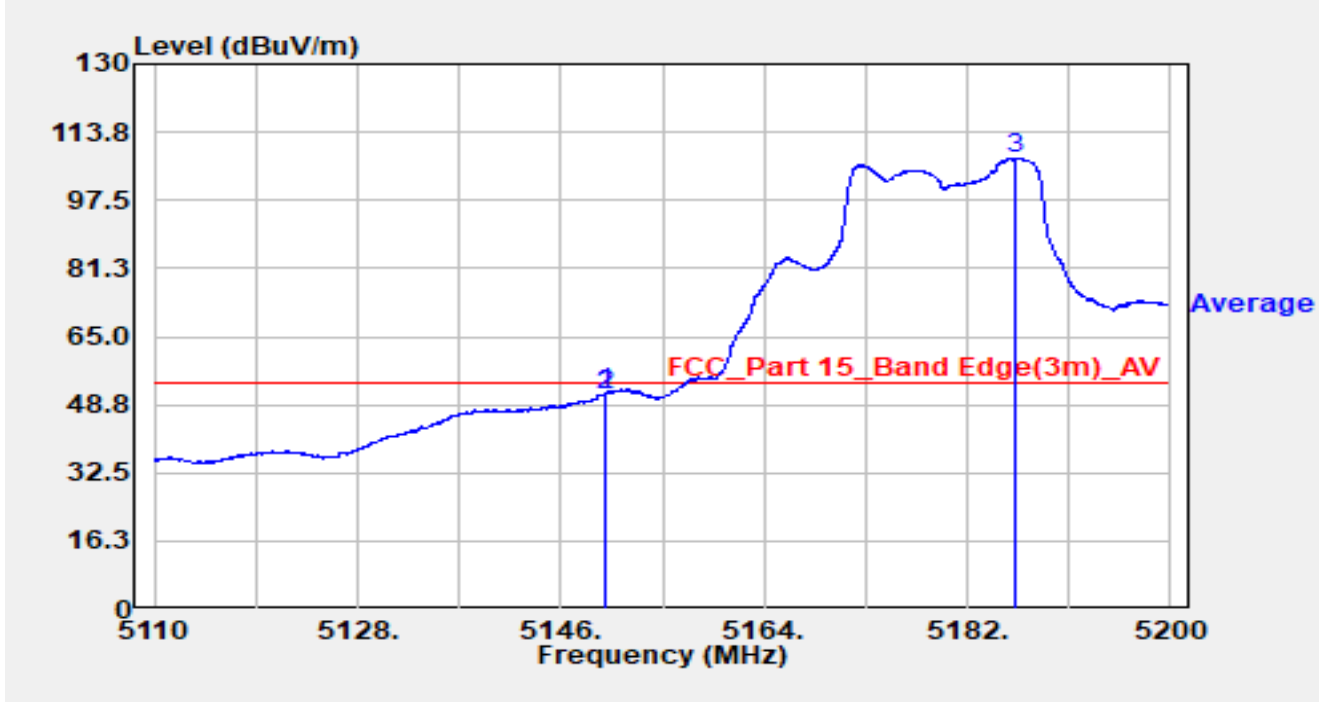


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.960	53.23	-1.73	51.50	-2.50	54.00	Average
2		5150.000	52.94	-1.72	51.22	-2.78	54.00	Average
3		5186.320	70.87	36.68	107.55	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2024-07-01
Test Engineer	Oliver Cheng	Temp./Humidity	24.3°C/65.2%
Factor	BBHA 9120D_02042_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11a at 5320MHz		

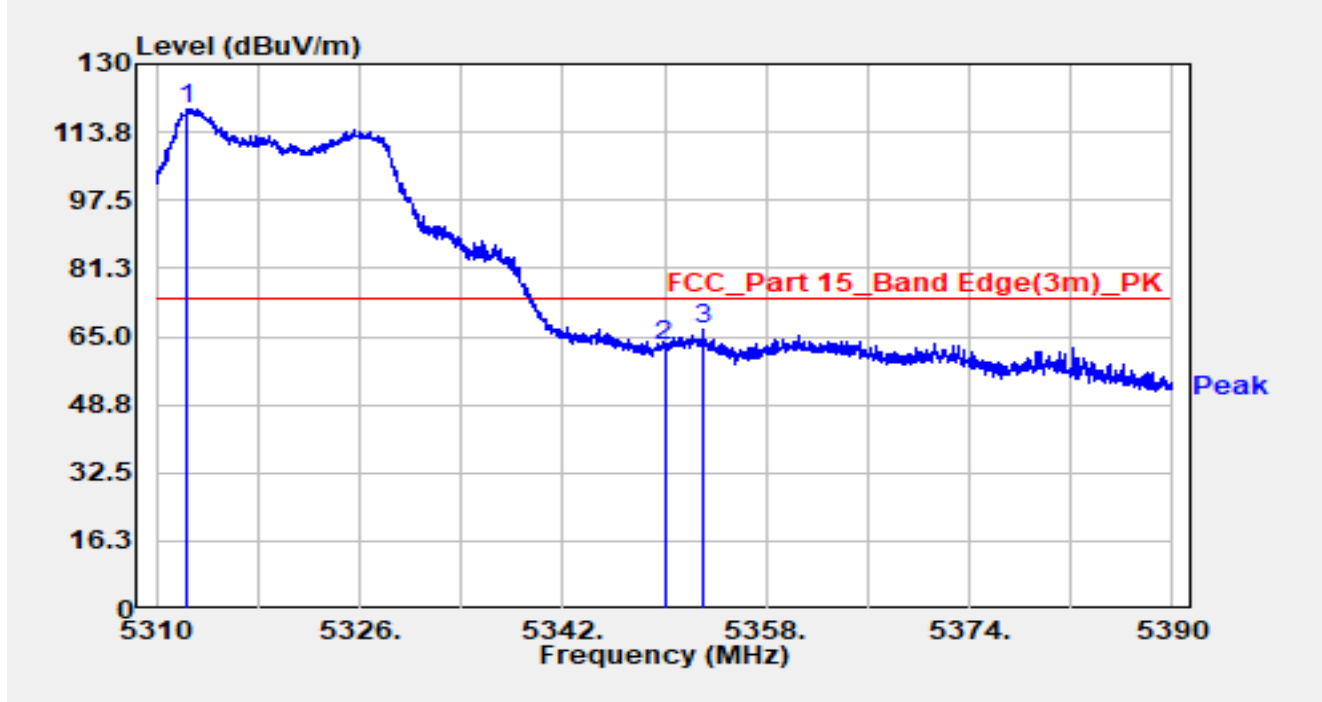


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5312.440	72.68	46.65	119.34	N/A	N/A	Peak
2		5350.000	63.60	-0.87	62.73	-11.27	74.00	Peak
3	*	5353.000	68.69	-1.89	66.80	-7.20	74.00	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2024-07-01
Test Engineer	Oliver Cheng	Temp./Humidity	24.3°C/65.2%
Factor	BBHA 9120D_02042_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11a at 5320MHz		

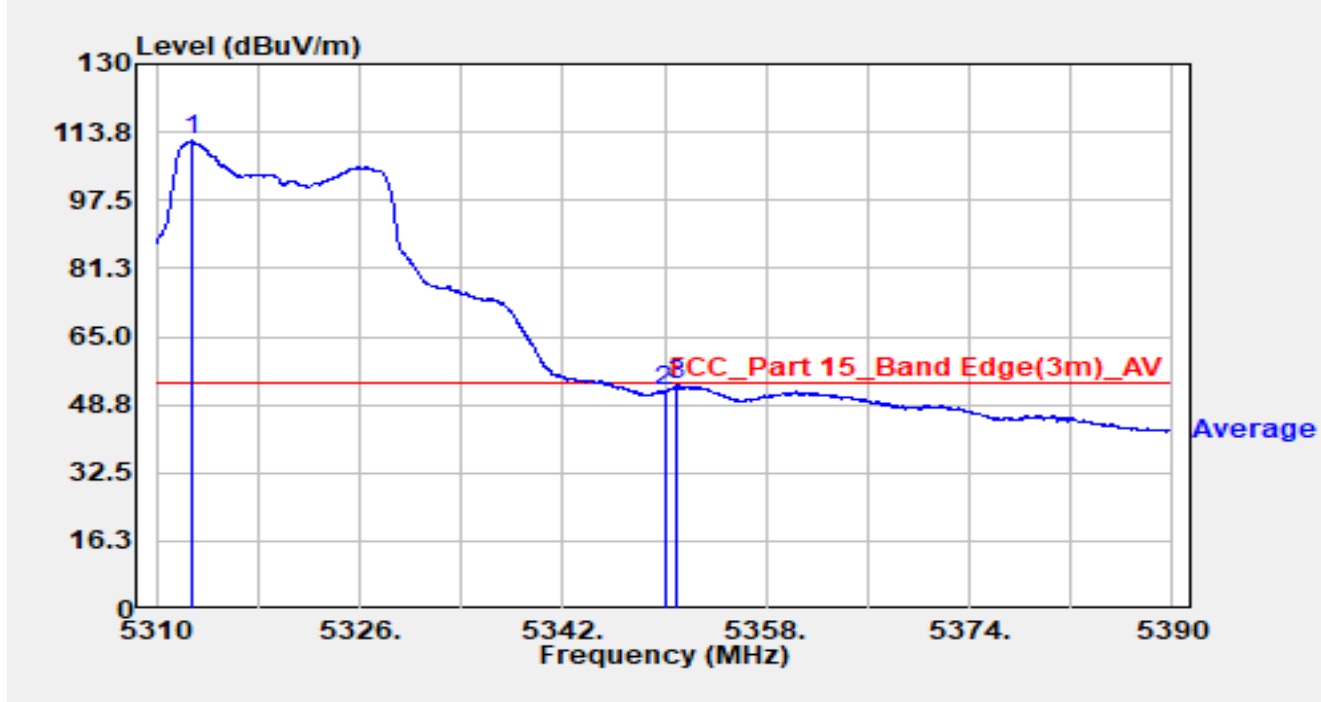


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5312.720	64.49	47.14	111.63	N/A	N/A	Average
2		5350.000	52.92	-0.87	52.05	-1.95	54.00	Average
3	*	5351.040	54.74	-1.34	53.40	-0.60	54.00	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2024-07-01
Test Engineer	Oliver Cheng	Temp./Humidity	24.3°C/65.2%
Factor	BBHA 9120D_02042_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11a at 5320MHz		

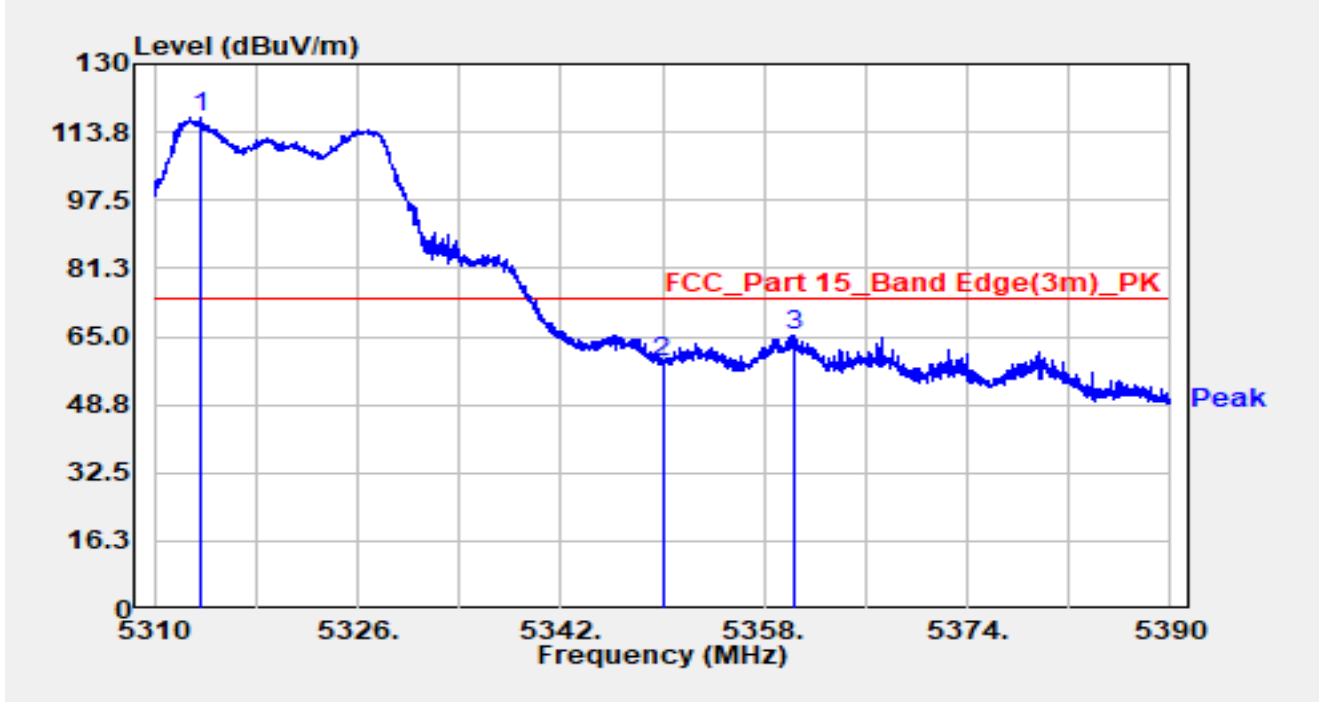


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5313.720	69.40	47.68	117.09	N/A	N/A	Peak
2		5350.000	59.73	-0.87	58.86	-15.14	74.00	Peak
3	*	5360.280	68.51	-3.11	65.40	-8.60	74.00	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2024-07-01
Test Engineer	Oliver Cheng	Temp./Humidity	24.3°C/65.2%
Factor	BBHA 9120D_02042_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11a at 5320MHz		

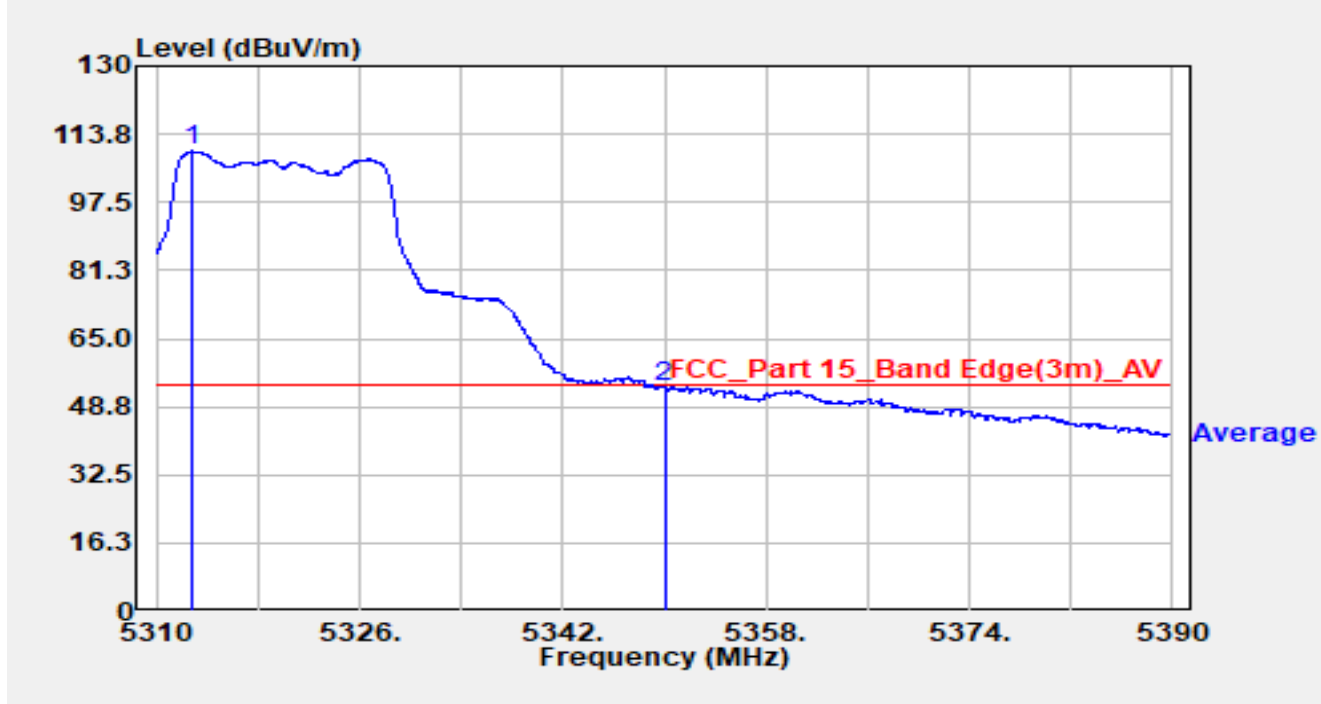


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5312.880	62.39	47.26	109.65	N/A	N/A	Average
2	*	5350.000	54.33	-0.87	53.46	-0.54	54.00	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-04
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11a at 5500MHz		

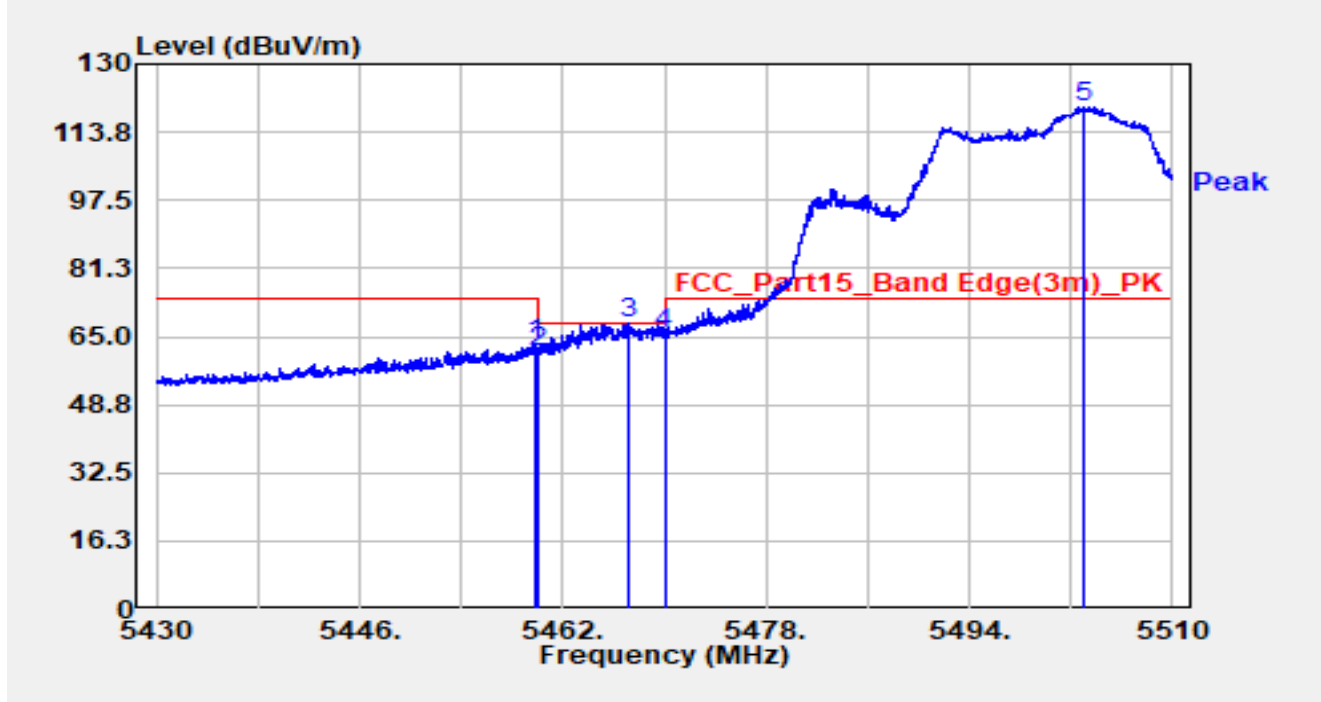


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5459.920	67.11	-3.88	63.23	-10.77	74.00	Peak
2		5460.000	64.99	-3.86	61.12	-7.08	68.20	Peak
3	*	5467.120	71.07	-2.98	68.10	-0.10	68.20	Peak
4		5470.000	67.72	-2.10	65.62	-2.58	68.20	Peak
5		5502.960	78.26	41.48	119.74	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-04
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11a at 5500MHz		

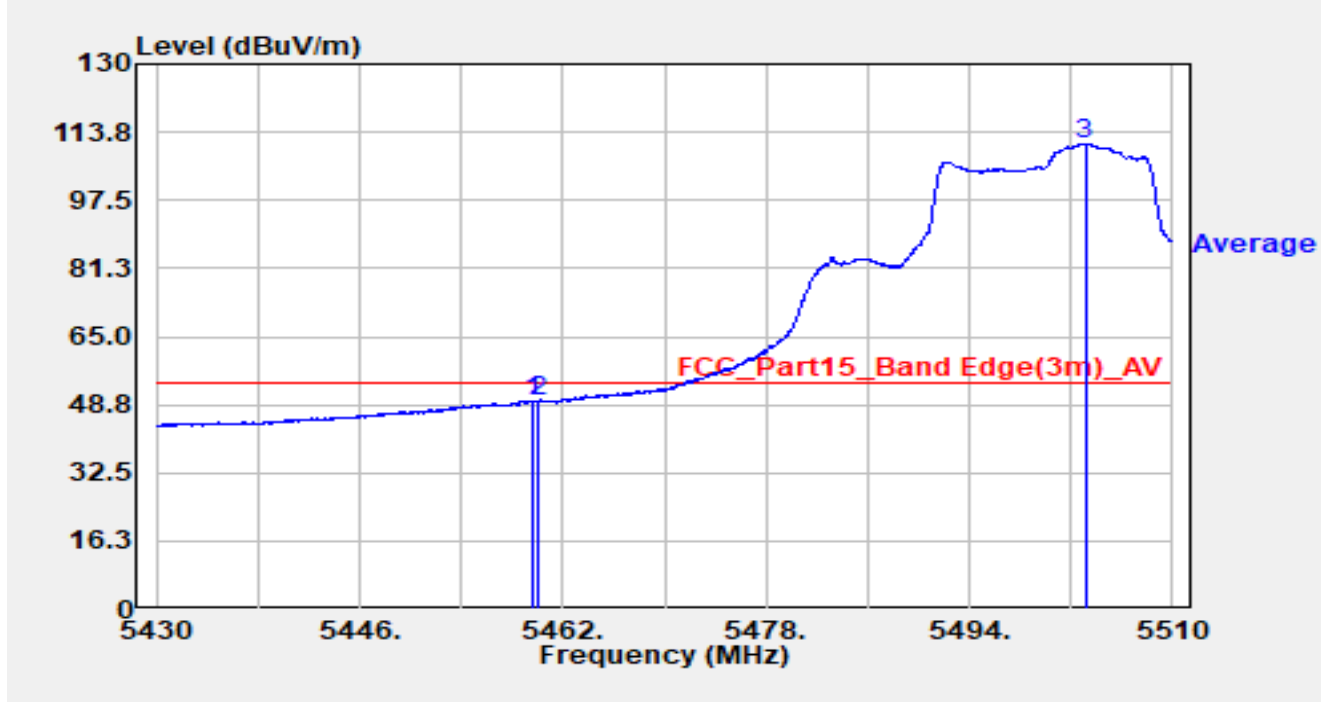


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5459.680	53.62	-3.91	49.71	-4.29	54.00	Average
2		5460.000	53.55	-3.86	49.68	-4.32	54.00	Average
3		5503.120	69.13	41.83	110.96	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-04
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11a at 5500MHz		

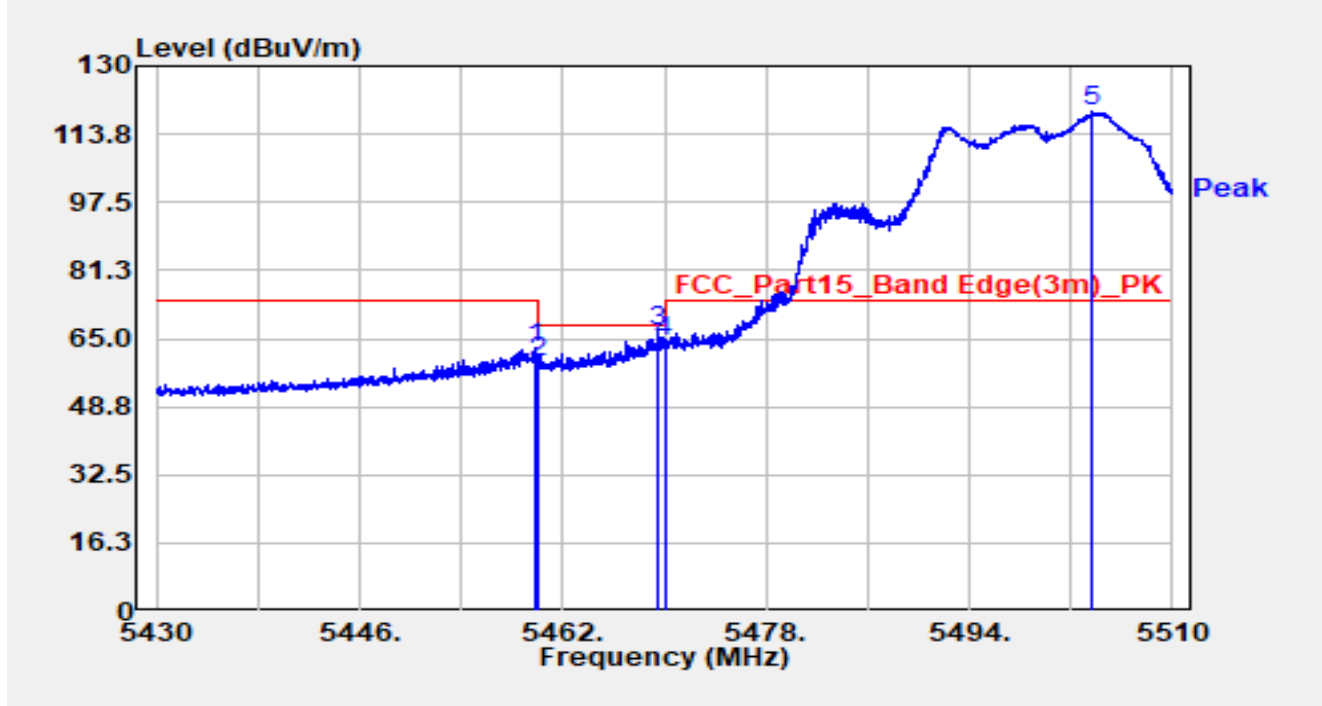


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5459.880	66.77	-3.88	62.89	-11.11	74.00	Peak
2		5460.000	63.46	-3.86	59.59	-8.61	68.20	Peak
3	*	5469.480	68.89	-2.27	66.62	-1.58	68.20	Peak
4		5470.000	66.18	-2.10	64.07	-4.13	68.20	Peak
5		5503.720	76.36	42.79	119.15	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-04
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11a at 5500MHz		

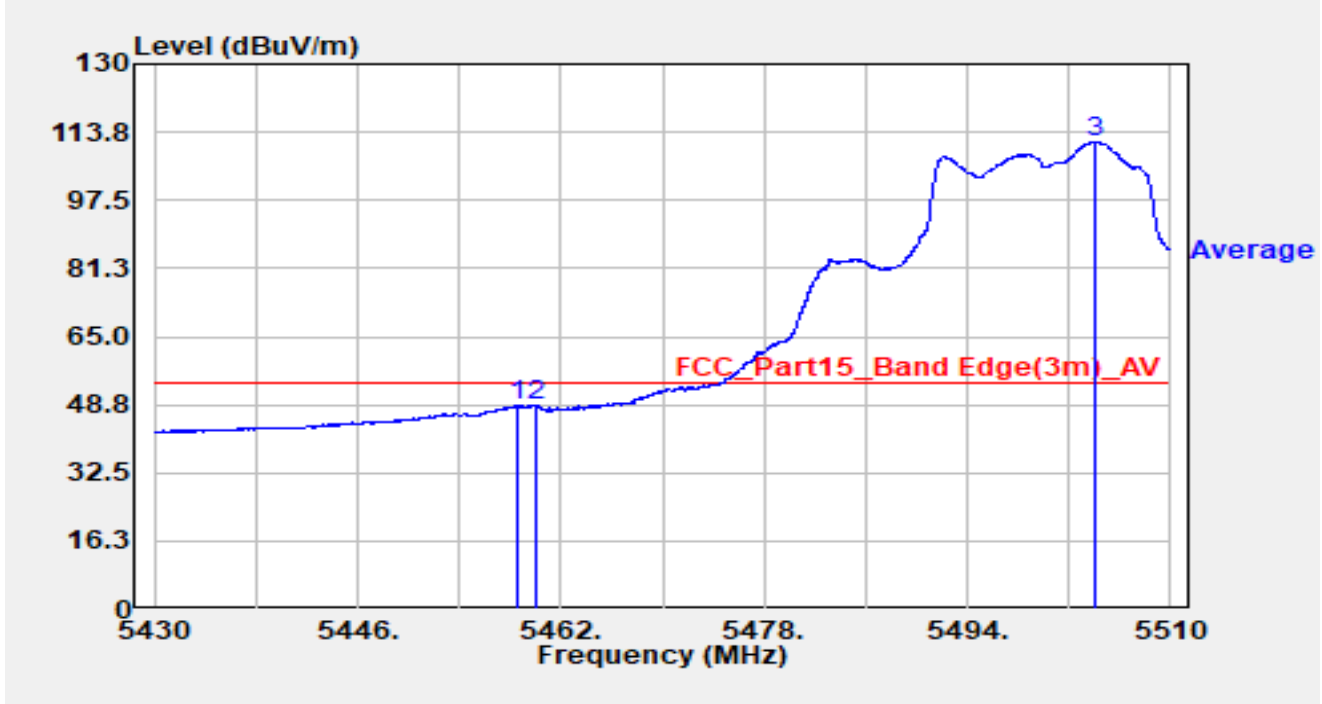


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5458.680	52.58	-3.99	48.59	-5.41	54.00	Average
2		5460.000	52.30	-3.86	48.43	-5.57	54.00	Average
3		5504.000	68.37	43.11	111.48	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-04
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11a at 5700MHz		

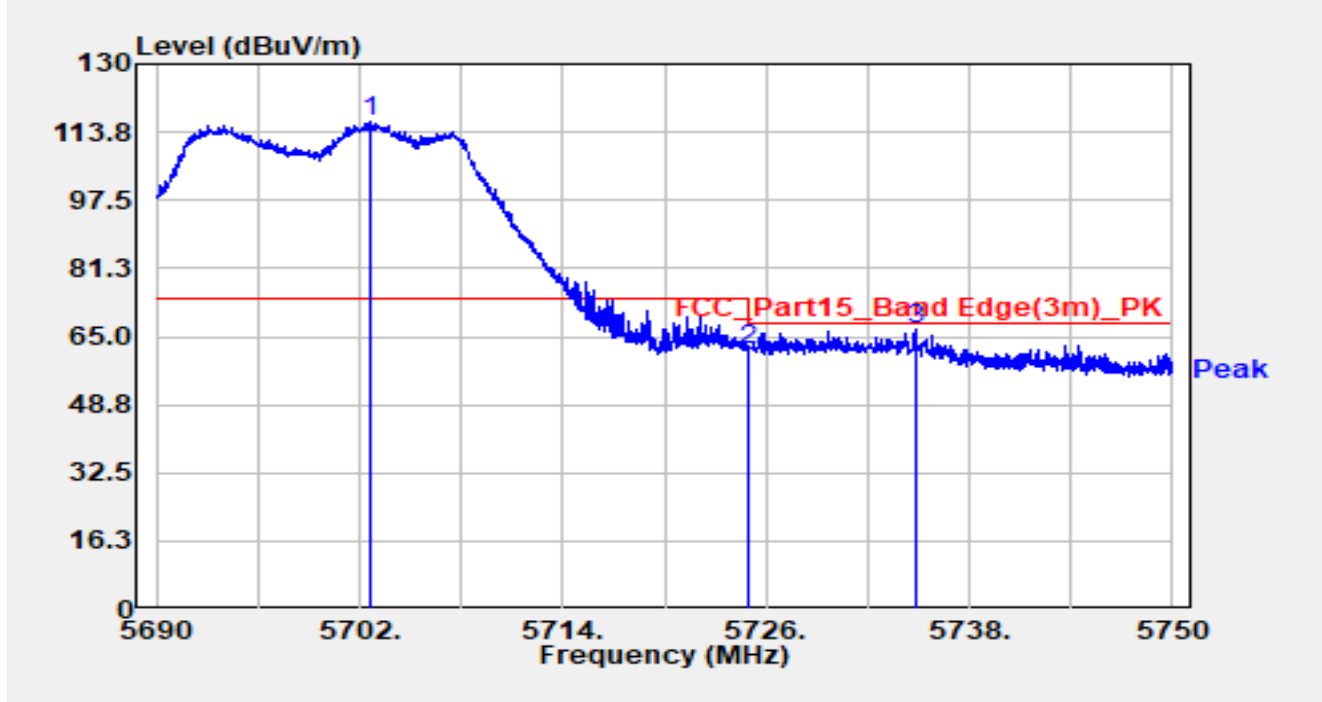


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5702.690	79.21	37.11	116.32	N/A	N/A	Peak
2		5725.000	63.73	-2.12	61.62	-6.58	68.20	Peak
3	*	5734.880	71.30	-4.57	66.73	-1.47	68.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-04
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11a at 5700MHz		

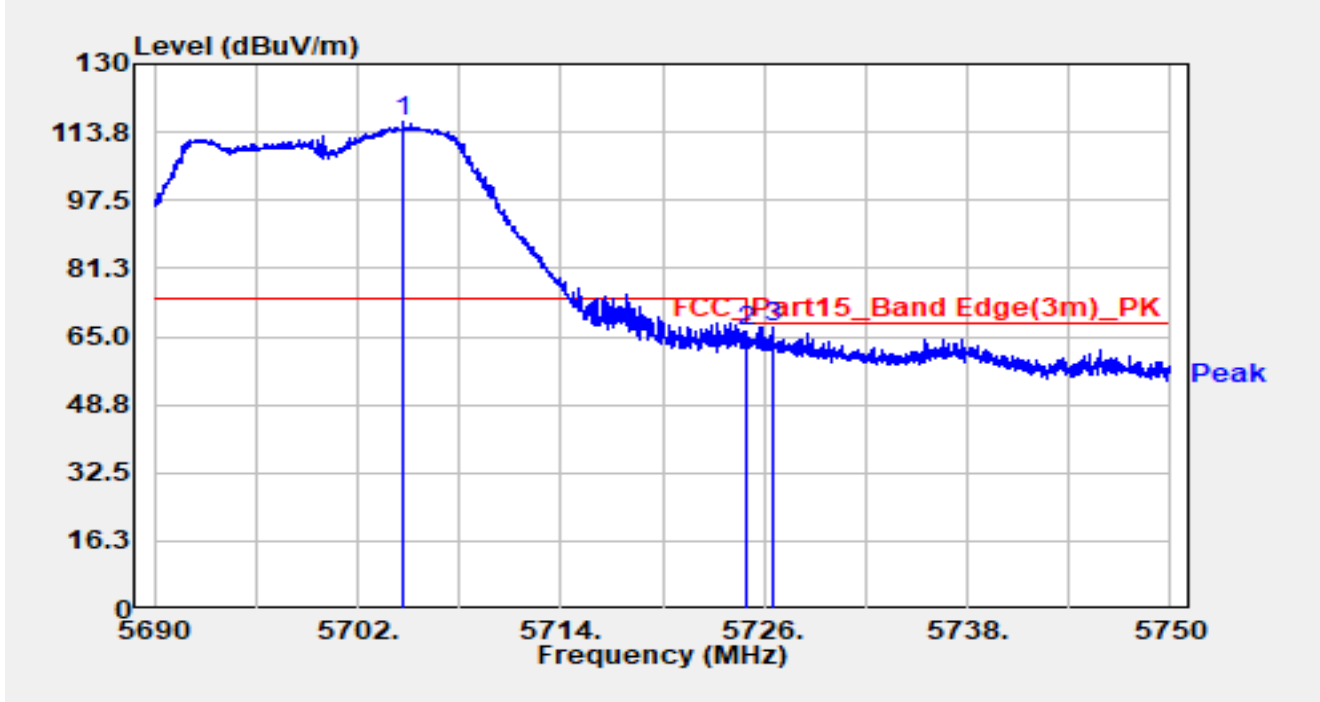


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5704.640	78.07	38.00	116.07	N/A	N/A	Peak
2		5725.000	68.47	-2.12	66.35	-1.85	68.20	Peak
3	*	5726.510	70.29	-2.85	67.43	-0.77	68.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-05
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11a at 5745MHz		

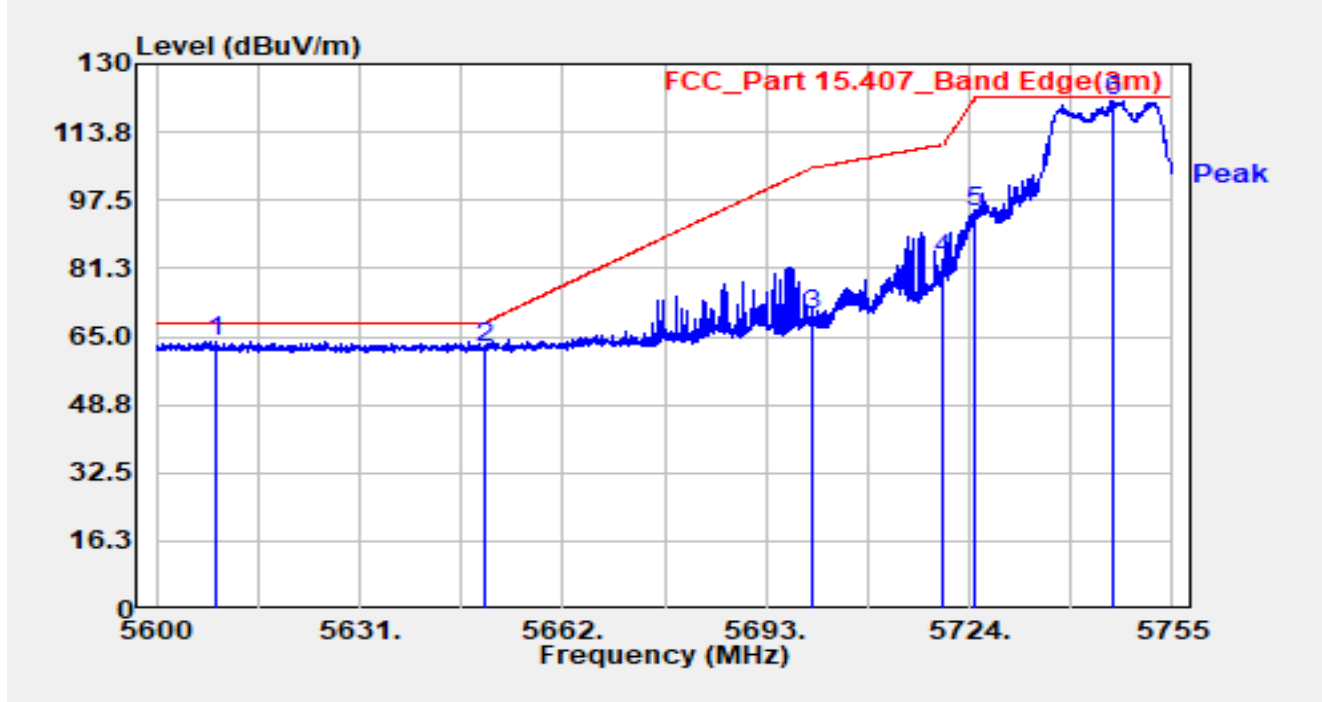


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5608.913	70.90	-7.04	63.86	-4.34	68.20	Peak
2		5650.000	69.47	-7.14	62.33	-5.87	68.20	Peak
3		5700.000	77.45	-7.06	70.39	-34.81	105.20	Peak
4		5720.000	90.55	-7.20	83.36	-27.44	110.80	Peak
5		5725.000	101.87	-7.22	94.65	-27.55	122.20	Peak
6		5746.087	128.67	-7.38	121.29	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-05
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11a at 5745MHz		

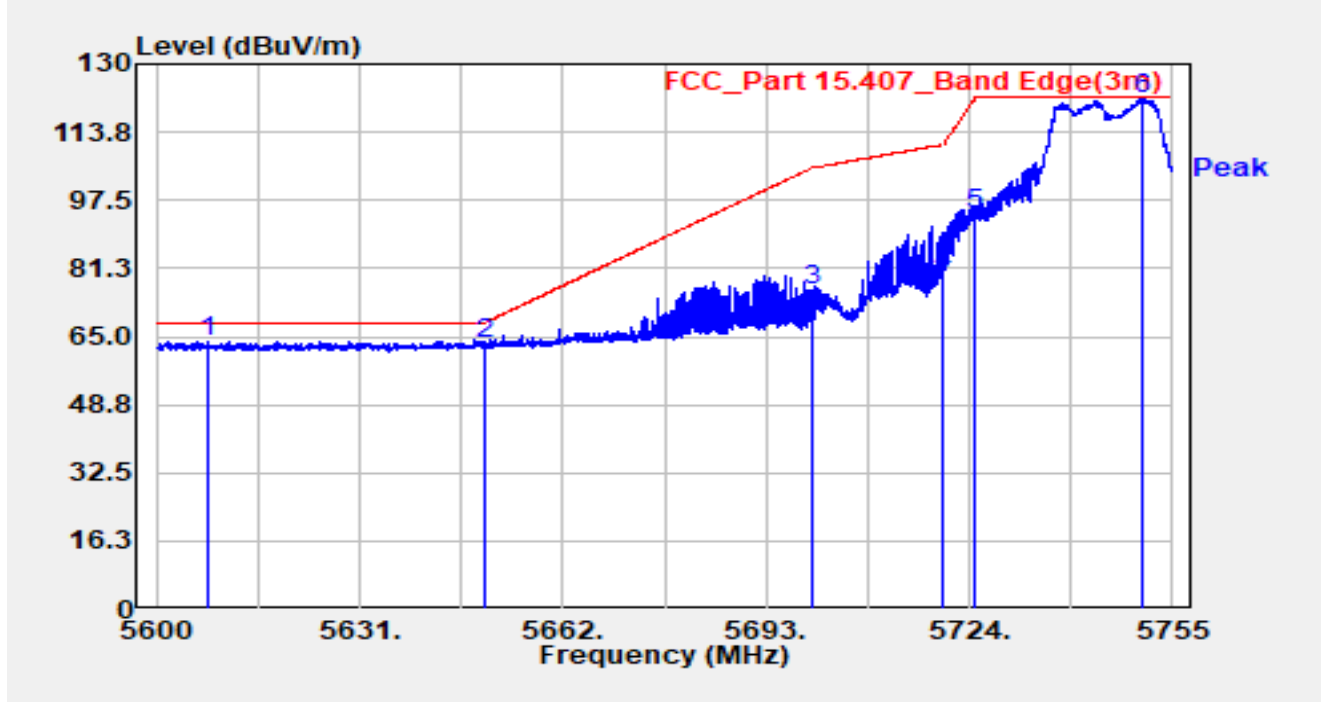


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5607.828	71.01	-7.02	63.99	-4.21	68.20	Peak
2		5650.000	70.33	-7.14	63.19	-5.01	68.20	Peak
3		5700.000	83.17	-7.06	76.11	-29.09	105.20	Peak
4		5720.000	87.35	-7.20	80.15	-30.65	110.80	Peak
5		5725.000	101.18	-7.22	93.96	-28.24	122.20	Peak
6		5750.583	129.11	-7.33	121.78	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-05
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11a at 5825MHz		

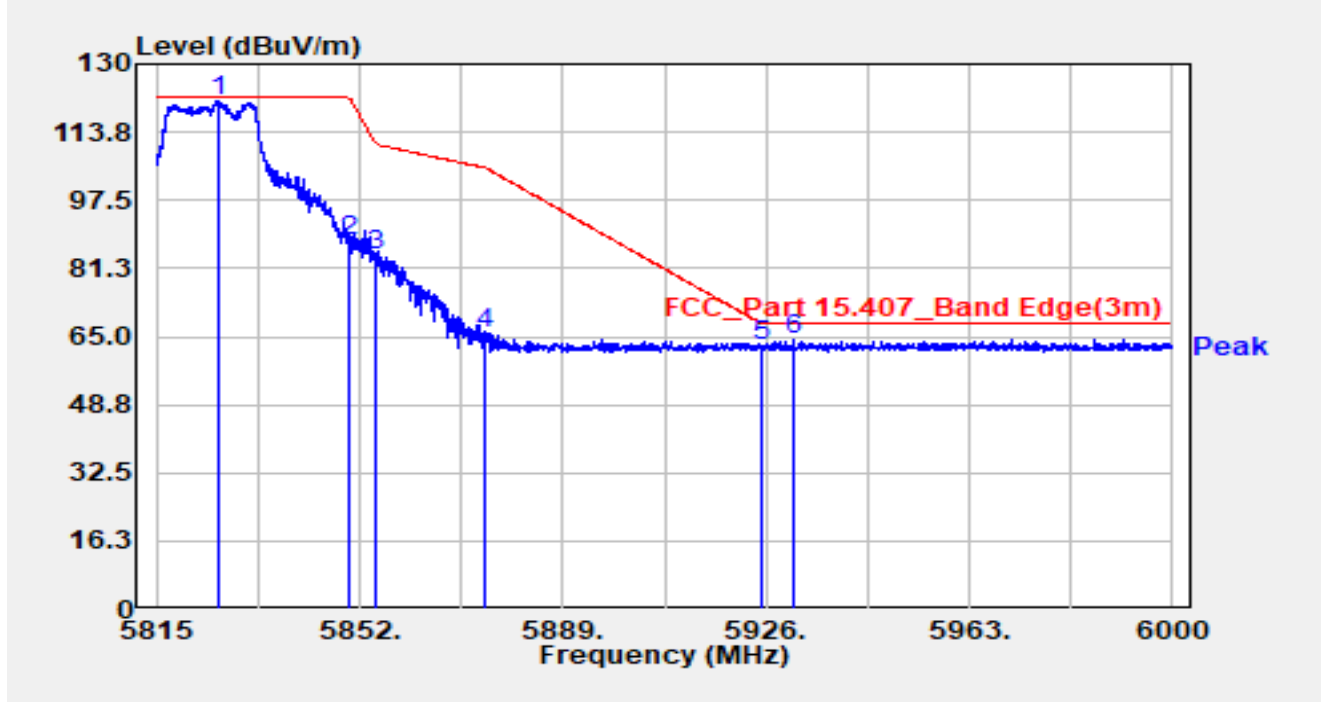


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5826.377	128.09	-7.03	121.06	N/A	N/A	Peak
2		5850.000	94.84	-7.06	87.77	-34.43	122.20	Peak
3		5855.000	91.37	-7.07	84.29	-26.51	110.80	Peak
4		5875.000	73.06	-7.15	65.91	-39.29	105.20	Peak
5		5925.000	69.94	-7.01	62.93	-5.27	68.20	Peak
6	*	5930.902	71.34	-6.98	64.36	-3.84	68.20	Peak

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-05
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11a at 5825MHz		

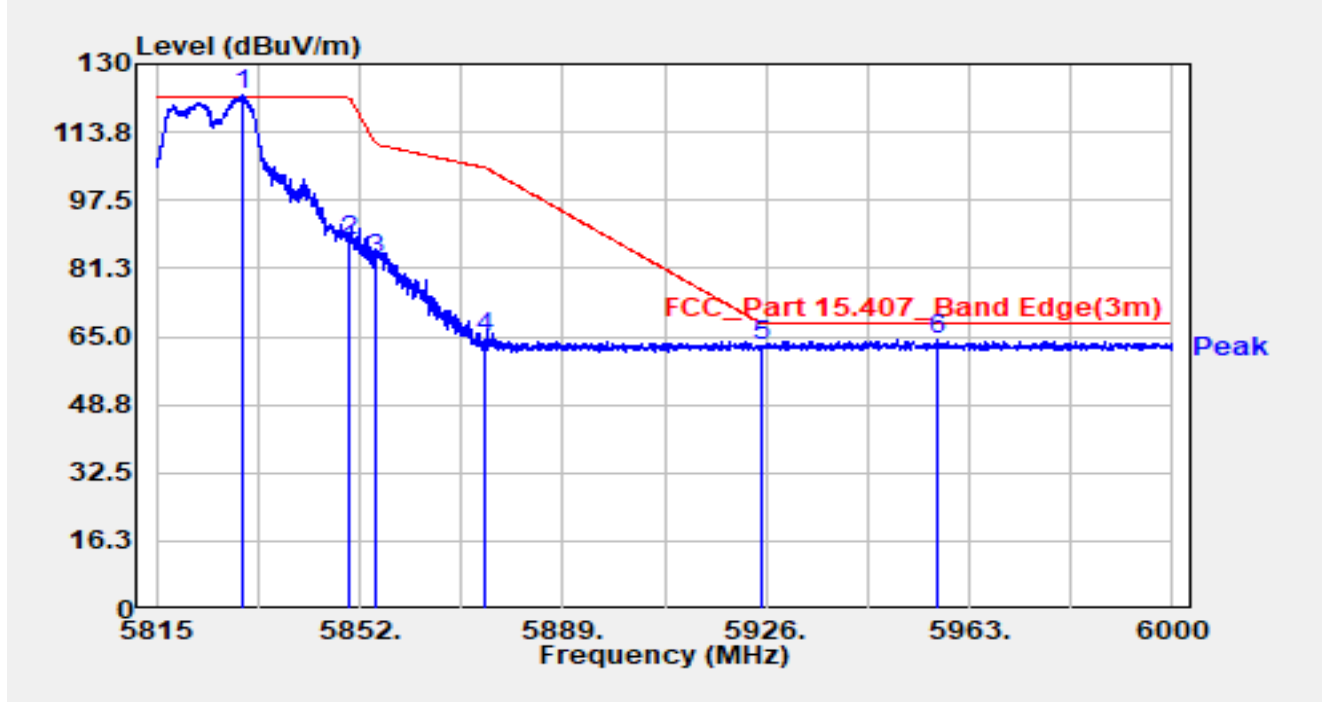


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5830.910	129.50	-7.03	122.47	N/A	N/A	Peak
2		5850.000	94.97	-7.06	87.91	-34.29	122.20	Peak
3		5855.000	90.71	-7.07	83.63	-27.17	110.80	Peak
4		5875.000	71.83	-7.15	64.67	-40.53	105.20	Peak
5		5925.000	69.82	-7.01	62.81	-5.39	68.20	Peak
6	*	5957.357	71.19	-6.85	64.35	-3.85	68.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2024-07-01
Test Engineer	Oliver Cheng	Temp./Humidity	24.3°C/65.2%
Factor	BBHA 9120D_02042_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-HT20 at 5180MHz		

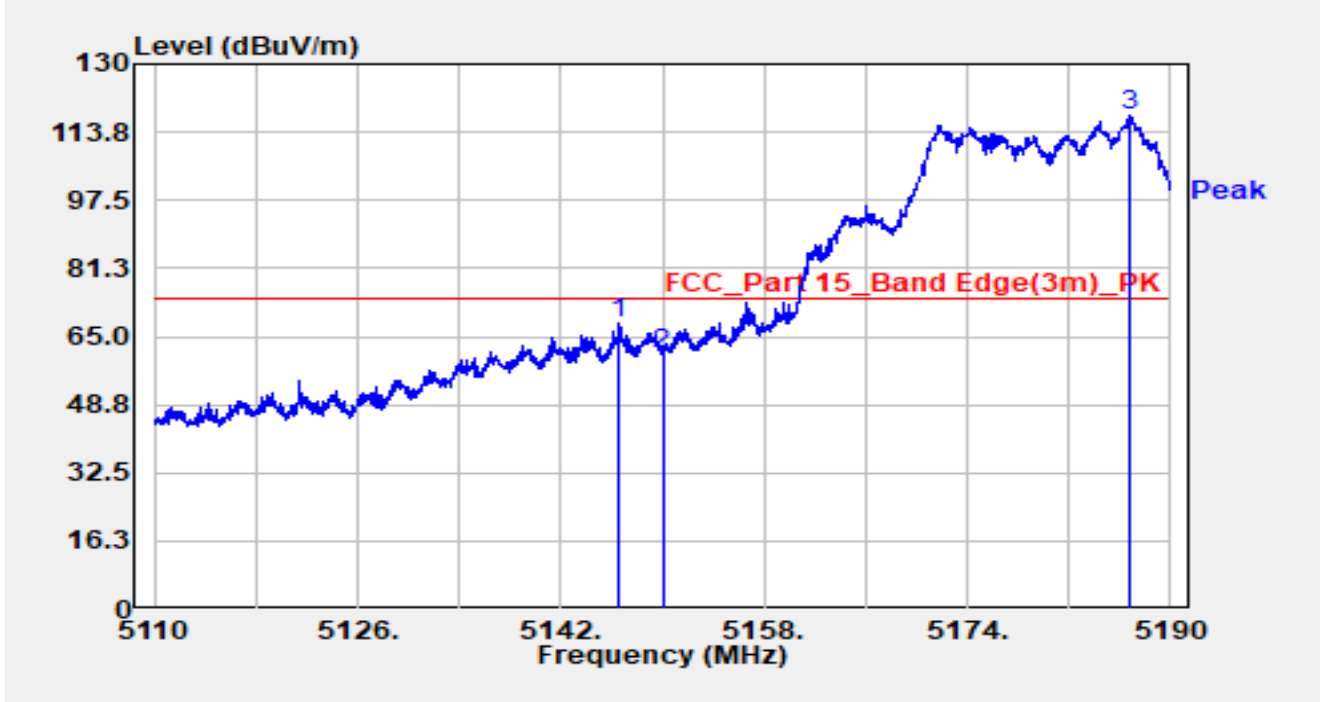


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5146.520	70.28	-2.31	67.96	-6.04	74.00	Peak
2		5150.000	62.62	-1.72	60.90	-13.10	74.00	Peak
3		5186.800	80.88	37.05	117.93	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2024-07-01
Test Engineer	Oliver Cheng	Temp./Humidity	24.3°C/65.2%
Factor	BBHA 9120D_02042_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-HT20 at 5180MHz		

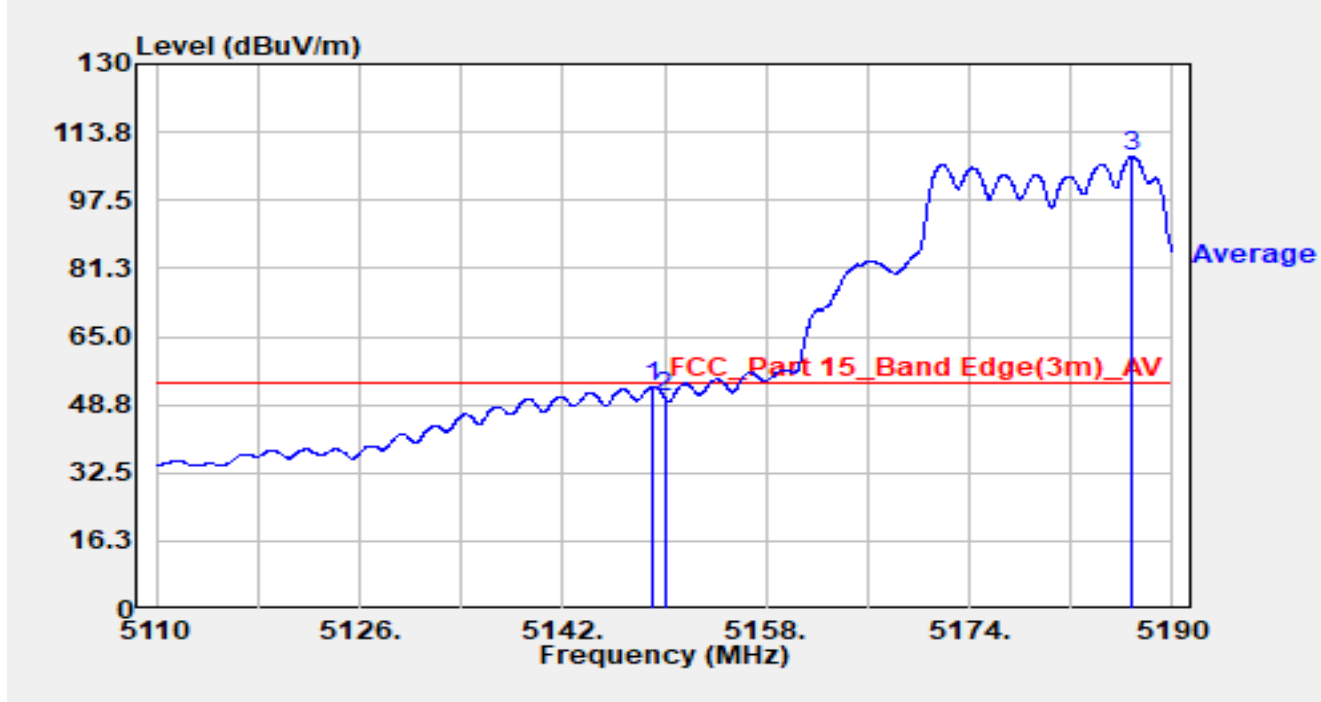


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.120	54.91	-1.89	53.02	-0.98	54.00	Average
2		5150.000	52.21	-1.72	50.48	-3.52	54.00	Average
3		5186.800	70.83	37.05	107.88	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2024-07-01
Test Engineer	Oliver Cheng	Temp./Humidity	24.3°C/65.2%
Factor	BBHA 9120D_02042_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-HT20 at 5180MHz		

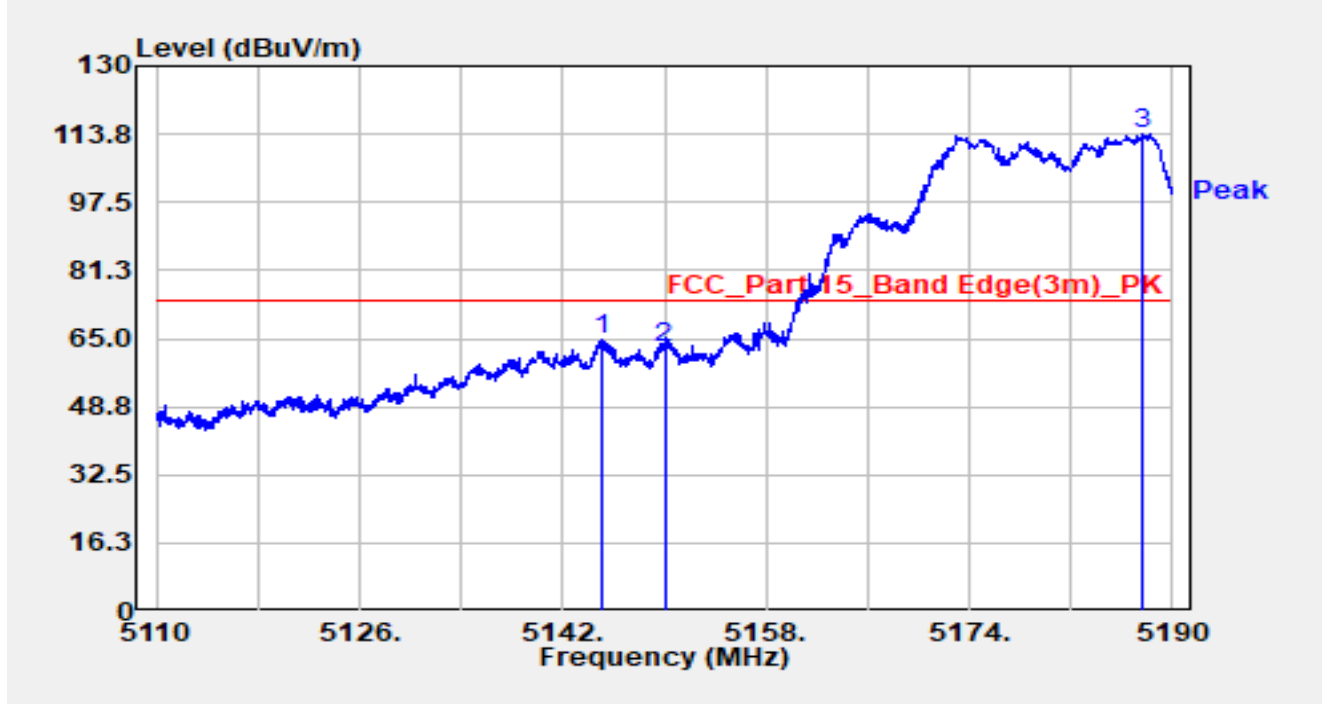


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5145.160	67.41	-2.55	64.86	-9.14	74.00	Peak
2		5150.000	64.37	-1.72	62.65	-11.35	74.00	Peak
3		5187.680	75.90	37.99	113.89	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2024-07-01
Test Engineer	Oliver Cheng	Temp./Humidity	24.3°C/65.2%
Factor	BBHA 9120D_02042_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-HT20 at 5180MHz		

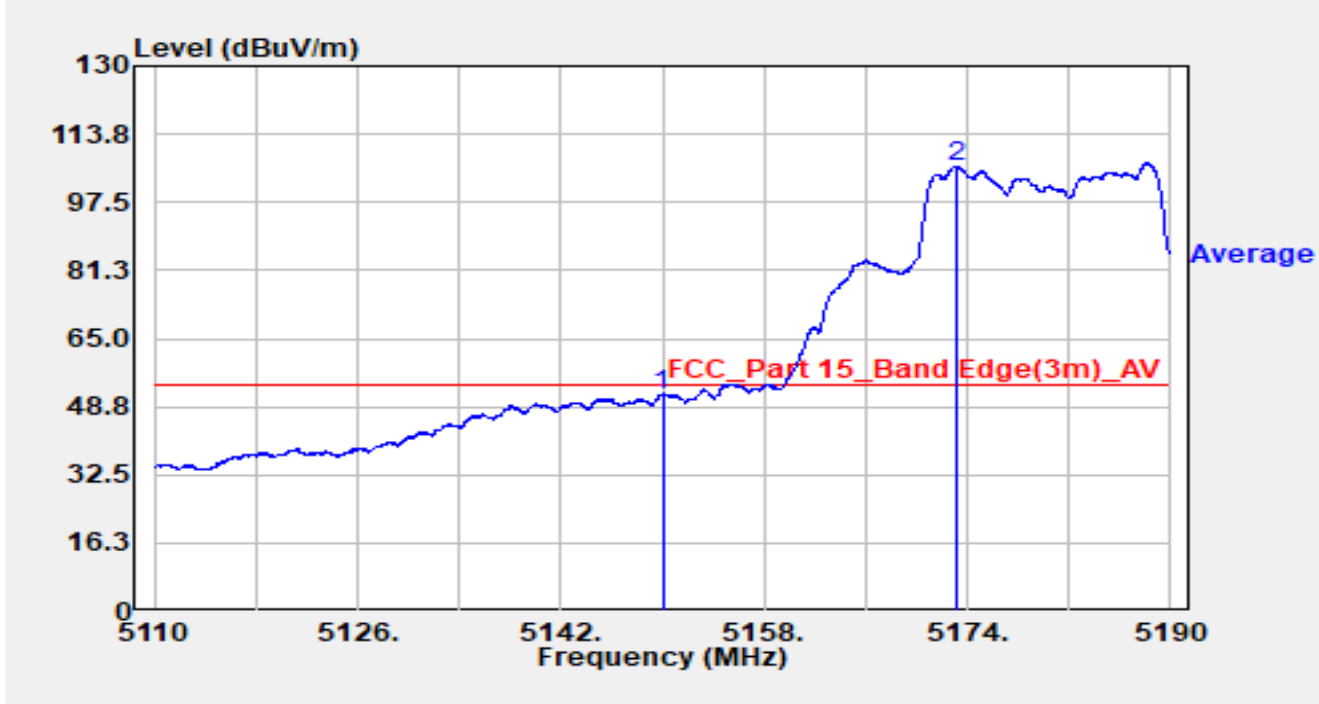


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.000	53.48	-1.72	51.75	-2.25	54.00	Average
2		5173.200	58.56	47.59	106.15	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2024-07-01
Test Engineer	Oliver Cheng	Temp./Humidity	24.3°C/65.2%
Factor	BBHA 9120D_02042_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-HT20 at 5320MHz		

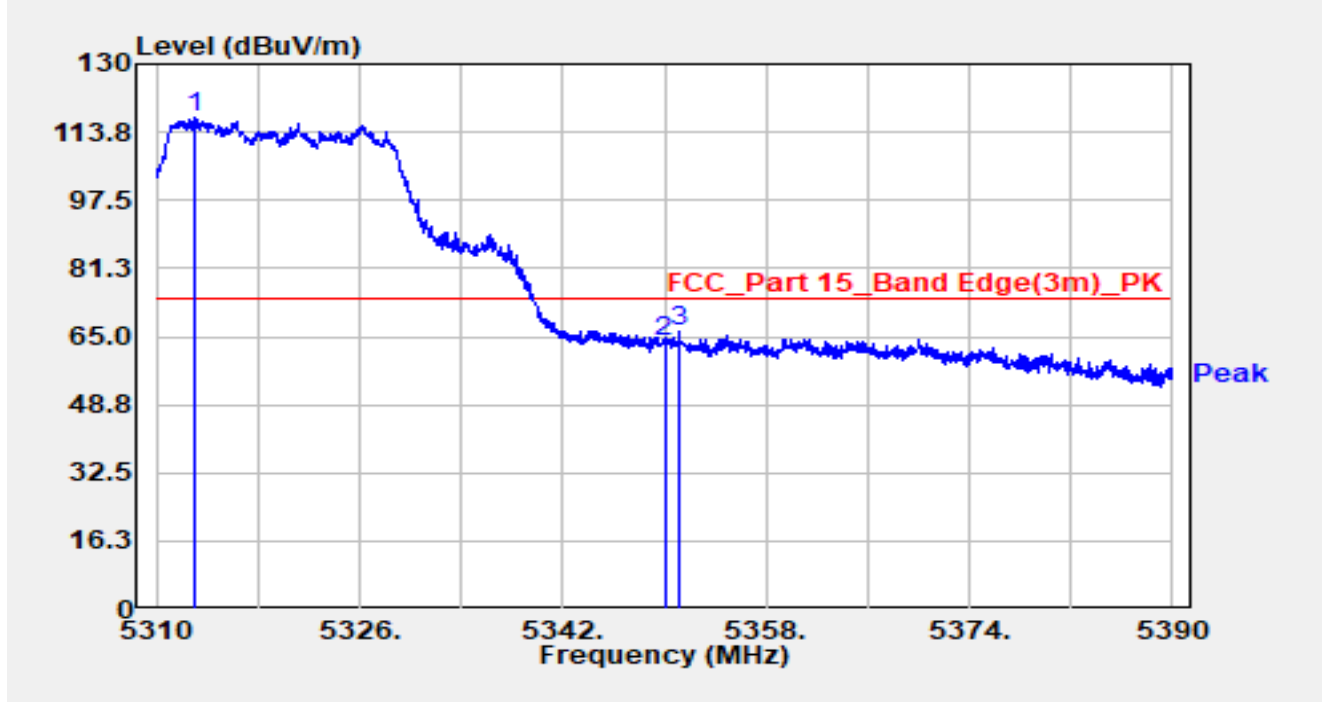


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5313.080	69.76	47.41	117.17	N/A	N/A	Peak
2		5350.000	64.61	-0.87	63.73	-10.27	74.00	Peak
3	*	5351.200	67.58	-1.40	66.18	-7.82	74.00	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2024-07-01
Test Engineer	Oliver Cheng	Temp./Humidity	24.3°C/65.2%
Factor	BBHA 9120D_02042_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-HT20 at 5320MHz		

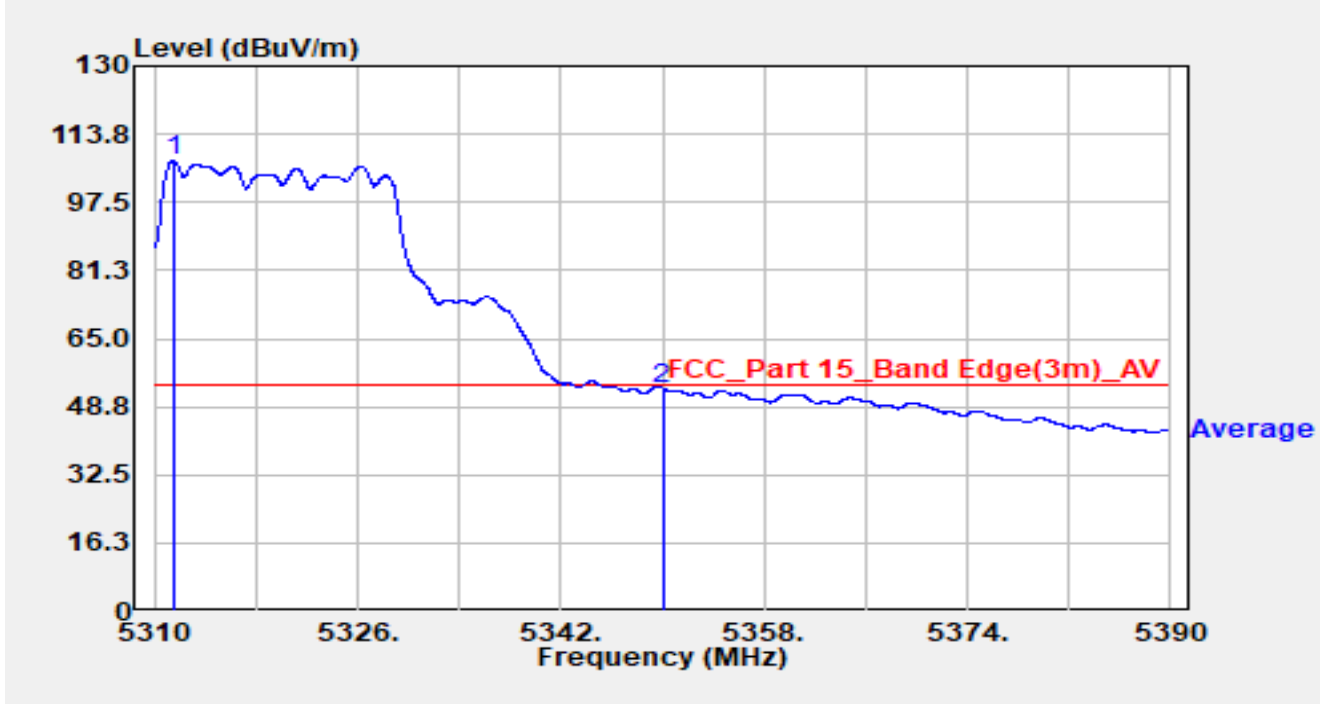


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5311.480	62.59	44.91	107.51	N/A	N/A	Average
2	*	5350.000	54.06	-0.87	53.19	-0.81	54.00	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2024-07-01
Test Engineer	Oliver Cheng	Temp./Humidity	24.3°C/65.2%
Factor	BBHA 9120D_02042_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-HT20 at 5320MHz		

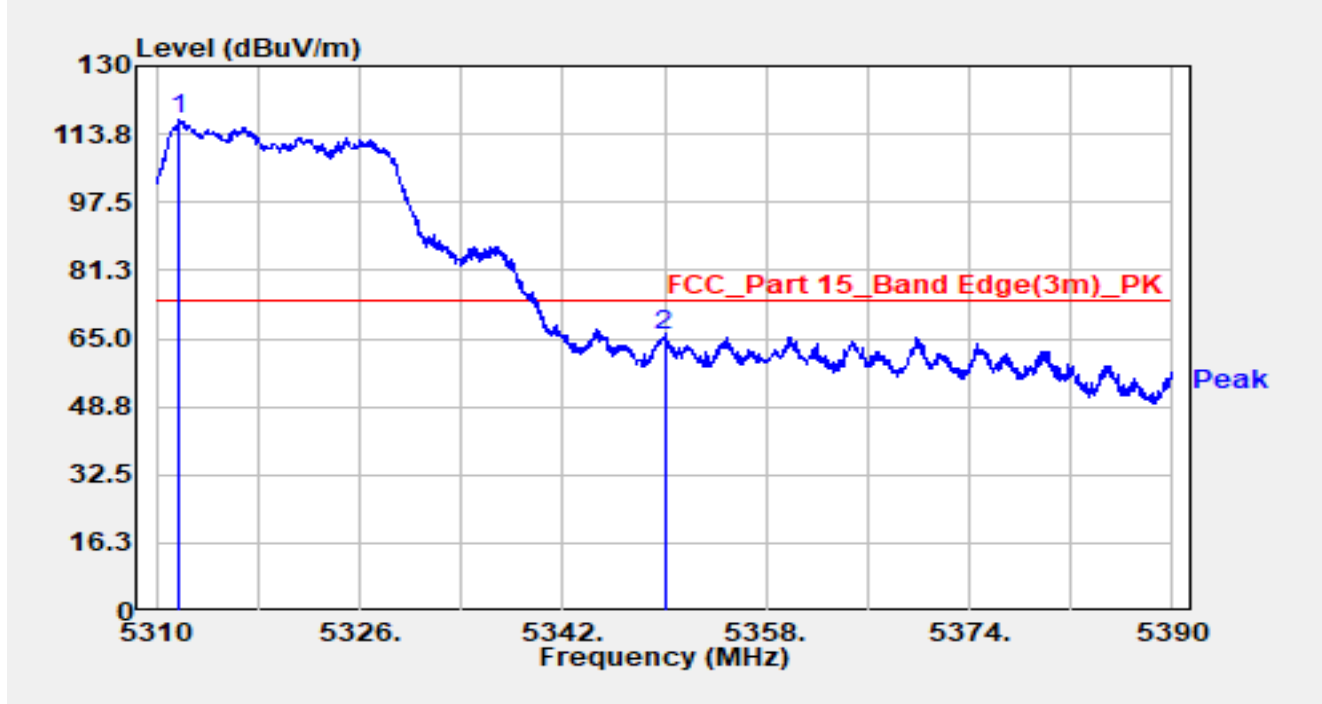


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5311.760	71.68	45.43	117.11	N/A	N/A	Peak
2	*	5350.000	66.48	-0.87	65.60	-8.40	74.00	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2024-07-01
Test Engineer	Oliver Cheng	Temp./Humidity	24.3°C/65.2%
Factor	BBHA 9120D_02042_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-HT20 at 5320MHz		

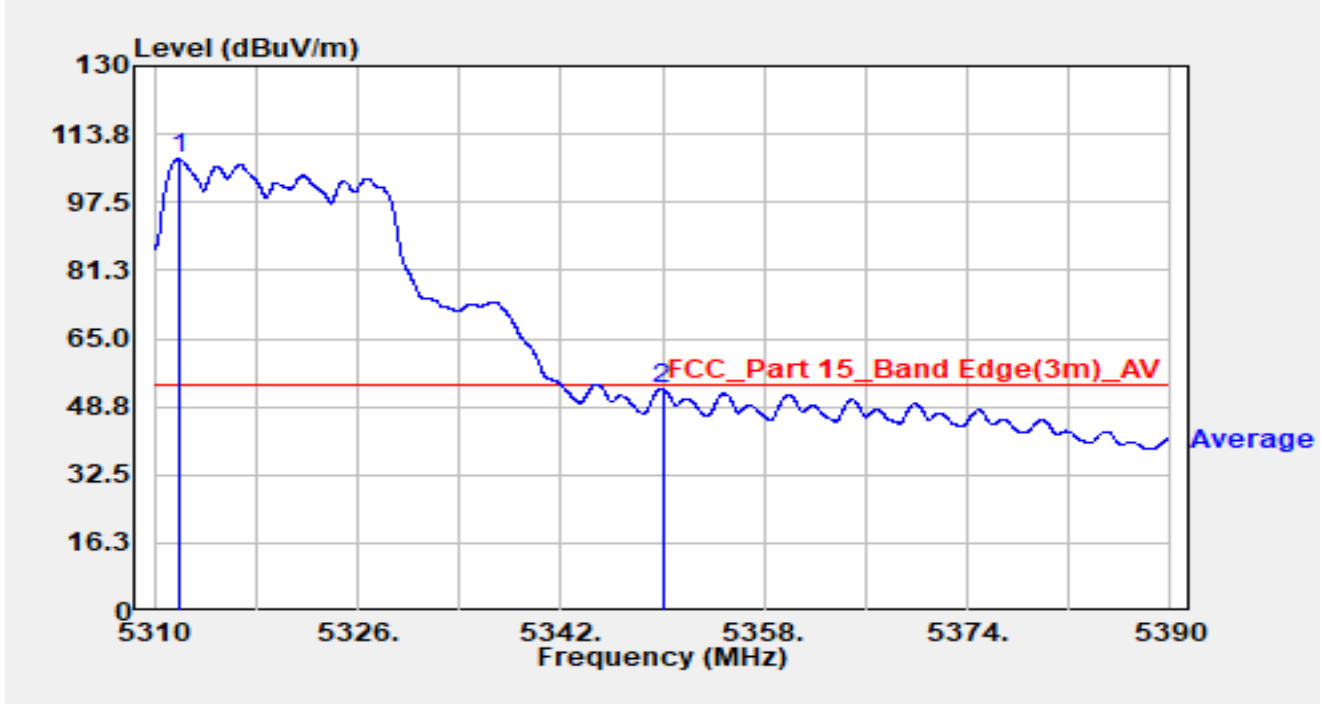


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5311.880	62.19	45.64	107.83	N/A	N/A	Average
2	*	5350.000	53.94	-0.87	53.07	-0.93	54.00	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-04
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT20 at 5500MHz		

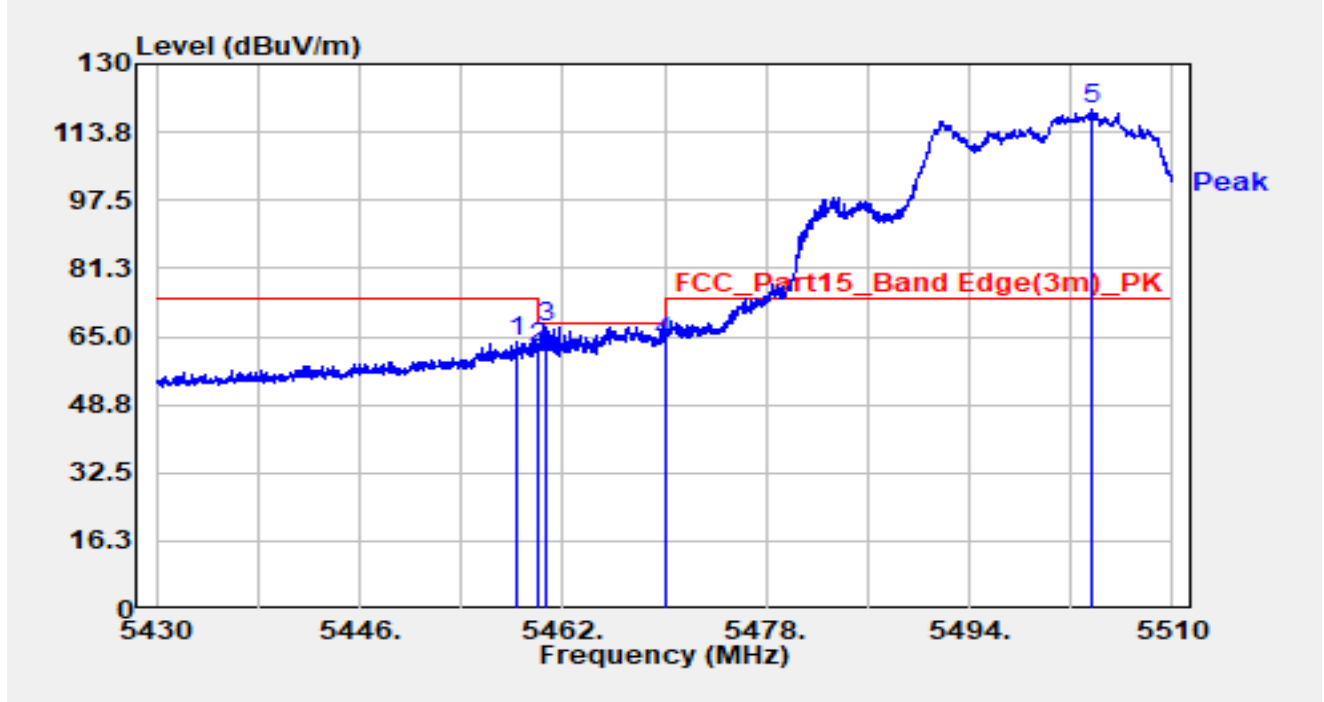


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5458.320	67.91	-3.98	63.93	-10.07	74.00	Peak
2		5460.000	66.04	-3.86	62.17	-6.03	68.20	Peak
3	*	5460.600	71.27	-3.88	67.39	-0.81	68.20	Peak
4		5470.000	66.08	-2.10	63.98	-4.22	68.20	Peak
5		5503.560	76.58	42.59	119.17	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-04
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT20 at 5500MHz		

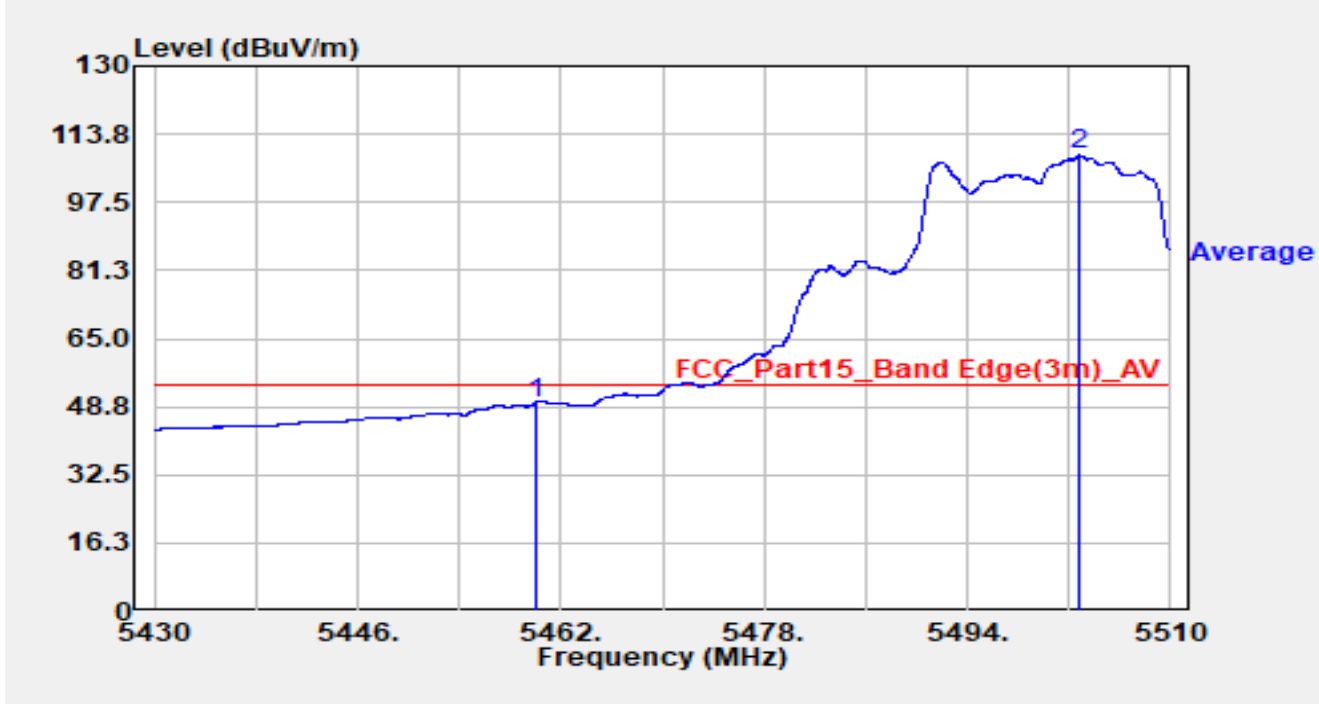


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.000	53.57	-3.86	49.70	-4.30	54.00	Average
2		5502.880	67.35	41.31	108.67	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-04
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT20 at 5500MHz		

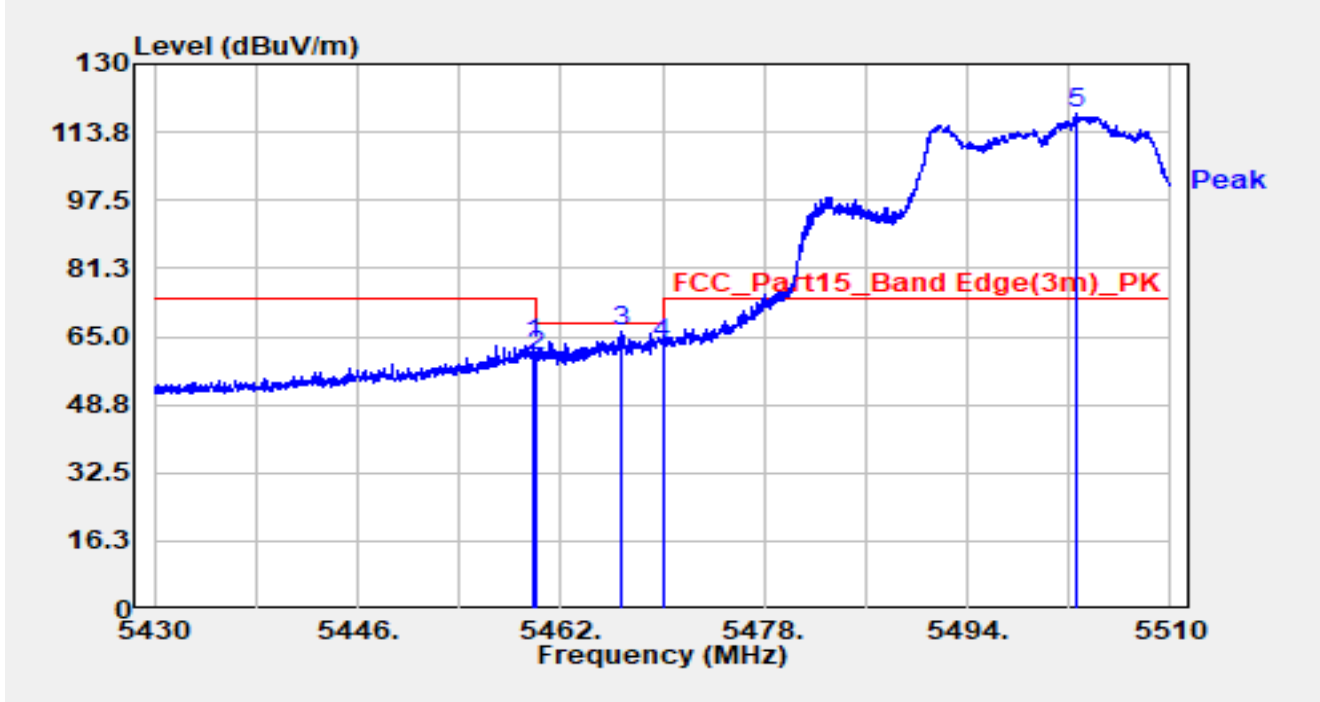


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5459.840	66.94	-3.89	63.05	-10.95	74.00	Peak
2		5460.000	64.05	-3.86	60.19	-8.01	68.20	Peak
3	*	5466.800	69.37	-3.06	66.31	-1.89	68.20	Peak
4		5470.000	65.42	-2.10	63.31	-4.89	68.20	Peak
5		5502.560	77.61	40.64	118.25	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-04
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT20 at 5500MHz		

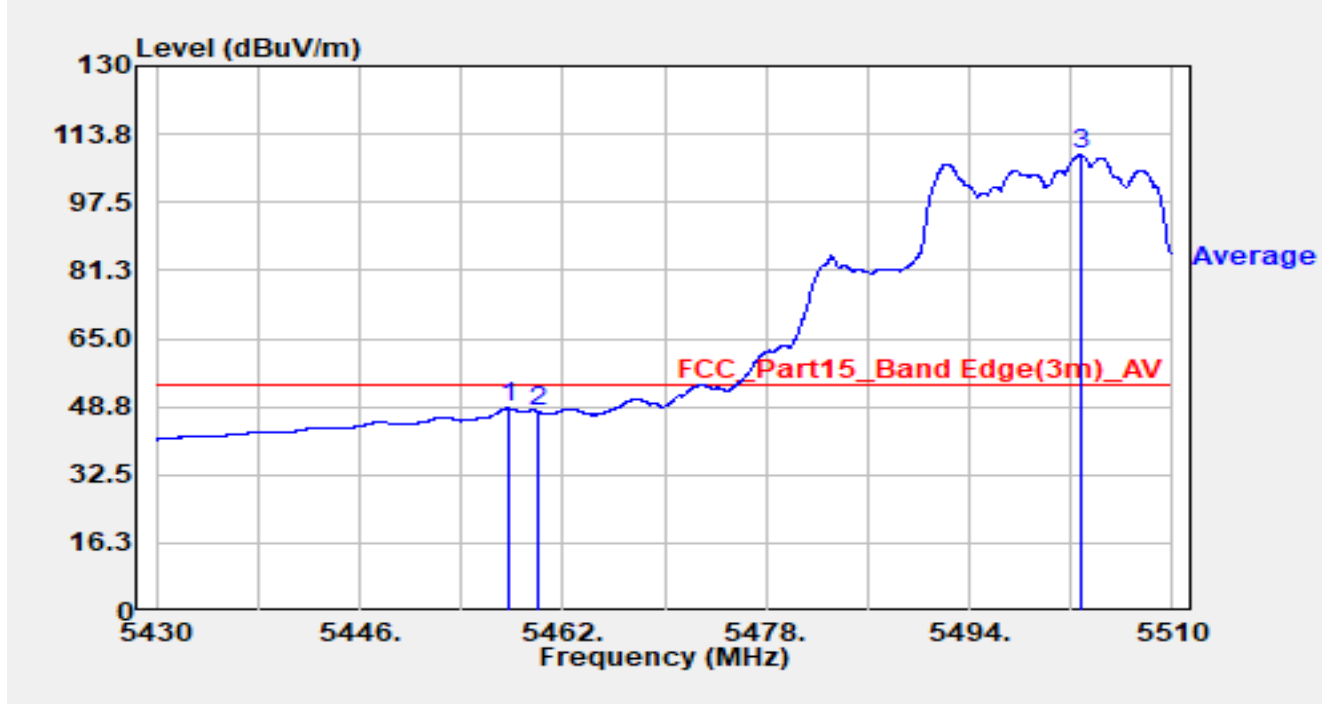


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5457.720	52.44	-4.08	48.36	-5.64	54.00	Average
2		5460.000	51.49	-3.86	47.63	-6.37	54.00	Average
3		5502.760	67.69	41.06	108.75	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-04
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT20 at 5700MHz		

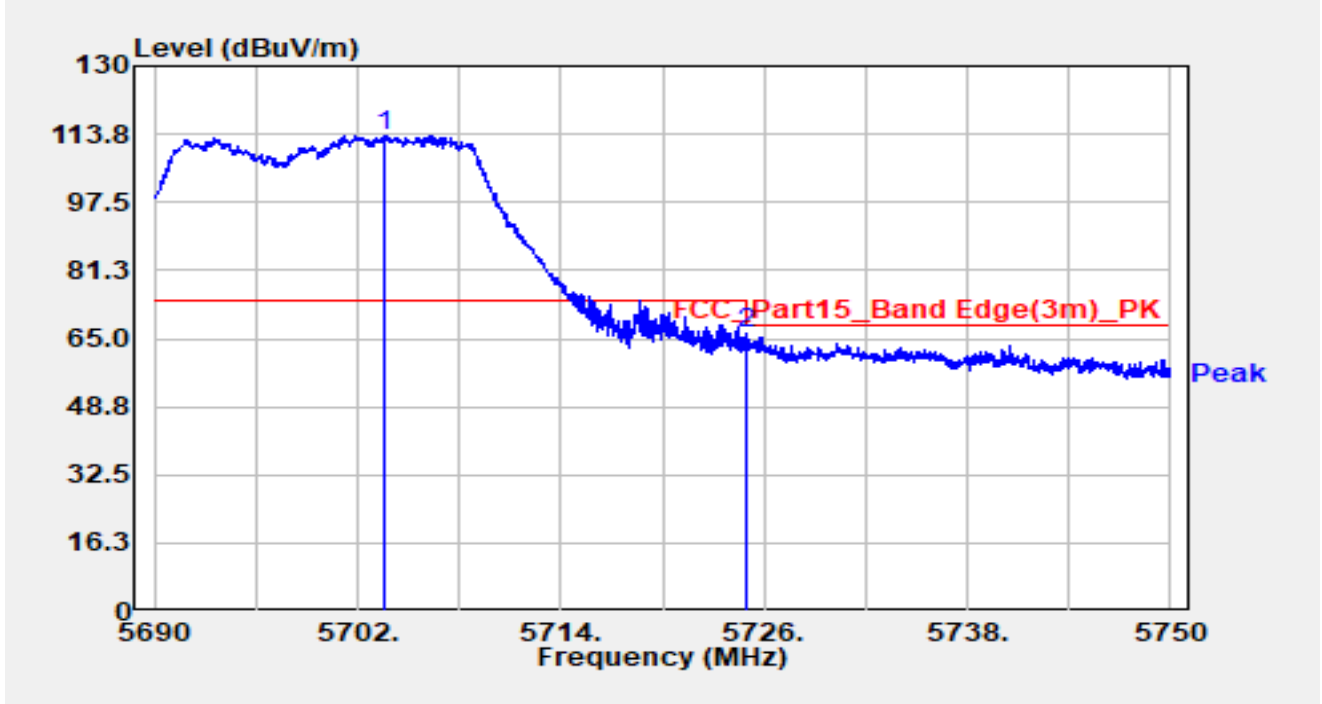


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5703.650	75.70	37.73	113.43	N/A	N/A	Peak
2	*	5725.000	68.12	-2.12	66.00	-2.20	68.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-04
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT20 at 5700MHz		

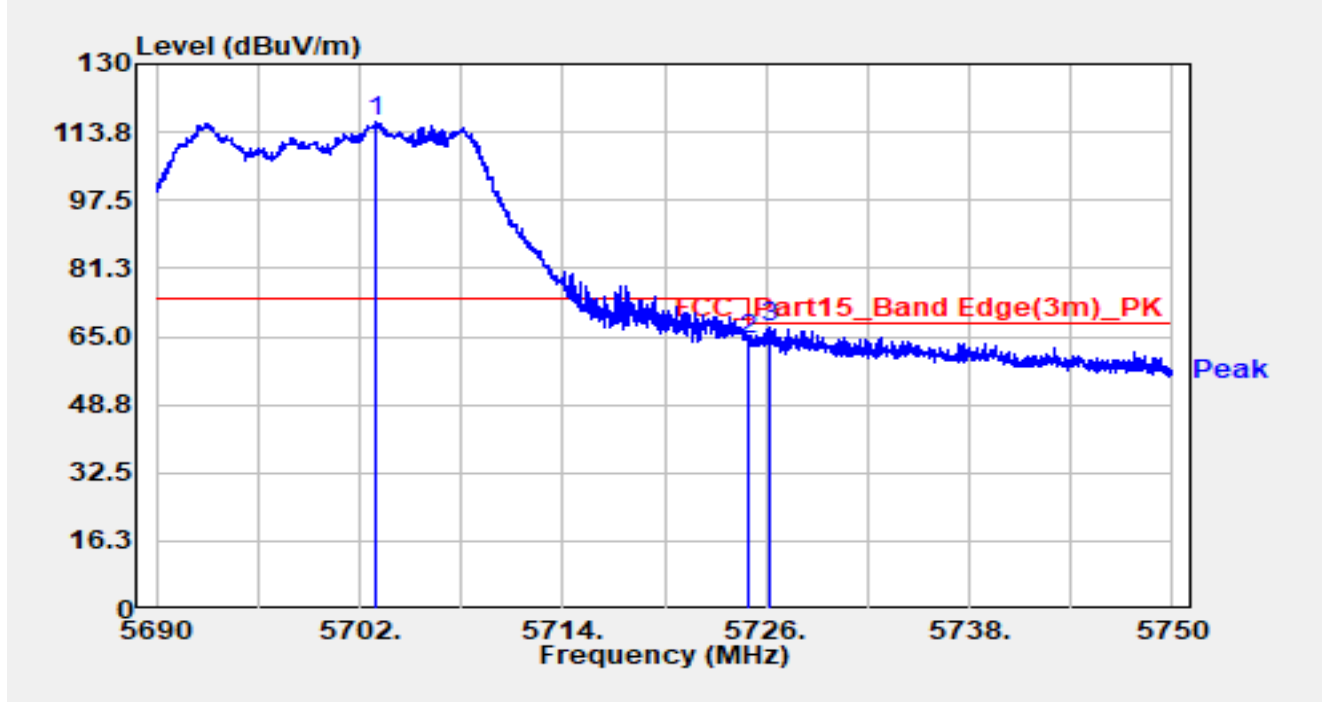


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5703.020	78.81	37.34	116.15	N/A	N/A	Peak
2		5725.000	66.58	-2.12	64.46	-3.74	68.20	Peak
3	*	5726.150	70.15	-2.72	67.43	-0.77	68.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-05
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT20 at 5745MHz		

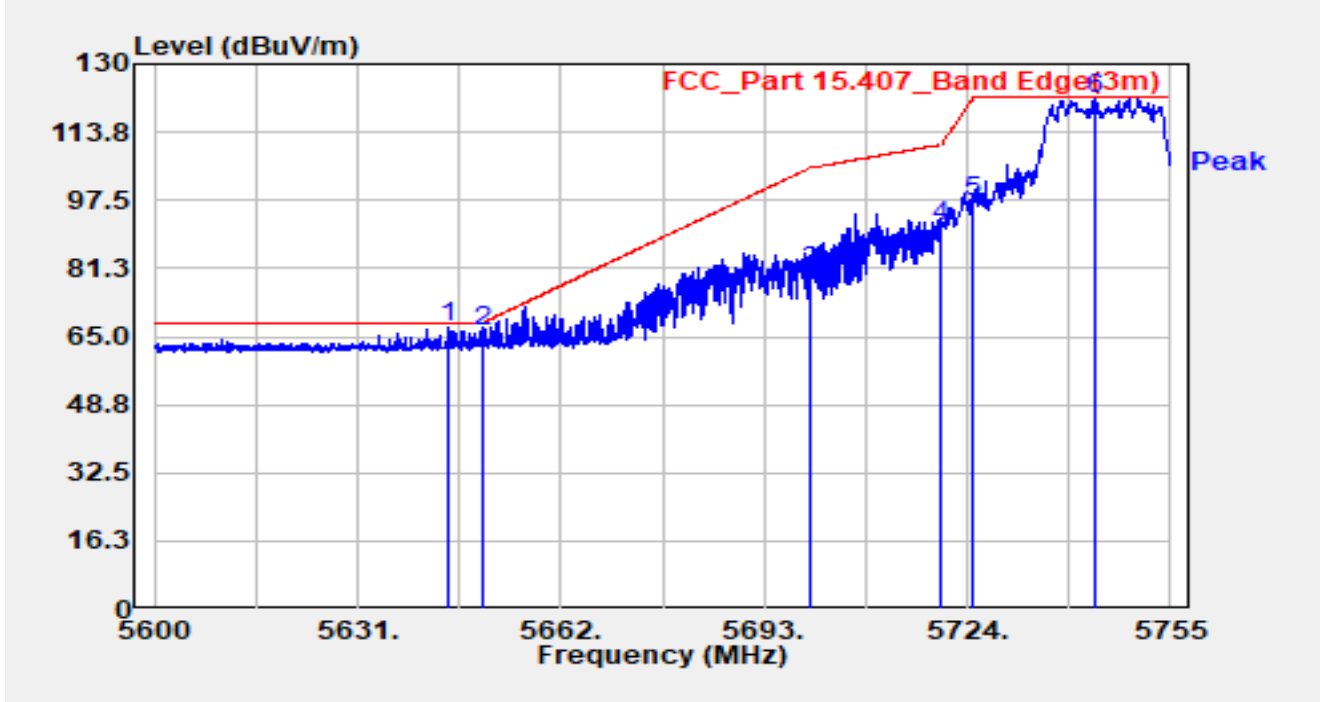


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5644.873	74.28	-7.17	67.11	-1.09	68.20	Peak
2		5650.000	73.43	-7.14	66.29	-1.91	68.20	Peak
3		5700.000	87.58	-7.06	80.52	-24.68	105.20	Peak
4		5720.000	98.54	-7.20	91.34	-19.46	110.80	Peak
5		5725.000	104.34	-7.22	97.13	-25.07	122.20	Peak
6		5743.685	129.19	-7.40	121.79	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-05
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT20 at 5745MHz		

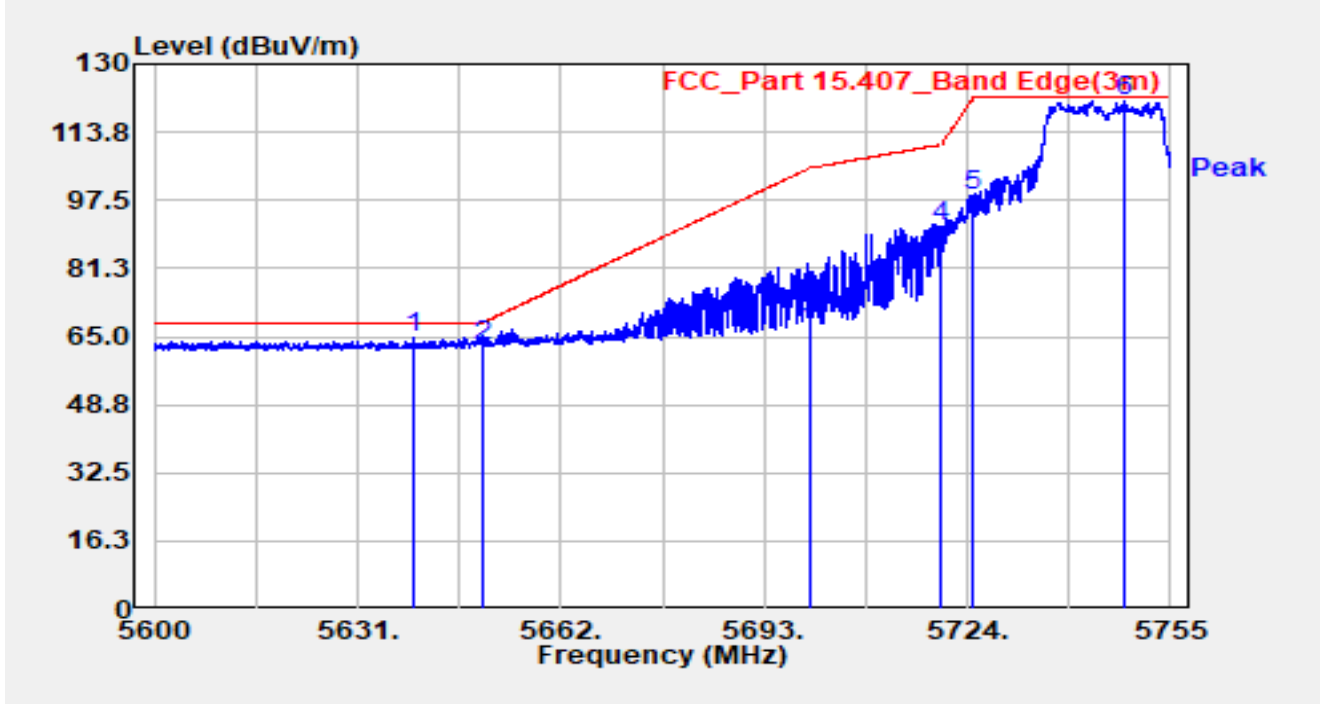


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5639.680	72.11	-7.20	64.91	-3.29	68.20	Peak
2		5650.000	70.09	-7.14	62.95	-5.25	68.20	Peak
3		5700.000	76.17	-7.06	69.11	-36.09	105.20	Peak
4		5720.000	98.52	-7.20	91.32	-19.48	110.80	Peak
5		5725.000	106.00	-7.22	98.78	-23.42	122.20	Peak
6		5747.870	128.64	-7.36	121.28	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-05
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT20 at 5825MHz		

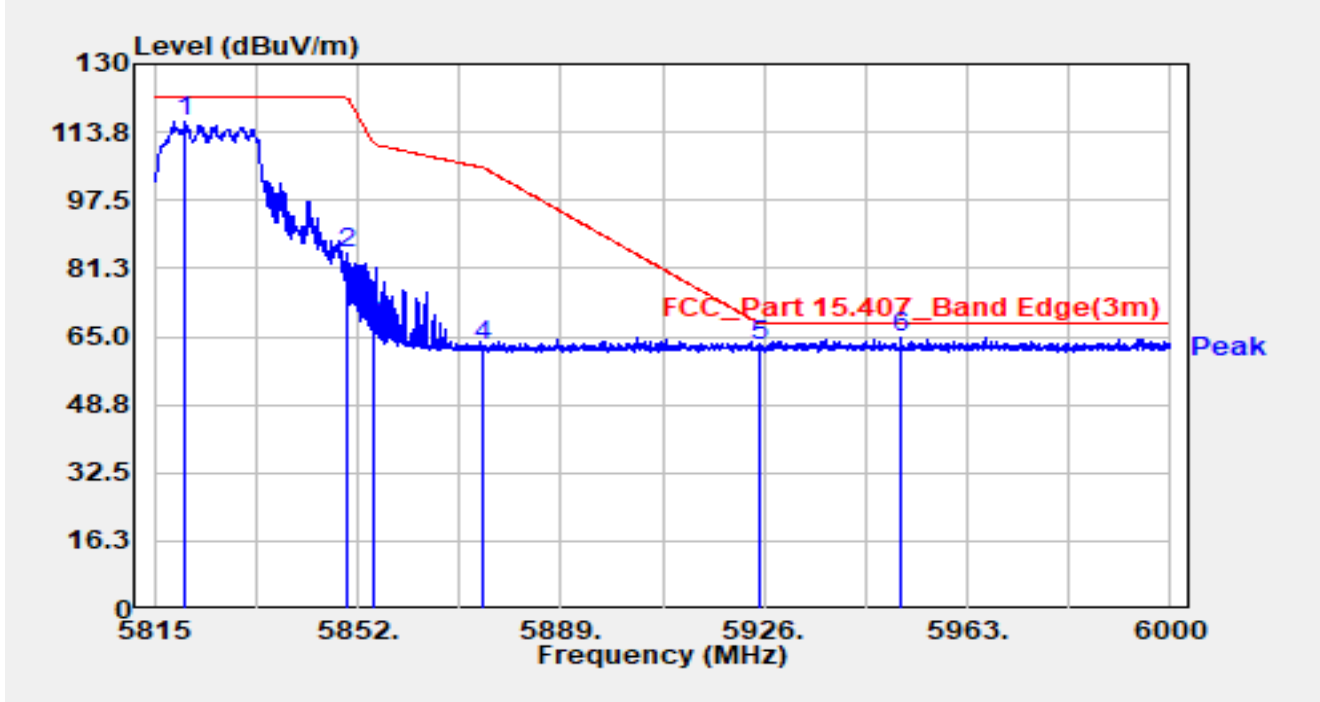


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5820.550	123.10	-7.04	116.06	N/A	N/A	Peak
2		5850.000	92.00	-7.06	84.94	-37.26	122.20	Peak
3		5855.000	74.69	-7.07	67.61	-43.19	110.80	Peak
4		5875.000	69.72	-7.15	62.57	-42.63	105.20	Peak
5		5925.000	70.01	-7.01	63.00	-5.20	68.20	Peak
6	*	5950.975	71.83	-6.84	64.99	-3.21	68.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-05
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT20 at 5825MHz		

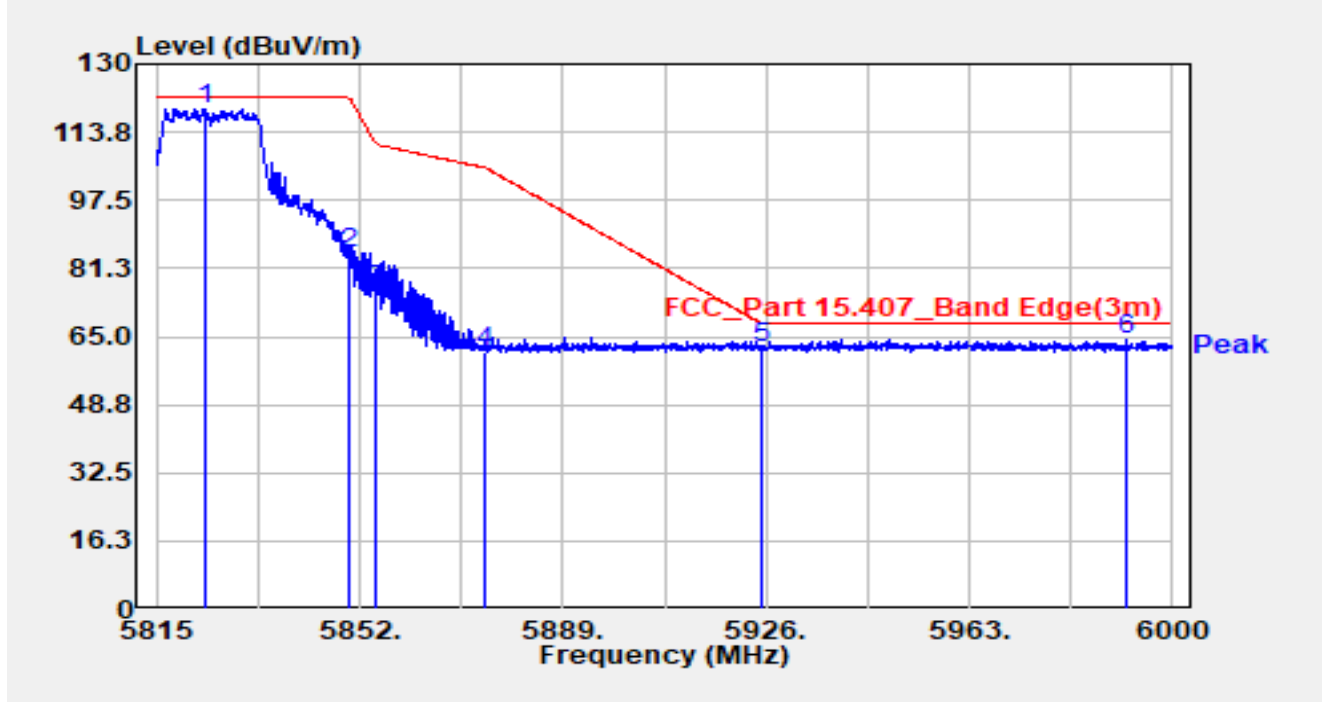


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5823.695	126.47	-7.03	119.44	N/A	N/A	Peak
2		5850.000	92.07	-7.06	85.01	-37.19	122.20	Peak
3		5855.000	82.94	-7.07	75.87	-34.93	110.80	Peak
4		5875.000	68.69	-7.15	61.53	-43.67	105.20	Peak
5		5925.000	69.09	-7.01	62.08	-6.12	68.20	Peak
6	*	5991.583	71.02	-6.80	64.22	-3.98	68.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2024-07-01
Test Engineer	Oliver Cheng	Temp./Humidity	24.3°C/65.2%
Factor	BBHA 9120D_02042_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-HT20 at 5190MHz		

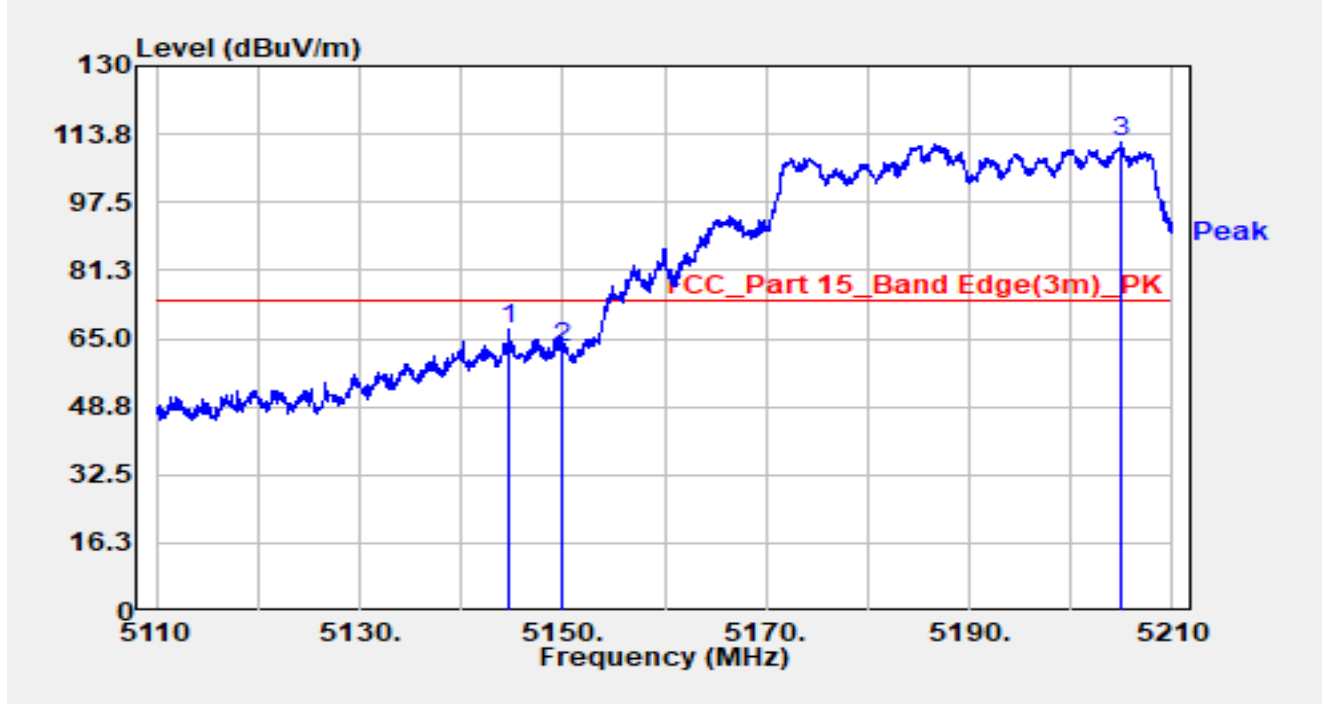


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5144.700	69.65	-2.60	67.05	-6.95	74.00	Peak
2		5150.000	64.48	-1.72	62.76	-11.24	74.00	Peak
3		5204.850	69.21	42.88	112.09	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2024-07-01
Test Engineer	Oliver Cheng	Temp./Humidity	24.3°C/65.2%
Factor	BBHA 9120D_02042_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-HT20 at 5190MHz		

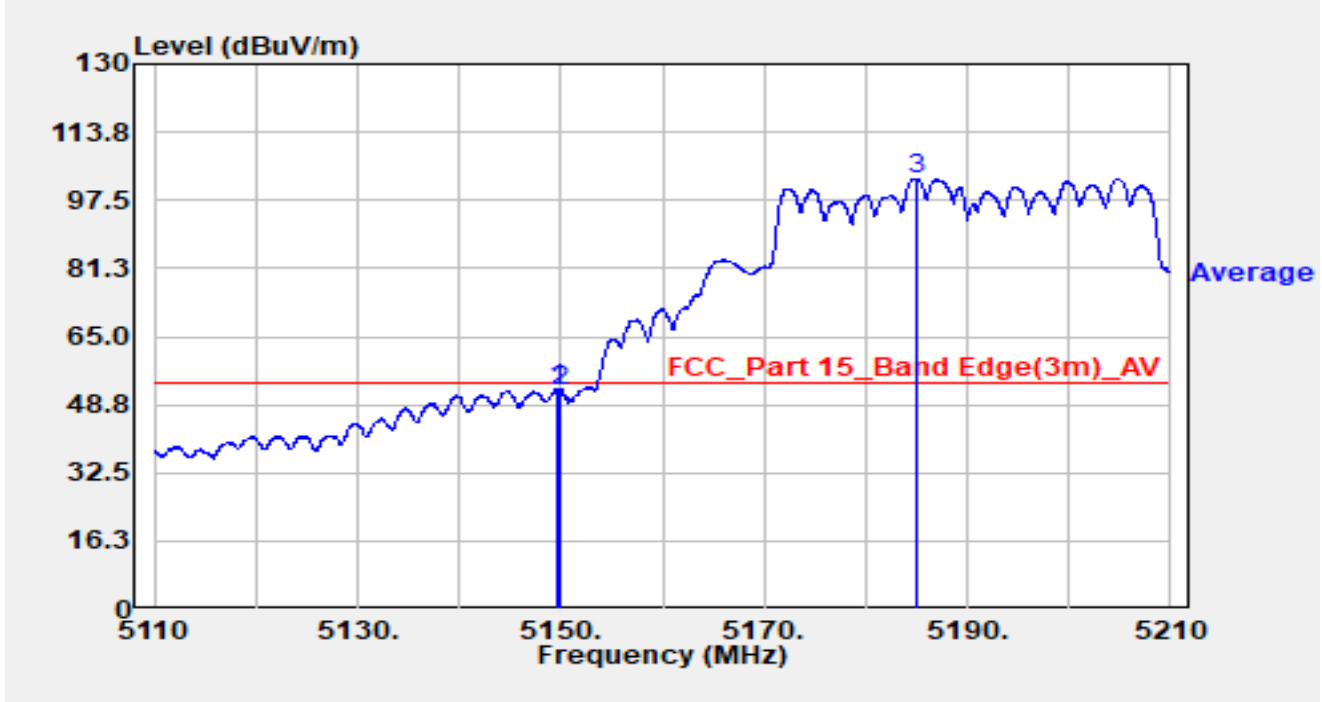


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.750	54.41	-1.76	52.65	-1.35	54.00	Average
2		5150.000	53.82	-1.72	52.10	-1.90	54.00	Average
3		5184.900	66.48	36.25	102.73	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2024-07-01
Test Engineer	Oliver Cheng	Temp./Humidity	24.3°C/65.2%
Factor	BBHA 9120D_02042_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-HT20 at 5190MHz		

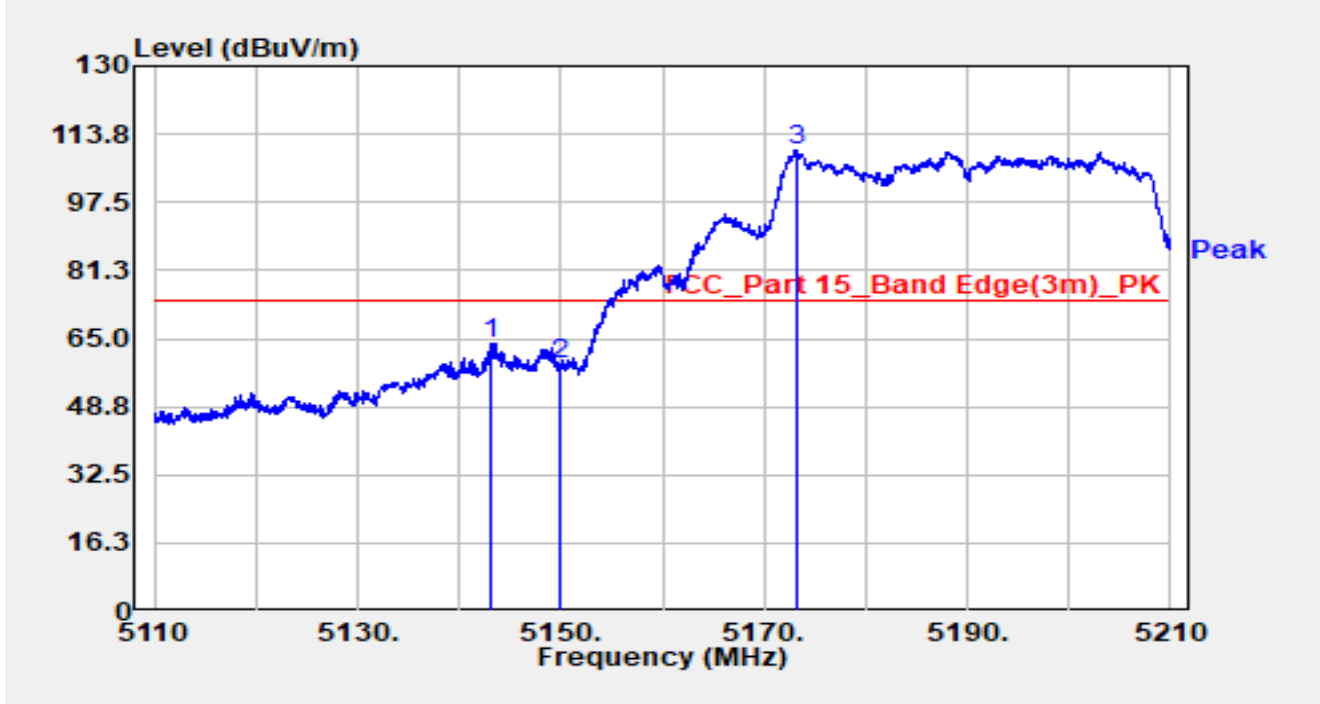


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5143.000	66.75	-2.77	63.98	-10.02	74.00	Peak
2		5150.000	60.50	-1.72	58.77	-15.23	74.00	Peak
3		5173.250	62.10	47.60	109.70	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2024-07-01
Test Engineer	Oliver Cheng	Temp./Humidity	24.3°C/65.2%
Factor	BBHA 9120D_02042_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-HT20 at 5190MHz		

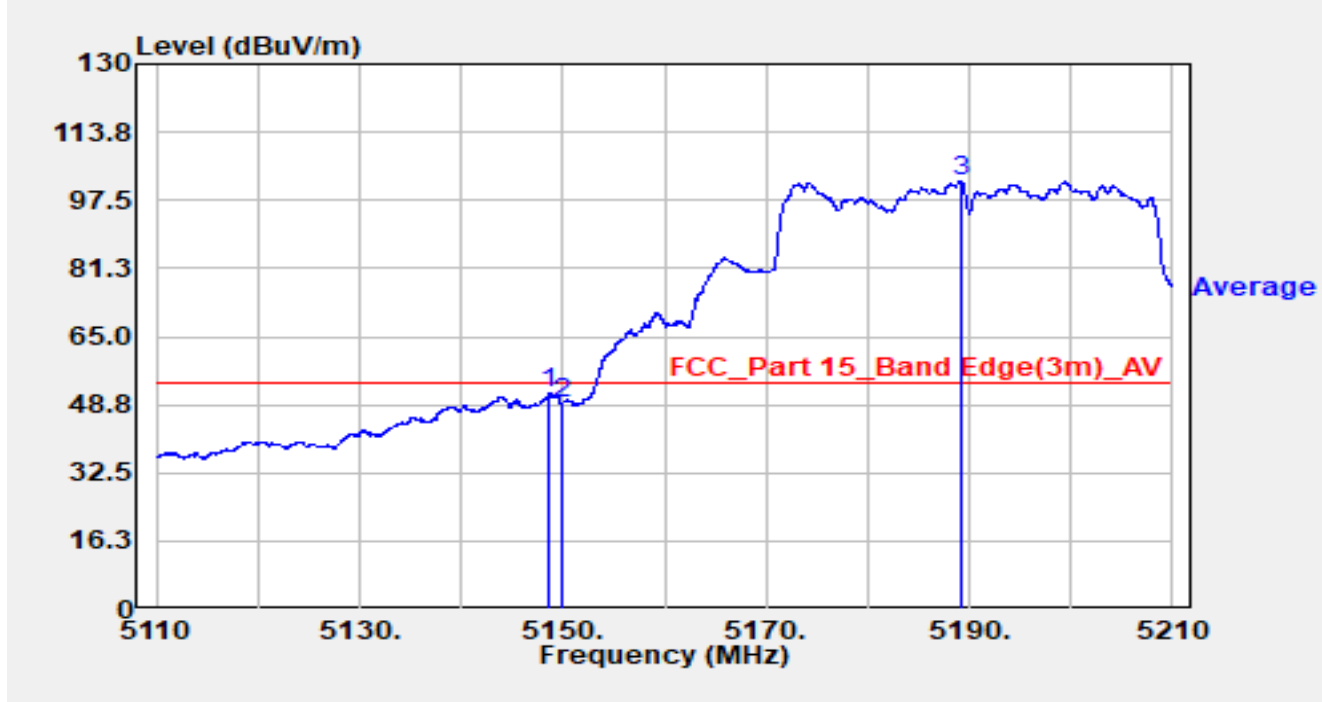


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5148.700	53.28	-1.96	51.32	-2.68	54.00	Average
2		5150.000	50.93	-1.72	49.20	-4.80	54.00	Average
3		5189.150	61.70	40.14	101.85	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2024-07-01
Test Engineer	Oliver Cheng	Temp./Humidity	24.3°C/65.2%
Factor	BBHA 9120D_02042_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-HT20 at 5310MHz		

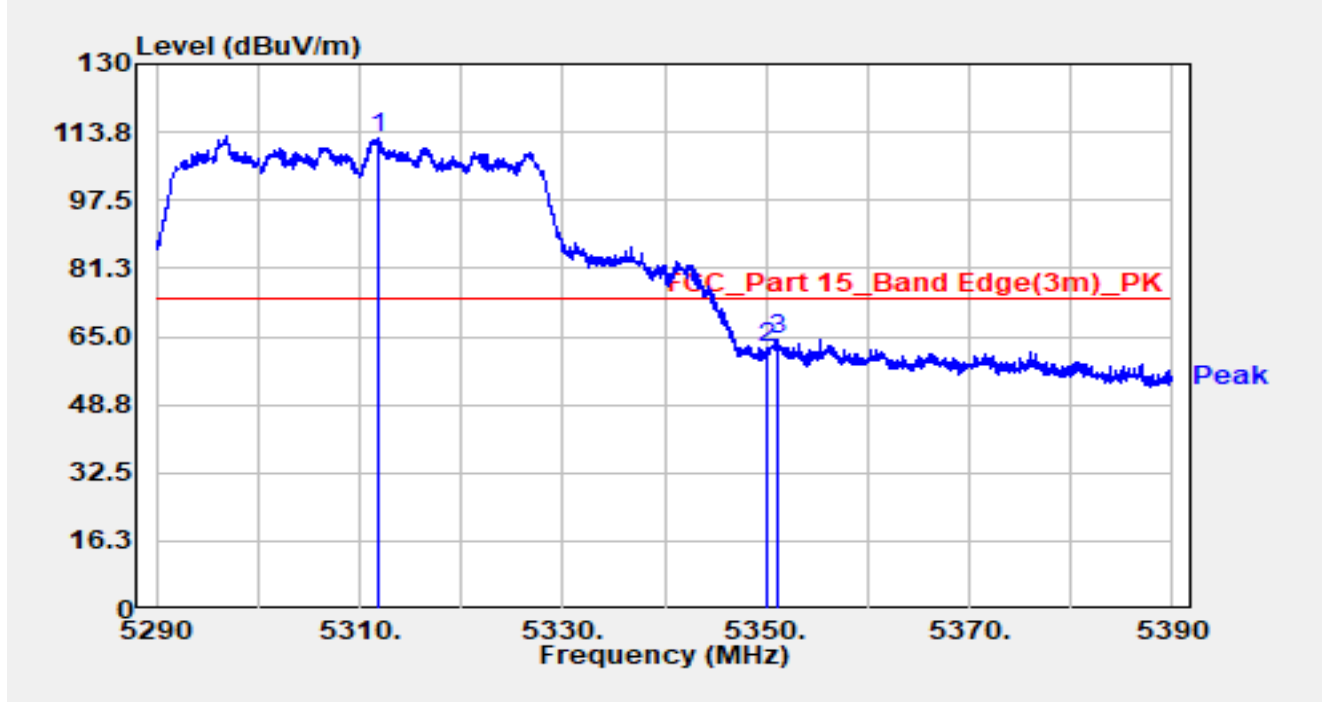


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5311.800	66.95	45.50	112.45	N/A	N/A	Peak
2		5350.000	62.94	-0.87	62.06	-11.94	74.00	Peak
3	*	5351.250	65.89	-1.42	64.47	-9.53	74.00	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2024-07-01
Test Engineer	Oliver Cheng	Temp./Humidity	24.3°C/65.2%
Factor	BBHA 9120D_02042_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-HT20 at 5310MHz		

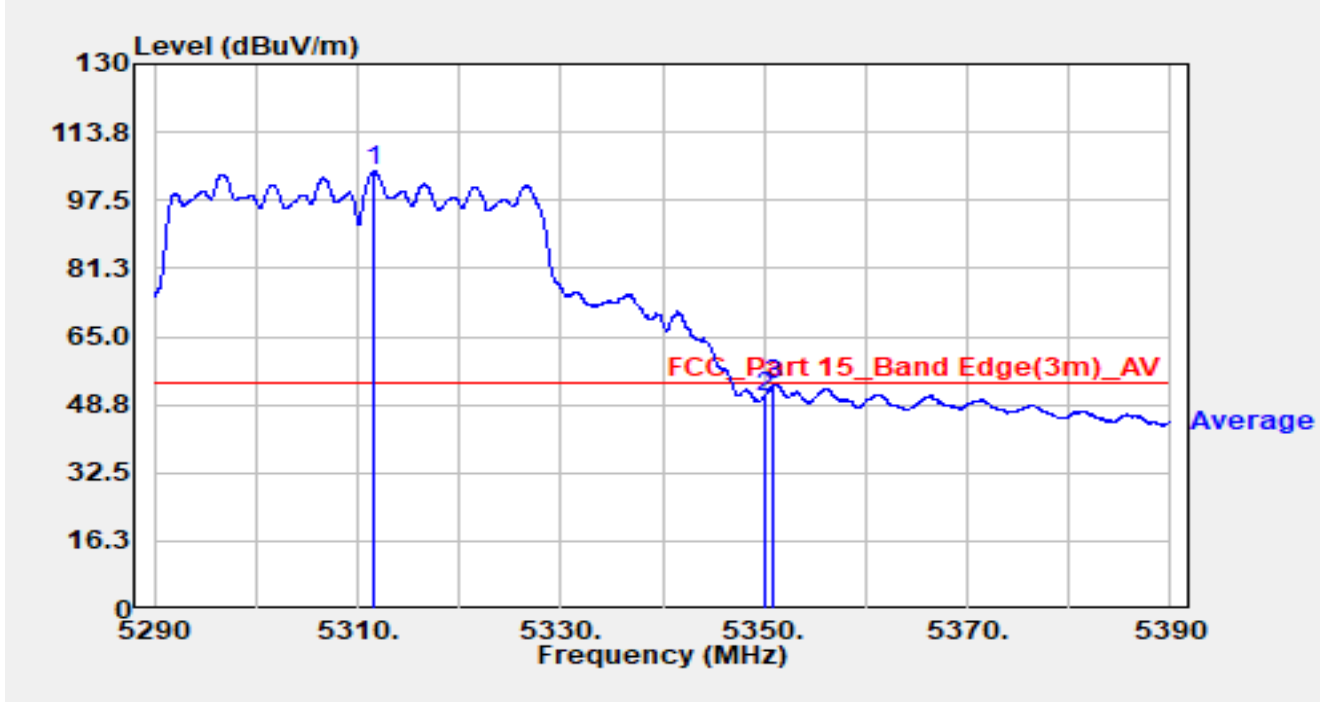


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5311.700	59.13	45.32	104.45	N/A	N/A	Average
2		5350.000	51.44	-0.87	50.57	-3.43	54.00	Average
3	*	5351.000	54.99	-1.33	53.66	-0.34	54.00	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2024-07-01
Test Engineer	Oliver Cheng	Temp./Humidity	24.3°C/65.2%
Factor	BBHA 9120D_02042_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-HT20 at 5310MHz		

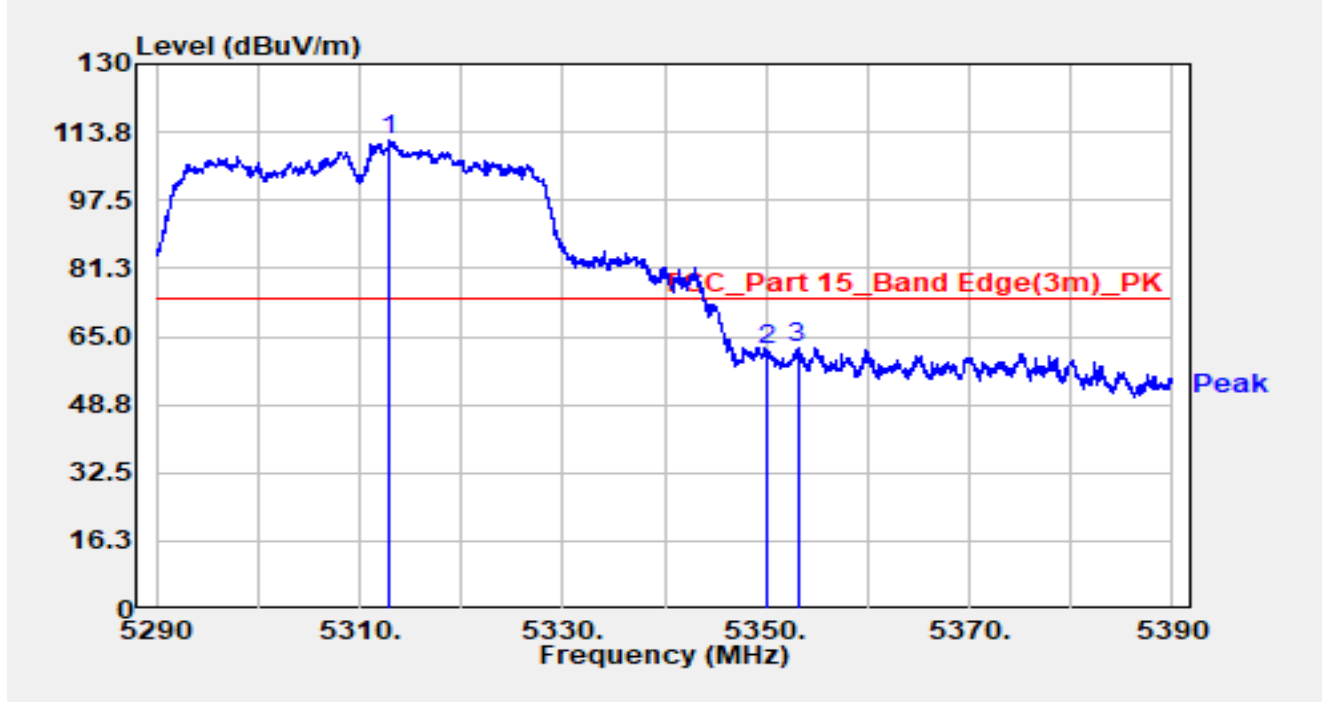


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5312.950	64.38	47.31	111.69	N/A	N/A	Peak
2		5350.000	62.75	-0.87	61.88	-12.12	74.00	Peak
3	*	5353.100	64.28	-1.92	62.36	-11.64	74.00	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2024-07-01
Test Engineer	Oliver Cheng	Temp./Humidity	24.3°C/65.2%
Factor	BBHA 9120D_02042_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-HT20 at 5310MHz		

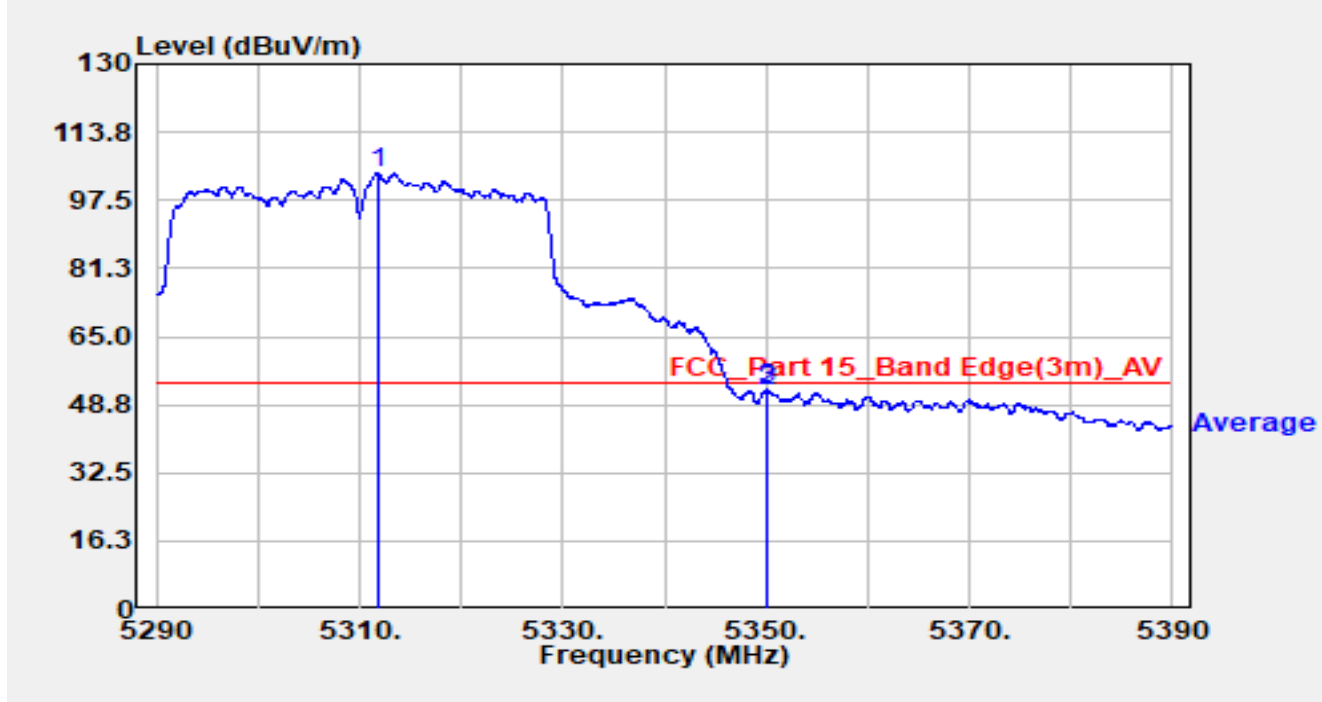


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5311.800	58.59	45.50	104.09	N/A	N/A	Average
2		5350.000	53.04	-0.87	52.17	-1.83	54.00	Average
3	*	5350.150	53.32	-0.95	52.37	-1.63	54.00	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-04
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT40 at 5510MHz		

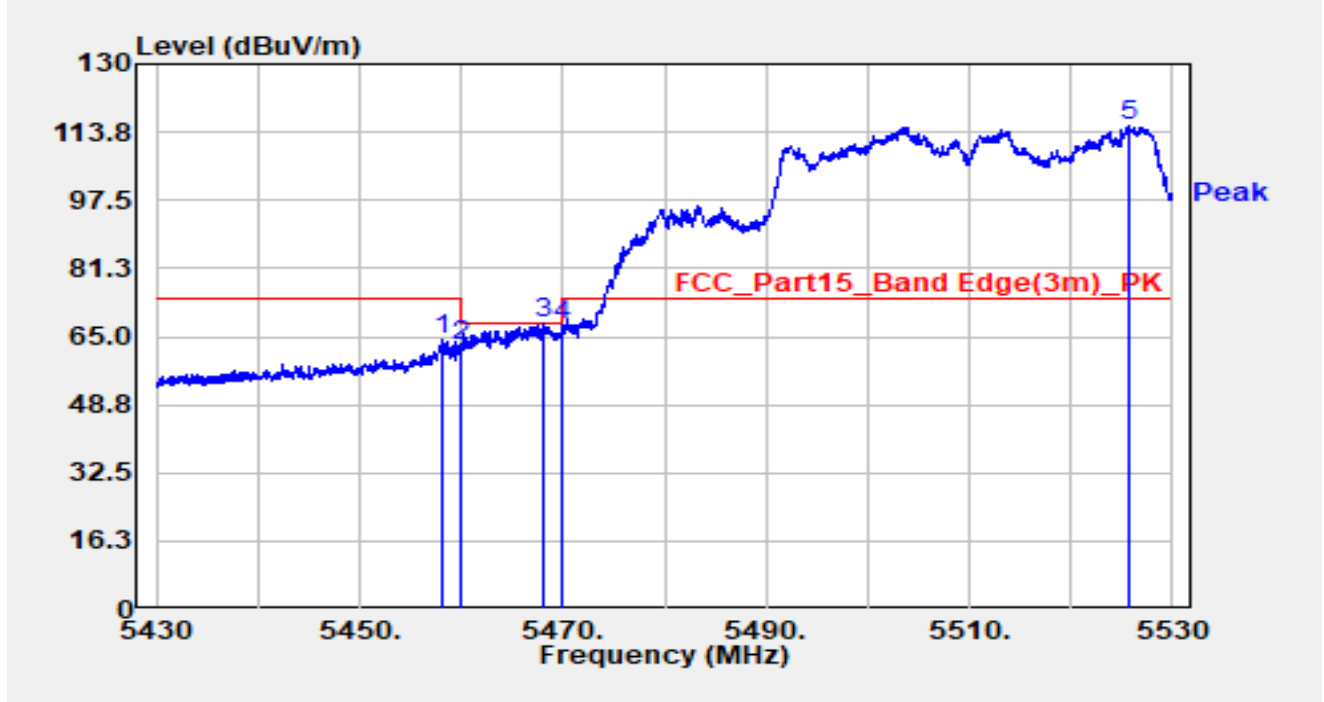


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5458.050	68.46	-4.02	64.44	-9.56	74.00	Peak
2		5460.000	66.55	-3.86	62.68	-5.52	68.20	Peak
3		5468.050	70.71	-2.75	67.96	-0.24	68.20	Peak
4	*	5470.000	69.84	-2.10	67.73	-0.47	68.20	Peak
5		5525.600	74.83	40.35	115.18	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-04
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT40 at 5510MHz		

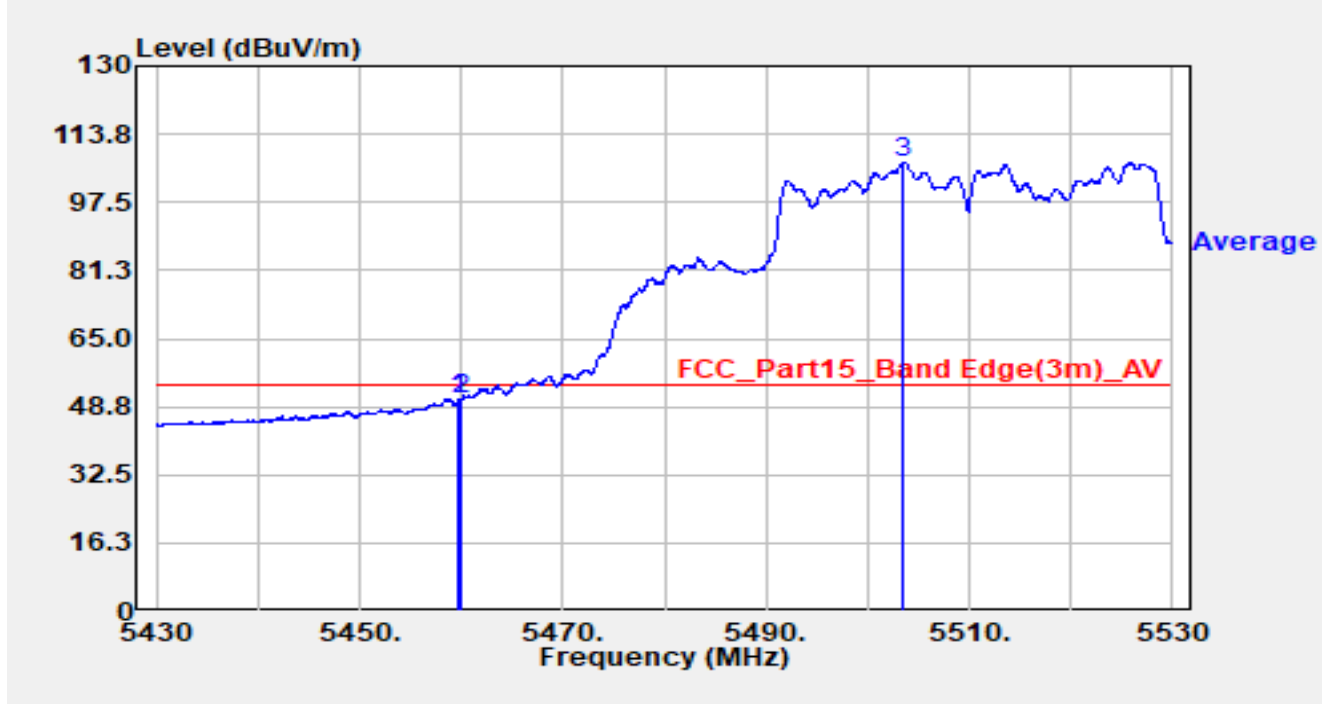


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5459.800	54.41	-3.89	50.52	-3.48	54.00	Average
2		5460.000	54.33	-3.86	50.46	-3.54	54.00	Average
3		5503.550	64.55	42.57	107.12	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-04
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT40 at 5510MHz		

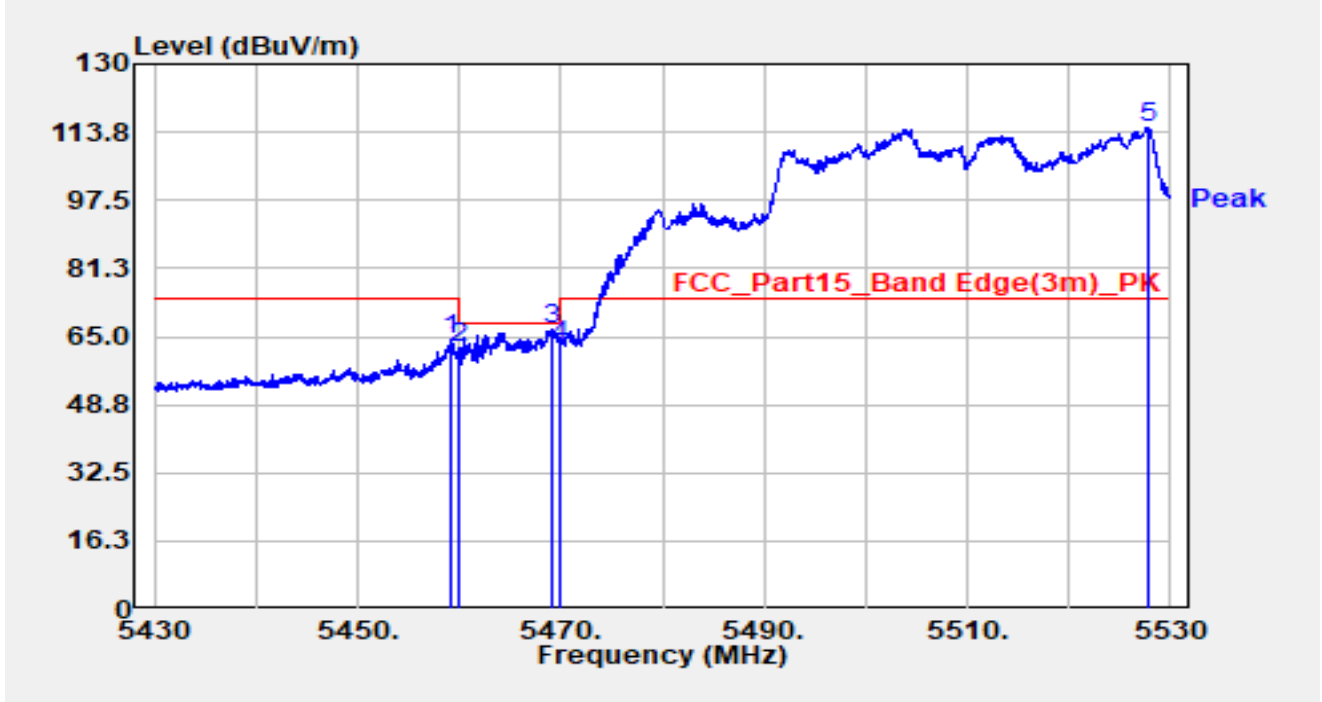


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5459.200	67.99	-3.97	64.02	-9.98	74.00	Peak
2		5460.000	66.14	-3.86	62.28	-5.92	68.20	Peak
3	*	5469.200	69.02	-2.33	66.70	-1.50	68.20	Peak
4		5470.000	65.10	-2.10	63.00	-5.20	68.20	Peak
5		5527.700	71.37	43.65	115.03	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-04
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT40 at 5510MHz		

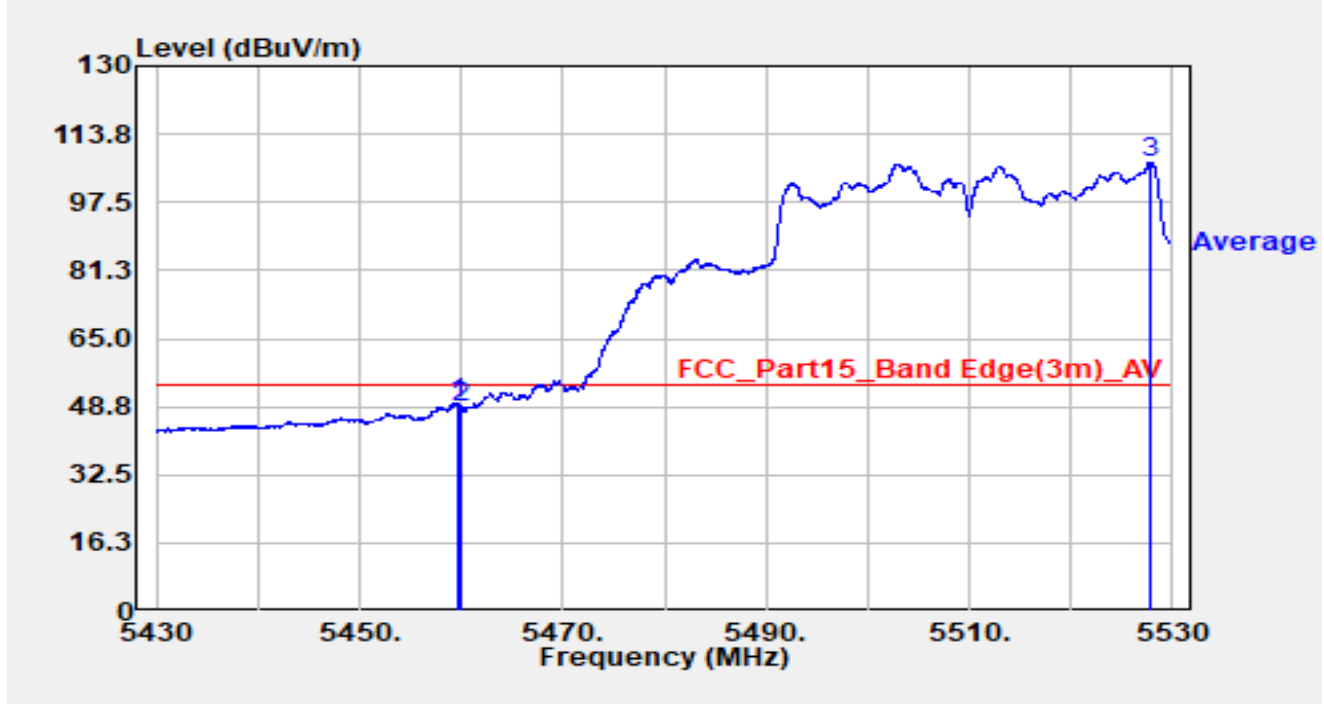


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5459.600	53.54	-3.92	49.62	-4.38	54.00	Average
2		5460.000	52.64	-3.86	48.77	-5.23	54.00	Average
3		5527.850	63.16	43.97	107.13	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-04
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT40 at 5670MHz		

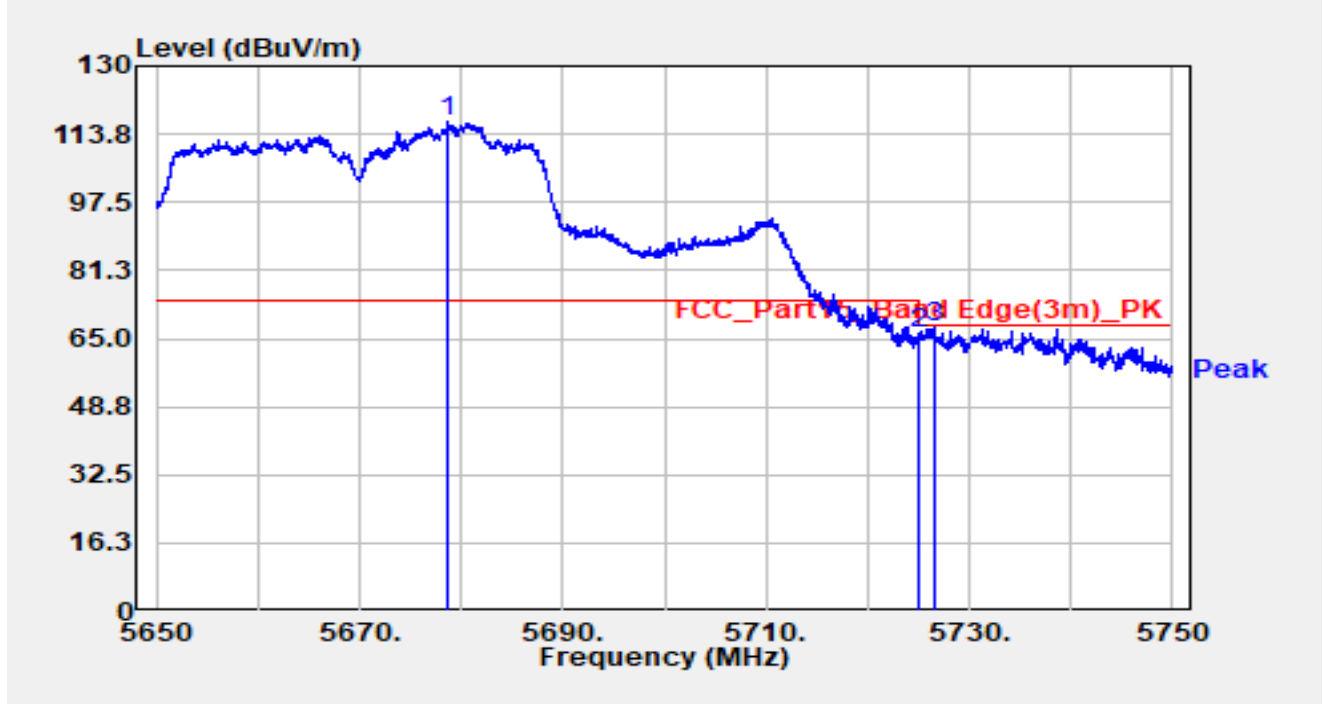


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5678.750	75.71	40.85	116.56	N/A	N/A	Peak
2		5725.000	68.28	-2.12	66.17	-2.03	68.20	Peak
3	*	5726.650	70.85	-2.92	67.94	-0.26	68.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-04
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT40 at 5670MHz		

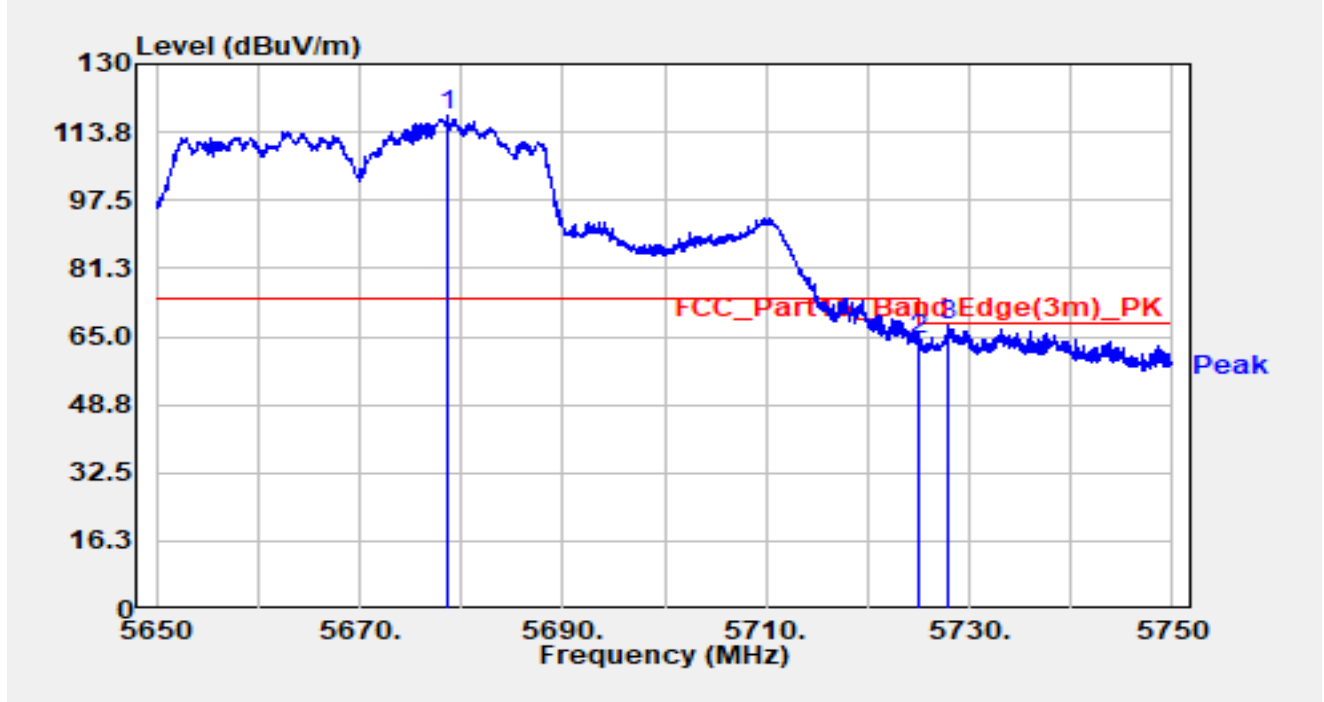


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5678.700	77.11	40.77	117.88	N/A	N/A	Peak
2		5725.000	66.48	-2.12	64.36	-3.84	68.20	Peak
3	*	5727.950	71.07	-3.39	67.68	-0.52	68.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-05
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT40 at 5755MHz		

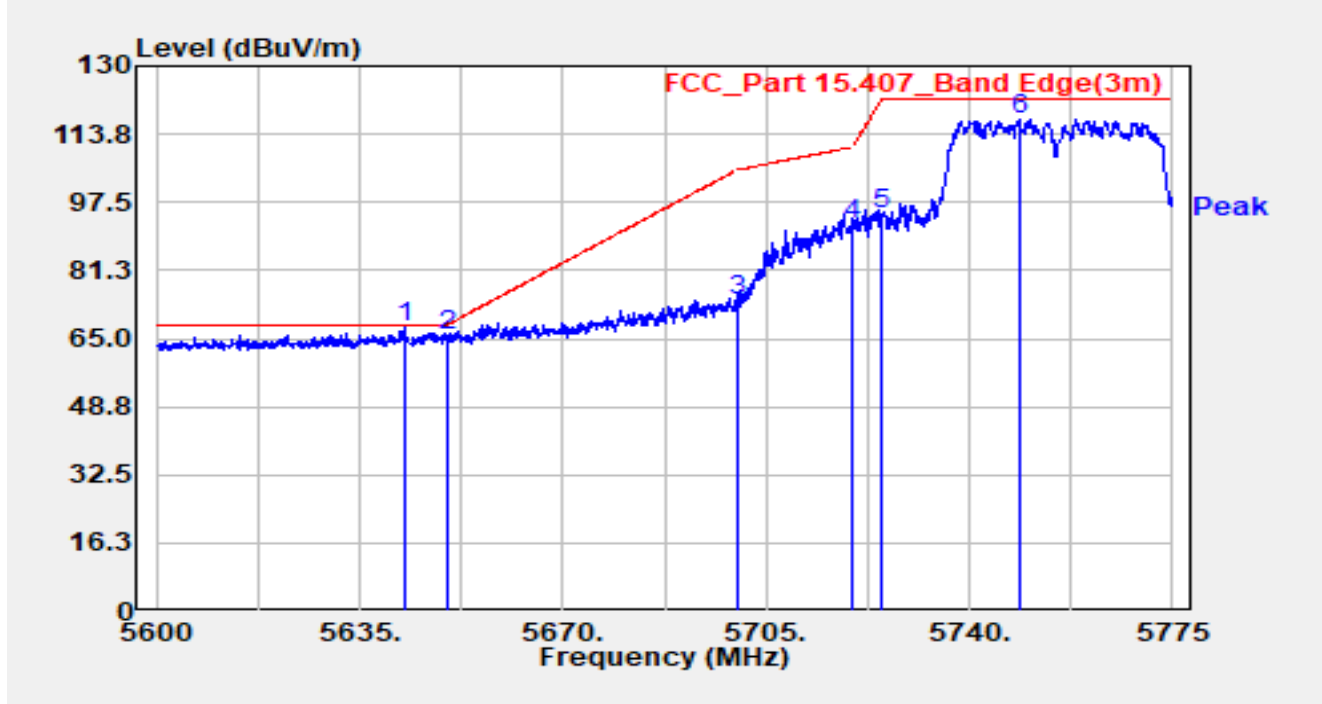


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5642.612	74.74	-7.19	67.55	-0.65	68.20	Peak
2		5650.000	72.66	-7.14	65.52	-2.68	68.20	Peak
3		5700.000	81.14	-7.06	74.08	-31.12	105.20	Peak
4		5720.000	99.49	-7.20	92.29	-18.51	110.80	Peak
5		5725.000	101.95	-7.22	94.73	-27.47	122.20	Peak
6		5748.837	124.53	-7.35	117.18	N/A	N/A	Peak

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-05
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT40 at 5755MHz		

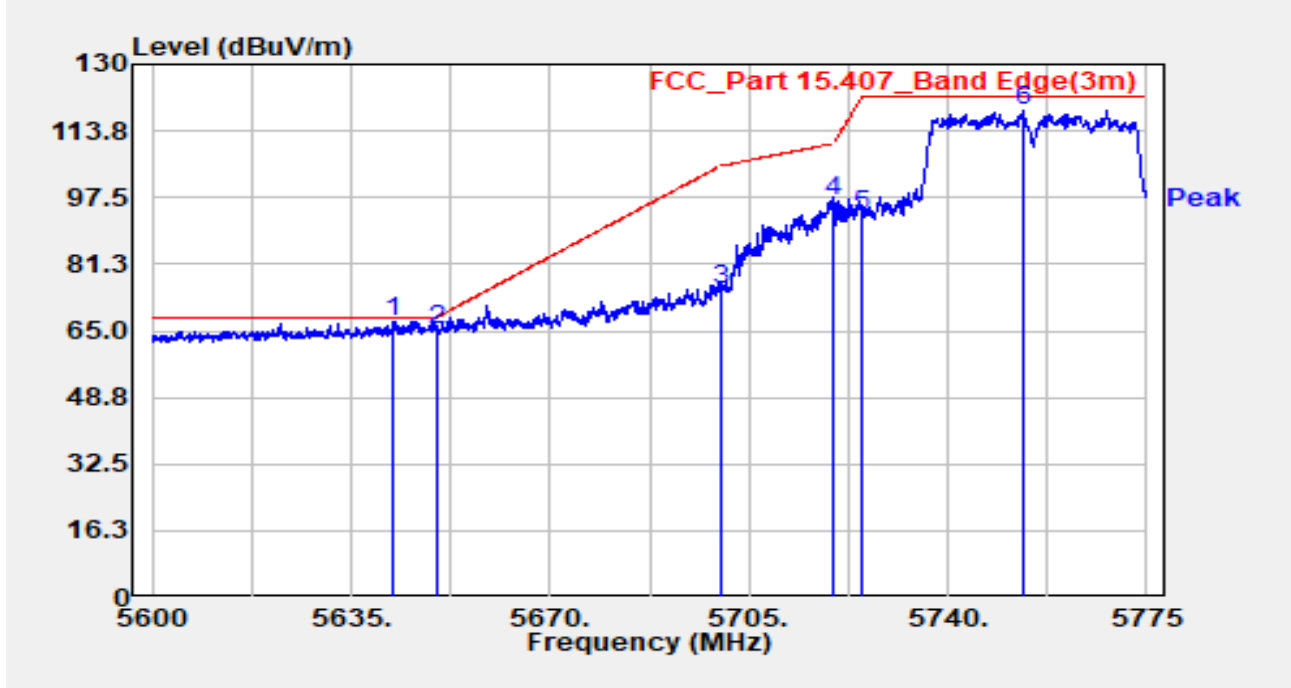


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5642.438	74.54	-7.19	67.35	-0.85	68.20	Peak
2		5650.000	72.32	-7.14	65.18	-3.02	68.20	Peak
3		5700.000	81.98	-7.06	74.92	-30.28	105.20	Peak
4		5720.000	103.85	-7.20	96.65	-14.15	110.80	Peak
5		5725.000	100.28	-7.22	93.06	-29.14	122.20	Peak
6		5753.125	125.98	-7.30	118.67	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-05
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT40 at 5795MHz		

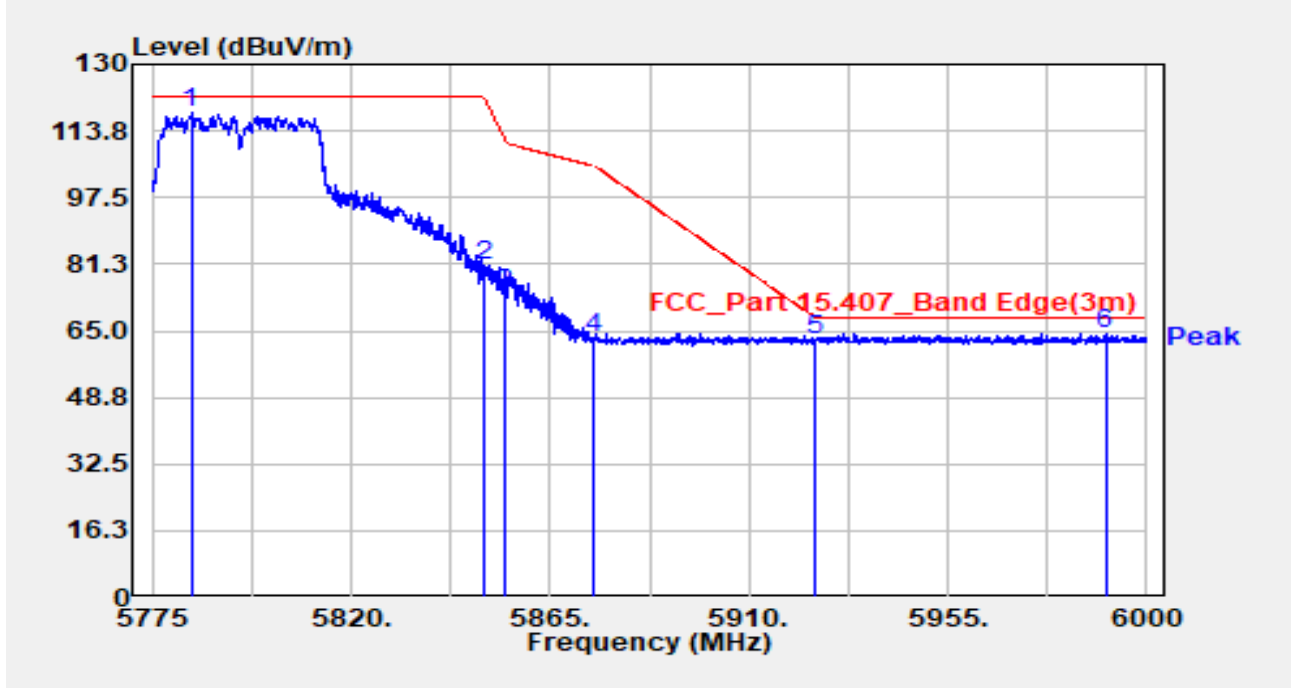


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5783.775	125.41	-7.16	118.25	N/A	N/A	Peak
2		5850.000	87.81	-7.06	80.75	-41.37	122.11	Peak
3		5855.000	81.23	-7.07	74.16	-36.64	110.80	Peak
4		5875.000	70.50	-7.15	63.35	-41.85	105.20	Peak
5		5925.000	70.05	-7.01	63.04	-5.16	68.20	Peak
6	*	5990.663	71.24	-6.82	64.42	-3.78	68.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-05
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT40 at 5795MHz		

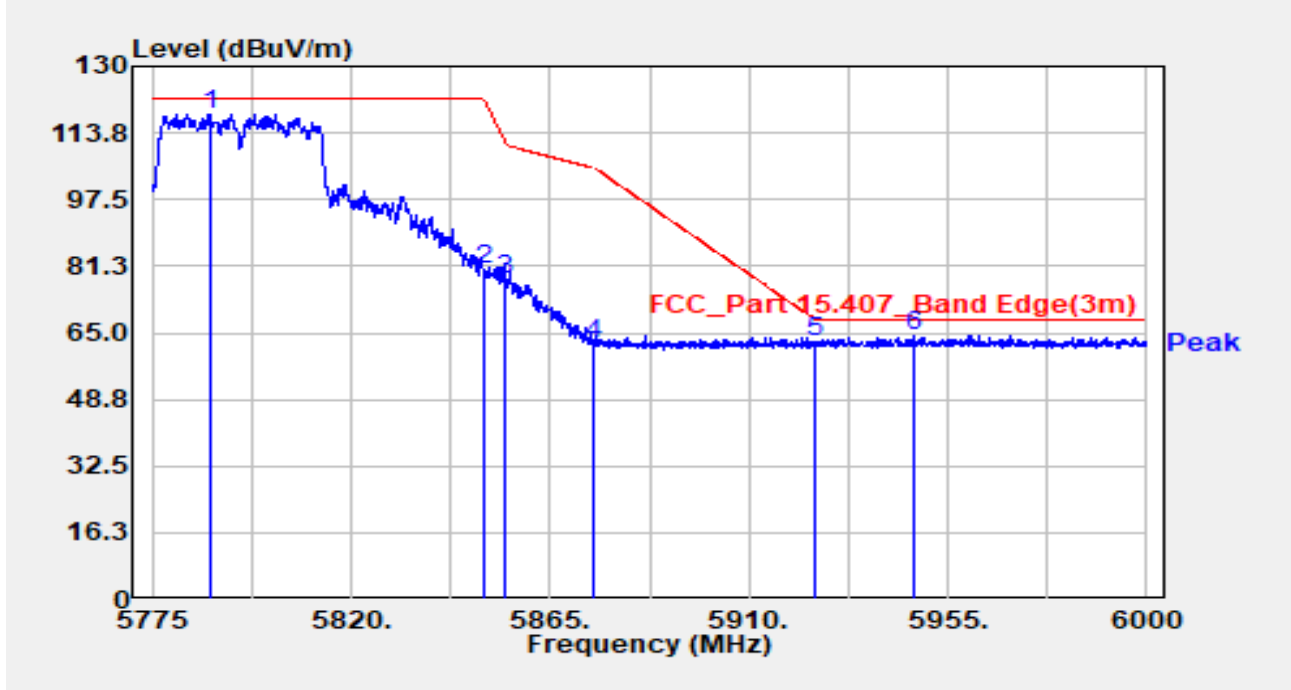


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5787.938	125.57	-7.16	118.41	N/A	N/A	Peak
2		5850.000	87.48	-7.06	80.41	-41.70	122.11	Peak
3		5855.000	85.11	-7.07	78.03	-32.77	110.80	Peak
4		5875.000	69.65	-7.15	62.50	-42.70	105.20	Peak
5		5925.000	69.71	-7.01	62.70	-5.50	68.20	Peak
6	*	5947.575	71.24	-6.84	64.41	-3.79	68.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2024-07-01
Test Engineer	Oliver Cheng	Temp./Humidity	24.3°C/65.2%
Factor	BBHA 9120D_02042_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-HT80 at 5210MHz		

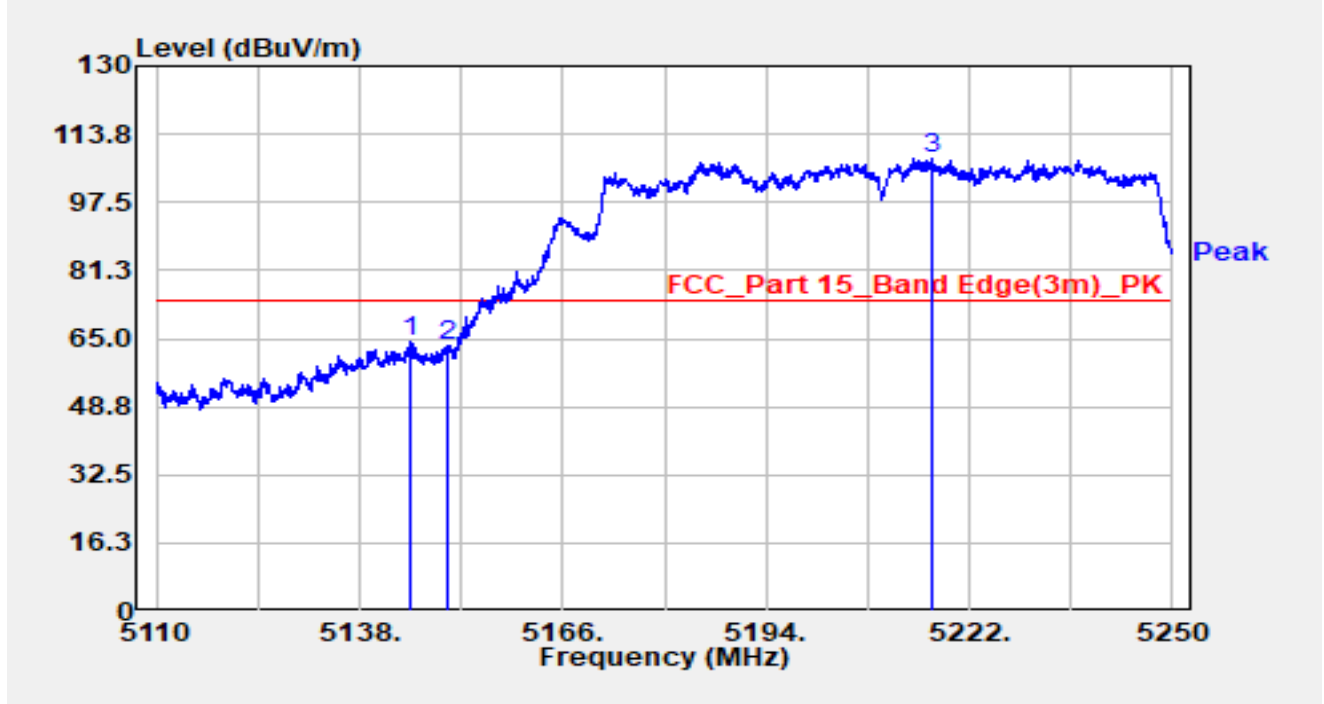


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5145.070	66.99	-2.56	64.43	-9.57	74.00	Peak
2		5150.000	64.84	-1.73	63.11	-10.89	74.00	Peak
3		5216.890	66.48	41.33	107.81	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2024-07-01
Test Engineer	Oliver Cheng	Temp./Humidity	24.3°C/65.2%
Factor	BBHA 9120D_02042_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-HT80 at 5210MHz		

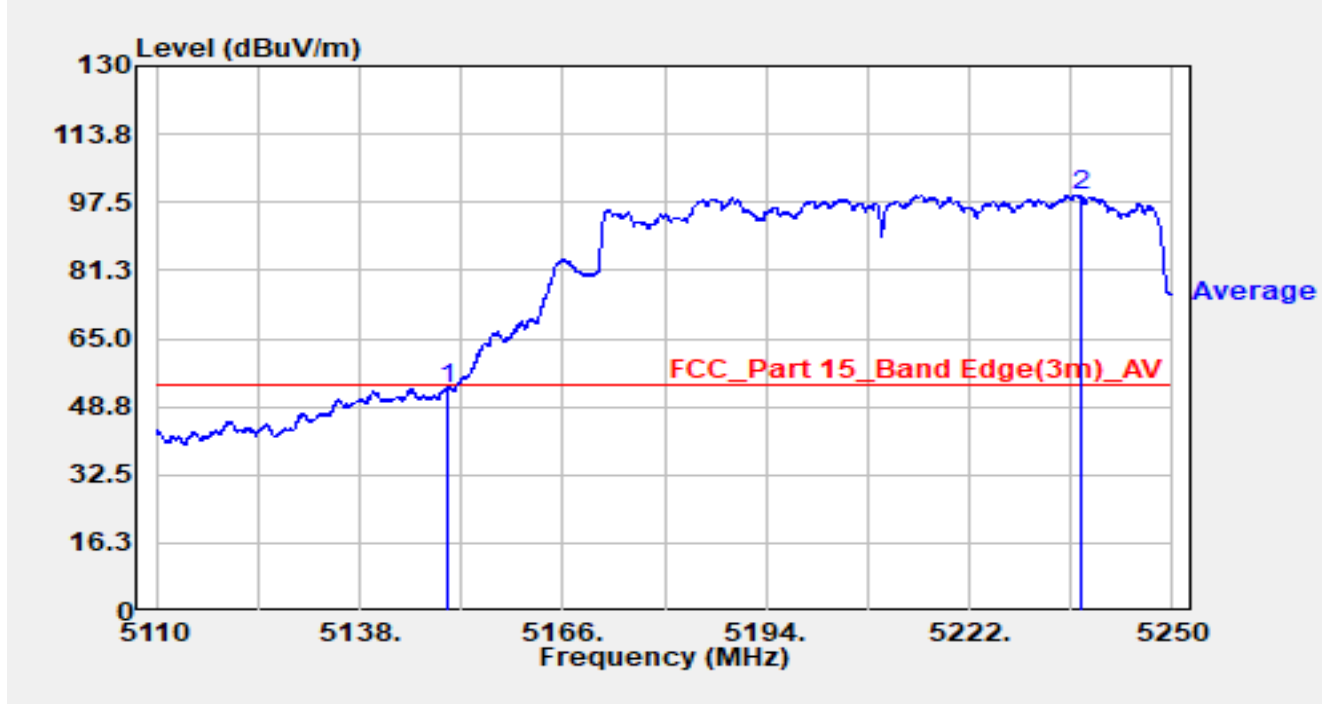


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.000	54.65	-1.73	52.92	-1.08	54.00	Average
2		5237.400	52.74	46.41	99.15	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2024-07-01
Test Engineer	Oliver Cheng	Temp./Humidity	24.3°C/65.2%
Factor	BBHA 9120D_02042_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-HT80 at 5210MHz		

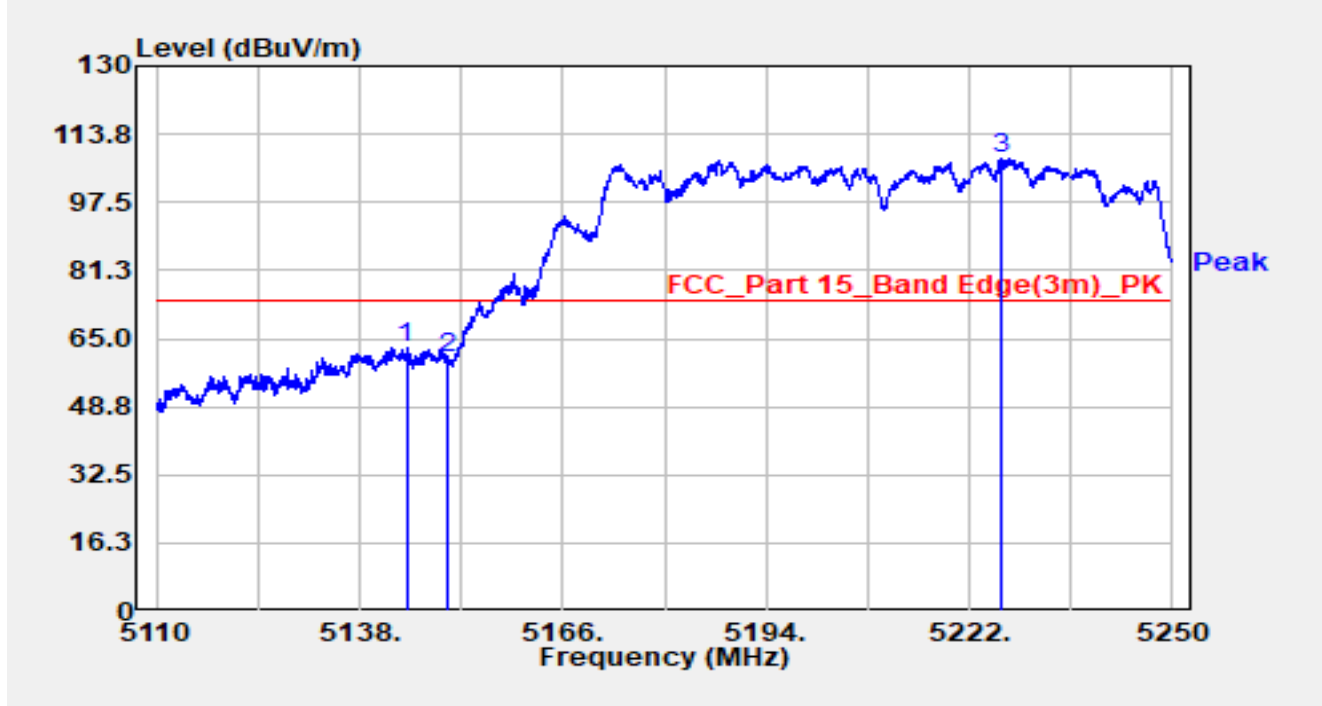


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5144.440	65.55	-2.62	62.93	-11.07	74.00	Peak
2		5150.000	62.23	-1.73	60.50	-13.50	74.00	Peak
3		5226.340	71.42	36.52	107.94	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2024-07-01
Test Engineer	Oliver Cheng	Temp./Humidity	24.3°C/65.2%
Factor	BBHA 9120D_02042_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-HT80 at 5210MHz		

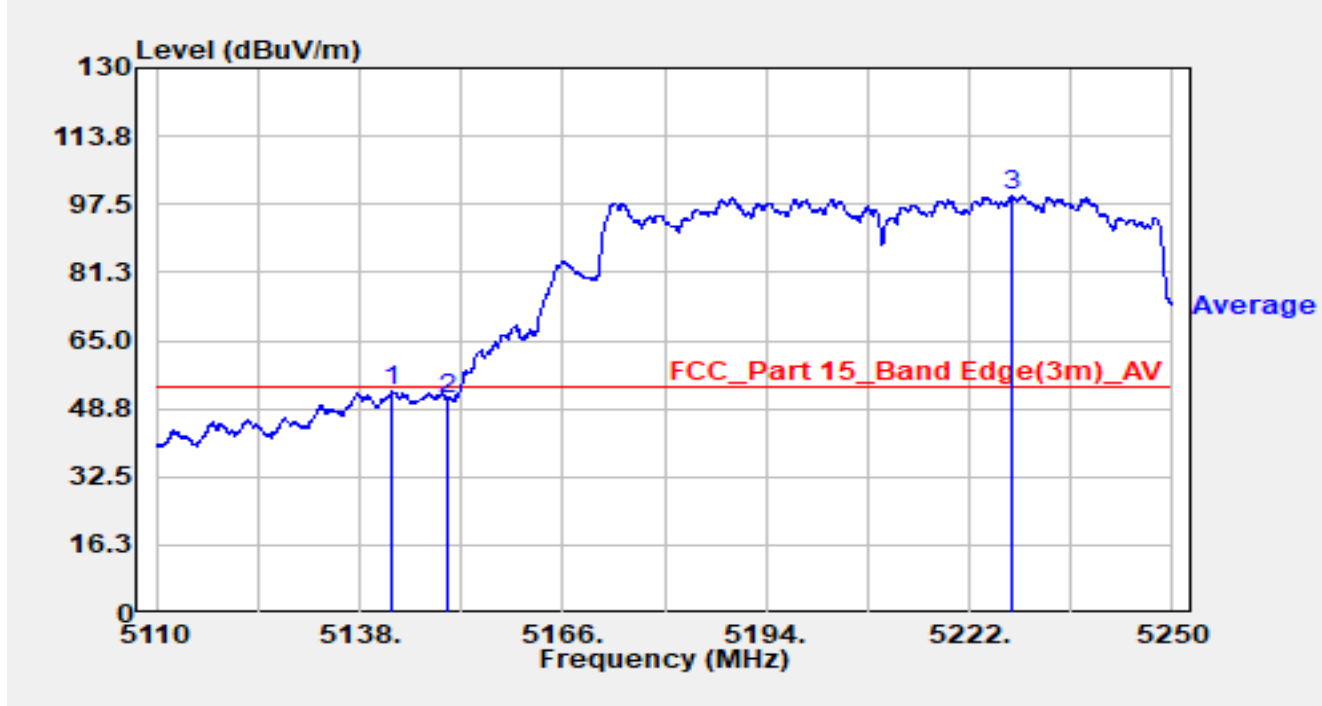


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5142.550	55.86	-2.80	53.06	-0.94	54.00	Average
2		5150.000	52.94	-1.73	51.21	-2.79	54.00	Average
3		5227.740	63.06	36.41	99.47	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-06
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT80 at 5290MHz		

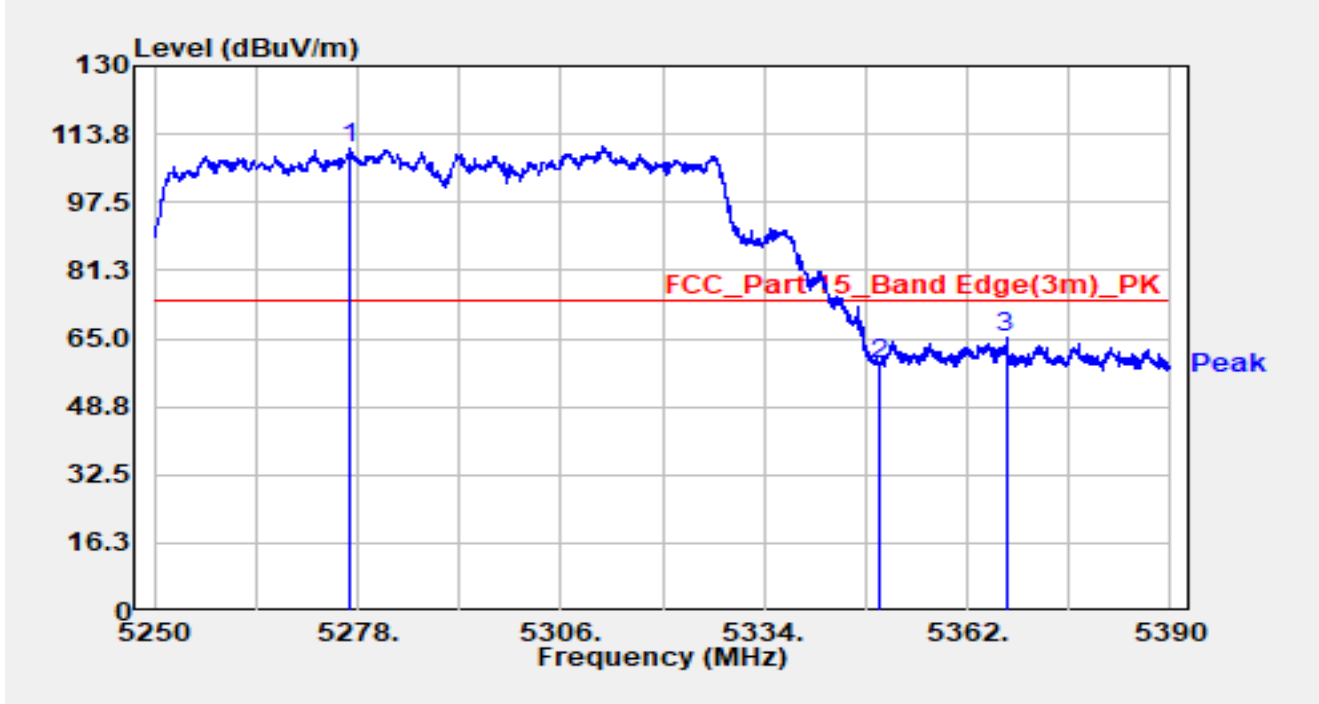


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5276.880	71.49	38.77	110.26	N/A	N/A	Peak
2		5350.000	60.76	-1.81	58.95	-15.05	74.00	Peak
3	*	5367.320	70.21	-5.09	65.12	-8.88	74.00	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-06
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT80 at 5290MHz		

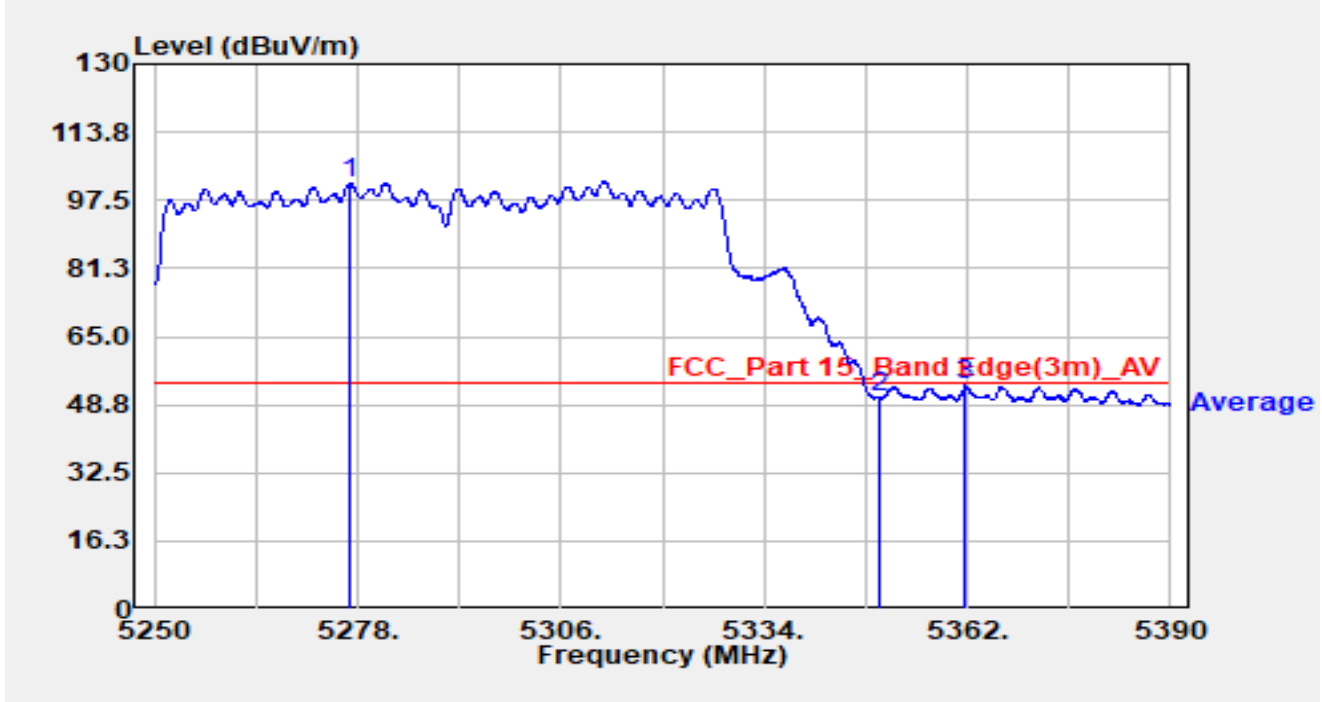


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5276.950	62.83	38.84	101.67	N/A	N/A	Peak
2		5350.000	52.14	-1.81	50.34	-3.66	54.00	Peak
3	*	5361.790	57.91	-4.68	53.23	-0.77	54.00	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-06
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT80 at 5290MHz		

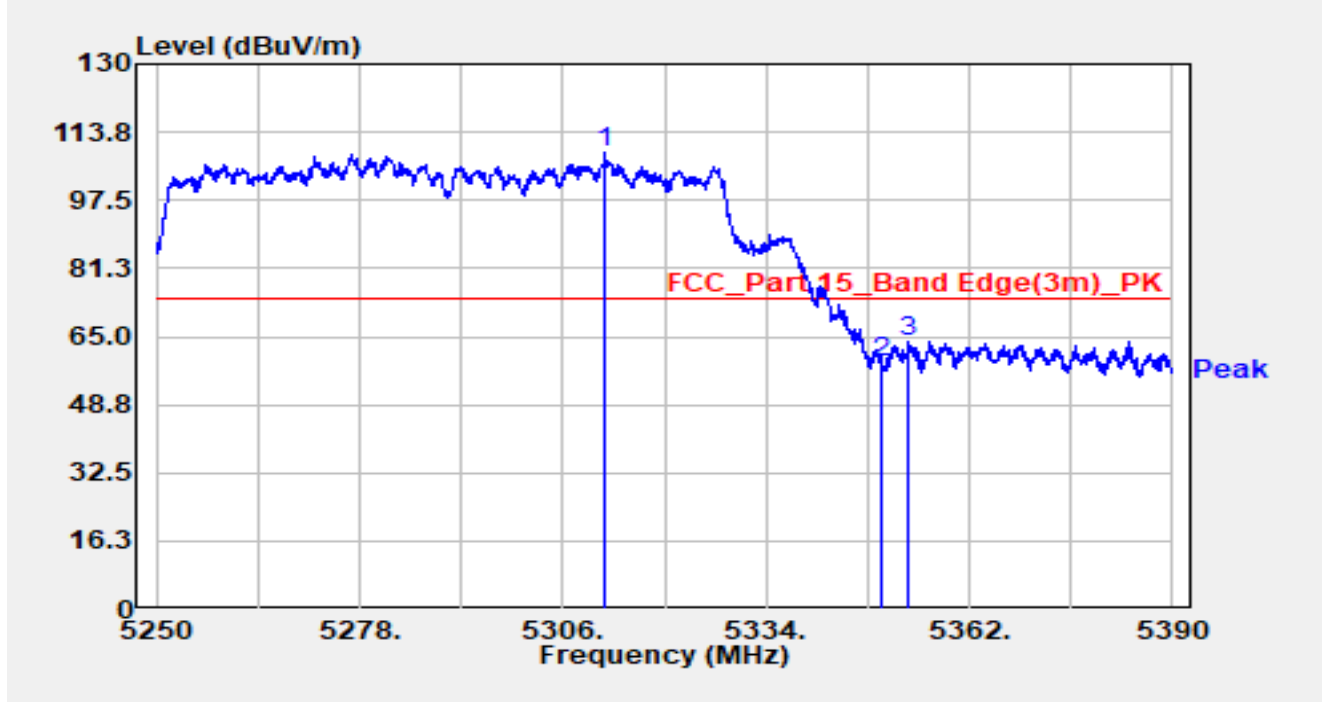


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5311.880	64.06	44.62	108.68	N/A	N/A	Peak
2		5350.000	60.83	-1.81	59.02	-14.98	74.00	Peak
3	*	5353.740	67.06	-3.27	63.80	-10.20	74.00	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-06
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT80 at 5290MHz		

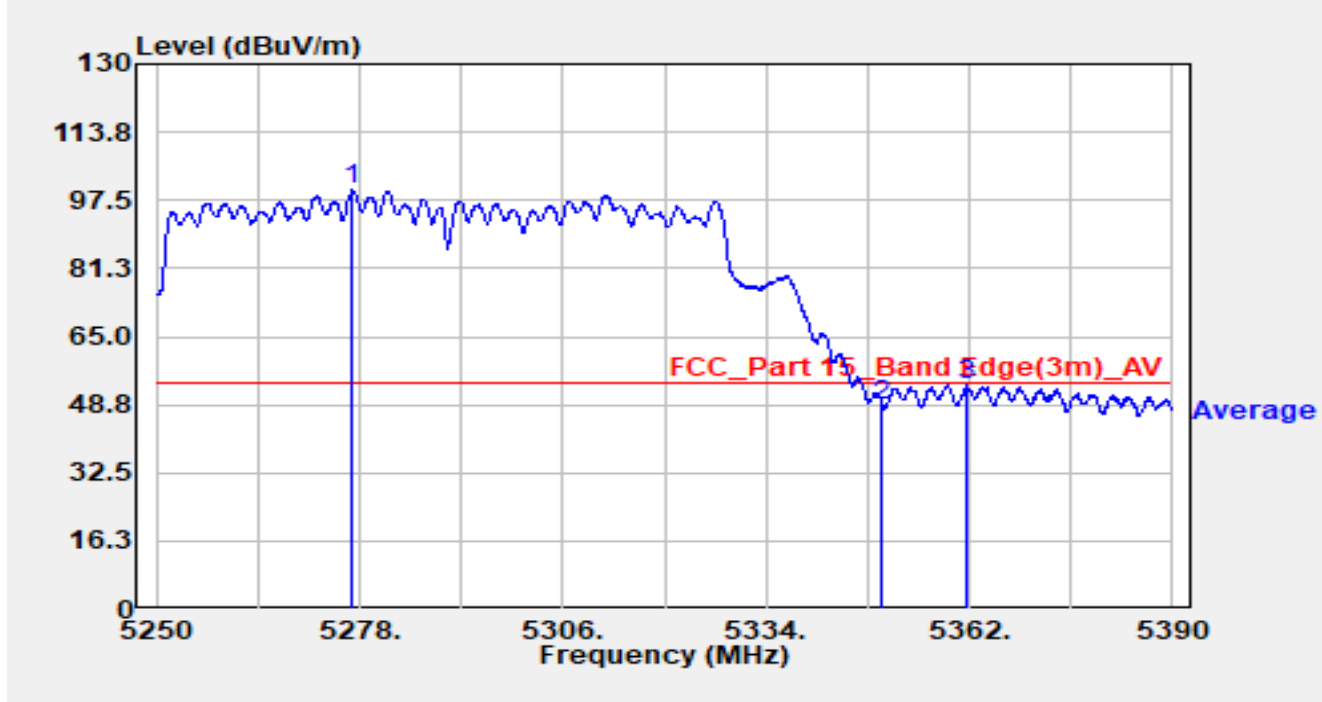


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5276.880	61.10	38.77	99.87	N/A	N/A	Peak
2		5350.000	50.22	-1.81	48.41	-5.59	54.00	Peak
3	*	5361.720	58.17	-4.67	53.50	-0.50	54.00	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-04
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT80 at 5530MHz		

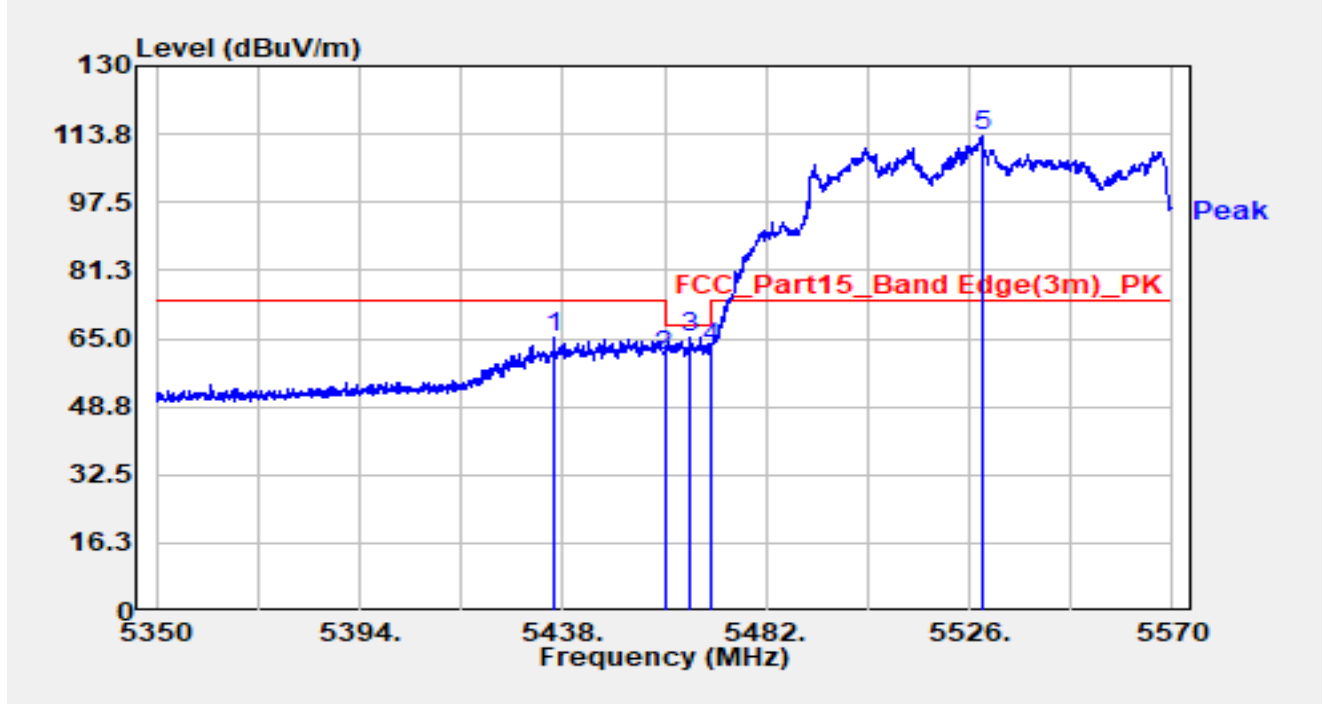


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5436.130	70.04	-4.94	65.10	-8.90	74.00	Peak
2		5460.000	64.70	-3.86	60.84	-7.36	68.20	Peak
3	*	5465.720	68.40	-3.25	65.14	-3.06	68.20	Peak
4		5470.000	64.82	-2.10	62.72	-5.48	68.20	Peak
5		5528.640	68.11	45.37	113.48	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-04
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT80 at 5530MHz		

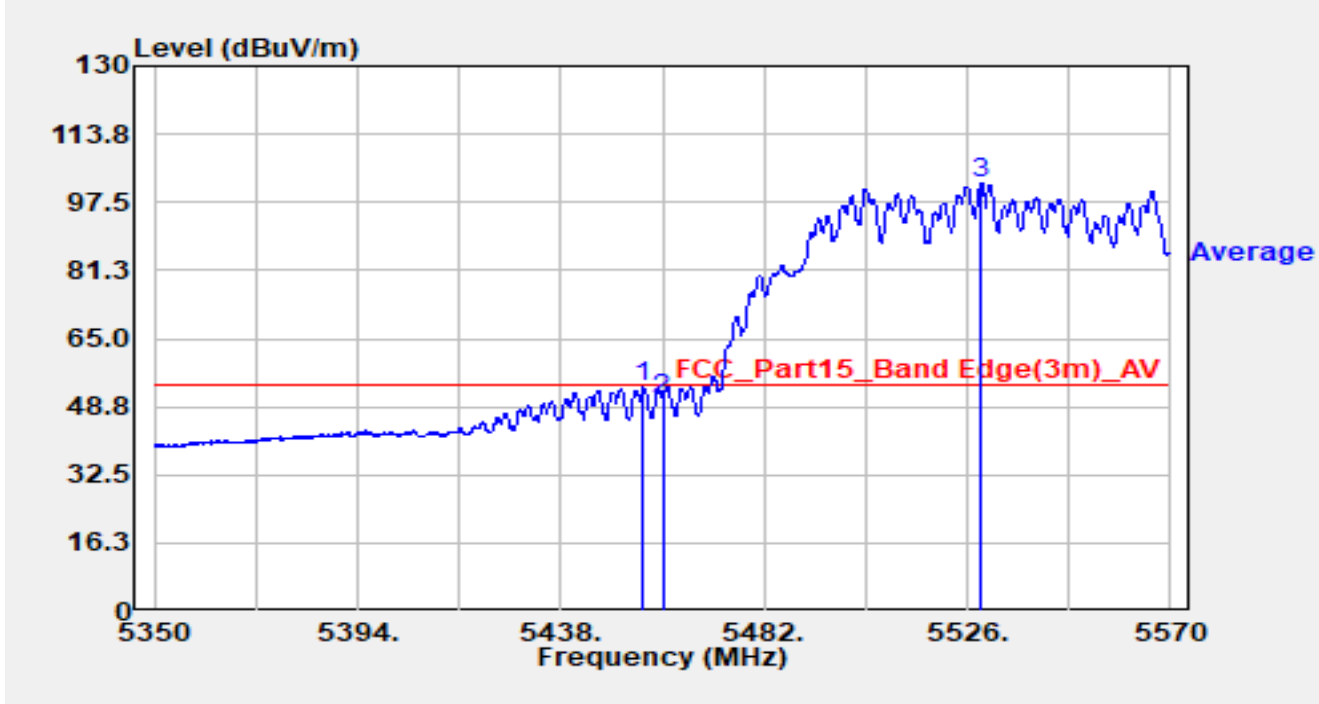


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5455.930	57.51	-4.18	53.33	-0.67	54.00	Average
2		5460.000	54.58	-3.86	50.71	-3.29	54.00	Average
3		5529.080	55.80	46.19	102.00	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-04
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT80 at 5530MHz		

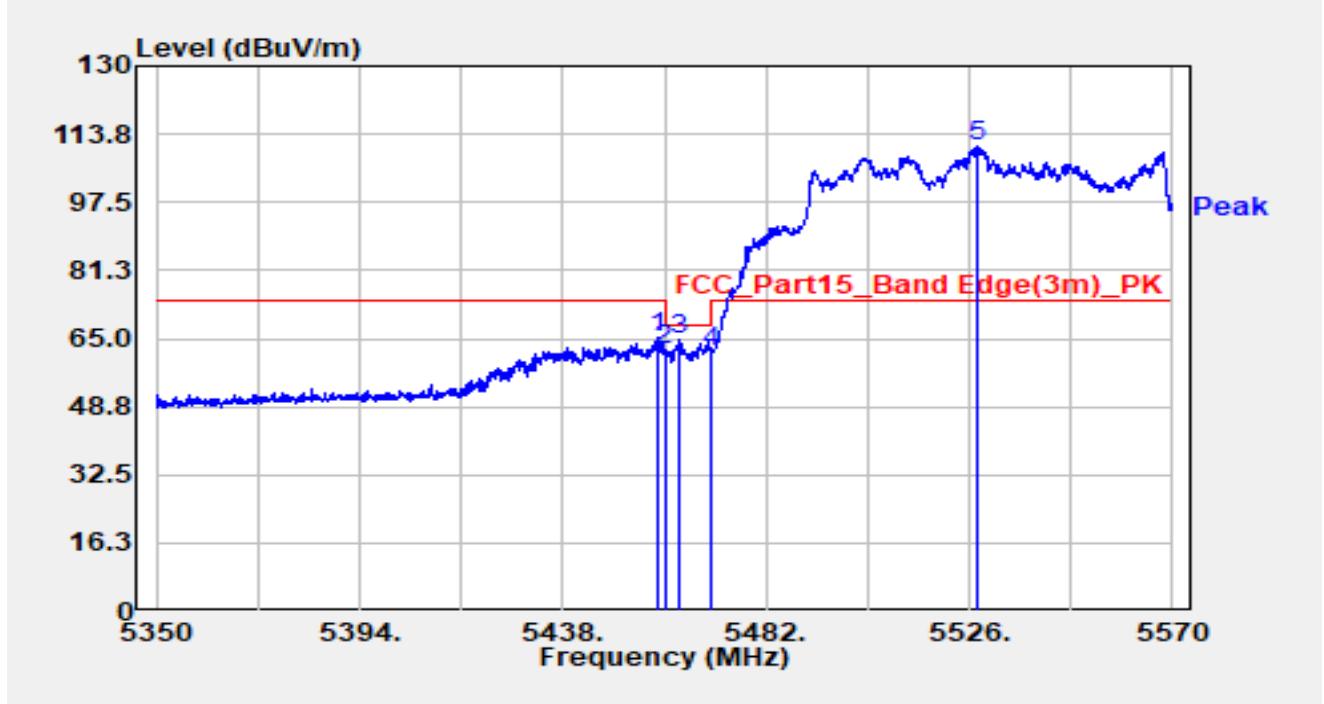


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5458.350	68.99	-3.97	65.01	-8.99	74.00	Peak
2		5460.000	66.09	-3.86	62.22	-5.98	68.20	Peak
3	*	5462.970	68.59	-3.64	64.95	-3.25	68.20	Peak
4		5470.000	64.16	-2.10	62.05	-6.15	68.20	Peak
5		5527.650	67.38	43.54	110.93	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-04
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT80 at 5530MHz		

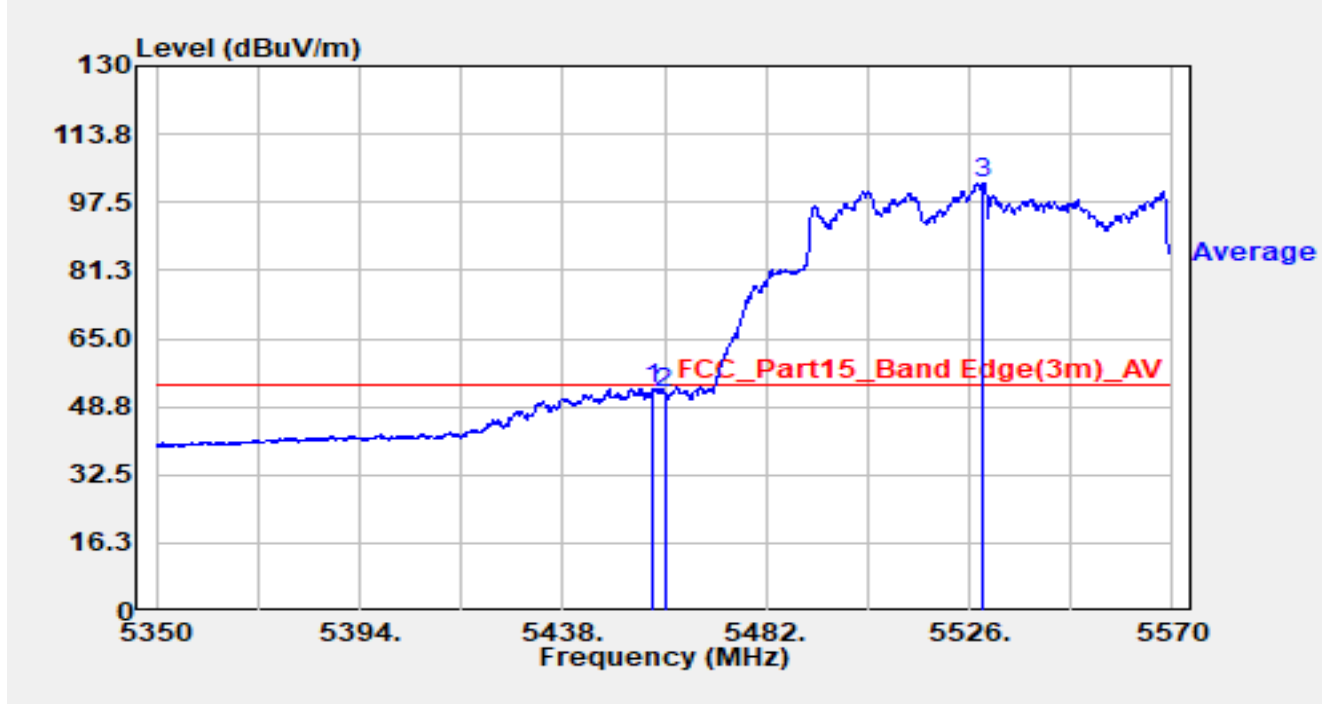


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5457.580	57.25	-4.11	53.15	-0.85	54.00	Average
2		5460.000	55.80	-3.86	51.93	-2.07	54.00	Average
3		5529.080	55.97	46.19	102.17	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-04
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT80 at 5610MHz		

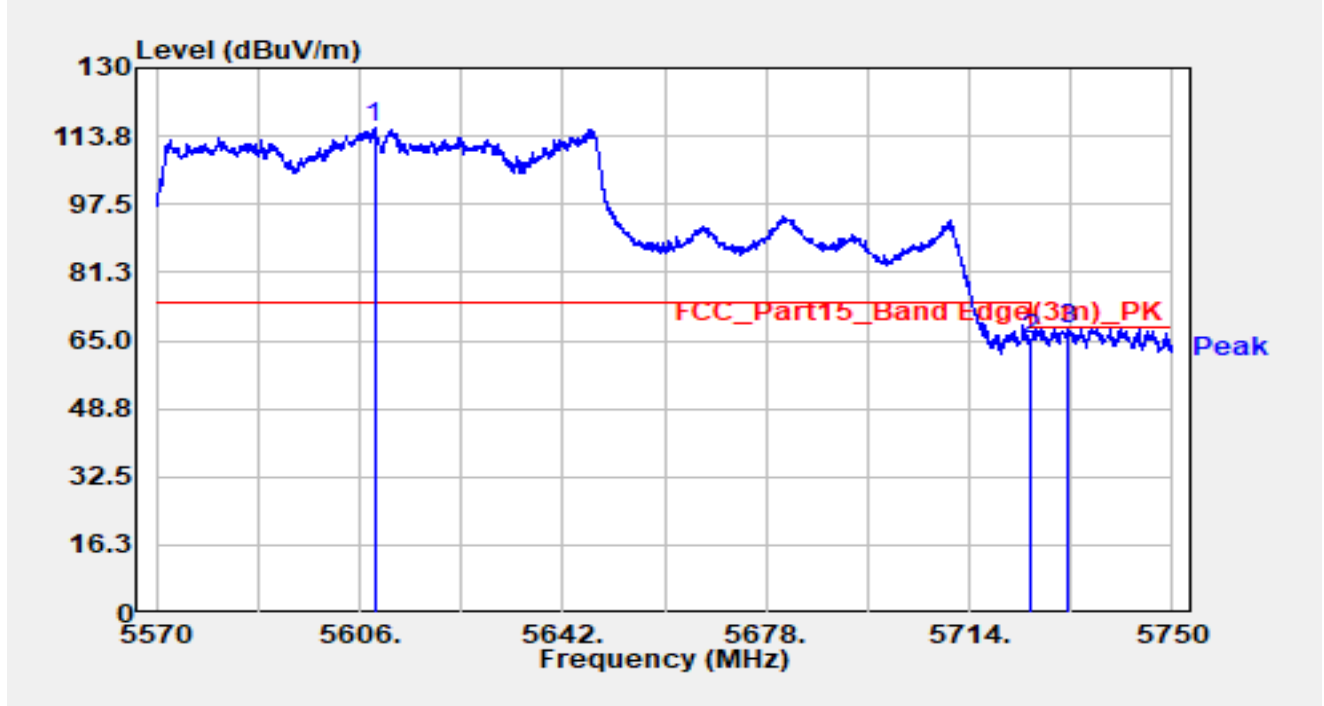


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5608.610	72.78	43.15	115.93	N/A	N/A	Peak
2		5725.000	67.13	-2.12	65.02	-3.18	68.20	Peak
3	*	5731.370	71.98	-4.15	67.83	-0.37	68.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-04
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT80 at 5610MHz		

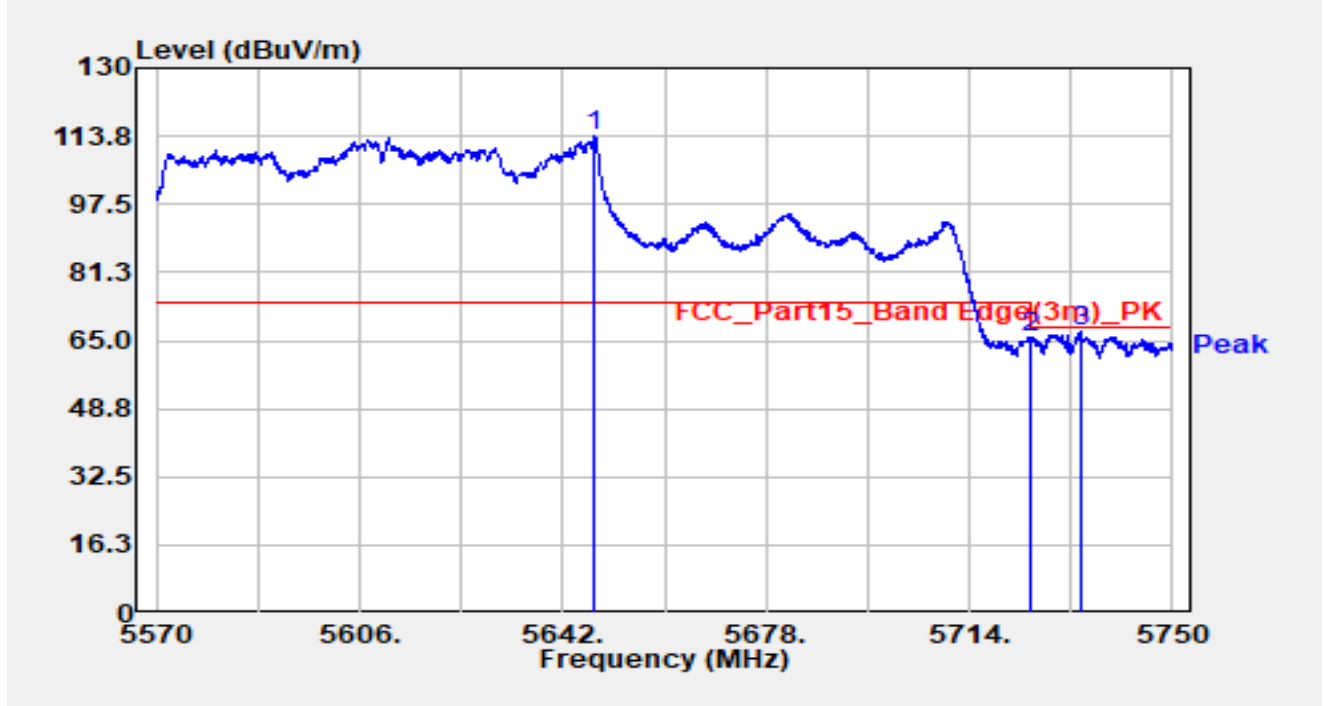


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5647.580	70.69	42.95	113.64	N/A	N/A	Peak
2		5725.000	67.69	-2.12	65.58	-2.62	68.20	Peak
3	*	5733.620	71.43	-4.41	67.02	-1.18	68.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-05
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT80 at 5775MHz		

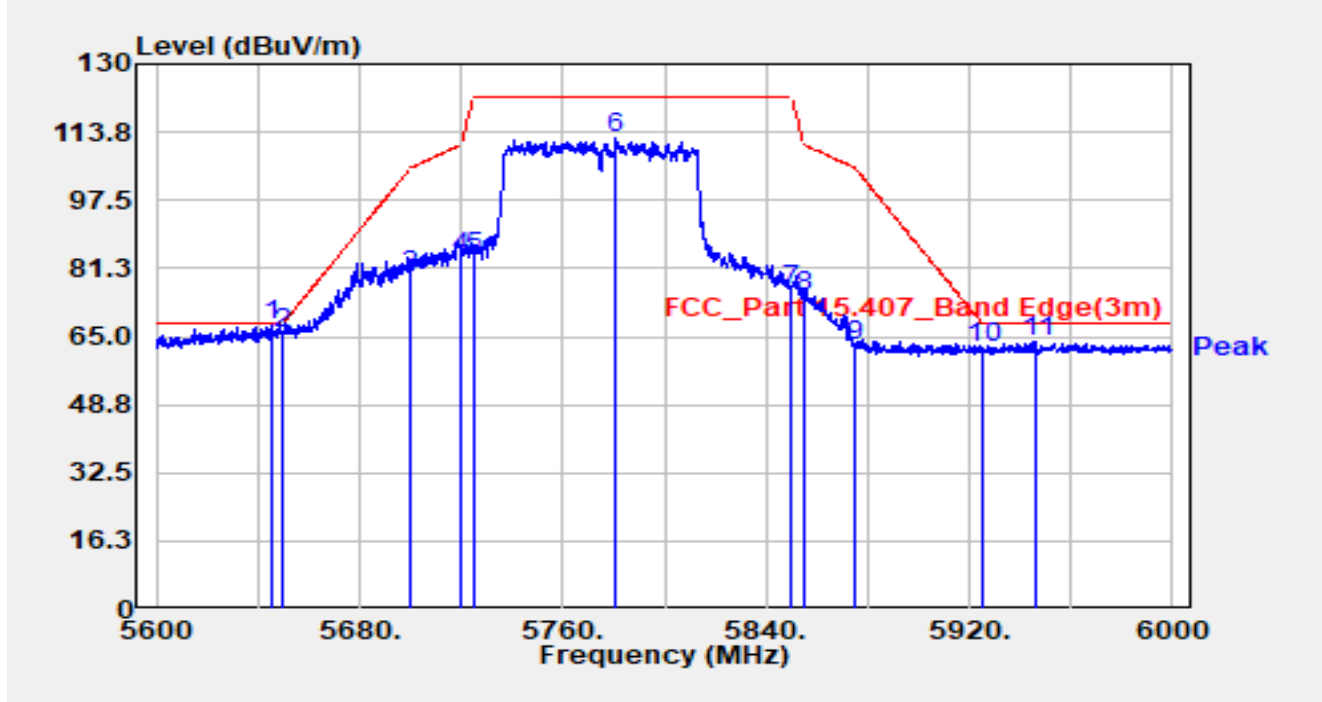


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5645.200	74.86	-7.17	67.69	-0.51	68.20	Peak
2		5650.000	73.00	-7.14	65.86	-2.34	68.20	Peak
3		5700.000	86.65	-7.06	79.59	-25.61	105.20	Peak
4		5720.000	91.10	-7.20	83.91	-26.89	110.80	Peak
5		5725.000	91.33	-7.22	84.11	-38.09	122.20	Peak
6		5780.800	119.43	-7.15	112.28	N/A	N/A	Peak
7		5850.000	82.88	-7.06	75.81	-46.39	122.20	Peak
8		5855.000	81.74	-7.07	74.66	-36.14	110.80	Peak
9		5875.000	69.90	-7.15	62.75	-42.45	105.20	Peak
10		5925.000	69.16	-7.01	62.15	-6.05	68.20	Peak
11		5946.400	70.83	-6.84	63.99	-4.21	68.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-05
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT80 at 5775MHz		

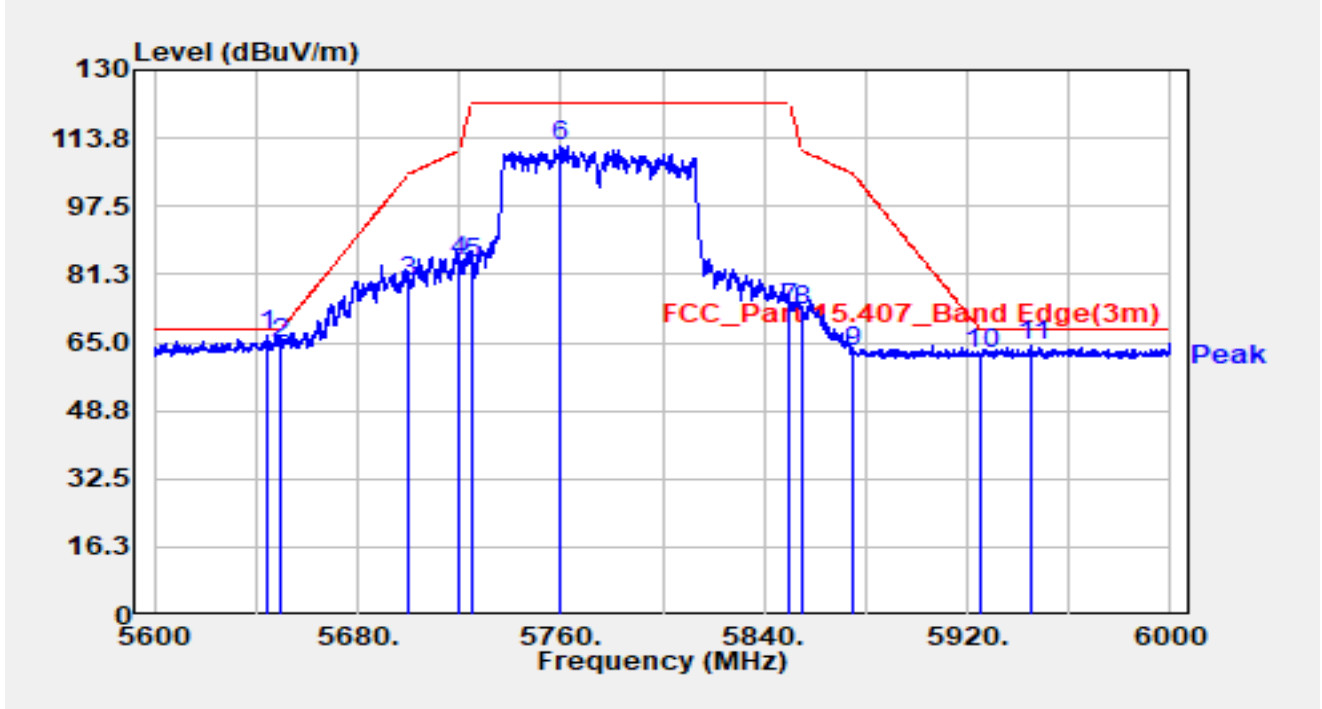


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5644.800	73.74	-7.17	66.57	-1.63	68.20	Peak
2		5650.000	71.74	-7.14	64.60	-3.60	68.20	Peak
3		5700.000	86.76	-7.06	79.70	-25.50	105.20	Peak
4		5720.000	91.79	-7.20	84.60	-26.20	110.80	Peak
5		5725.000	91.25	-7.22	84.03	-38.17	122.20	Peak
6		5759.800	118.98	-7.24	111.75	N/A	N/A	Peak
7		5850.000	80.40	-7.06	73.34	-48.86	122.20	Peak
8		5855.000	79.73	-7.07	72.66	-38.14	110.80	Peak
9		5875.000	70.03	-7.15	62.88	-42.32	105.20	Peak
10		5925.000	69.33	-7.01	62.32	-5.88	68.20	Peak
11		5945.600	71.22	-6.85	64.37	-3.83	68.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-06
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT160 at 5250MHz		

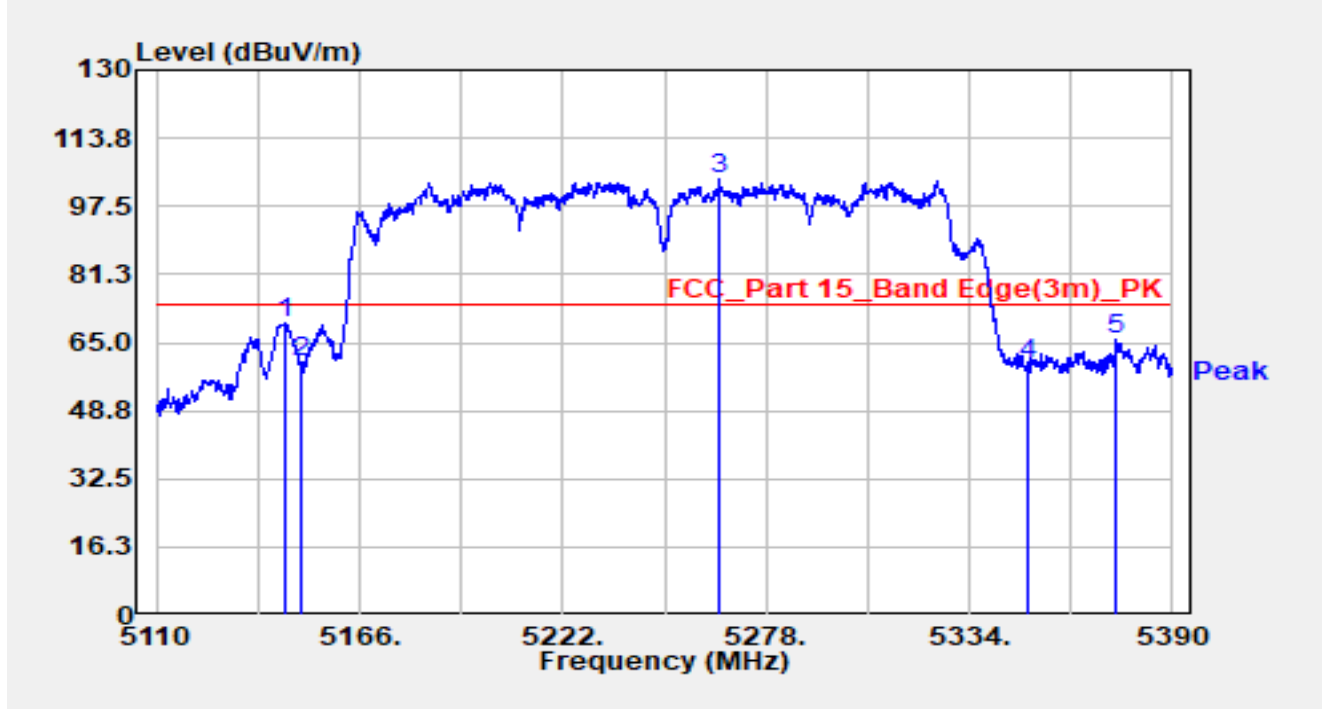


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5145.280	73.87	-4.22	69.65	-4.35	74.00	Peak
2		5150.000	63.58	-3.47	60.11	-13.89	74.00	Peak
3		5264.980	64.22	39.67	103.89	N/A	N/A	Peak
4		5350.000	61.87	-1.81	60.06	-13.94	74.00	Peak
5		5374.600	71.20	-5.32	65.89	-8.11	74.00	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-06
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT160 at 5250MHz		

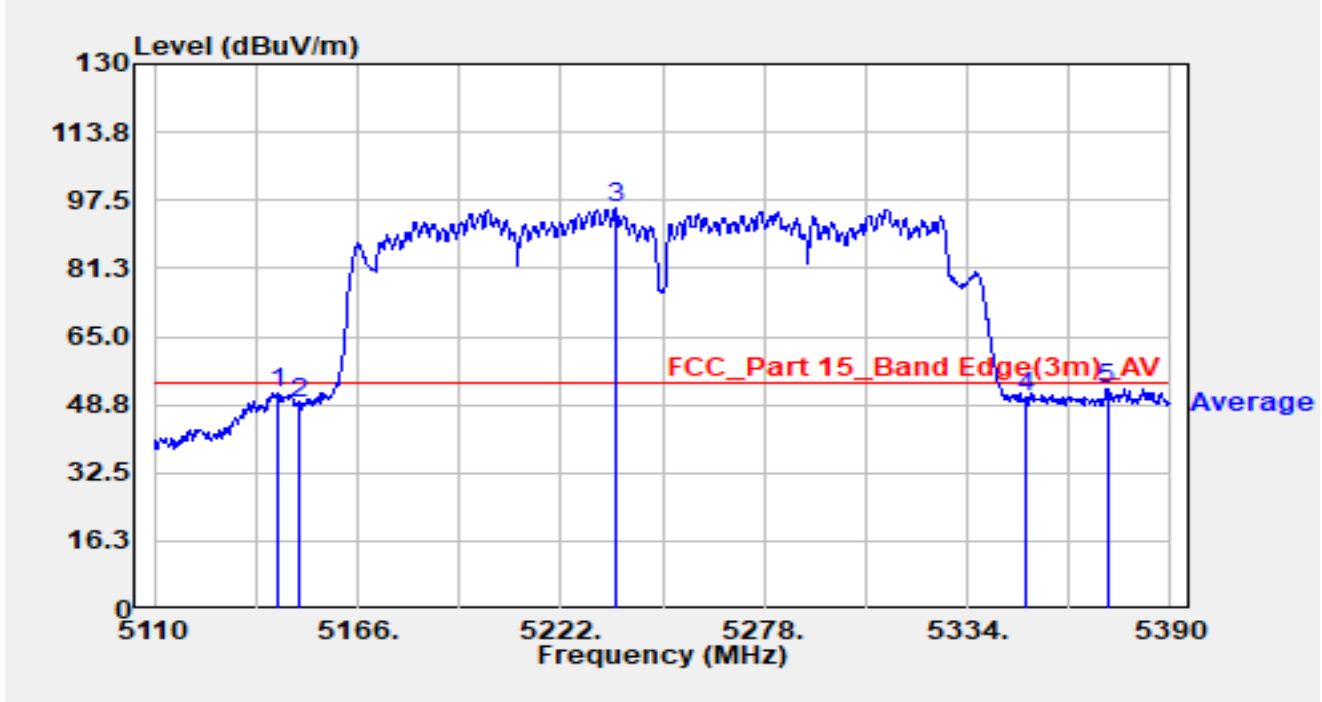


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5143.740	55.76	-4.37	51.39	-2.61	54.00	Average
2		5150.000	52.72	-3.47	49.25	-4.75	54.00	Average
3		5236.840	53.71	41.90	95.61	N/A	N/A	Average
4		5350.000	52.51	-1.81	50.70	-3.30	54.00	Average
5	*	5372.500	57.75	-5.29	52.46	-1.54	54.00	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-06
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT160 at 5250MHz		

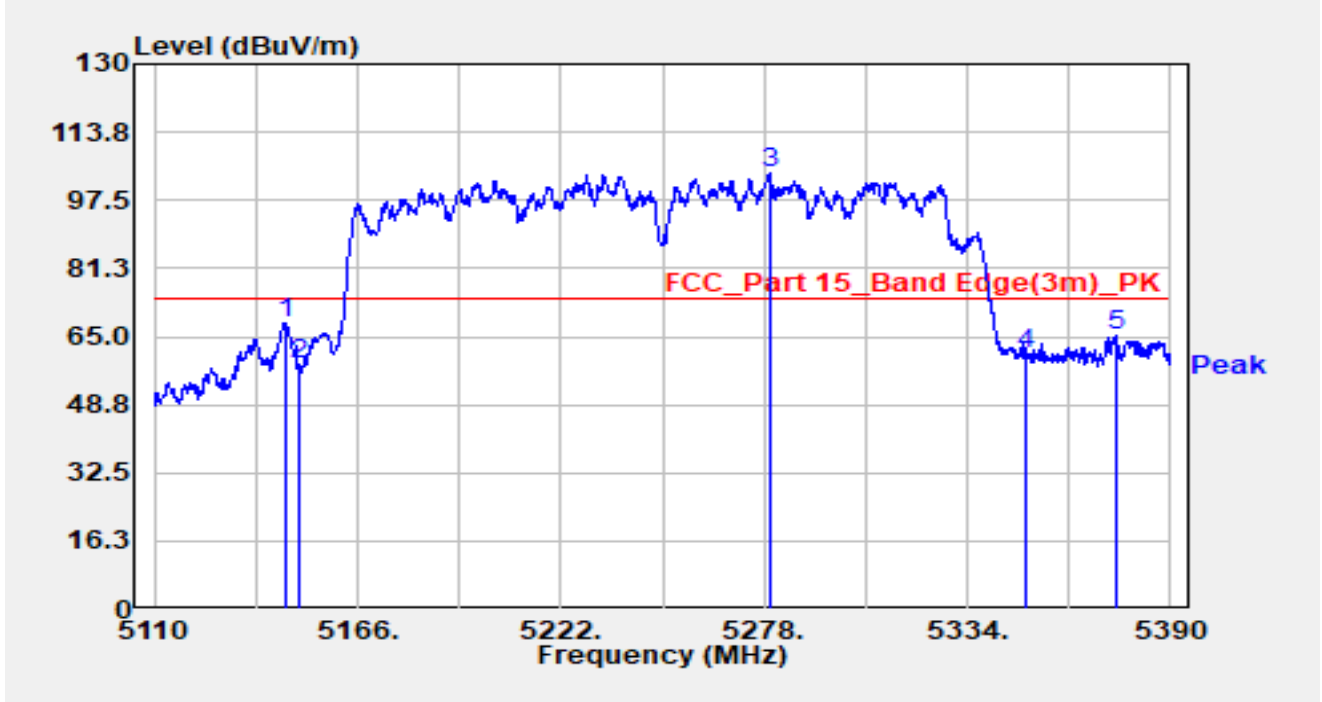


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5145.980	72.35	-4.15	68.21	-5.79	74.00	Peak
2		5150.000	61.96	-3.47	58.49	-15.51	74.00	Peak
3		5279.400	61.52	42.45	103.97	N/A	N/A	Peak
4		5350.000	62.42	-1.81	60.61	-13.39	74.00	Peak
5		5374.880	70.50	-5.31	65.19	-8.81	74.00	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-06
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT160 at 5250MHz		

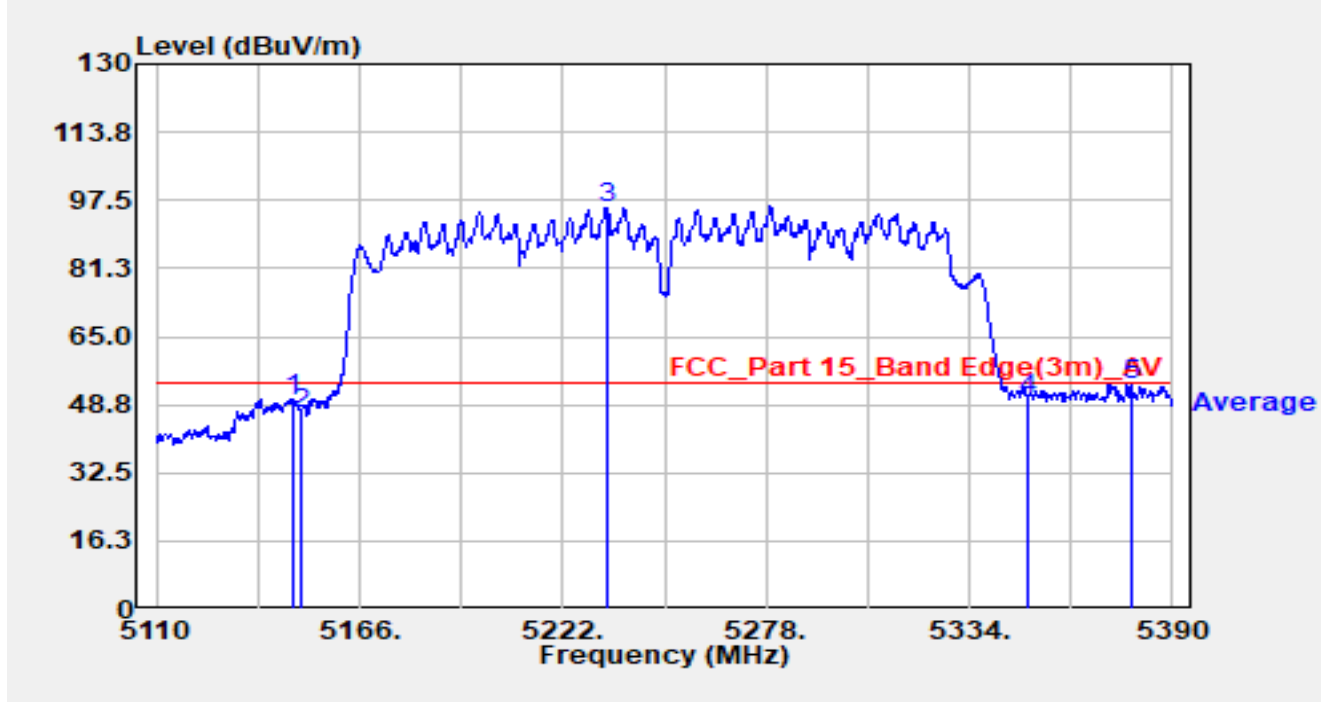


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5147.380	54.13	-4.00	50.14	-3.86	54.00	Average
2		5150.000	50.12	-3.47	46.65	-7.35	54.00	Average
3		5234.040	57.39	38.35	95.75	N/A	N/A	Average
4		5350.000	51.99	-1.81	50.19	-3.81	54.00	Average
5	*	5378.660	58.92	-5.37	53.55	-0.45	54.00	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-04
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT160 at 5570MHz		

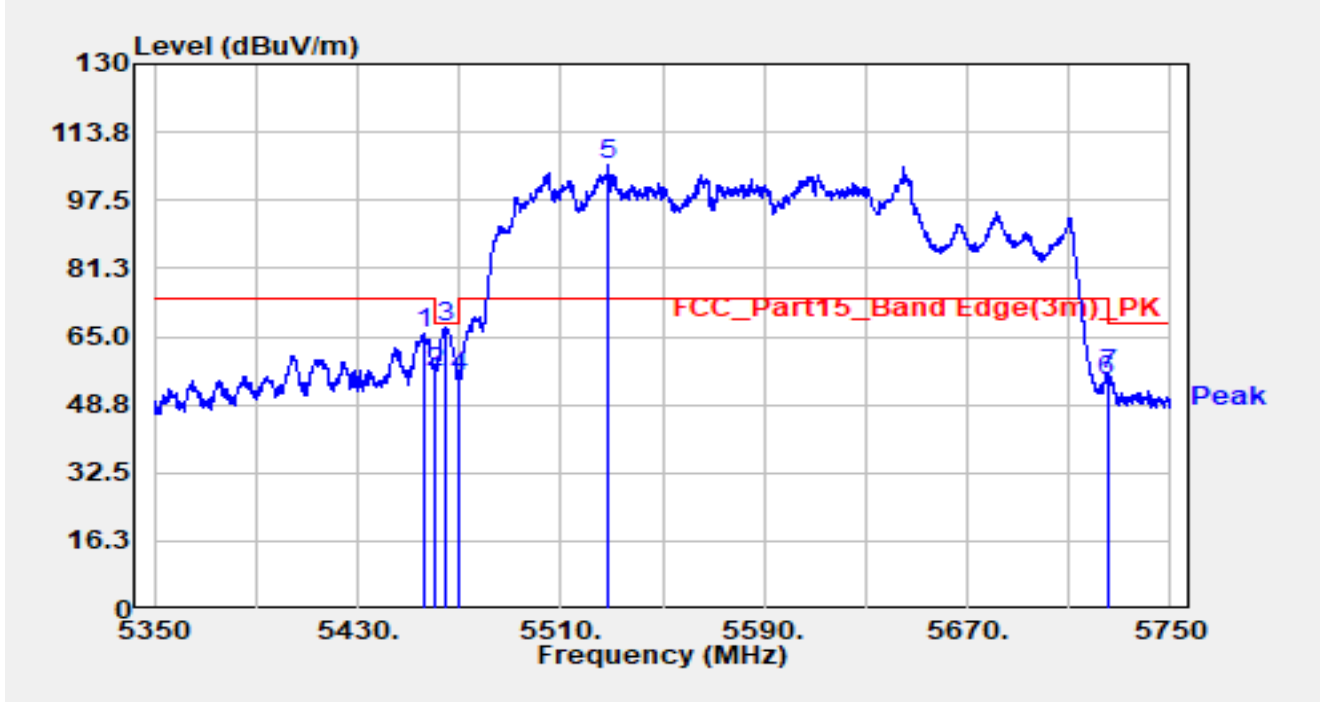


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5456.000	69.87	-4.17	65.70	-8.30	74.00	Peak
2		5460.000	60.39	-3.86	56.52	-11.68	68.20	Peak
3	*	5464.800	70.76	-3.43	67.33	-0.87	68.20	Peak
4		5470.000	57.64	-2.10	55.54	-12.66	68.20	Peak
5		5528.600	60.47	45.31	105.79	N/A	N/A	Peak
6		5725.000	56.40	-2.12	54.28	-13.92	68.20	Peak
7		5725.600	58.44	-2.44	55.99	-12.21	68.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-04
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT160 at 5570MHz		

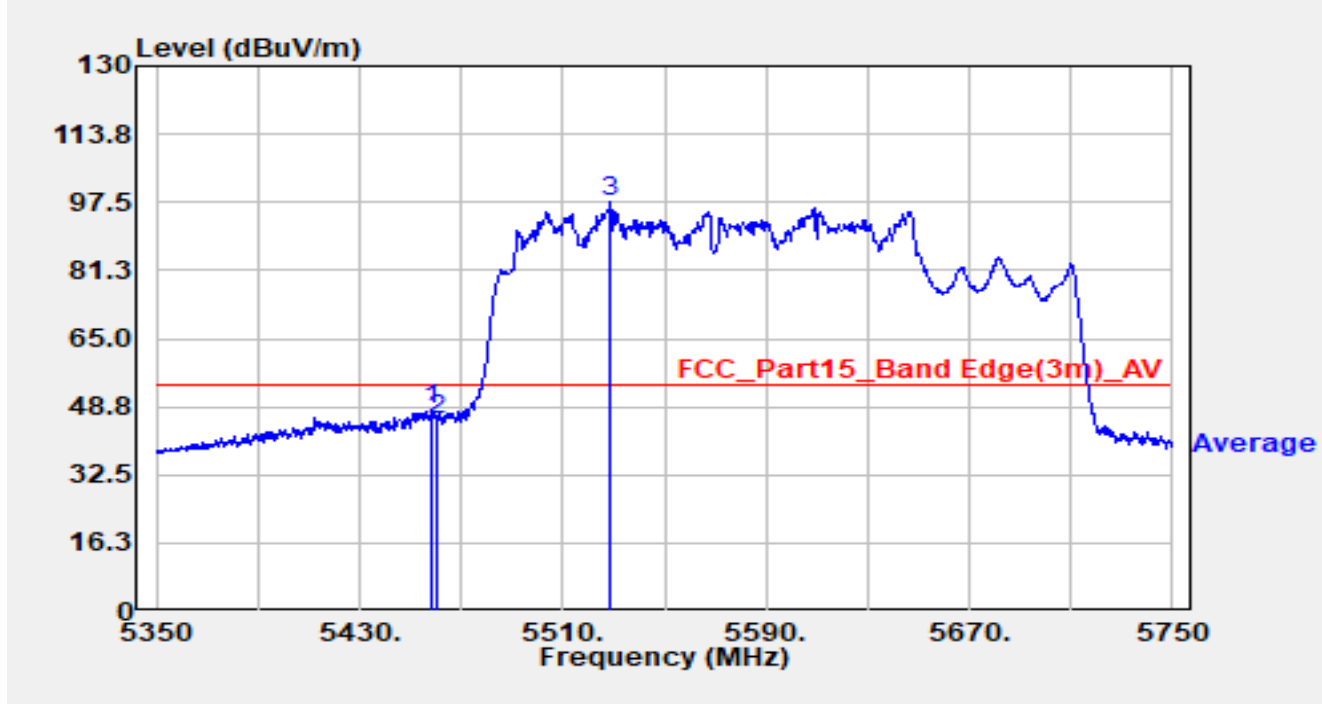


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5458.800	51.85	-4.00	47.85	-6.15	54.00	Average
2		5460.000	49.73	-3.86	45.86	-8.14	54.00	Average
3		5528.600	52.55	45.31	97.86	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-04
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT160 at 5570MHz		

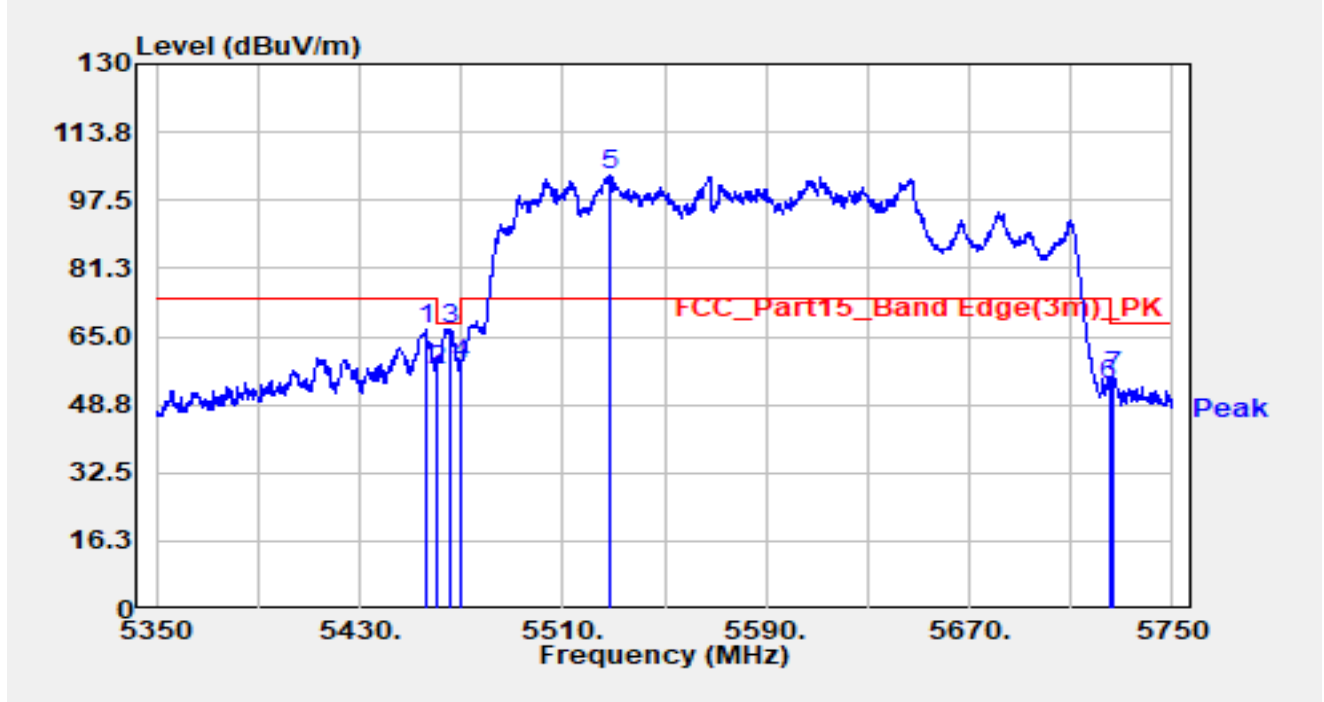


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5456.000	70.65	-4.17	66.48	-7.52	74.00	Peak
2		5460.000	60.57	-3.86	56.70	-11.50	68.20	Peak
3	*	5466.000	70.09	-3.21	66.88	-1.32	68.20	Peak
4		5470.000	60.45	-2.10	58.35	-9.85	68.20	Peak
5		5528.200	58.78	44.66	103.44	N/A	N/A	Peak
6		5725.000	55.63	-2.12	53.51	-14.69	68.20	Peak
7		5726.200	58.31	-2.74	55.58	-12.62	68.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-04
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ac-VHT160 at 5570MHz		

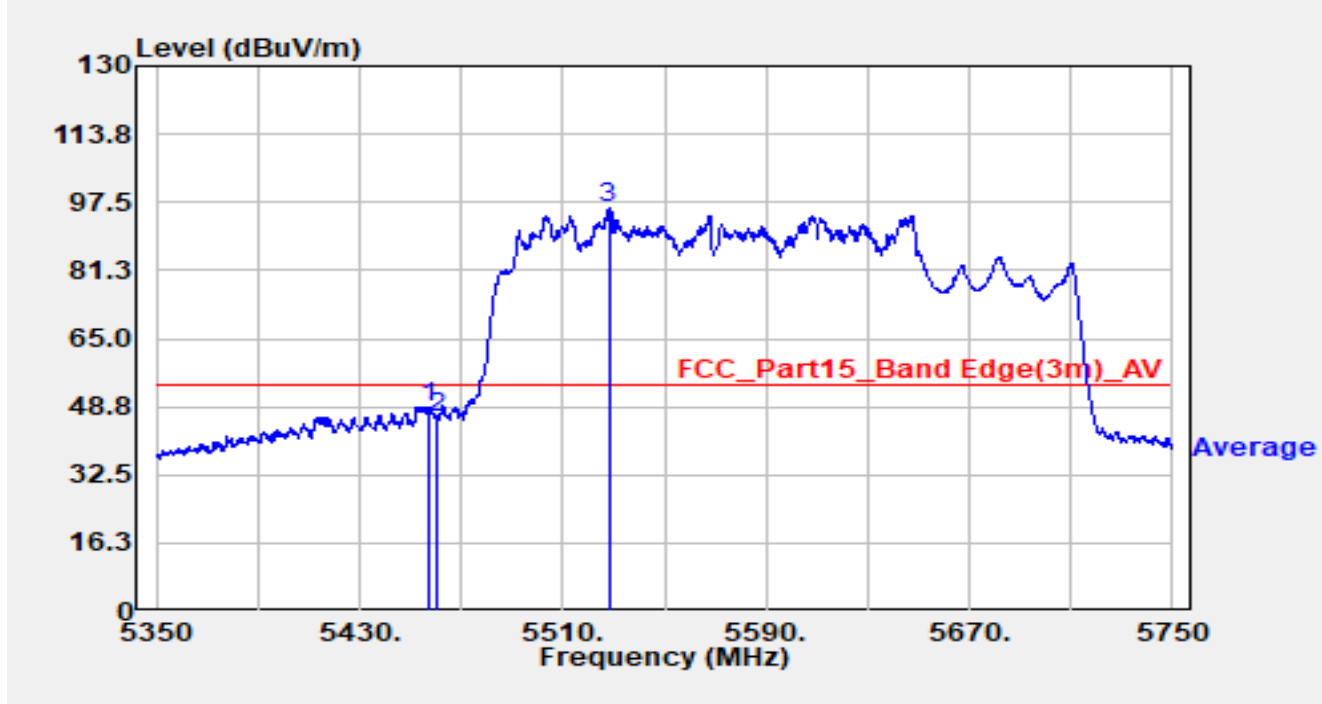


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5457.400	52.90	-4.10	48.80	-5.20	54.00	Average
2		5460.000	50.05	-3.86	46.18	-7.82	54.00	Average
3		5528.000	51.81	44.30	96.11	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2024-07-02
Test Engineer	Oliver Cheng	Temp./Humidity	24.3°C/65.2%
Factor	BBHA 9120D_02042_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5180MHz		

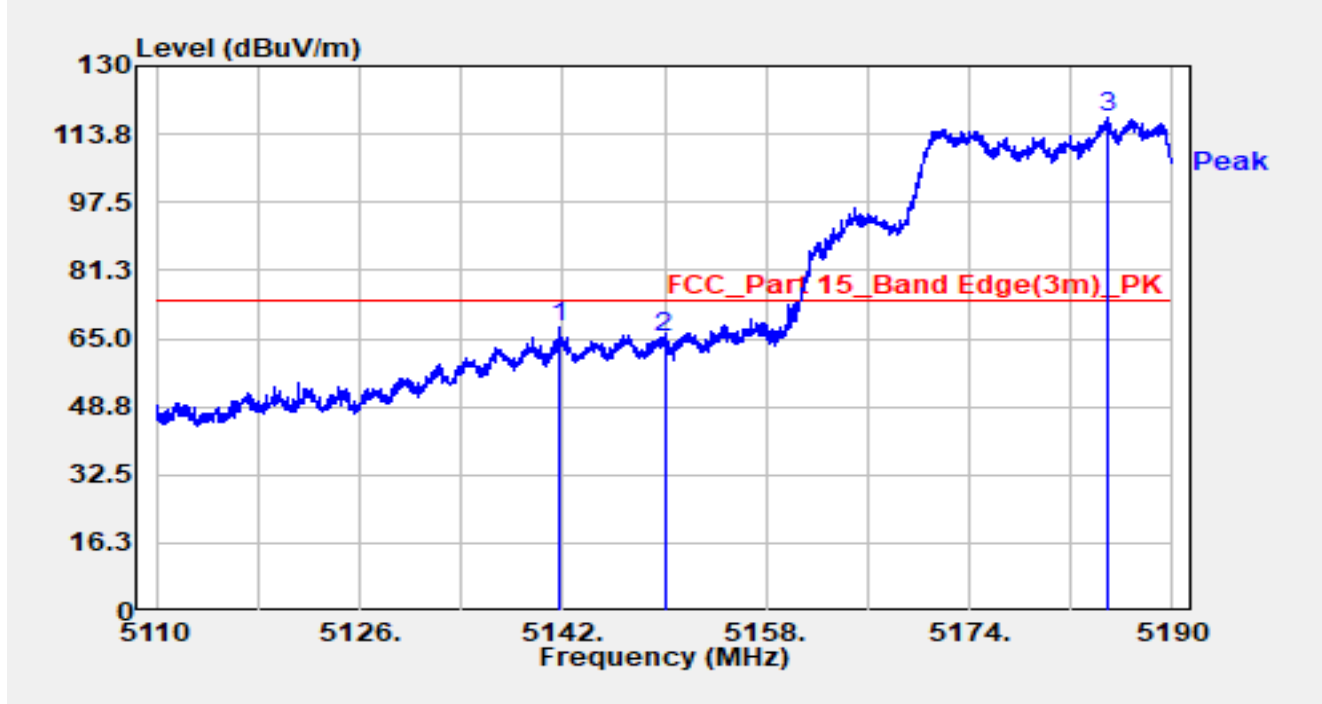


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5141.800	70.37	-2.80	67.58	-6.42	74.00	Peak
2		5150.000	66.79	-1.72	65.06	-8.94	74.00	Peak
3		5184.800	81.30	36.30	117.60	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2024-07-02
Test Engineer	Oliver Cheng	Temp./Humidity	24.3°C/65.2%
Factor	BBHA 9120D_02042_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5180MHz		

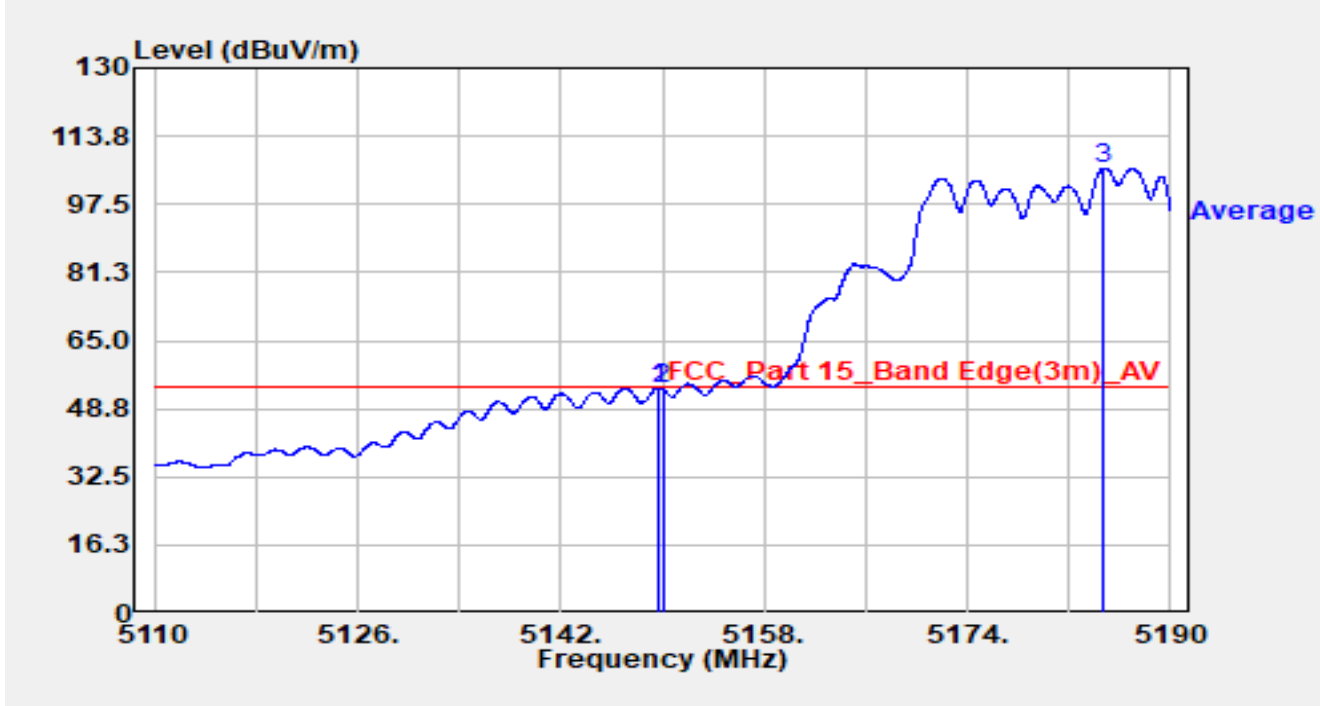


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.640	55.47	-1.79	53.69	-0.31	54.00	Average
2		5150.000	55.18	-1.72	53.45	-0.55	54.00	Average
3		5184.760	69.85	36.32	106.17	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2024-07-02
Test Engineer	Oliver Cheng	Temp./Humidity	24.3°C/65.2%
Factor	BBHA 9120D_02042_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5180MHz		

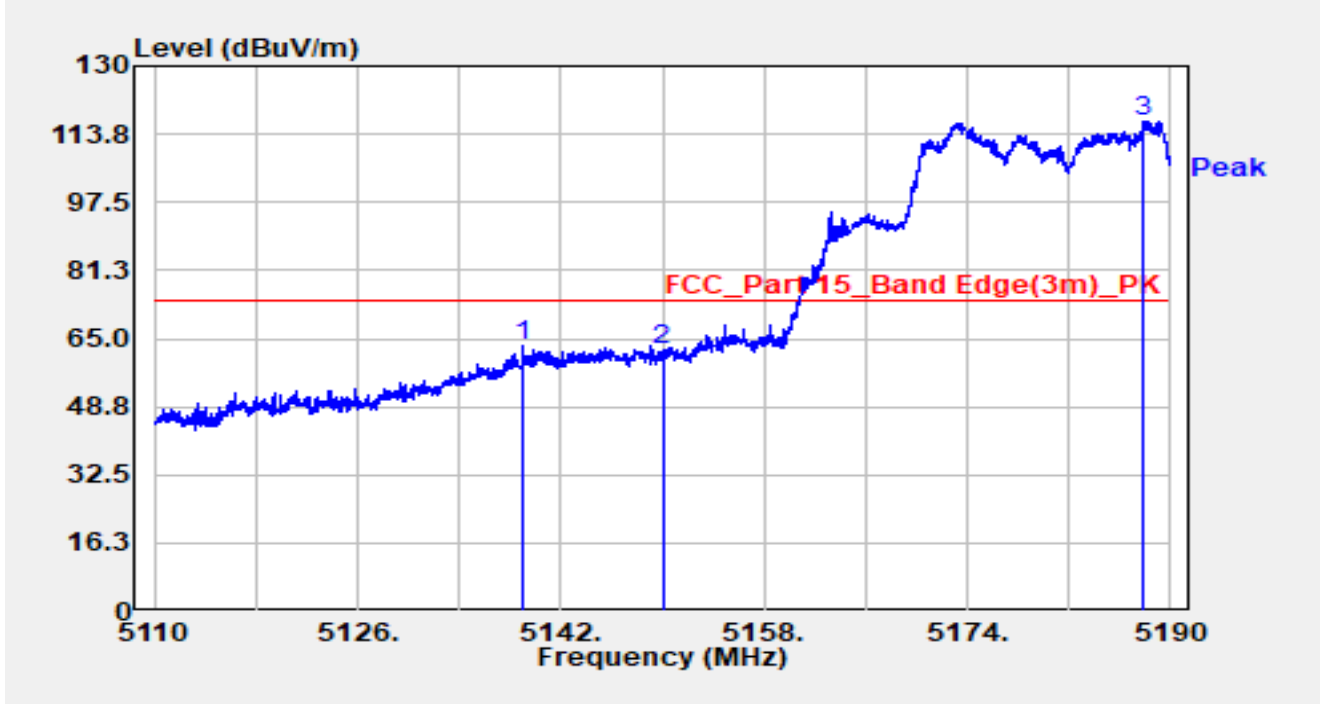


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5139.040	66.67	-3.19	63.48	-10.52	74.00	Peak
2		5150.000	64.09	-1.72	62.37	-11.63	74.00	Peak
3		5187.880	78.62	38.32	116.93	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2024-07-02
Test Engineer	Oliver Cheng	Temp./Humidity	24.3°C/65.2%
Factor	BBHA 9120D_02042_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5180MHz		

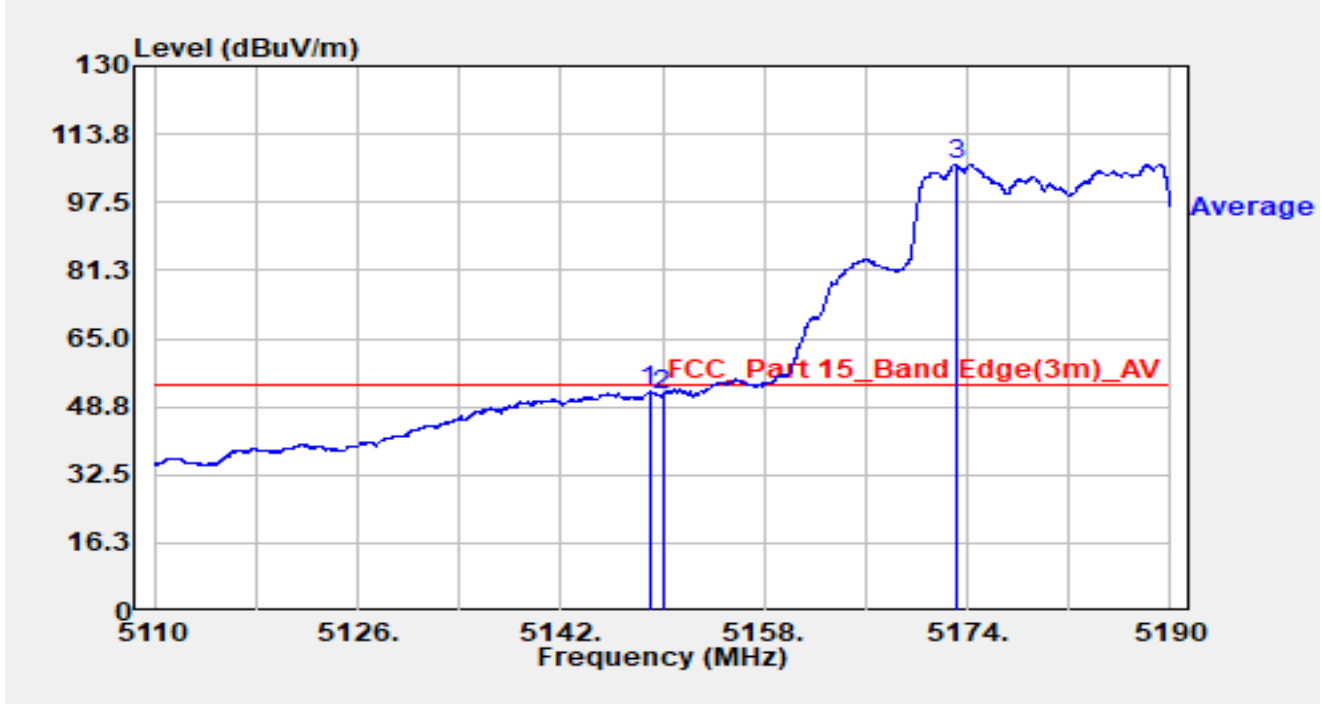


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5148.960	54.21	-1.92	52.29	-1.71	54.00	Average
2		5150.000	53.20	-1.72	51.48	-2.52	54.00	Average
3		5173.120	58.90	47.50	106.40	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2024-07-02
Test Engineer	Oliver Cheng	Temp./Humidity	24.3°C/65.2%
Factor	BBHA 9120D_02042_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5320MHz		

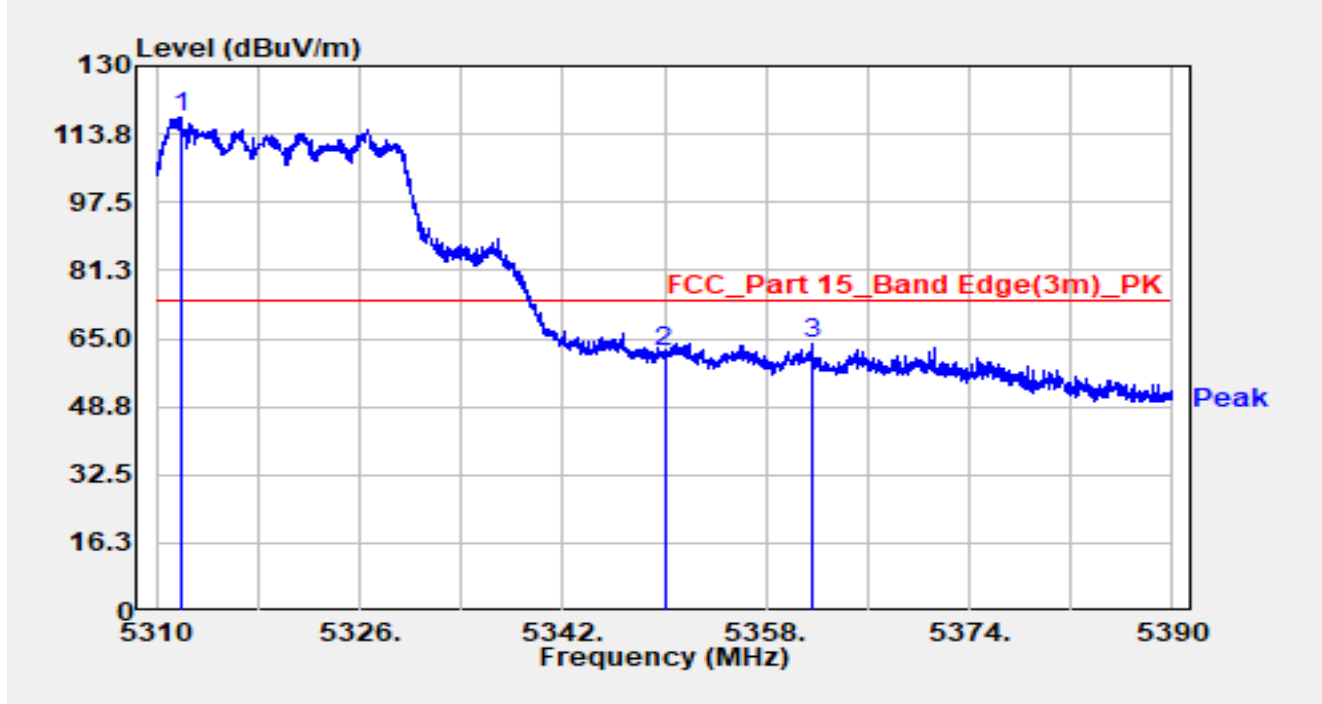


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5311.960	72.07	45.79	117.85	N/A	N/A	Peak
2		5350.000	62.86	-0.87	61.99	-12.01	74.00	Peak
3	*	5361.560	67.26	-3.26	64.00	-10.00	74.00	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2024-07-02
Test Engineer	Oliver Cheng	Temp./Humidity	24.3°C/65.2%
Factor	BBHA 9120D_02042_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5320MHz		

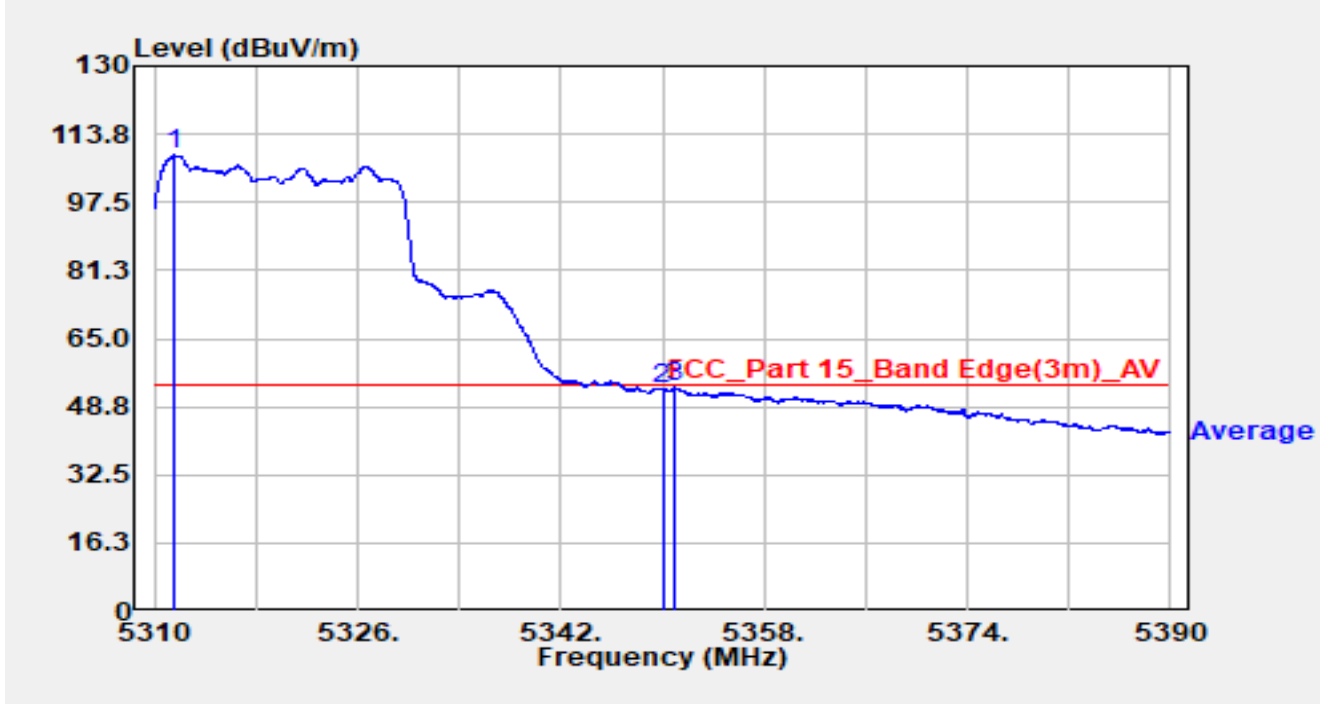


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5311.480	63.94	44.91	108.85	N/A	N/A	Average
2		5350.000	53.76	-0.87	52.89	-1.11	54.00	Average
3	*	5351.000	54.56	-1.33	53.23	-0.77	54.00	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2024-07-02
Test Engineer	Oliver Cheng	Temp./Humidity	24.3°C/65.2%
Factor	BBHA 9120D_02042_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5320MHz		

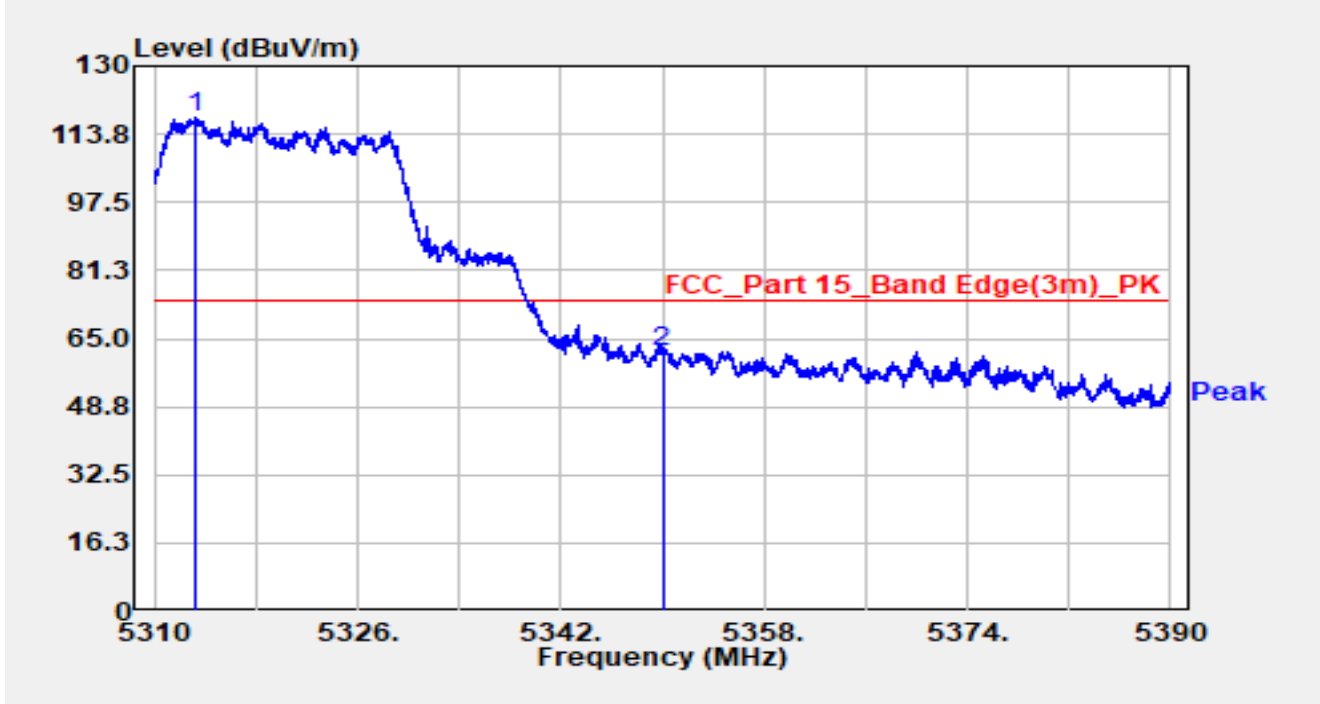


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5313.240	69.98	47.52	117.50	N/A	N/A	Peak
2	*	5350.000	62.65	-0.87	61.77	-12.23	74.00	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2024-07-02
Test Engineer	Oliver Cheng	Temp./Humidity	24.3°C/65.2%
Factor	BBHA 9120D_02042_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5320MHz		

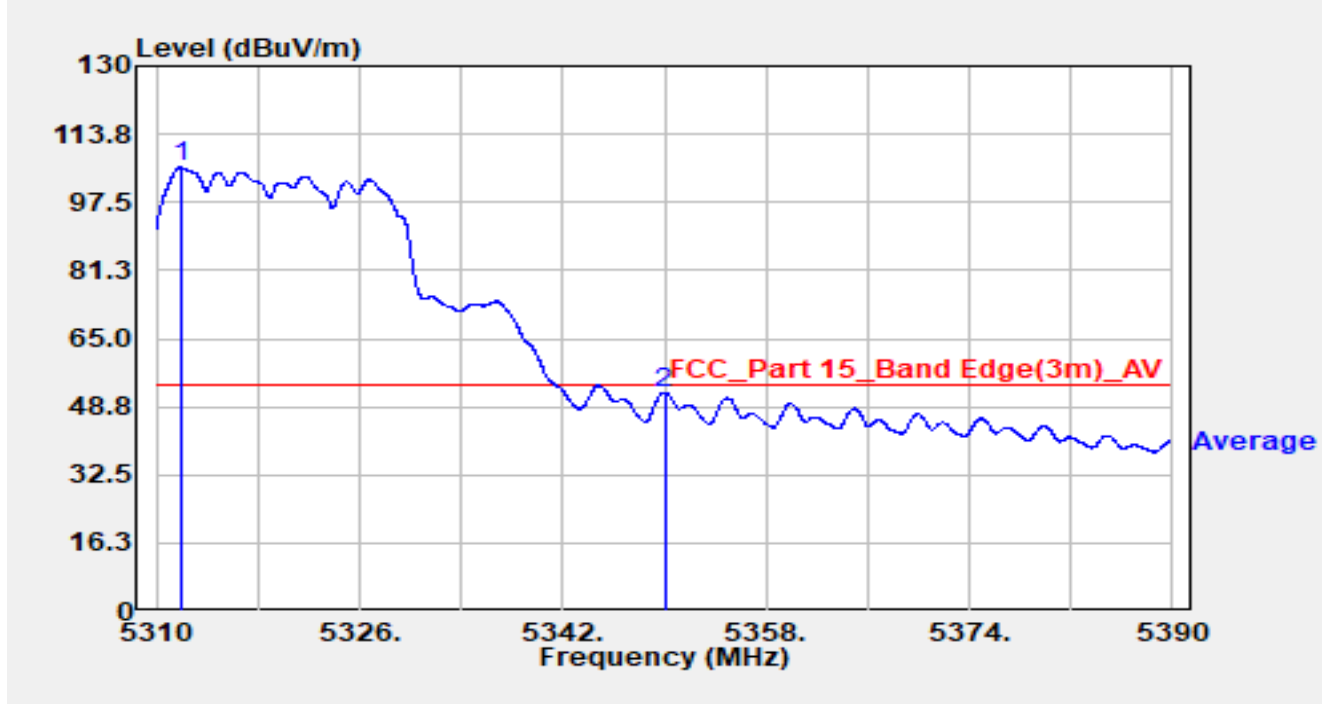


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5311.880	60.12	45.64	105.76	N/A	N/A	Average
2	*	5350.000	53.03	-0.87	52.16	-1.84	54.00	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-04
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5500MHz		

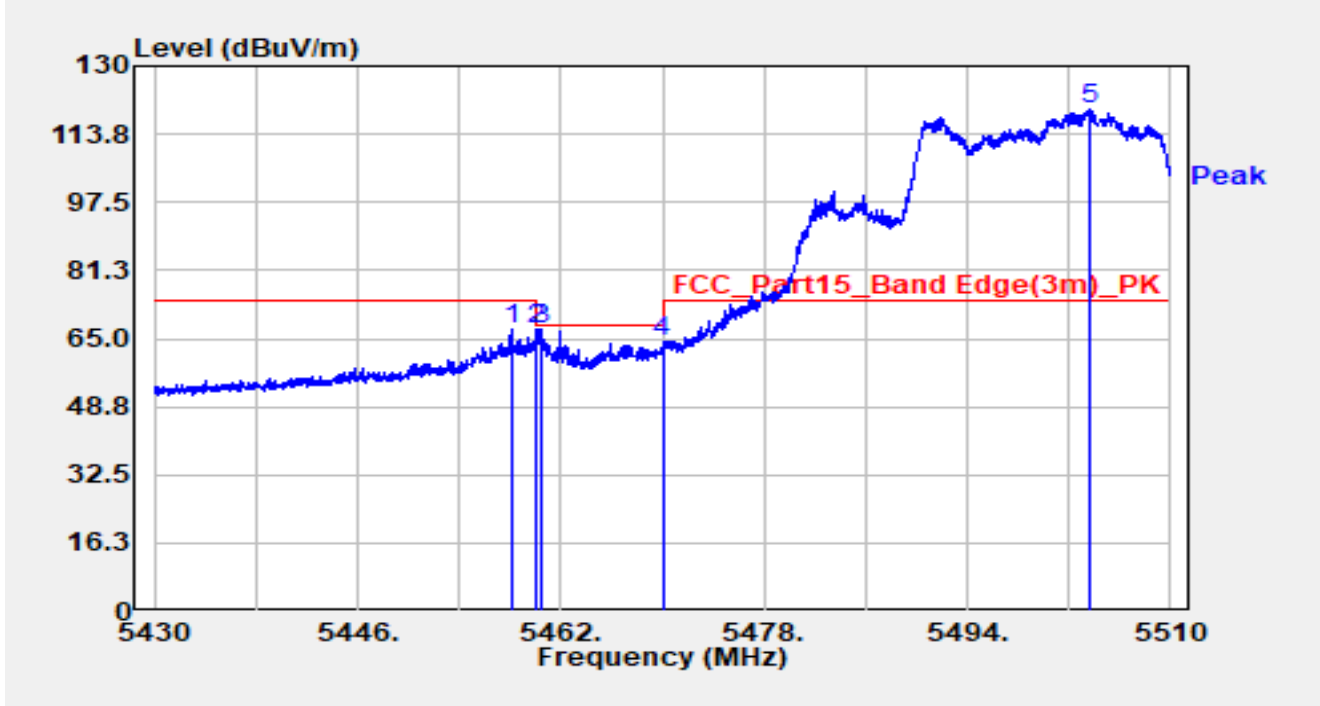


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5458.080	71.08	-4.02	67.06	-6.94	74.00	Peak
2		5460.000	70.88	-3.86	67.01	-1.19	68.20	Peak
3	*	5460.560	71.05	-3.88	67.17	-1.03	68.20	Peak
4		5470.000	66.17	-2.10	64.07	-4.13	68.20	Peak
5		5503.560	77.09	42.59	119.67	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-04
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5500MHz		

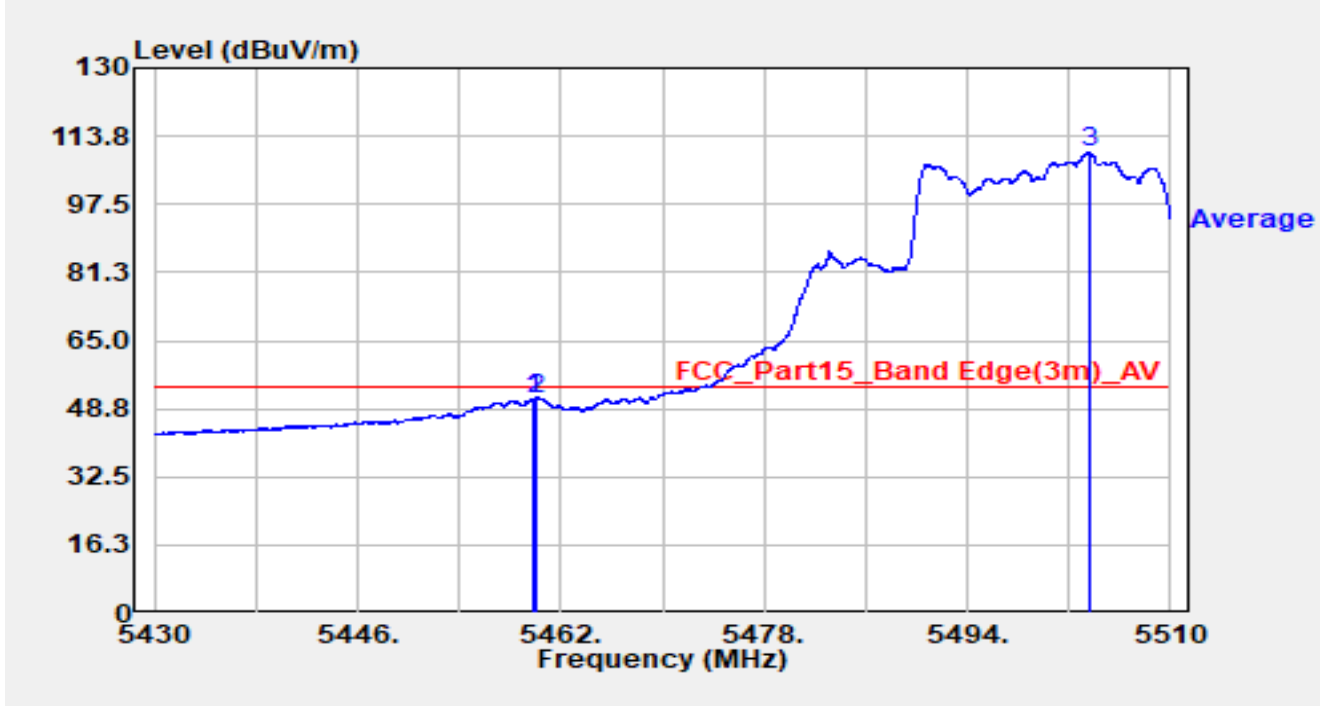


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5459.800	55.08	-3.89	51.19	-2.81	54.00	Average
2		5460.000	54.76	-3.86	50.89	-3.11	54.00	Average
3		5503.600	67.25	42.65	109.90	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-04
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5500MHz		

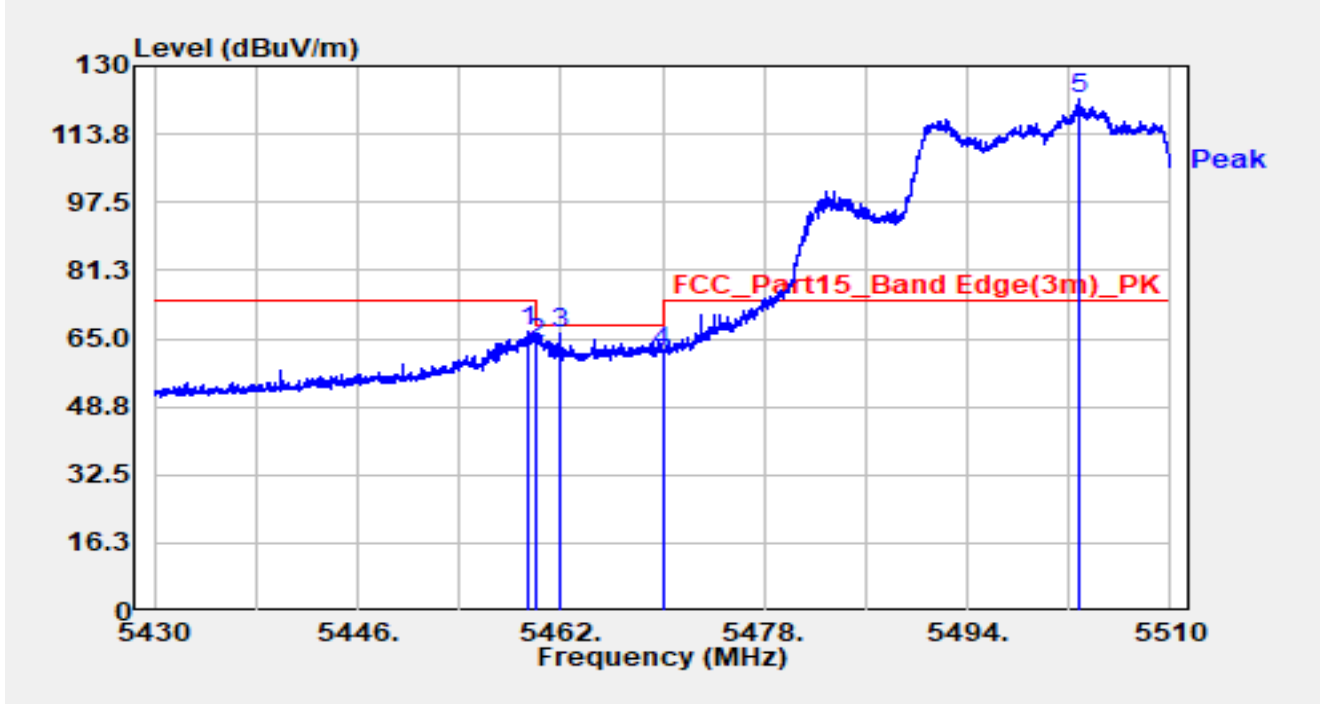


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5459.360	70.83	-3.95	66.88	-7.12	74.00	Peak
2		5460.000	67.88	-3.86	64.01	-4.19	68.20	Peak
3	*	5461.840	69.94	-3.75	66.19	-2.01	68.20	Peak
4		5470.000	63.73	-2.10	61.63	-6.57	68.20	Peak
5		5502.800	80.83	41.14	121.97	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-04
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5500MHz		

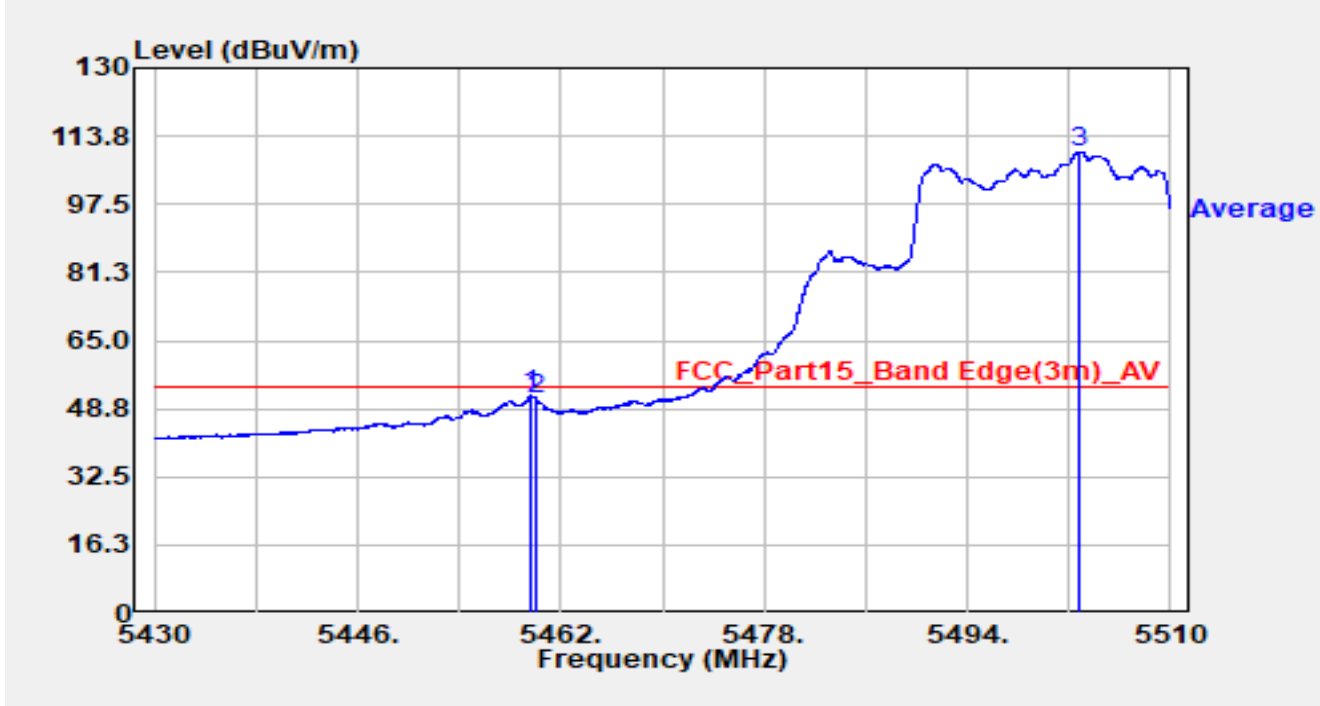


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5459.680	55.80	-3.91	51.89	-2.11	54.00	Average
2		5460.000	54.76	-3.86	50.90	-3.10	54.00	Average
3		5502.800	68.83	41.14	109.97	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-04
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5700MHz		

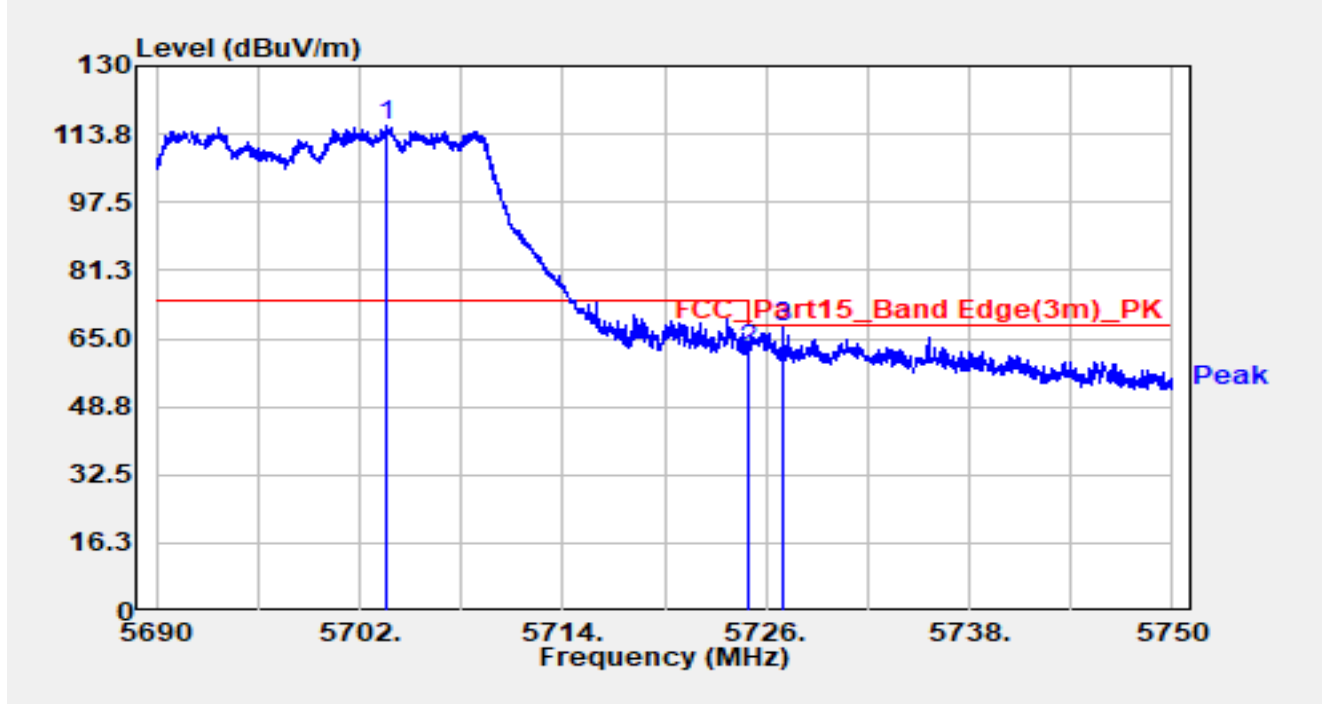


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5703.590	77.92	37.70	115.62	N/A	N/A	Peak
2		5725.000	64.23	-2.12	62.12	-6.08	68.20	Peak
3	*	5726.960	70.85	-3.06	67.79	-0.41	68.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-11
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5700MHz		

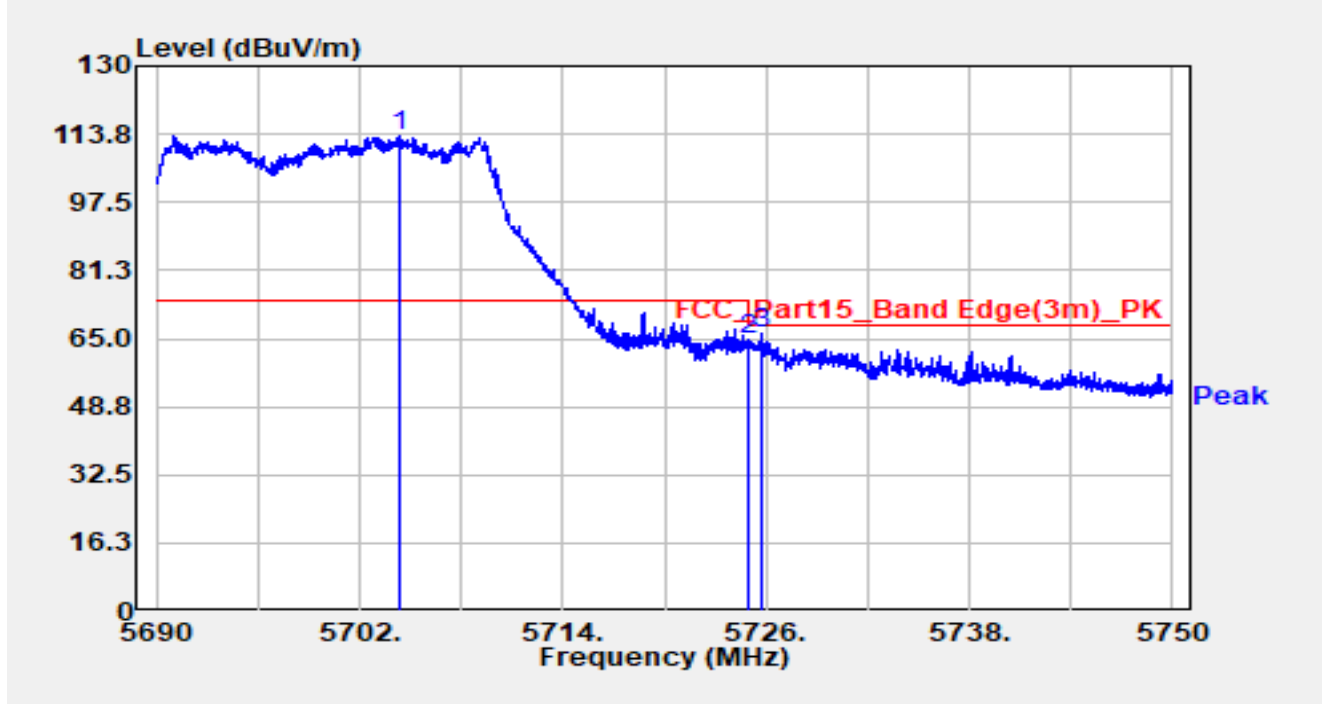


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5704.400	75.23	37.97	113.21	N/A	N/A	Peak
2		5725.000	66.69	-2.12	64.57	-3.63	68.20	Peak
3	*	5725.790	68.85	-2.55	66.30	-1.90	68.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - Preamplifier(dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-05
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5745MHz		

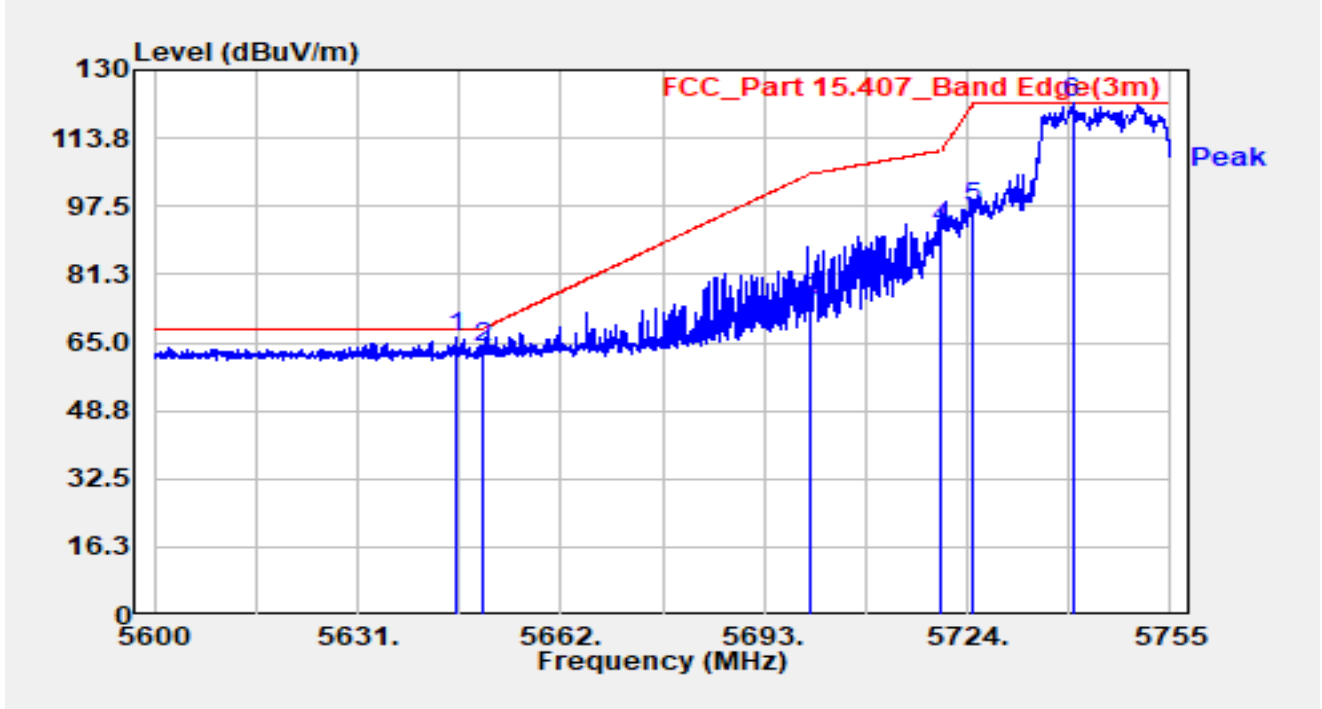


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5645.880	73.18	-7.17	66.01	-2.19	68.20	Peak
2		5650.000	70.94	-7.14	63.80	-4.40	68.20	Peak
3		5700.000	81.60	-7.06	74.55	-30.65	105.20	Peak
4		5720.000	99.37	-7.20	92.17	-18.63	110.80	Peak
5		5725.000	104.36	-7.22	97.14	-25.06	122.20	Peak
6		5740.042	129.35	-7.38	121.97	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-05
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5745MHz		

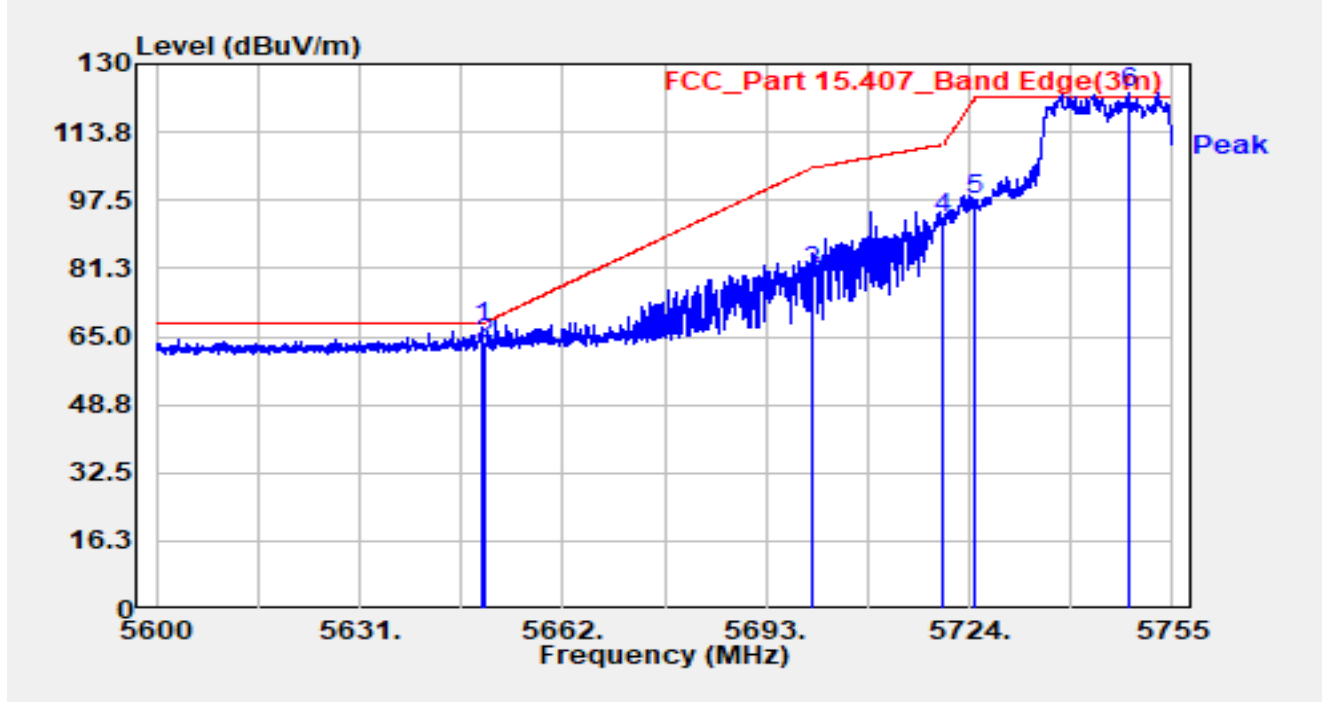


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5649.522	74.34	-7.14	67.20	-1.00	68.20	Peak
2		5650.000	70.58	-7.14	63.44	-4.76	68.20	Peak
3		5700.000	87.34	-7.06	80.28	-24.92	105.20	Peak
4		5720.000	100.26	-7.20	93.07	-17.73	110.80	Peak
5		5725.000	104.65	-7.22	97.44	-24.76	122.20	Peak
6		5748.413	130.58	-7.35	123.23	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-05
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5825MHz		

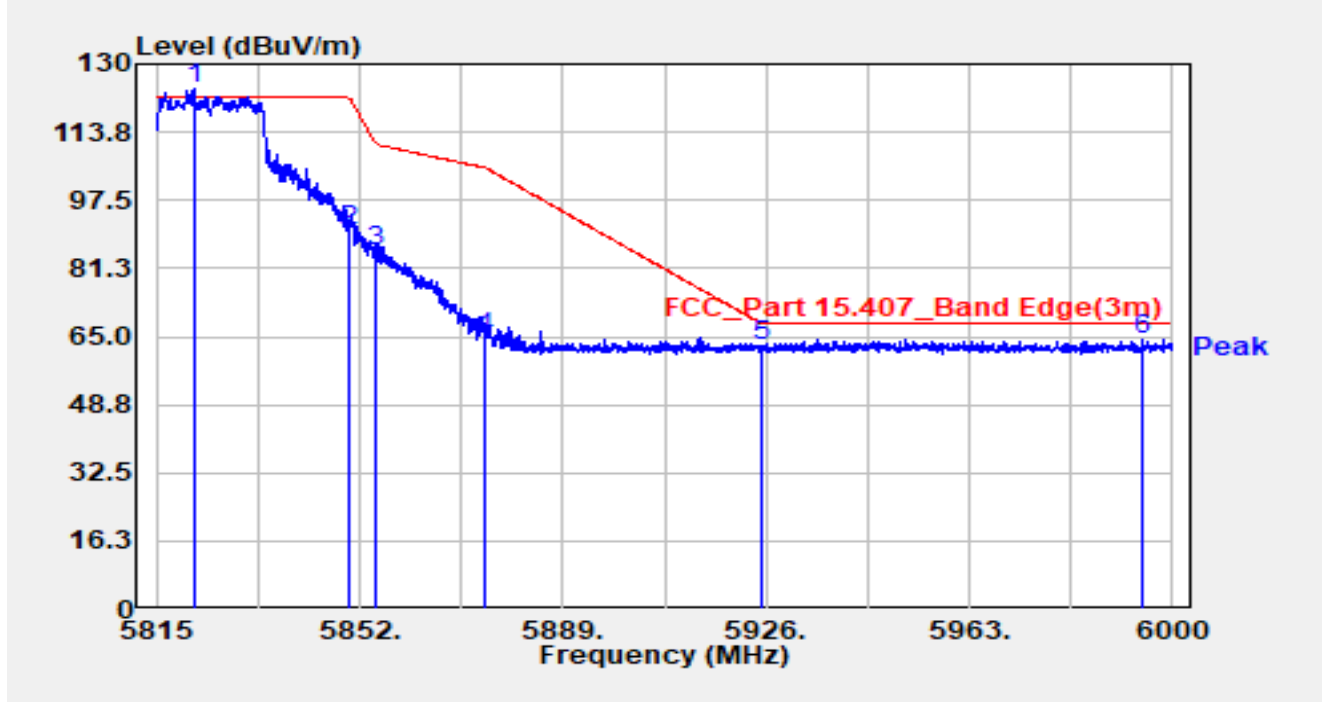


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5821.752	130.93	-7.04	123.90	N/A	N/A	Peak
2		5850.000	97.18	-7.06	90.12	-32.08	122.20	Peak
3		5855.000	92.51	-7.07	85.44	-25.36	110.80	Peak
4		5875.000	71.72	-7.15	64.57	-40.63	105.20	Peak
5		5925.000	69.67	-7.01	62.66	-5.54	68.20	Peak
6	*	5994.542	71.01	-6.75	64.26	-3.94	68.20	Peak

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-05
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE20 at 5825MHz		

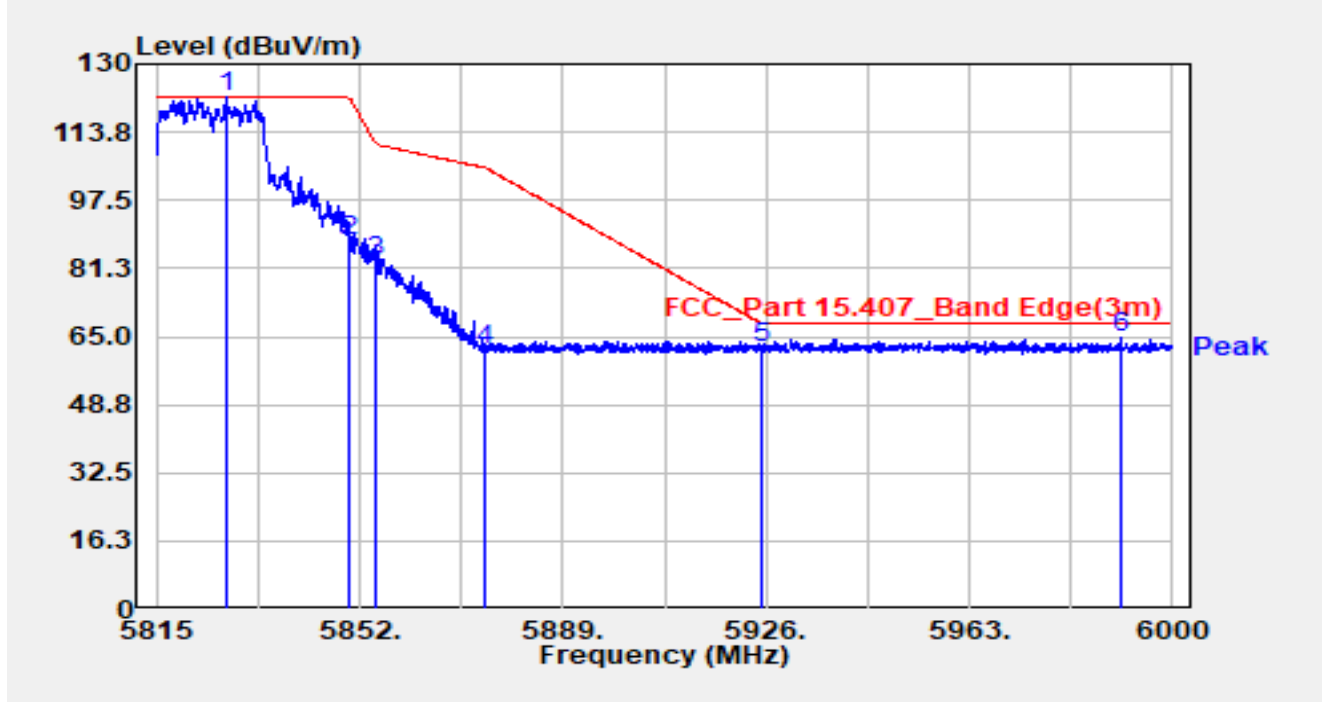


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5827.765	129.31	-7.03	122.28	N/A	N/A	Peak
2		5850.000	95.02	-7.06	87.96	-34.24	122.20	Peak
3		5855.000	89.79	-7.07	82.71	-28.09	110.80	Peak
4		5875.000	68.91	-7.15	61.76	-43.44	105.20	Peak
5		5925.000	69.42	-7.01	62.41	-5.79	68.20	Peak
6	*	5990.473	71.47	-6.82	64.65	-3.55	68.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBuV/m) = Reading(dBuV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2024-07-02
Test Engineer	Oliver Cheng	Temp./Humidity	24.3°C/65.2%
Factor	BBHA 9120D_02042_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5190MHz		

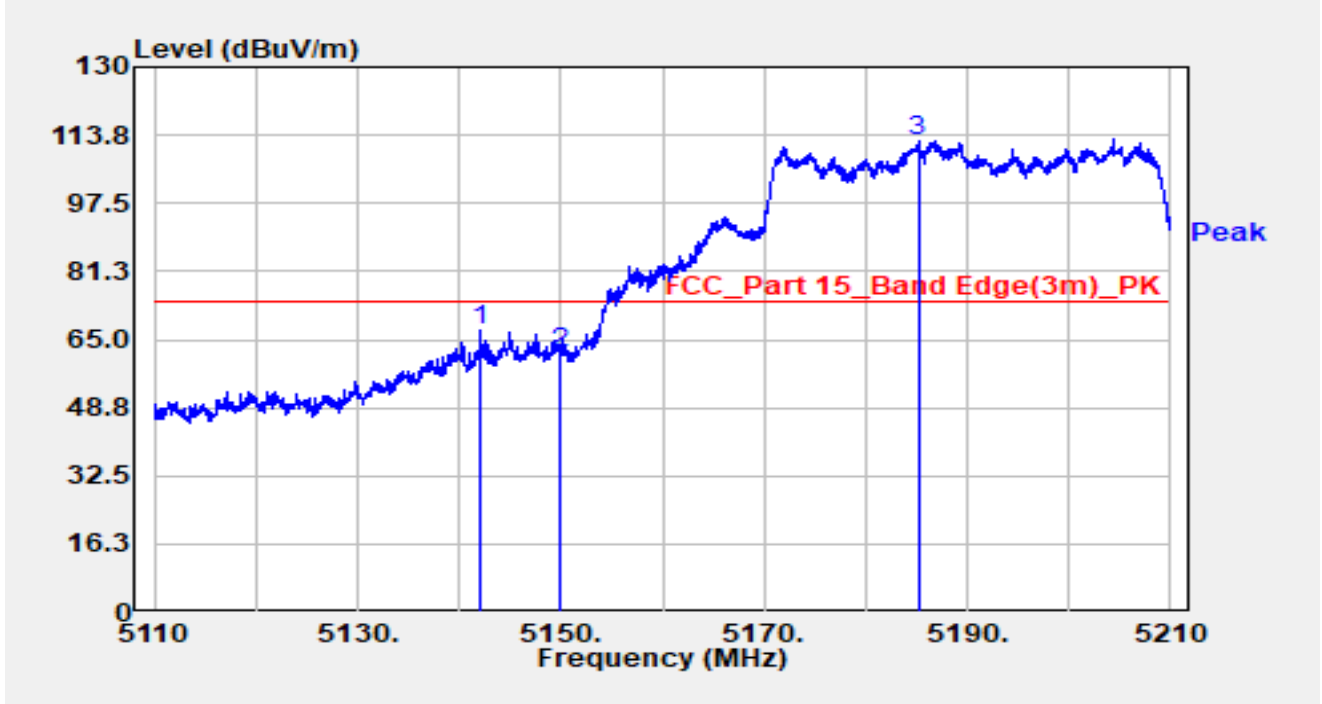


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	5142.150	69.78	-2.80	66.99	-7.01	74.00	Peak
2		5150.000	63.60	-1.72	61.88	-12.12	74.00	Peak
3		5185.150	75.95	36.27	112.21	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2024-07-02
Test Engineer	Oliver Cheng	Temp./Humidity	24.3°C/65.2%
Factor	BBHA 9120D_02042_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5190MHz		

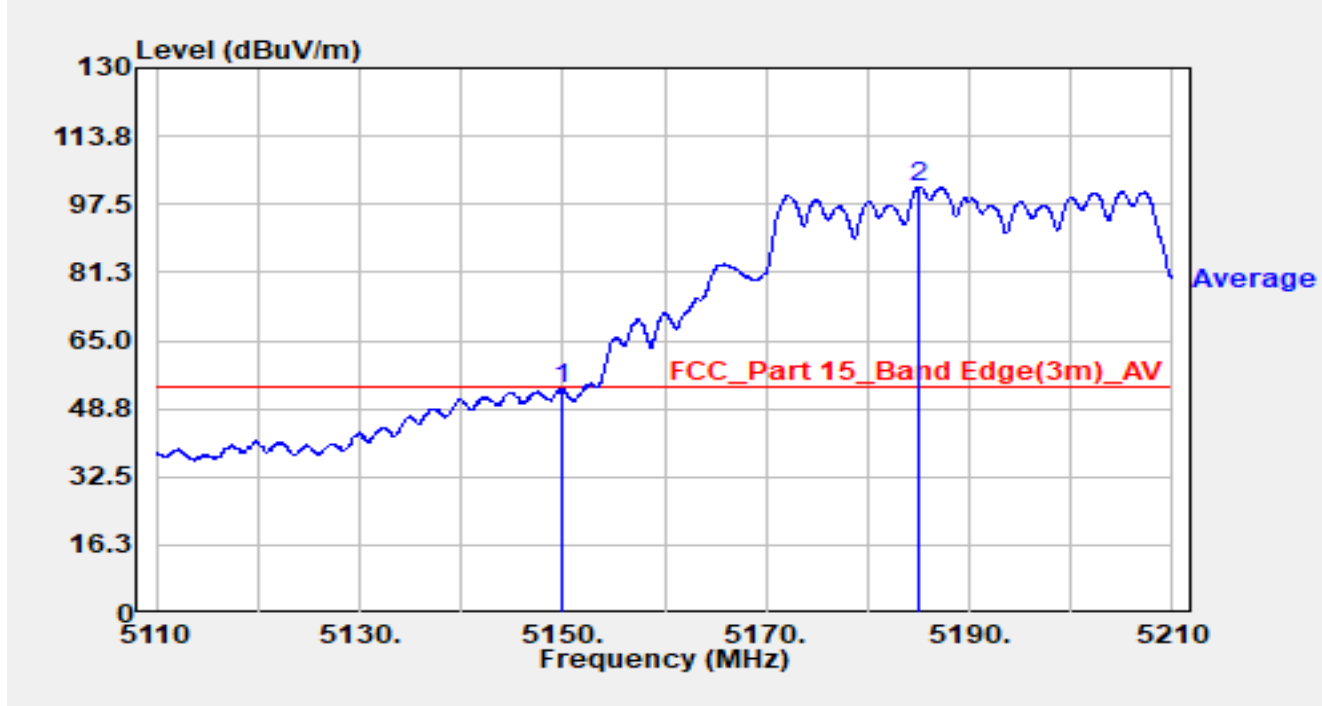


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.000	55.30	-1.72	53.57	-0.43	54.00	Average
2		5185.100	65.51	36.26	101.77	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2024-07-02
Test Engineer	Oliver Cheng	Temp./Humidity	24.3°C/65.2%
Factor	BBHA 9120D_02042_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5190MHz		

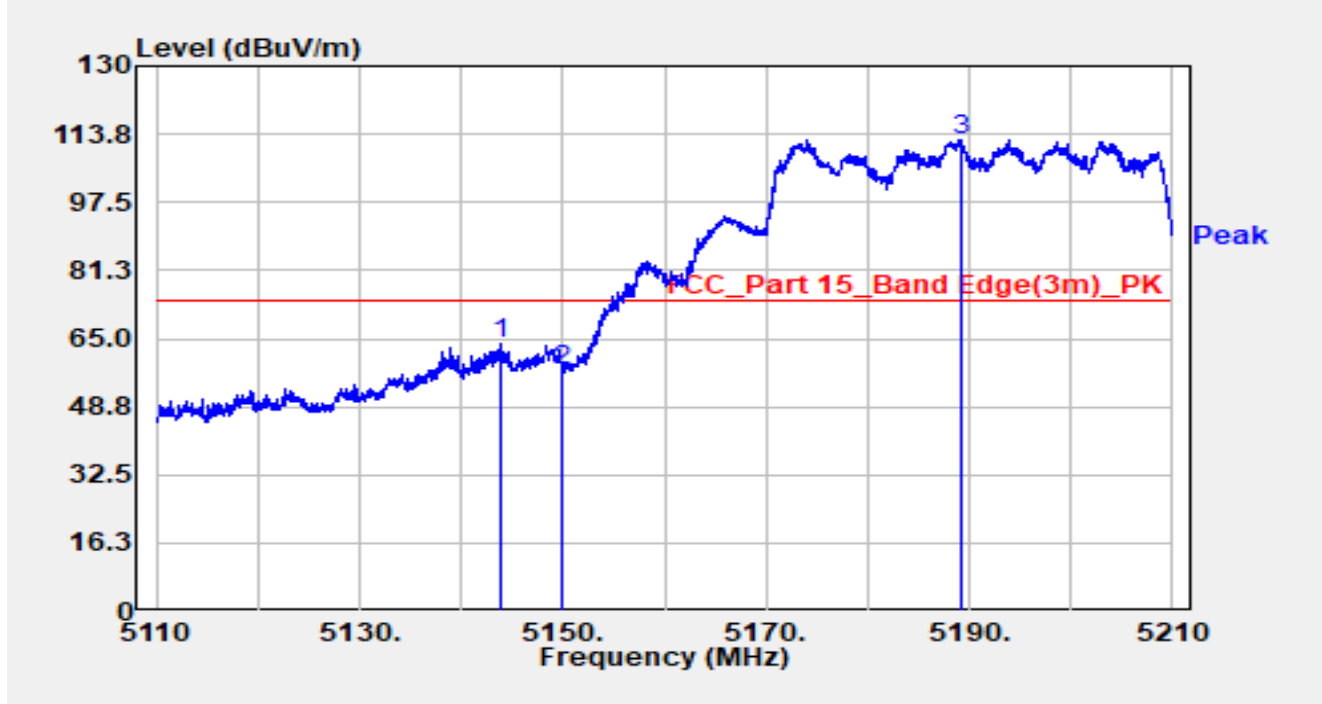


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5143.850	66.64	-2.70	63.94	-10.06	74.00	Peak
2		5150.000	59.26	-1.72	57.53	-16.47	74.00	Peak
3		5189.250	72.14	40.27	112.41	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2024-07-02
Test Engineer	Oliver Cheng	Temp./Humidity	24.3°C/65.2%
Factor	BBHA 9120D_02042_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5190MHz		

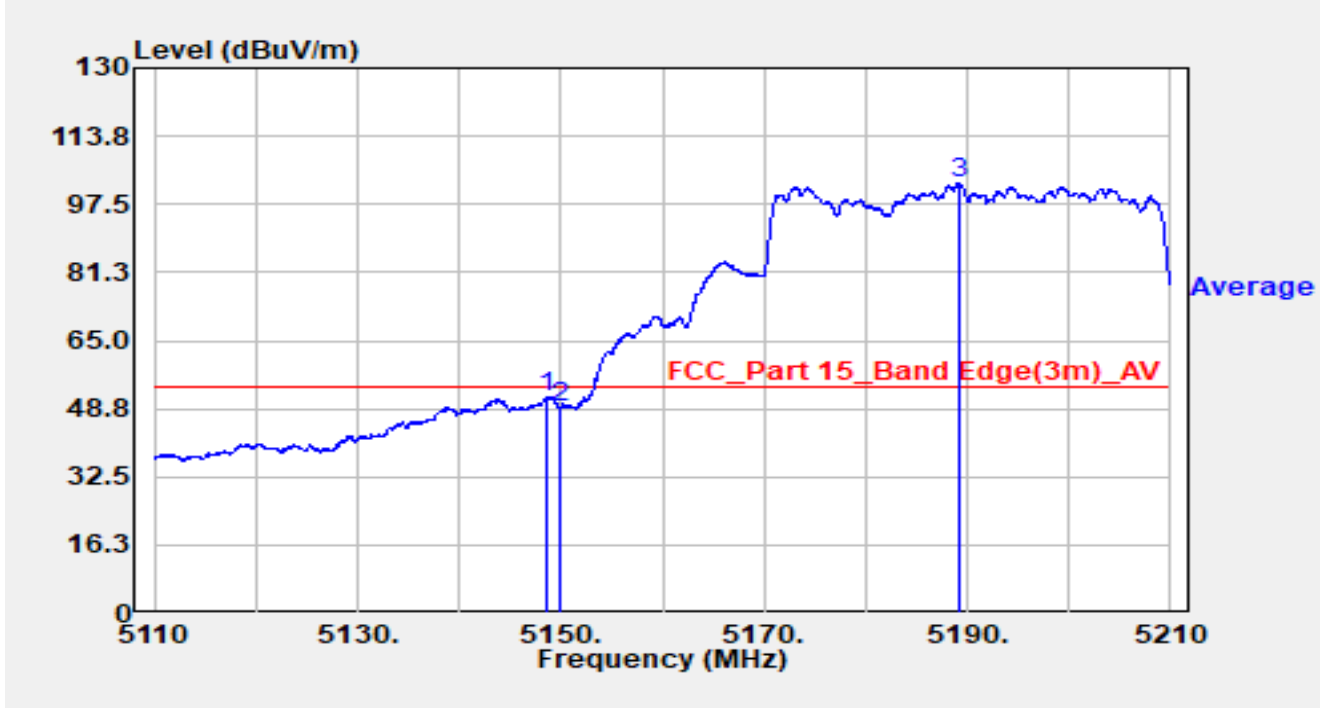


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5148.650	53.54	-1.97	51.57	-2.43	54.00	Average
2		5150.000	50.83	-1.72	49.10	-4.90	54.00	Average
3		5189.150	62.22	40.14	102.36	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2024-07-02
Test Engineer	Oliver Cheng	Temp./Humidity	24.3°C/65.2%
Factor	BBHA 9120D_02042_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5310MHz		

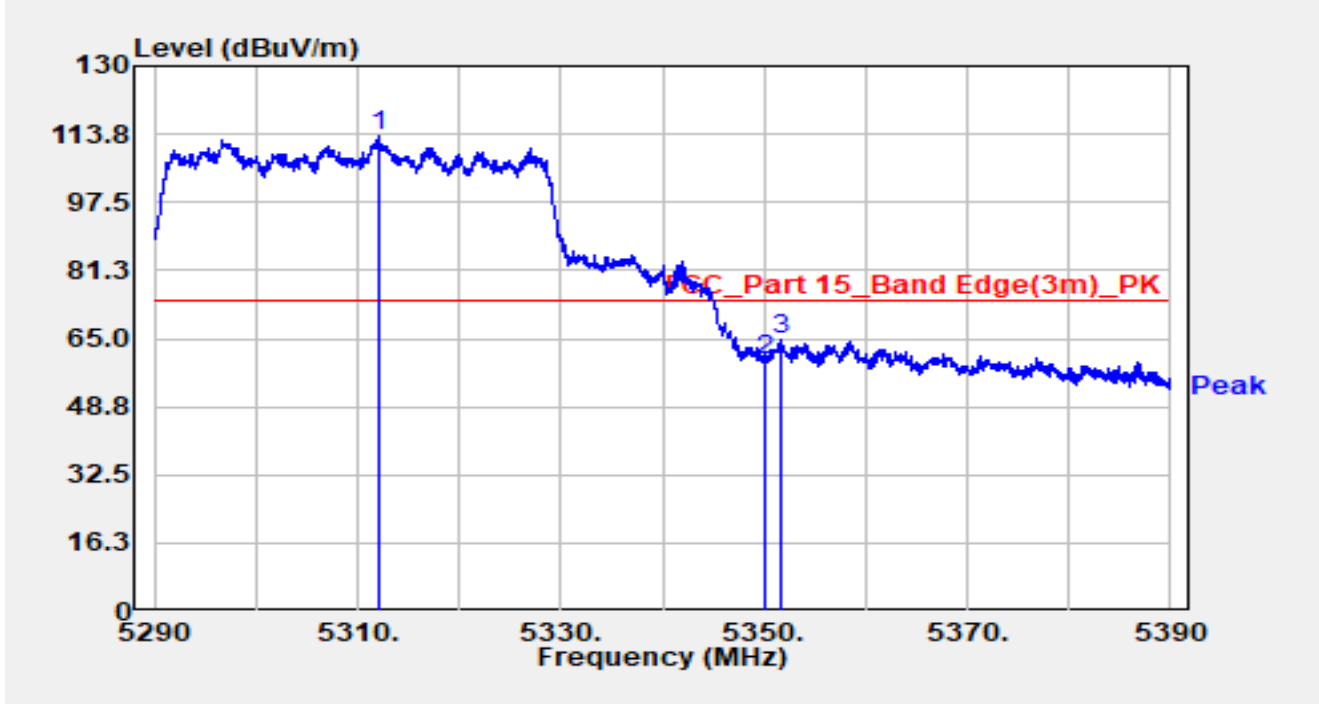


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5312.100	67.13	46.04	113.17	N/A	N/A	Peak
2		5350.000	60.63	-0.87	59.76	-14.24	74.00	Peak
3	*	5351.700	66.11	-1.55	64.56	-9.44	74.00	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2024-07-11
Test Engineer	Oliver Cheng	Temp./Humidity	24.3°C/65.2%
Factor	BBHA 9120D_02042_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5310MHz		

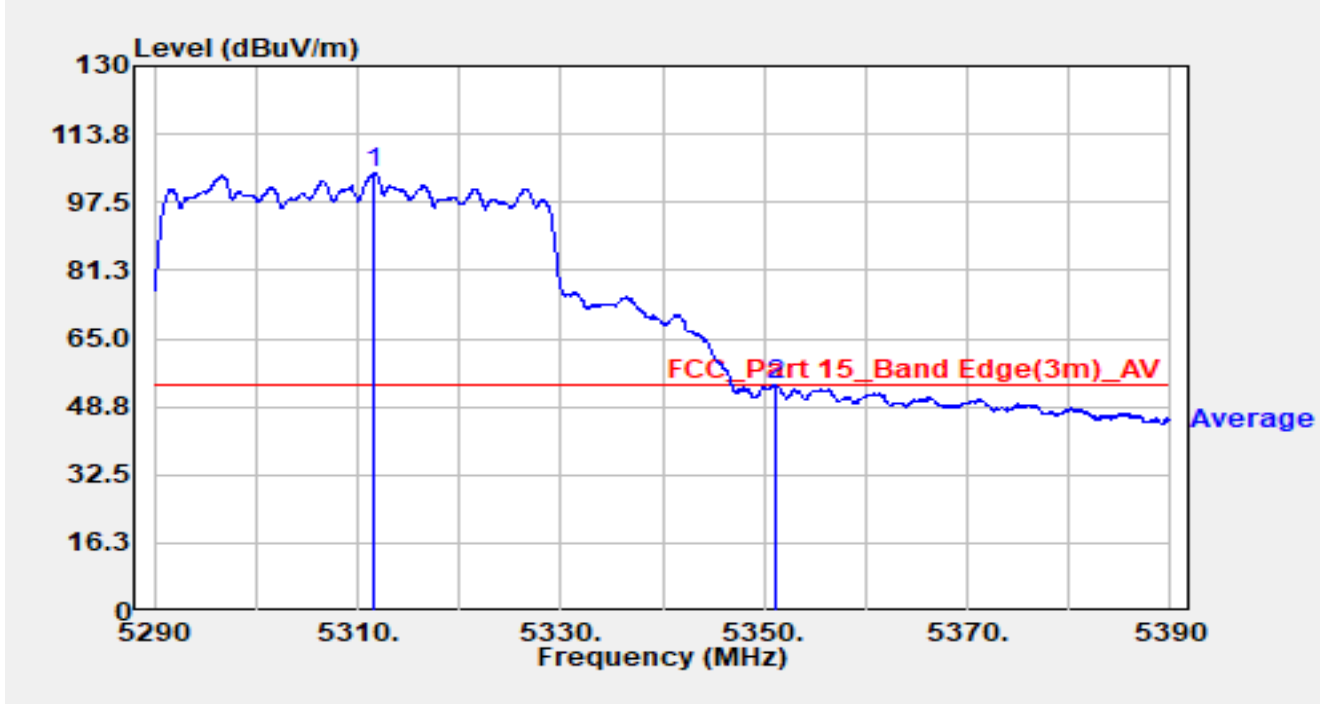


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5311.650	59.16	45.22	104.38	N/A	N/A	Average
2	*	5351.100	55.13	-1.36	53.77	-0.23	54.00	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2024-07-02
Test Engineer	Oliver Cheng	Temp./Humidity	24.3°C/65.2%
Factor	BBHA 9120D_02042_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5310MHz		

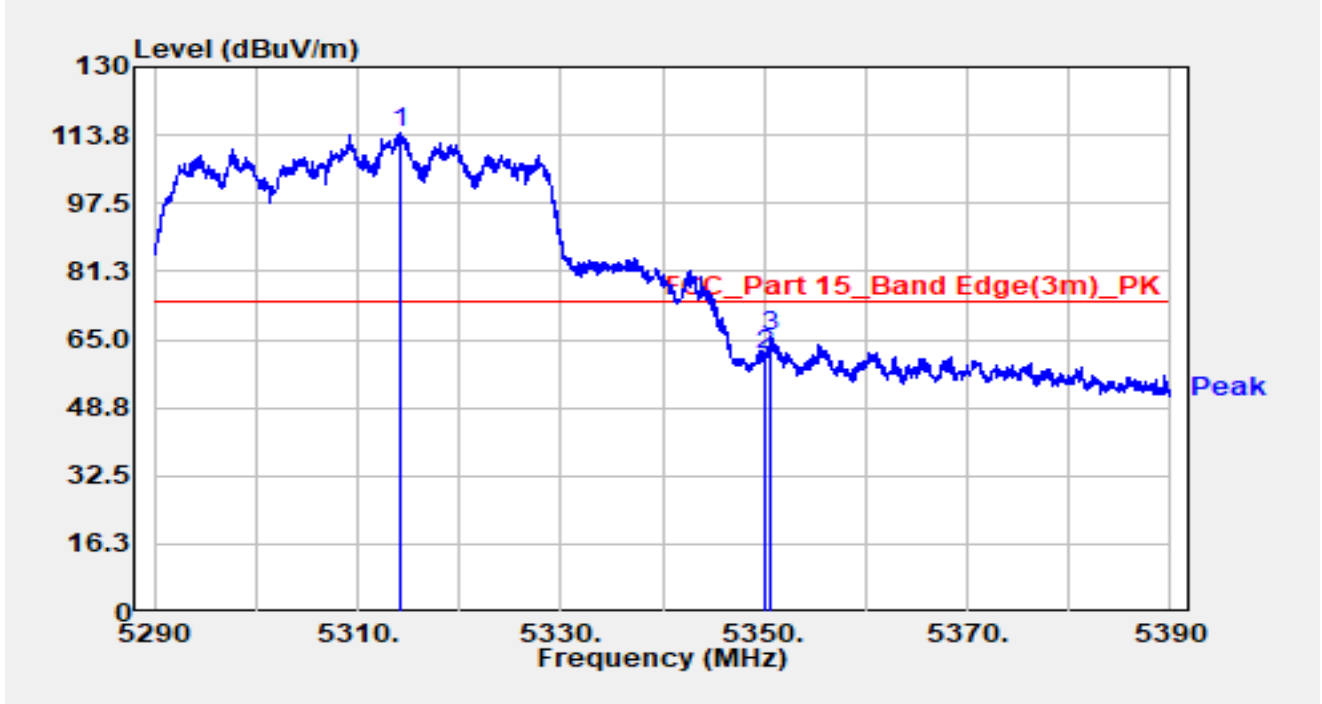


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5314.100	66.74	47.33	114.07	N/A	N/A	Peak
2		5350.000	62.00	-0.87	61.13	-12.87	74.00	Peak
3	*	5350.700	66.93	-1.22	65.71	-8.29	74.00	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2024-07-02
Test Engineer	Oliver Cheng	Temp./Humidity	24.3°C/65.2%
Factor	BBHA 9120D_02042_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5310MHz		

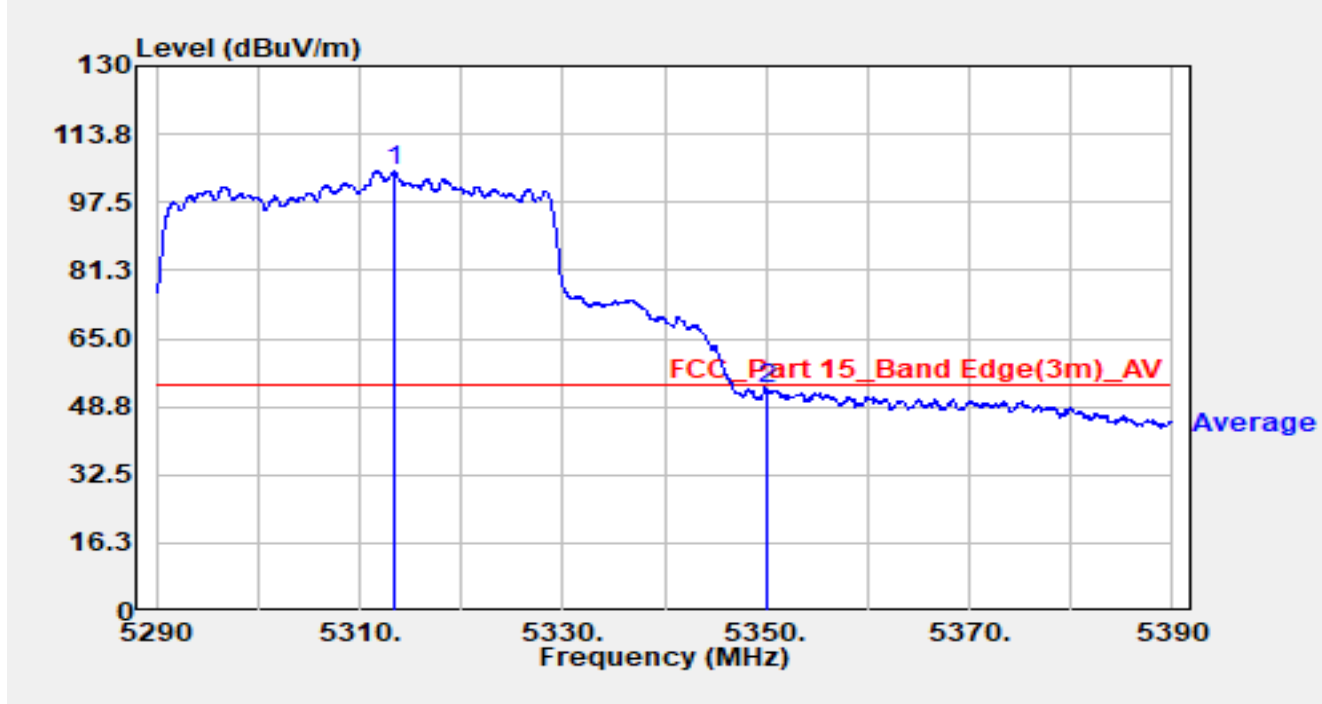


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5313.350	57.34	47.61	104.95	N/A	N/A	Average
2	*	5350.000	53.96	-0.87	53.09	-0.91	54.00	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-04
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5510MHz		

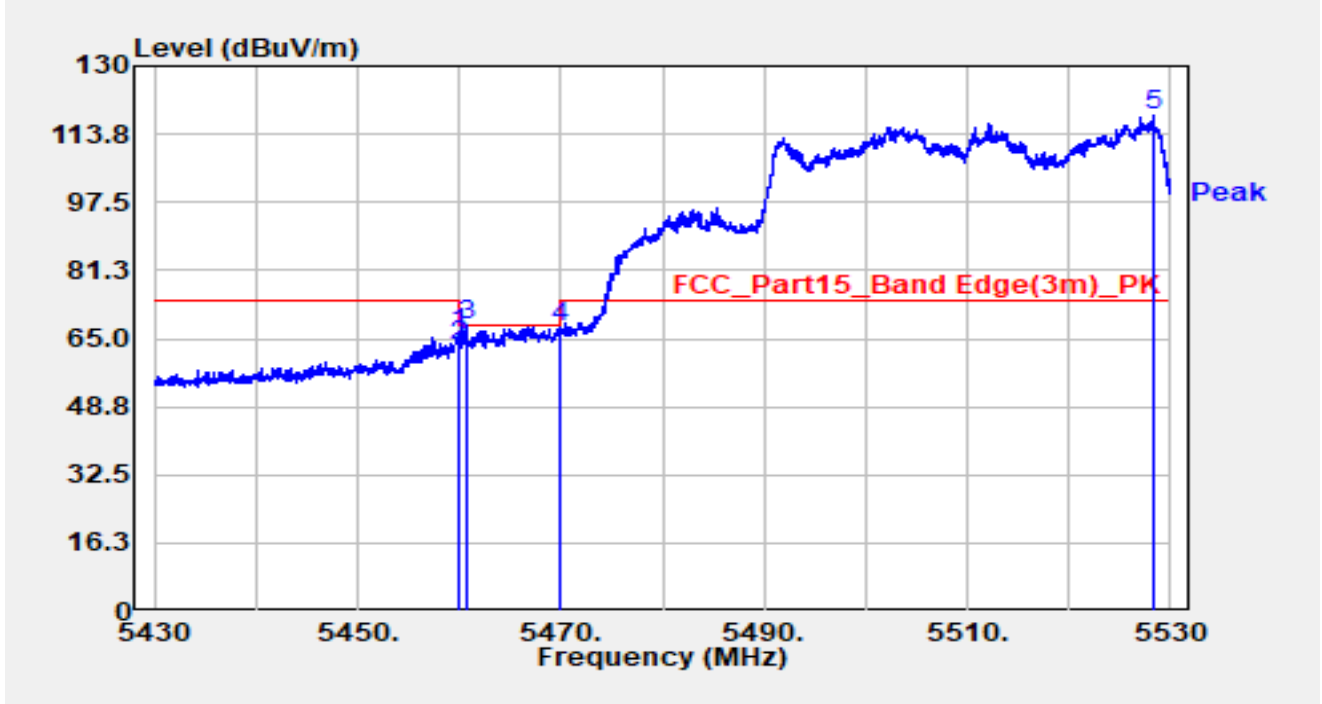


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5459.850	70.01	-3.89	66.12	-7.88	74.00	Peak
2		5460.000	67.19	-3.86	63.32	-4.88	68.20	Peak
3	*	5460.650	71.83	-3.88	67.95	-0.25	68.20	Peak
4		5470.000	69.61	-2.10	67.50	-0.70	68.20	Peak
5		5528.250	73.40	44.75	118.15	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-04
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5510MHz		

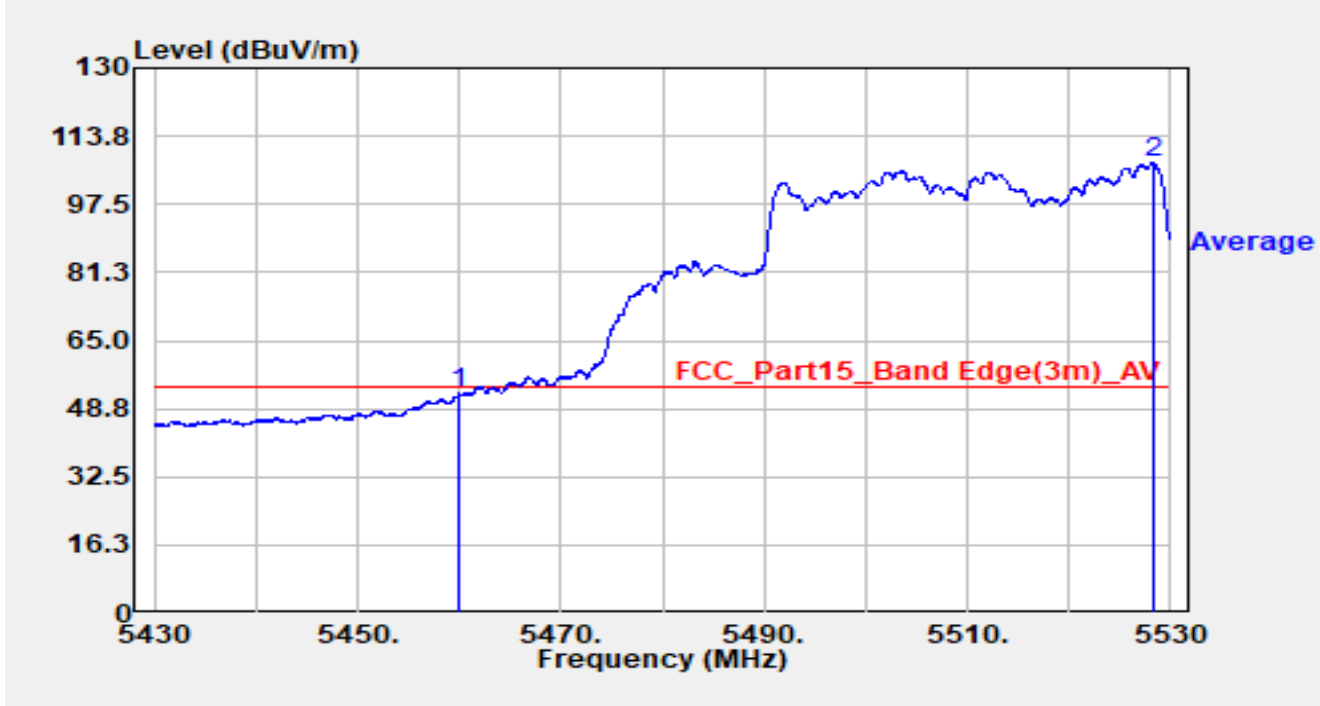


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.000	56.24	-3.86	52.37	-1.63	54.00	Average
2		5528.300	62.40	44.84	107.24	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-04
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5510MHz		

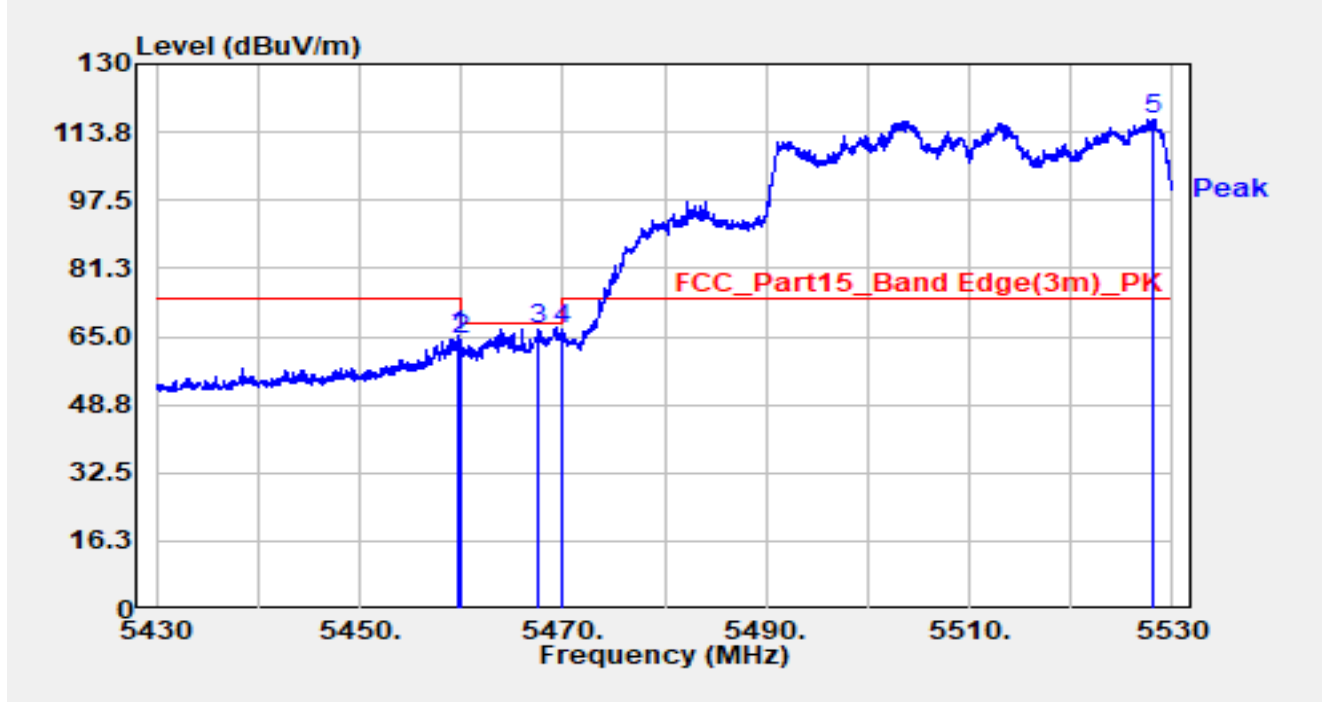


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5459.700	69.02	-3.91	65.11	-8.89	74.00	Peak
2		5460.000	68.30	-3.86	64.43	-3.77	68.20	Peak
3		5467.600	69.64	-2.88	66.76	-1.44	68.20	Peak
4	*	5470.000	69.02	-2.10	66.91	-1.29	68.20	Peak
5		5528.100	72.25	44.48	116.73	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-04
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5510MHz		

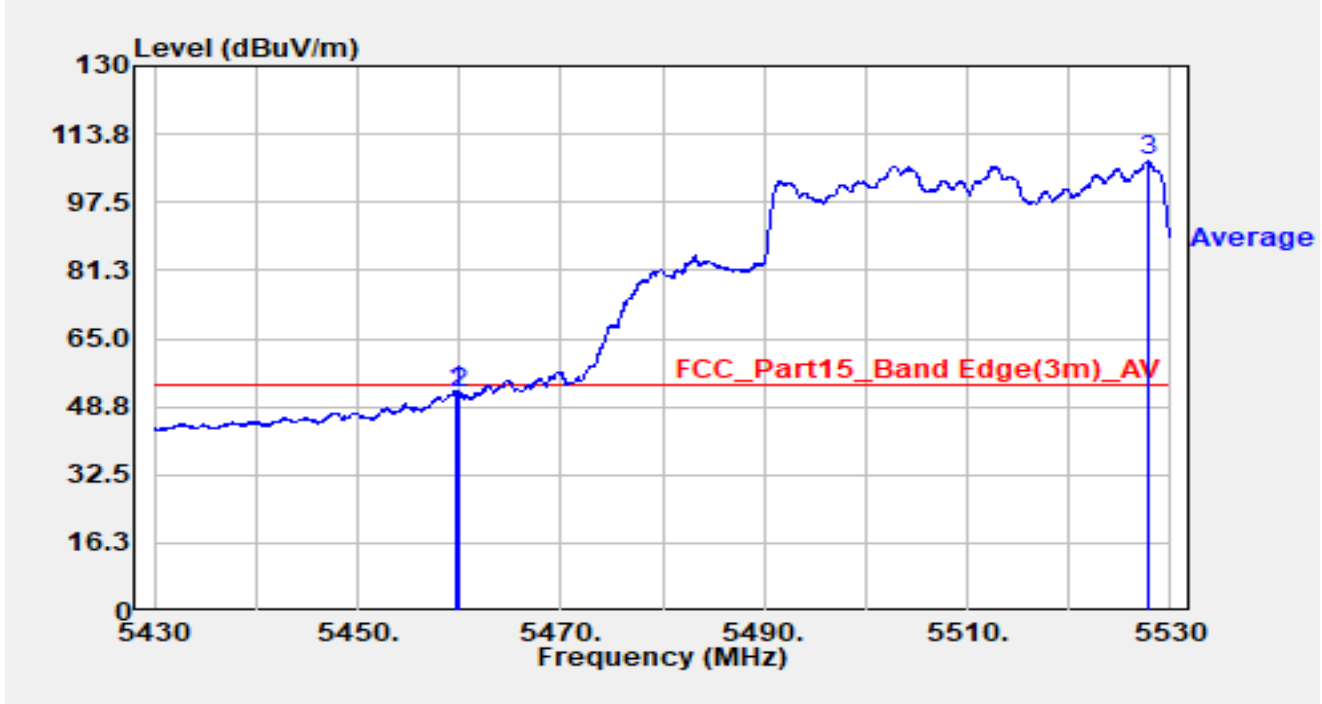


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5459.700	56.58	-3.91	52.67	-1.33	54.00	Average
2		5460.000	55.86	-3.86	51.99	-2.01	54.00	Average
3		5527.800	63.33	43.87	107.20	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-04
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5670MHz		

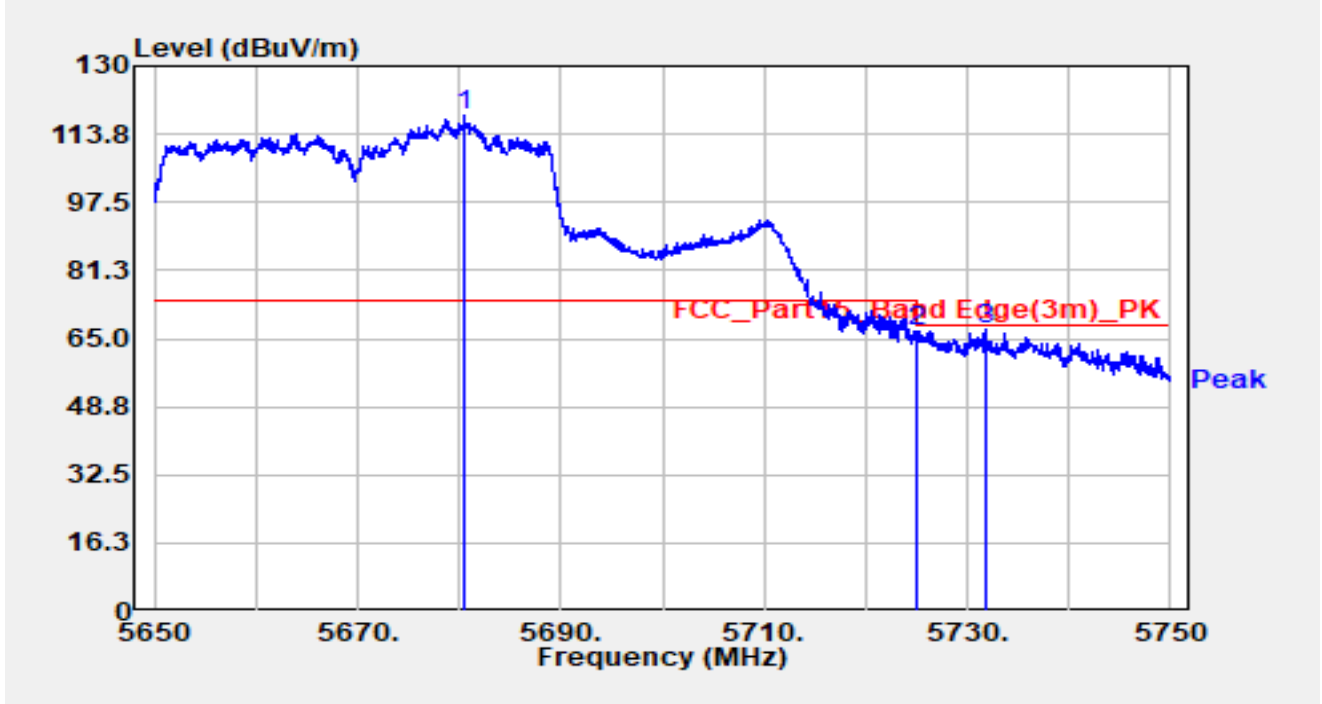


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5680.450	74.56	43.53	118.10	N/A	N/A	Peak
2		5725.000	68.68	-2.12	66.56	-1.64	68.20	Peak
3	*	5731.900	71.65	-4.21	67.44	-0.76	68.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-04
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5670MHz		

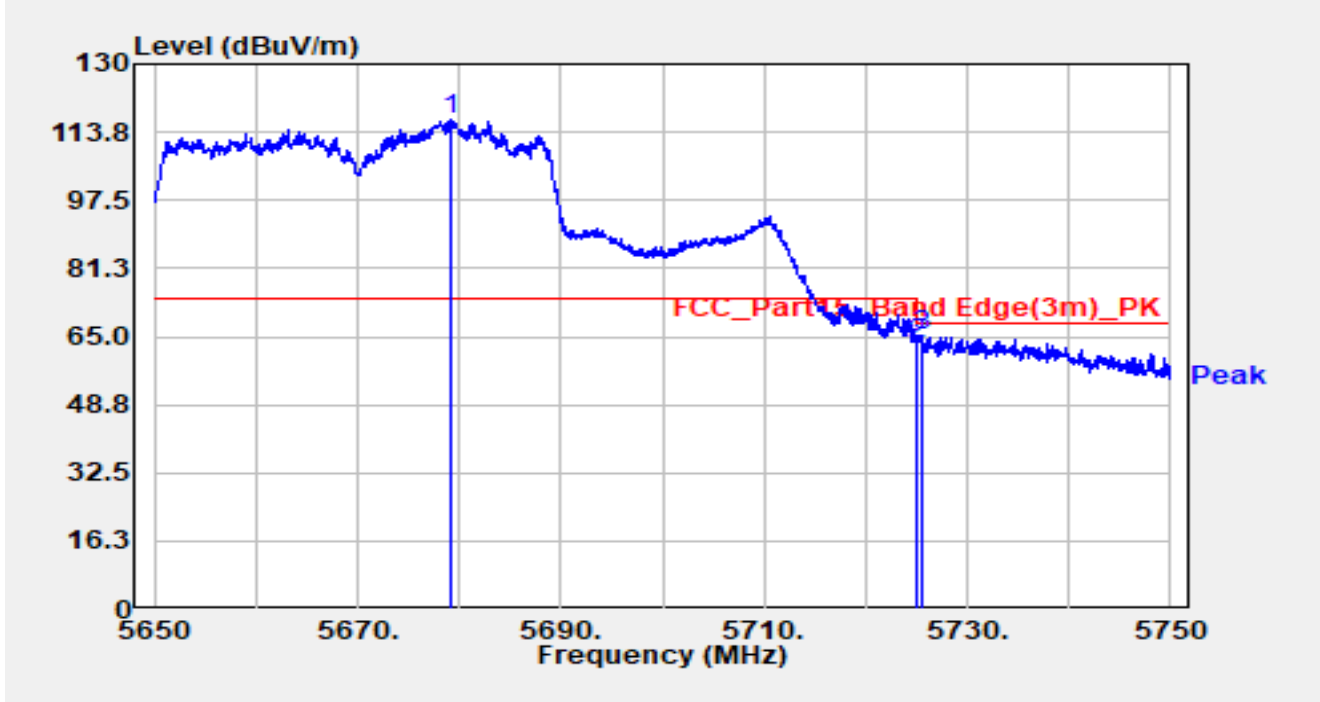


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5679.250	74.96	41.78	116.74	N/A	N/A	Peak
2		5725.000	65.46	-2.12	63.34	-4.86	68.20	Peak
3	*	5725.450	67.73	-2.36	65.37	-2.83	68.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-05
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5755MHz		

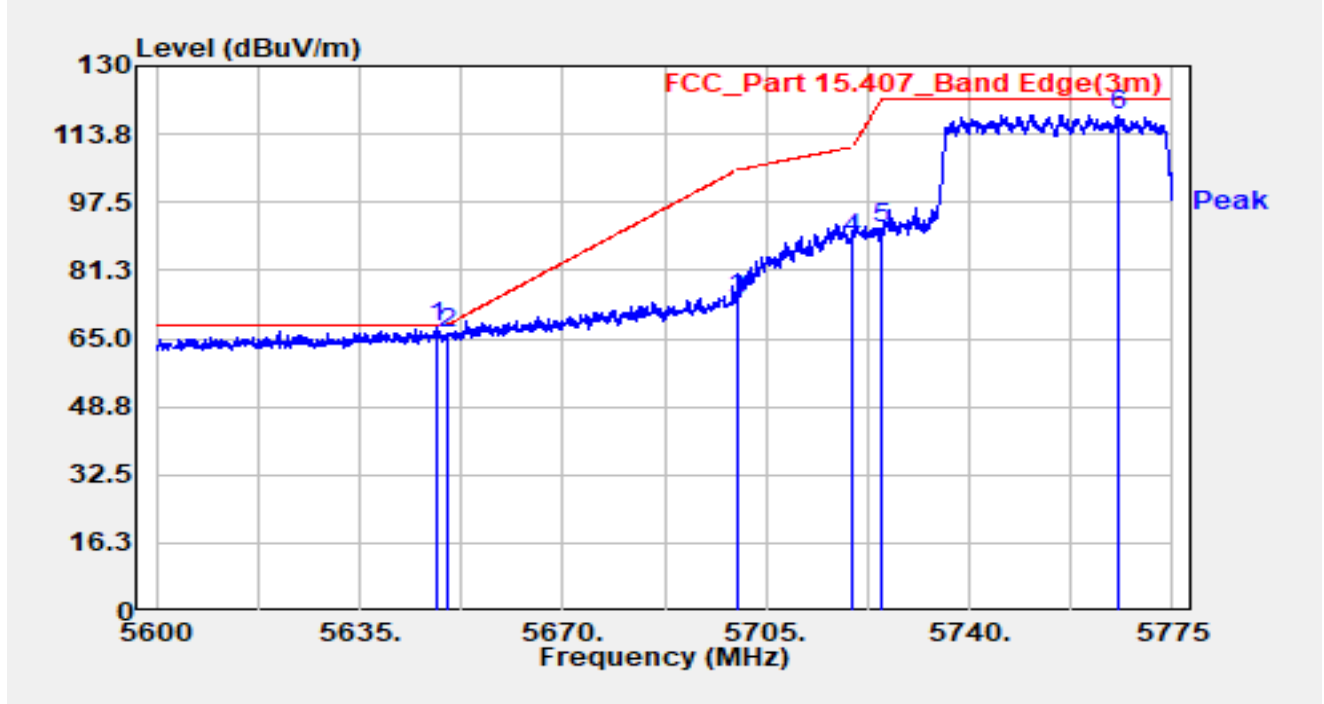


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5648.125	74.86	-7.15	67.71	-0.49	68.20	Peak
2		5650.000	73.22	-7.14	66.08	-2.12	68.20	Peak
3		5700.000	81.29	-7.06	74.23	-30.97	105.20	Peak
4		5720.000	95.91	-7.20	88.72	-22.08	110.80	Peak
5		5725.000	98.36	-7.22	91.14	-31.06	122.20	Peak
6		5765.462	125.56	-7.20	118.36	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-05
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5755MHz		

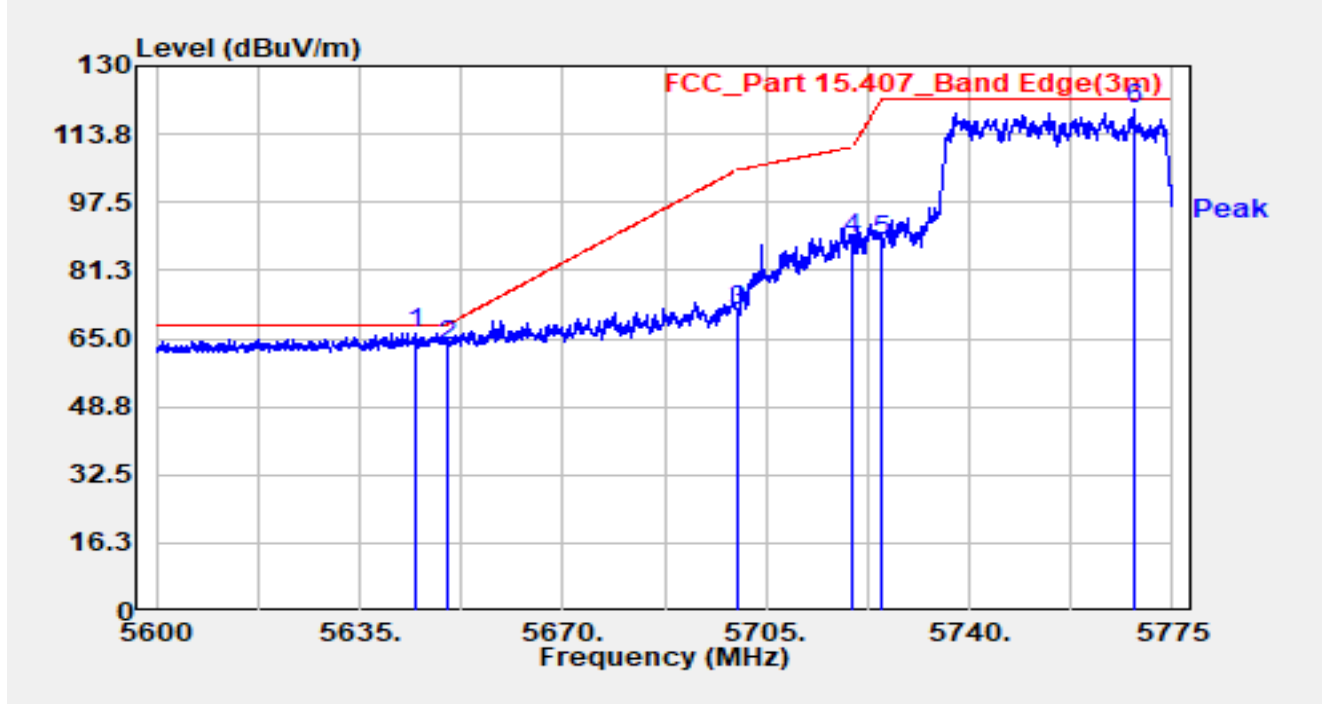


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5644.538	73.36	-7.18	66.18	-2.02	68.20	Peak
2		5650.000	70.66	-7.14	63.52	-4.68	68.20	Peak
3		5700.000	78.80	-7.06	71.74	-33.46	105.20	Peak
4		5720.000	95.82	-7.20	88.63	-22.17	110.80	Peak
5		5725.000	95.71	-7.22	88.49	-33.71	122.20	Peak
6		5768.263	126.78	-7.19	119.59	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-05
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5795MHz		

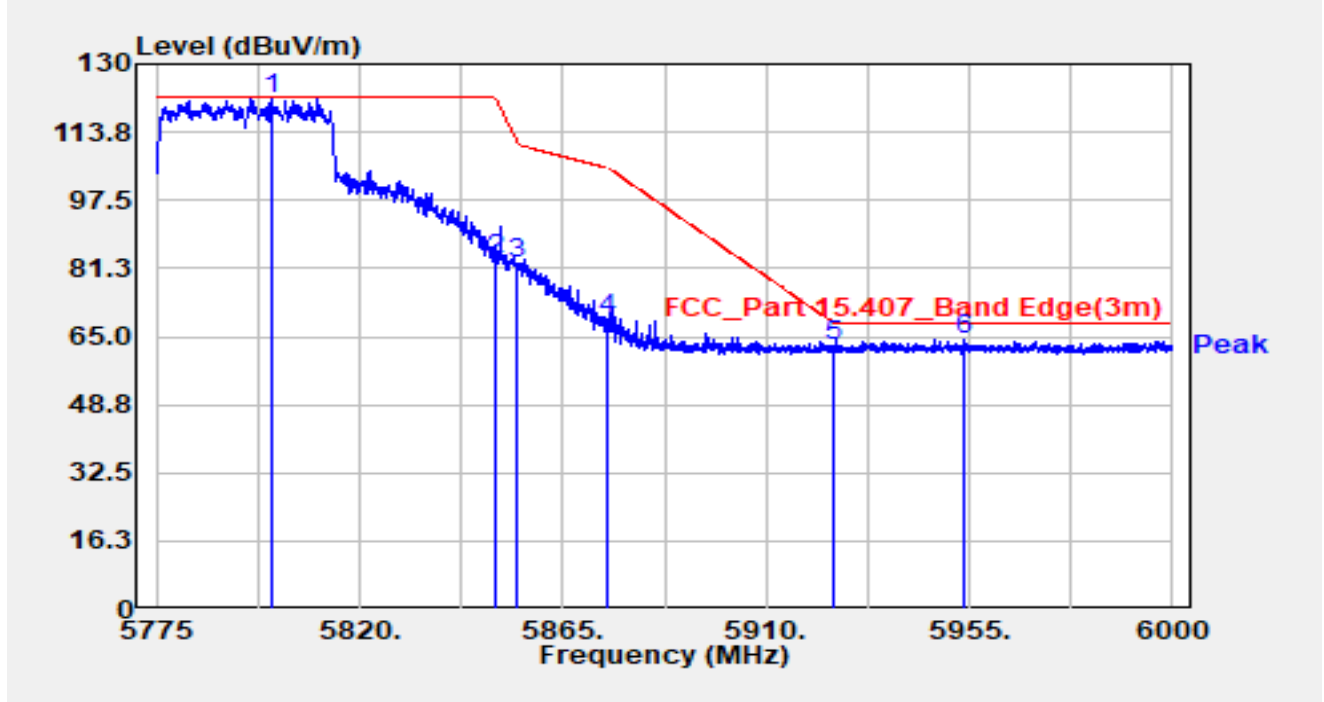


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5800.650	128.76	-7.13	121.63	N/A	N/A	Peak
2		5850.000	90.65	-7.06	83.59	-38.61	122.20	Peak
3		5855.000	89.70	-7.07	82.62	-28.18	110.80	Peak
4		5875.000	76.36	-7.15	69.21	-35.99	105.20	Peak
5		5925.000	69.85	-7.01	62.84	-5.36	68.20	Peak
6	*	5954.100	71.09	-6.84	64.25	-3.95	68.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-05
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE40 at 5795MHz		

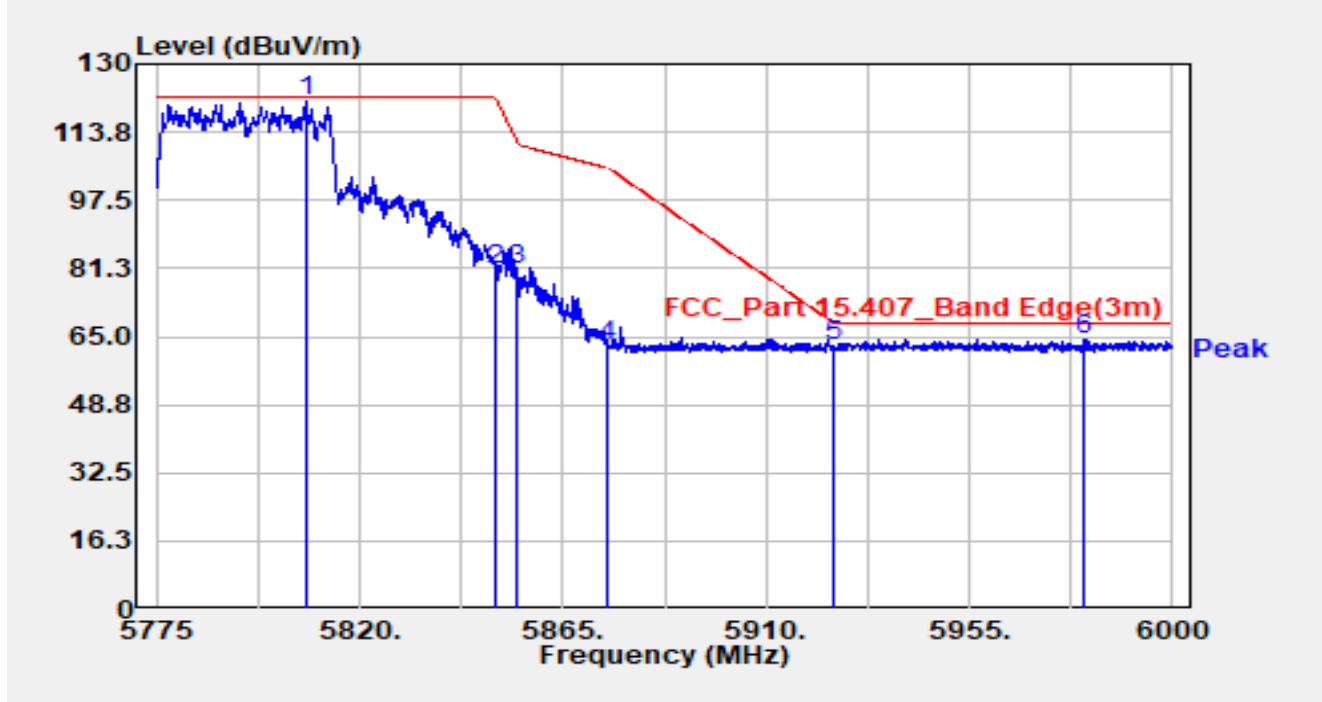


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5808.300	128.02	-7.07	120.95	N/A	N/A	Peak
2		5850.000	87.85	-7.06	80.79	-41.41	122.20	Peak
3		5855.000	87.93	-7.07	80.85	-29.95	110.80	Peak
4		5875.000	69.77	-7.15	62.62	-42.58	105.20	Peak
5		5925.000	69.62	-7.01	62.61	-5.59	68.20	Peak
6	*	5980.425	71.17	-6.97	64.20	-4.00	68.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2024-07-02
Test Engineer	Oliver Cheng	Temp./Humidity	24.3°C/65.2%
Factor	BBHA 9120D_02042_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5210MHz		

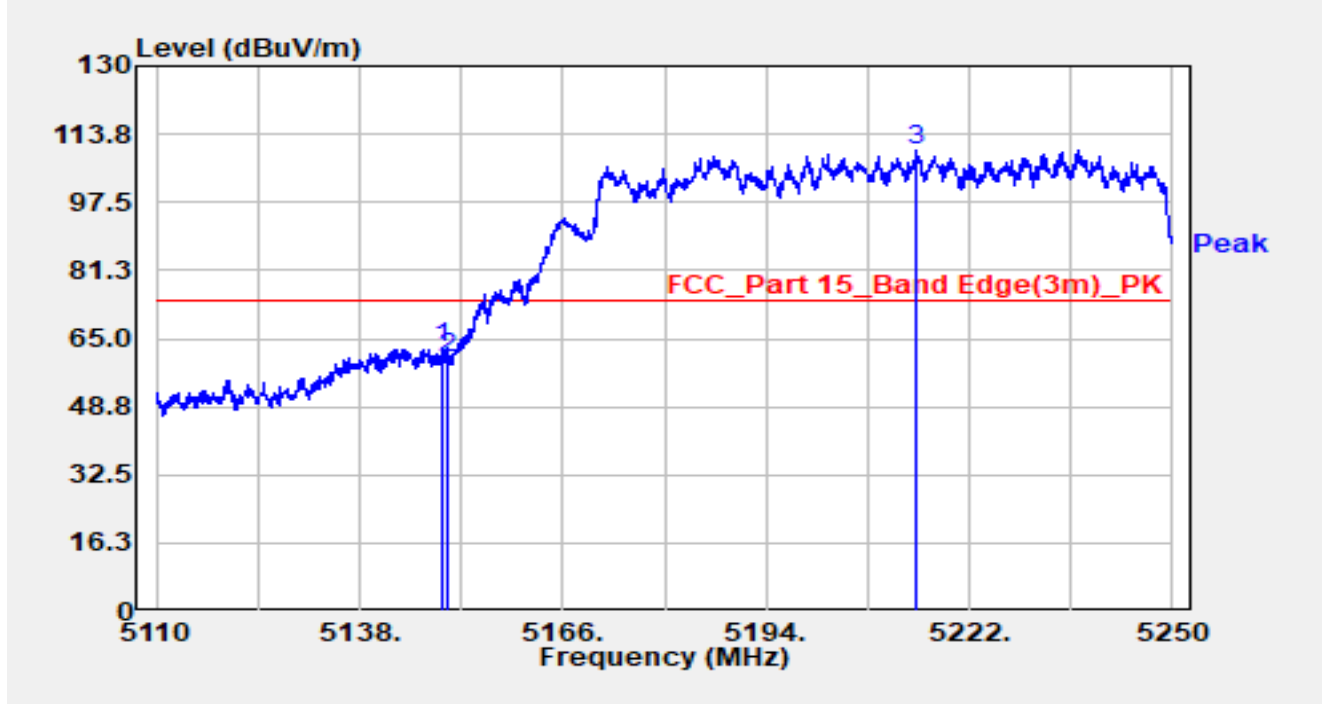


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.550	64.67	-1.80	62.87	-11.13	74.00	Peak
2		5150.000	62.25	-1.73	60.53	-13.47	74.00	Peak
3		5214.790	71.16	38.90	110.05	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2024-07-02
Test Engineer	Oliver Cheng	Temp./Humidity	24.3°C/65.2%
Factor	BBHA 9120D_02042_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5210MHz		

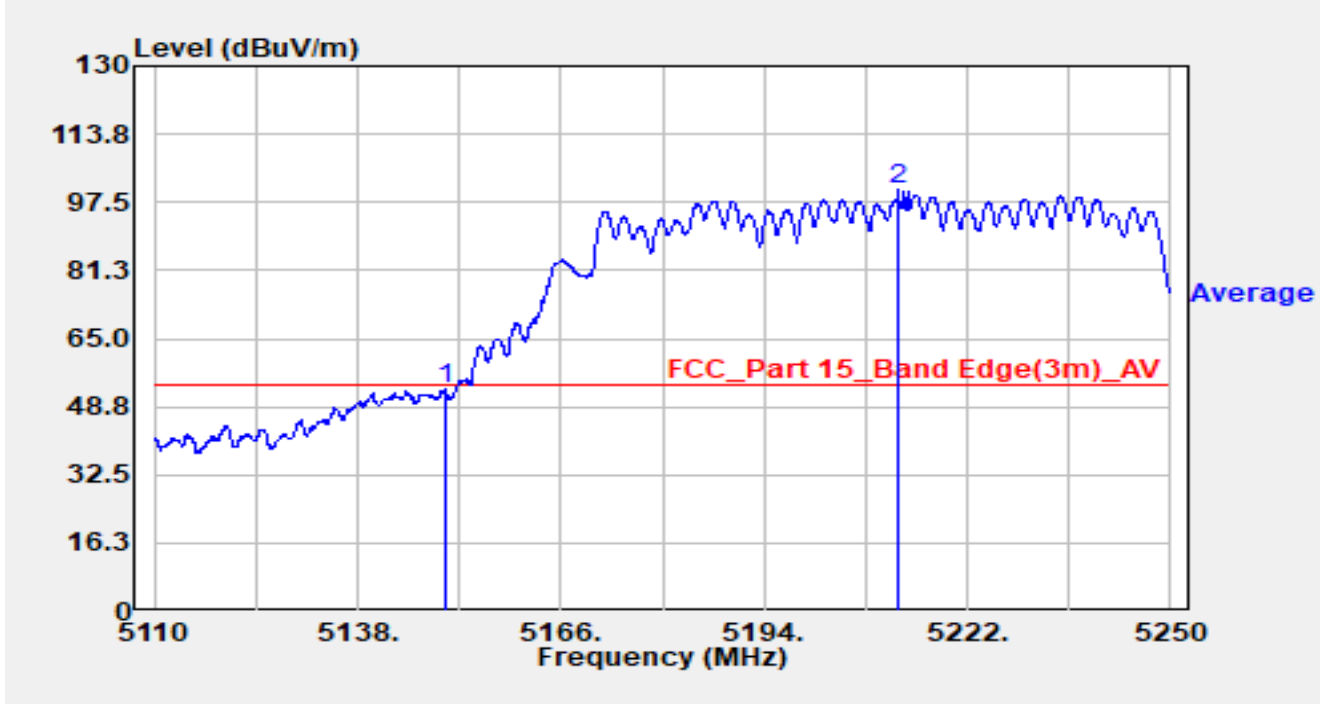


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.000	54.69	-1.73	52.96	-1.04	54.00	Average
2		5212.410	62.73	37.71	100.44	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2024-07-02
Test Engineer	Oliver Cheng	Temp./Humidity	24.3°C/65.2%
Factor	BBHA 9120D_02042_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5210MHz		

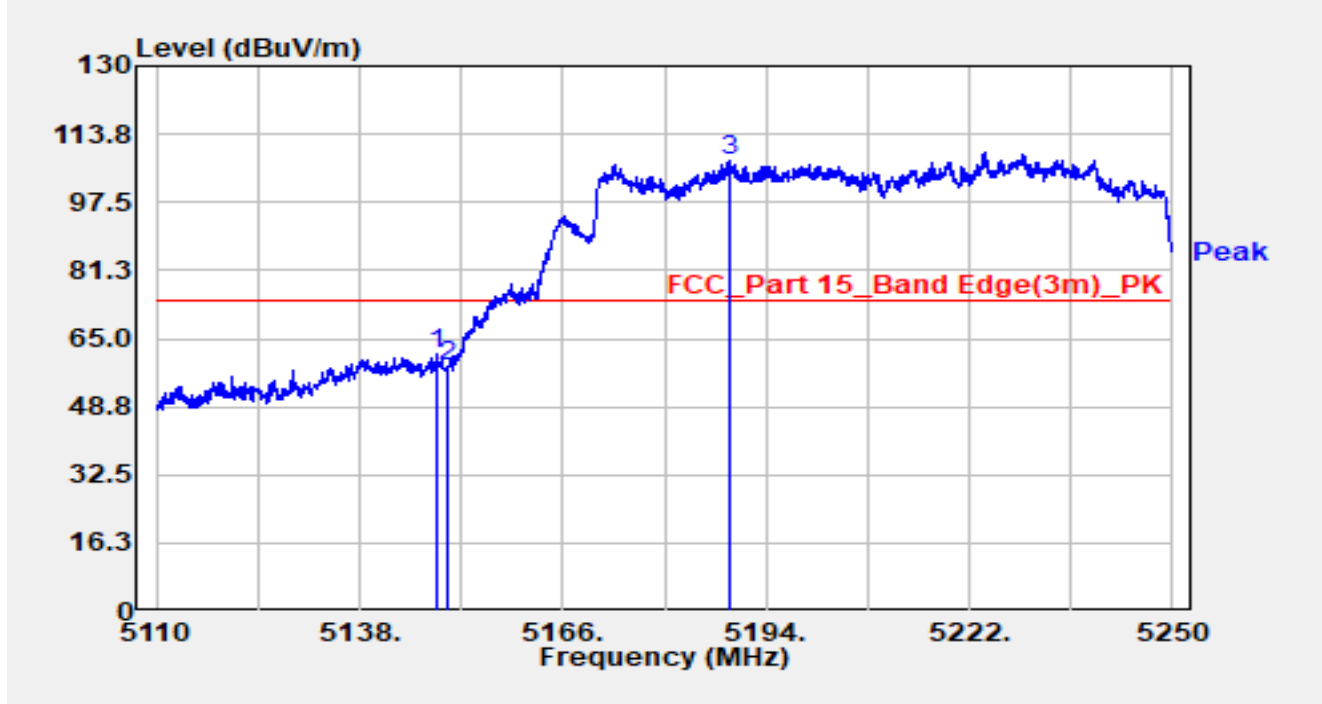


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5148.570	63.29	-1.98	61.31	-12.69	74.00	Peak
2		5150.000	60.32	-1.73	58.60	-15.40	74.00	Peak
3		5188.960	67.30	39.90	107.20	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2024-07-02
Test Engineer	Oliver Cheng	Temp./Humidity	24.3°C/65.2%
Factor	BBHA 9120D_02042_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5210MHz		

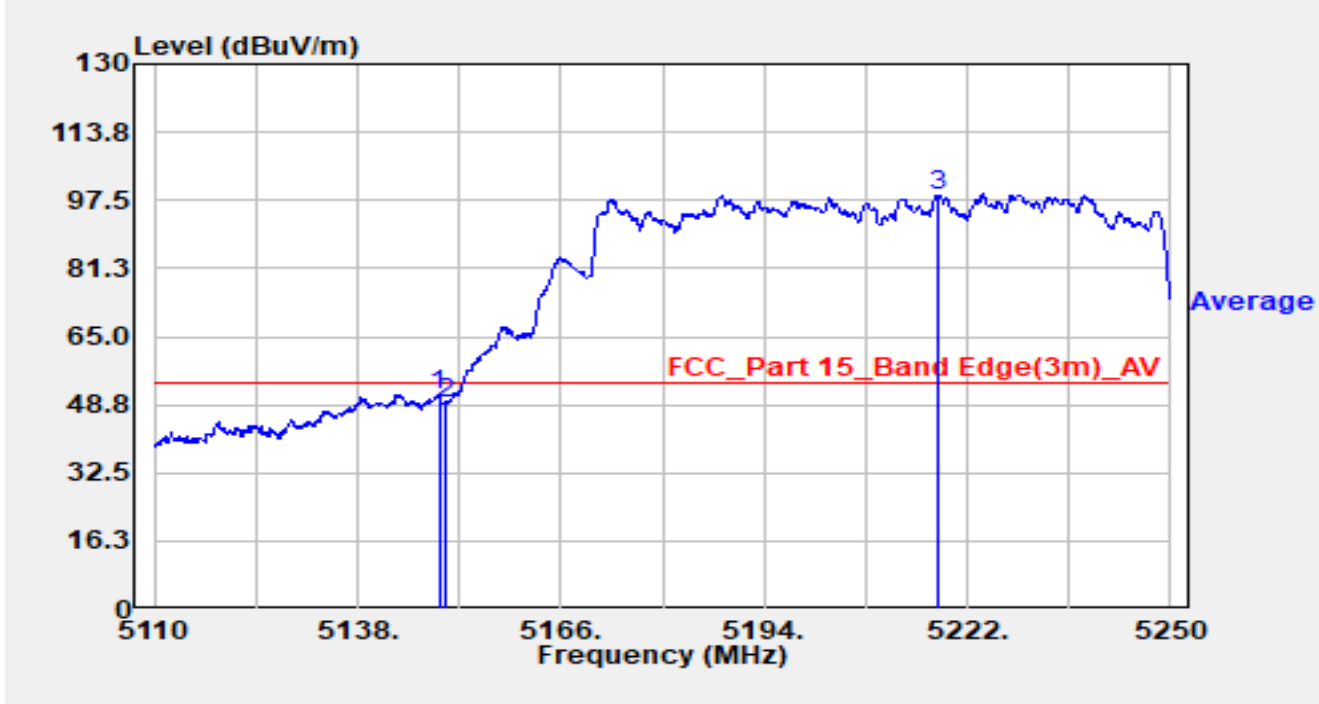


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.200	53.08	-1.87	51.21	-2.79	54.00	Average
2		5150.000	50.68	-1.73	48.95	-5.05	54.00	Average
3		5217.870	56.11	42.66	98.77	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-06
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5290MHz		

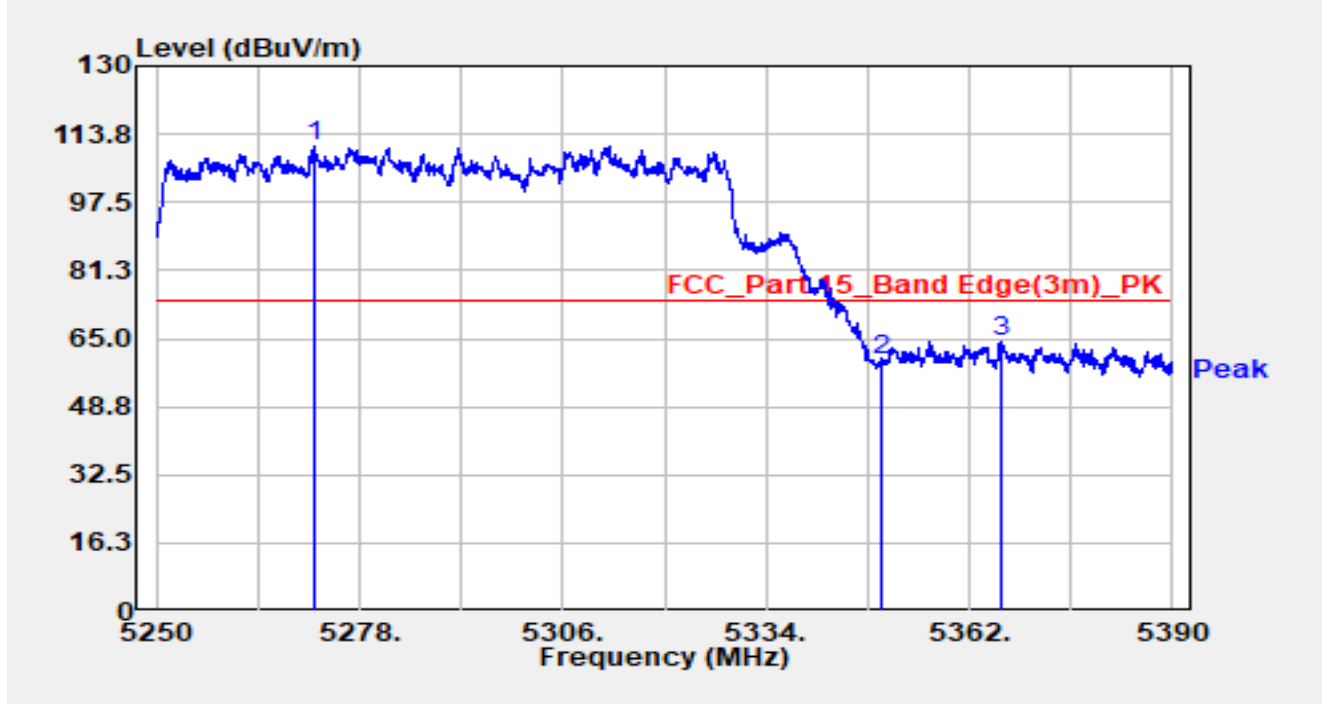


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5271.700	75.20	35.87	111.07	N/A	N/A	Peak
2		5350.000	61.78	-1.81	59.97	-14.03	74.00	Peak
3	*	5366.410	69.48	-5.05	64.43	-9.57	74.00	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-06
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5290MHz		

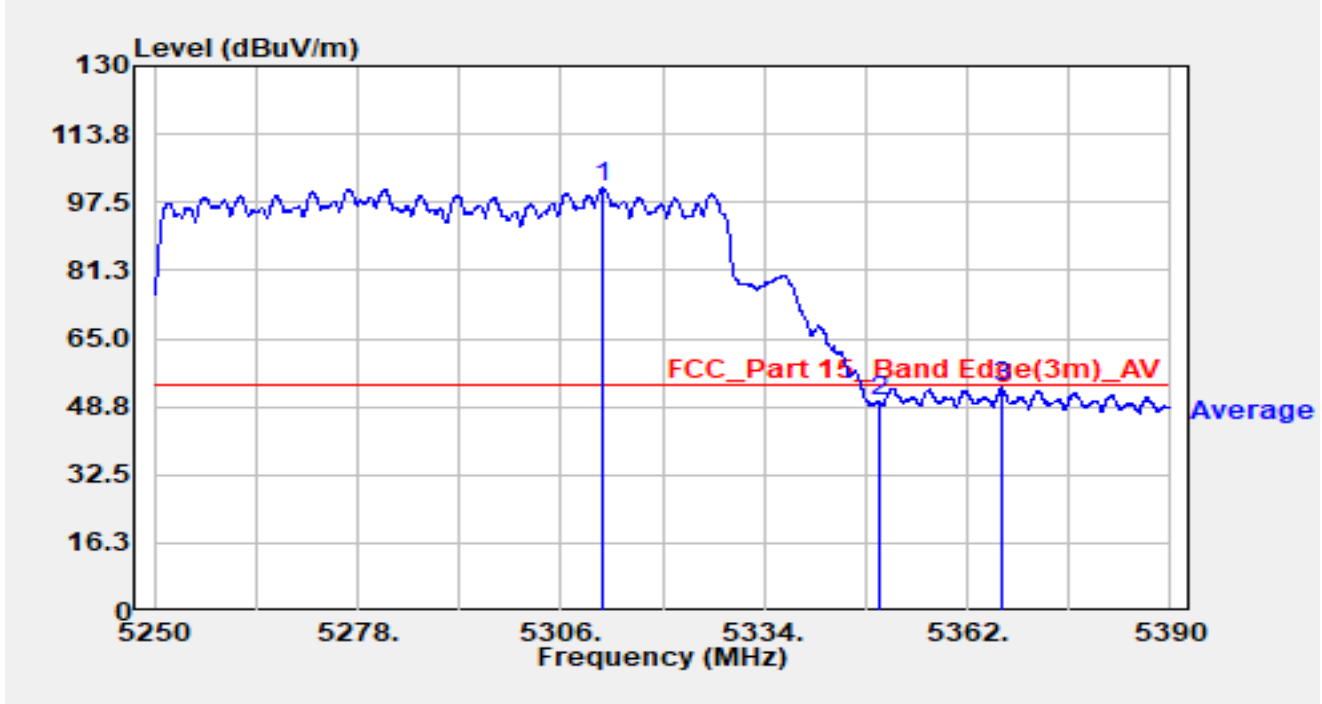


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5311.740	56.47	44.40	100.87	N/A	N/A	Peak
2		5350.000	51.64	-1.81	49.83	-4.17	54.00	Peak
3	*	5366.620	58.41	-5.07	53.34	-0.66	54.00	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-06
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5290MHz		

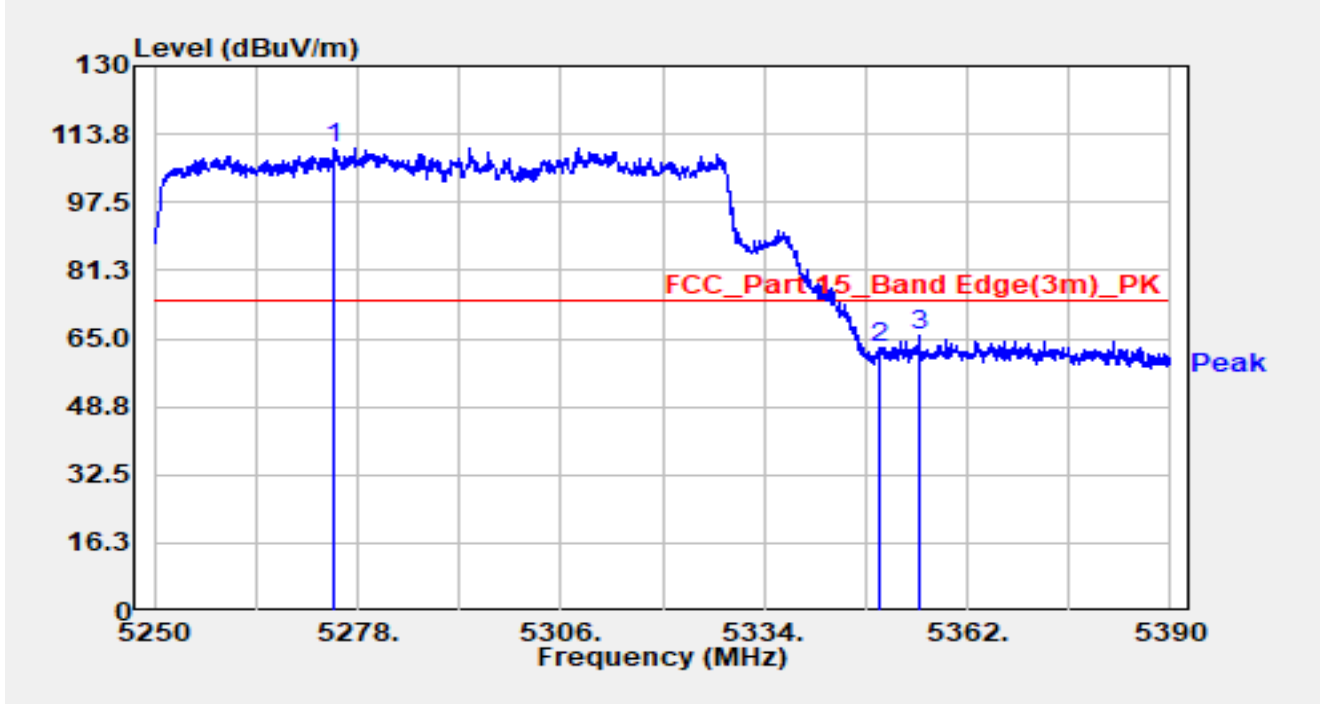


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5274.710	73.57	36.77	110.35	N/A	N/A	Peak
2		5350.000	64.36	-1.81	62.56	-11.44	74.00	Peak
3	*	5355.490	69.33	-3.66	65.68	-8.32	74.00	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-06
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5290MHz		

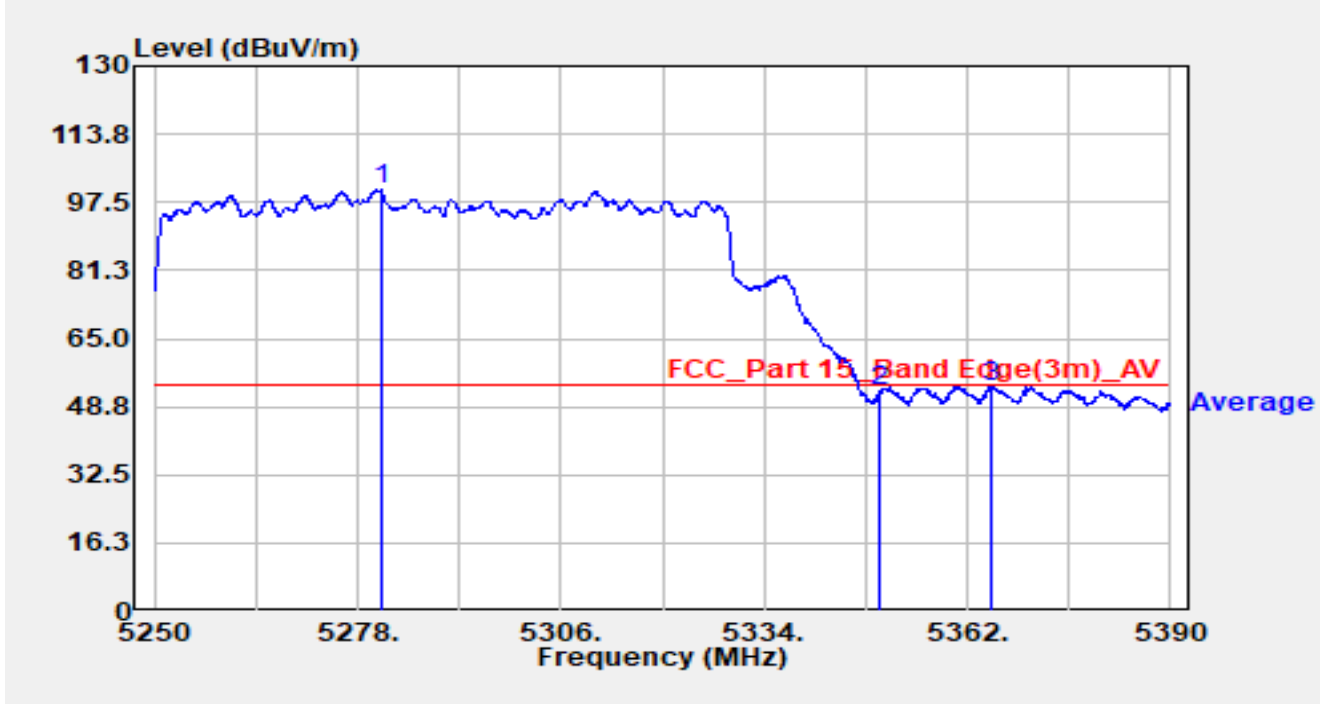


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5281.220	54.95	45.45	100.40	N/A	N/A	Peak
2		5350.030	54.08	-1.82	52.25	-1.75	54.00	Peak
3	*	5365.150	58.58	-4.95	53.63	-0.37	54.00	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-04
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5530MHz		

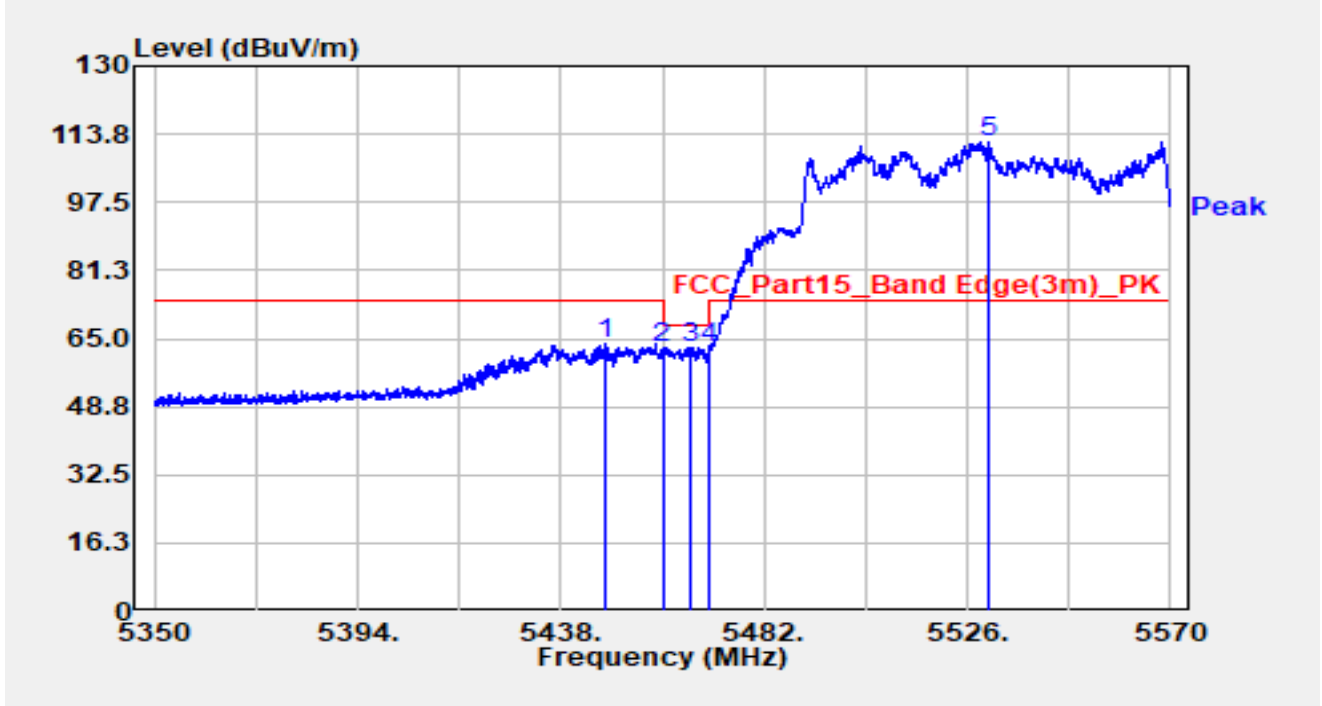


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5447.350	68.54	-4.61	63.93	-10.07	74.00	Peak
2		5460.000	66.58	-3.86	62.72	-5.48	68.20	Peak
3	*	5465.830	66.25	-3.23	63.02	-5.18	68.20	Peak
4		5470.000	64.94	-2.10	62.83	-5.37	68.20	Peak
5		5530.840	63.62	48.17	111.79	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-04
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5530MHz		

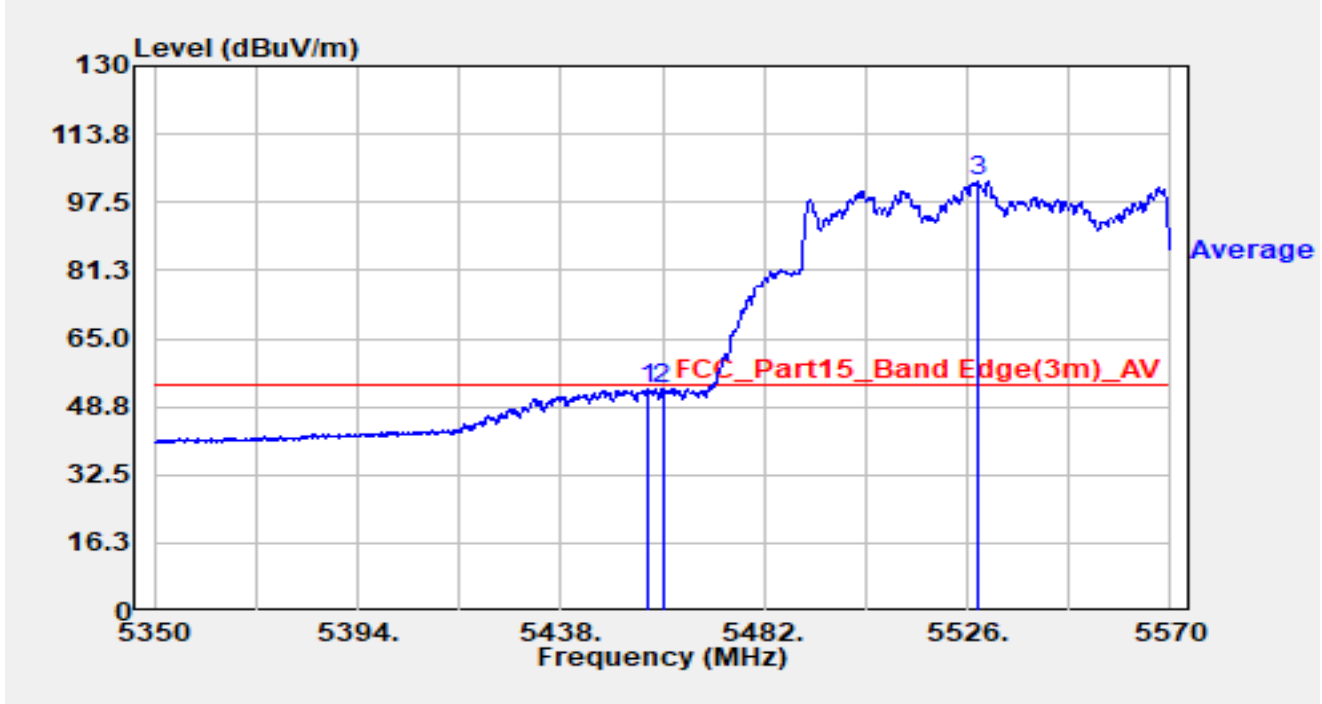


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5457.030	57.31	-4.10	53.21	-0.79	54.00	Average
2		5460.000	56.75	-3.86	52.89	-1.11	54.00	Average
3		5528.200	57.83	44.66	102.49	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-04
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5530MHz		

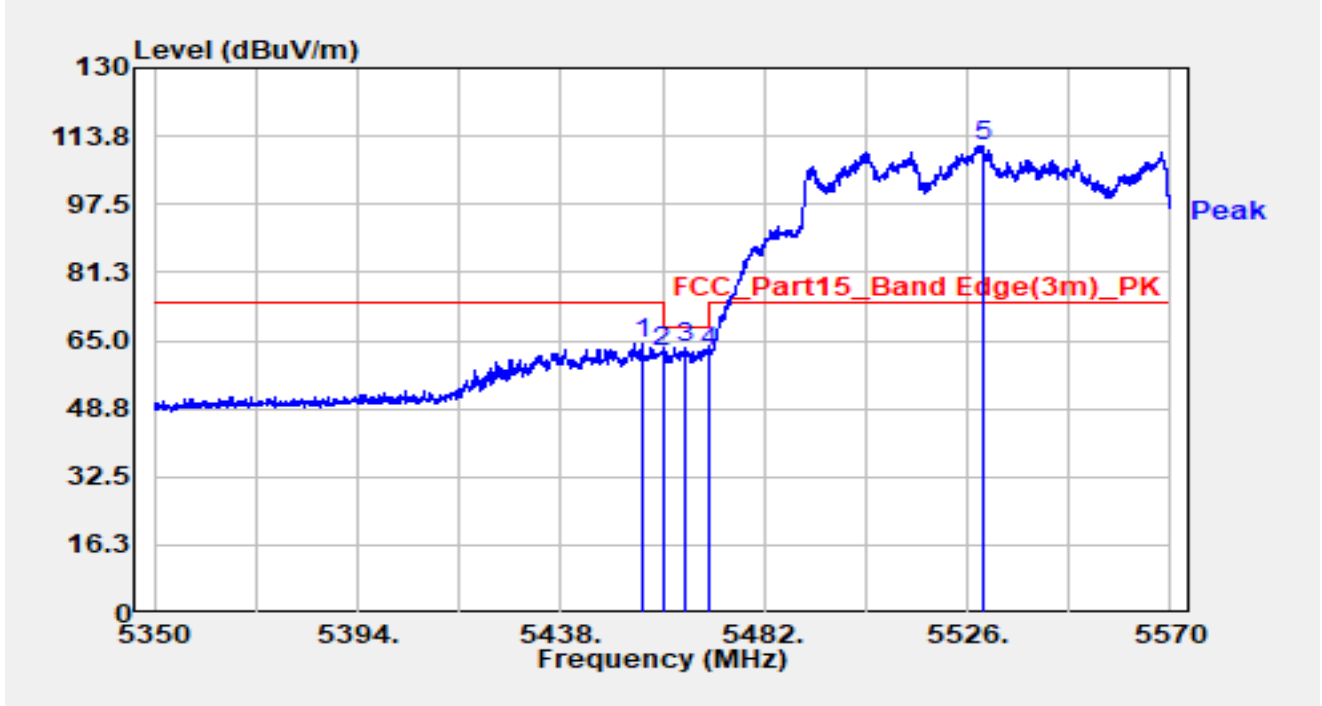


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5455.490	68.45	-4.21	64.24	-9.76	74.00	Peak
2		5460.000	66.16	-3.86	62.30	-5.90	68.20	Peak
3	*	5464.950	66.80	-3.39	63.41	-4.79	68.20	Peak
4		5470.000	64.38	-2.10	62.27	-5.93	68.20	Peak
5		5529.520	64.46	47.10	111.56	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-04
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5530MHz		

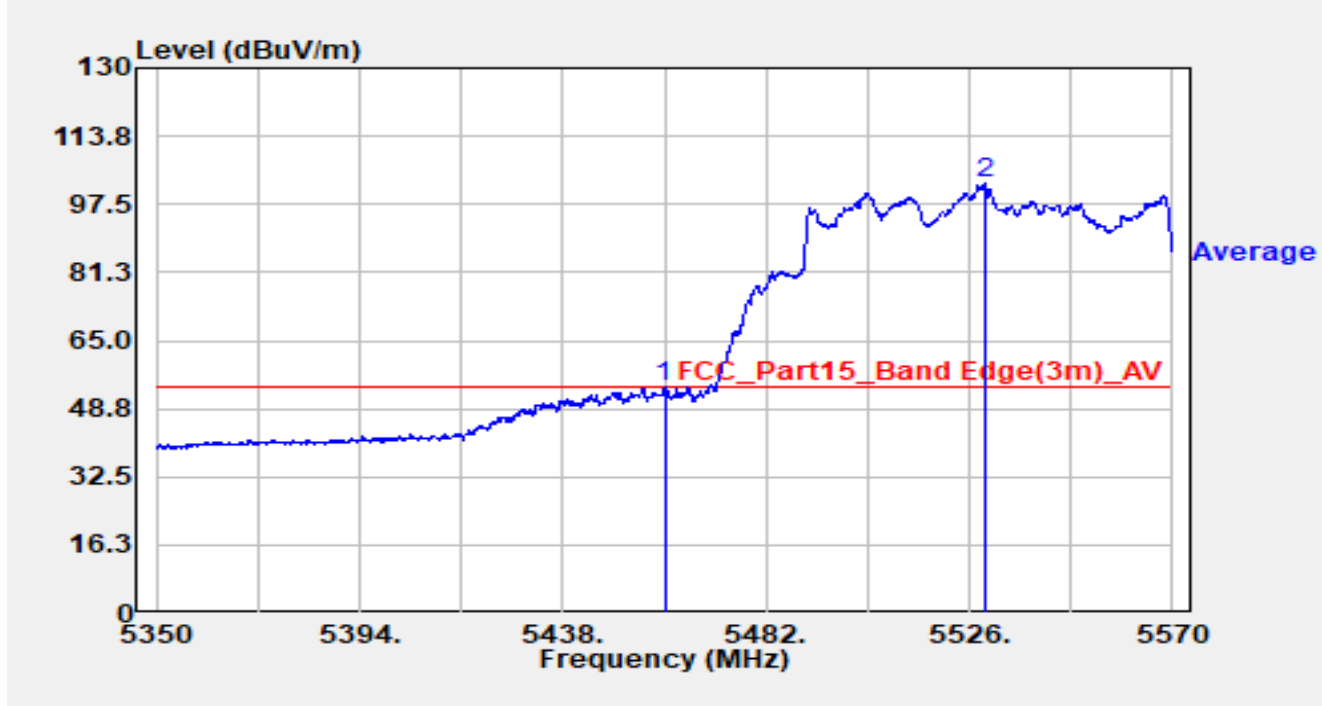


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.000	57.62	-3.86	53.75	-0.25	54.00	Average
2		5529.410	55.53	46.88	102.40	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-04
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5610MHz		

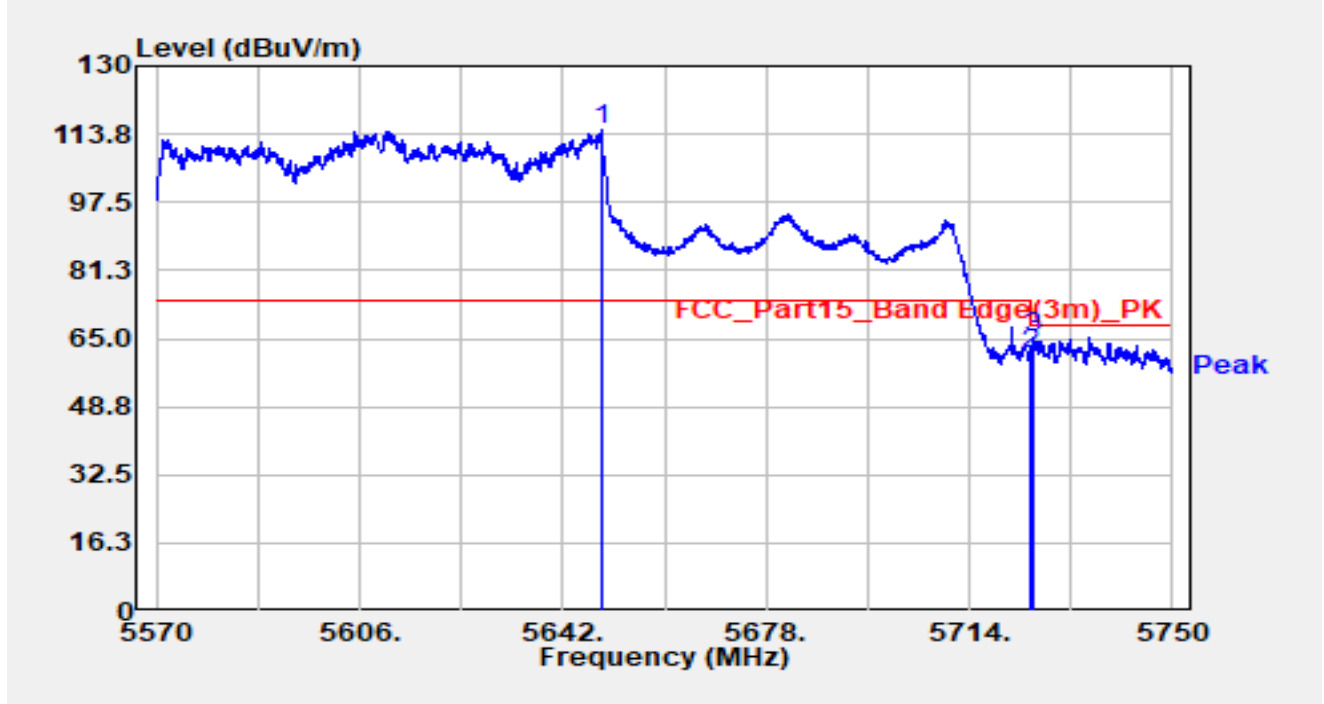


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5648.750	69.89	44.75	114.64	N/A	N/A	Peak
2		5725.000	63.37	-2.12	61.26	-6.94	68.20	Peak
3	*	5725.520	67.71	-2.40	65.31	-2.89	68.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-04
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5610MHz		

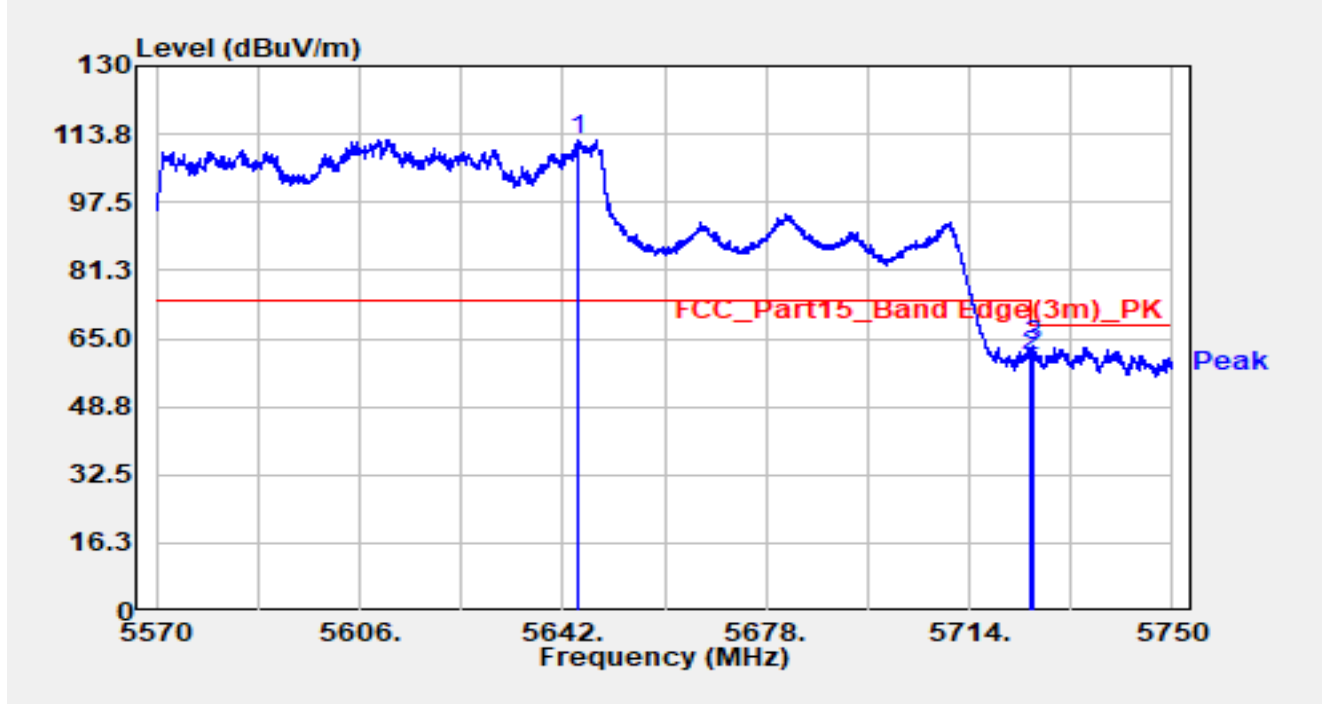


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5644.700	73.91	38.66	112.57	N/A	N/A	Peak
2		5725.000	63.03	-2.10	60.92	-13.08	74.00	Peak
3	*	5725.340	65.36	-2.30	63.06	-5.14	68.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-05
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5775MHz		

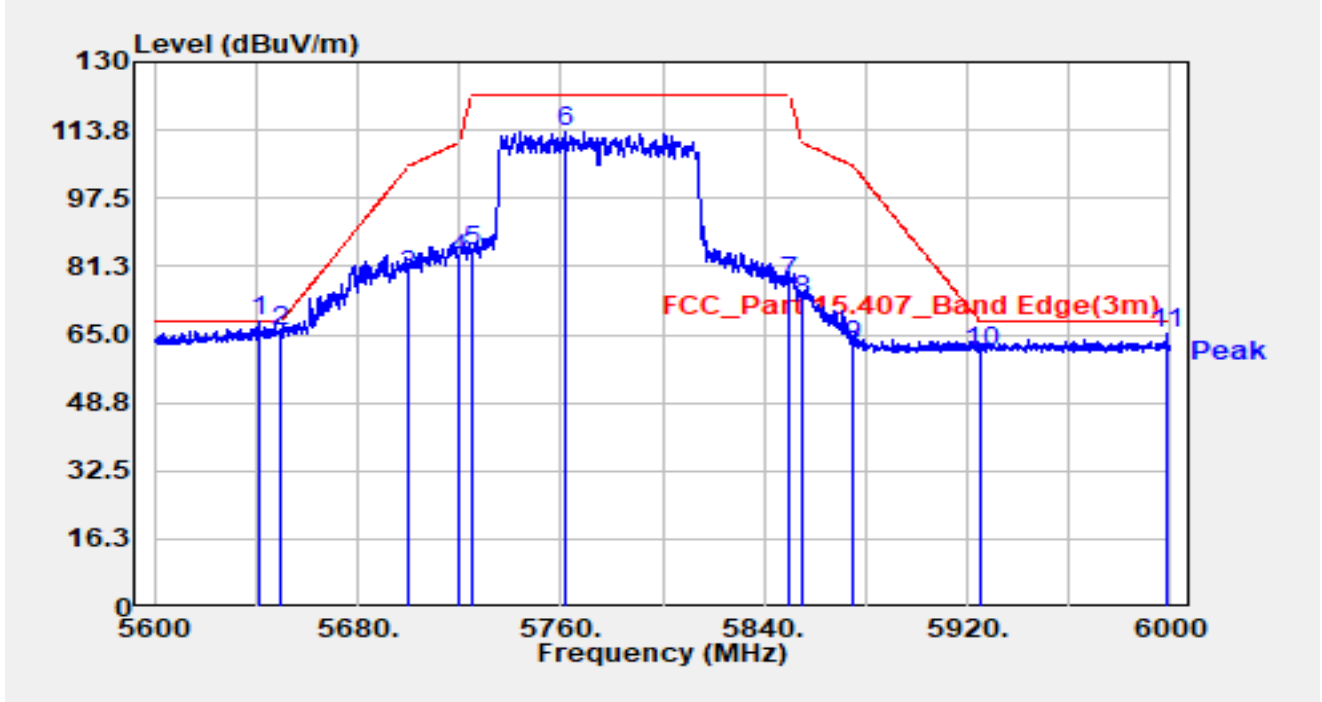

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5641.400	75.15	-7.20	67.95	-0.25	68.20	Peak
2		5650.000	72.91	-7.14	65.77	-2.43	68.20	Peak
3		5700.000	86.14	-7.06	79.08	-26.12	105.20	Peak
4		5720.000	90.33	-7.20	83.14	-27.66	110.80	Peak
5		5725.000	91.92	-7.22	84.70	-37.50	122.20	Peak
6		5761.600	120.75	-7.23	113.52	N/A	N/A	Peak
7		5850.000	84.35	-7.06	77.28	-44.92	122.20	Peak
8		5855.000	80.04	-7.07	72.96	-37.84	110.80	Peak
9		5875.000	69.55	-7.15	62.40	-42.80	105.20	Peak
10		5925.000	67.88	-7.01	60.87	-7.33	68.20	Peak
11		5998.200	72.07	-6.70	65.38	-2.82	68.20	Peak


Notes:

1. " *", means this data is the worst emission level.

2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) -AMP (dB).

3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-05
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE80 at 5775MHz		

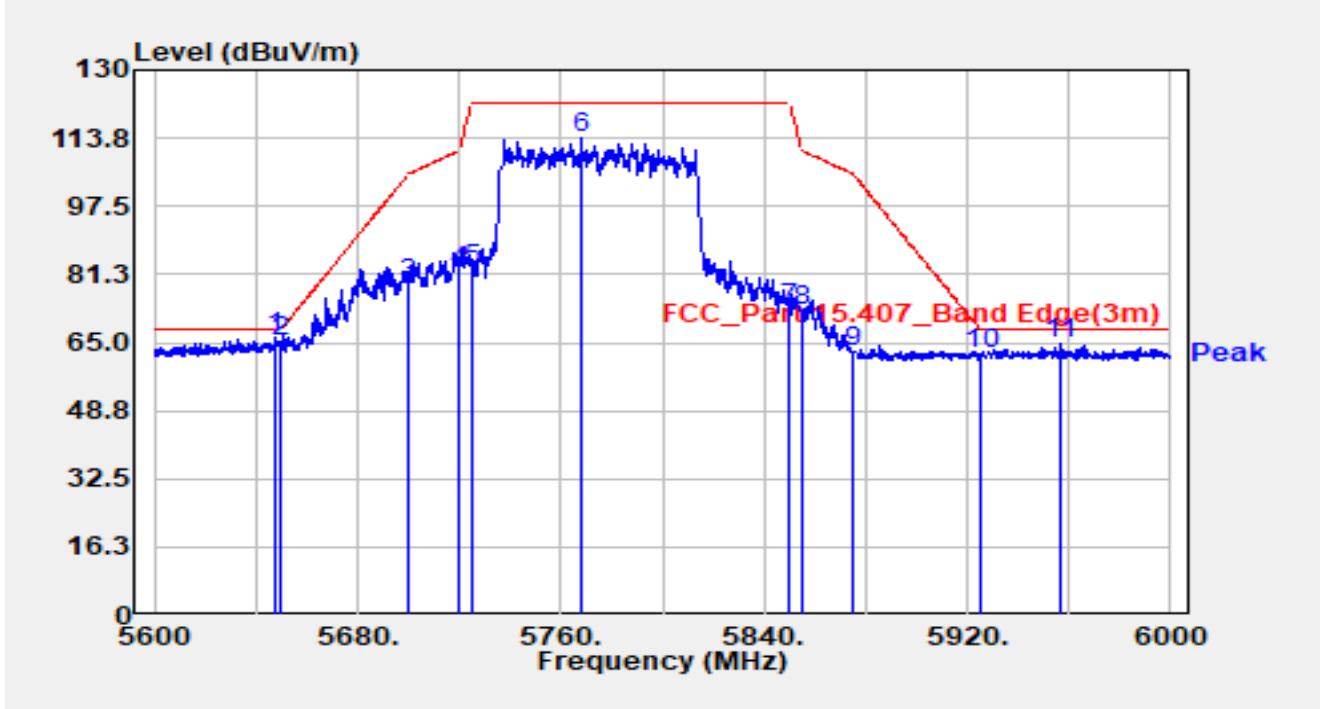


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5647.800	73.50	-7.15	66.34	-1.86	68.20	Peak
2		5650.000	72.16	-7.14	65.02	-3.18	68.20	Peak
3		5700.000	86.13	-7.06	79.07	-26.13	105.20	Peak
4		5720.000	89.23	-7.20	82.04	-28.76	110.80	Peak
5		5725.000	89.64	-7.22	82.42	-39.78	122.20	Peak
6		5768.200	120.80	-7.19	113.61	N/A	N/A	Peak
7		5850.000	80.07	-7.06	73.00	-49.20	122.20	Peak
8		5855.000	79.48	-7.07	72.40	-38.40	110.80	Peak
9		5875.000	69.71	-7.15	62.56	-42.64	105.20	Peak
10		5925.000	69.37	-7.01	62.36	-5.84	68.20	Peak
11		5956.200	71.41	-6.85	64.56	-3.64	68.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-06
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 5250MHz		

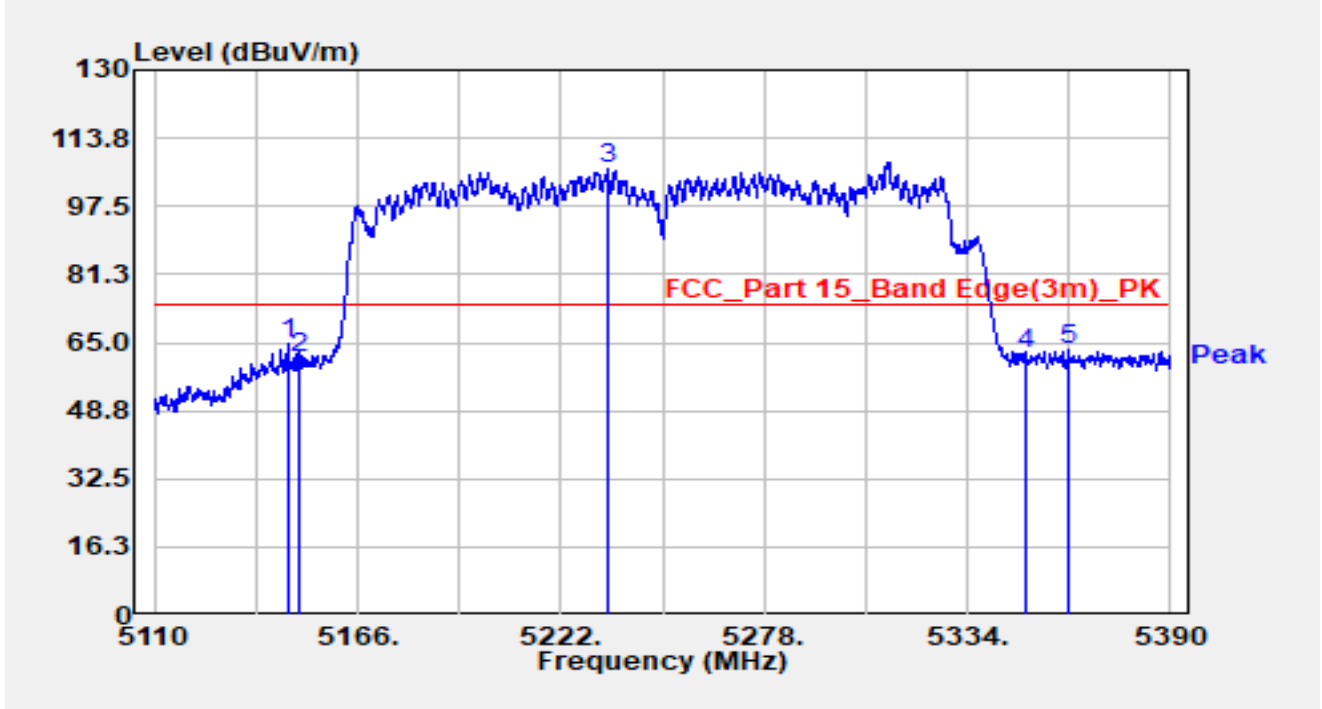


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5146.680	68.92	-4.09	64.83	-9.17	74.00	Peak
2		5150.000	64.95	-3.47	61.48	-12.52	74.00	Peak
3		5234.880	67.13	39.18	106.31	N/A	N/A	Peak
4		5350.000	63.93	-1.81	62.12	-11.88	74.00	Peak
5		5361.860	67.98	-4.69	63.29	-10.71	74.00	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-06
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 5250MHz		

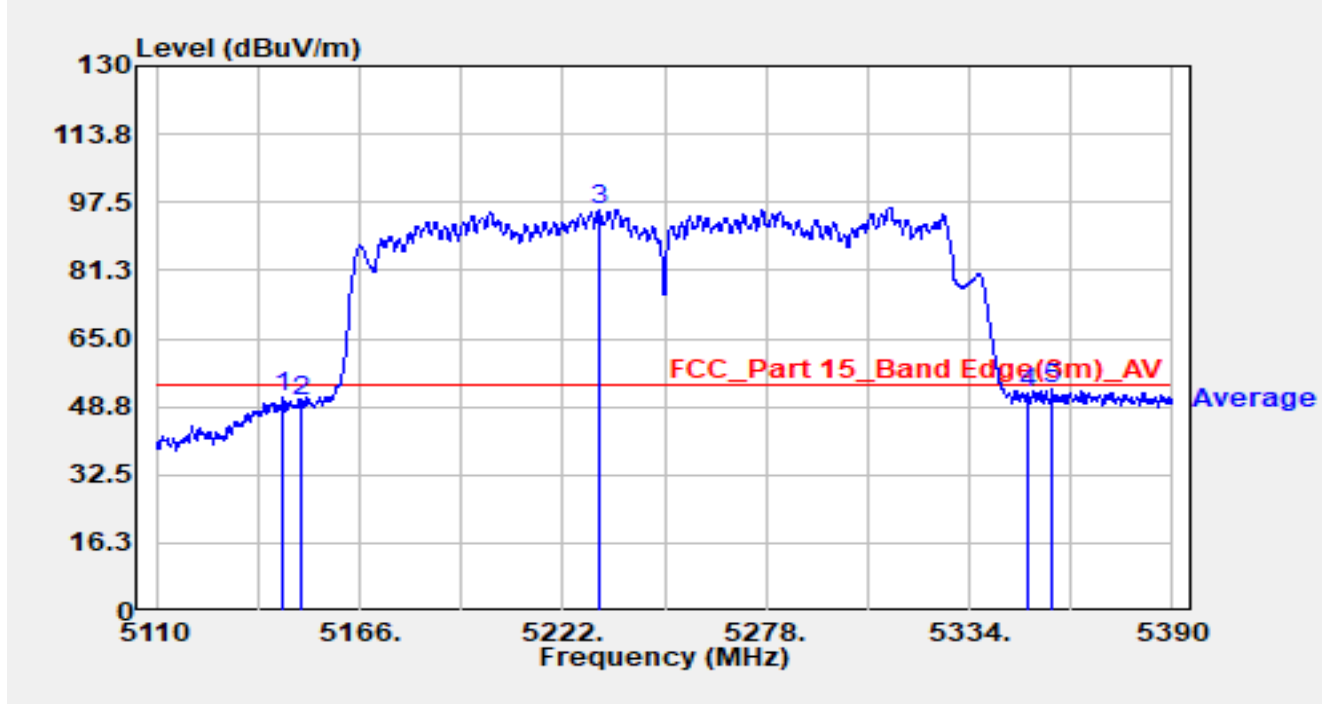


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5145.000	55.15	-4.25	50.89	-3.11	54.00	Average
2		5150.000	53.47	-3.47	50.00	-4.00	54.00	Average
3		5232.080	58.86	36.87	95.73	N/A	N/A	Average
4		5350.000	53.96	-1.81	52.15	-1.85	54.00	Average
5	*	5356.820	56.96	-3.98	52.98	-1.02	54.00	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-06
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 5250MHz		

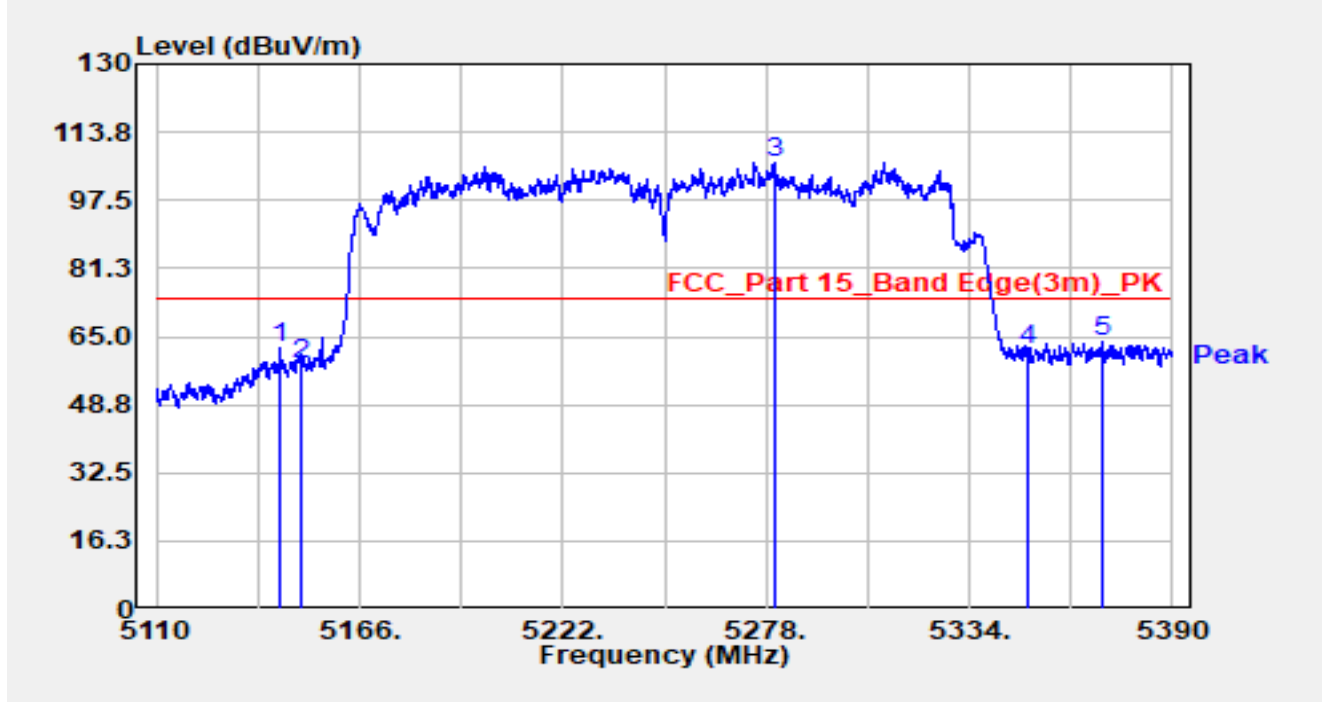


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5144.160	66.46	-4.35	62.12	-11.88	74.00	Peak
2		5150.000	61.84	-3.47	58.37	-15.63	74.00	Peak
3		5280.240	62.59	44.03	106.63	N/A	N/A	Peak
4		5350.000	63.56	-1.81	61.75	-12.25	74.00	Peak
5	*	5370.680	69.00	-5.23	63.77	-10.23	74.00	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-06
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 5250MHz		

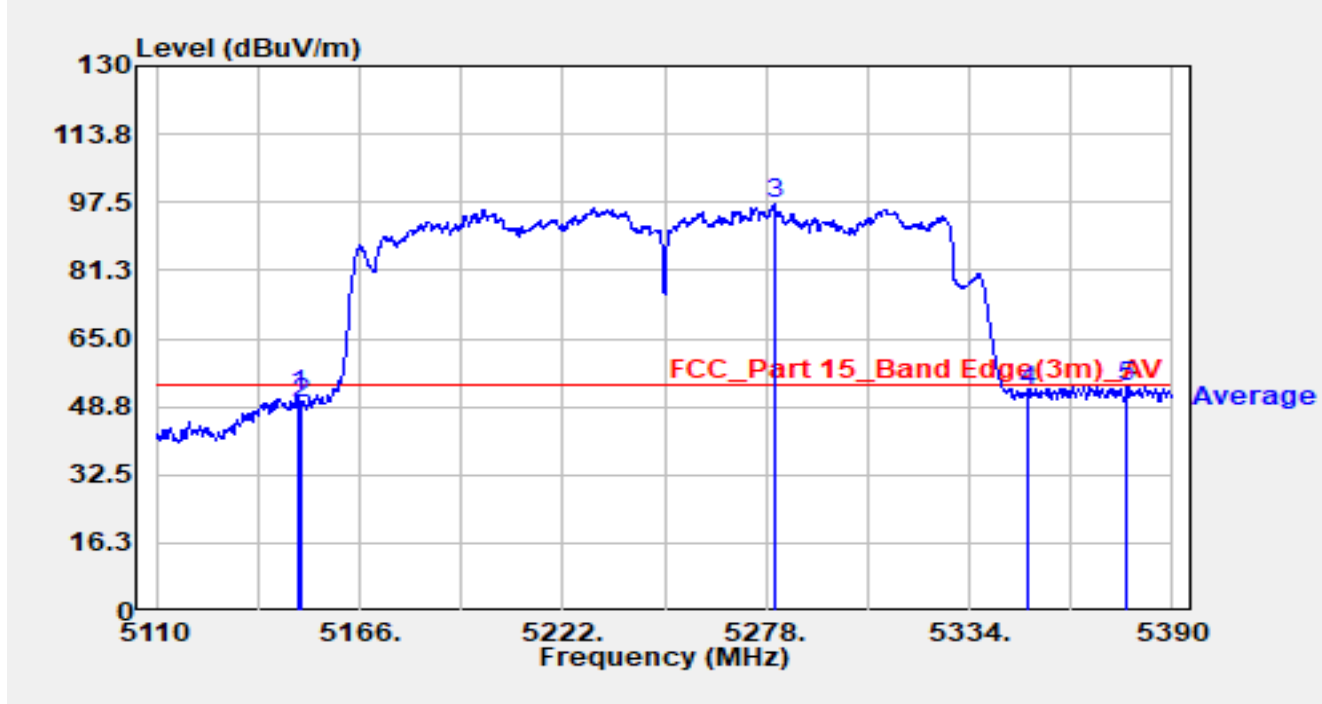


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5148.920	55.02	-3.69	51.33	-2.67	54.00	Average
2		5150.000	53.25	-3.47	49.78	-4.22	54.00	Average
3		5280.380	52.80	44.26	97.06	N/A	N/A	Average
4		5349.960	54.11	-1.78	52.33	-1.67	54.00	Average
5	*	5377.540	59.00	-5.31	53.68	-0.32	54.00	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-04
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 5570MHz		

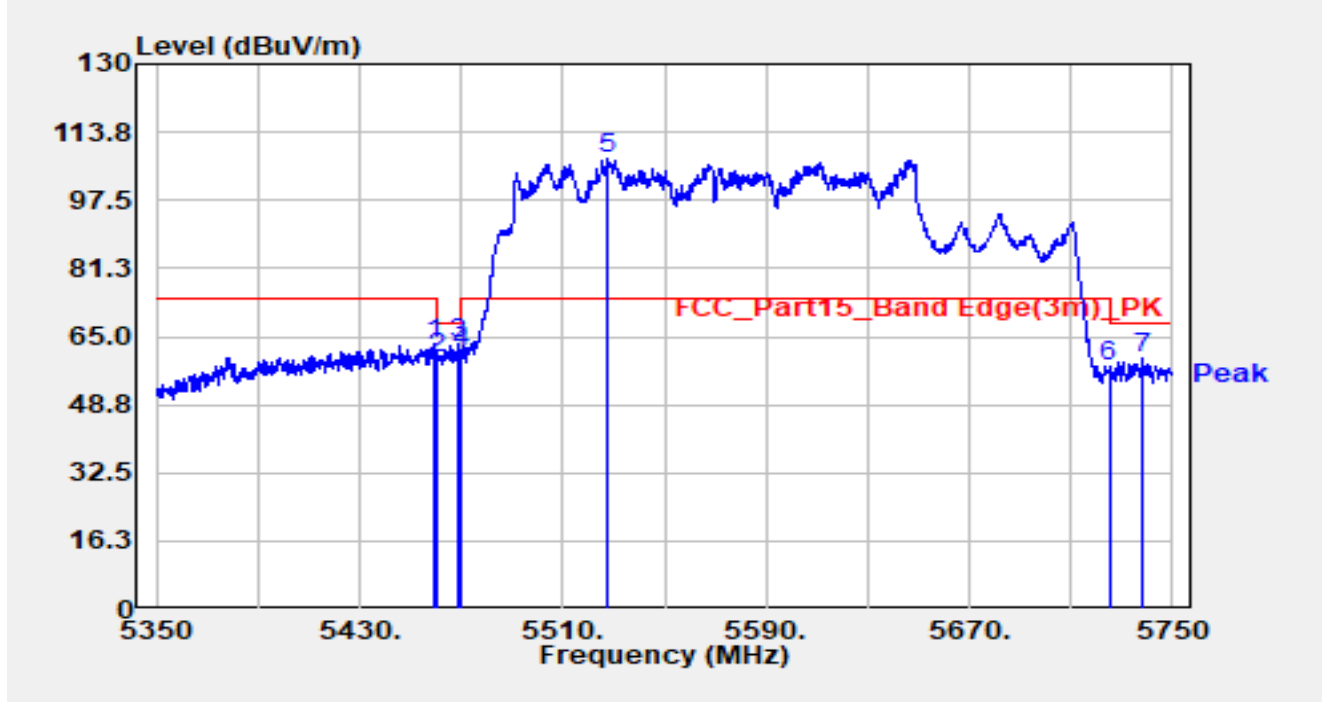


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5459.200	67.34	-3.97	63.37	-10.63	74.00	Peak
2		5460.000	63.89	-3.86	60.03	-8.17	68.20	Peak
3	*	5469.000	65.93	-2.43	63.50	-4.70	68.20	Peak
4		5470.000	63.62	-2.10	61.51	-6.69	68.20	Peak
5		5527.800	63.66	43.87	107.52	N/A	N/A	Peak
6		5725.000	59.85	-2.12	57.74	-10.46	68.20	Peak
7		5738.400	64.72	-4.77	59.96	-8.24	68.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-04
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 5570MHz		

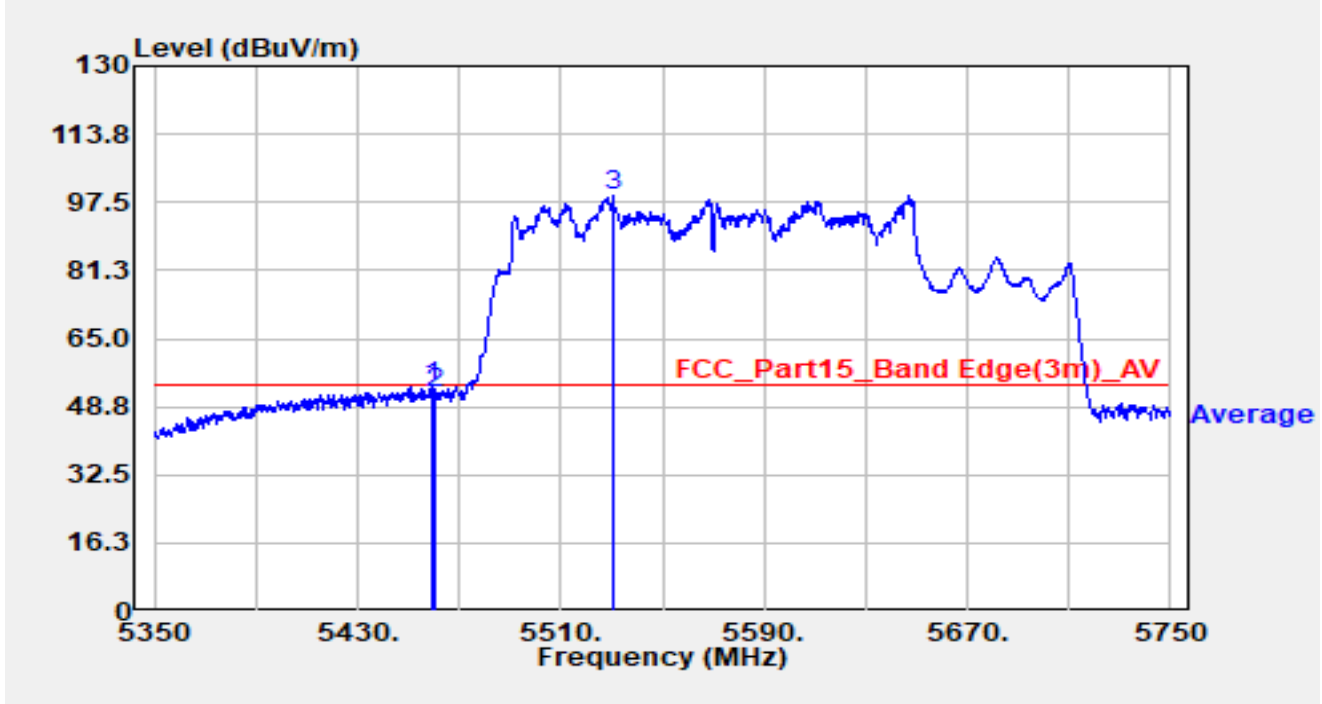


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5459.000	57.45	-3.98	53.46	-0.54	54.00	Average
2		5460.000	55.64	-3.86	51.78	-2.22	54.00	Average
3		5530.400	50.93	48.23	99.16	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-04
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 5570MHz		

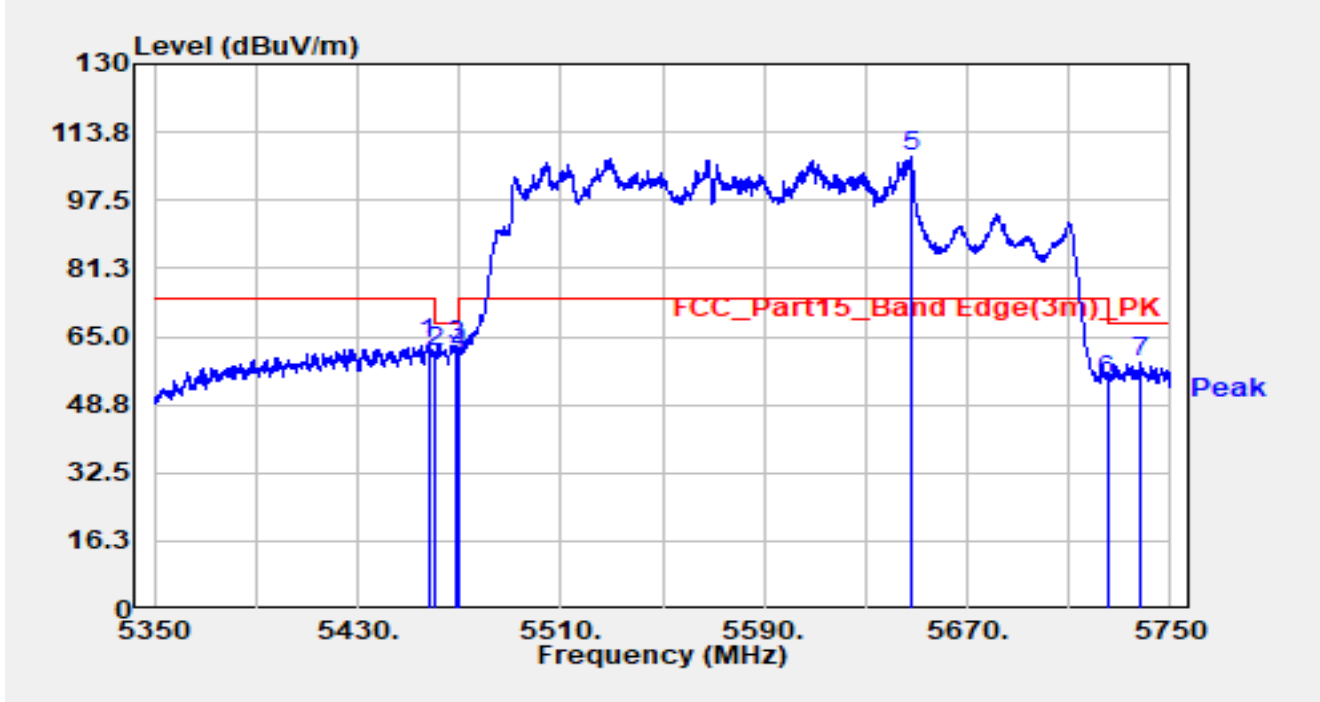


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5457.800	67.13	-4.07	63.06	-10.94	74.00	Peak
2		5460.000	64.97	-3.86	61.10	-7.10	68.20	Peak
3	*	5468.800	65.50	-2.53	62.97	-5.23	68.20	Peak
4		5470.000	62.95	-2.10	60.85	-7.35	68.20	Peak
5		5647.600	64.79	42.98	107.77	N/A	N/A	Peak
6		5725.000	56.78	-2.12	54.67	-13.53	68.20	Peak
7		5737.800	63.40	-4.76	58.64	-9.56	68.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-04
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11ax-HE160 at 5570MHz		

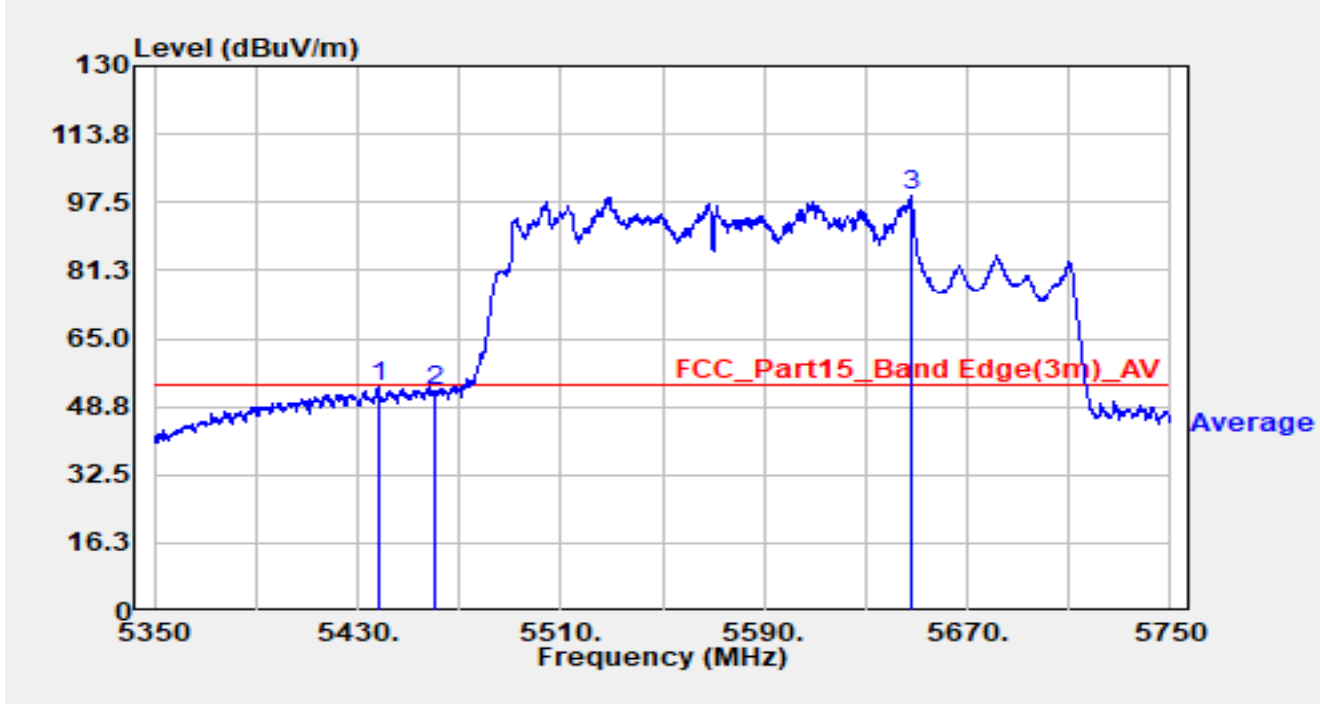


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5438.000	58.35	-4.91	53.44	-0.56	54.00	Average
2		5460.000	56.40	-3.86	52.53	-1.47	54.00	Average
3		5647.800	55.57	43.29	98.86	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2024-07-03
Test Engineer	Oliver Cheng	Temp./Humidity	24.3°C/65.2%
Factor	BBHA 9120D_02042_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5180MHz		

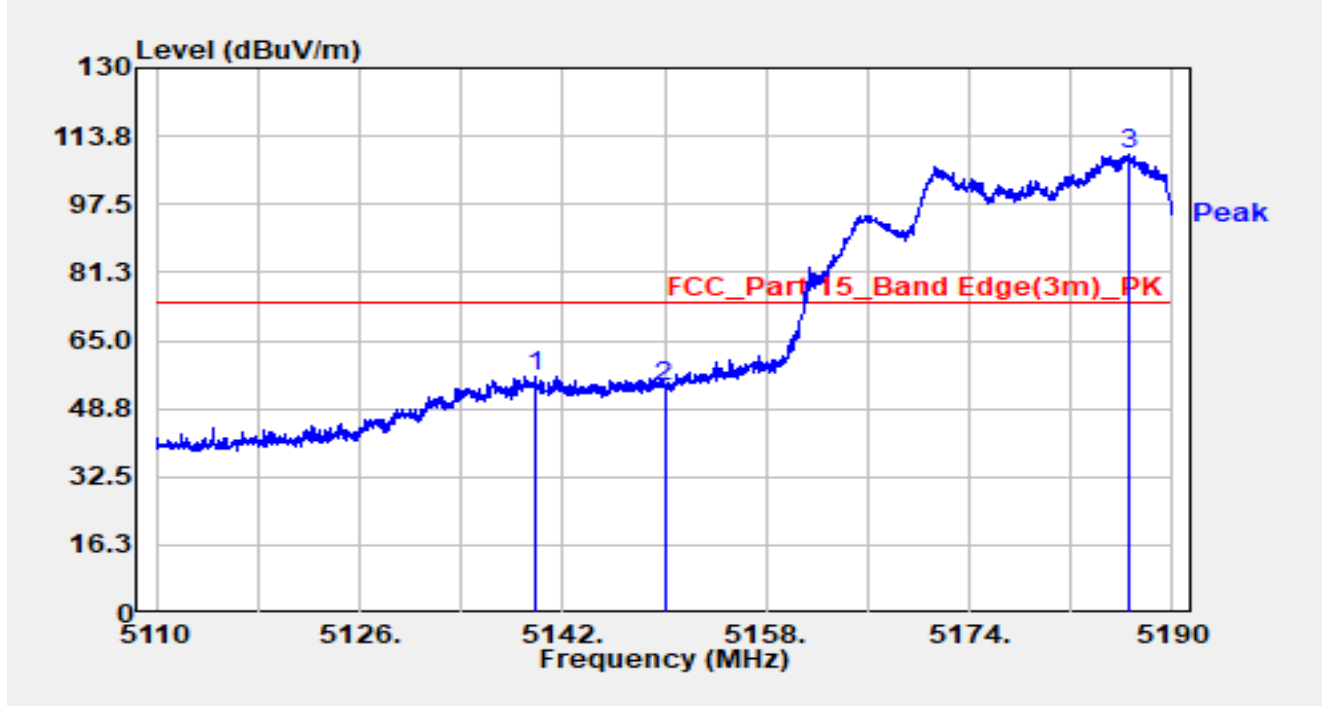


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5139.880	59.63	-3.08	56.55	-17.45	74.00	Peak
2		5150.000	55.59	-1.72	53.86	-20.14	74.00	Peak
3		5186.520	72.46	36.82	109.28	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2024-07-03
Test Engineer	Oliver Cheng	Temp./Humidity	24.3°C/65.2%
Factor	BBHA 9120D_02042_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5180MHz		

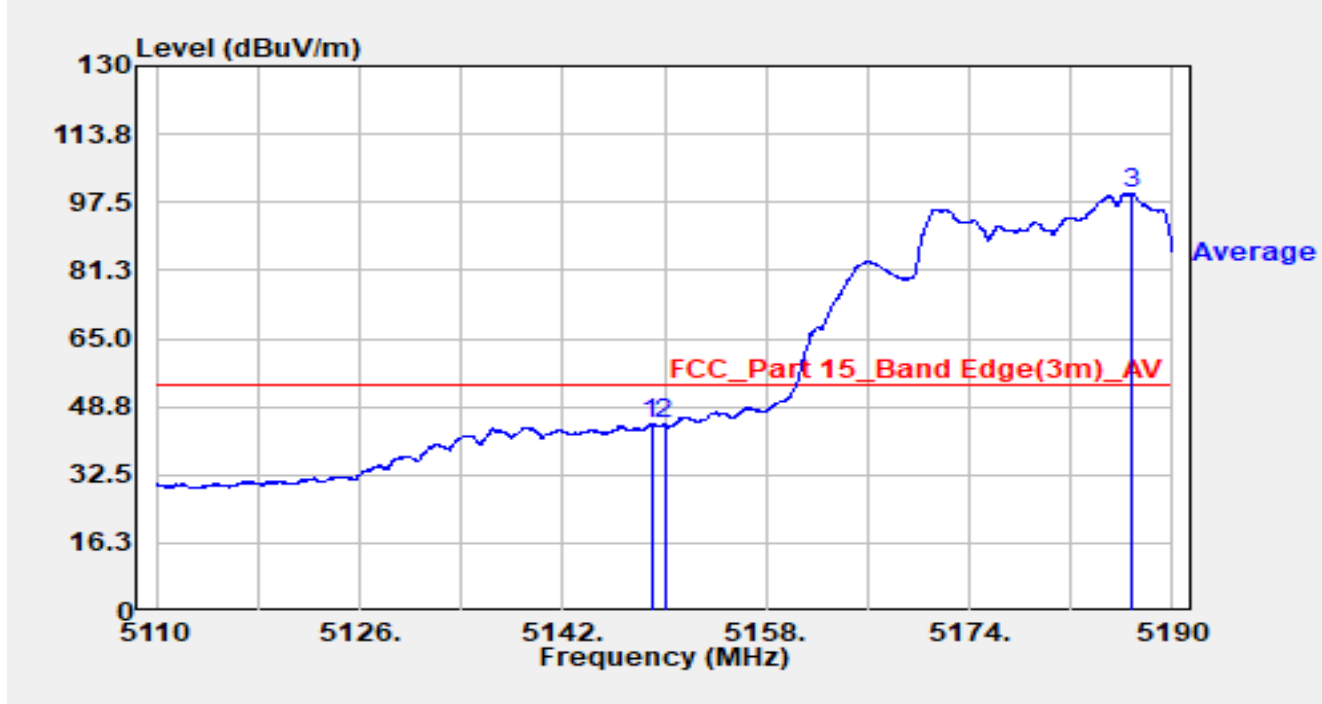


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5148.960	46.80	-1.92	44.88	-9.12	54.00	Average
2		5150.000	46.12	-1.72	44.40	-9.60	54.00	Average
3		5186.880	62.42	37.13	99.55	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2024-07-03
Test Engineer	Oliver Cheng	Temp./Humidity	24.3°C/65.2%
Factor	BBHA 9120D_02042_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5180MHz		

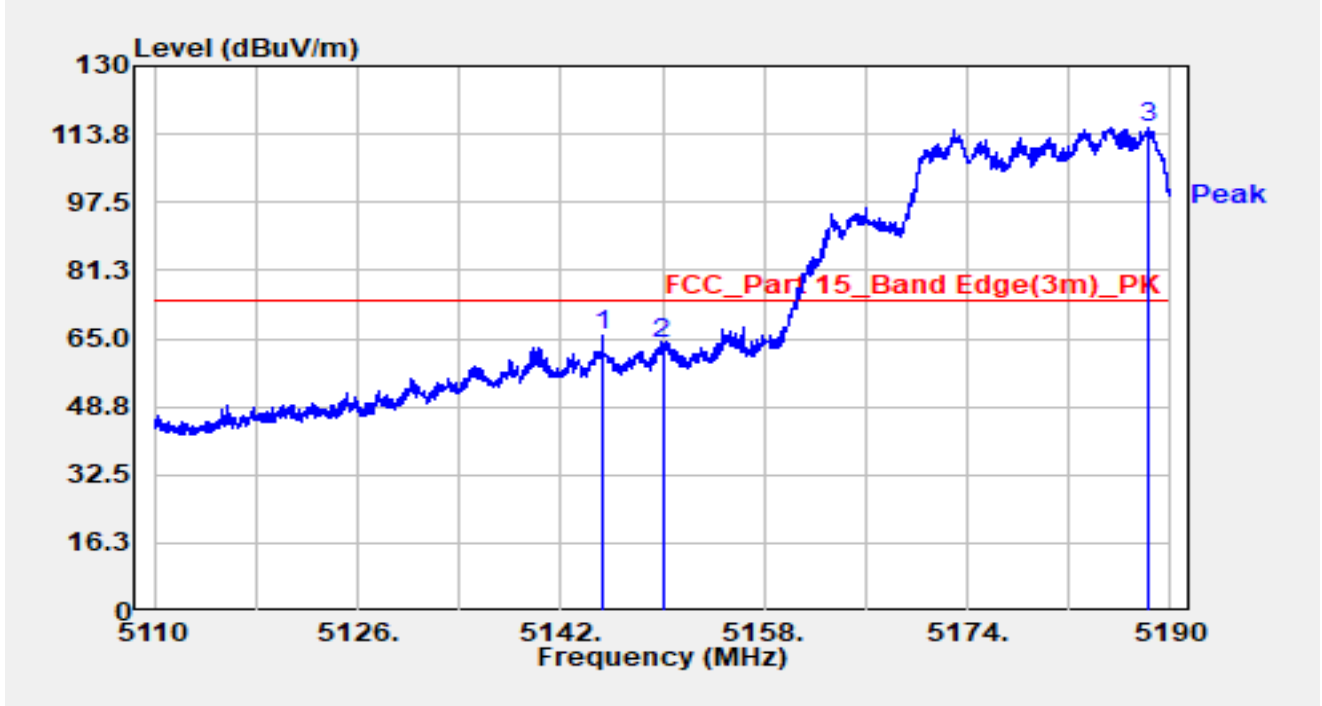


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5145.320	68.29	-2.53	65.76	-8.24	74.00	Peak
2		5150.000	65.74	-1.72	64.01	-9.99	74.00	Peak
3		5188.160	76.55	38.77	115.33	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2024-07-03
Test Engineer	Oliver Cheng	Temp./Humidity	24.3°C/65.2%
Factor	BBHA 9120D_02042_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5180MHz		

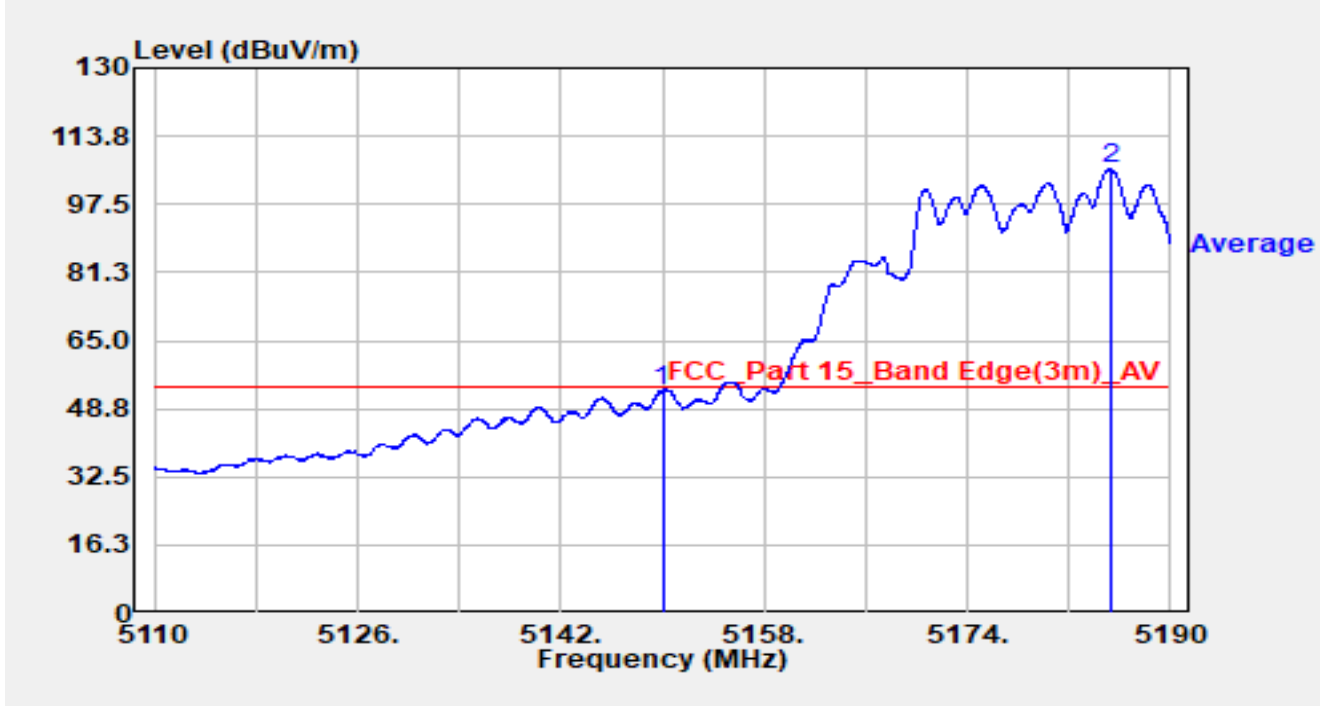


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.000	54.80	-1.72	53.08	-0.92	54.00	Average
2		5185.280	69.68	36.27	105.95	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-03
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	BBHA 9120D_02042_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5320MHz		

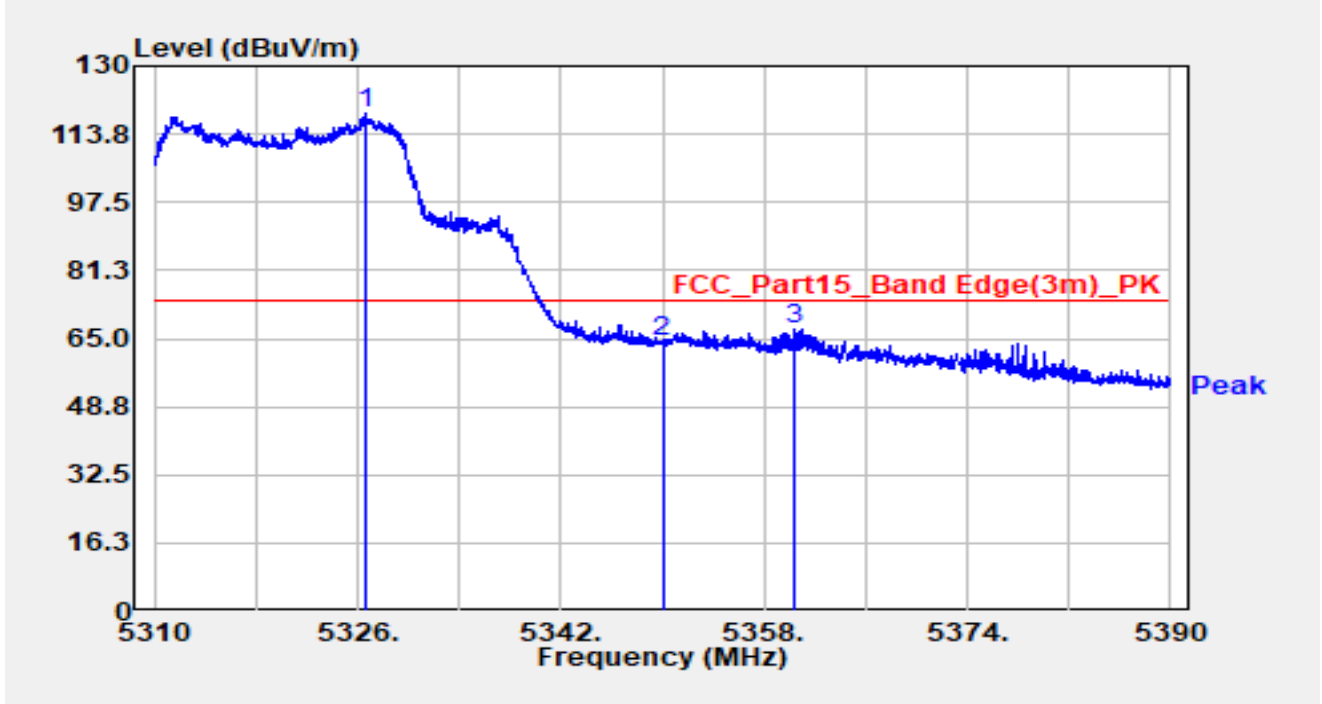


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5326.560	82.86	35.69	118.55	N/A	N/A	Peak
2		5350.000	68.89	-4.50	64.38	-9.62	74.00	Peak
3	*	5360.280	74.32	-7.14	67.18	-6.82	74.00	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-03
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	BBHA 9120D_02042_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5320MHz		

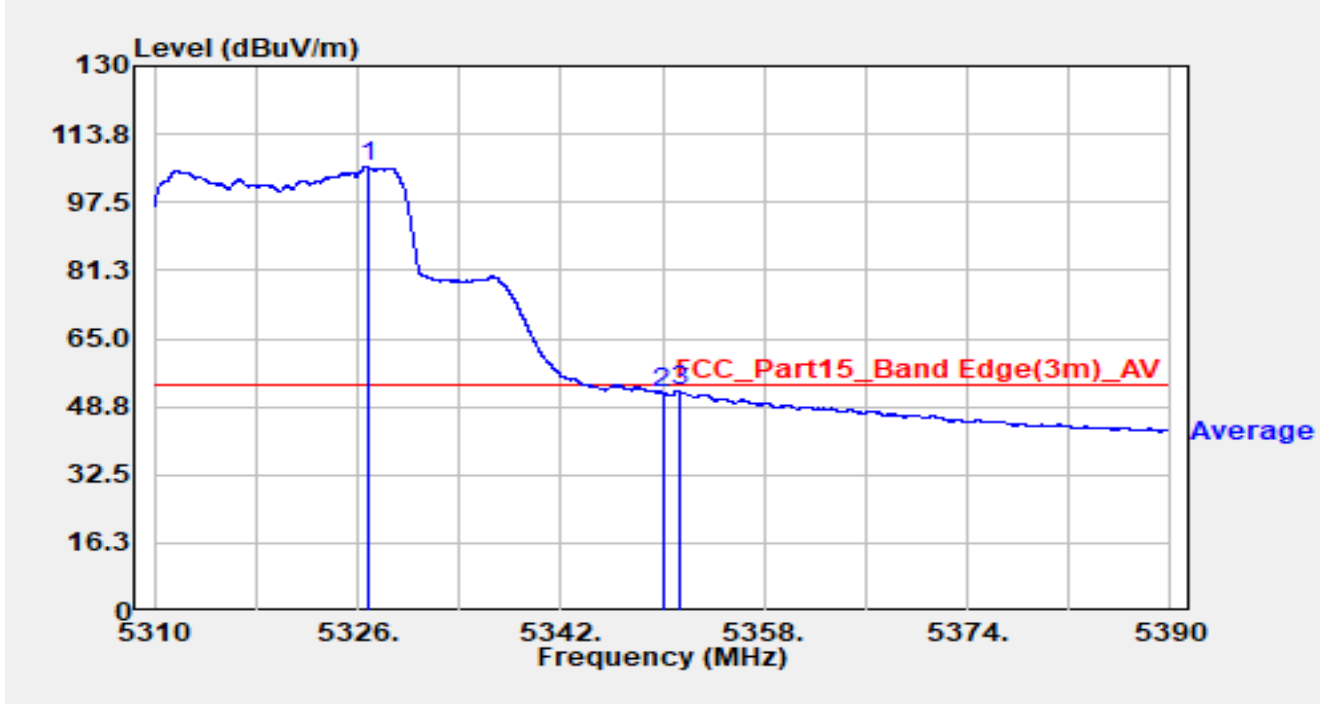


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5326.760	70.26	35.80	106.06	N/A	N/A	Average
2		5350.000	56.72	-4.50	52.21	-1.79	54.00	Average
3	*	5351.440	57.62	-5.22	52.41	-1.59	54.00	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-03
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	BBHA 9120D_02042_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5320MHz		

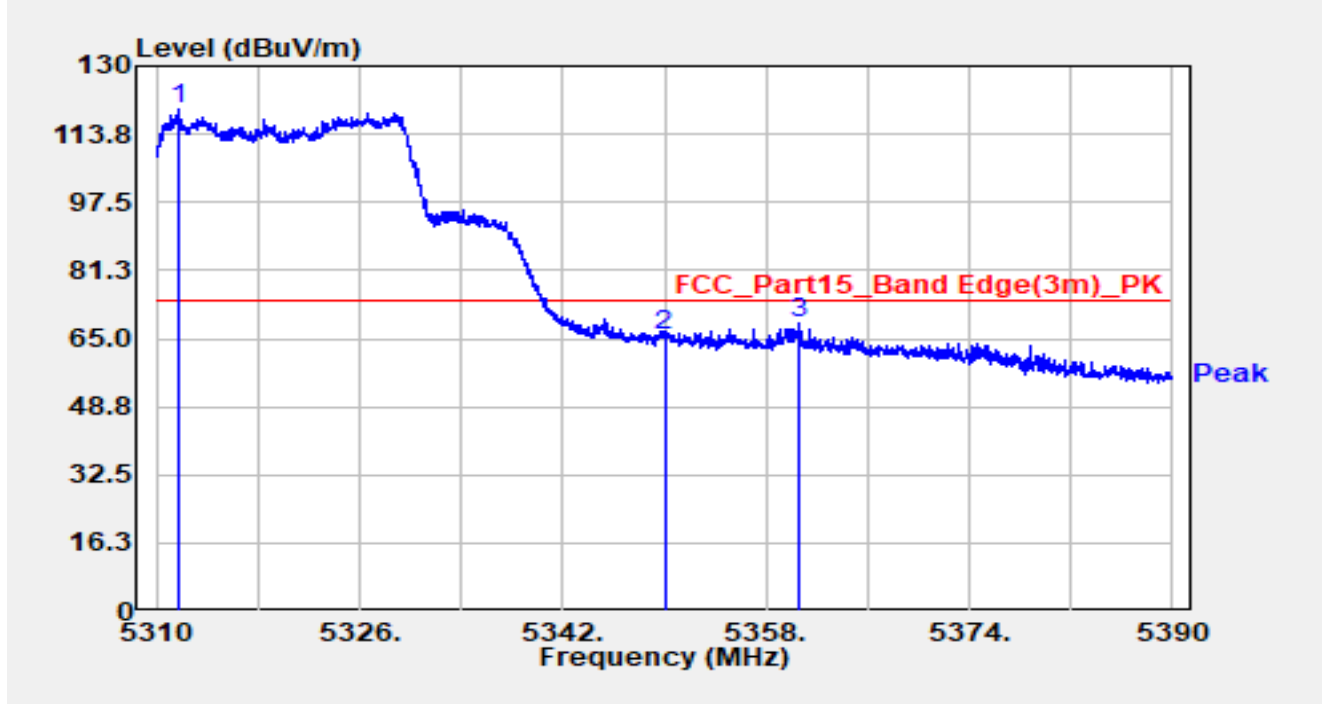


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5311.680	78.01	41.69	119.70	N/A	N/A	Peak
2		5350.000	70.07	-4.50	65.57	-8.43	74.00	Peak
3	*	5360.560	75.89	-7.19	68.70	-5.30	74.00	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-03
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	BBHA 9120D_02042_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5320MHz		

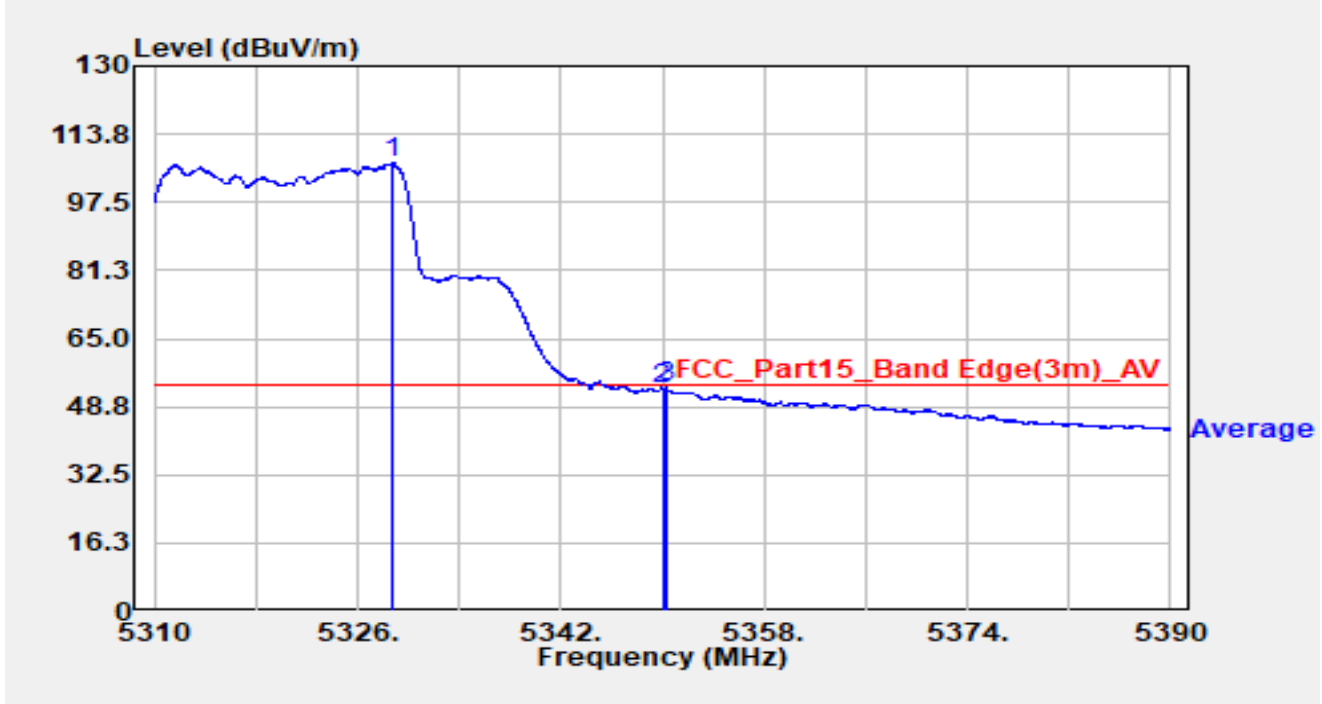


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5328.680	69.29	37.48	106.77	N/A	N/A	Average
2		5350.000	57.56	-4.50	53.06	-0.94	54.00	Average
3	*	5350.240	57.88	-4.63	53.25	-0.75	54.00	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-04
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5500MHz		

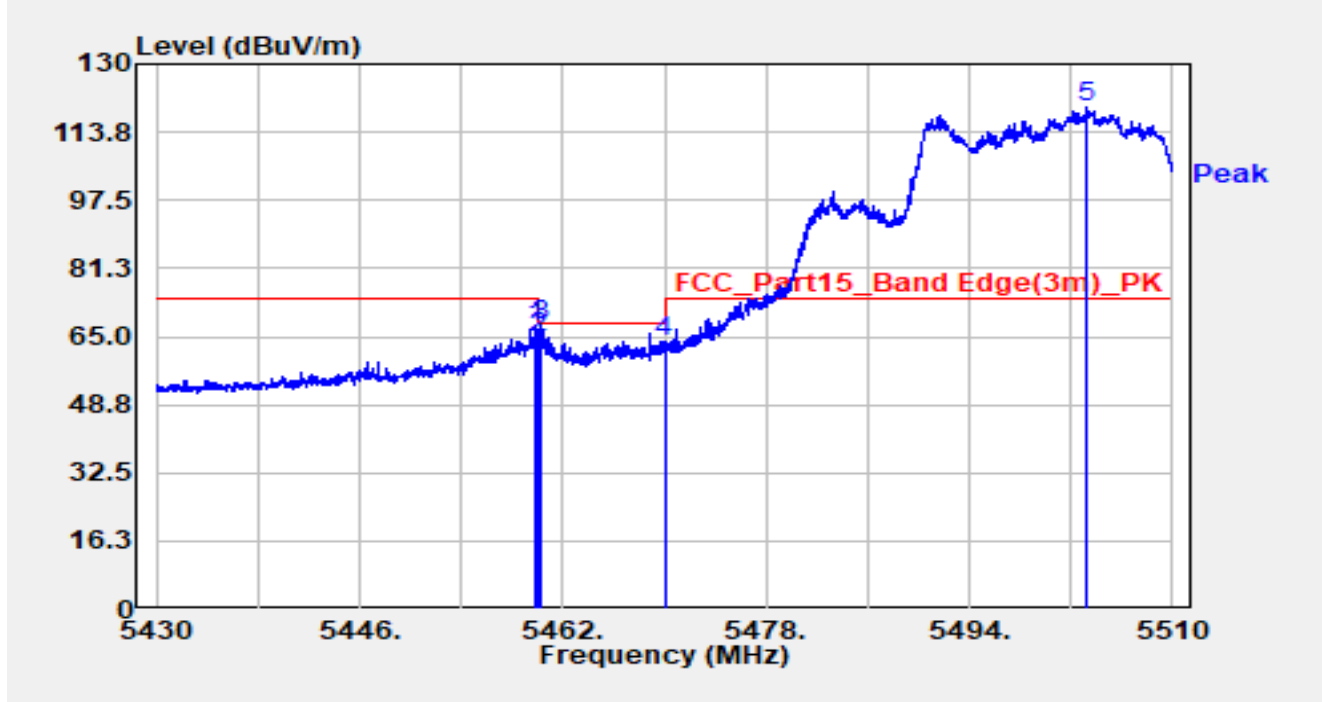


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5459.920	71.02	-3.88	67.15	-6.85	74.00	Peak
2		5460.000	68.49	-3.86	64.62	-3.58	68.20	Peak
3	*	5460.160	71.77	-3.88	67.89	-0.31	68.20	Peak
4		5470.000	65.76	-2.10	63.66	-4.54	68.20	Peak
5		5503.320	77.44	42.19	119.63	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-04
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5500MHz		

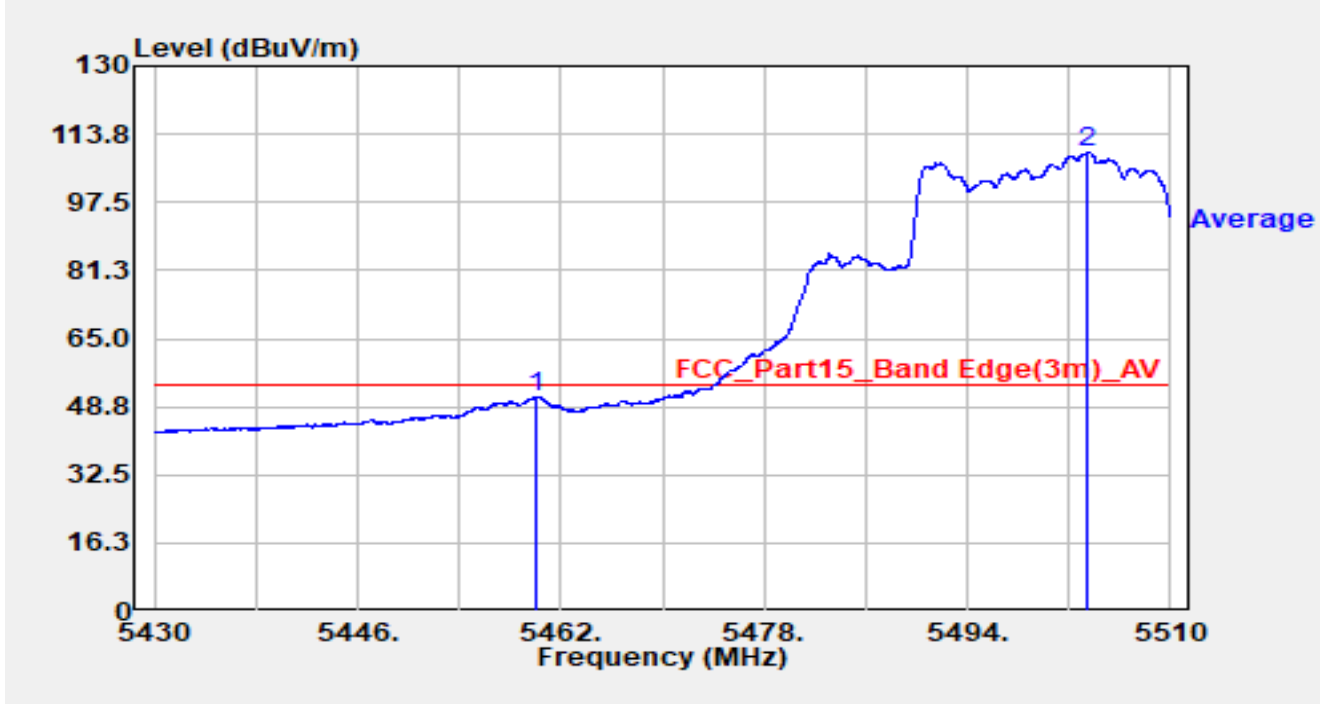


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.000	54.87	-3.86	51.00	-3.00	54.00	Average
2		5503.480	66.99	42.45	109.45	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-04
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5500MHz		

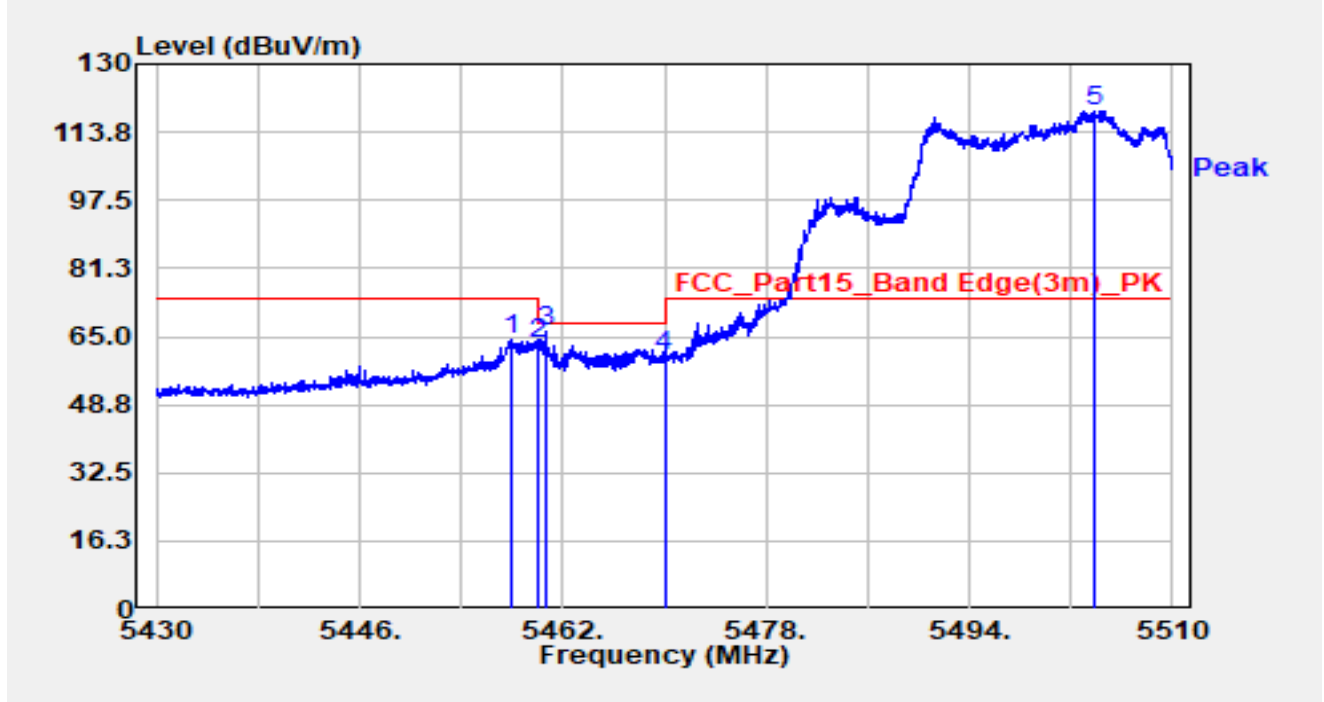


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5457.960	68.46	-4.04	64.42	-9.58	74.00	Peak
2		5460.000	66.99	-3.86	63.13	-5.07	68.20	Peak
3	*	5460.720	69.89	-3.87	66.02	-2.18	68.20	Peak
4		5470.000	62.58	-2.10	60.48	-7.72	68.20	Peak
5		5503.760	75.92	42.84	118.75	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-04
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5500MHz		

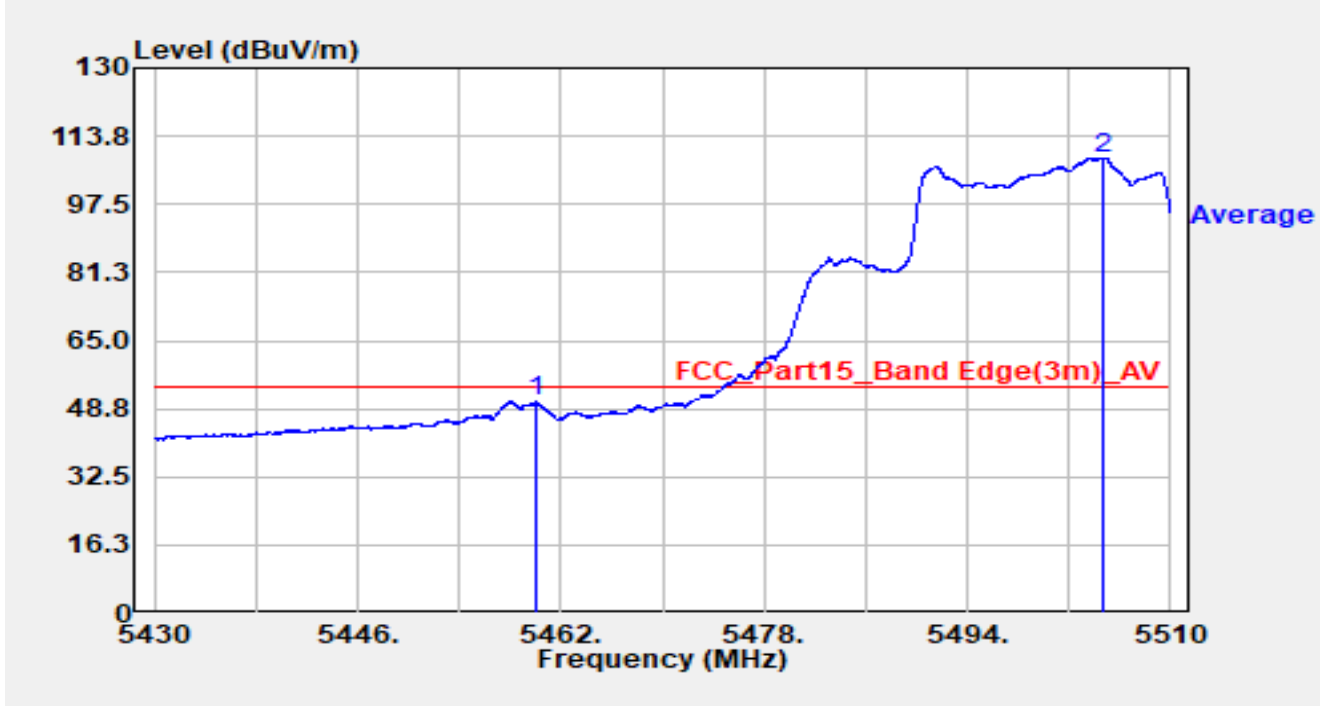


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.000	54.41	-3.86	50.54	-3.46	54.00	Average
2		5504.720	65.12	43.54	108.66	N/A	N/A	Average

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 16dB Attenuation (dB) - AMP (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-04
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5500MHz		

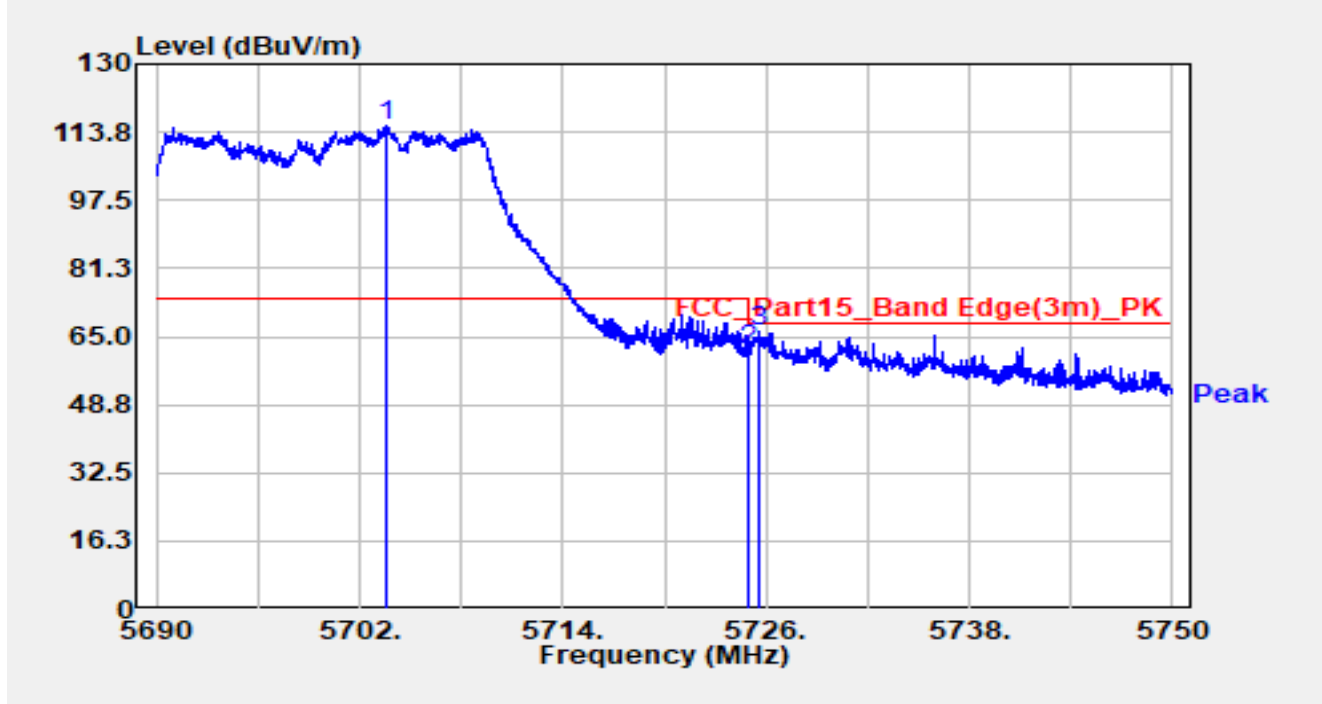


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5703.560	77.47	37.68	115.15	N/A	N/A	Peak
2		5725.000	63.95	-2.12	61.83	-6.37	68.20	Peak
3	*	5725.640	68.55	-2.47	66.08	-2.12	68.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-04
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5500MHz		

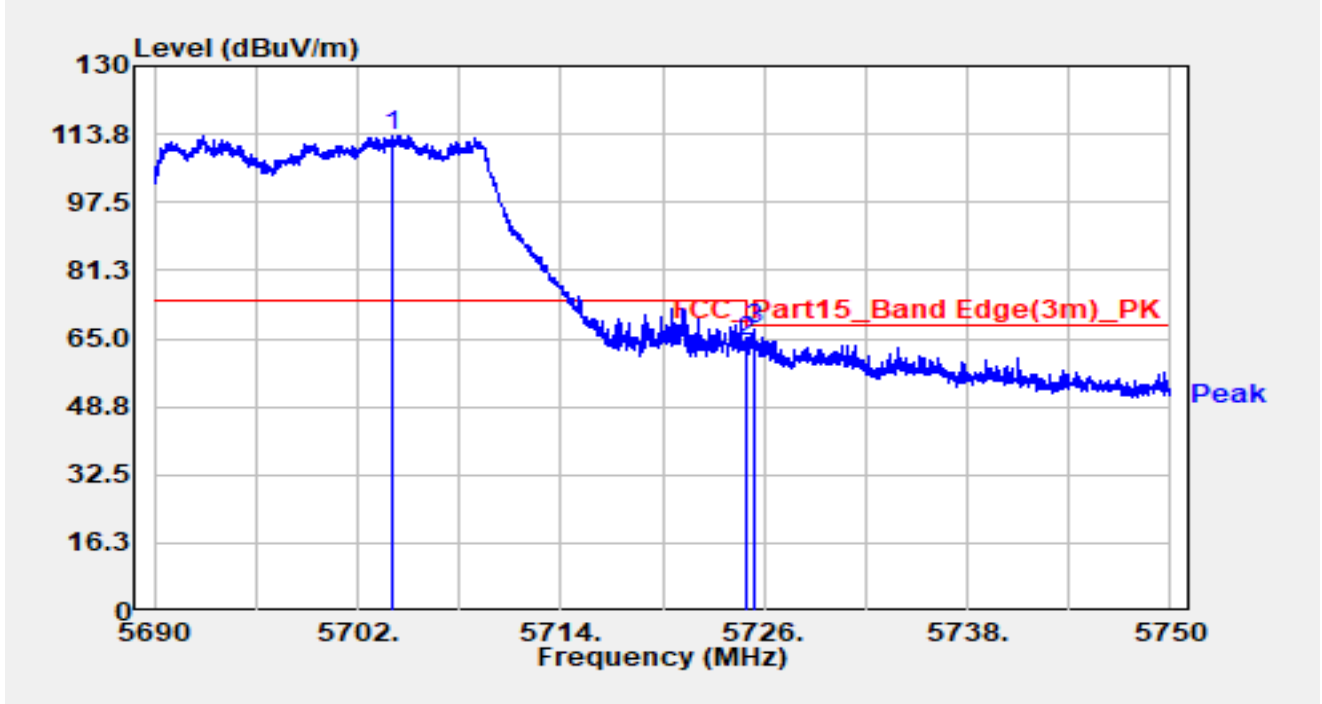


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5704.010	75.62	37.88	113.51	N/A	N/A	Peak
2		5725.000	66.19	-2.12	64.07	-4.13	68.20	Peak
3	*	5725.400	69.30	-2.34	66.97	-1.23	68.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-05
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5745MHz		

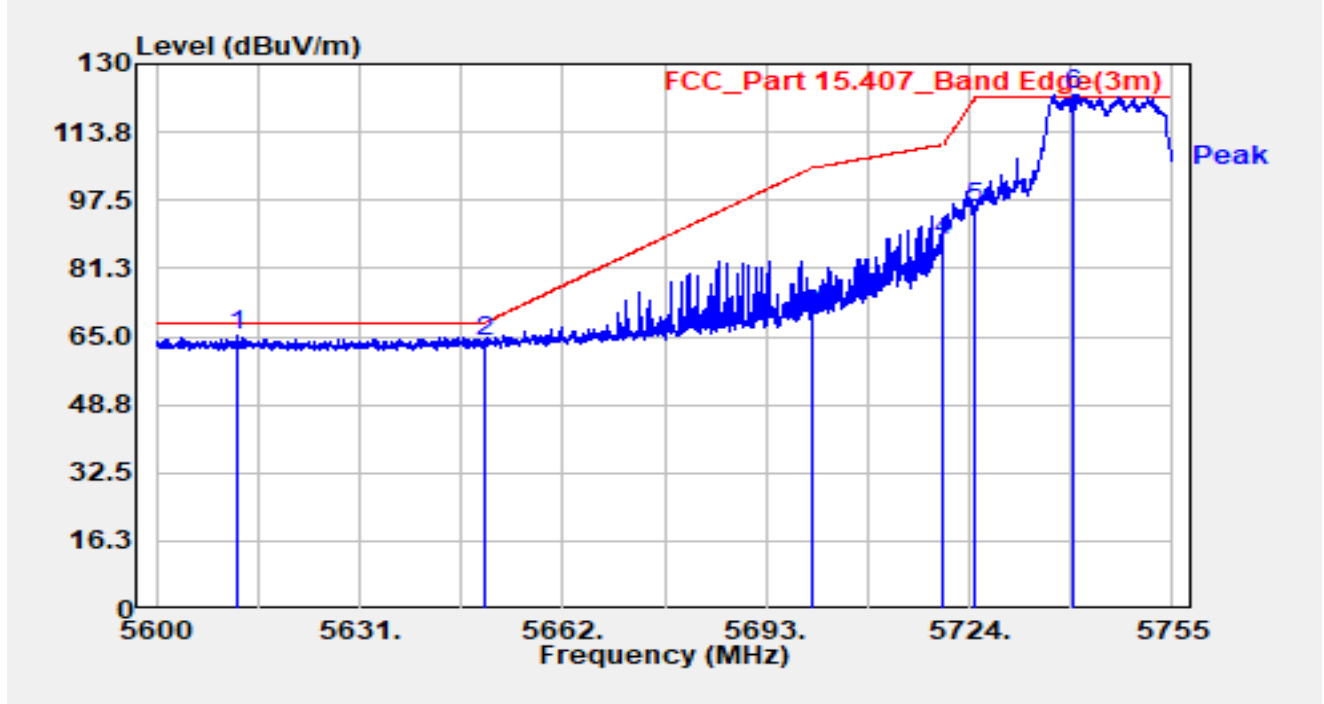


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5612.478	72.34	-7.08	65.26	-2.94	68.20	Peak
2		5650.000	70.92	-7.14	63.78	-4.42	68.20	Peak
3		5700.000	77.00	-7.06	69.94	-35.26	105.20	Peak
4		5720.000	95.08	-7.20	87.89	-22.91	110.80	Peak
5		5725.000	102.86	-7.22	95.64	-26.56	122.20	Peak
6		5739.810	130.24	-7.37	122.87	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-05
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5745MHz		

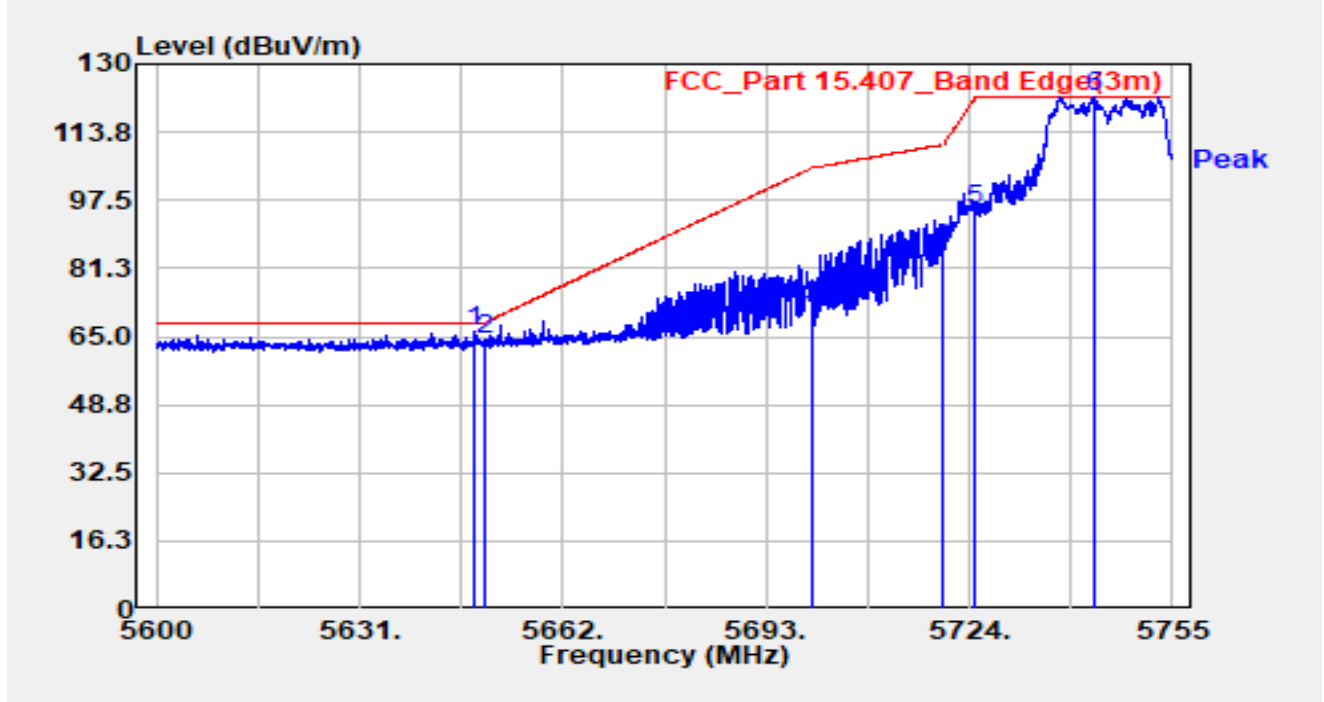


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5648.360	73.24	-7.15	66.09	-2.11	68.20	Peak
2		5650.000	71.23	-7.14	64.09	-4.11	68.20	Peak
3		5700.000	79.17	-7.06	72.11	-33.09	105.20	Peak
4		5720.000	93.09	-7.20	85.89	-24.91	110.80	Peak
5		5725.000	102.33	-7.22	95.11	-27.09	122.20	Peak
6		5743.220	129.61	-7.41	122.20	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-05
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5825MHz		

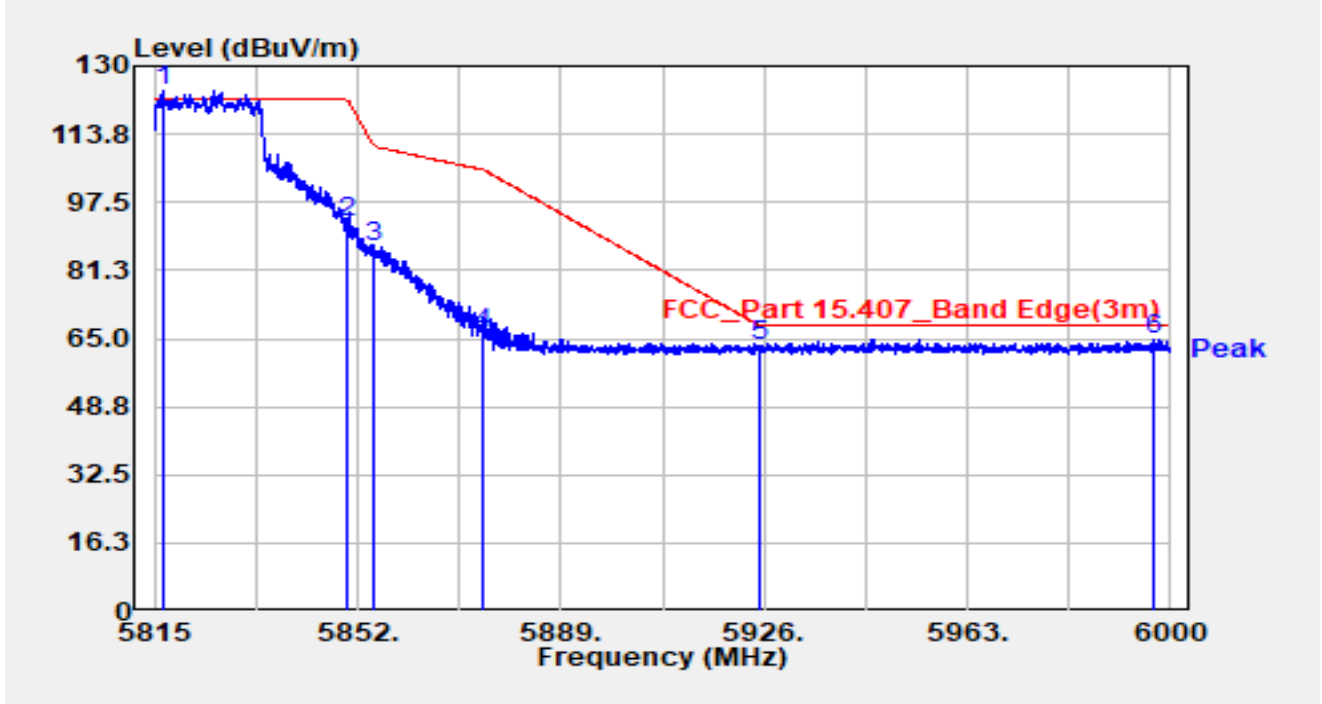


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5816.572	130.95	-7.04	123.91	N/A	N/A	Peak
2		5850.000	99.56	-7.06	92.50	-29.70	122.20	Peak
3		5855.000	93.67	-7.07	86.60	-24.20	110.80	Peak
4		5875.000	73.60	-7.15	66.45	-38.75	105.20	Peak
5		5925.000	70.36	-7.01	63.35	-4.85	68.20	Peak
6	*	5997.132	71.69	-6.71	64.98	-3.22	68.20	Peak

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-05
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 5825MHz		

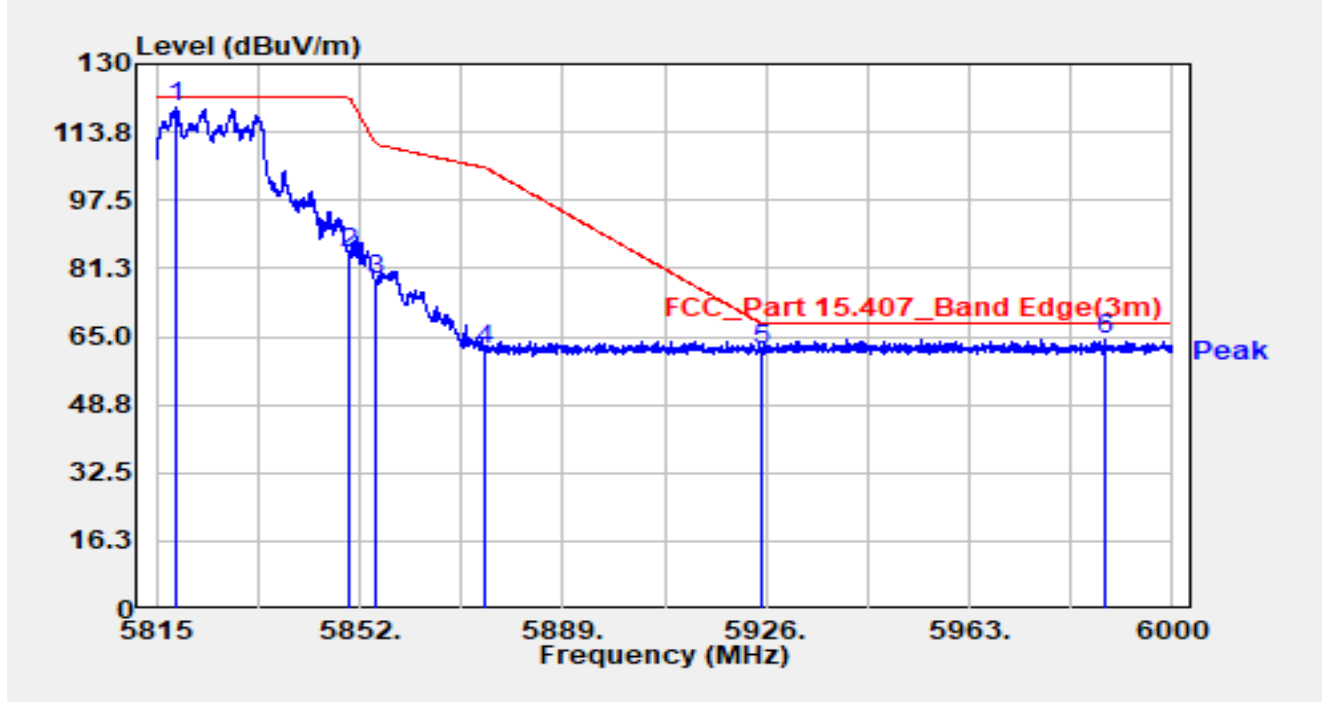


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5818.607	126.67	-7.04	119.63	N/A	N/A	Peak
2		5850.000	91.91	-7.06	84.85	-37.35	122.20	Peak
3		5855.000	85.37	-7.07	78.30	-32.50	110.80	Peak
4		5875.000	68.90	-7.15	61.75	-43.45	105.20	Peak
5		5925.000	68.82	-7.01	61.81	-6.39	68.20	Peak
6	*	5987.605	71.17	-6.87	64.30	-3.90	68.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-03
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	BBHA 9120D_02042_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5190MHz		

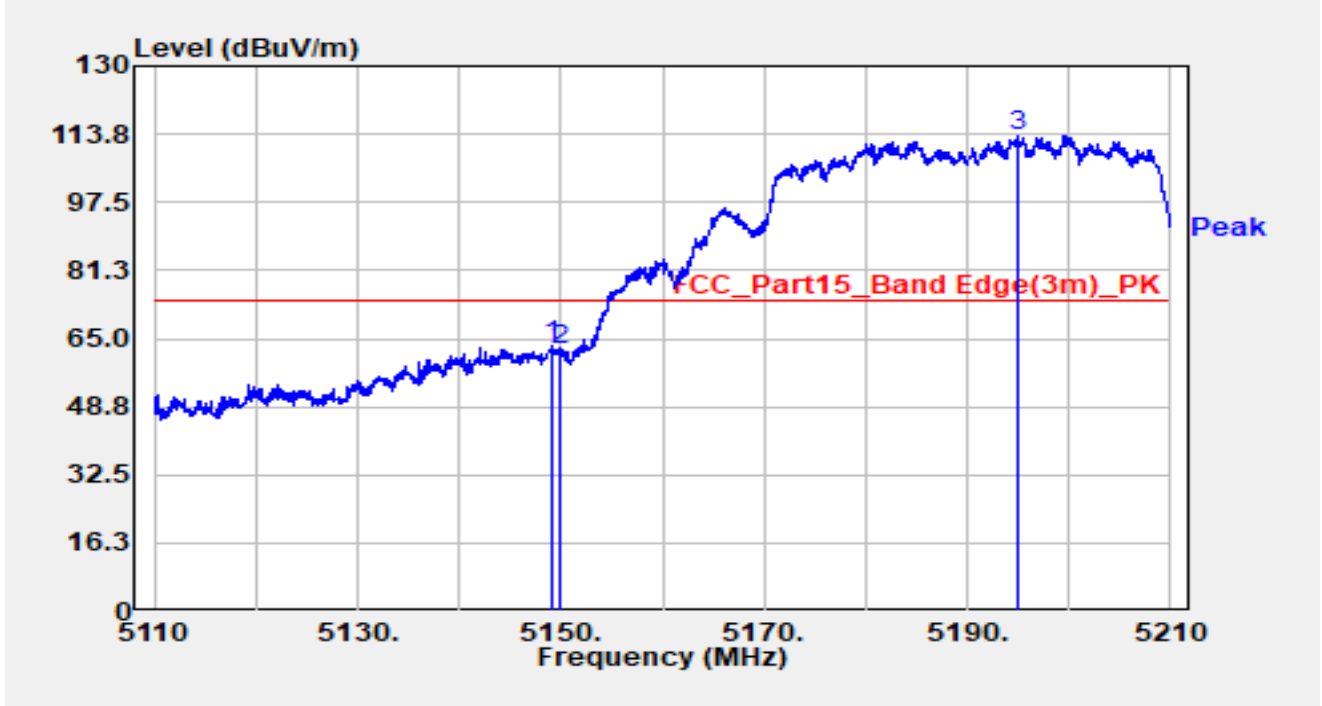


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.150	68.88	-5.65	63.23	-10.77	74.00	Peak
2		5150.000	67.68	-5.48	62.20	-11.80	74.00	Peak
3		5195.050	80.72	32.83	113.55	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-03
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	BBHA 9120D_02042_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5190MHz		

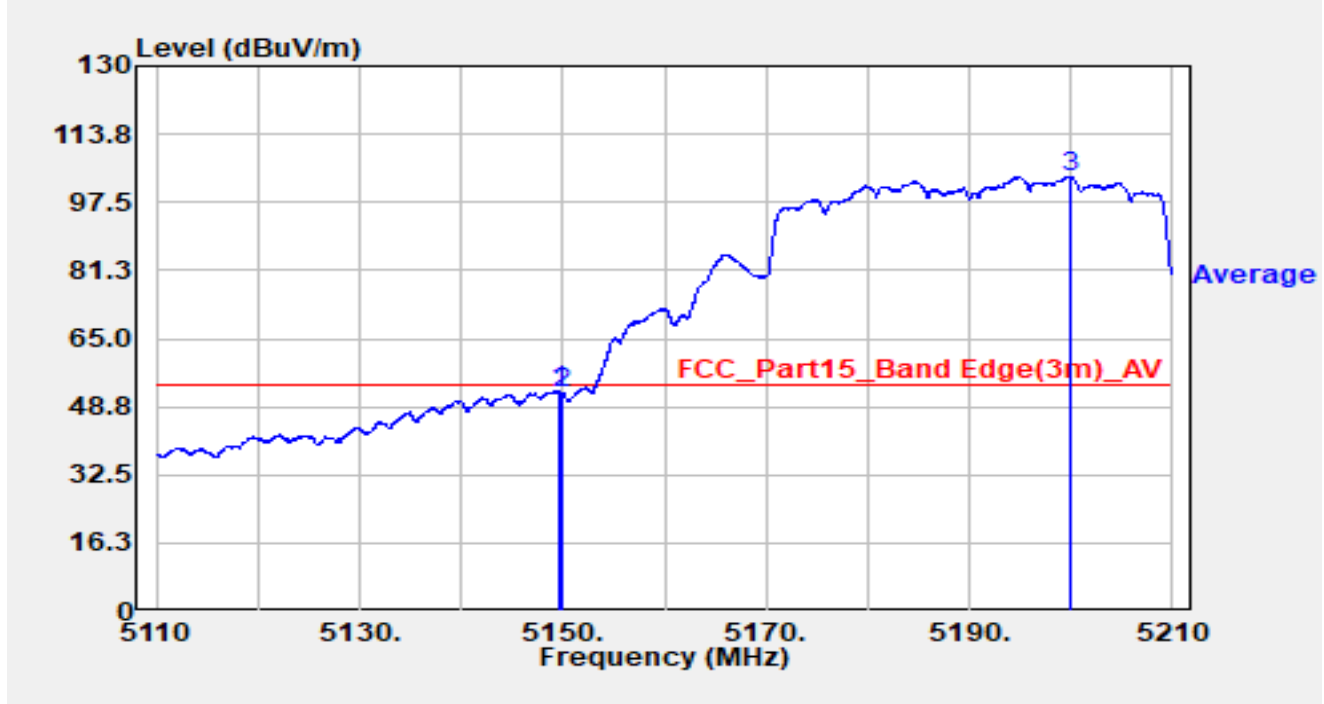


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.700	58.21	-5.56	52.65	-1.35	54.00	Average
2		5150.000	57.31	-5.48	51.83	-2.17	54.00	Average
3		5200.050	67.95	35.73	103.68	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-03
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	BBHA 9120D_02042_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5190MHz		

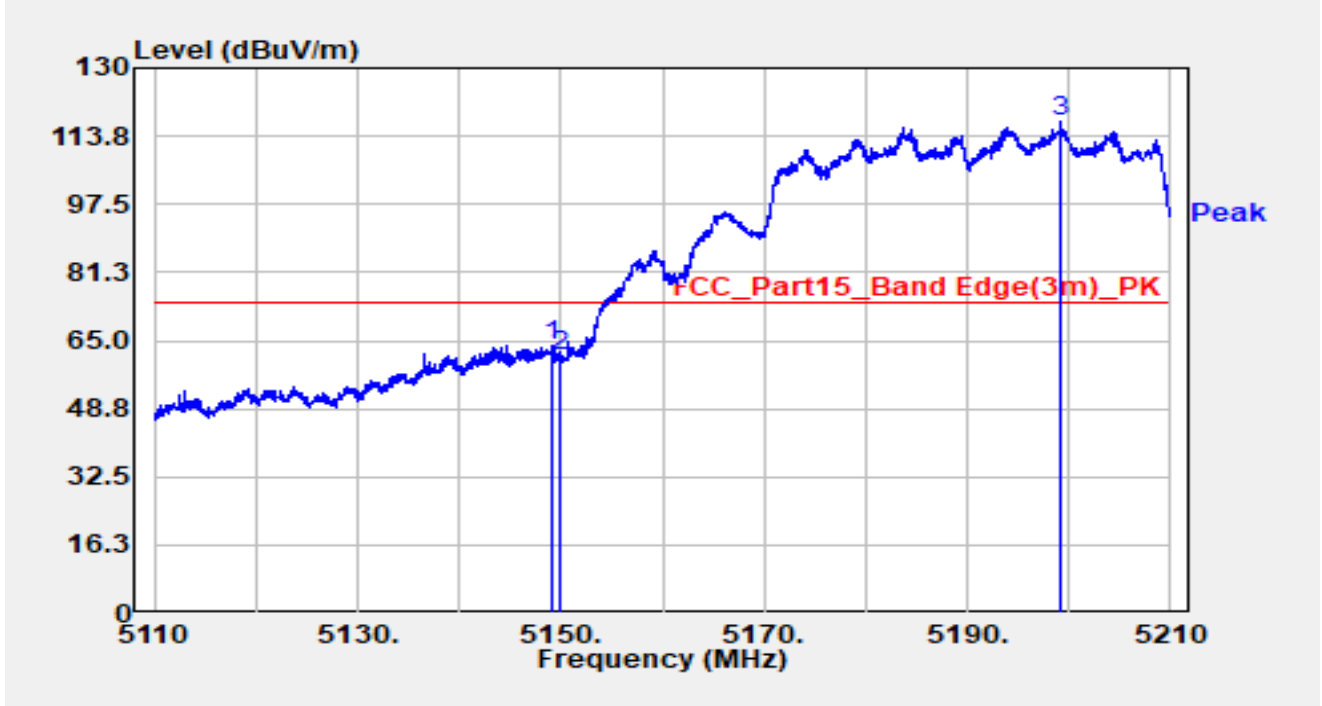


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.150	69.48	-5.65	63.83	-10.17	74.00	Peak
2		5150.000	66.56	-5.48	61.08	-12.92	74.00	Peak
3		5199.250	82.63	34.70	117.32	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-03
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	BBHA 9120D_02042_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5190MHz		

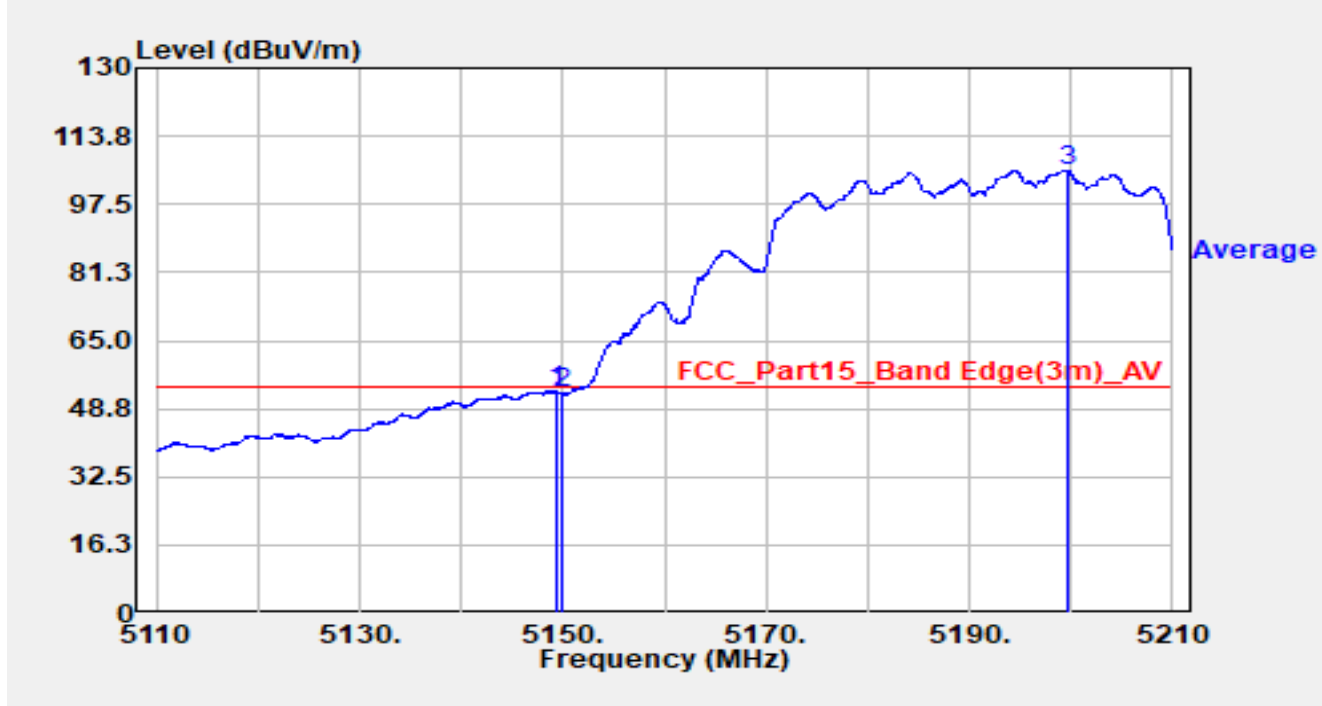


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.400	58.51	-5.61	52.90	-1.10	54.00	Average
2		5150.000	57.84	-5.48	52.36	-1.64	54.00	Average
3		5199.600	70.47	35.14	105.61	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-04
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5310MHz		

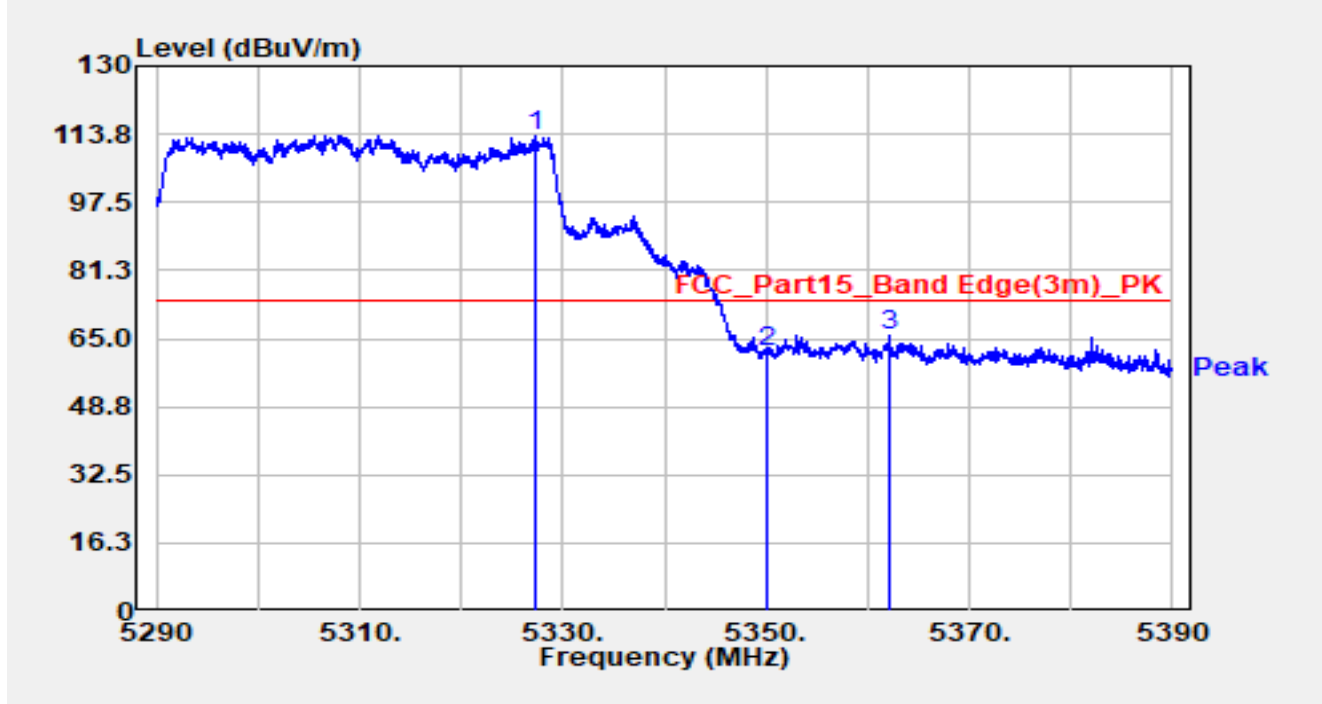


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5327.350	74.56	38.89	113.45	N/A	N/A	Peak
2		5350.000	63.80	-1.81	62.00	-12.00	74.00	Peak
3	*	5362.100	70.68	-4.71	65.98	-8.02	74.00	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-04
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5310MHz		

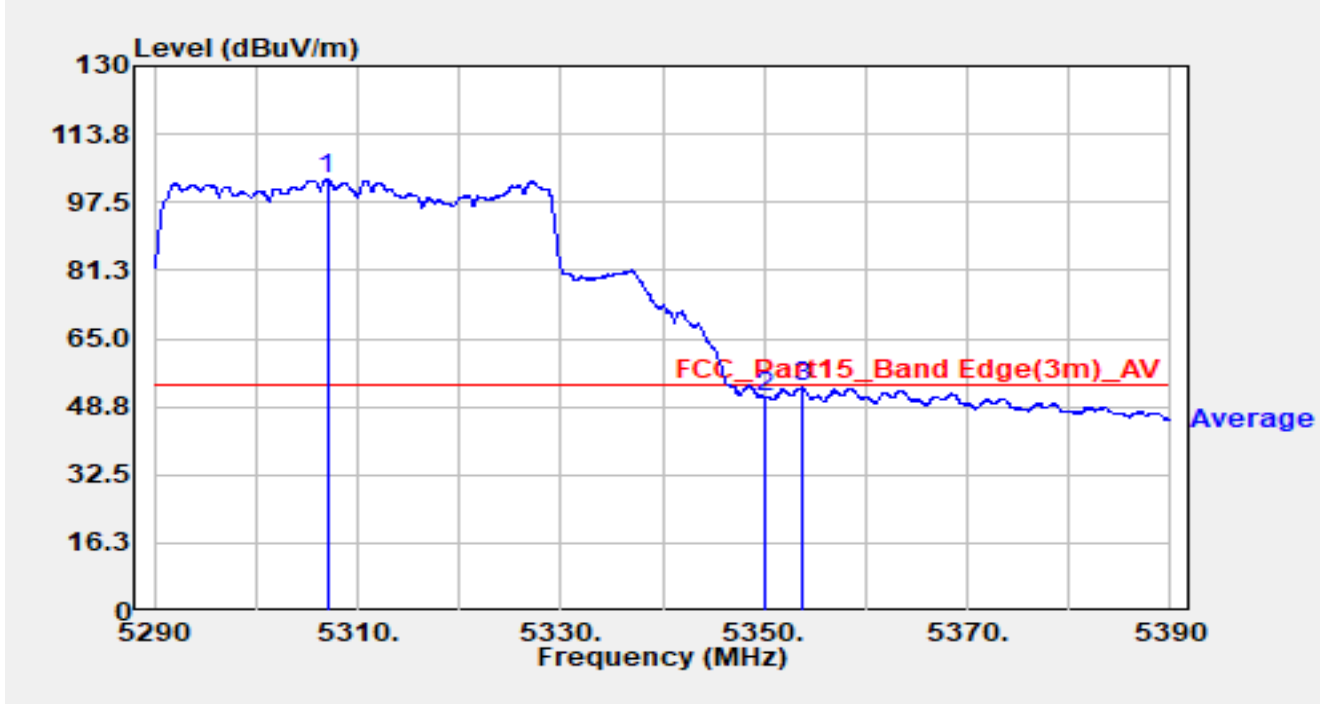


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5307.000	64.17	38.77	102.93	N/A	N/A	Average
2		5350.000	53.01	-1.81	51.20	-2.80	54.00	Average
3	*	5353.700	56.50	-3.25	53.25	-0.75	54.00	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-04
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5310MHz		

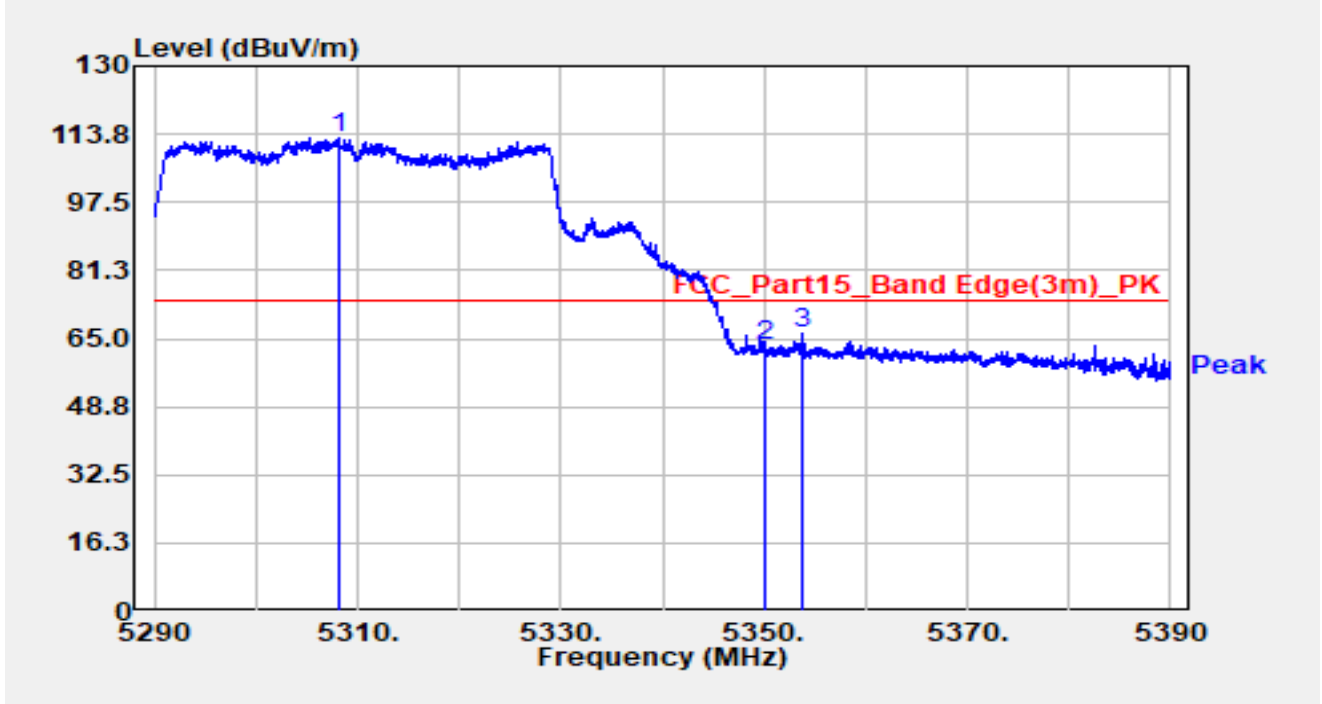


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5308.100	73.40	39.58	112.98	N/A	N/A	Peak
2		5350.000	65.00	-1.81	63.19	-10.81	74.00	Peak
3	*	5353.650	69.37	-3.24	66.14	-7.86	74.00	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-04
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5310MHz		

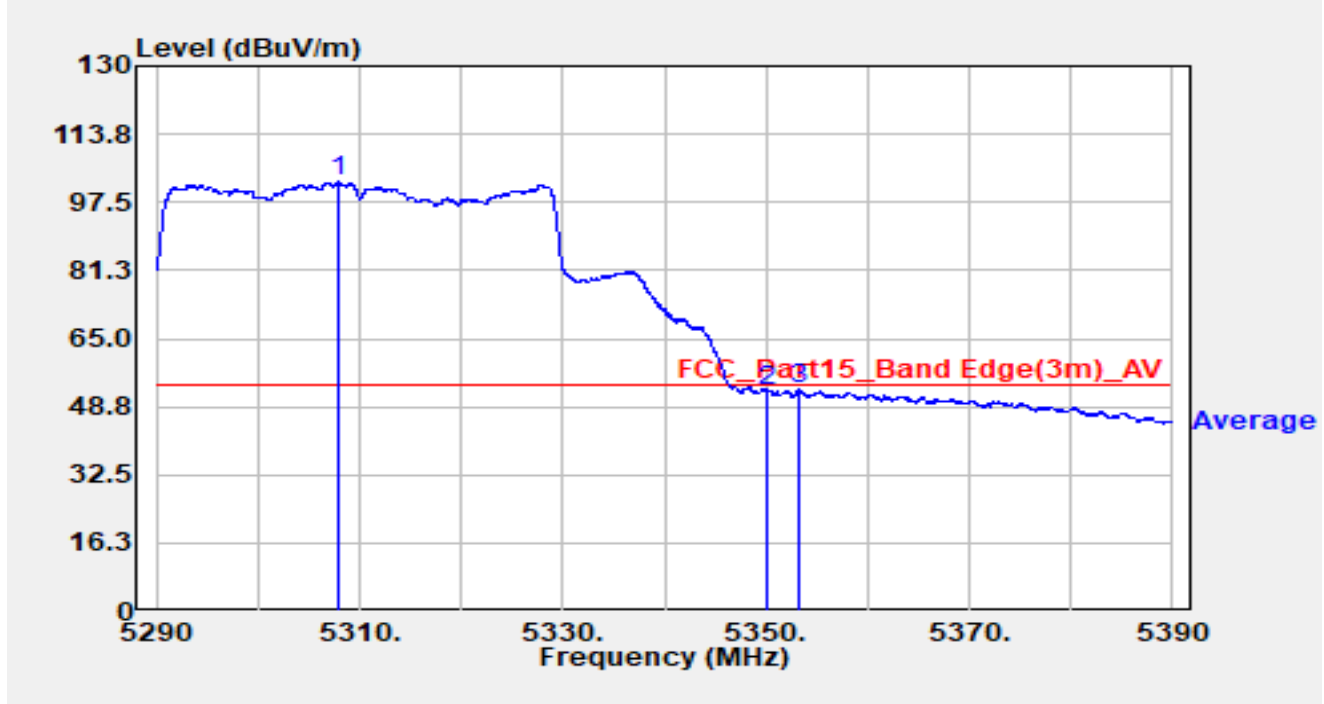


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5307.850	62.96	39.38	102.34	N/A	N/A	Average
2		5350.000	54.29	-1.81	52.49	-1.51	54.00	Average
3	*	5353.200	56.19	-3.10	53.09	-0.91	54.00	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-04
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5510MHz		

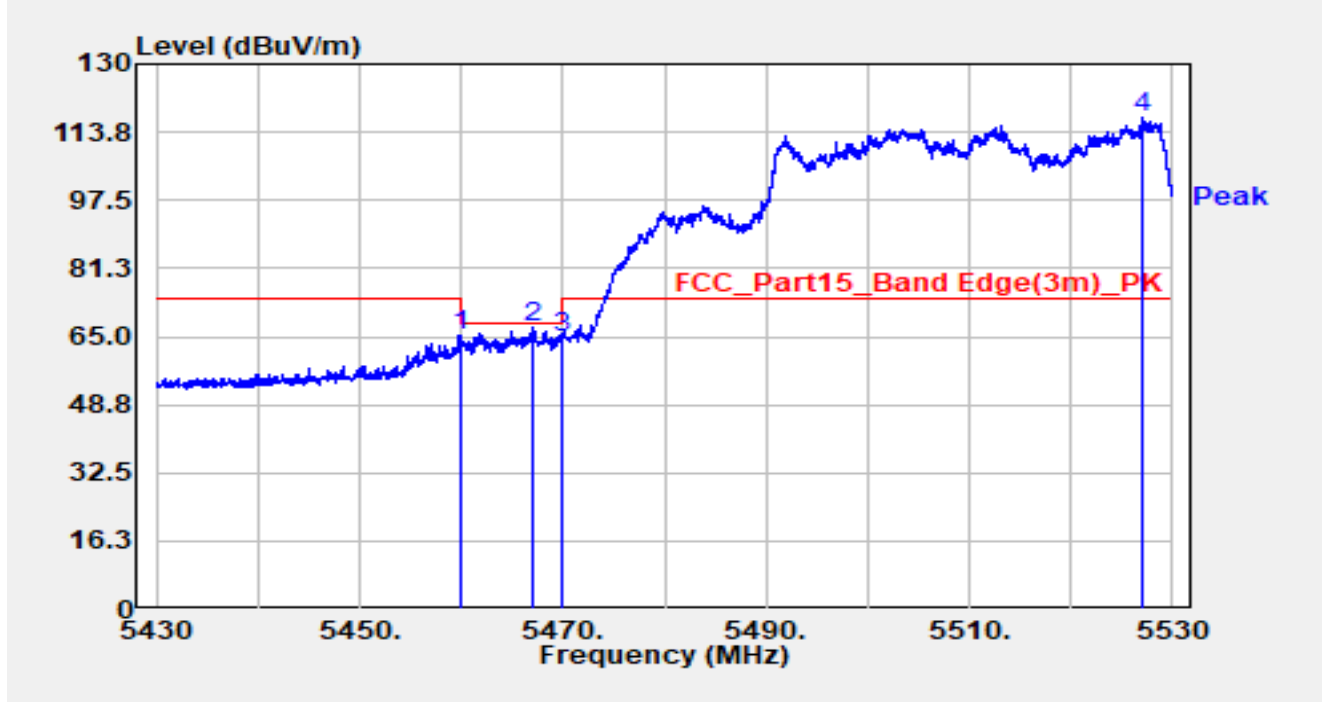


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5460.000	69.02	-3.86	65.15	-3.05	68.20	Peak
2	*	5467.000	70.01	-3.01	67.01	-1.19	68.20	Peak
3		5470.000	66.63	-2.10	64.52	-3.68	68.20	Peak
4		5526.950	74.85	42.17	117.02	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-11
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5510MHz		

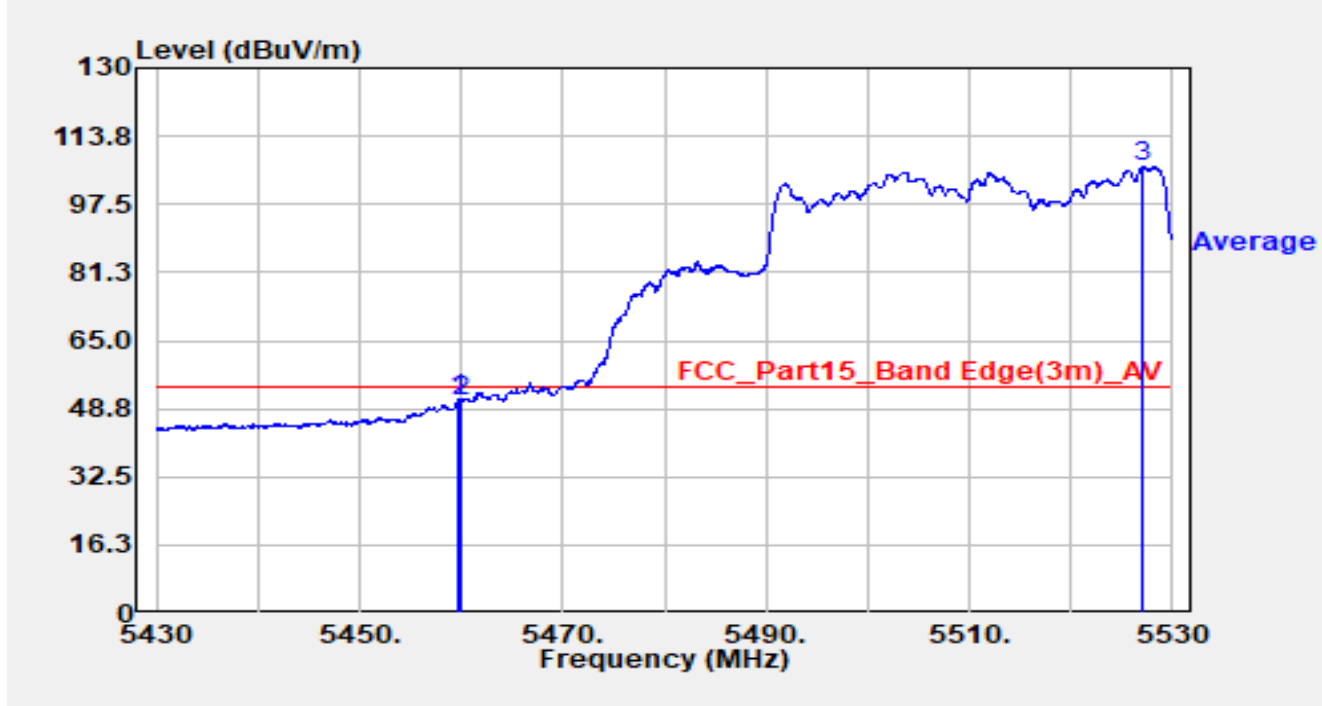


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5459.750	55.10	-3.90	51.20	-2.80	54.00	Average
2		5460.000	54.58	-3.86	50.72	-3.28	54.00	Average
3		5527.150	63.96	42.54	106.50	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-04
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5510MHz		

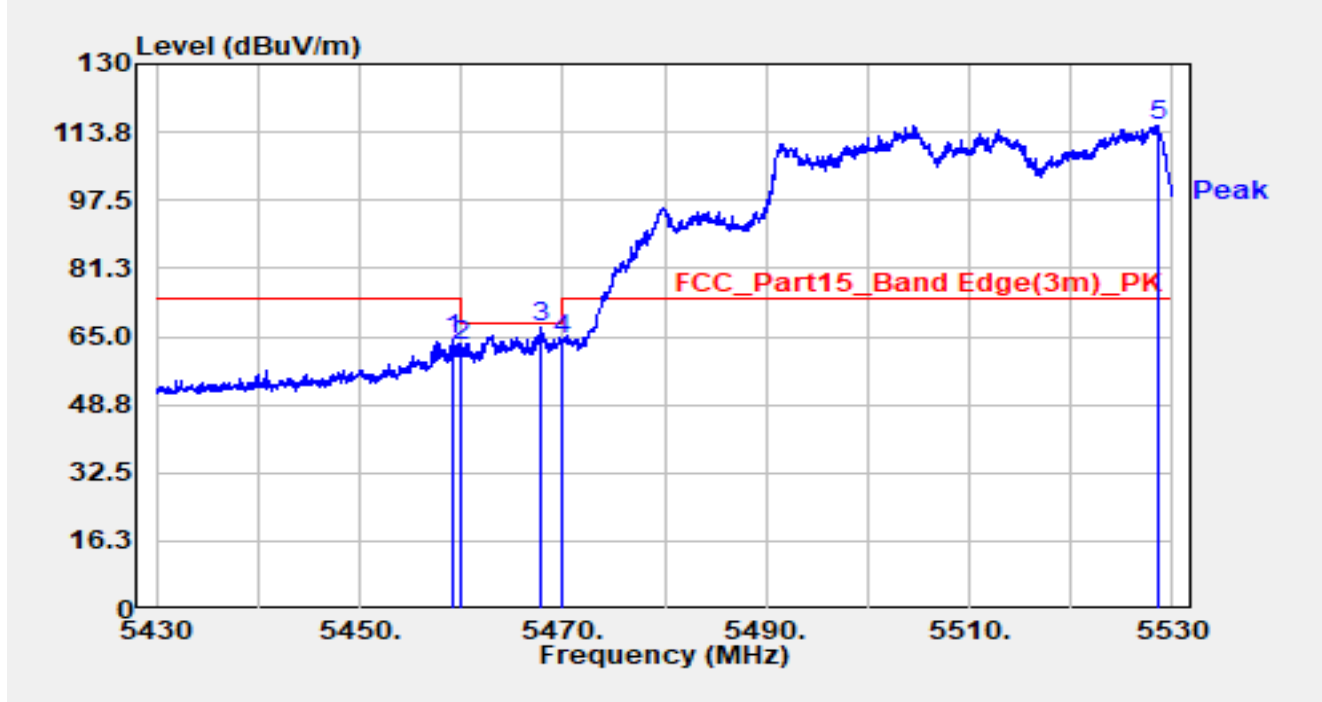


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5459.300	68.20	-3.95	64.24	-9.76	74.00	Peak
2		5460.000	66.50	-3.86	62.64	-5.56	68.20	Peak
3	*	5467.900	69.96	-2.80	67.16	-1.04	68.20	Peak
4		5470.000	66.57	-2.10	64.47	-3.73	68.20	Peak
5		5528.650	69.95	45.38	115.33	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-04
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5510MHz		

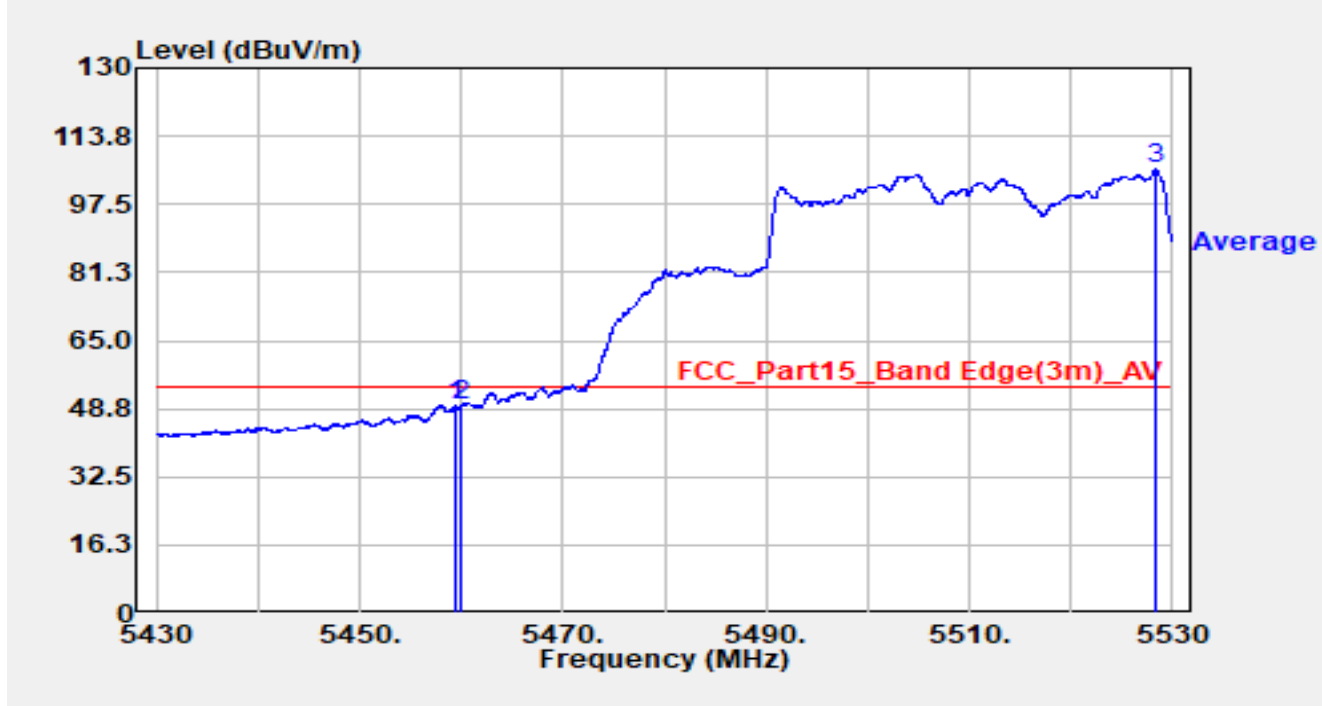


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5459.350	53.49	-3.95	49.54	-4.46	54.00	Average
2		5460.000	53.39	-3.86	49.52	-4.48	54.00	Average
3		5528.350	60.92	44.93	105.85	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-04
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5670MHz		

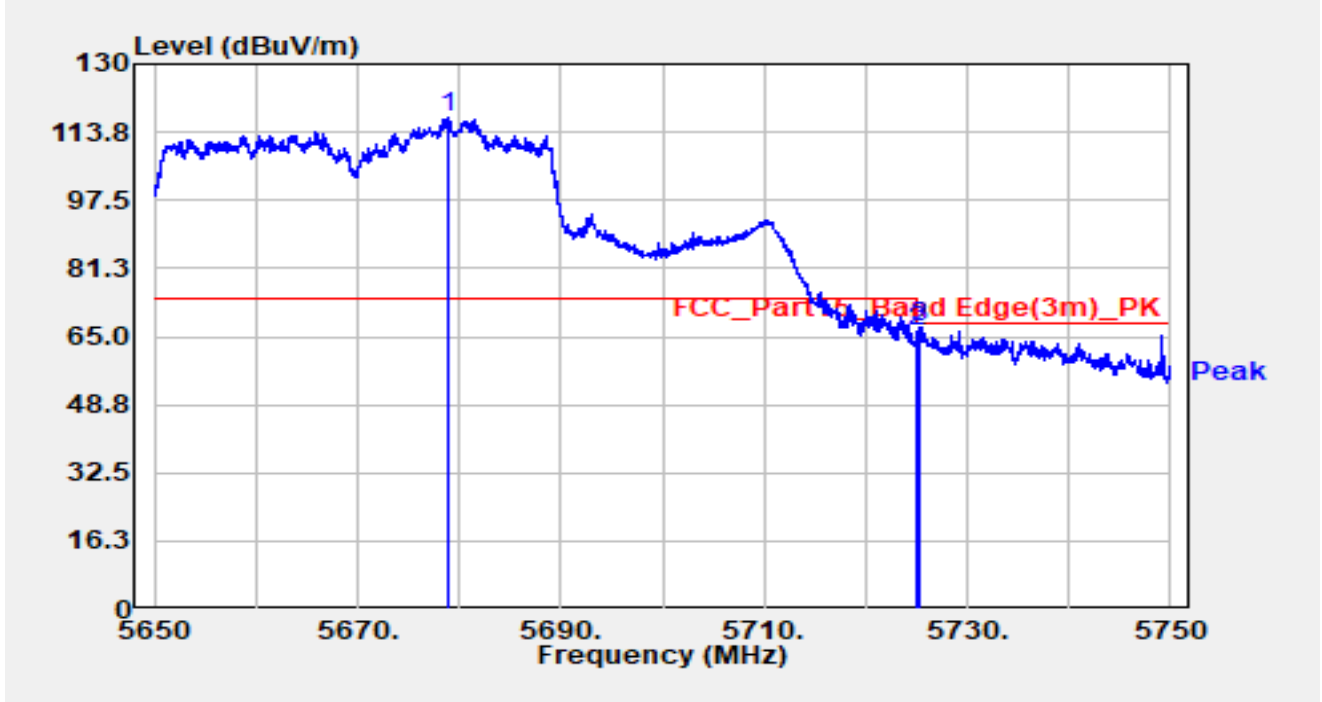


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5679.000	75.75	41.31	117.06	N/A	N/A	Peak
2		5725.000	68.35	-2.12	66.24	-1.96	68.20	Peak
3	*	5725.200	69.50	-2.23	67.27	-0.93	68.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-04
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5670MHz		

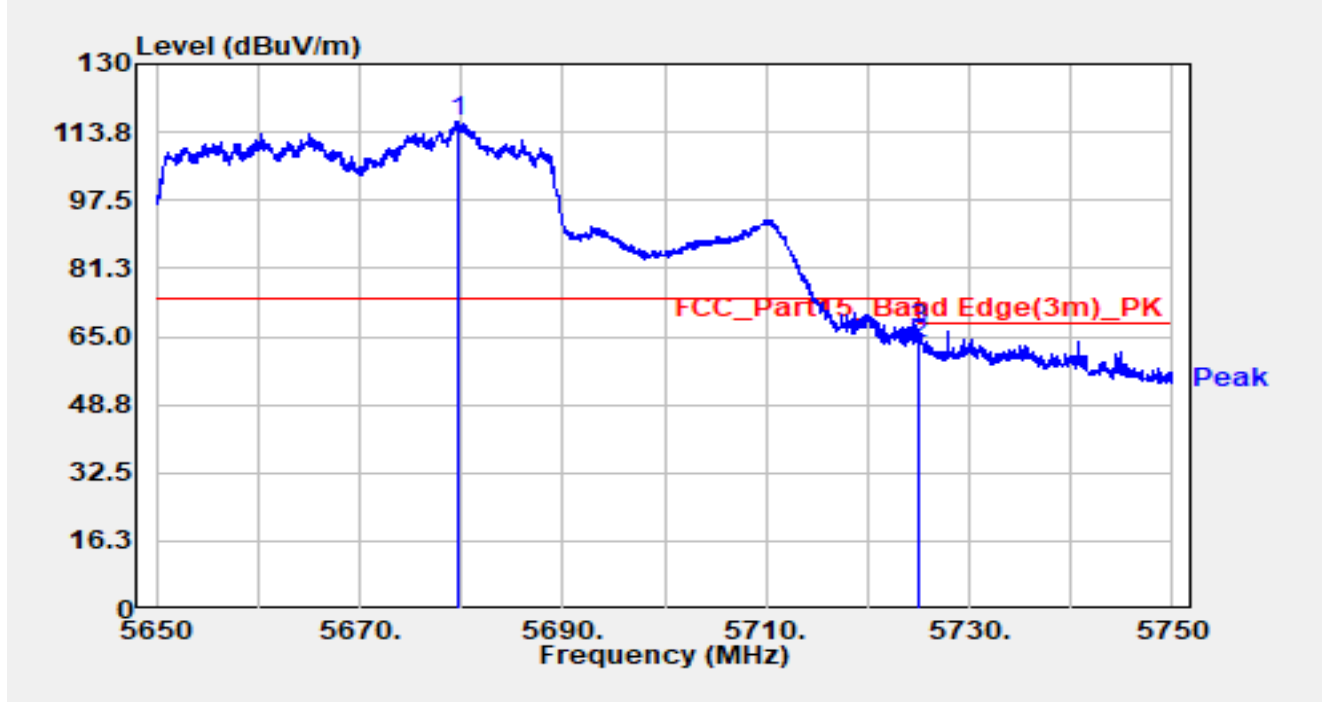


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5679.750	73.90	42.58	116.47	N/A	N/A	Peak
2		5725.000	65.62	-2.12	63.51	-4.69	68.20	Peak
3	*	5725.050	68.67	-2.14	66.53	-1.67	68.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-05
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5755MHz		

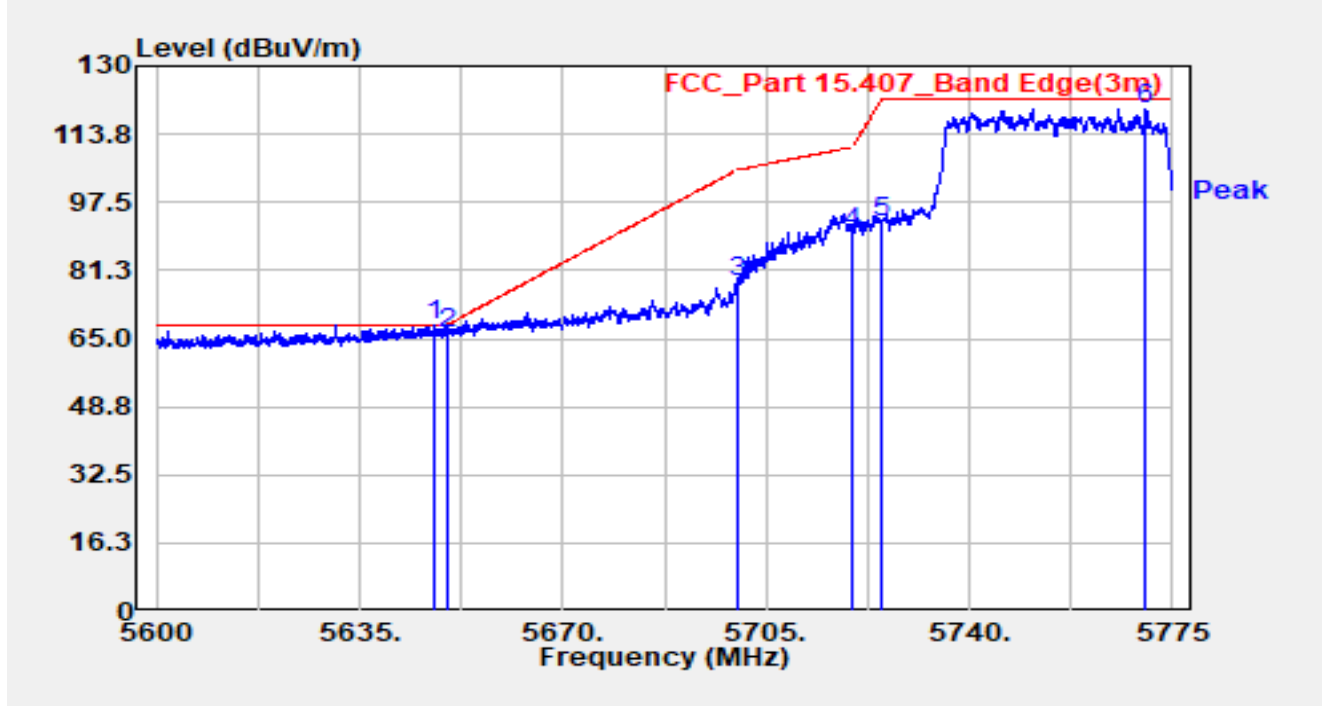


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5647.862	75.12	-7.15	67.97	-0.23	68.20	Peak
2		5650.000	73.14	-7.14	66.00	-2.20	68.20	Peak
3		5700.000	85.35	-7.06	78.29	-26.91	105.20	Peak
4		5720.000	97.50	-7.20	90.30	-20.50	110.80	Peak
5		5725.000	100.02	-7.22	92.80	-29.40	122.20	Peak
6		5770.362	127.04	-7.18	119.86	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-05
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5755MHz		

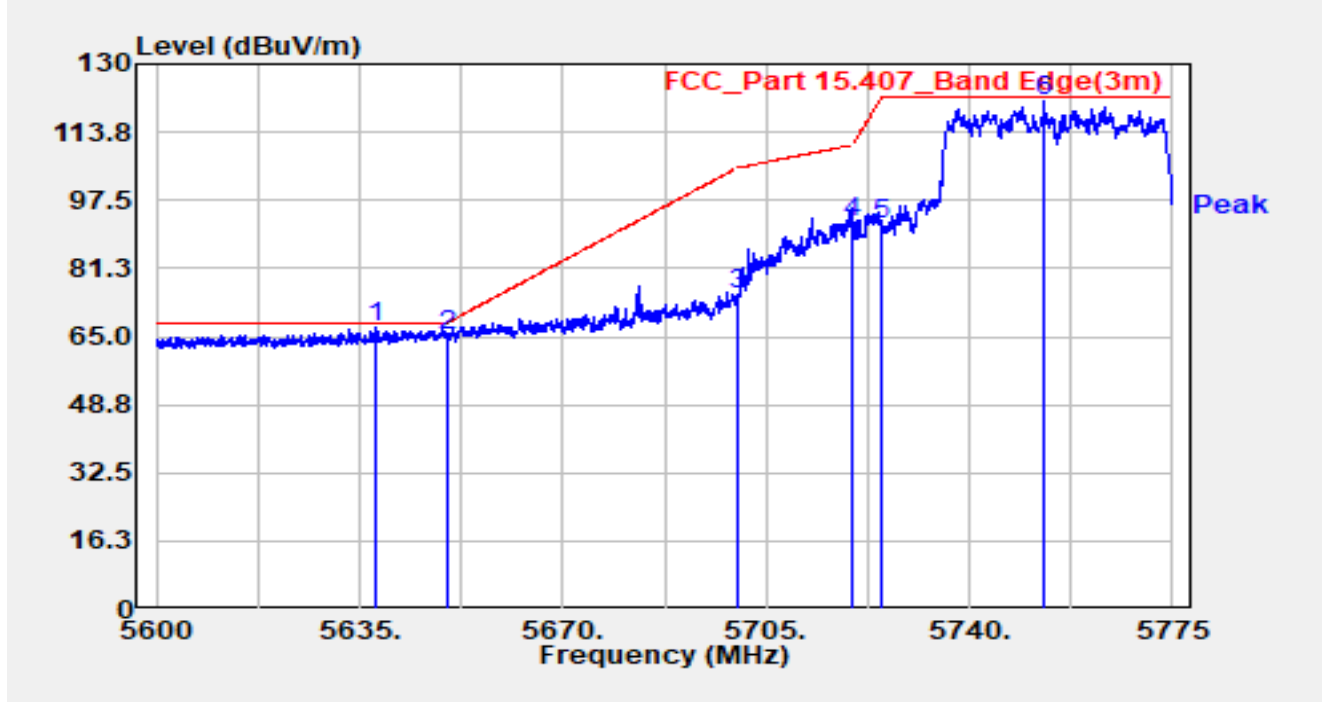


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5637.975	74.19	-7.20	66.99	-1.21	68.20	Peak
2		5650.000	72.18	-7.14	65.04	-3.16	68.20	Peak
3		5700.000	82.07	-7.06	75.01	-30.19	105.20	Peak
4		5720.000	99.59	-7.20	92.39	-18.41	110.80	Peak
5		5725.000	99.07	-7.22	91.86	-30.34	122.20	Peak
6		5752.688	128.35	-7.31	121.04	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-05
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5795MHz		

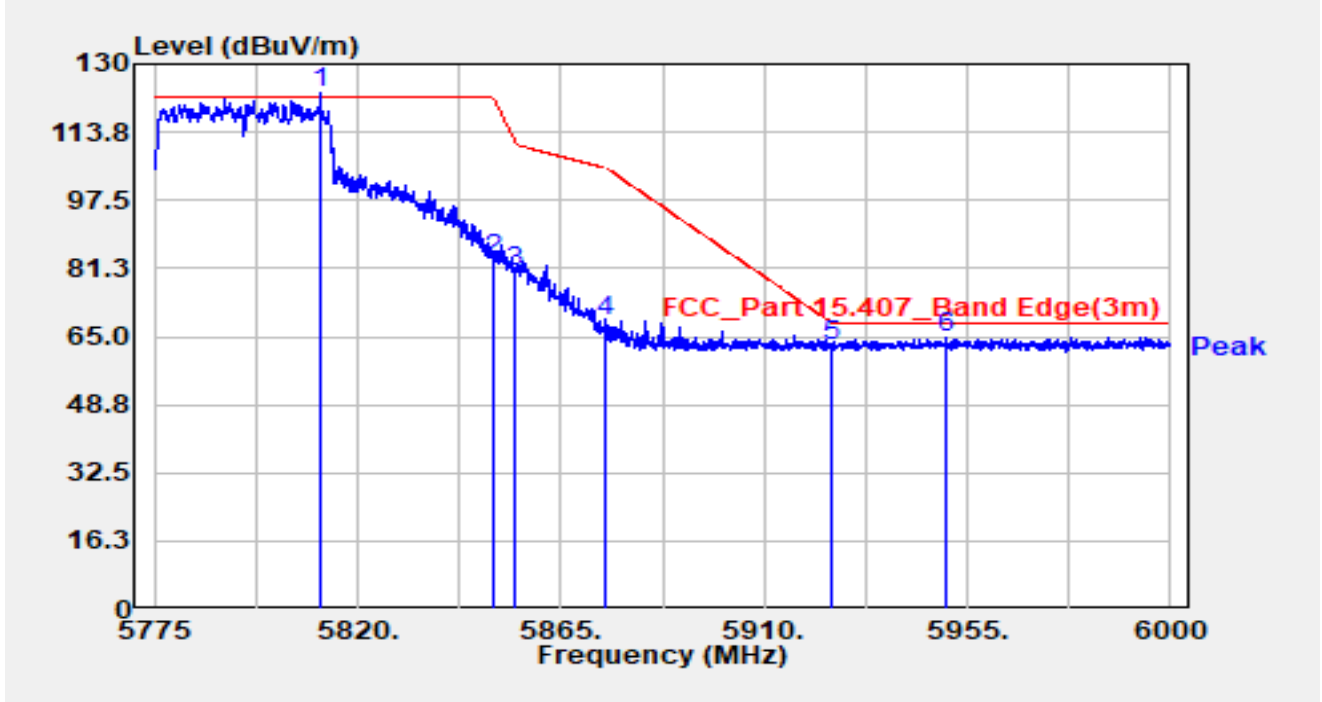


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5811.675	130.08	-7.05	123.03	N/A	N/A	Peak
2		5850.000	90.39	-7.06	83.33	-38.87	122.20	Peak
3		5855.000	87.29	-7.07	80.21	-30.59	110.80	Peak
4		5875.000	75.95	-7.15	68.79	-36.41	105.20	Peak
5		5925.000	69.96	-7.01	62.95	-5.25	68.20	Peak
6	*	5950.388	71.82	-6.84	64.98	-3.22	68.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-05
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5795MHz		

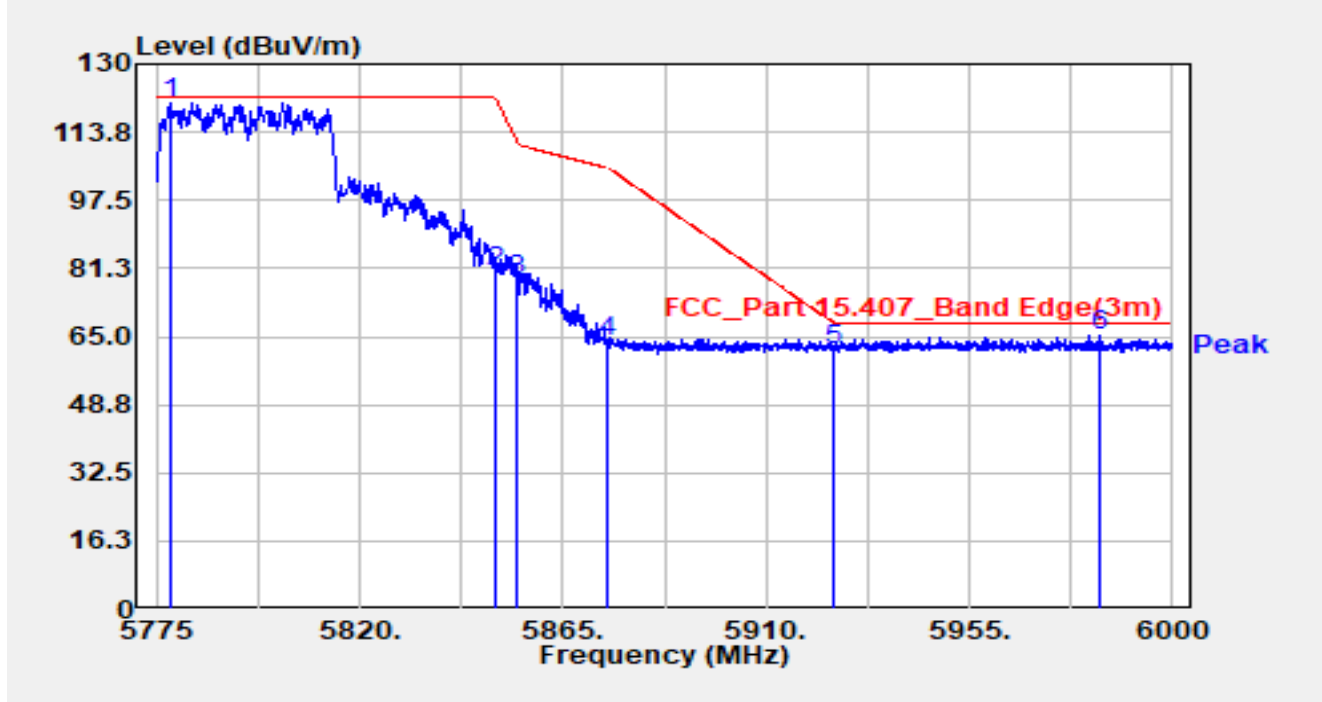


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5778.038	127.90	-7.14	120.75	N/A	N/A	Peak
2		5850.000	87.70	-7.06	80.64	-41.56	122.20	Peak
3		5855.000	85.48	-7.07	78.40	-32.40	110.80	Peak
4		5875.000	71.16	-7.15	64.01	-41.19	105.20	Peak
5		5925.000	68.86	-7.01	61.85	-6.35	68.20	Peak
6	*	5983.688	72.12	-6.93	65.19	-3.01	68.20	Peak

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-04
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5210MHz		

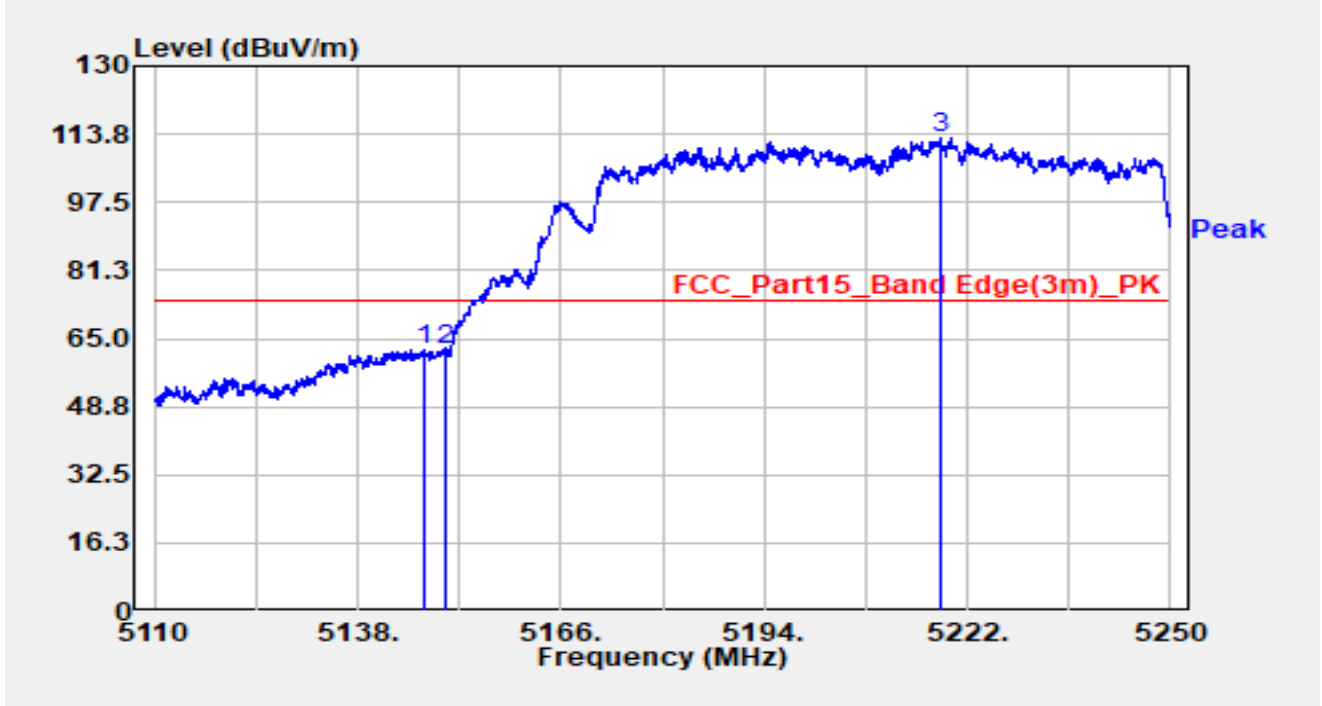


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5147.030	66.60	-4.06	62.54	-11.46	74.00	Peak
2		5150.000	65.79	-3.47	62.32	-11.68	74.00	Peak
3		5218.290	70.69	42.25	112.94	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-04
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5210MHz		

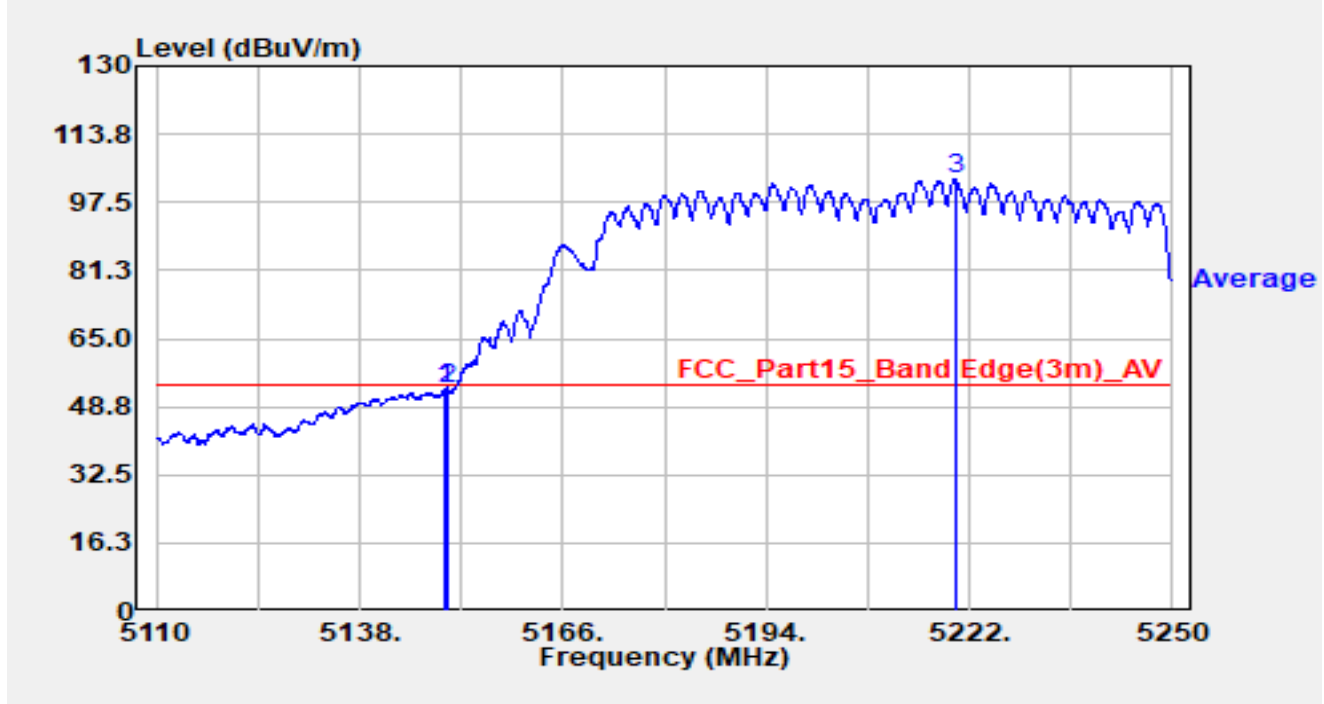


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.760	56.75	-3.54	53.21	-0.79	54.00	Average
2		5150.000	56.60	-3.47	53.13	-0.87	54.00	Average
3		5220.040	59.81	43.39	103.20	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-04
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5210MHz		

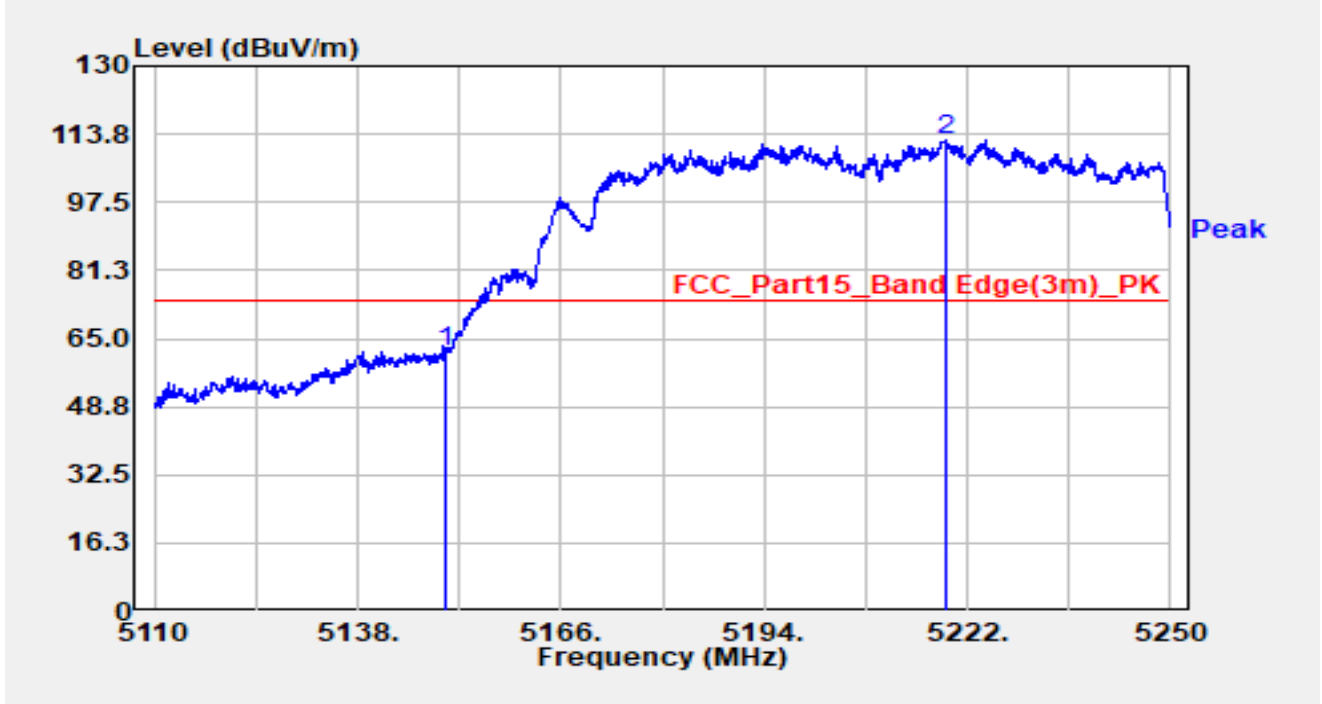


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5150.000	65.50	-3.47	62.03	-11.97	74.00	Peak
2		5219.130	69.09	43.34	112.43	N/A	N/A	Peak

Notes:

- "*", means this data is the worst emission level.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-04
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5210MHz		

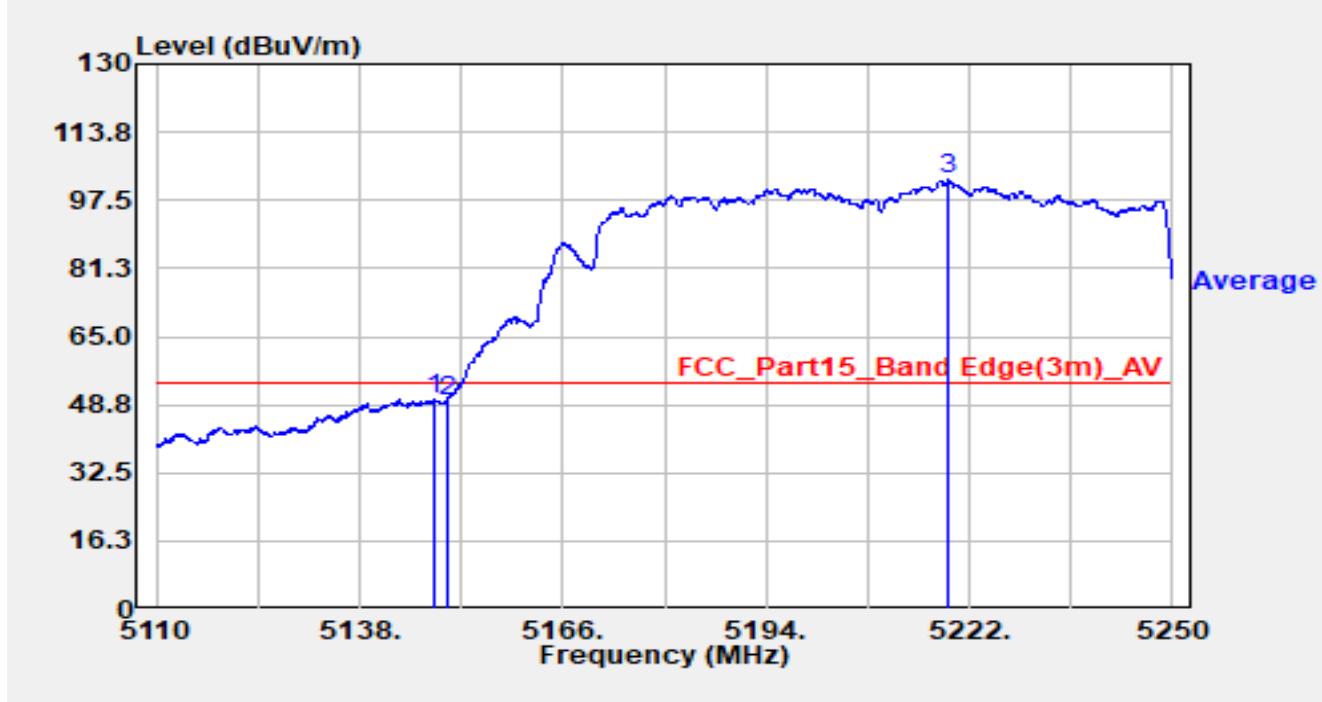


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5148.220	53.74	-3.82	49.92	-4.08	54.00	Average
2		5150.000	53.24	-3.47	49.77	-4.23	54.00	Average
3		5219.060	59.00	43.29	102.29	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-06
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5290MHz		

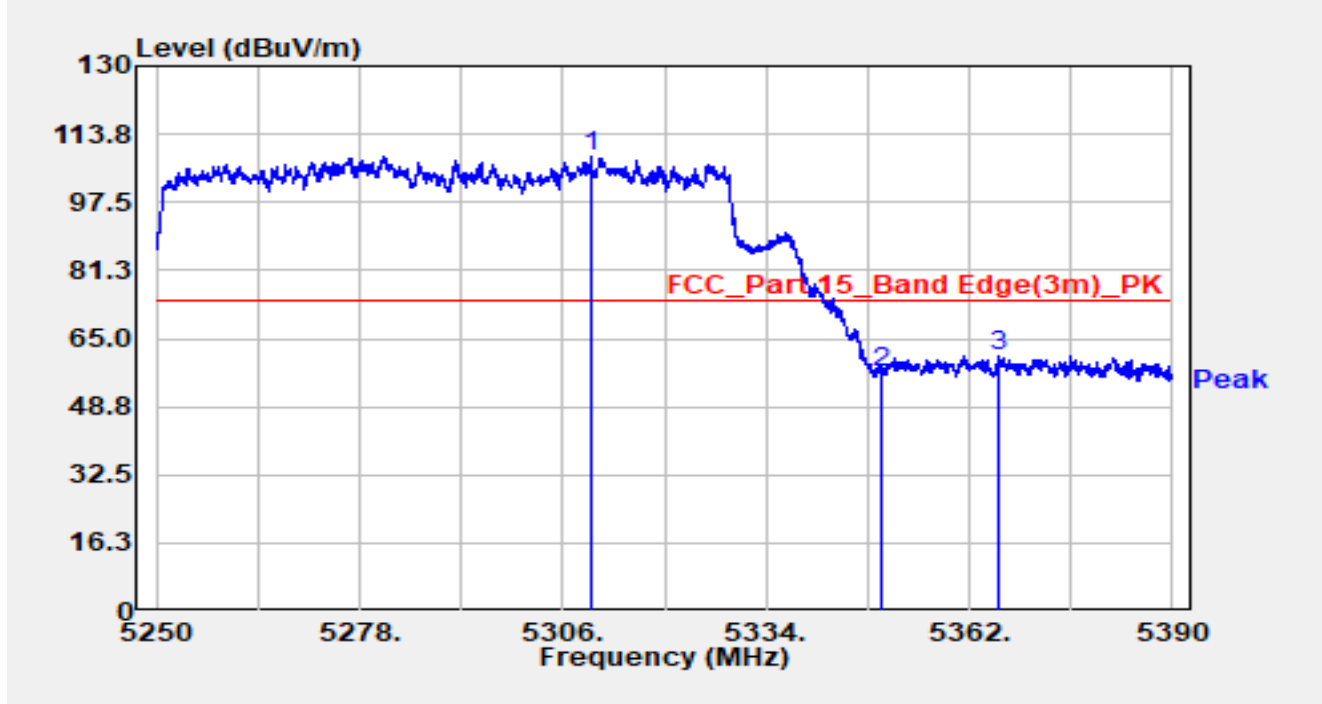


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5309.920	66.97	41.64	108.61	N/A	N/A	Peak
2		5350.000	58.58	-1.81	56.77	-17.23	74.00	Peak
3	*	5366.200	66.03	-5.03	61.00	-13.00	74.00	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-06
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5290MHz		

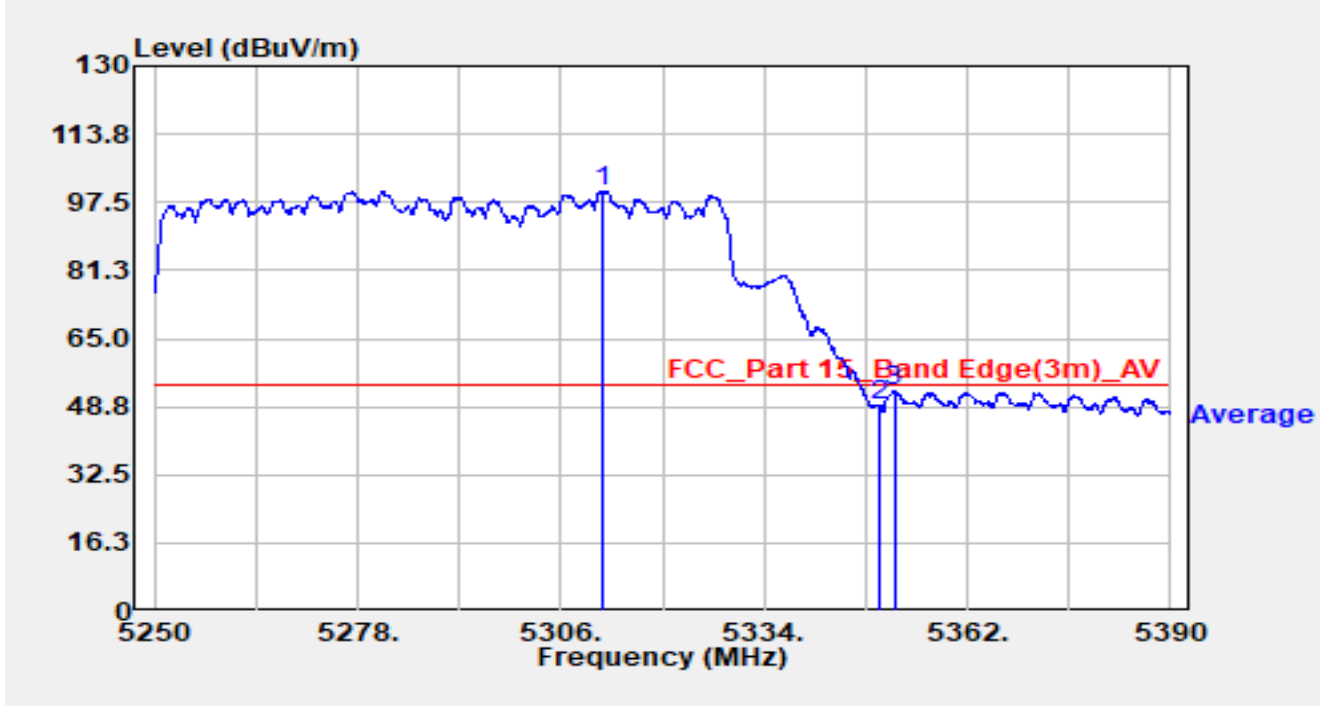


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5311.880	55.51	44.62	100.13	N/A	N/A	Average
2		5350.000	50.77	-1.81	48.97	-5.03	54.00	Average
3	*	5351.920	55.08	-2.66	52.42	-1.58	54.00	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-06
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5290MHz		

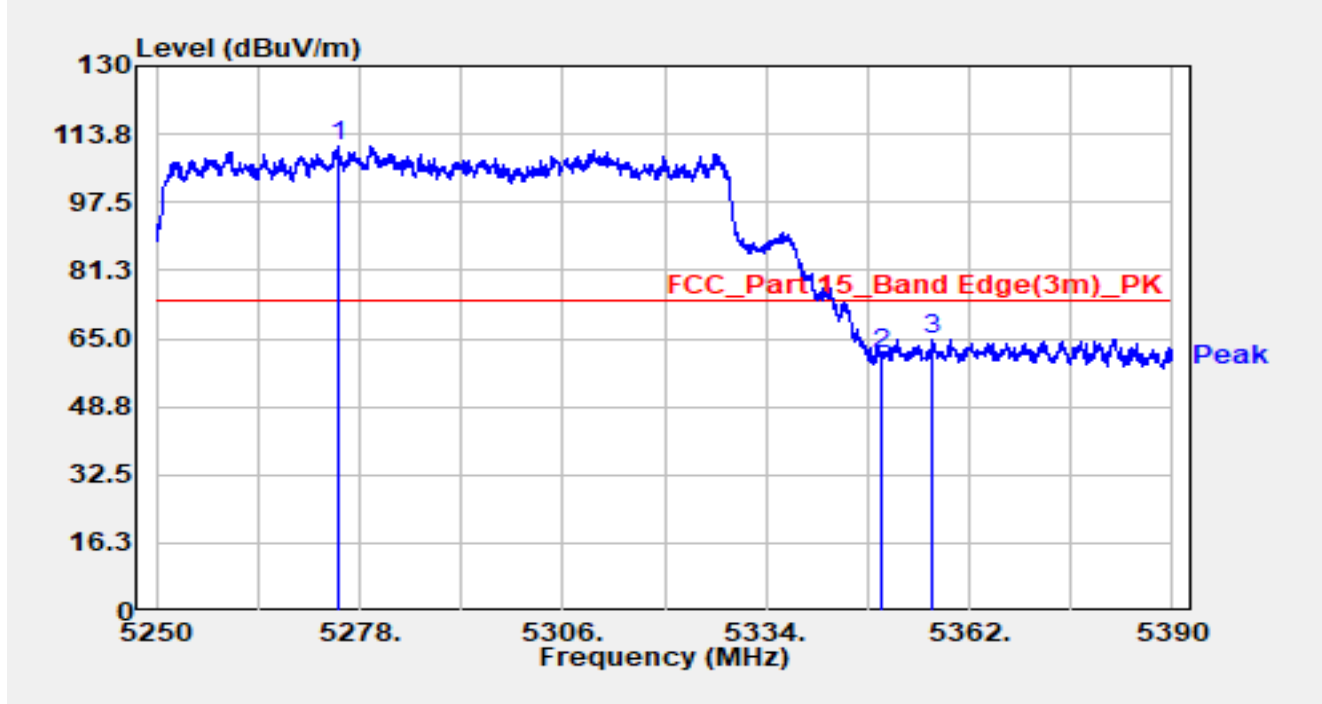


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5274.990	74.12	36.95	111.07	N/A	N/A	Peak
2		5350.000	63.28	-1.81	61.48	-12.52	74.00	Peak
3	*	5356.750	68.77	-3.97	64.81	-9.19	74.00	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-06
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5290MHz		

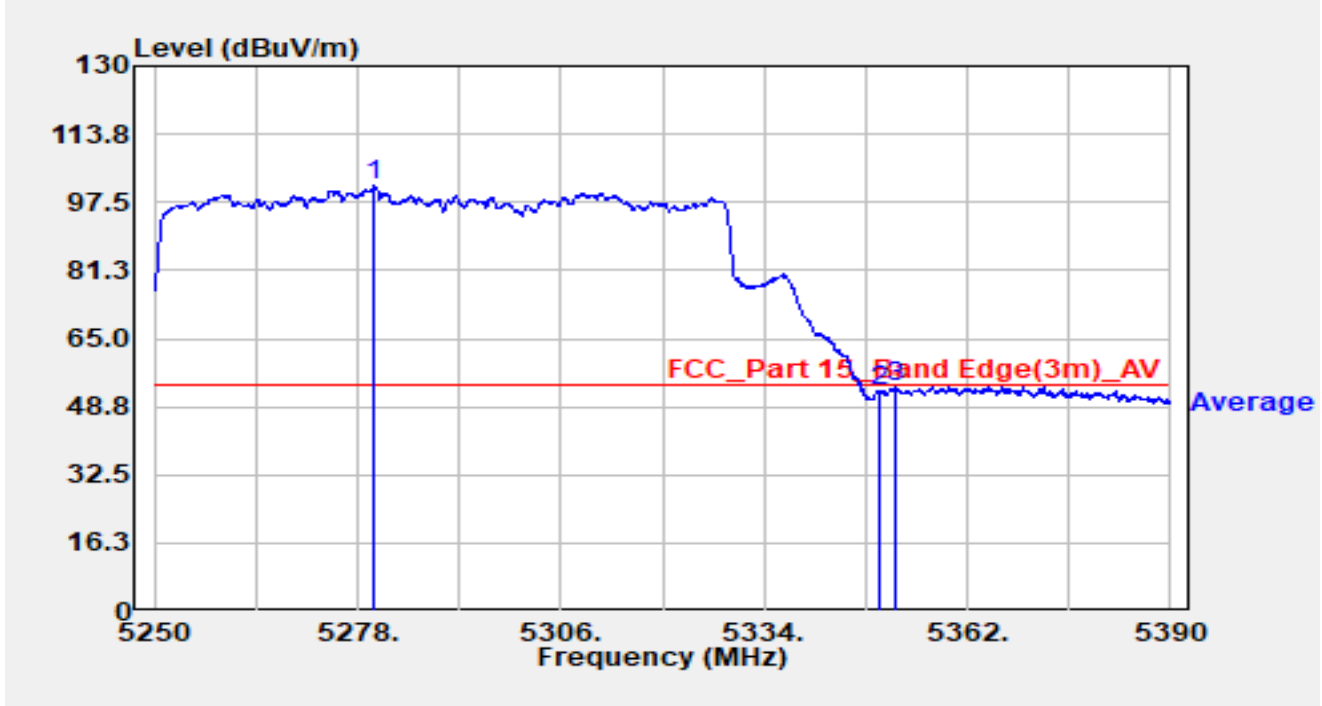


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5280.310	57.36	44.16	101.52	N/A	N/A	Average
2		5350.000	54.08	-1.81	52.28	-1.72	54.00	Average
3	*	5352.060	56.33	-2.70	53.63	-0.37	54.00	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-04
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5530MHz		

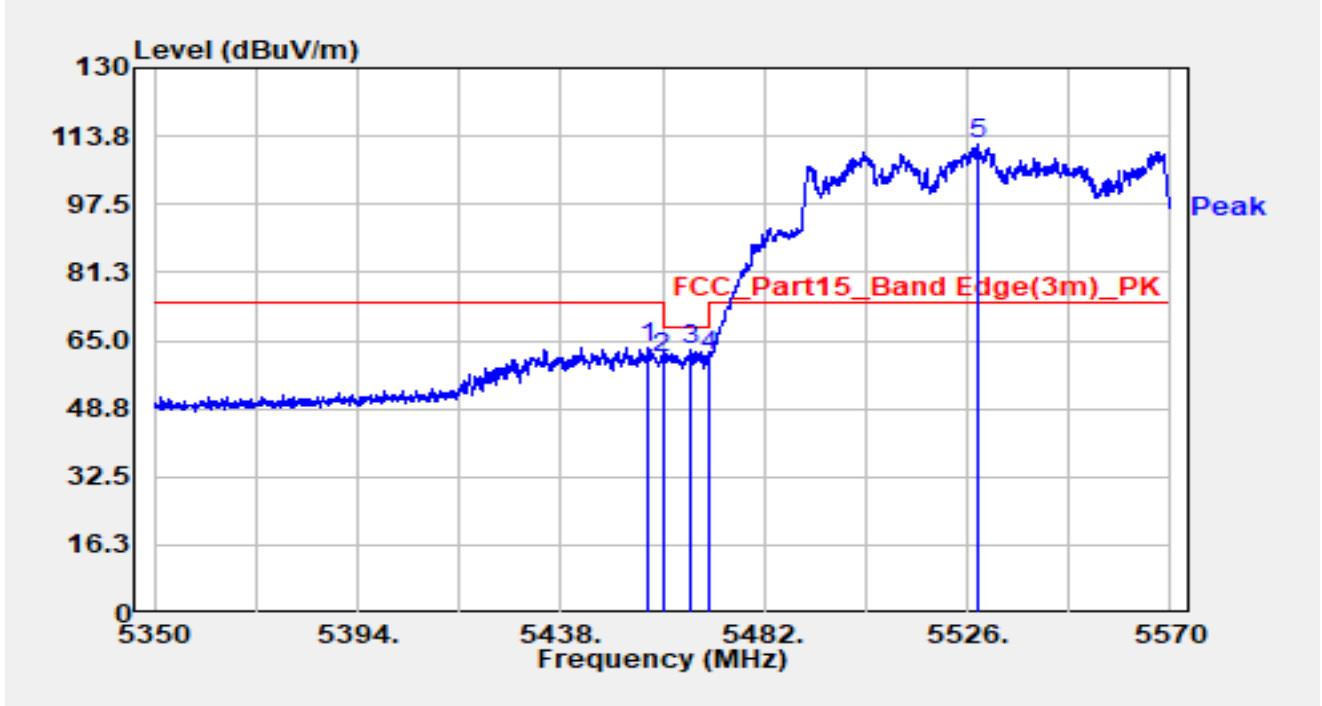


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5456.920	67.52	-4.11	63.41	-10.59	74.00	Peak
2		5460.000	64.66	-3.86	60.80	-7.40	68.20	Peak
3	*	5465.940	65.98	-3.22	62.77	-5.43	68.20	Peak
4		5470.000	63.22	-2.10	61.11	-7.09	68.20	Peak
5		5528.310	67.05	44.85	111.90	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-04
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5530MHz		

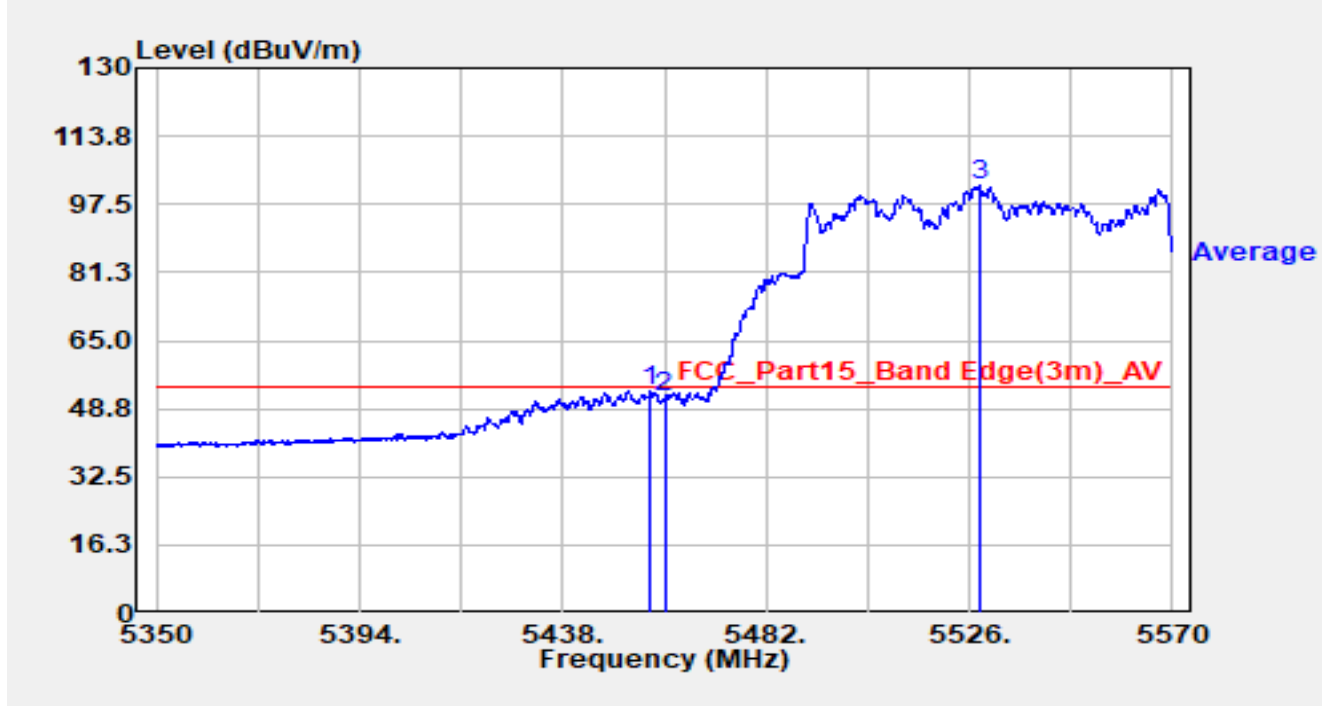


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5457.030	56.93	-4.10	52.83	-1.17	54.00	Average
2		5460.000	55.58	-3.86	51.71	-2.29	54.00	Average
3		5528.090	57.42	44.46	101.87	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-05
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5530MHz		

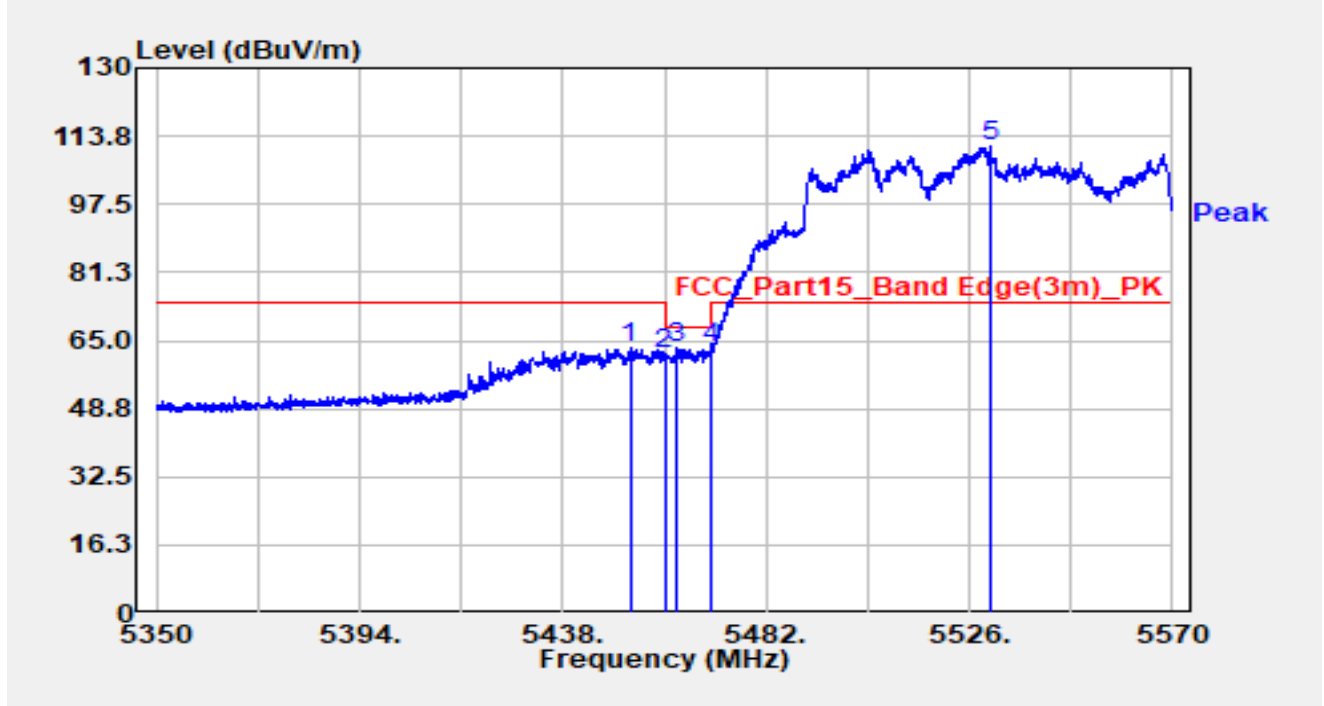


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5452.520	67.48	-4.33	63.14	-10.86	74.00	Peak
2		5460.000	65.86	-3.86	62.00	-6.20	68.20	Peak
3	*	5462.860	66.89	-3.65	63.25	-4.95	68.20	Peak
4		5470.000	65.30	-2.10	63.20	-5.00	68.20	Peak
5		5530.730	62.98	48.21	111.19	N/A	N/A	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-04
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 5530MHz		

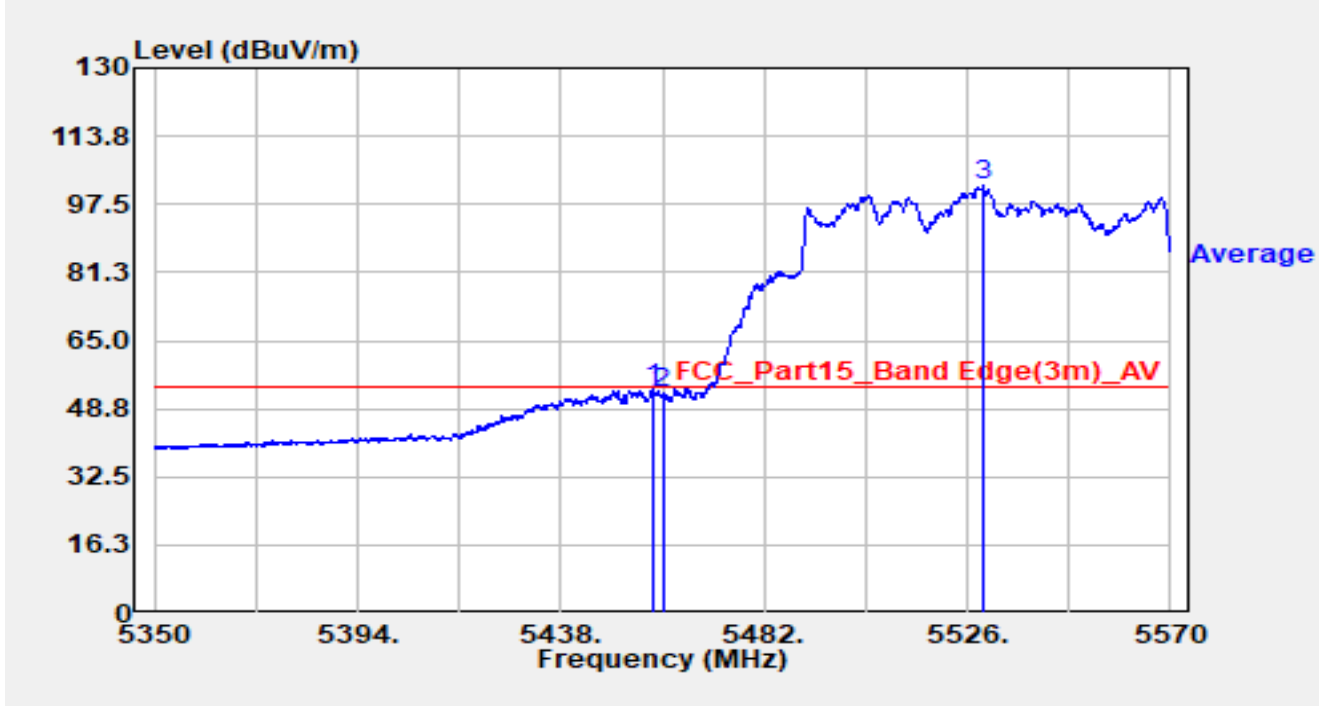


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5457.910	57.61	-4.05	53.56	-0.44	54.00	Average
2		5460.000	56.19	-3.86	52.32	-1.68	54.00	Average
3		5529.520	54.86	47.10	101.96	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-05
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5610MHz		

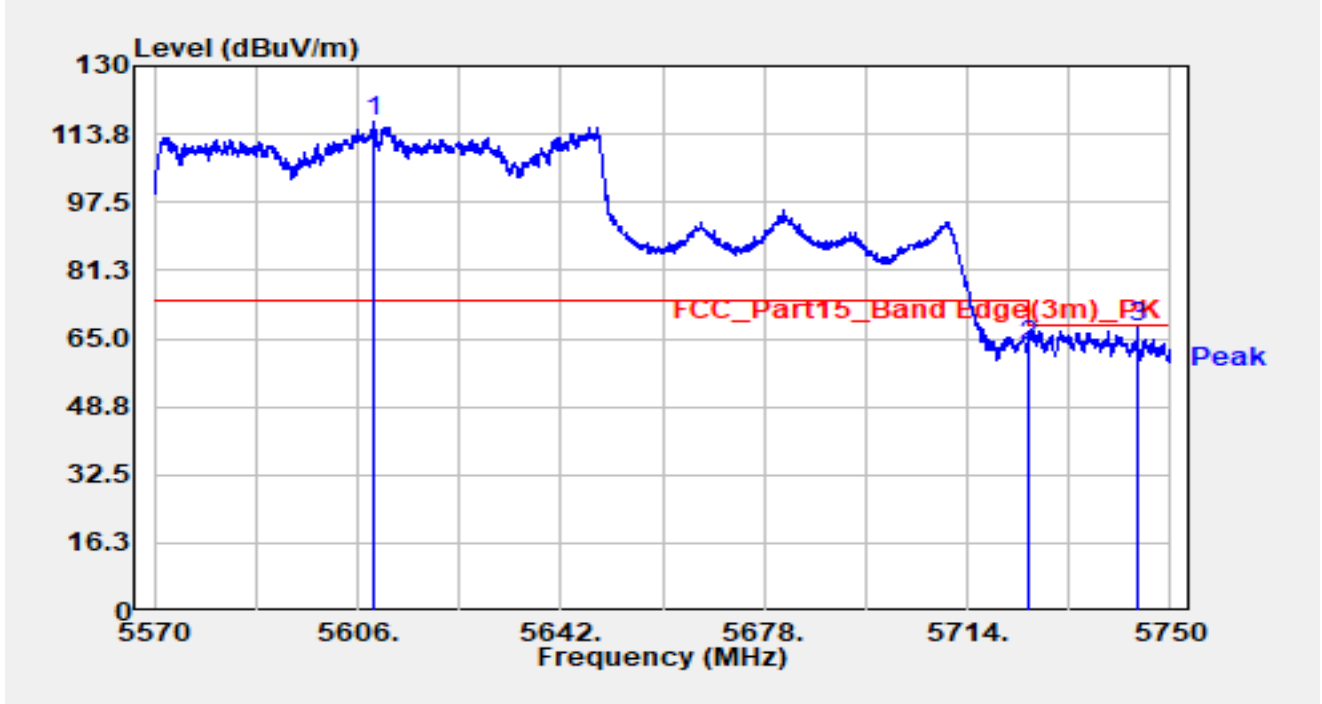


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5608.970	73.13	43.75	116.88	N/A	N/A	Peak
2		5725.000	65.15	-2.12	63.04	-5.16	68.20	Peak
3	*	5744.150	72.99	-5.16	67.83	-0.37	68.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-05
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5610MHz		

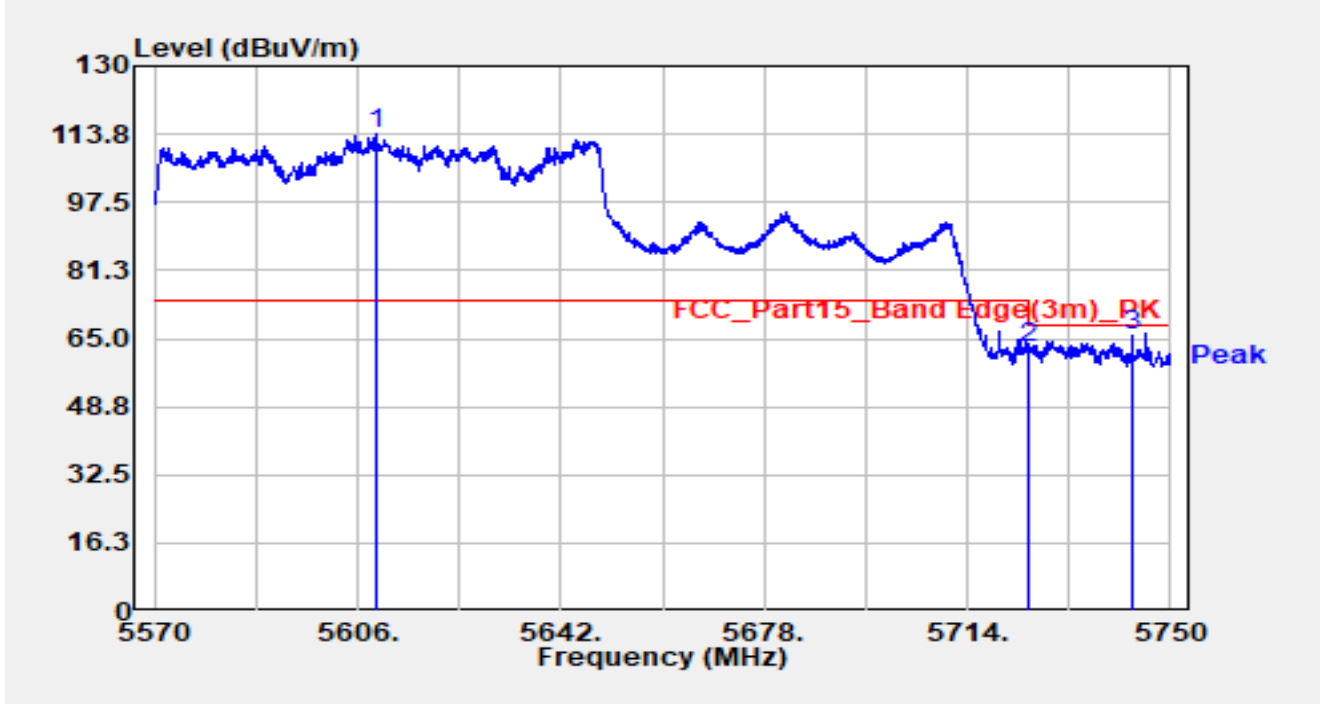


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5609.420	69.02	44.67	113.69	N/A	N/A	Peak
2		5725.000	64.71	-2.10	62.61	-11.39	74.00	Peak
3	*	5743.160	71.09	-5.13	65.96	-2.24	68.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-05
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5775MHz		

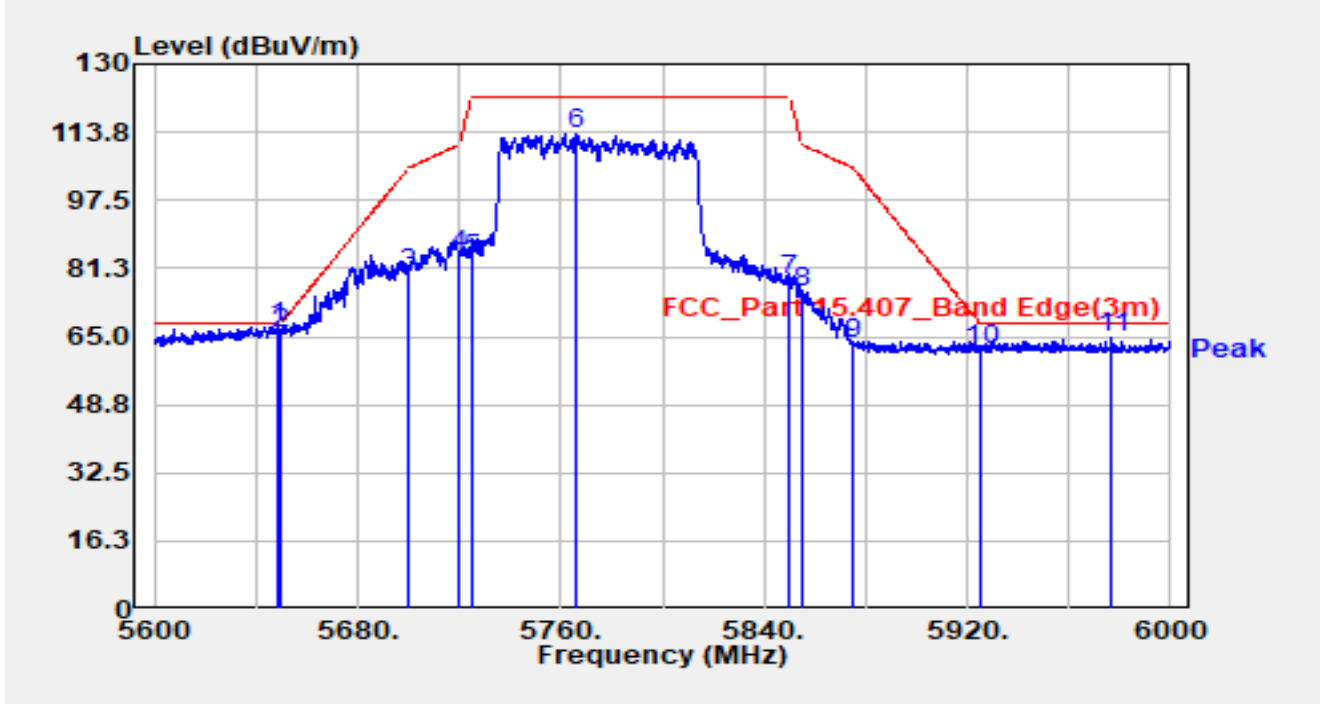

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5648.600	74.50	-7.15	67.35	-0.85	68.20	Peak
2		5650.000	72.68	-7.14	65.54	-2.66	68.20	Peak
3		5700.000	87.00	-7.06	79.94	-25.26	105.20	Peak
4		5720.000	91.63	-7.20	84.43	-26.37	110.80	Peak
5		5725.000	90.54	-7.22	83.33	-38.87	122.20	Peak
6		5765.600	120.68	-7.20	113.48	N/A	N/A	Peak
7		5850.000	85.62	-7.06	78.55	-43.65	122.20	Peak
8		5855.000	82.48	-7.07	75.41	-35.39	110.80	Peak
9		5875.000	70.24	-7.15	63.09	-42.11	105.20	Peak
10		5925.000	68.84	-7.01	61.83	-6.37	68.20	Peak
11		5976.800	71.61	-6.94	64.67	-3.53	68.20	Peak


Notes:

1. " *", means this data is the worst emission level.

2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).

3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-05
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT80 at 5775MHz		

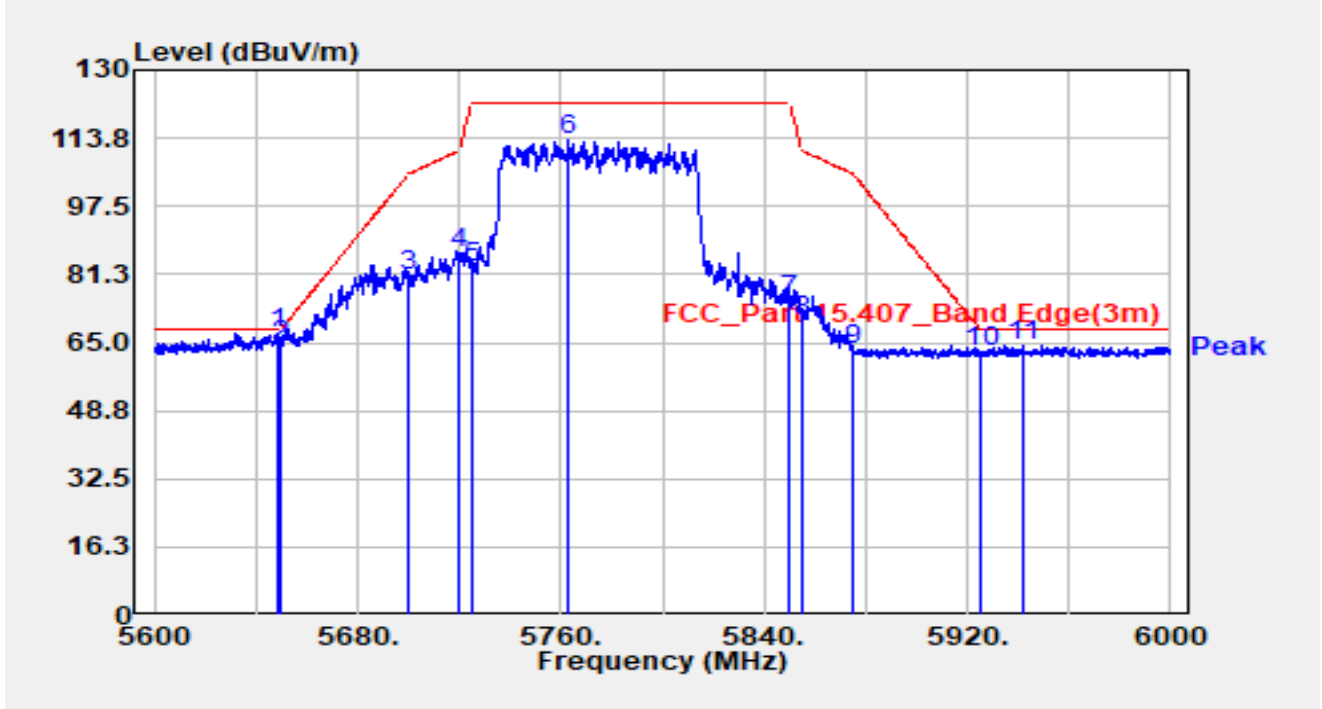


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5649.000	74.57	-7.15	67.42	-0.78	68.20	Peak
2		5650.000	71.65	-7.14	64.51	-3.69	68.20	Peak
3		5700.000	88.23	-7.06	81.17	-24.03	105.20	Peak
4		5720.000	93.34	-7.20	86.15	-24.65	110.80	Peak
5		5725.000	90.20	-7.22	82.99	-39.21	122.20	Peak
6		5763.000	120.76	-7.22	113.55	N/A	N/A	Peak
7		5850.000	82.14	-7.06	75.08	-47.12	122.20	Peak
8		5855.000	77.47	-7.07	70.39	-40.41	110.80	Peak
9		5875.000	70.22	-7.15	63.07	-42.13	105.20	Peak
10		5925.000	70.04	-7.01	63.03	-5.17	68.20	Peak
11		5941.600	71.26	-6.88	64.38	-3.82	68.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-04
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 5250MHz		

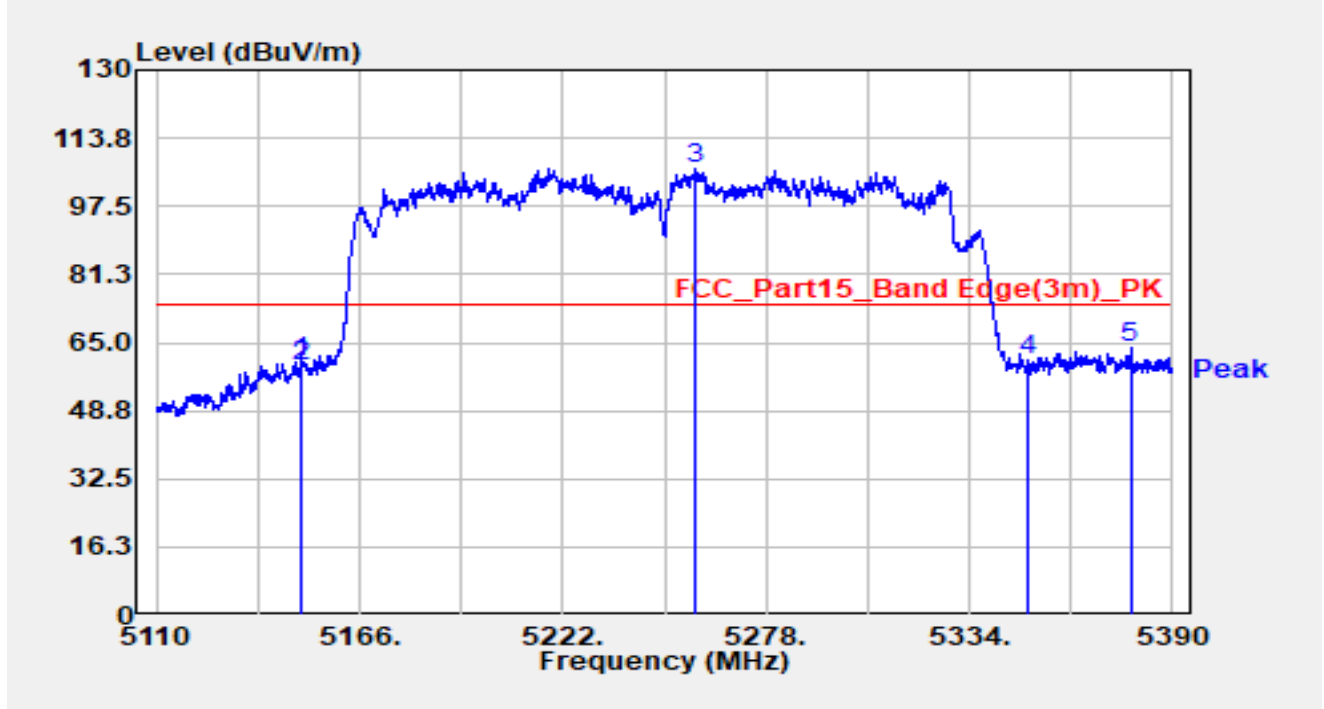


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5149.760	64.09	-3.54	60.54	-13.46	74.00	Peak
2		5150.000	62.60	-3.47	59.13	-14.87	74.00	Peak
3		5258.400	62.81	43.58	106.39	N/A	N/A	Peak
4		5350.000	62.73	-1.81	60.92	-13.08	74.00	Peak
5	*	5378.380	68.96	-5.36	63.60	-10.40	74.00	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-04
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 5250MHz		

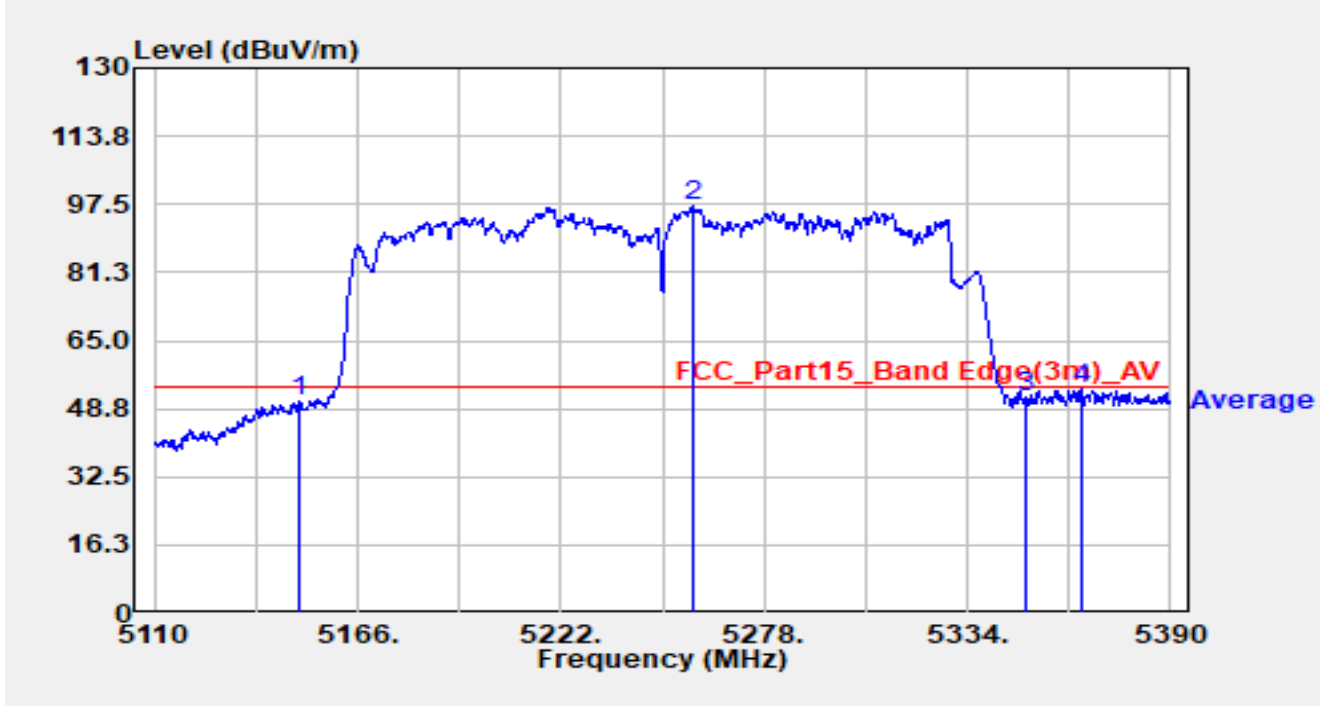


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5150.000	54.22	-3.47	50.75	-3.25	54.00	Average
2		5258.540	53.46	43.82	97.28	N/A	N/A	Average
3		5350.000	53.20	-1.81	51.40	-2.60	54.00	Average
4	*	5365.220	58.28	-4.95	53.33	-0.67	54.00	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-04
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 5250MHz		

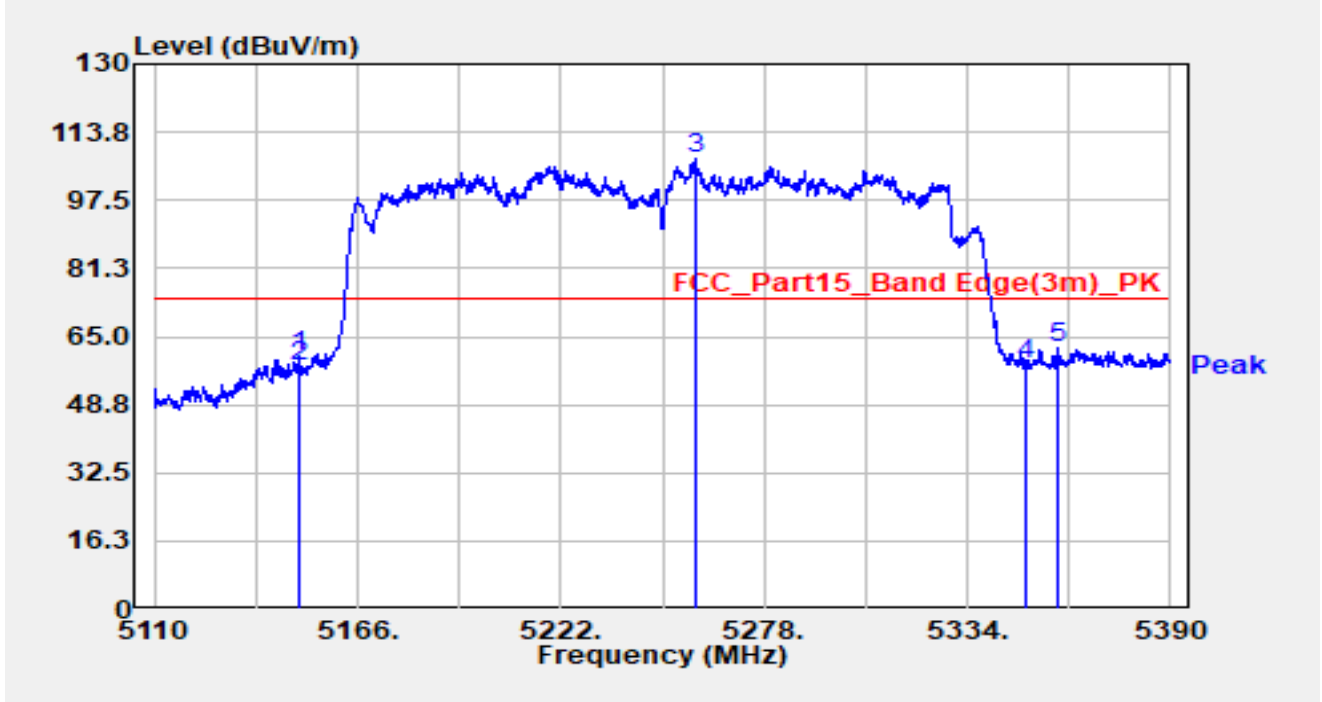


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5149.900	63.94	-3.50	60.43	-13.57	74.00	Peak
2		5150.000	61.49	-3.47	58.02	-15.98	74.00	Peak
3		5258.960	63.01	44.52	107.53	N/A	N/A	Peak
4		5350.000	60.15	-1.81	58.35	-15.65	74.00	Peak
5	*	5358.780	66.57	-4.27	62.30	-11.70	74.00	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-04
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 5250MHz		

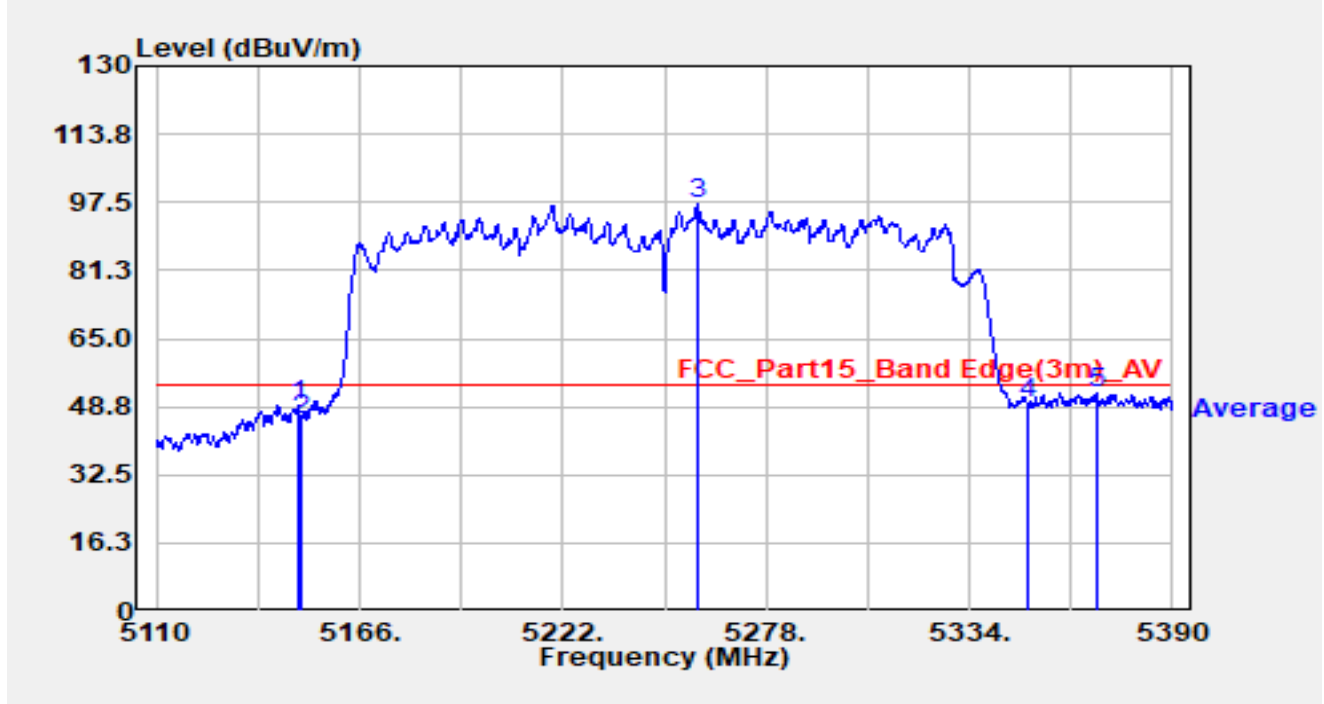


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5149.060	52.66	-3.66	49.00	-5.00	54.00	Average
2		5150.000	49.26	-3.47	45.79	-8.21	54.00	Average
3		5258.960	52.59	44.52	97.11	N/A	N/A	Average
4		5350.000	51.33	-1.81	49.53	-4.47	54.00	Average
5	*	5369.140	57.04	-5.17	51.88	-2.12	54.00	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-05
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 5570MHz		

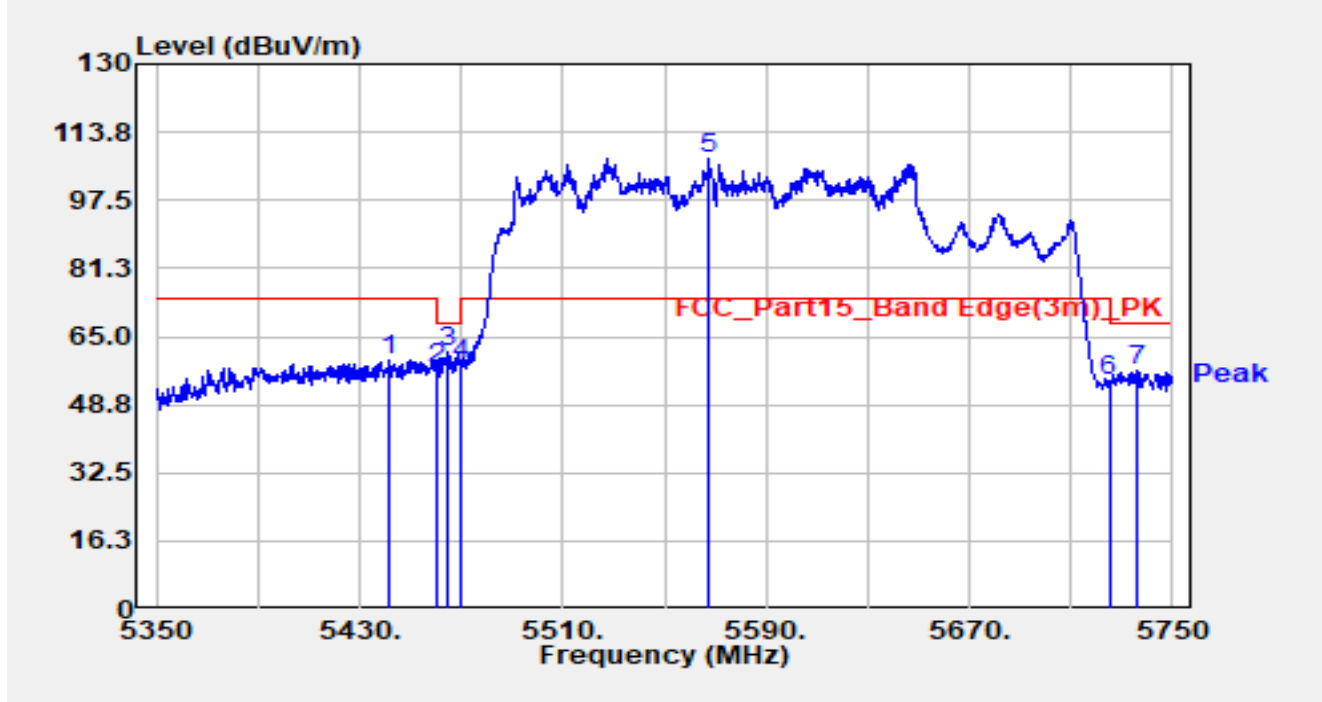


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5442.000	64.30	-4.79	59.51	-14.49	74.00	Peak
2		5460.000	61.43	-3.86	57.57	-10.63	68.20	Peak
3	*	5464.400	64.74	-3.46	61.29	-6.91	68.20	Peak
4		5470.000	60.26	-2.10	58.15	-10.05	68.20	Peak
5		5567.400	65.68	41.86	107.53	N/A	N/A	Peak
6		5725.000	56.42	-2.12	54.30	-13.90	68.20	Peak
7		5736.400	61.68	-4.65	57.04	-11.16	68.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-05
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Horizontal
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 5570MHz		

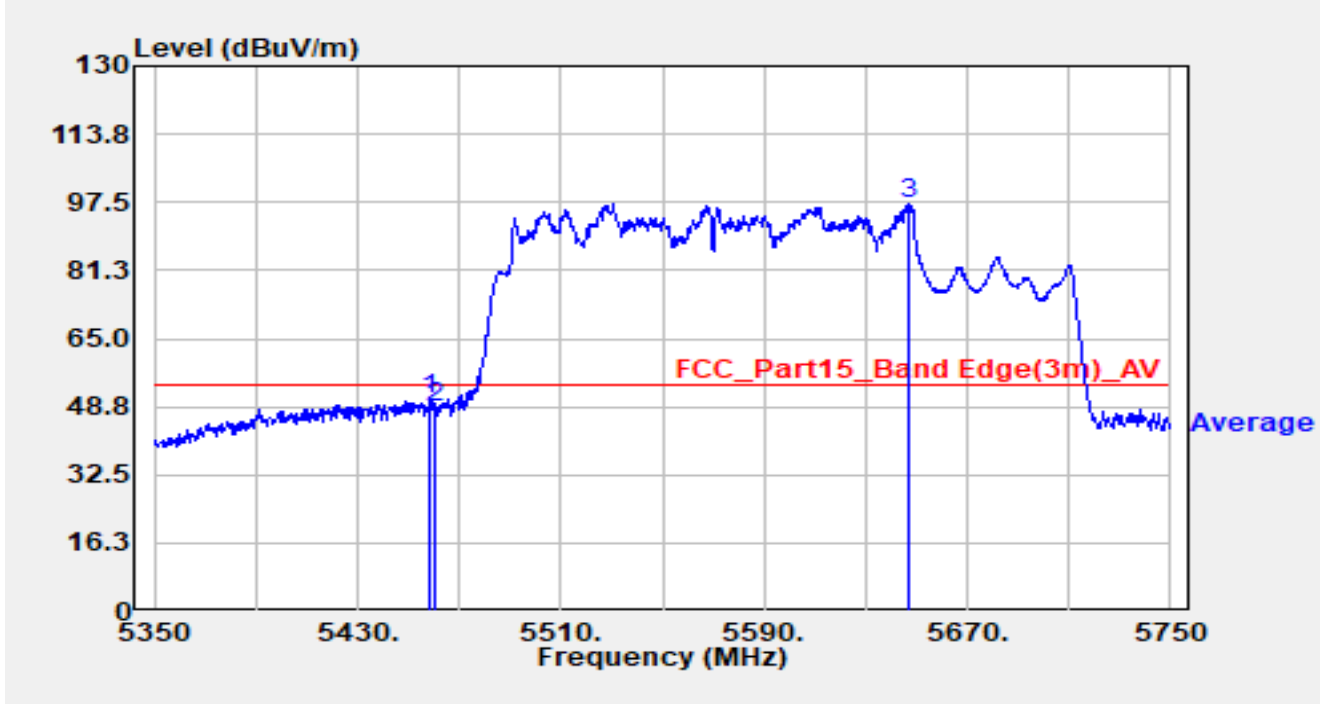


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5458.800	54.43	-4.00	50.42	-3.58	54.00	Average
2		5460.000	52.57	-3.86	48.70	-5.30	54.00	Average
3		5647.400	54.59	42.68	97.27	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-05
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 5570MHz		

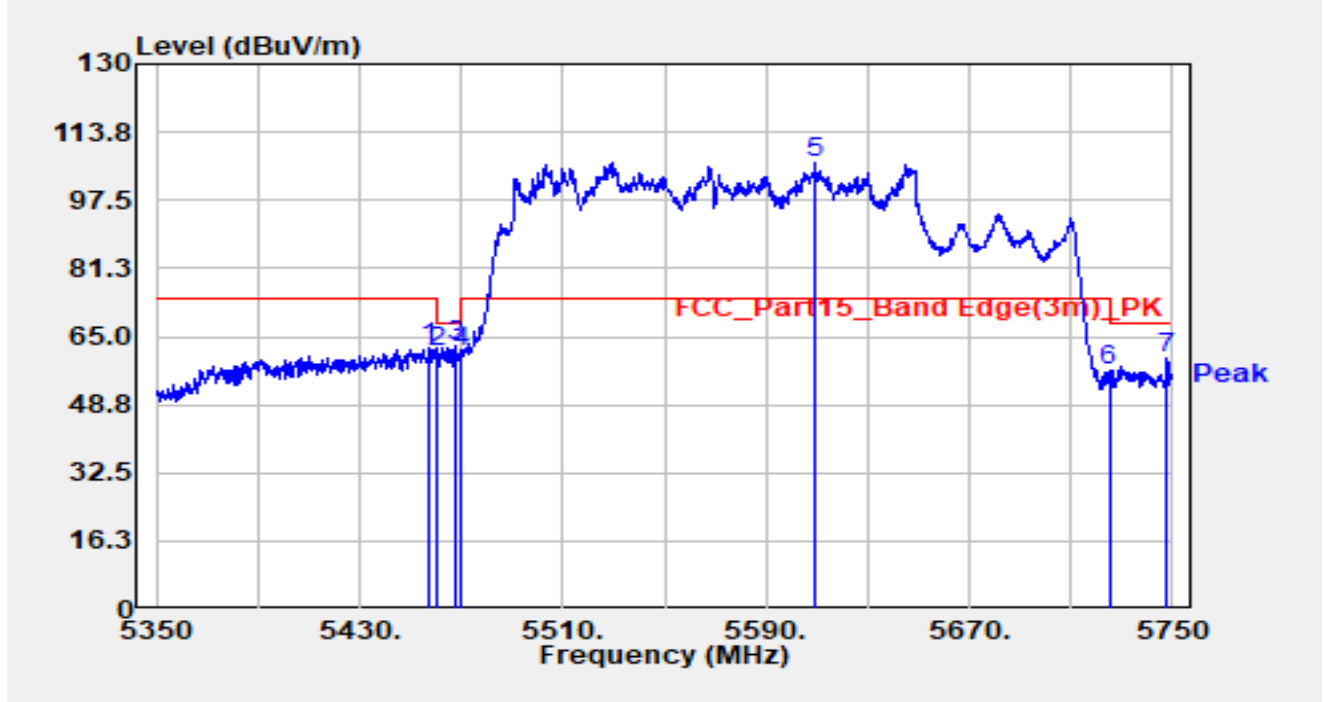


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5457.600	66.30	-4.11	62.20	-11.80	74.00	Peak
2		5460.000	65.24	-3.86	61.37	-6.83	68.20	Peak
3	*	5467.600	65.84	-2.88	62.96	-5.24	68.20	Peak
4		5470.000	63.39	-2.10	61.29	-6.91	68.20	Peak
5		5609.400	61.85	44.62	106.47	N/A	N/A	Peak
6		5725.000	58.81	-2.12	56.70	-11.50	68.20	Peak
7		5747.800	65.02	-5.29	59.72	-8.48	68.20	Peak

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2024-07-05
Test Engineer	Justin Guo	Temp./Humidity	24.3°C/65.2%
Factor	HF907_102862_1-18GHz	Polarity	Vertical
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT160 at 5570MHz		

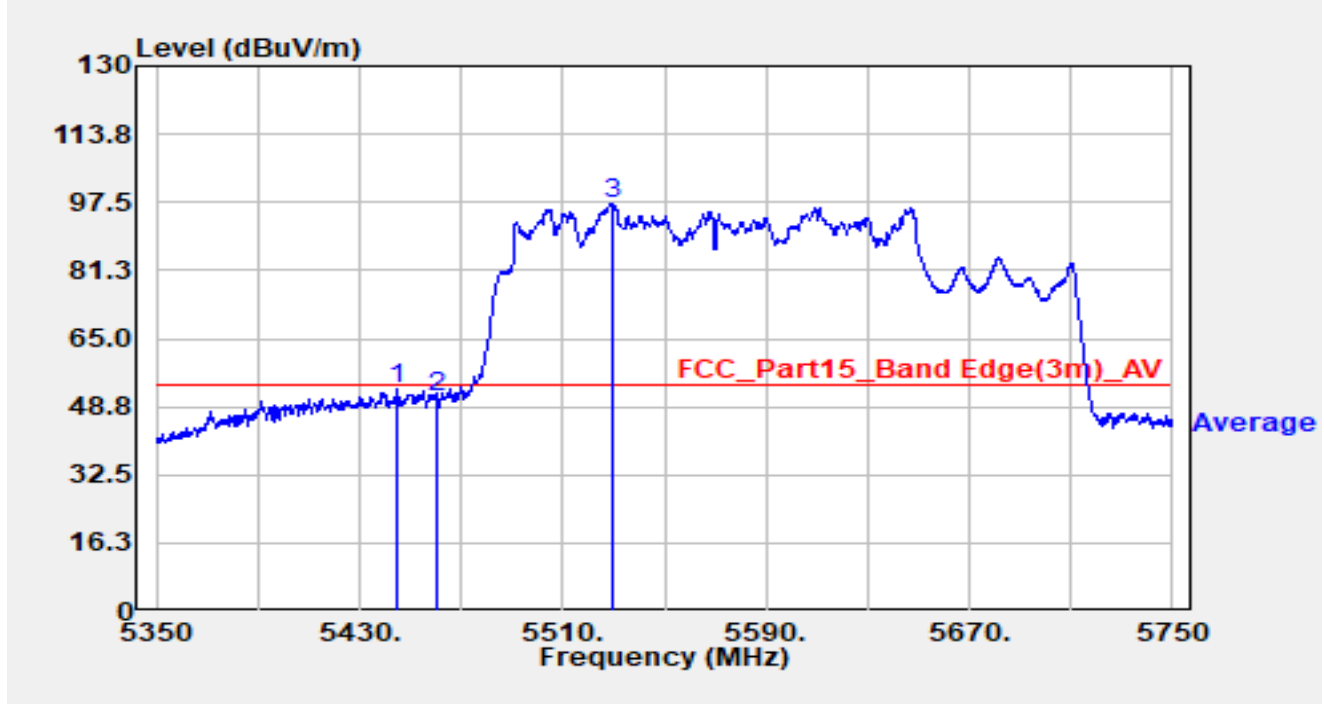


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5444.800	57.47	-4.71	52.77	-1.23	54.00	Average
2		5460.000	55.11	-3.86	51.25	-2.75	54.00	Average
3		5529.600	50.04	47.27	97.31	N/A	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)+ 16dB Attenuation (dB) -AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

A.9 AC Conducted Emissions Test Result

Site	SIP-SR2	Test Date	2024-07-01
Test Engineer	Arvin Ding	Temp./Humidity	26.3°C/65.9%
Factor	SIP-SR2-ENV216_101684_E	Polarity	Line
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11a at 5825MHz		

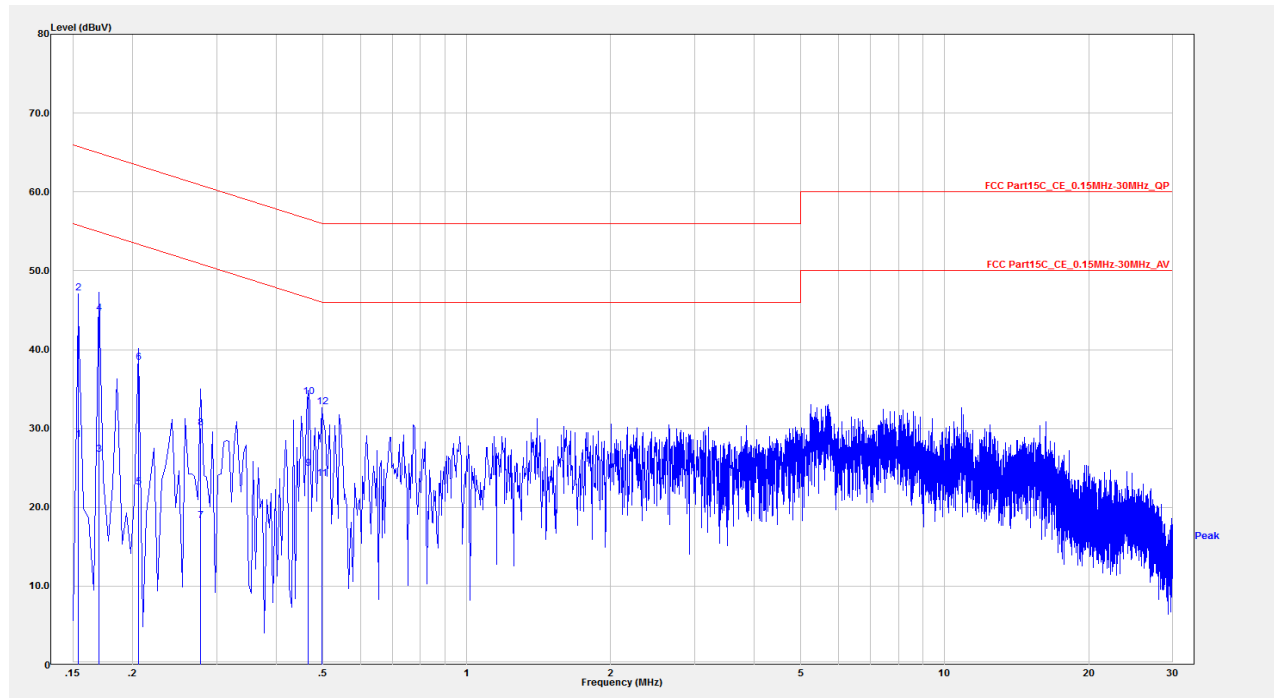


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.154	18.84	9.74	28.59	-27.19	55.78	Average
2	*	0.154	37.38	9.74	47.13	-18.65	65.78	QP
3		0.170	16.95	9.73	26.69	-28.27	54.96	Average
4		0.170	34.89	9.73	44.62	-20.34	64.96	QP
5		0.206	12.78	9.77	22.56	-30.81	53.37	Average
6		0.206	28.63	9.77	38.41	-24.96	63.37	QP
7		0.278	8.50	9.80	18.30	-32.57	50.88	Average
8		0.278	20.29	9.80	30.10	-30.78	60.88	QP
9		0.466	15.10	9.83	24.93	-21.66	46.59	Average
10		0.466	24.15	9.83	33.98	-22.61	56.59	QP
11		0.498	13.83	9.83	23.66	-22.37	46.03	Average
12		0.498	22.94	9.83	32.77	-23.26	56.03	QP

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement(dBμV) = Reading(dBμV) + C.F (dB).

Site	SIP-SR2	Test Date	2024-07-01
Test Engineer	Arvin Ding	Temp./Humidity	26.3°C/65.9%
Factor	SIP-SR2-ENV216_101684_E	Polarity	Neutral
EUT	Tri-band WIFI7 router	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11a at 5825MHz		

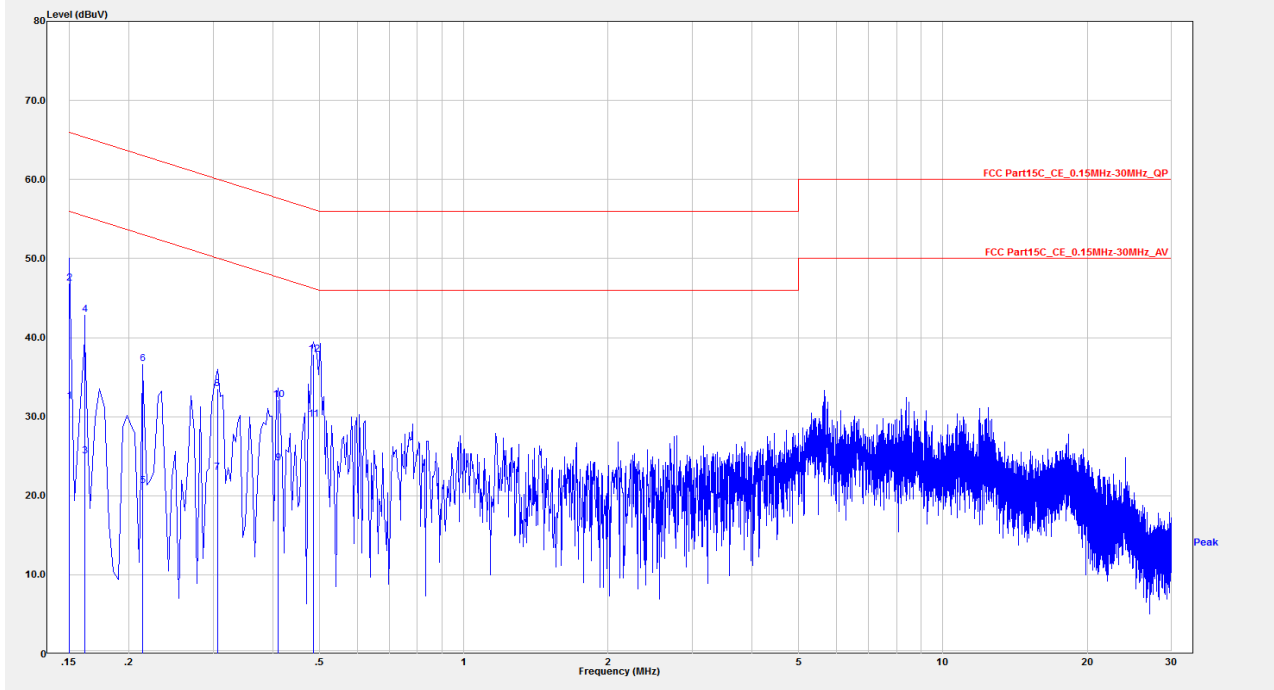

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.150	22.23	9.71	31.94	-24.06	56.00	Average
2		0.150	37.12	9.71	46.84	-19.16	66.00	QP
3		0.162	15.31	9.71	25.03	-30.33	55.36	Average
4		0.162	33.24	9.71	42.96	-22.40	65.36	QP
5		0.214	11.47	9.76	21.23	-31.82	53.05	Average
6		0.214	26.97	9.76	36.73	-26.32	63.05	QP
7		0.306	13.19	9.79	22.99	-27.09	50.08	Average
8		0.306	23.69	9.79	33.49	-26.59	60.08	QP
9		0.410	14.29	9.81	24.10	-23.55	47.65	Average
10		0.410	22.31	9.81	32.12	-25.53	57.65	QP
11	*	0.485	19.82	9.81	29.63	-16.62	46.25	Average
12		0.485	28.02	9.81	37.83	-18.43	56.25	QP

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement(dBμV) = Reading(dBμV) + C.F (dB).

Appendix B – Test Setup Photograph

Refer to “2406RSU024-UT” file.

Appendix C – EUT Photograph

Refer to “2406RSU024-UE” file.