



RF MEASUREMENT REPORT

FCC ID: VW3FAST5290V2
Applicant: SAGEMCOM BROADBAND SAS
Product: Fiber Wireless Router FWR226e
Model No.: FAST 5290
Brand Name: SAGEMCOM
FCC Classification: Unlicensed National Information Infrastructure (NII)
FCC Rule Part(s): Part 15 Subpart E (Section 15.407)
Test Date: February 25 ~ April 21, 2022

Reviewed By:

Sunny Sun

Approved By:

Robin Wu



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB789033. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
2202RSU047-U2	Rev. 01	Initial Report	04-22-2022	Valid

CONTENTS

Description	Page
1. General Information	6
1.1. Applicant.....	6
1.2. Manufacturer.....	6
1.3. Testing Facility	6
1.4. Product Information.....	7
1.5. Radio Specification	7
1.6. Working Frequencies	8
1.7. Antenna Details.....	8
2. Test Configuration	9
2.1. Test Mode	9
2.2. Test System Connection Diagram.....	9
2.3. Test Software	9
2.4. Applied Standards.....	10
2.5. Test Environment Condition.....	10
3. Antenna Requirements	11
4. Measuring Instrument.....	12
5. Measurement Uncertainty.....	13
6. Test Result.....	14
6.1. Summary	14
6.2. 26dB Bandwidth Measurement.....	15
6.2.1. Test Limit	15
6.2.2. Test Procedure.....	15
6.2.3. Test Setting.....	15
6.2.4. Test Setup.....	16
6.2.5. Test Result.....	16
6.3. 6dB Bandwidth Measurement	17
6.3.1. Test Limit	17
6.3.2. Test Procedure.....	17
6.3.3. Test Setting.....	17
6.3.4. Test Setup.....	17
6.3.5. Test Result.....	17
6.4. Output Power Measurement.....	18
6.4.1. Test Limit	18
6.4.2. Test Procedure.....	18
6.4.3. Test Setting.....	18

6.4.4.	Test Setup.....	18
6.4.5.	Test Result.....	18
6.5.	Power Spectral Density Measurement.....	19
6.5.1.	Test Limit	19
6.5.2.	Test Procedure.....	19
6.5.3.	Test Setting.....	19
6.5.4.	Test Setup.....	20
6.5.5.	Test Result.....	20
6.6.	Frequency Stability Measurement	21
6.6.1.	Test Limit	21
6.6.2.	Test Procedure.....	21
6.6.3.	Test Setup.....	22
6.6.4.	Test Result.....	22
6.7.	Radiated Spurious Emission Measurement	23
6.7.1.	Test Limit	23
6.7.2.	Test Procedure.....	23
6.7.3.	Test Setting.....	23
6.7.4.	Test Setup.....	25
6.7.5.	Test Result.....	25
6.8.	Radiated Restricted Band Edge Measurement	26
6.8.1.	Test Limit	26
6.8.2.	Test Procedure.....	27
6.8.3.	Test Setting.....	27
6.8.4.	Test Setup.....	28
6.8.5.	Test Result.....	28
6.9.	AC Conducted Emissions Measurement	29
6.9.1.	Test Limit	29
6.9.2.	Test Setup.....	29
6.9.3.	Test Result.....	29
Appendix A – Test Result		30
A.1	Duty Cycle Test Result	30
A.2	26dB & 99% Bandwidth Test Result	32
A.3	6dB Bandwidth Test Result.....	41
A.4	Output Power Test Result.....	47
A.5	Power Spectral Density Test Result.....	49
A.6	Frequency Stability Test Result	79
A.7	Radiated Spurious Emission Test Result	80
A.8	Radiated Restricted Band Edge Test Result	112
A.9	AC Conducted Emissions Test Result.....	164

Appendix B – Test Setup Photograph.....	166
Appendix C – EUT Photograph	167

1. General Information

1.1. Applicant

SAGEMCOM BROADBAND SAS

250 Route de l'Empereur - 92848 RUEIL MALMAISON CEDEX- FRANCE

1.2. Manufacturer

SAGEMCOM BROADBAND SAS

250 Route de l'Empereur - 92848 RUEIL MALMAISON CEDEX- FRANCE

1.3. Testing Facility

☒	Test Site – MRT Suzhou Laboratory Laboratory Location (Suzhou - Wuzhong) D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China Laboratory Location (Suzhou - SIP) 4b Building, Liando U Valley, No.200 Xingpu Rd., Shengpu Town, Suzhou Industrial Park, China Laboratory Accreditations A2LA: 3628.01 CNAS: L10551 FCC: CN1166 ISED: CN0001 VCCI: ☐ R-20025 ☐ G-20034 ☐ C-20020 ☐ T-20020 ☐ R-20141 ☐ G-20134 ☐ C-20103 ☐ T-20104
☐	Test Site – MRT Shenzhen Laboratory Laboratory Location (Shenzhen) 1G, Building A, Junxiangda Building, Zhongshanyuan Road West, Nanshan District, Shenzhen, China Laboratory Accreditations A2LA: 3628.02 CNAS: L10551 FCC: CN1284 ISED: CN0105
☐	Test Site – MRT Taiwan Laboratory Laboratory Location (Taiwan) No. 38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) Laboratory Accreditations TAF: L3261-190725 FCC: 291082, TW3261 ISED: TW3261

1.4. Product Information

Product Name	Fiber Wireless Router FWR226e
Model No.	FAST 5290
EUT Identification No.	20220223Sample#04(Radiated) 20220223Sample#03(Conducted)
Wi-Fi Specification	802.11b/g/n/ac/ax
Antenna Information	Refer to Section 1.7
Power Type	AC Adapter
Operating Environment	Indoor Use
Accessories	
Adapter 1#	MODEL: MS-V4100R120-050A0-US INPUT: 100-127V ~ 50/60Hz Max 1.3A OUTPUT: 12V=4.1A
Adapter 2#	MODEL: ADS-50FKI-12 12049EPCU-L INPUT: 100-127V ~ 50/60Hz Max 1.2A OUTPUT: 12V=4.1A
Adapter 3#	MODEL: NBS50A120410VU INPUT: 100-127V ~ 50/60Hz Max 1.5A OUTPUT: 12V=4.1A
Remark:	
1. The information of EUT was provided by the manufacturer, and the accuracy of the information shall be the responsibility of the manufacturer.	
2. For this report, we select Adapter 1# for testing.	

1.5. Radio Specification

Frequency Range	For 802.11a/n-HT20/ac-VHT20/ax-HE20: 5180 ~ 5240MHz, 5745 ~ 5825MHz For 802.11n-HT40/ac-VHT40/ax-HE40: 5190 ~ 5230MHz, 5755 ~ 5795MHz For 802.11ac-VHT80/ax-HE80: 5210MHz, 5775MHz
Type of Modulation	802.11a/n/ac: OFDM 802.11ax: OFDMA
Data Rate	802.11a: 6/9/12/18/24/36/48/54Mbps; 802.11n: up to 600Mbps 802.11ac: up to 3466.7Mbps; 802.11ax: up to 4804Mbps

Note: For other features of this EUT, test report will be issued separately.

1.6. Working Frequencies

802.11a/n-HT20/ac-VHT20/ax-HE20

Channel	Frequency	Channel	Frequency	Channel	Frequency
36	5180 MHz	40	5200 MHz	44	5220 MHz
48	5240 MHz	149	5745 MHz	153	5765 MHz
157	5785 MHz	161	5805 MHz	165	5825 MHz

802.11n-HT40/ac-VHT40/ax-HE40

Channel	Frequency	Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz	151	5755 MHz
159	5795 MHz	--	--	--	--

802.11ac-VHT80/ax-HE80

Channel	Frequency	Channel	Frequency	Channel	Frequency
42	5210 MHz	155	5775 MHz	--	--

1.7. Antenna Details

Antenna Type	Frequency Band (GHz)	Antenna Gain (dBi)				Directional Gain (dBi)	
		Ant 0	Ant 1	Ant 2	Ant 3	For Power	For PSD
Wi-Fi Antenna (2.4G 3*3 MIMO)							
PCB	2.4 ~ 2.4835	4.12	3.66	2.01	--	4.12	4.65
Wi-Fi Antenna (5G 4*4 MIMO)							
PCB	5.15 ~ 5.85	4.52	5.10	5.33	5.58	5.58	5.91

2. Test Configuration


2.1. Test Mode

Mode 1: Transmit by 802.11a (6Mbps)
Mode 2: Transmit by 802.11ac-VHT20 (MCS0)
Mode 3: Transmit by 802.11ac-VHT40 (MCS0)
Mode 4: Transmit by 802.11ac-VHT80 (MCS0)
Mode 5: Transmit by 802.11ax-HE20 (MCS0)
Mode 6: Transmit by 802.11ax-HE40 (MCS0)
Mode 7: Transmit by 802.11ax-HE80 (MCS0)

Note: Due to the same modulation between 802.11n and 802.11ac, so 802.11n are covered by 802.11ac in this report, meanwhile, power setting for 802.11n will not be greater than 802.11ac.

2.2. Test System Connection Diagram

The device was tested per the guidance ANSI C63.10: 2013 was used to reference the appropriate EUT setup for radiated emissions testing and AC line conducted testing.

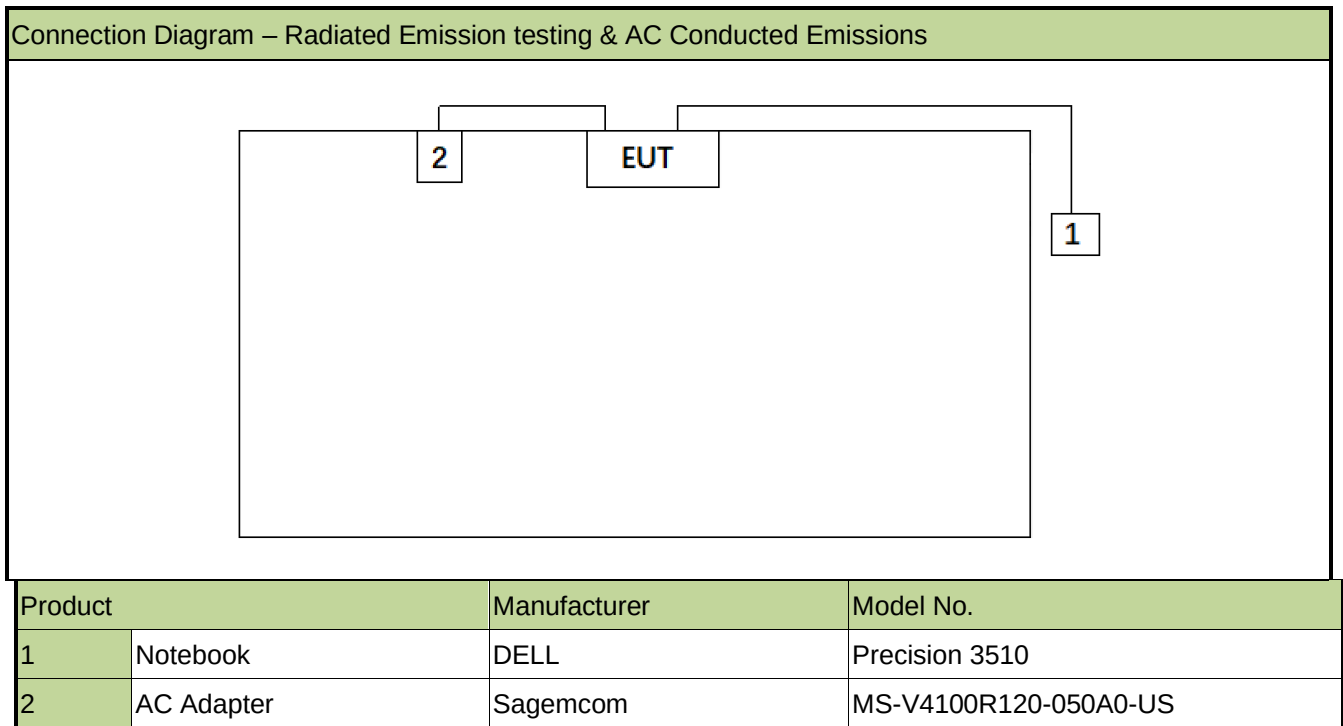

2.3. Test Software

The test utility software used during testing was “accessMTool”, and the version was 3.2.1.5.

Note: Final power setting please refer to operational description.

2.4. Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15.407
- KDB 789033 D02v02r01
- KDB 662911 D01v02r01
- ANSI C63.10-2013

2.5. Test Environment Condition

Ambient Temperature	15 ~ 35°C
Relative Humidity	20 ~ 75%RH

3. Antenna Requirements

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the device is **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The unit complies with the requirement of §15.203.

4. Measuring Instrument

Instrument	Manufacturer	Model No.	Asset No.	Cali. Interval	Cali. Due Date	Test Site
Signal Analyzer	Agilent	N9020A	MRTSUE06106	1 year	2023/4/6	WZ-SR5
Signal Analyzer	Agilent	N9020A	MRTSUE06106	1 year	2023/4/6	WZ-SR5
Thermohygrometer	testo	608-H1	MRTSUE06402	1 year	2022/6/28	WZ-SR5
Shielding Room	HUAMING	WZ-SR5	MRTSUE06442	/	/	WZ-SR5
Signal Analyzer	Keysight	N9010B	MRTSUE06457	1 year	2022/6/24	WZ-SR5/WZ-TR3
EMI Test Receiver	R&S	ESR7	MRTSUE06001	1 year	2022/12/29	WZ-AC1
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2022/10/28	WZ-AC1/WZ-AC2
Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06023	1 year	2022/9/16	WZ-AC1
Preamplifier	Agilent	83017A	MRTSUE06076	1 year	2022/11/12	WZ-AC1
TRILOG Antenna	Schwarzbeck	VULB 9168	MRTSUE06172	1 year	2022/8/5	WZ-AC1
Anechoic Chamber	TDK	WZ-AC1	MRTSUE06212	1 year	2022/4/29	WZ-AC1
Thermohygrometer	testo	608-H1	MRTSUE06403	1 year	2022/6/28	WZ-AC1
Signal Analyzer	Keysight	N9010B	MRTSUE06607	1 year	2022/12/29	WZ-AC1
Thermohygrometer	testo	Testo 608-H1	MRTSUE11039	1 year	2022/11/11	WZ-AC1
TRILOG Antenna	Schwarzbeck	VULB 9162	MRTSUE06022	1 year	2022/5/24	WZ-AC2
EMI Test Receiver	Agilent	N9038A	MRTSUE06125	1 year	2022/6/24	WZ-AC2
Thermohygrometer	Mingle	ETH529	MRTSUE06170	1 year	2022/12/1	WZ-AC2
Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06171	1 year	2022/10/21	WZ-AC2
Preamplifier	Schwarzbeck	BBV 9718	MRTSUE06176	1 year	2022/11/12	WZ-AC2
Anechoic Chamber	RIKEN	WZ-AC2	MRTSUE06213	1 year	2022/4/29	WZ-AC2
Thermohygrometer	testo	Testo 608-H1	MRTSUE11038	1 year	2022/11/11	WZ-AC2
Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06597	1 year	2022/12/1	WZ-AC2
Preamplifier	EMCI	EMC184045SE	MRTSUE06640	1 year	2023/1/13	WZ-AC2
Four-Line V-Network	R&S	ENV432	MRTSUE06615	1 year	2022/10/13	WZ-SR2
EMI Test Receiver	R&S	ESR3	MRTSUE06909	1 year	2022/11/1	WZ-SR2
Two-Line V-Network	R&S	ENV216	MRTSUE06002	1 year	2022/6/8	WZ-SR2
Shielding Room	MIX-BEP	WZ-SR2	MRTSUE06215	N/A	N/A	WZ-SR2
Thermohygrometer	testo	608-H1	MRTSUE06404	1 year	2022/6/28	WZ-SR2
Temperature Chamber	BAOYT	BYH-150CL	MRTSUE06051	1 year	2022/10/10	WZ-TR3
Thermohygrometer	testo	608-H1	MRTSUE06401	1 year	2022/6/28	WZ-TR3

Software	Version	Function
EMI Software	V3	EMI Test Software

5. Measurement Uncertainty

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement
Measurement Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 9kHz~150kHz: 3.74dB 150kHz~30MHz: 3.44dB
Radiated Disturbance
Measurement Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): Horizontal: 30MHz~300MHz: 5.04dB 300MHz~1GHz: 4.95dB 1GHz~40GHz: 6.40dB Vertical: 30MHz~300MHz: 5.24dB 300MHz~1GHz: 6.03dB 1GHz~40GHz: 6.40dB
Spurious Emissions, Conducted
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 0.78dB
Output Power
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 1.13dB
Power Spectrum Density
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 1.15dB
Occupied Bandwidth
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 0.28%

6. Test Result

6.1. Summary

FCC Section(s)	Test Description	Test Condition	Verdict
15.407(a)	26dB Bandwidth	Conducted	Pass
15.407(e)	6dB Bandwidth		Pass
15.407(a)(1)(ii), (3)	Maximum Conducted Output Power		Pass
15.407(a)(1)(ii), (3), (12)	Peak Power Spectral Density		Pass
15.407(b)(1), (4)(i)	Undesirable Emissions		Pass
15.205, 15.209 15.407 (8), (9)	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Radiated	Pass
15.207	AC Conducted Emissions 150kHz - 30MHz	Line Conducted	Pass

Remark:

- The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- Output power test was verified over all data rates of each mode (data refers to operational description), and then choose the maximum power output (low data rate) for final test of each channel.
- EUT supports one configuration only in 802.11ax full RU mode.

6.2. 26dB Bandwidth Measurement

6.2.1. Test Limit

N/A

6.2.2. Test Procedure

KDB 789033 D02v02r01- Section C.1 (26dB Bandwidth)

KDB 789033 D02v02r01- Section D (99% Bandwidth)

6.2.3. Test Setting


26dB Bandwidth

1. The analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 26$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediated power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth.
3. VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold.

99% Bandwidth

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1% to 5% of the OBW
4. Set VBW $\geq 3 \times$ RBW
5. Detector = Peak.
6. Use the 99% power bandwidth function of the instrument.

6.2.4. Test Setup

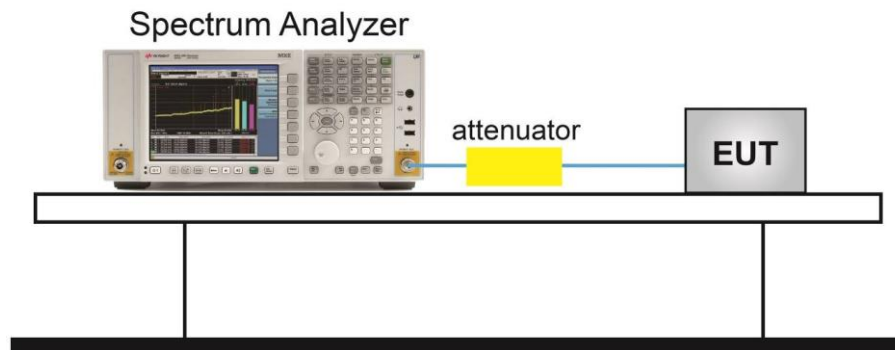

6.2.5. Test Result

Refer to Appendix A.2.

6.3. 6dB Bandwidth Measurement

6.3.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.


6.3.2. Test Procedure

KDB 789033 D02v02r01- Section C.2

6.3.3. Test Setting

1. Set center frequency to the nominal EUT channel center frequency.
2. RBW = 100 kHz.
3. VBW $3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold.
6. Sweep = auto couple.
7. Allow the trace to stabilize.
8. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.3.4. Test Setup

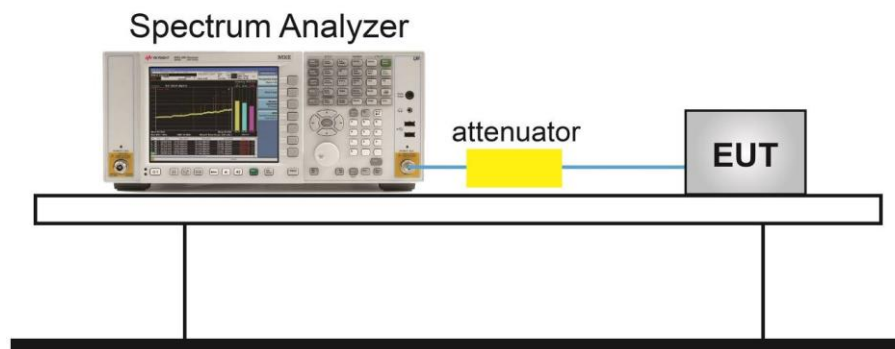

6.3.5. Test Result

Refer to Appendix A.3.

6.4. Output Power Measurement

6.4.1. Test Limit

For the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W (30dBm).

If transmitting antennas of directional gain greater than 6dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

6.4.2. Test Procedure


KDB 789033D02v02r01- Section E)3)b) Method PM-G

6.4.3. Test Setting

Average Power Measurement

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

6.4.4. Test Setup

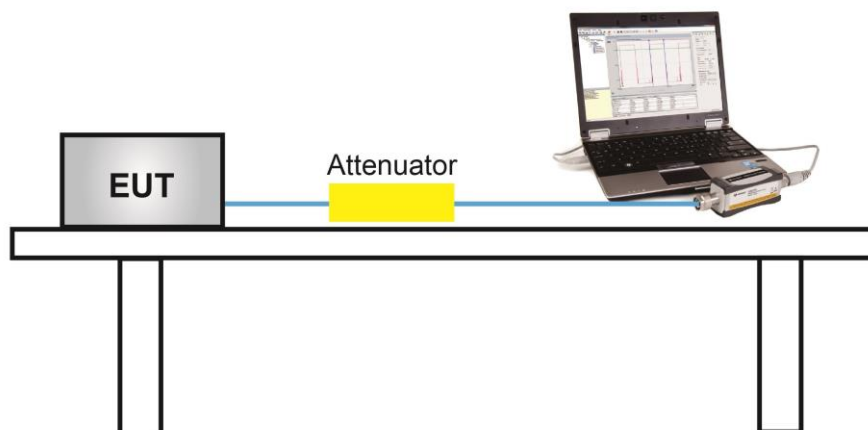

6.4.5. Test Result

Refer to Appendix A.4.

6.5. Power Spectral Density Measurement

6.5.1. Test Limit

For the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band.

For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

If transmitting antennas of directional gain greater than 6dBi are used, the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


6.5.2. Test Procedure

KDB 789033 D02v02r01-SectionF

6.5.3. Test Setting

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire 26dB EBW of the signal.
3. RBW = 1MHz, if measurement bandwidth of Maximum PSD is specified in 500 kHz, RBW = 510 kHz
4. VBW = $3 \times \text{RBW}$
5. Number of sweep points $\geq 2 \times (\text{span} / \text{RBW})$
6. Detector = power averaging (Average)
7. Sweep time = auto
8. Trigger = free run
9. Use the peak search function on the instrument to find the peak of the spectrum and record its value.
10. Add $10 \cdot \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission). For example, add $10 \cdot \log(1/0.25) = 6 \text{ dB}$ if the duty cycle is 25 percent.

6.5.4. Test Setup

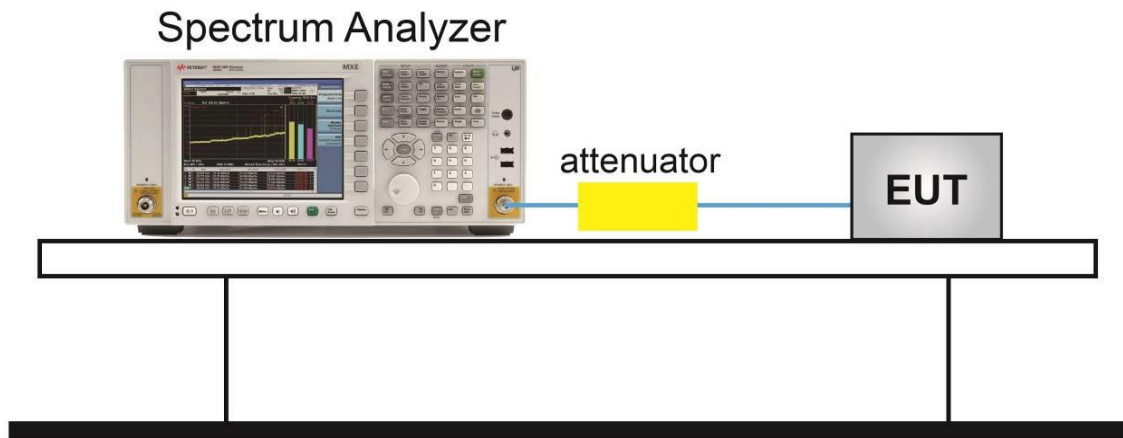

6.5.5. Test Result

Refer to Appendix A.5.

6.6. Frequency Stability Measurement

6.6.1. Test Limit

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

6.6.2. Test Procedure

Frequency Stability Under Temperature Variations:


The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to highest. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C decreased per stage until the lowest temperature reached.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

6.6.3. Test Setup

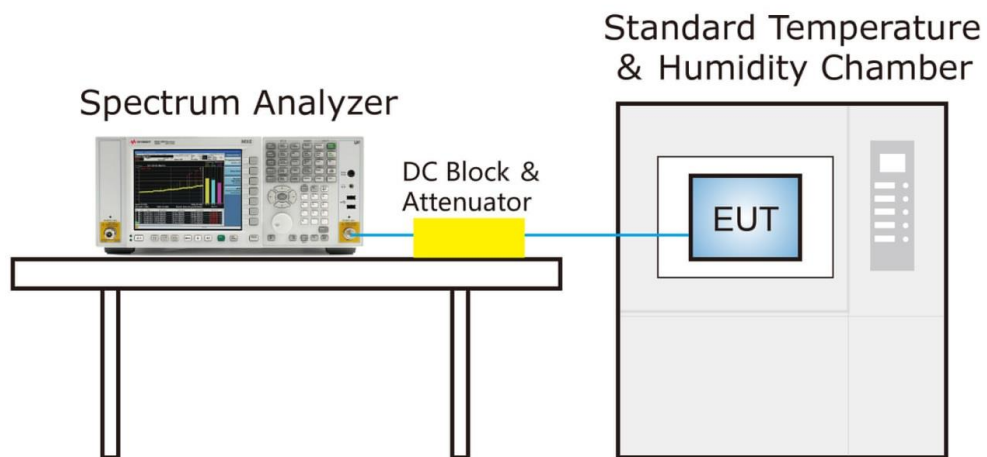

6.6.4. Test Result

Refer to Appendix A.6.

6.7. Radiated Spurious Emission Measurement

6.7.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.7.2. Test Procedure

KDB 789033 D02v02r01- Section G

6.7.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000MHz	1MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

6.7.4. Test Setup

Below 1GHz Test Setup:

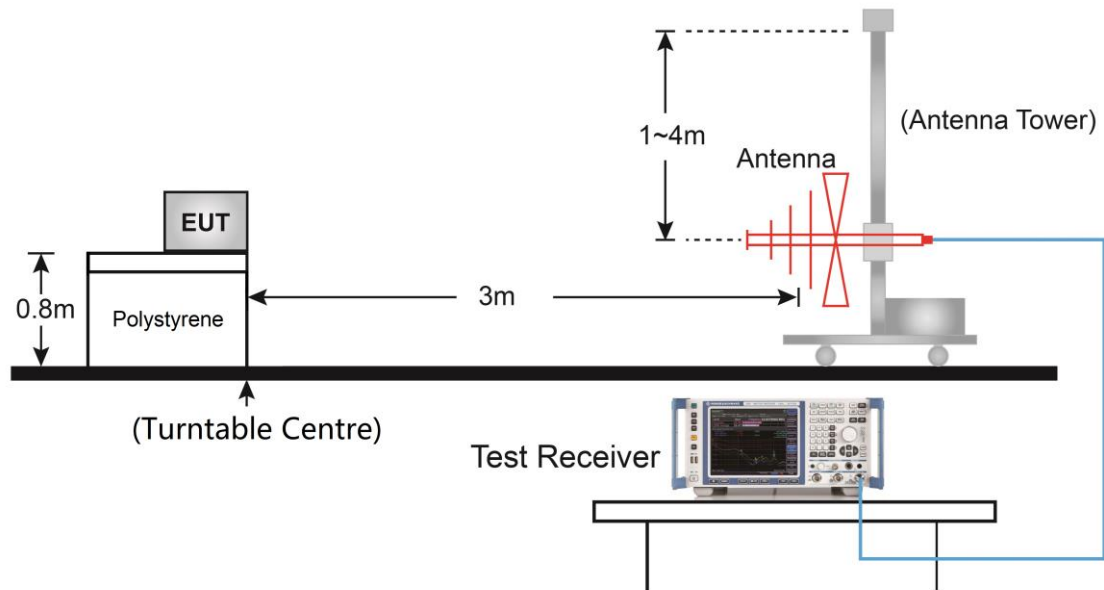

Above 1GHz Test Setup:

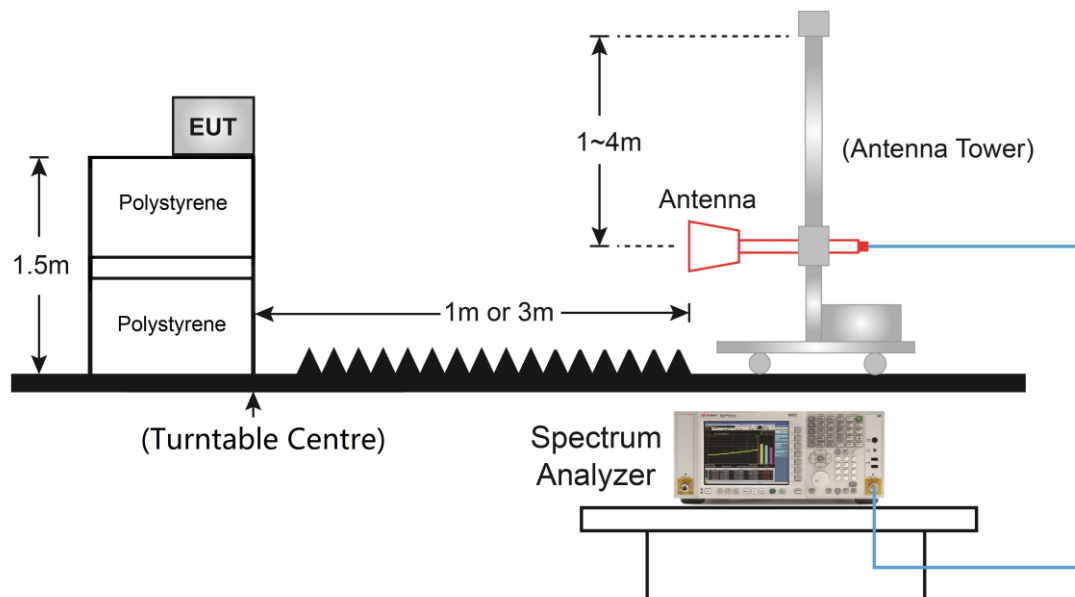

6.7.5. Test Result

Refer to Appendix A.7.

6.8. Radiated Restricted Band Edge Measurement

6.8.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

For 15.407(b) requirement:

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Refer to KDB 789033 D02v02r01 G)2)c), as specified in § 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a maximum emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in § 15.407(b)(4)). However, an out-of-band emission that complies with both the peak and average limits of § 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz maximum emission limit.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [μV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.8.2. Test Procedure

KDB 789033 D02v02r01- Section G

6.8.3. Test Setting

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Peak
5. Sweep time = Auto couple
6. Trace mode = Max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz

3. VBW; if the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10Hz
4. If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration
5. Detector = Peak
6. Sweep time = Auto
7. Trace mode = Max hold
8. Trace was allowed to stabilize

6.8.4. Test Setup

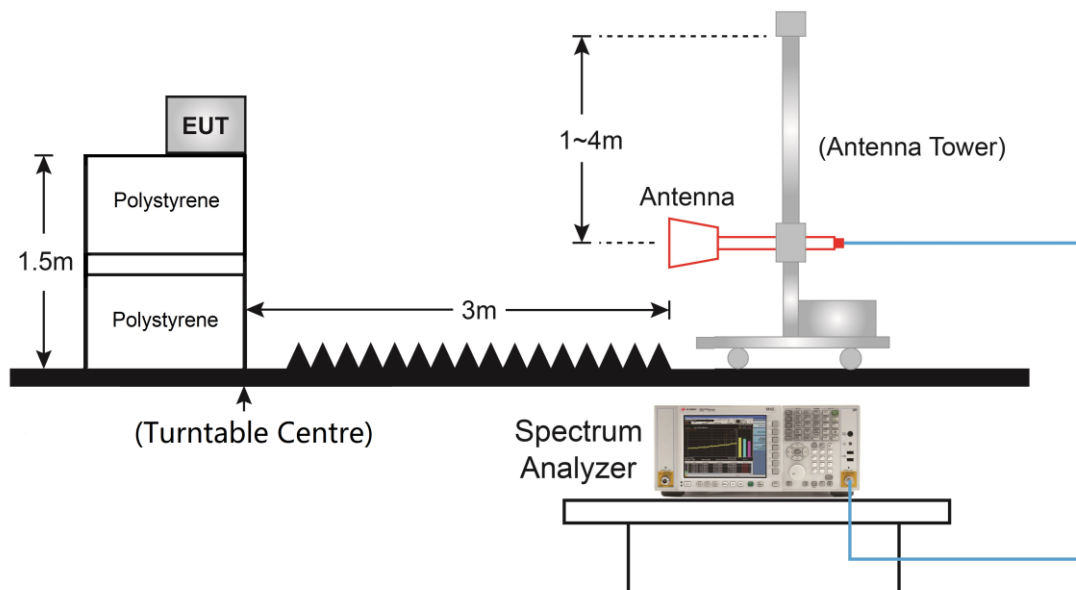

6.8.5. Test Result

Refer to Appendix A.8.

6.9. AC Conducted Emissions Measurement


6.9.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dB μ V)	AV (dB μ V)
0.15 ~ 0.50	66 ~ 56	56 ~ 46
0.50 ~ 5.0	56	46
5.0 ~ 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

6.9.2. Test Setup




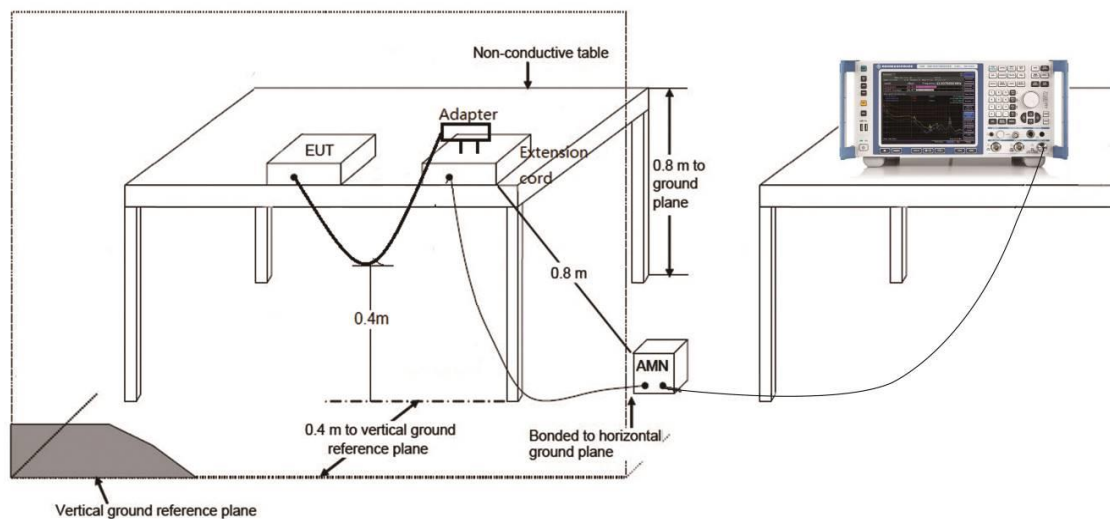


6.9.3. Test Result

Refer to Appendix A.9.


Appendix A – Test Result

A.1 Duty Cycle Test Result

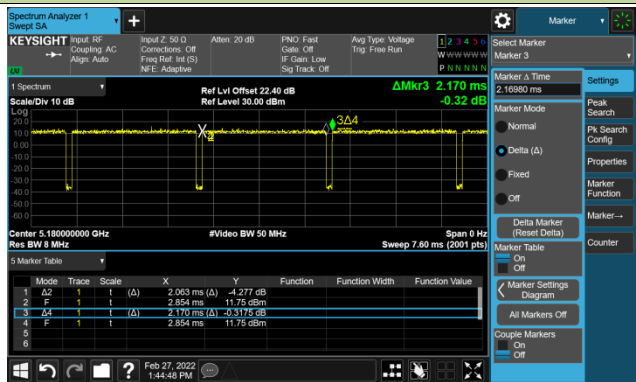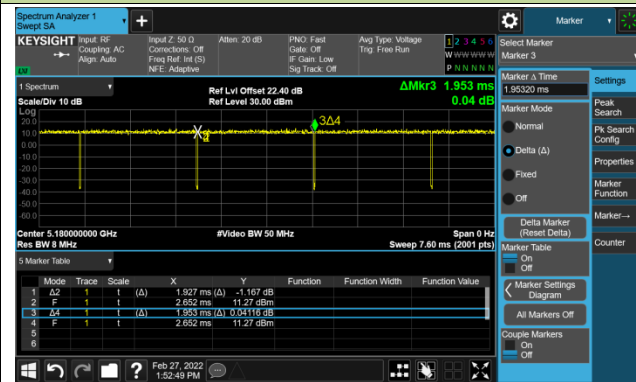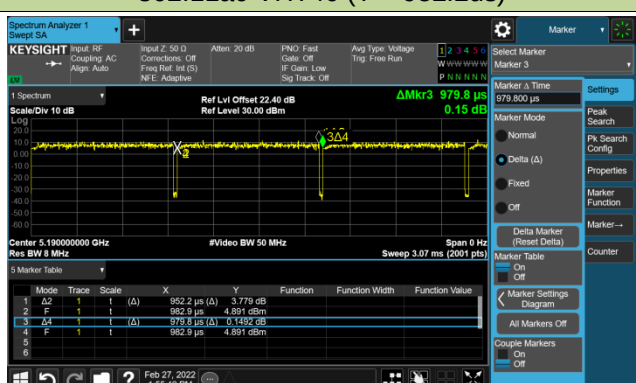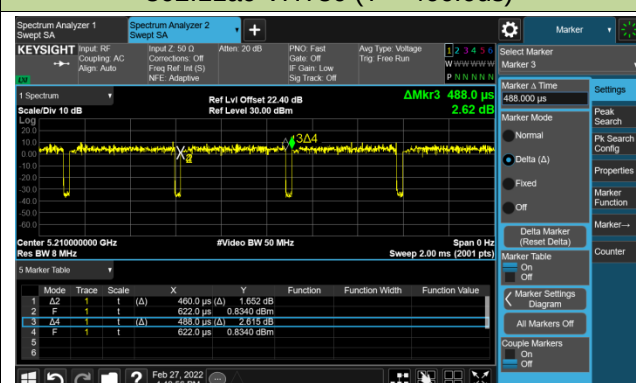
Test Mode	Duty Cycle
802.11a	95.07%
802.11ac-VHT20	98.67%
802.11ac-VHT40	97.18%
802.11ac-VHT80	94.26%
802.11ax-HE20	98.15%
802.11ax-HE40	96.39%
802.11ax-HE80	93.65%
Duty Cycle (T = Transmission Duration)	
802.11a (T = 2.063ms)	802.11ac-VHT20 (T = 1.927ms)
	
802.11ac-VHT40 (T = 952.2us)	802.11ac-VHT80 (T = 460.0us)
	

Duty Cycle (T = Transmission Duration)


802.11ax-HE20 (T = 1.487ms)

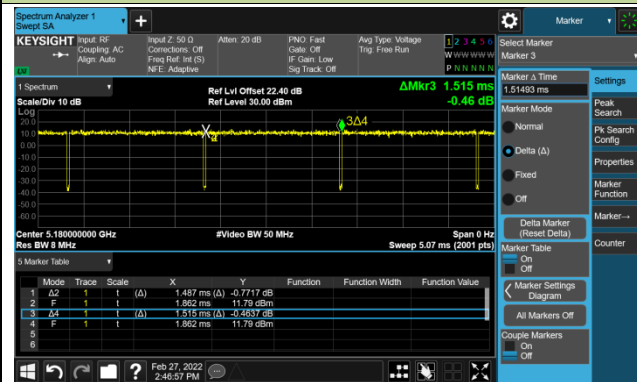

802.11ax-HE40 (T = 778.9us)

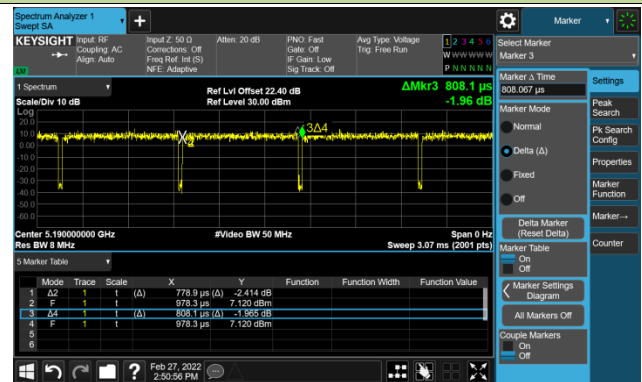

802.11ax-HE80 (T = 412.8us)

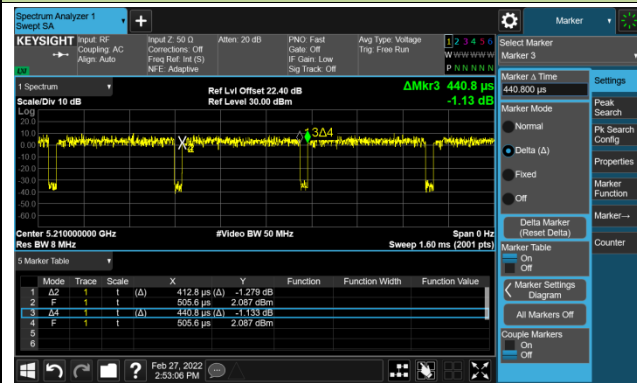

A.2 26dB & 99% Bandwidth Test Result

Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2022/03/02		

Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)
11a	6Mbps	36	5180	22.03	17.03
11a	6Mbps	44	5220	34.60	17.75
11a	6Mbps	48	5240	32.41	17.89
11a	6Mbps	149	5745	30.56	17.86
11a	6Mbps	157	5785	38.44	19.43
11a	6Mbps	165	5825	38.52	19.40
11ac-VHT20	MCS0	36	5180	23.60	19.10
11ac-VHT20	MCS0	44	5220	38.08	18.74
11ac-VHT20	MCS0	48	5240	39.39	18.87
11ac-VHT20	MCS0	149	5745	35.49	18.98
11ac-VHT20	MCS0	157	5785	38.82	19.62
11ac-VHT20	MCS0	165	5825	38.12	19.69
11ac-VHT40	MCS0	38	5190	49.89	36.53
11ac-VHT40	MCS0	46	5230	71.39	37.03
11ac-VHT40	MCS0	151	5755	76.16	37.95
11ac-VHT40	MCS0	159	5795	79.20	39.11
11ac-VHT80	MCS0	42	5210	86.48	76.09
11ac-VHT80	MCS0	155	5775	87.68	75.85
11ax-HE20	MCS0	36	5180	23.94	19.15
11ax-HE20	MCS0	44	5220	36.40	19.60
11ax-HE20	MCS0	48	5240	38.95	19.55
11ax-HE20	MCS0	149	5745	39.22	19.67
11ax-HE20	MCS0	157	5785	38.90	19.74
11ax-HE20	MCS0	165	5825	37.48	19.67
11ax-HE40	MCS0	38	5190	42.52	37.77
11ax-HE40	MCS0	46	5230	62.57	38.26
11ax-HE40	MCS0	151	5755	78.70	38.66
11ax-HE40	MCS0	159	5795	66.96	38.19
11ax-HE80	MCS0	42	5210	81.46	77.32
11ax-HE80	MCS0	155	5775	80.80	77.24


Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	F _H (MHz)	Limit (MHz)
802.11a	6Mbps	48	5240	5248.947	< 5250
802.11ac-VHT20	MCS0	48	5240	5249.435	< 5250
802.11ac-VHT40	MCS0	46	5230	5248.514	< 5250
802.11ac-VHT80	MCS0	42	5210	5248.045	< 5250
802.11ax-HE20	MCS0	48	5240	5249.777	< 5250
802.11ax-HE40	MCS0	46	5230	5249.131	< 5250
802.11ax-HE80	MCS0	42	5210	5248.658	< 5250

Note: F_H = Centre frequency + 99% OBW / 2


For example, 802.11a 5240MHz, F_H = 5240 MHz + 17.893 MHz / 2 = 5248.947 MHz.

802.11a 26dB Bandwidth


Channel 36 (5180MHz)

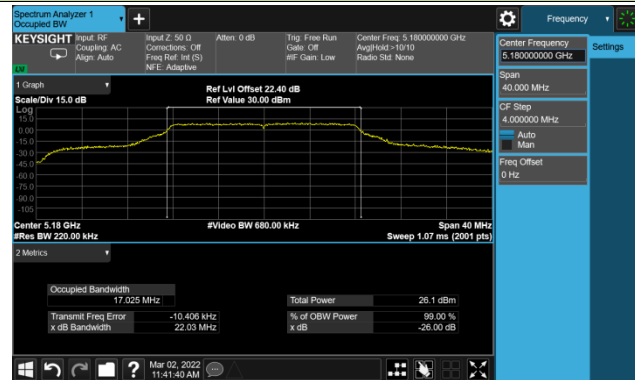


Channel 44 (5220MHz)

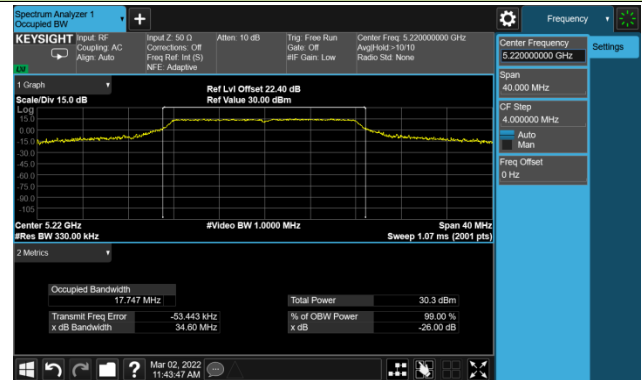


Channel 48 (5240MHz)

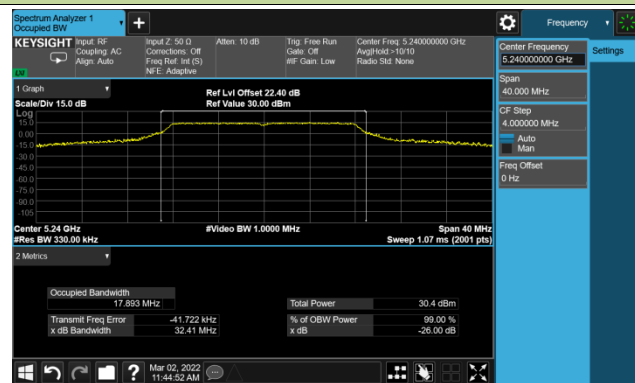


Channel 149 (5745MHz)

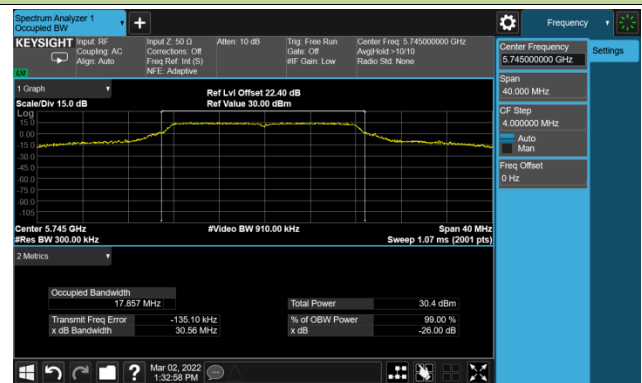

Channel 157 (5785MHz)

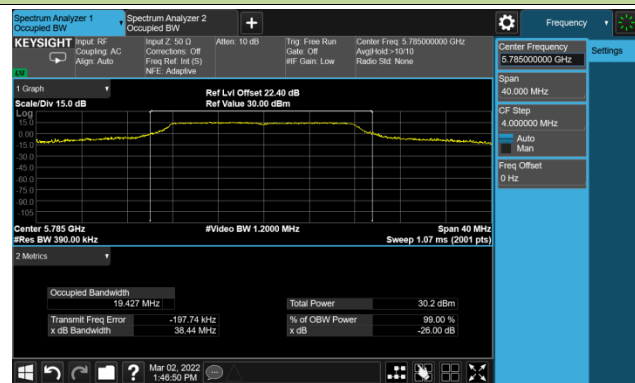


Channel 165 (5825MHz)

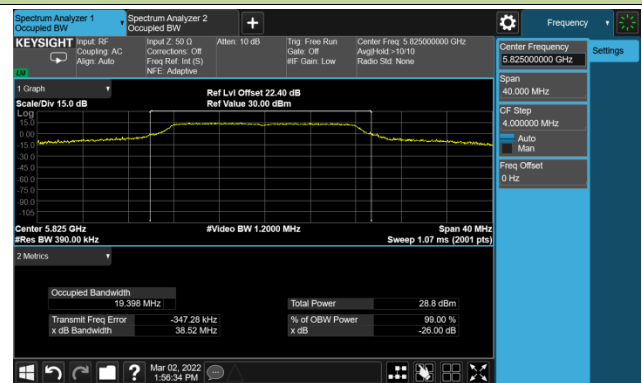


802.11ac-VHT20 26dB Bandwidth


Channel 36 (5180MHz)

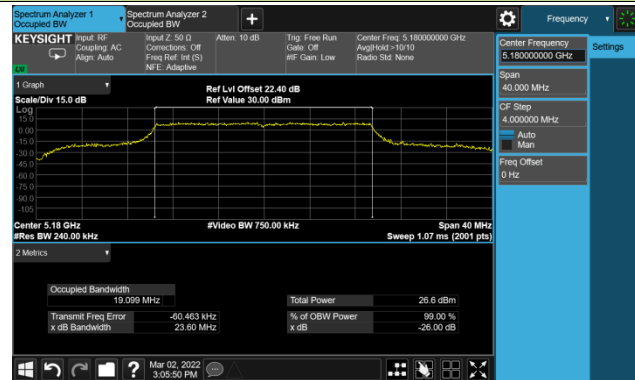


Channel 44 (5220MHz)

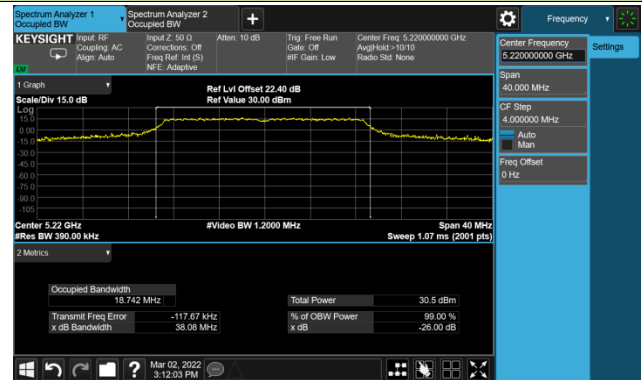


Channel 48 (5240MHz)

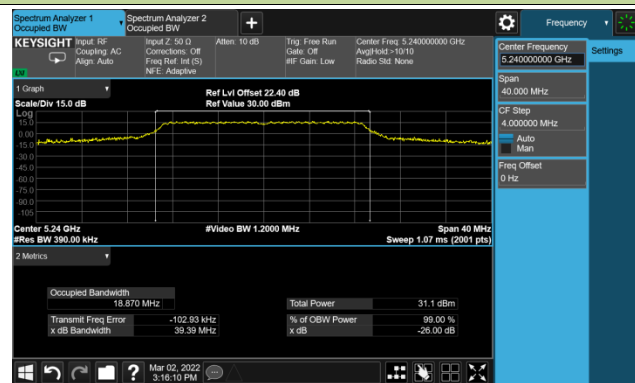


Channel 149 (5745MHz)

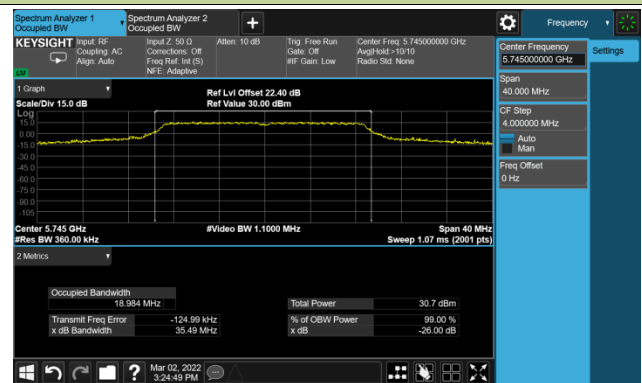

Channel 157 (5785MHz)

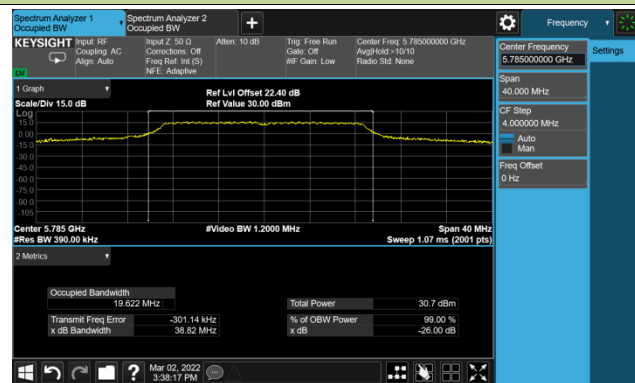


Channel 165 (5825MHz)

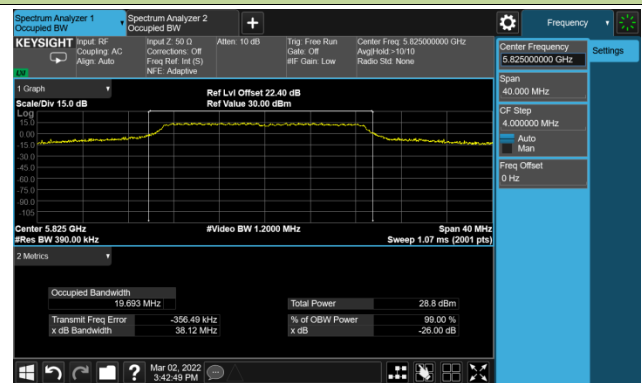


802.11ac-VHT40 26dB Bandwidth


Channel 38 (5190MHz)

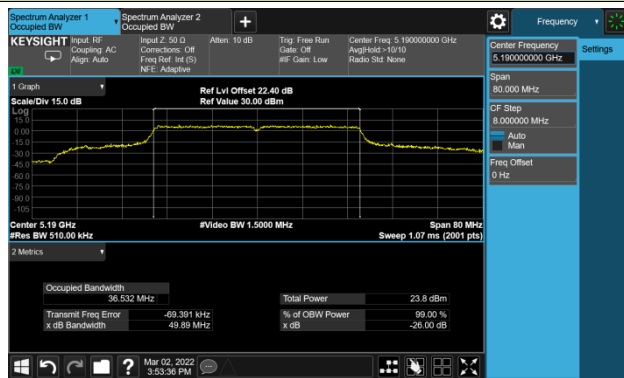


Channel 46 (5230MHz)

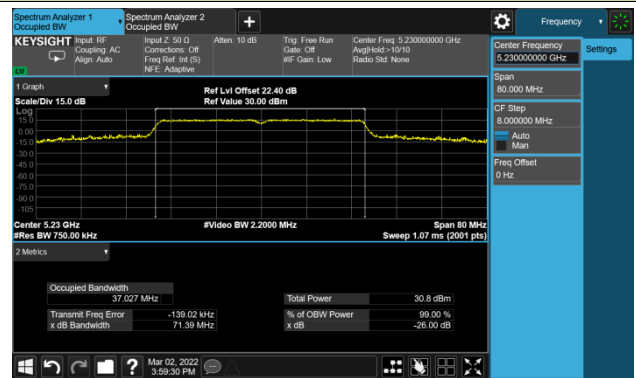


Channel 151 (5755MHz)

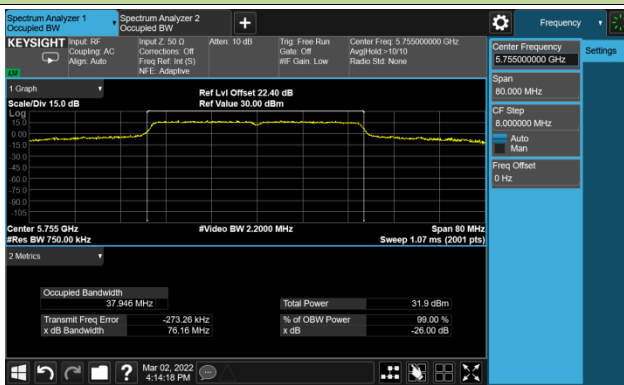


Channel 159 (5795MHz)

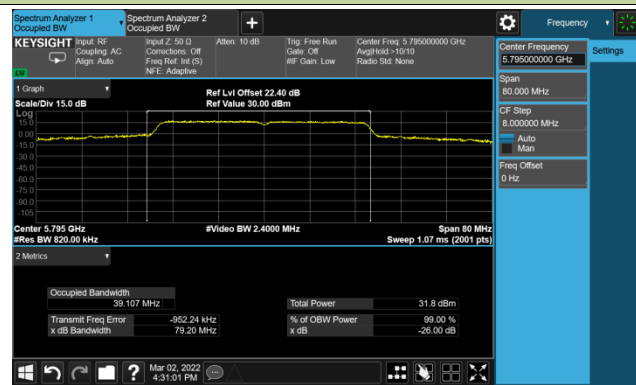

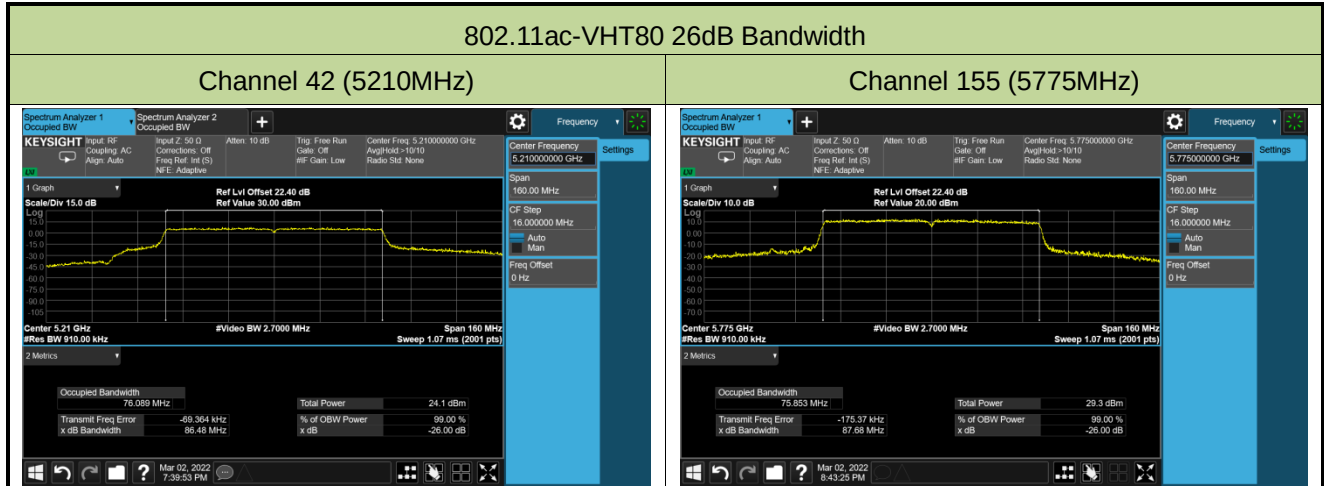


802.11ax-HE20 26dB Bandwidth


Channel 36 (5180MHz)

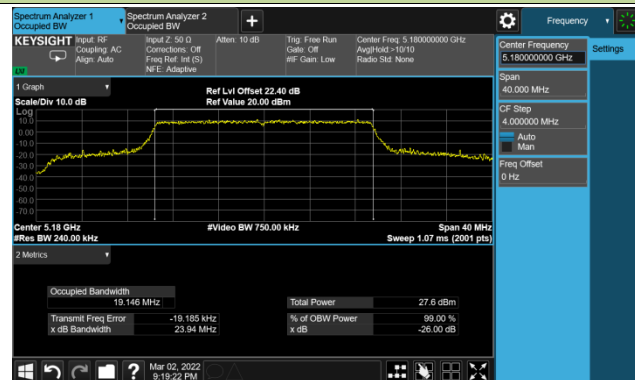


Channel 44 (5220MHz)

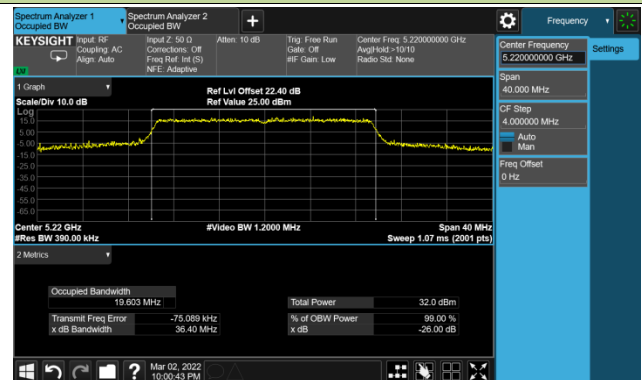


Channel 48 (5240MHz)

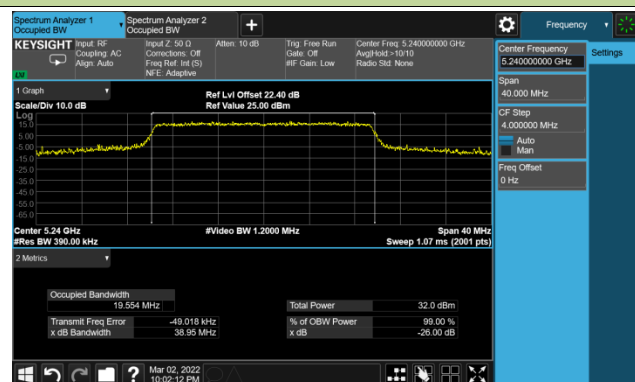


Channel 149 (5745MHz)

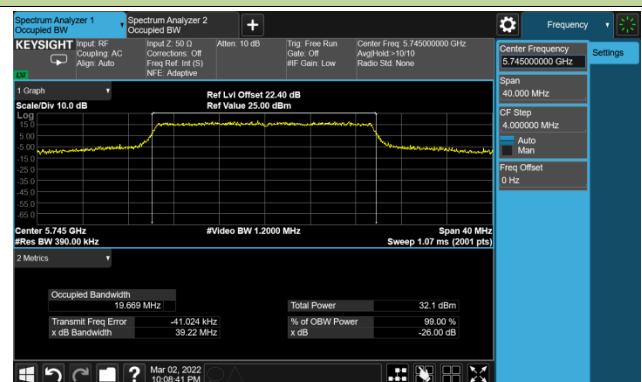

Channel 157 (5785MHz)

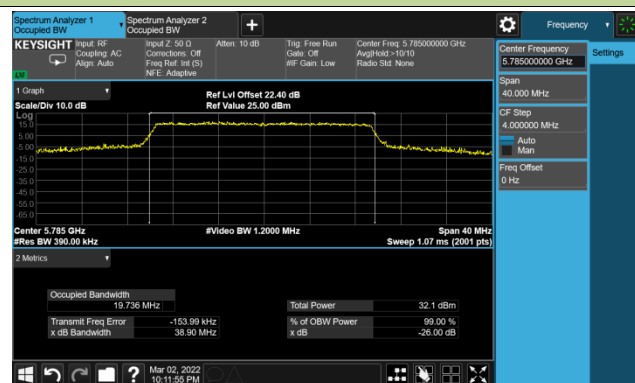


Channel 165 (5825MHz)

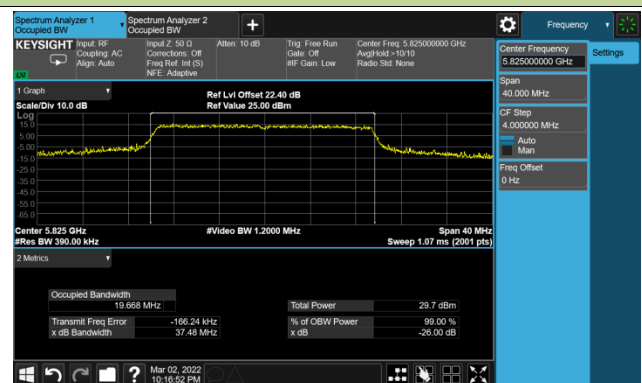


802.11ax-HE40 26dB Bandwidth


Channel 38 (5190MHz)

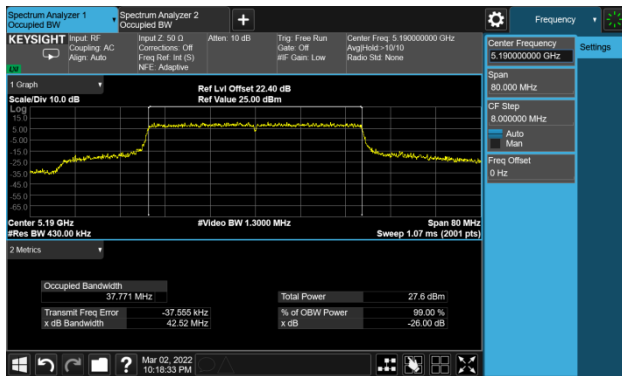


Channel 46 (5230MHz)

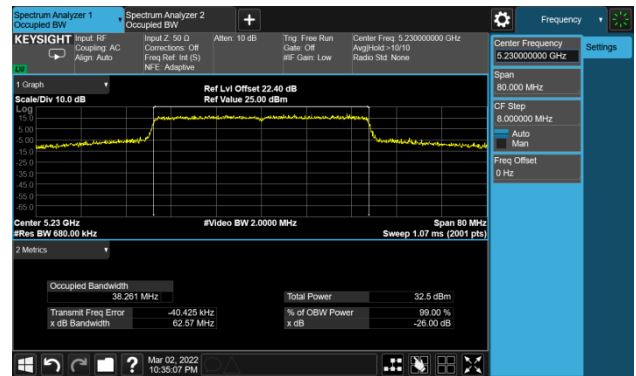


Channel 151 (5755MHz)

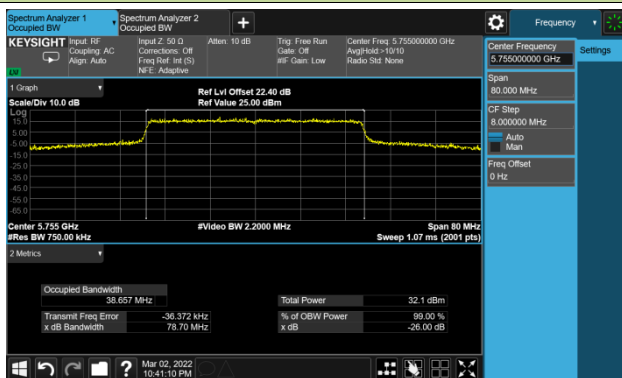

Channel 159 (5795MHz)

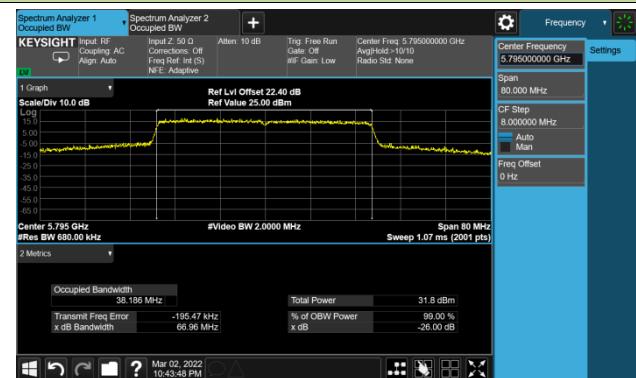

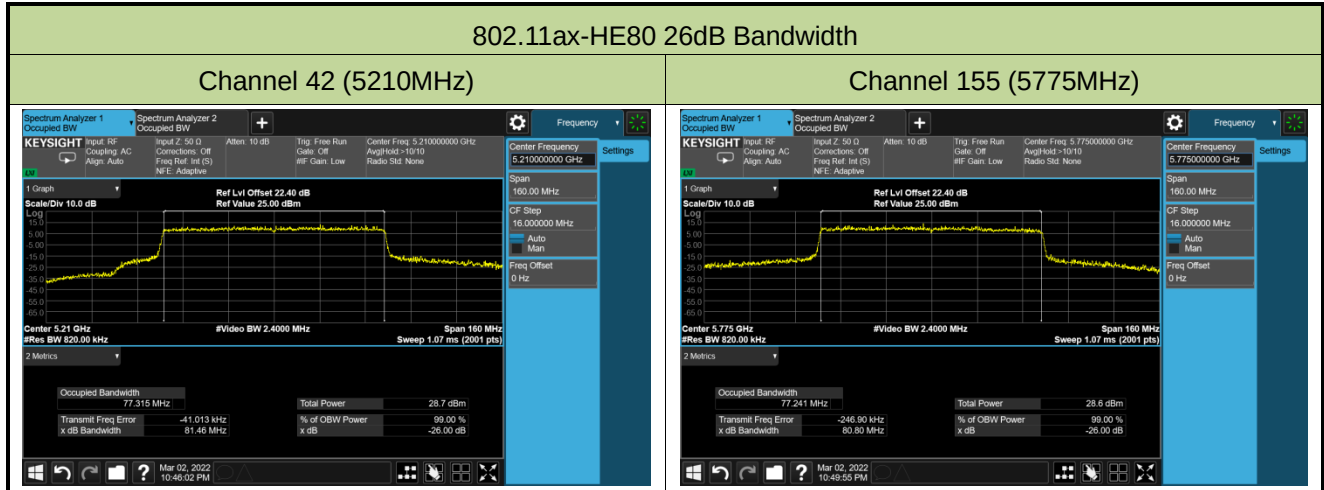


A.3 6dB Bandwidth Test Result

Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2022/03/02		


Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
11a	6Mbps	149	5745	16.35	≥0.5
11a	6Mbps	157	5785	16.37	≥0.5
11a	6Mbps	165	5825	16.35	≥0.5
11ac-VHT20	MCS0	149	5745	17.63	≥0.5
11ac-VHT20	MCS0	157	5785	17.62	≥0.5
11ac-VHT20	MCS0	165	5825	17.62	≥0.5
11ac-VHT40	MCS0	151	5755	36.38	≥0.5
11ac-VHT40	MCS0	159	5795	36.35	≥0.5
11ac-VHT80	MCS0	155	5775	75.79	≥0.5
11ax-HE20	MCS0	149	5745	18.78	≥0.5
11ax-HE20	MCS0	157	5785	18.96	≥0.5
11ax-HE20	MCS0	165	5825	18.94	≥0.5
11ax-HE40	MCS0	151	5755	37.71	≥0.5
11ax-HE40	MCS0	159	5795	37.71	≥0.5
11ax-HE80	MCS0	155	5775	76.36	≥0.5

802.11a 6dB Bandwidth


Channel 149 (5745MHz)

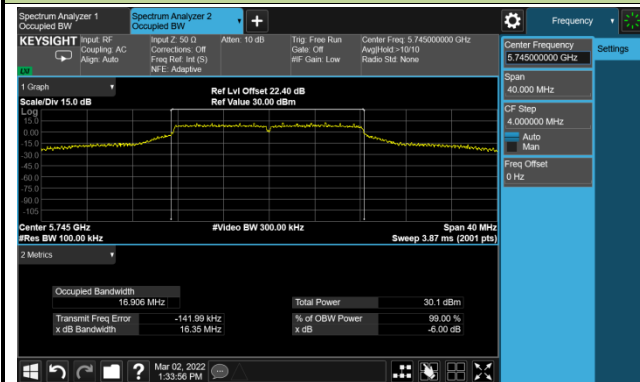

Channel 157 (5785MHz)

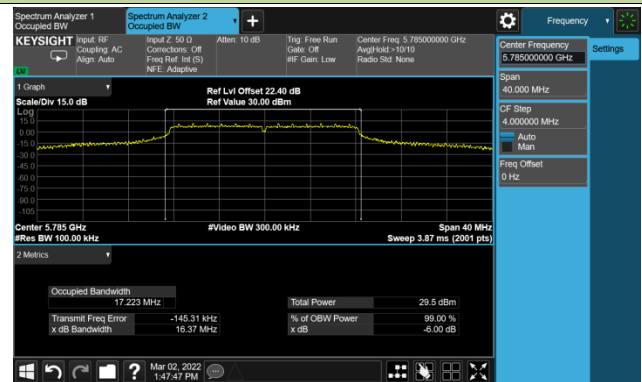


Channel 165 (5825MHz)

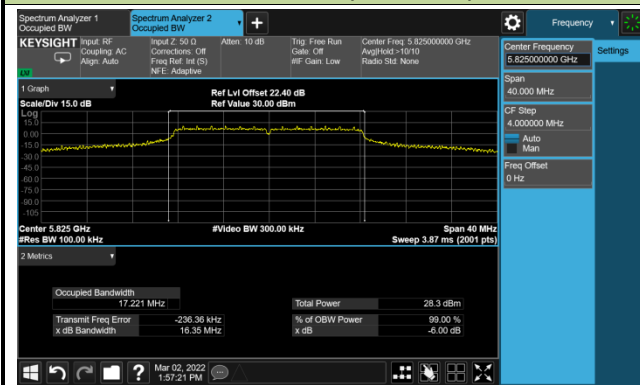


802.11ac-VHT20 6dB Bandwidth


Channel 149 (5745MHz)

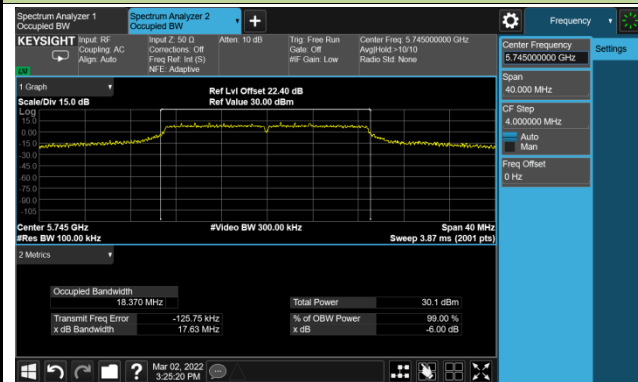

Channel 157 (5785MHz)

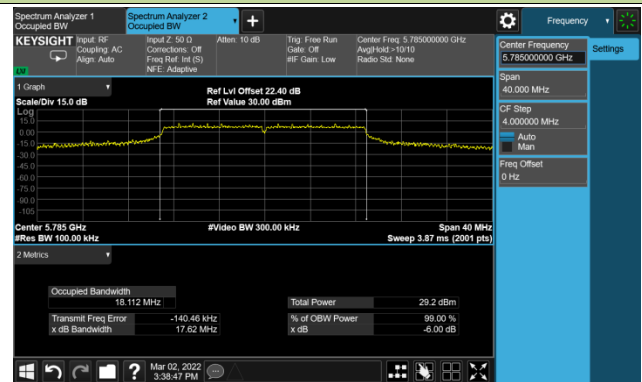


Channel 165 (5825MHz)

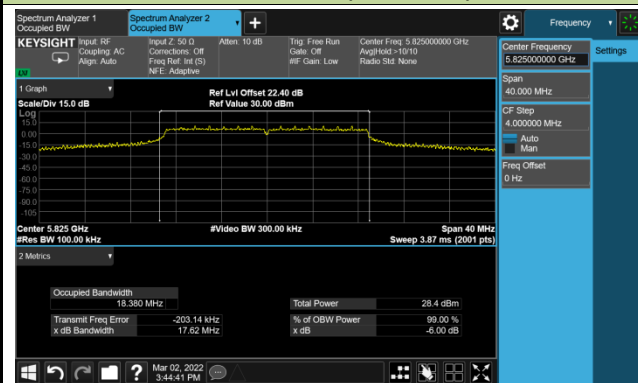



802.11ac-VHT40 6dB Bandwidth

Channel 151 (5755MHz)

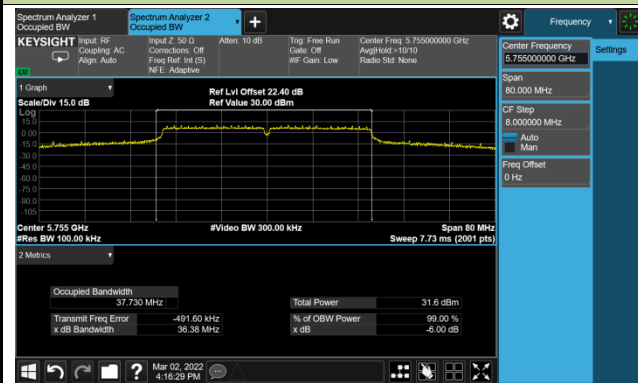


Channel 159 (5795MHz)

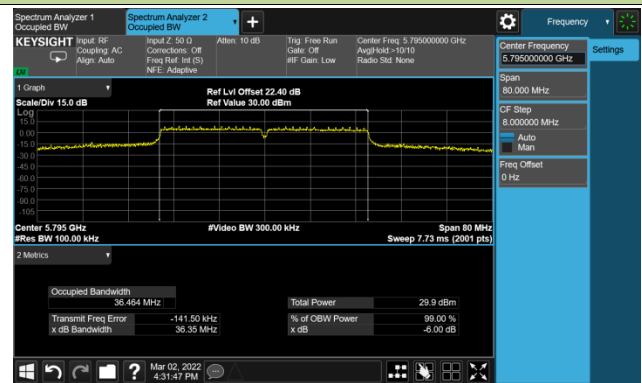

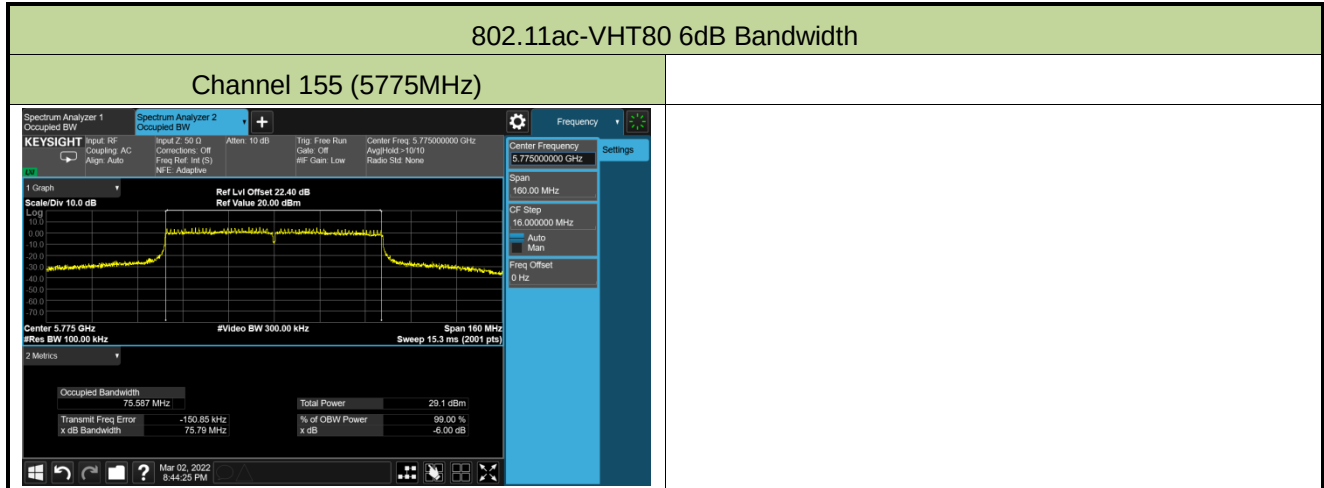


802.11ax-HE20 6dB Bandwidth


Channel 149 (5745MHz)

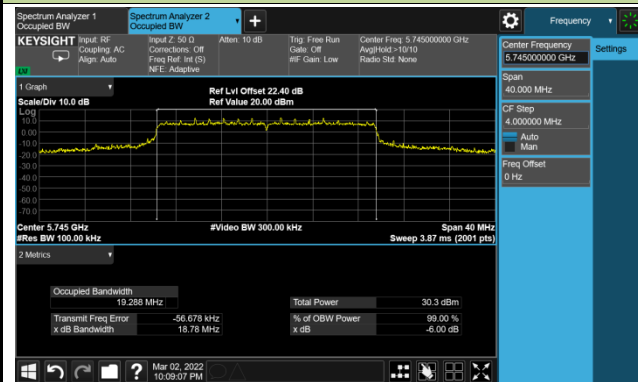

Channel 157 (5785MHz)

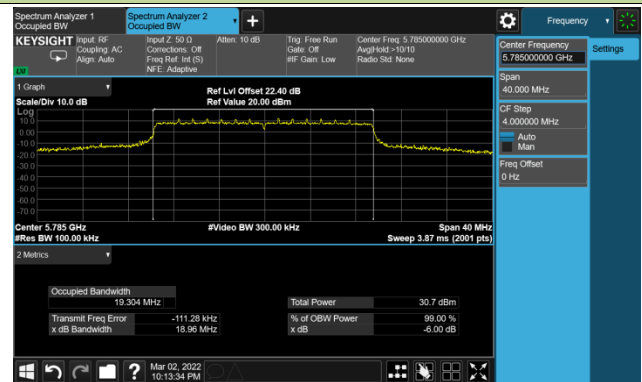


Channel 165 (5825MHz)

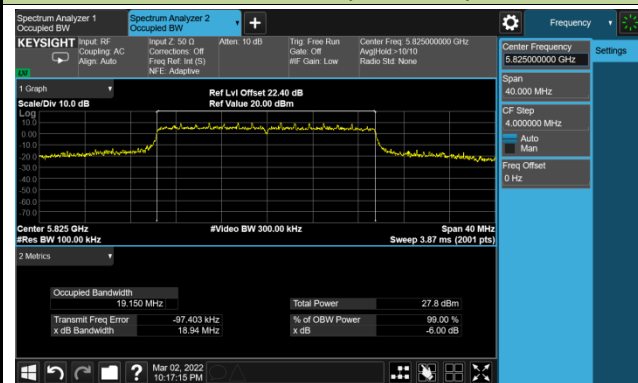



802.11ac-VHT40 6dB Bandwidth

Channel 151 (5755MHz)

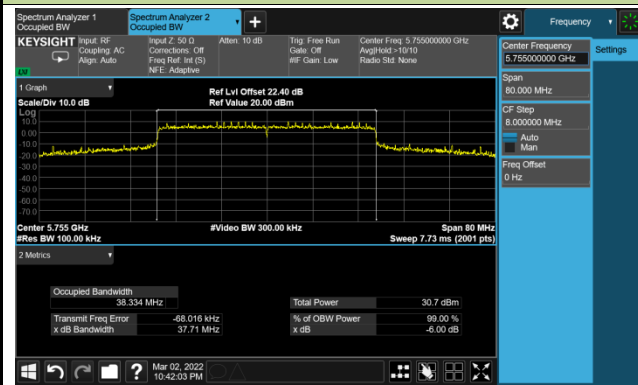

Channel 159 (5795MHz)

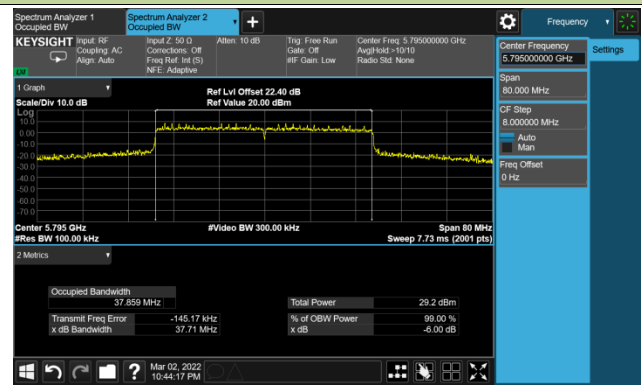

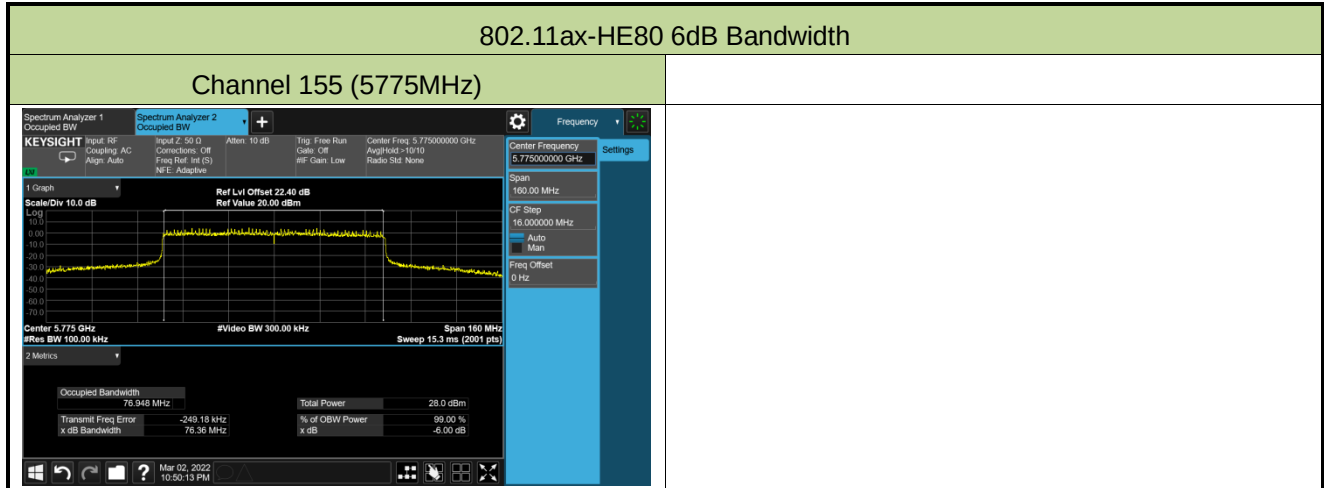

A.4 Output Power Test Result

Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2022/03/02 ~ 2022/03/07		

Test Mode	Data Rate MCS	Channel No.	Freq. (MHz)	Average Power (dBm)				Total Average Power (dBm)	Average Power Limit (dBm)
				Ant 0	Ant 1	Ant 2	Ant 3		
11a	6Mbps	36	5180	19.63	19.52	19.38	19.05	25.42	≤ 30.00
11a	6Mbps	44	5220	22.21	22.38	22.59	21.80	28.28	≤ 30.00
11a	6Mbps	48	5240	21.65	22.30	22.41	22.10	28.15	≤ 30.00
11a	6Mbps	149	5745	23.42	23.11	23.50	23.52	29.41	≤ 30.00
11a	6Mbps	157	5785	22.56	22.99	23.50	22.82	29.00	≤ 30.00
11a	6Mbps	165	5825	21.16	20.90	21.35	21.50	27.25	≤ 30.00
11ac-VHT20	MCS0	36	5180	19.43	19.55	19.39	19.01	25.37	≤ 30.00
11ac-VHT20	MCS0	44	5220	23.15	23.30	23.69	22.50	29.20	≤ 30.00
11ac-VHT20	MCS0	48	5240	22.68	23.15	23.35	22.72	29.00	≤ 30.00
11ac-VHT20	MCS0	149	5745	23.36	23.06	23.60	23.35	29.37	≤ 30.00
11ac-VHT20	MCS0	157	5785	21.85	22.05	22.60	22.23	28.21	≤ 30.00
11ac-VHT20	MCS0	165	5825	20.30	20.39	20.70	20.89	26.60	≤ 30.00
11ac-VHT40	MCS0	38	5190	16.36	16.30	16.50	15.99	22.31	≤ 30.00
11ac-VHT40	MCS0	46	5230	23.32	23.80	23.90	23.13	29.57	≤ 30.00
11ac-VHT40	MCS0	151	5755	23.34	23.23	23.53	23.48	29.42	≤ 30.00
11ac-VHT40	MCS0	159	5795	21.92	22.15	22.23	22.05	28.11	≤ 30.00
11ac-VHT80	MCS0	42	5210	15.99	16.01	15.90	15.20	21.81	≤ 30.00
11ac-VHT80	MCS0	155	5775	20.33	20.35	21.05	20.89	26.69	≤ 30.00
11ax-HE20	MCS0	36	5180	19.02	18.96	18.56	18.50	24.79	≤ 30.00
11ax-HE20	MCS0	44	5220	23.15	23.38	23.60	22.70	29.24	≤ 30.00
11ax-HE20	MCS0	48	5240	22.92	23.05	23.45	22.89	29.10	≤ 30.00
11ax-HE20	MCS0	149	5745	23.22	23.11	24.05	23.63	29.54	≤ 30.00
11ax-HE20	MCS0	157	5785	23.05	23.31	24.03	23.62	29.54	≤ 30.00
11ax-HE20	MCS0	165	5825	20.60	20.53	20.93	20.88	26.76	≤ 30.00

11ax-HE40	MCS0	38	5190	17.56	17.68	17.29	17.33	23.49	≤ 30.00
11ax-HE40	MCS0	46	5230	23.35	23.68	23.99	23.38	29.63	≤ 30.00
11ax-HE40	MCS0	151	5755	23.23	23.20	23.63	23.50	29.41	≤ 30.00
11ax-HE40	MCS0	159	5795	21.82	21.96	22.26	22.09	28.06	≤ 30.00
11ax-HE80	MCS0	42	5210	16.39	16.75	16.63	16.45	22.58	≤ 30.00
11ax-HE80	MCS0	155	5775	21.02	21.09	21.36	21.26	27.21	≤ 30.00

Note: Total Average Power (dBm) = $10 \cdot \log \{10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)} + 10^{(\text{Ant 2 Average Power} / 10)} + 10^{(\text{Ant 3 Average Power} / 10)}\}$.

A.5 Power Spectral Density Test Result

Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2022/02/27 ~ 2022/03/07		
Test Item	Power Spectral Density (UNII-Band 1)		

Test Mode	Data Rate/MCS	Channel No.	Freq. (MHz)	AVPSD (dBm/ MHz)				Duty Cycle (%)	Total PSD (dBm/ MHz)	PSD Limit (dBm/MHz)
				Ant 0	Ant 1	Ant 2	Ant 3			
11a	6Mbps	36	5180	7.13	7.08	6.89	6.94	95.07	13.25	17.00
11a	6Mbps	44	5220	10.39	10.67	10.38	9.74	95.07	16.55	17.00
11a	6Mbps	48	5240	9.86	10.70	10.53	10.23	95.07	16.58	17.00
11ac-VHT20	MCS0	36	5180	6.54	6.39	6.34	5.85	98.67	12.31	17.00
11ac-VHT20	MCS0	44	5220	10.55	10.72	11.01	10.01	98.67	16.61	17.00
11ac-VHT20	MCS0	48	5240	10.27	10.57	11.09	10.34	98.67	16.60	17.00
11ac-VHT40	MCS0	38	5190	1.27	1.08	1.20	0.45	97.18	7.16	17.00
11ac-VHT40	MCS0	46	5230	7.61	8.28	8.57	7.86	97.18	14.24	17.00
11ac-VHT80	MCS0	42	5210	-2.63	-2.52	-2.30	-2.96	94.26	3.68	17.00
11ax-HE20	MCS0	36	5180	6.73	6.43	6.29	6.15	98.15	12.42	17.00
11ax-HE20	MCS0	44	5220	10.51	10.65	11.06	10.25	98.15	16.65	17.00
11ax-HE20	MCS0	48	5240	10.56	10.83	11.10	10.17	98.15	16.70	17.00
11ax-HE40	MCS0	38	5190	2.42	2.34	2.23	2.24	96.39	8.49	17.00
11ax-HE40	MCS0	46	5230	7.78	8.59	8.71	8.16	96.39	14.50	17.00
11ax-HE80	MCS0	42	5210	-1.65	-1.66	-1.42	-1.56	93.65	4.74	17.00

Note: When EUT duty cycle < 98%, the total PSD (dBm/MHz) = $10 \cdot \log \{10^{(\text{Ant 0 AVGPSD}/10)} + 10^{(\text{Ant 1 AVGPSD}/10)} + 10^{(\text{Ant 2 AVGPSD}/10)} + 10^{(\text{Ant 3 AVGPSD}/10)}\} + 10 \cdot \log (1/\text{Duty cycle})$.

When EUT duty cycle $\geq 98\%$, the total PSD (dBm/MHz) = $10 \cdot \log \{10^{(\text{Ant 0 AVGPSD}/10)} + 10^{(\text{Ant 1 AVGPSD}/10)} + 10^{(\text{Ant 2 AVGPSD}/10)} + 10^{(\text{Ant 3 AVGPSD}/10)}\}$.

Test Site	WZ-SR5	Test Engineer	Luis Yang
Test Date	2022/02/27~2022/03/07		
Test Item	Power Spectral Density (UNII-Band 3)		


Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	AVPSD (dBm/ 510KHz)				Duty Cycle (%)	Total PSD (dBm/ 510KHz)	PSD Limit (dBm/ 500KHz)
				Ant 0	Ant 1	Ant 2	Ant 3			
11a	6Mbps	149	5745	9.23	8.82	9.04	8.66	95.07	15.18	30.00
11a	6Mbps	157	5785	8.02	8.29	8.80	8.37	95.07	14.62	30.00
11a	6Mbps	165	5825	7.13	7.25	6.98	7.06	95.07	13.35	30.00
11ac-VHT20	MCS0	149	5745	7.99	7.76	8.72	8.61	98.67	14.31	30.00
11ac-VHT20	MCS0	157	5785	7.74	7.96	8.45	7.95	98.67	14.05	30.00
11ac-VHT20	MCS0	165	5825	6.42	6.24	7.06	6.97	98.67	12.71	30.00
11ac-VHT40	MCS0	151	5755	5.89	5.80	6.07	5.92	97.18	12.06	30.00
11ac-VHT40	MCS0	159	5795	4.36	4.74	5.36	4.86	97.18	10.99	30.00
11ac-VHT80	MCS0	155	5775	0.61	0.49	0.83	0.22	94.26	6.82	30.00
11ax-HE20	MCS0	149	5745	8.44	8.32	9.11	8.99	98.15	14.75	30.00
11ax-HE20	MCS0	157	5785	7.47	7.76	8.84	8.35	98.15	14.16	30.00
11ax-HE20	MCS0	165	5825	6.28	5.83	6.49	6.70	98.15	12.36	30.00
11ax-HE40	MCS0	151	5755	5.57	5.51	6.13	6.12	96.39	12.02	30.00
11ax-HE40	MCS0	159	5795	4.39	4.61	4.79	4.48	96.39	10.75	30.00
11ax-HE80	MCS0	155	5775	1.02	1.09	1.29	1.22	93.65	7.46	30.00

Note: When EUT duty cycle < 98%, the total PSD (dBm/510kHz) = $10 \cdot \log \{10^{(\text{Ant 0 AVGPSD}/10)} + 10^{(\text{Ant 1 AVGPSD}/10)} + 10^{(\text{Ant 2 AVGPSD}/10)} + 10^{(\text{Ant 3 AVGPSD}/10)}\} + 10 \cdot \log (1/\text{Duty cycle})$.


When EUT duty cycle $\geq$ 98%, the total PSD (dBm/510kHz) = $10 \cdot \log \{10^{(\text{Ant 0 AVGPSD}/10)} + 10^{(\text{Ant 1 AVGPSD}/10)} + 10^{(\text{Ant 2 AVGPSD}/10)} + 10^{(\text{Ant 3 AVGPSD}/10)}\}$.

802.11a Power Spectral Density - Ant 0


Channel 36 (5180MHz)

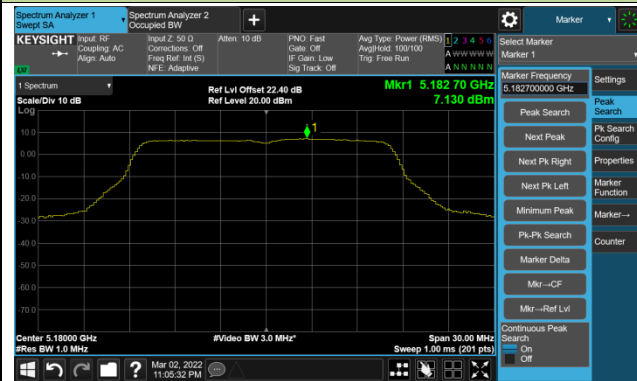


Channel 44 (5220MHz)

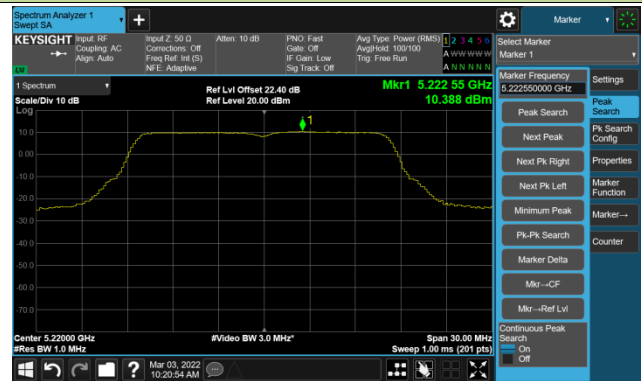


Channel 48 (5240MHz)

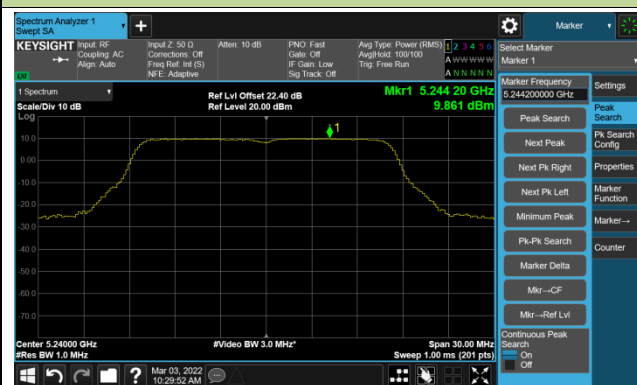


Channel 149 (5745MHz)

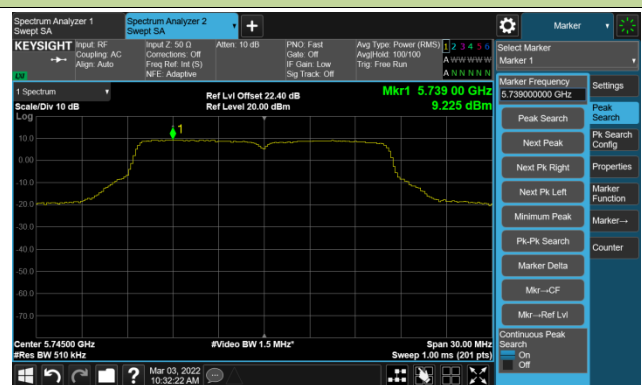

Channel 157 (5785MHz)

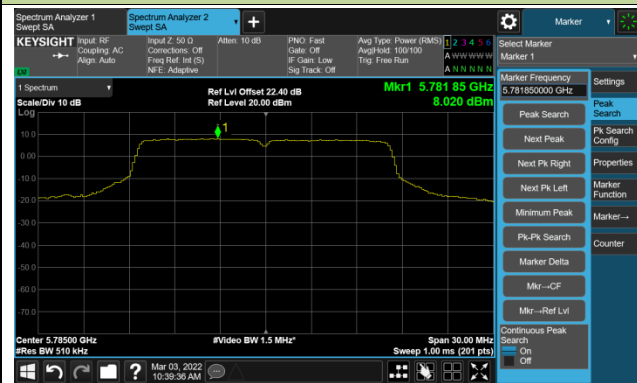


Channel 165 (5825MHz)

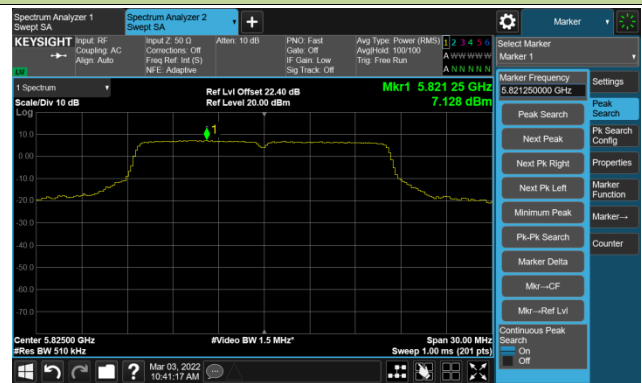


802.11ac-VHT20 Power Spectral Density - Ant 0


Channel 36 (5180MHz)

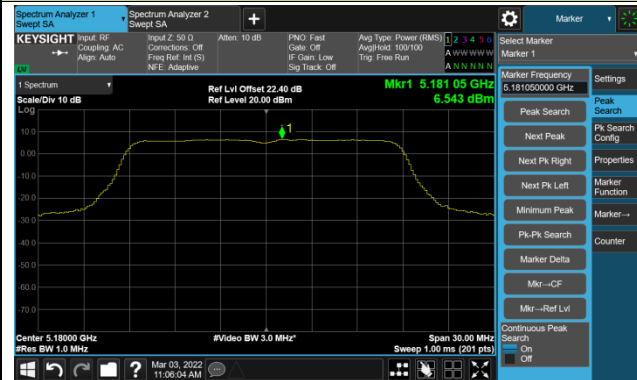


Channel 44 (5220MHz)

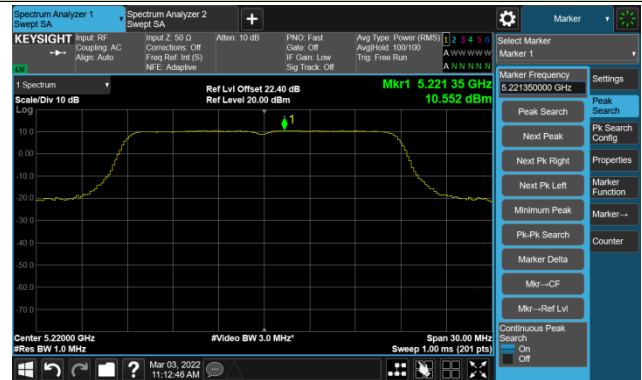


Channel 48 (5240MHz)

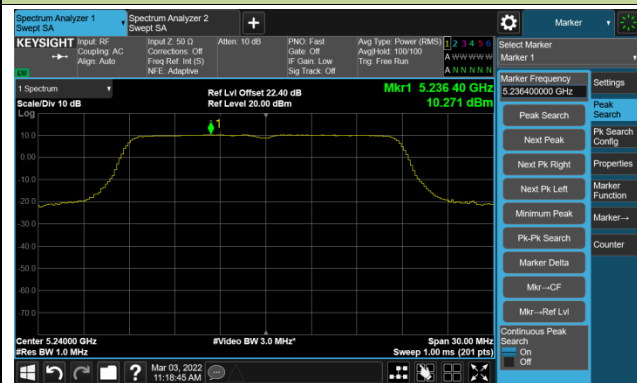

Channel 149 (5745MHz)

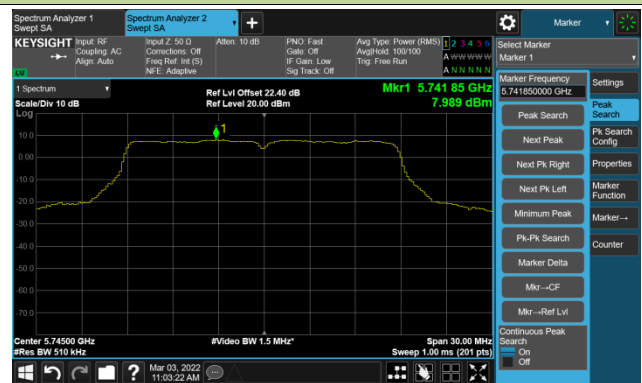

Channel 157 (5785MHz)

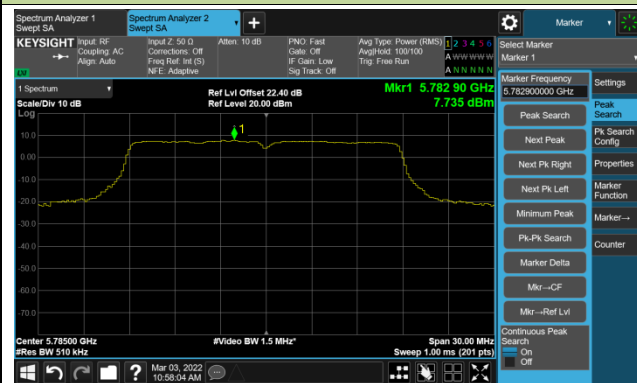

Channel 165 (5825MHz)

