



802.11ax-HE80 In-Band Emission


Channel 183 (6865MHz)

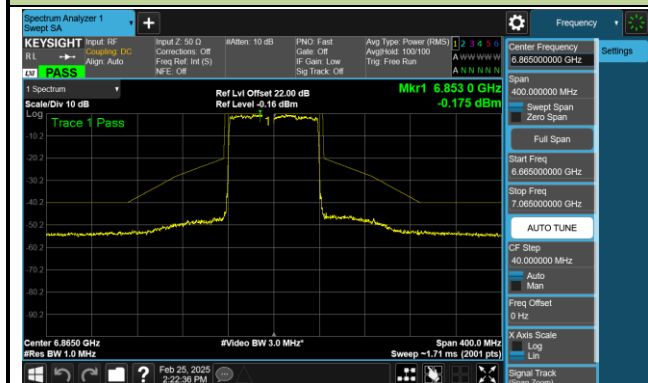

Channel 199 (6945MHz)

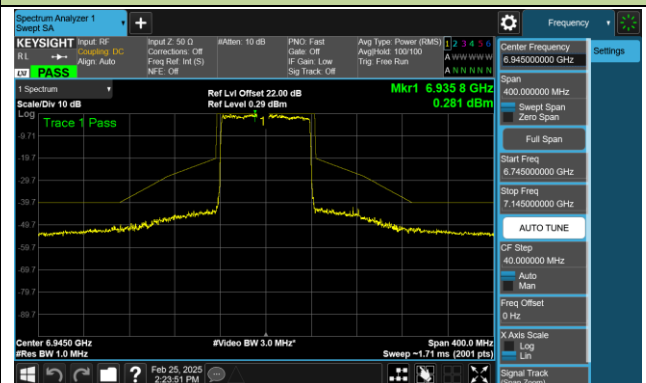

Channel 215 (7025MHz)

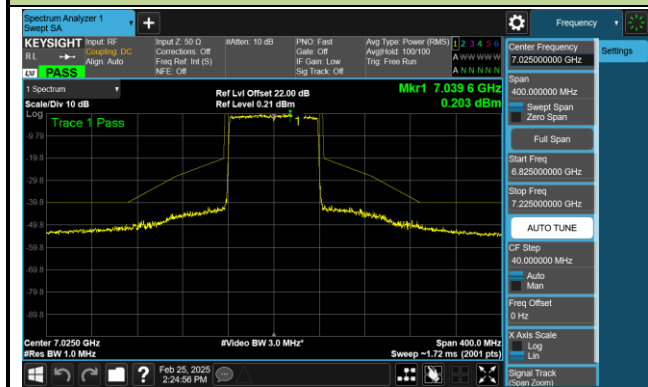


802.11ax-HE160 In-Band Emission


Channel 15 (6025MHz)




Channel 47 (6185MHz)

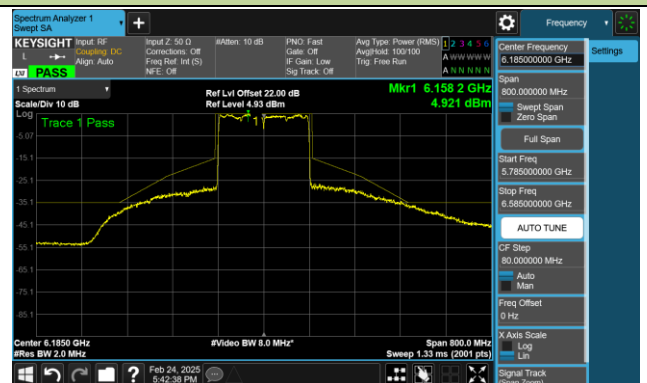


Channel 79 (6345MHz)

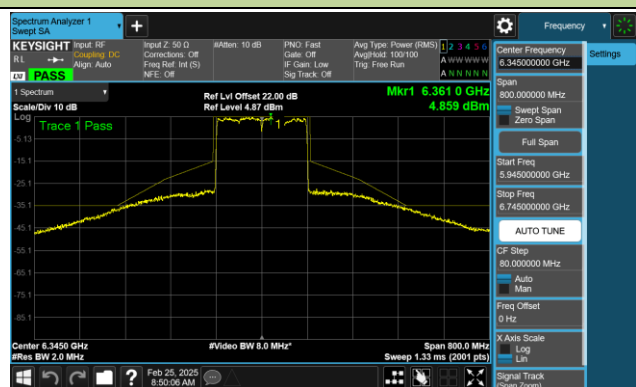


Channel 111 (6505MHz)

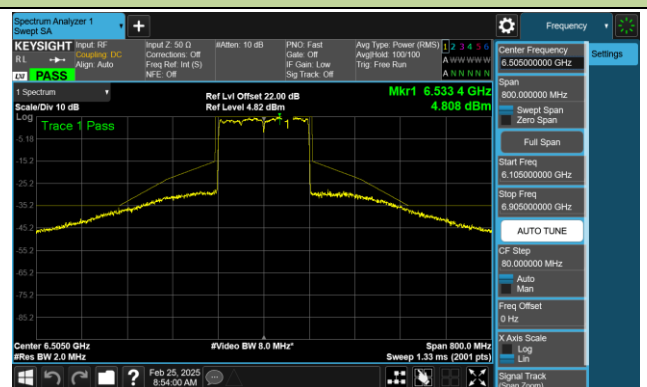


Channel 143 (6665MHz)

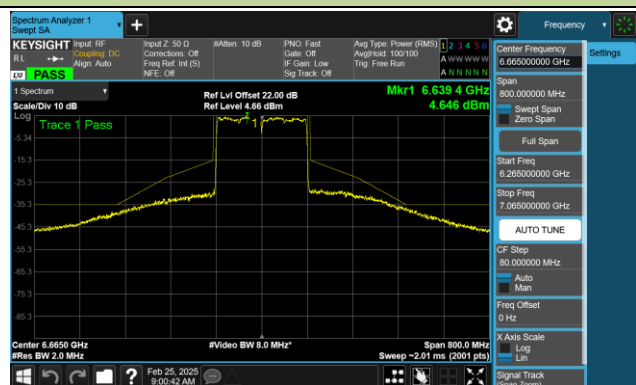

Channel 175 (6825MHz)

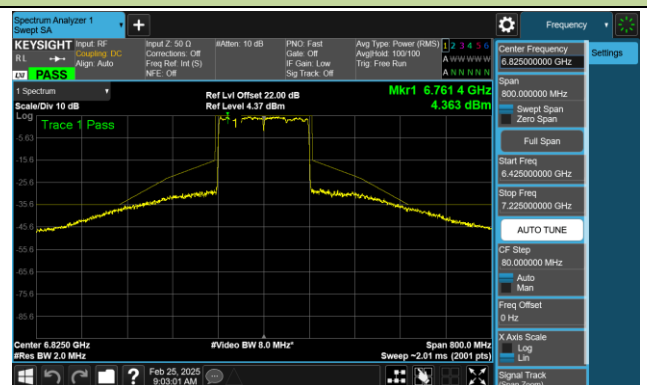


Channel 207 (6985MHz)

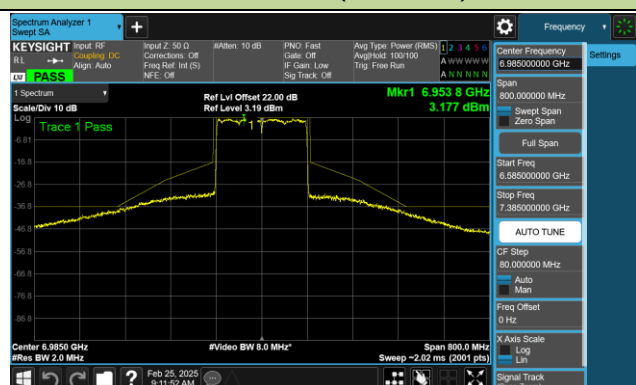


802.11be-EHT20 In-Band Emission


Channel 01 (5955MHz)

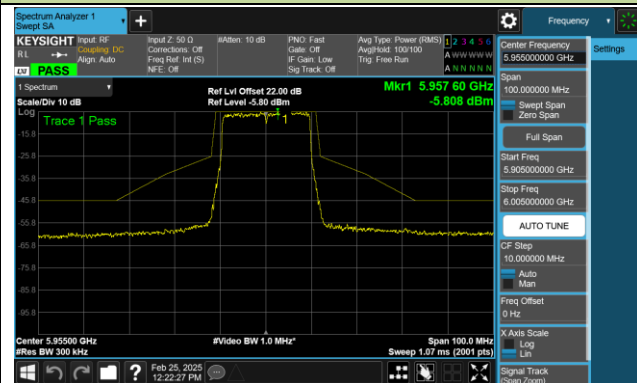


Channel 49 (6195MHz)

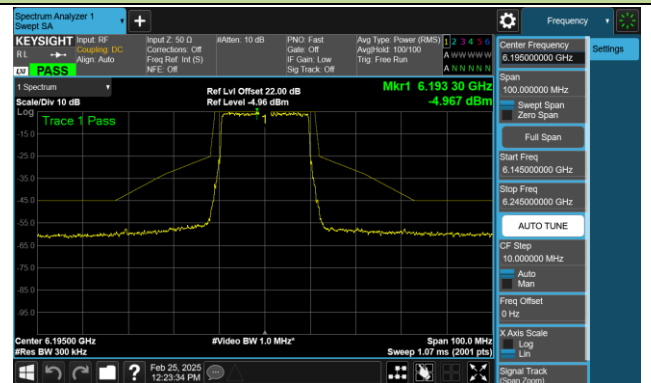


Channel 93 (6415MHz)

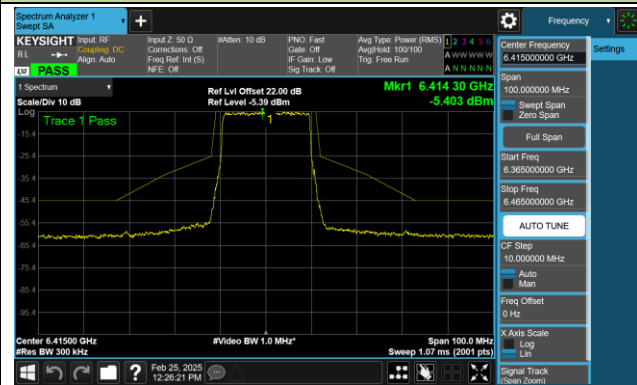


Channel 97 (6435MHz)

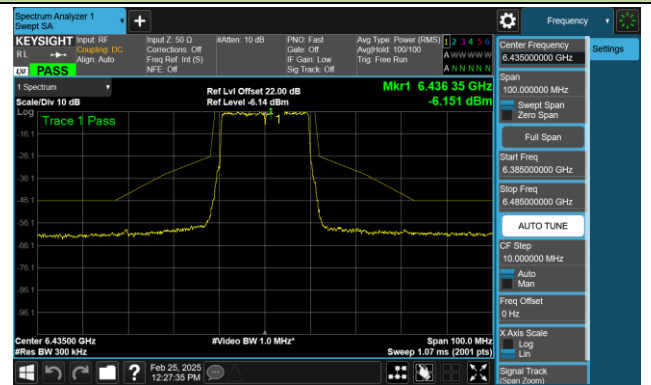


Channel 105 (6475MHz)

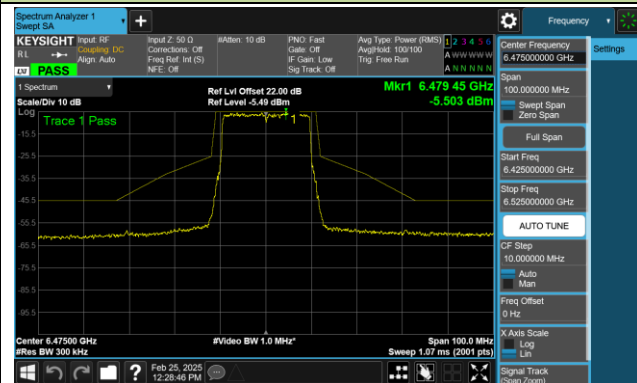

Channel 113 (6515MHz)

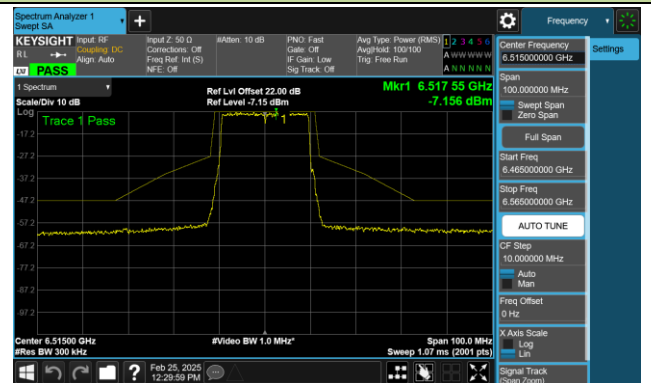


Channel 117 (6535MHz)

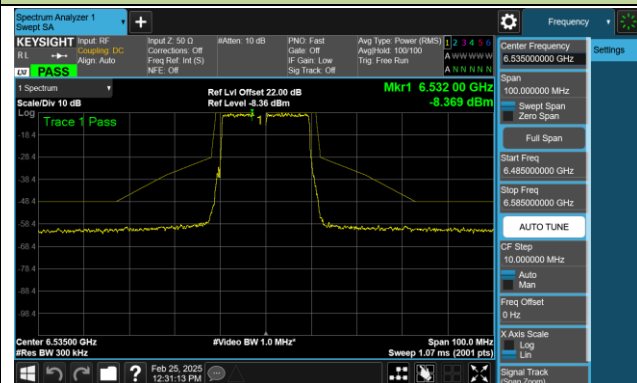


802.11be-EHT20 In-Band Emission


Channel 149 (6695MHz)

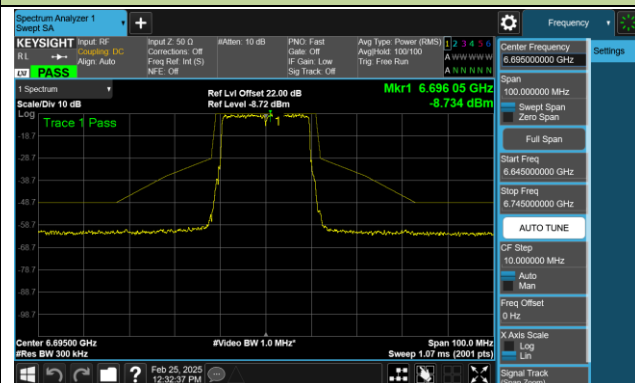


Channel 181 (6855MHz)

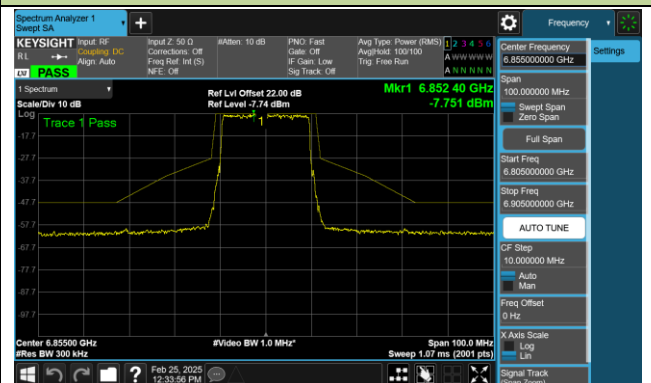


Channel 185 (6875MHz)

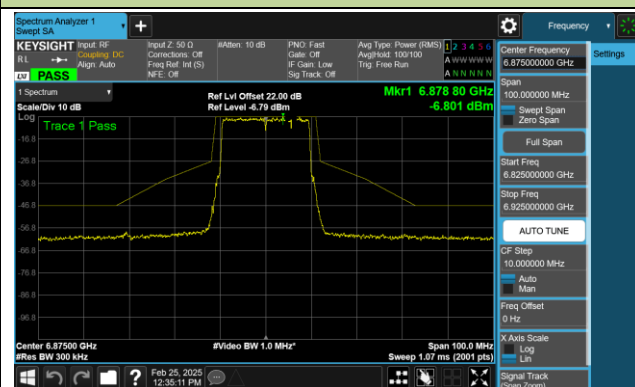


Channel 189 (6895MHz)

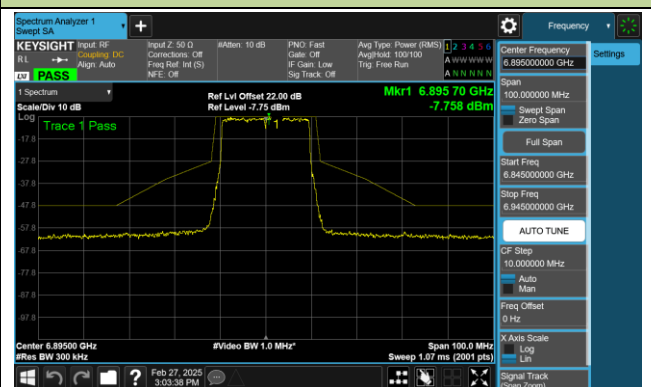

Channel 209 (6995MHz)

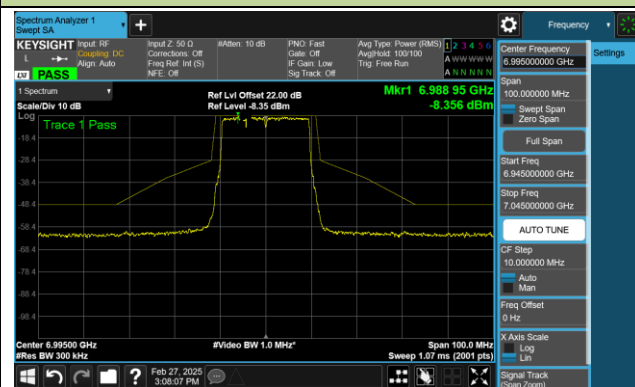


Channel 229 (7095MHz)

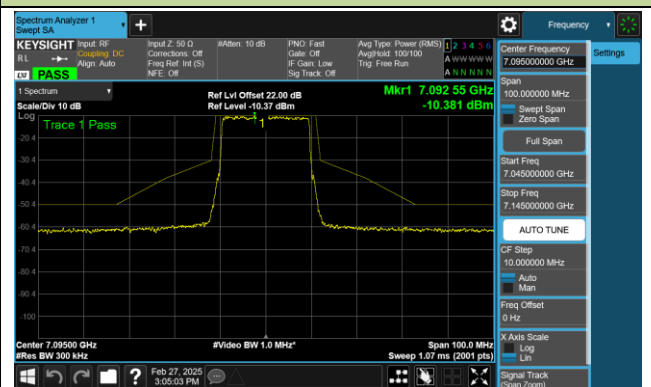


802.11be-HE40 In-Band Emission


Channel 03 (5965MHz)

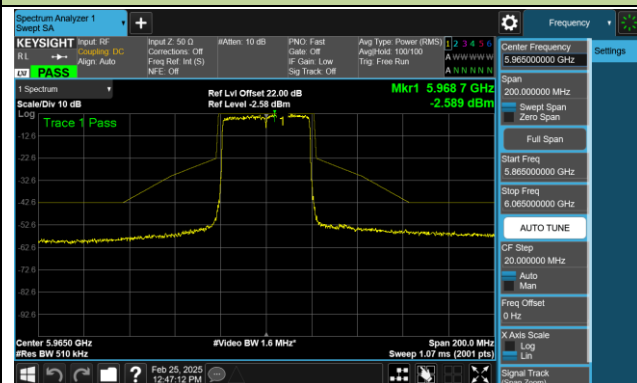


Channel 51 (6205MHz)

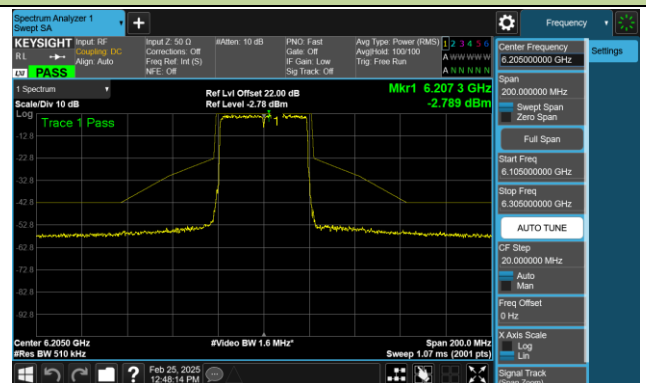


Channel 91 (6405MHz)

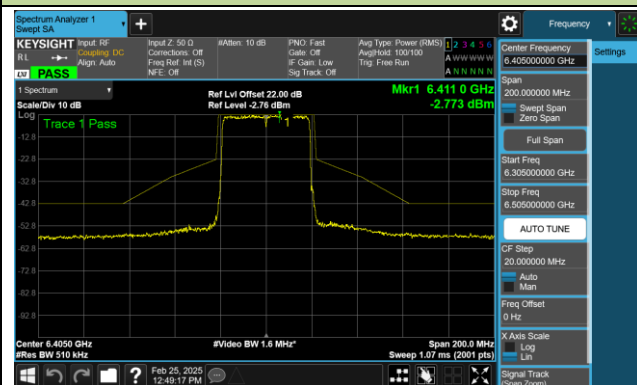


Channel 99 (6445MHz)

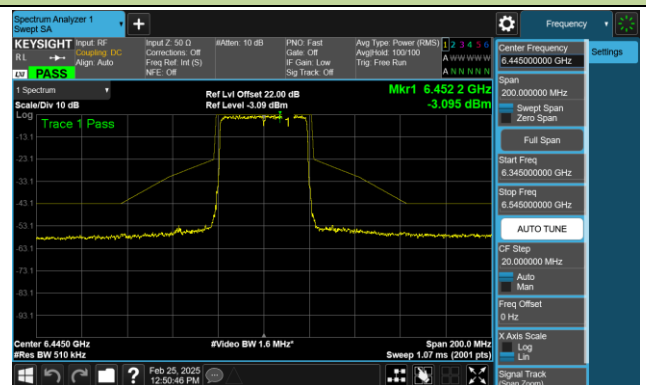

Channel 107 (6485MHz)

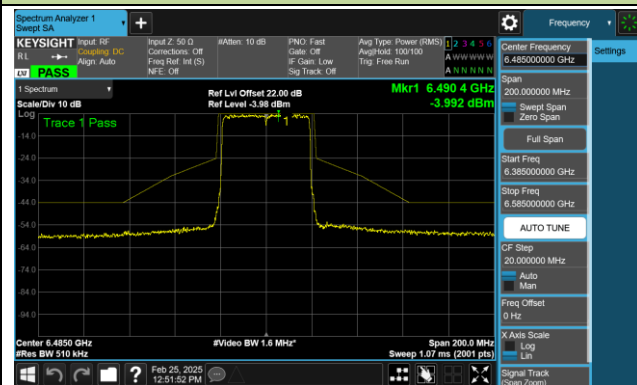


Channel 115 (6525MHz)

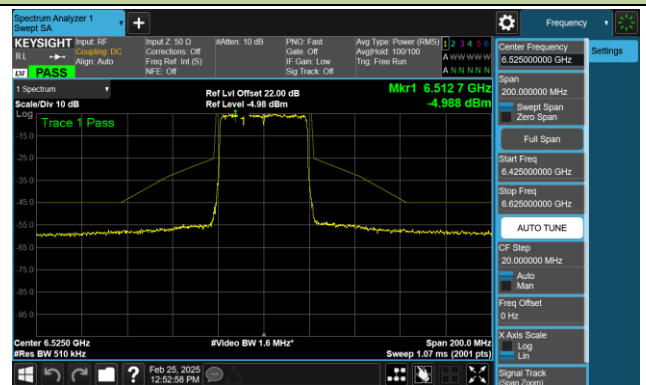


802.11be-EHT40 In-Band Emission


Channel 123 (6565MHz)

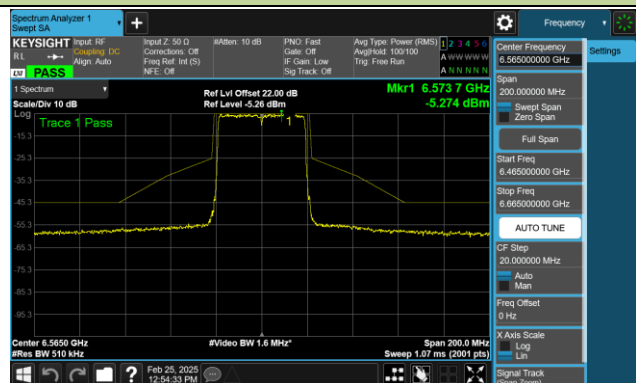


Channel 147 (6685MHz)

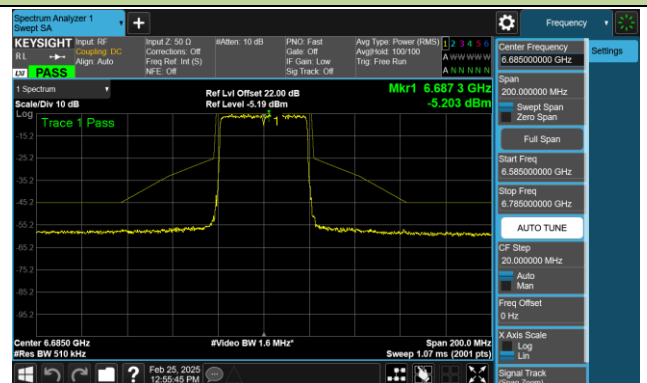


Channel 179 (6845MHz)

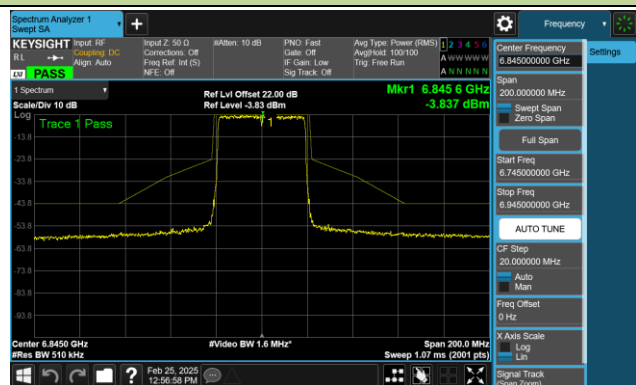


Channel 187 (6885MHz)

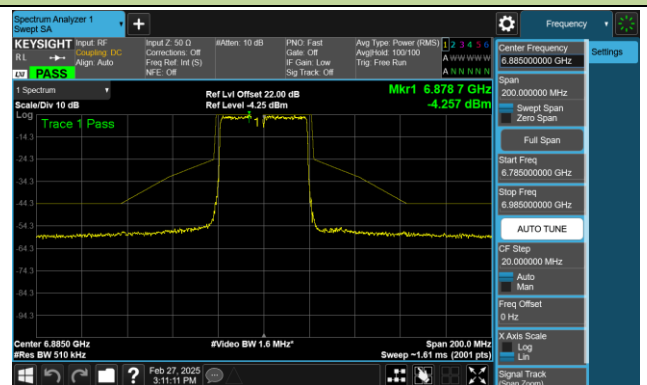


Channel 195 (6925MHz)

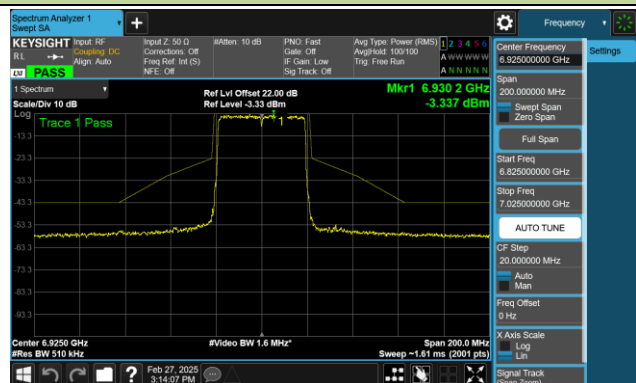

Channel 211 (7005MHz)

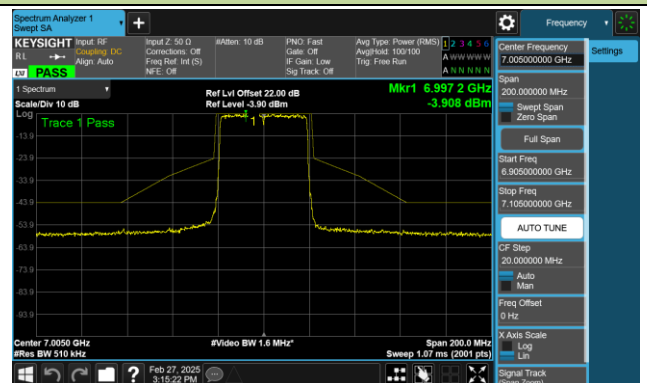


Channel 227 (7085MHz)

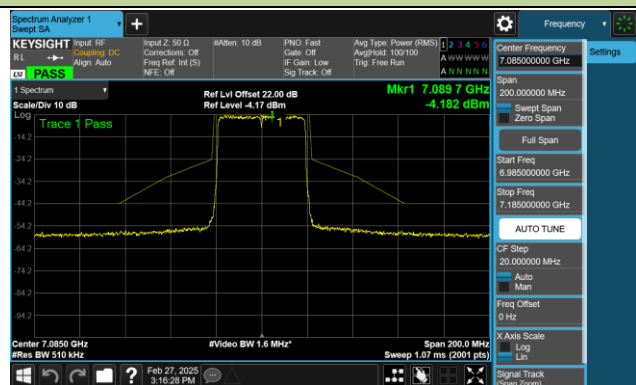


802.11be-EHT80 In-Band Emission


Channel 07 (5985MHz)

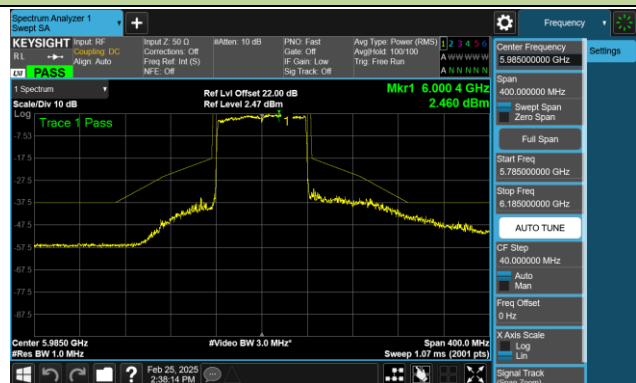


Channel 55 (6225MHz)

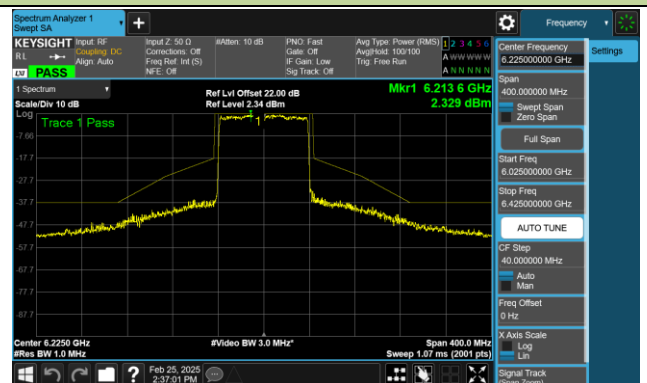


Channel 87 (6385MHz)

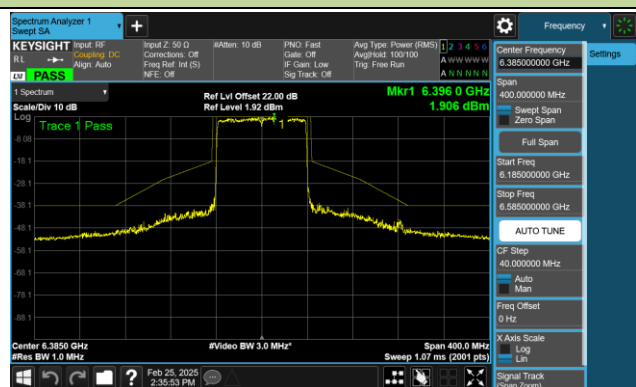


Channel 103 (6465MHz)

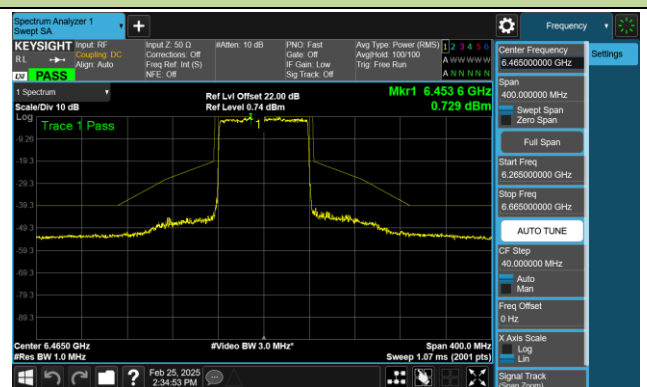


Channel 119 (6545MHz)

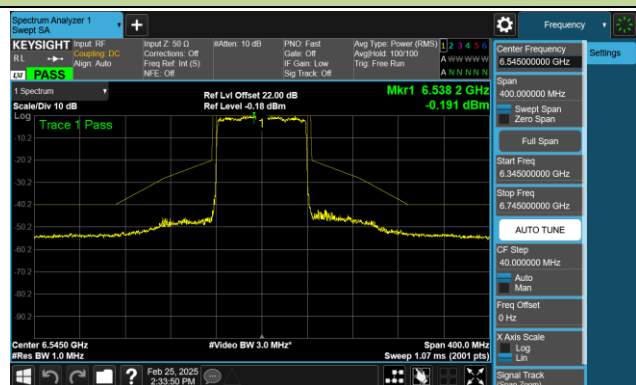


Channel 135 (6625MHz)

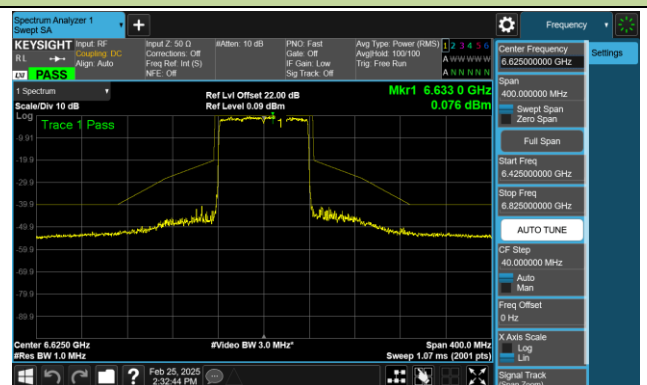

Channel 151 (6705MHz)

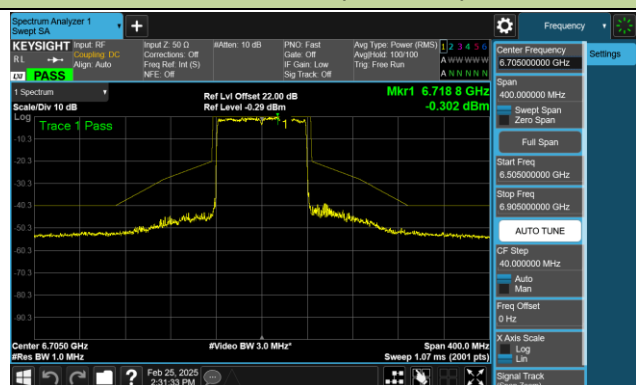


Channel 167 (6785MHz)

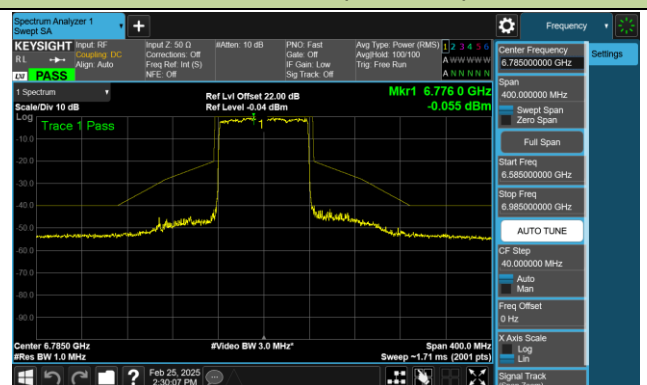


802.11be-EHT80 In-Band Emission


Channel 183 (6865MHz)

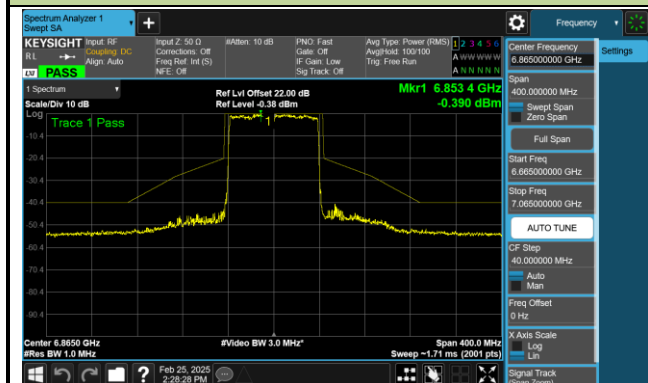

Channel 199 (6945MHz)

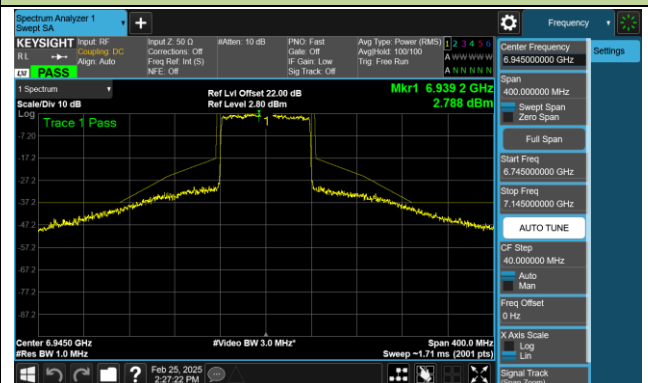

Channel 215 (7025MHz)

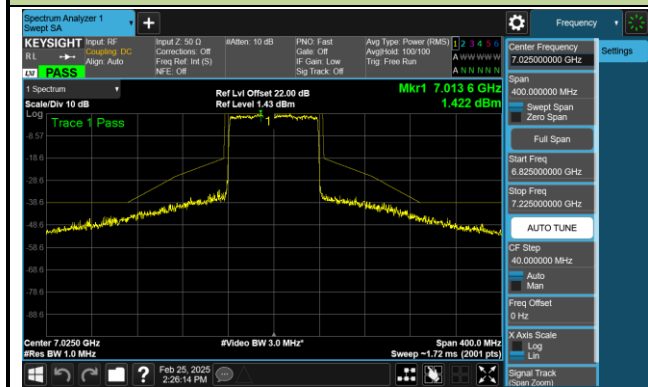


802.11be-EHT160 In-Band Emission


Channel 15 (6025MHz)




Channel 47 (6185MHz)

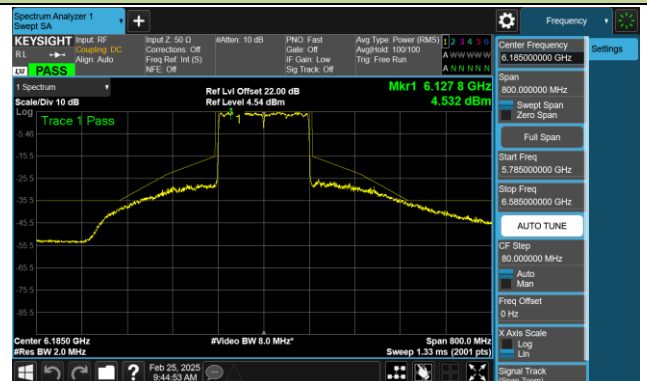


Channel 79 (6345MHz)

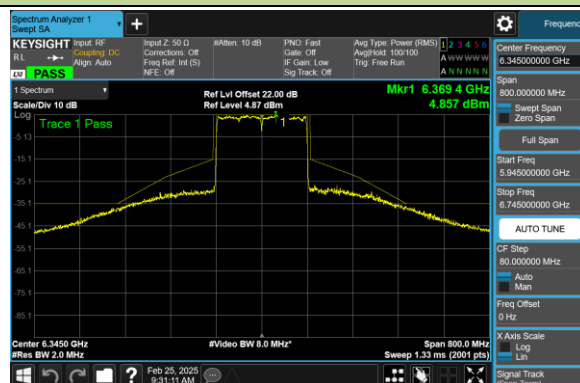


Channel 111 (6505MHz)

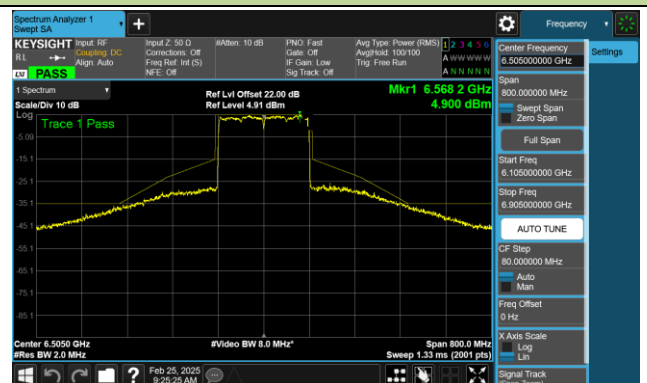


Channel 143 (6665MHz)

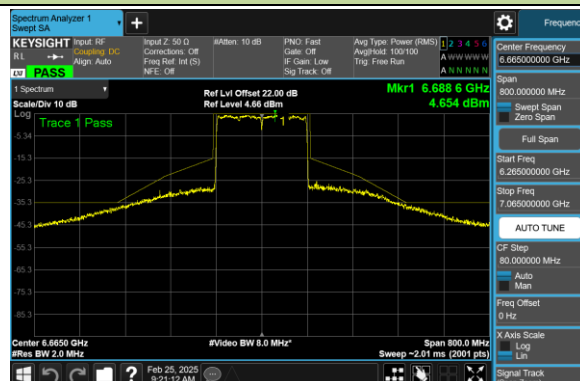

Channel 175 (6825MHz)

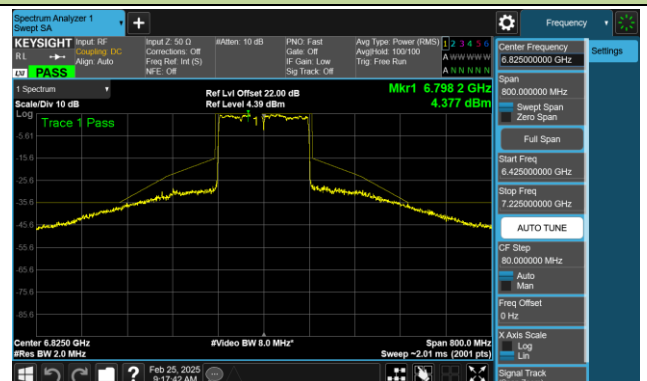

Channel 207 (6985MHz)

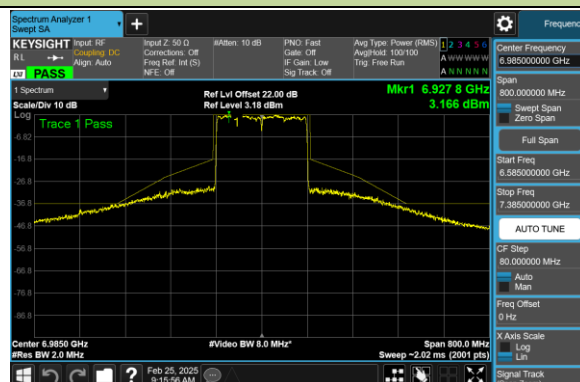

802.11be-EHT320 In-Band Emission


Channel 31 (6105MHz)




Channel 95 (6425MHz)




Channel 159 (6745MHz)

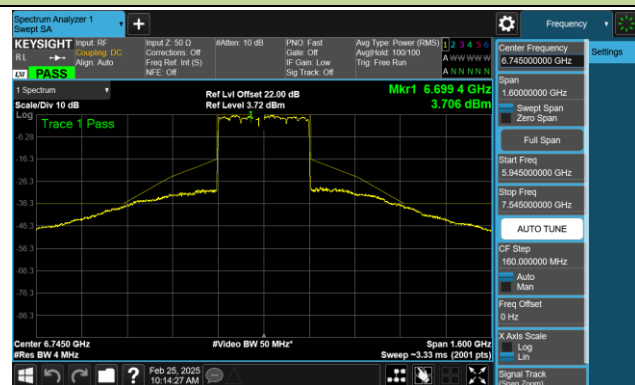


Channel 63 (6265MHz)

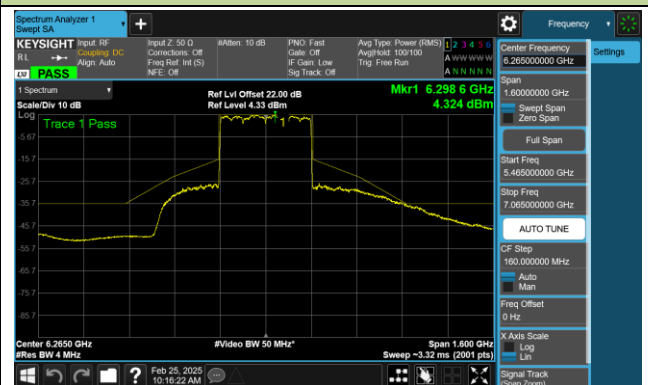

Channel 127 (6585MHz)

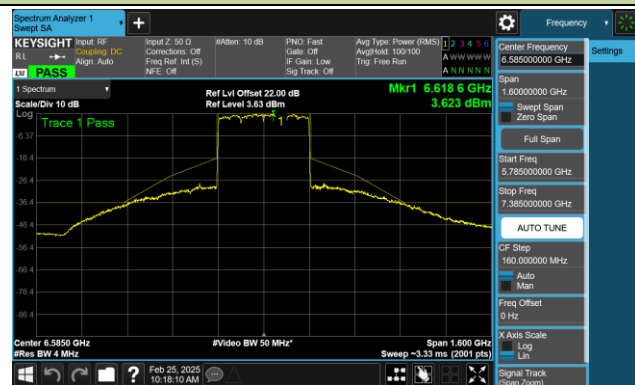

Channel 191 (6905MHz)

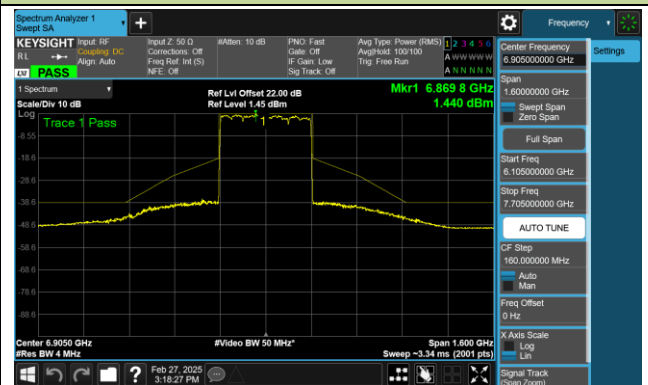

6.6. Frequency Stability Measurement

6.6.1. Test Limit

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

6.6.2. Test Procedure

Frequency Stability Under Temperature Variations:


The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to highest. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C decreased per stage until the lowest temperature reached.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

6.6.3. Test Setup

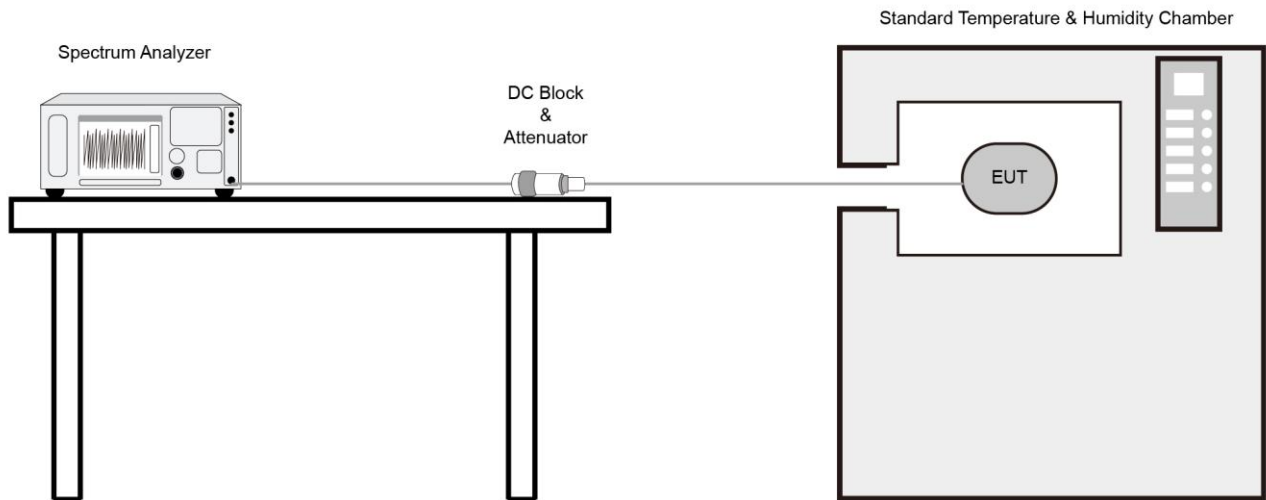

6.6.4. Test Result

Test Site	SR3	Test Engineer	Marvin
Test Date	2025/3/4		
Test Mode	5955MHz (Carrier Mode)		

Voltage (%)	Power (VAC)	Temp (°C)	Frequency Tolerance (ppm)			
			0 minutes	2 minutes	5 minutes	10 minutes
100	120	- 30	13.17	13.22	13.24	13.25
		- 20	12.96	13.16	13.22	13.25
		- 10	13.25	13.12	13.09	13.09
		0	4.66	4.75	8.40	8.96
		+ 10	0.27	-0.26	-0.35	1.30
		+ 20	-4.26	-4.53	-4.58	-4.63
		+ 30	-8.03	-8.34	-8.46	-8.52
		+ 40	-11.19	-11.40	-11.59	-11.61
		+ 50	-11.63	-11.58	-11.57	-11.56
115	138	+ 20	-4.58	-4.53	-4.51	-4.46
85	102	+ 20	-4.42	-4.39	-4.37	-4.34

Note: Frequency Tolerance (ppm) = {[Measured Frequency (Hz) - Declared Frequency (Hz)] / Declared Frequency (Hz)} *10⁶.

6.7. Contention Based Protocol

6.7.1. Test Limit

Unlicensed indoor low power device must detect co-channel radio frequency power that is at least -62dBm (The threshold is referenced to a 0dBi antenna gain.) or low.

Indoor low power device must detect an AWGN signal with 90% (or better) level of certainty.

6.7.2. Test Procedure Used

KDB 987594 D02v02r01- Section I


6.7.3. Test Setting

1. Configure the EUT to transmit with a constant duty cycle.
2. Set the operating parameters of the EUT including power level, operating frequency, modulation and bandwidth.
3. Set the signal analyzer center frequency to the nominal EUT channel center frequency. The span range of the signal analyzer shall be between two times and five times the OBW of the EUT.
Connect the output port of the EUT to the signal analyzer 2. Ensure that the attenuator 2 provides enough attenuation to not overload the signal analyzer 2 receiver.
4. Monitoring the signal analyzer 2, verify the EUT is operating and transmitting with the parameters set at step two.
5. Using an AWGN signal source, generate a 10 MHz-wide AWGN signal. Use Table 1 of KDB 987594 to determine the center frequency of the 10 MHz AWGN signal relative to the EUT's channel bandwidth and center frequency.
6. Set the AWGN signal power to an extremely low level. Connect the AWGN signal source, via a 3-dB splitter, to the signal analyzer 1 and the EUT as shown in below figure.
7. Transmit the AWGN signal (RF ON) and verify its characteristics on the signal analyzer 1.
8. Monitor the signal analyzer 2 to verify if the AWGN signal has been detected and the EUT has ceased transmission. If the EUT continues to transmit, then incrementally increase the AWGN signal power level until the EUT stops transmitting.

9. Determine and record the AWGN signal power level (at the EUT's antenna port) at which the EUT ceased transmission. Repeat the procedure at least 10 times to verify the EUT can detect an AWGN signal with 90% (or better) level of certainty.

10. Refer to Table 1 to determine number of times the detection threshold testing needs to be repeated. If testing is required more than once, then go back to step 5, choose a different center frequency for the AWGN signal and repeat the process.

6.7.4. Test Setup

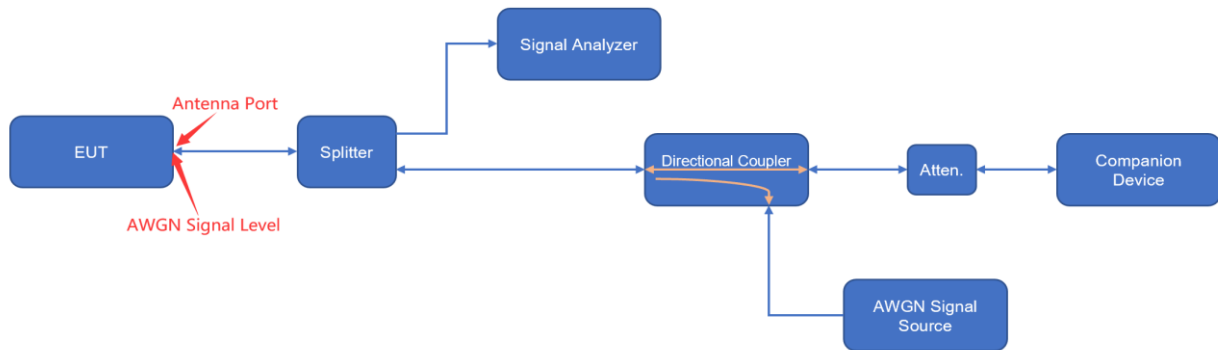

6.7.5. Test Result

Product	WiFi 7 Router	Temperature	25°C
Test Engineer	Parker	Relative Humidity	55%
Test Site	SR5	Test Date	2025/3/18
Test Mode	CBP		

Test Channel	Bandwidth (MHz)	Freq. (MHz)	AWGN Freq. (MHz)	AWGN Power (dBm)	Ant. Gain (dBi)	Adjust Power (dBm)	Detection Limit (dBm)	Detected Number	Detection Probability (%)	Limit (%)	Test Result
Operation Band: U-NII 5											
33	20	6115	6115	-62	2.66	-64.66	≤ -62.0	10	100	90	Pass
63	320	6265	6110	-62	2.66	-64.66	≤ -62.0	10	100	90	Pass
63	320	6265	6265	-62	2.66	-64.66	≤ -62.0	10	100	90	Pass
63	320	6265	6420	-62	2.66	-64.66	≤ -62.0	10	100	90	Pass
Operation Band: U-NII 6											
101	20	6455	6455	-62	3.12	-65.12	≤ -62.0	10	100	90	Pass
95	320	6425	6270	-58.9	3.12	-62.02	≤ -62.0	10	100	90	Pass
95	320	6425	6425	-58.9	3.12	-62.02	≤ -62.0	10	100	90	Pass
95	320	6425	6580	-58.9	3.12	-62.02	≤ -62.0	10	100	90	Pass
Operation Band: U-NII 7											
149	20	6695	6695	-62	2.89	-64.89	≤ -62.0	10	100	90	Pass
127	320	6585	6430	-62	2.89	-64.89	≤ -62.0	10	100	90	Pass
127	320	6585	6585	-62	2.89	-64.89	≤ -62.0	10	100	90	Pass
127	320	6585	6740	-62	2.89	-64.89	≤ -62.0	10	100	90	Pass
Operation Band: U-NII 8											
213	20	7015	7015	-62	2.89	-64.89	≤ -62.0	10	100	90	Pass
191	320	6905	6750	-62	2.89	-64.89	≤ -62.0	10	100	90	Pass
191	320	6905	6905	-62	2.89	-64.89	≤ -62.0	10	100	90	Pass
191	320	6905	7060	-62	2.89	-64.89	≤ -62.0	10	100	90	Pass

Note 1: Adjust Power (dBm) = AWGN Power (dBm) – Antenna Gain (dBi).


Note 2: Conducted measurements are used.

Bandwidth (MHz)	Freq. (MHz)	AWGN Freq. (MHz)	Adjust Power (dBm)	EUT Tx Status
Operation Band: U-NII 5				
20	6115	6115	-70.00	ON
			-65.66	Minimal
			-64.66	OFF
320	6265	6110	-70.00	ON
			-65.66	Minimal
			-64.66	OFF
320	6265	6265	-70.00	ON
			-65.66	Minimal
			-64.66	OFF
320	6265	6420	-70.00	ON
			-65.66	Minimal
			-64.66	OFF
Operation Band: U-NII 6				
20	6455	6455	-70.00	ON
			-66.12	Minimal
			-65.12	OFF
320	6425	6270	-70.00	ON
			-63.02	Minimal
			-62.02	OFF
320	6425	6425	-70.00	ON
			-63.02	Minimal
			-62.02	OFF
320	6425	6580	-70.00	ON
			-63.02	Minimal
			-62.02	OFF


Bandwidth (MHz)	Freq. (MHz)	AWGN Freq. (MHz)	Adjust Power (dBm)	EUT Status
Operation Band: U-NII 7				
20	6695	6695	-70.00	ON
			-65.89	Minimal
			-64.89	OFF
320	6585	6430	-70.00	ON
			-65.89	Minimal
			-64.89	OFF
320	6585	6585	-70.00	ON
			-65.89	Minimal
			-64.89	OFF
320	6585	6740	-70.00	ON
			-65.89	Minimal
			-64.89	OFF
Operation Band: U-NII 8				
20	7015	7015	-70.00	ON
			-65.89	Minimal
			-64.89	OFF
320	6905	6750	-70.00	ON
			-65.89	Minimal
			-64.89	OFF
320	6905	6905	-70.00	ON
			-65.89	Minimal
			-64.89	OFF
320	6905	7060	-70.00	ON
			-65.89	Minimal
			-64.89	OFF
Note: OFF: AWGN level at which no transmission is detected, consistently for a minimum period of 10 seconds Minimal: AWGN level at which the system begins to trigger the transmission switch-off, albeit not being kept off consistently ON: AWGN level at which no impact on the transmission is detected, consistently for a minimum period of 10 seconds				

AWGN Signal Level (at Antenna Port) Calibration Plots (NII-5 Band) _Master


802.11be-HET20 / CH33

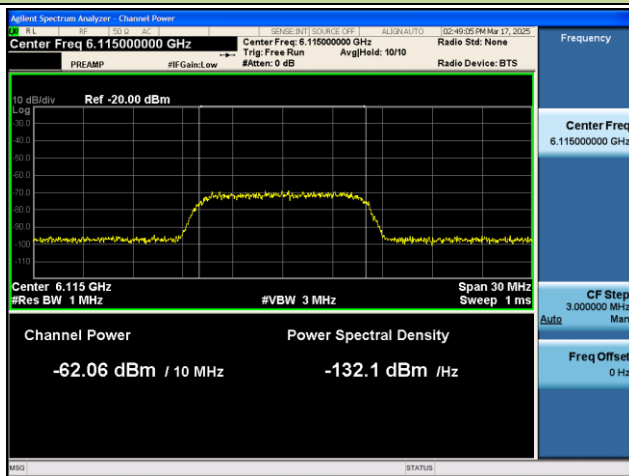


802.11 be-HET320 / CH63 (Low Edge)

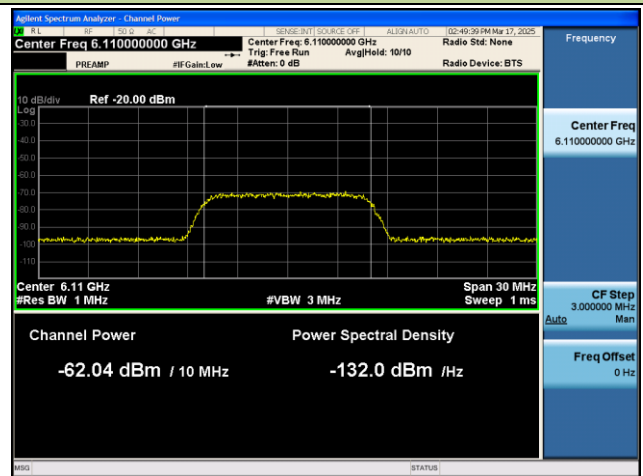

802.11 be-HET320 / CH63 (Middle)

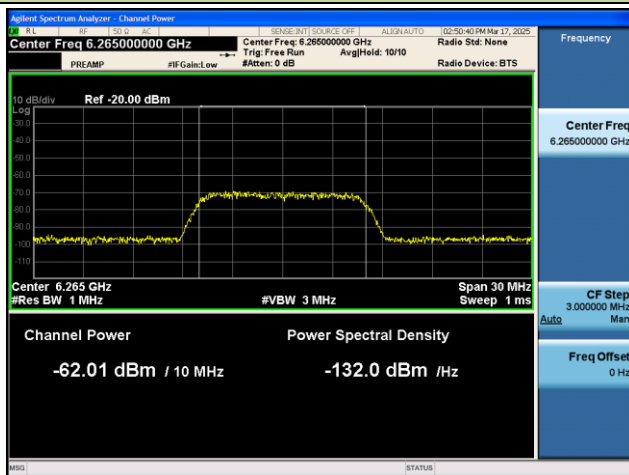


802.11 be-HET320 / CH63 (High Edge)

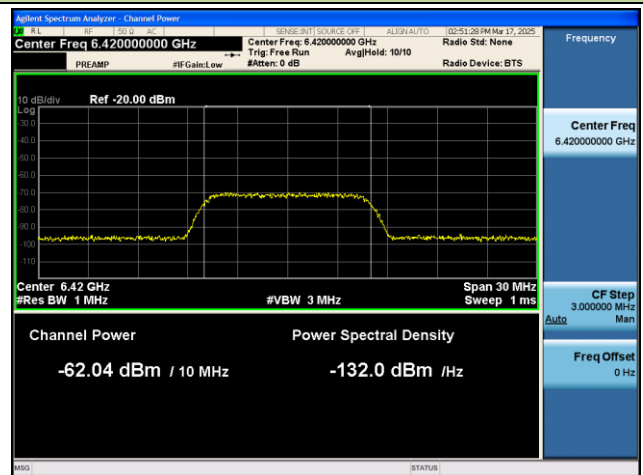


AWGN Signal Level (at Antenna Port) Calibration Plots (NII-6 Band) _Master


802.11 be-HET20 / CH101

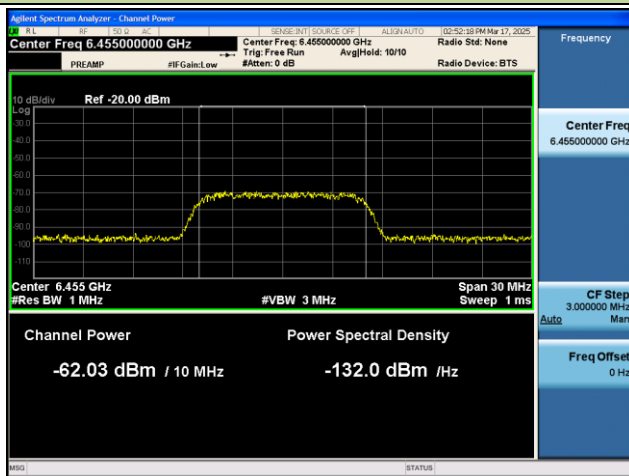


802.11 be-HET320 / CH95 (Low Edge)

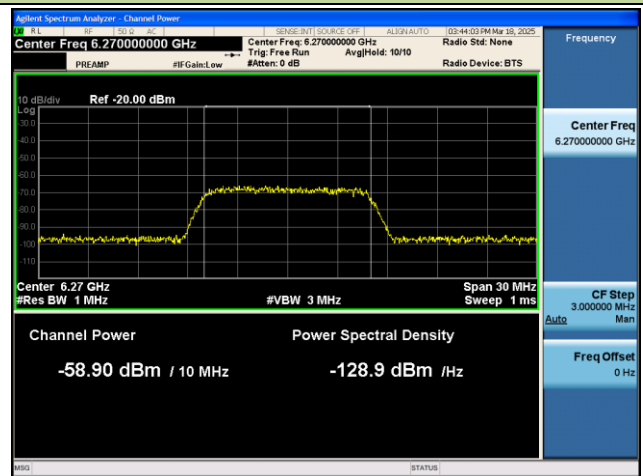

802.11 be-HET320 / CH95 (Middle)

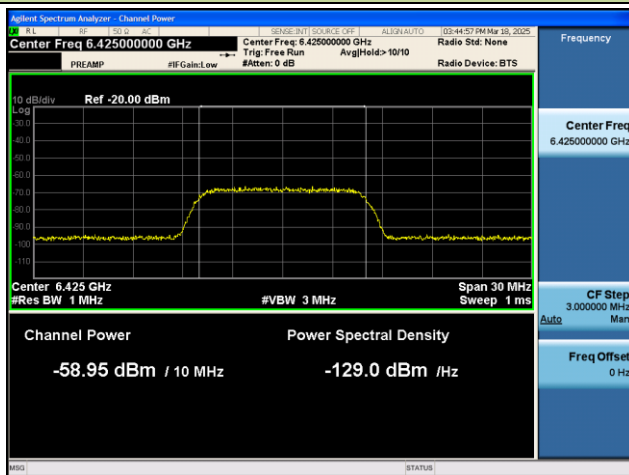


802.11 be-HET320 / CH95 (High Edge)

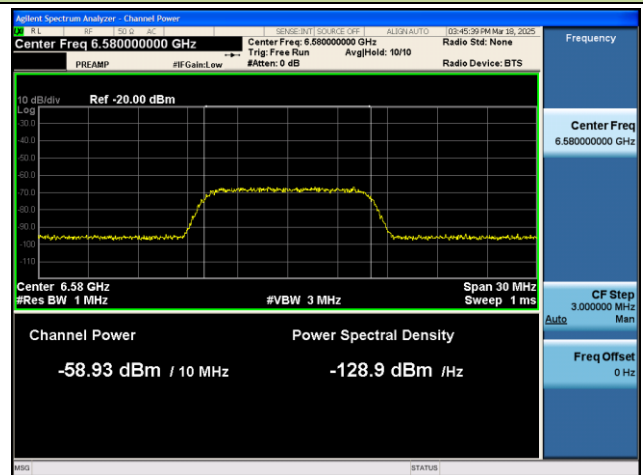


AWGN Signal Level (at Antenna Port) Calibration Plots (NII-7 Band) _Master


802.11 be-HET20 / CH149

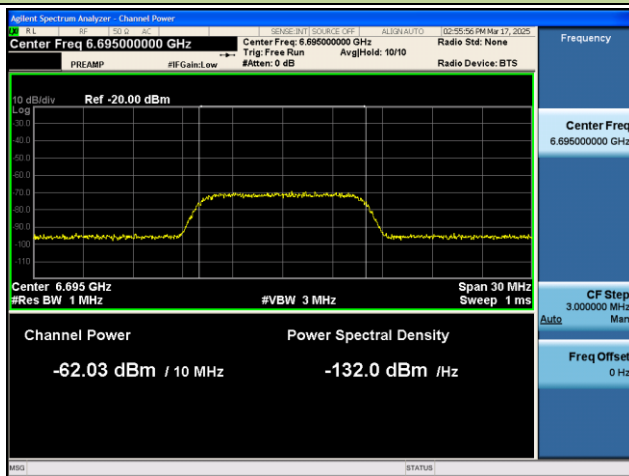


802.11 be-HET320 / CH127 (Low Edge)

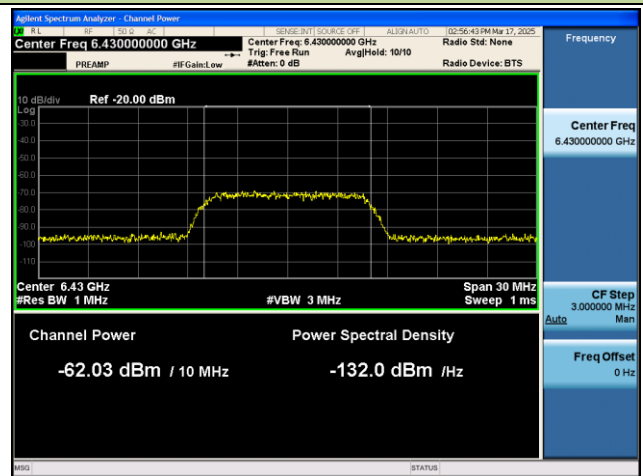

802.11 be-HET320 / CH127 (Middle)

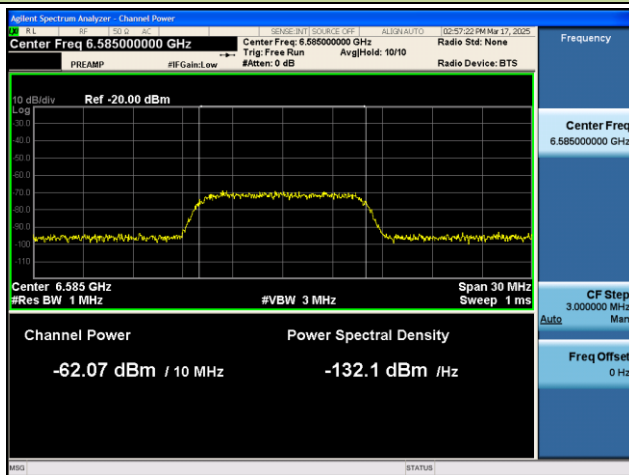


802.11 be-HET320 / CH127 (High Edge)

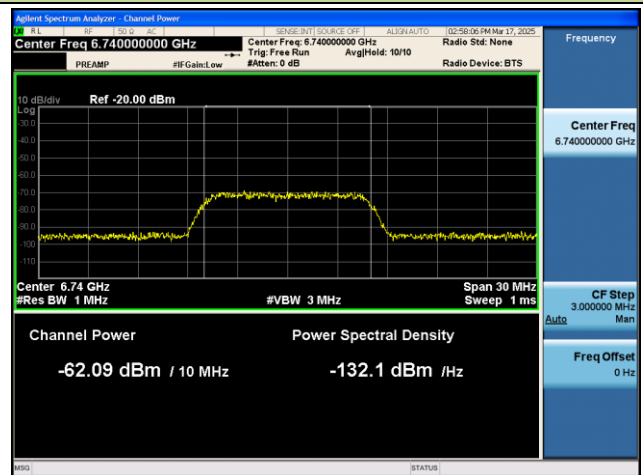


AWGN Signal Level (at Antenna Port) Calibration Plots (NII-8 Band) _Master


802.11 be-HET20 / CH213

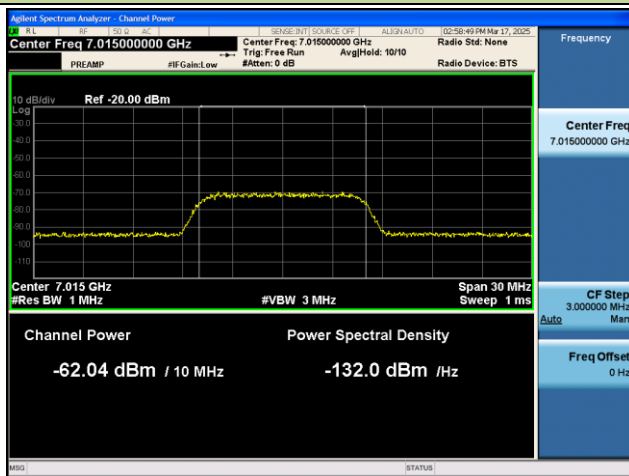

802.11 be-HET320 / CH191 (Low Edge)

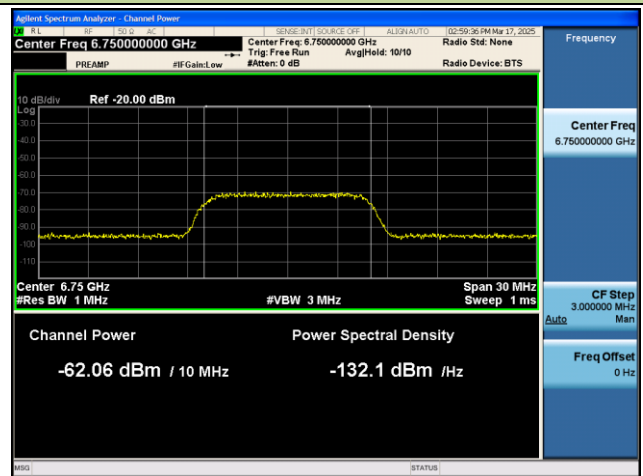

802.11 be-HET320 / CH191 (Middle)

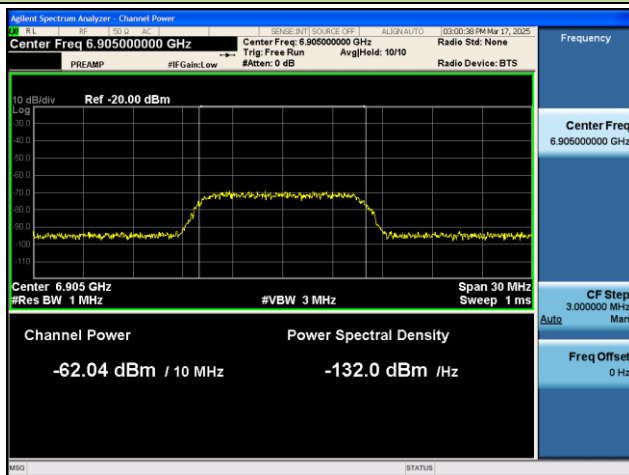

802.11 be-HET320 / CH191 (High Edge)

