

TEST REPORT

Test report no.: 1-3977/22-01-04-A

Testing laboratory

CTC advanced GmbH

Untertuerkheimer Strasse 6 – 10
66117 Saarbruecken / Germany

Phone: + 49 681 5 98 - 0
Fax: + 49 681 5 98 - 9075
Internet: <https://www.ctcadvanced.com>
e-mail: mail@ctcadvanced.com

Accredited Testing Laboratory:

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2018-03) by the Deutsche Akkreditierungsstelle GmbH (DAkkS)
The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate starting with the registration number: D-PL-12076-01.

Applicant

SAGEMCOM BROADBAND SAS

250, route de l' Empereur
92848 Rueil-Malmaison Cedex / FRANCE
Phone: -/-
Contact: Alain CRUCHANT
e-mail: alain.cruchant@sagemcom.com

Manufacturer

SAGEMCOM BROADBAND SAS

250, route de l' Empereur
92848 Rueil-Malmaison Cedex / FRANCE

Test standard/s

FCC - Title 47 CFR Part 15 FCC - Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices

For further applied test standards please refer to section 3 of this test report.

Test Item

Kind of test item: **Gateway**
Model name: **F5688W**
FCC ID: **VW3FAST5688W**
Frequency: 2400 MHz to 2483.5 MHz
Technology tested: WLAN
Antenna: 4 integrated antennas
Power supply: 120 V AC by power supply unit
Temperature range: 0°C to +50°C

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

Test report authorized:

David Lang
Lab Manager
Radio Communications

Test performed:

Michael Dorongovski
Lab Manager
Radio Communications

1 Table of contents

1	Table of contents	2
2	General information	3
2.1	Notes and disclaimer	3
2.2	Application details	3
2.3	Test laboratories sub-contracted	3
3	Test standard/s, references and accreditations	4
4	Reporting statements of conformity – decision rule	5
5	Test environment	6
6	Test item	6
6.1	General description	6
6.2	Additional information	6
7	Description of the test setup	7
7.1	Shielded semi anechoic chamber	8
7.2	Shielded fully anechoic chamber	9
7.3	Conducted measurements	10
7.4	Radiated measurements > 18 GHz	11
7.5	AC conducted	12
8	Sequence of testing	13
8.1	Sequence of testing radiated spurious 9 kHz to 30 MHz	13
8.2	Sequence of testing radiated spurious 30 MHz to 1 GHz	14
8.3	Sequence of testing radiated spurious 1 GHz to 18 GHz	15
8.4	Sequence of testing radiated spurious above 18 GHz	16
9	Measurement uncertainty	17
10	Summary of measurement results	18
11	Additional information and comments	19
12	Additional EUT parameter	20
13	Measurement results	21
13.1	Antenna gain	21
13.2	Identify worst case data rate	21
13.3	Maximum output power	22
13.4	Duty cycle	25
13.5	Average power spectral density	26
13.6	6 dB DTS bandwidth	29
13.7	Occupied bandwidth – 20 dB bandwidth	31
13.8	Band edge compliance radiated	33
13.9	Spurious emissions conducted	35
13.10	Spurious emissions radiated below 30 MHz	48
13.11	Spurious emissions radiated 30 MHz to 1 GHz	55
13.12	Spurious emissions radiated above 1 GHz	59
13.13	Spurious emissions conducted below 30 MHz (AC conducted)	67

14	Glossary	70
15	Document history	71
16	Accreditation Certificate – D-PL-12076-01-05	71

2 General information

2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. CTC advanced GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CTC advanced GmbH.

The testing service provided by CTC advanced GmbH has been rendered under the current "General Terms and Conditions for CTC advanced GmbH".

CTC advanced GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CTC advanced GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CTC advanced GmbH test report include or imply any product or service warranties from CTC advanced GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CTC advanced GmbH.

All rights and remedies regarding vendor's products and services for which CTC advanced GmbH has prepared this test report shall be provided by the party offering such products or services and not by CTC advanced GmbH. In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

This test report replaces the test report with the number 1-3977/22-01-04 and dated 2022-05-25.

2.2 Application details

Date of receipt of order:	2022-02-08
Date of receipt of test item:	2022-02-16
Start of test:*	2022-02-21
End of test:*	2022-03-16
Person(s) present during the test:	-/-

*Date of each measurement, if not shown in the plot, can be requested. Dates are stored in the measurement software.

2.3 Test laboratories sub-contracted

None

3 Test standard/s, references and accreditations

Test standard	Date	Description
FCC - Title 47 CFR Part 15		FCC - Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices
Guidance	Version	Description
KDB 558074 D01	v05r02	GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES
ANSI C63.4-2014	-/-	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
ANSI C63.10-2013	-/-	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB 662911 D01	v02r01	Emissions Testing of Transmitters with Multiple Outputs in the Same Band
Accreditation	Description	
D-PL-12076-01-05	Telecommunication FCC requirements https://www.dakks.de/as/ast/d/D-PL-12076-01-05e.pdf	

FCC designation number: DE0002




4 Reporting statements of conformity – decision rule

Only the measured values related to their corresponding limits will be used to decide whether the equipment under test meets the requirements of the test standards listed in chapter 3.

The measurement uncertainty is mentioned in this test report, see chapter 9, but is not taken into account - neither to the limits nor to the measurement results. Measurement results with a smaller margin to the corresponding limits than the measurement uncertainty have a potential risk of more than 5% that the decision might be wrong."

measured value, measurement uncertainty, verdict

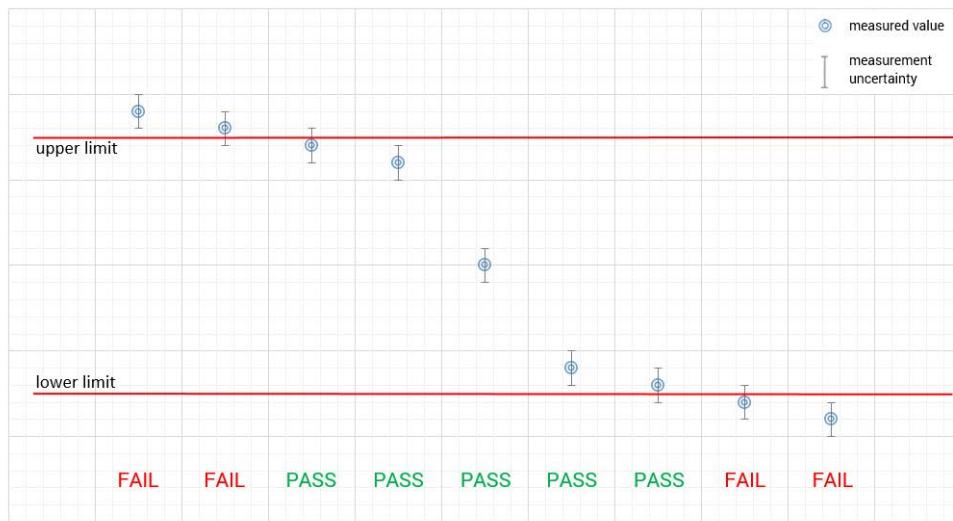

5 Test environment

Temperature	: T_{nom} T_{max} T_{min}	+22 °C during room temperature tests No tests under extreme environmental conditions required. No tests under extreme environmental conditions required.
Relative humidity content	:	42 %
Barometric pressure	:	1021 hpa
Power supply	: V_{nom} V_{max} V_{min}	120 V AC by power supply unit No tests under extreme environmental conditions required. No tests under extreme environmental conditions required.

6 Test item

6.1 General description

Kind of test item	: Gateway
Model name	: F5688W
S/N serial number	: Rad. DM2202059000016 Cond. DM220195900008
Hardware status	: V1.0
Software status	: NA
Firmware status	: SGJi10000C
Frequency band	: 2400 MHz to 2483.5 MHz
Type of radio transmission	: DSSS, OFDM
Use of frequency spectrum	: CCK, (D)BPSK, (D)QPSK, 16 – QAM, 64 – QAM
Type of modulation	: 11 (20 MHz) 9 (40 MHz)
Number of channels	: 4 integrated antennas
Antenna	: 120 V AC by power supply unit
Power supply	: 0°C to +50°C

6.2 Additional information

The content of the following annexes is defined in the QA. It may be that not all of the listed annexes are necessary for this report, thus some values in between may be missing.

Test setup and EUT photos are included in test report: 1-3977/22-01-01_AnnexA
 1-3977/22-01-01_AnnexB
 1-3977/22-01-01_AnnexD

7 Description of the test setup

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, RF generating and signaling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).


In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Lab/Item).

Agenda: Kind of Calibration

k	calibration / calibrated	EK	limited calibration
ne	not required (k, ev, izw, zw not required)	zw	cyclical maintenance (external cyclical maintenance)
ev	periodic self verification	izw	internal cyclical maintenance
Ve	long-term stability recognized	g	blocked for accredited testing
vlkl!	Attention: extended calibration interval	*)	next calibration ordered / currently in progress
NK!	Attention: not calibrated		

7.1 Shielded semi anechoic chamber

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 30 MHz to 1 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are conform to specifications ANSI C63. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analyzers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.

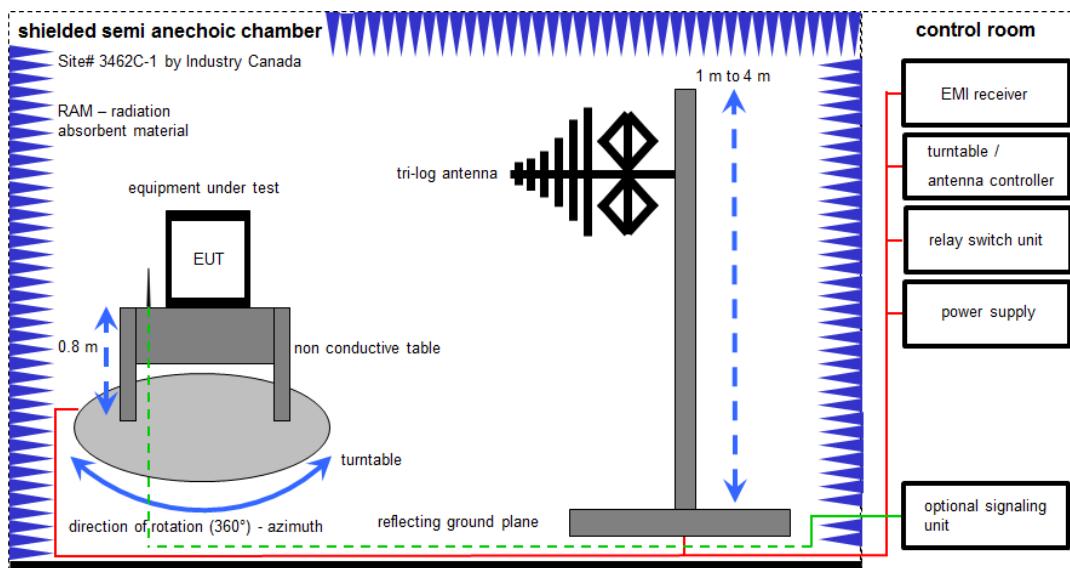

Measurement distance: tri-log antenna 10 meter

EMC32 software version: 10.59.00

FS = UR + CL + AF

(FS-field strength; UR-voltage at the receiver; CL-loss of the cable; AF-antenna factor)


Example calculation:

FS [dB μ V/m] = 12.35 [dB μ V/m] + 1.90 [dB] + 16.80 [dB/m] = 31.05 [dB μ V/m] (35.69 μ V/m)

Equipment table:

No.	Lab / Item	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Switch-Unit	3488A	HP	2719A14505	300000368	ev	-/-	-/-
2	A	Meßkabine 1	HF-Absorberhalle	MWB AG 300023	Batch no. 699714	300000551	ne	-/-	-/-
3	A	Antenna Tower	Model 2175	ETS-Lindgren	64762	300003745	izw	-/-	-/-
4	A	Positioning Controller	Model 2090	ETS-Lindgren	64672	300003746	izw	-/-	-/-
5	A	Turntable Interface-Box	Model 105637	ETS-Lindgren	44583	300003747	izw	-/-	-/-
6	A	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck Mess - Elektronik	295	300003787	vIKI!	21.04.2021	20.04.2023
7	A	EMI Test Receiver	ESR3	Rohde & Schwarz	102587	300005771	k	10.12.2020	09.06.2022

7.2 Shielded fully anechoic chamber

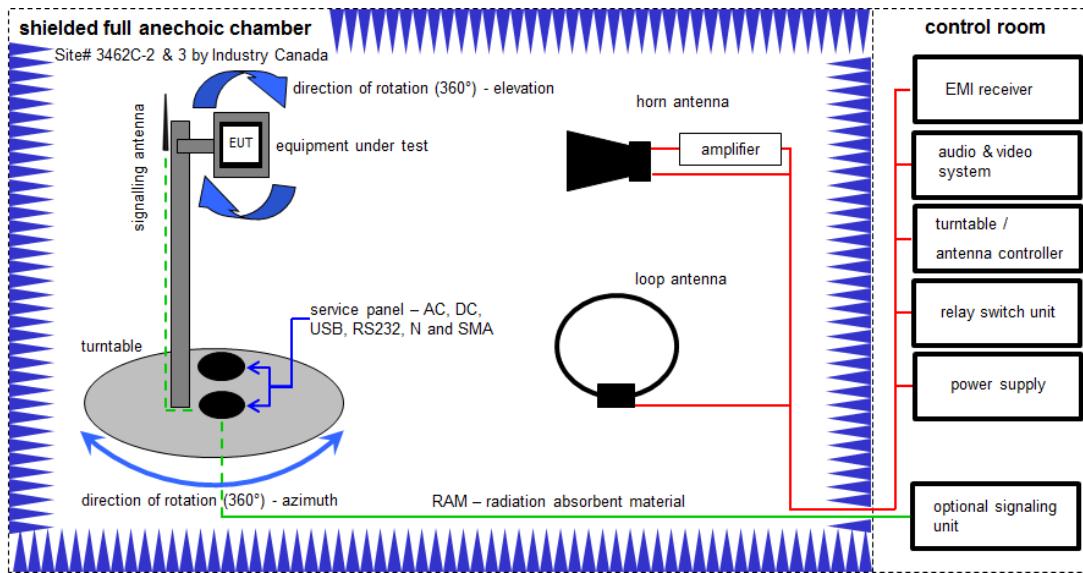

Measurement distance: horn antenna 3 meter; loop antenna 3 meter

$$FS = UR + CA + AF$$

(FS-field strength; UR-voltage at the receiver; CA-loss of the signal path; AF-antenna factor)

Example calculation:


$$FS [dB\mu V/m] = 40.0 [dB\mu V/m] + (-35.8) [dB] + 32.9 [dB/m] = 37.1 [dB\mu V/m] (71.61 \mu V/m)$$

Equipment table:

No.	Setup	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	C	Active Loop Antenna 9 kHz to 30 MHz	6502	EMCO	2210	300001015	vlKI!	01.07.2021	30.06.2023
2	A, B, C	Anechoic chamber	FAC 3/5m	MWB / TDK	87400/02	300000996	ev	-/-	-/-
3	A, B	Double-Ridged Waveguide Horn Antenna 1-18.0GHz	3115	EMCO	9107-3697	300001605	vlKI!	12.03.2021	11.03.2023
4	A, B, C	Switch / Control Unit	3488A	HP	*	300000199	ne	-/-	-/-
5	B	Band Reject filter	WRCG2400/2483-2375/2505-50/10SS	Wainwright	11	300003351	ev	-/-	-/-
6	A, B, C	EMI Test Receiver 20Hz- 26,5GHz	ESU26	R&S	100037	300003555	k	09.12.2021	08.12.2022
7	A, B	Broadband Amplifier 0.5-18 GHz	CBLU5184540	CERNEX	22049	300004481	ev	-/-	-/-
8	A, B, C	4U RF Switch Platform	L4491A	Agilent Technologies	MY50000037	300004509	ne	-/-	-/-
9	A, B, C	NEXIO EMV-Software	BAT EMC V3.21.0.27	EMCO	-/-	300004682	ne	-/-	-/-
10	A, B	RF-Amplifier	AMF-6F06001800-30-10P-R	NARDA-MITEQ Inc	2011572	300005241	ev	-/-	-/-

7.3 Conducted measurements

Conducted measurements normal conditions

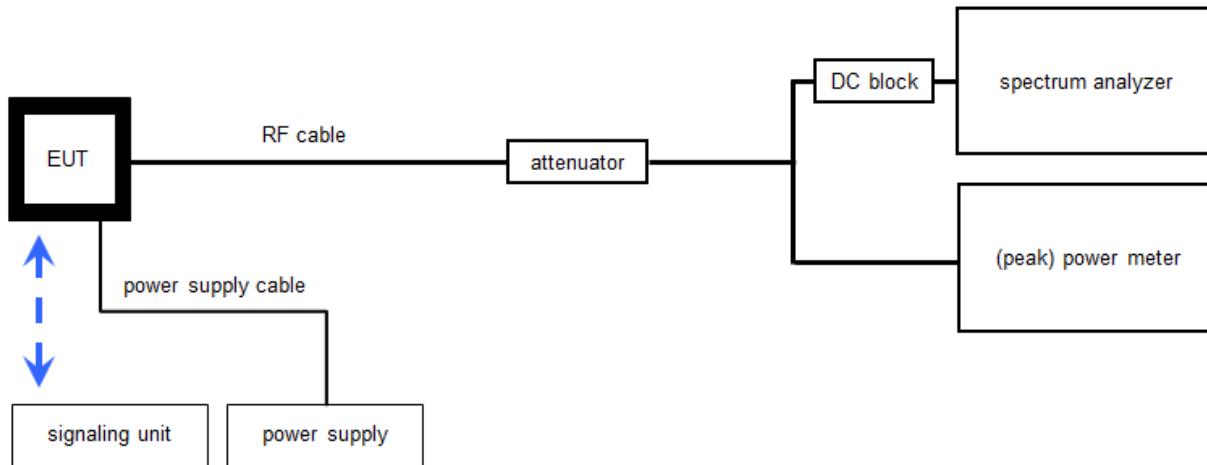

WLAN tester version: 1.1.13; LabView2015

OP = AV + CA
 (OP-output power; AV-analyzer value; CA-loss signal path)


Example calculation:

$$\text{OP [dBm]} = 6.0 \text{ [dBm]} + 11.7 \text{ [dB]} = 17.7 \text{ [dBm]} (58.88 \text{ mW})$$

Equipment table:

No.	Setup	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Hygro-Thermometer	-/-, 5-45°C, 20-100%rF	Thies Clima	-/-	400000109	ev	13.08.2020	12.08.2022
2	A	USB/GPIB interface	82357B	Agilent Technologies	MY52103346	300004390	ne	-/-	-/-
3	A	PC Laboratory	Exone	Fröhlich + Walter	S2642279-03 / 10	300004179	ne	-/-	-/-
4	A	Signal analyzer	FSV30	Rohde&Schwarz	1321.3008K30/103809	300005359	vlKI!	08.12.2020	07.12.2022
5	A	Tester Software RadioStar (C.BER2 for BT Conformance)	Version 1.0.0.X	CTC advanced GmbH	0001	400001380	ne	-/-	-/-

7.4 Radiated measurements > 18 GHz

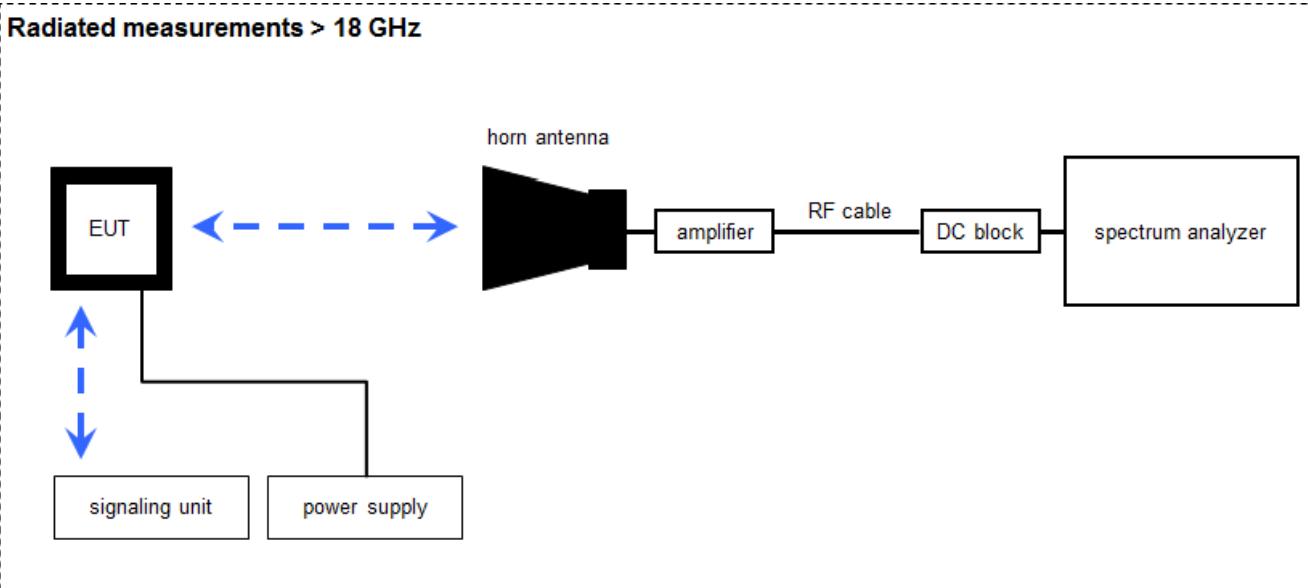

Measurement distance: horn antenna 50 cm

$$FS = UR + CA + AF$$

(FS-field strength; UR-voltage at the receiver; CA-loss signal path & distance correction; AF-antenna factor)

Example calculation:


$$FS \text{ [dB}\mu\text{V/m]} = 40.0 \text{ [dB}\mu\text{V/m]} + (-60.1) \text{ [dB]} + 36.74 \text{ [dB/m]} = 16.64 \text{ [dB}\mu\text{V/m]} (6.79 \mu\text{V/m})$$

Equipment table:

No.	Setup	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Microwave System Amplifier, 0.5-26.5 GHz	83017A	HP	00419	300002268	ev	-/-	-/-
2	A	Std. Gain Horn Antenna 18.0-26.5 GHz	638	Narda	01096	300000486	viKI!	-/-	-/-
3	A	RF-Cable	ST18/SMAm/SMAm /48	Huber & Suhner	Batch no. 600918	400001182	ev	-/-	-/-
4	A	Signal analyzer	FSV30	Rohde&Schwarz	1321.3008K30/103809	300005359	viKI!	08.12.2020	07.12.2022

7.5 AC conducted

AC conducted

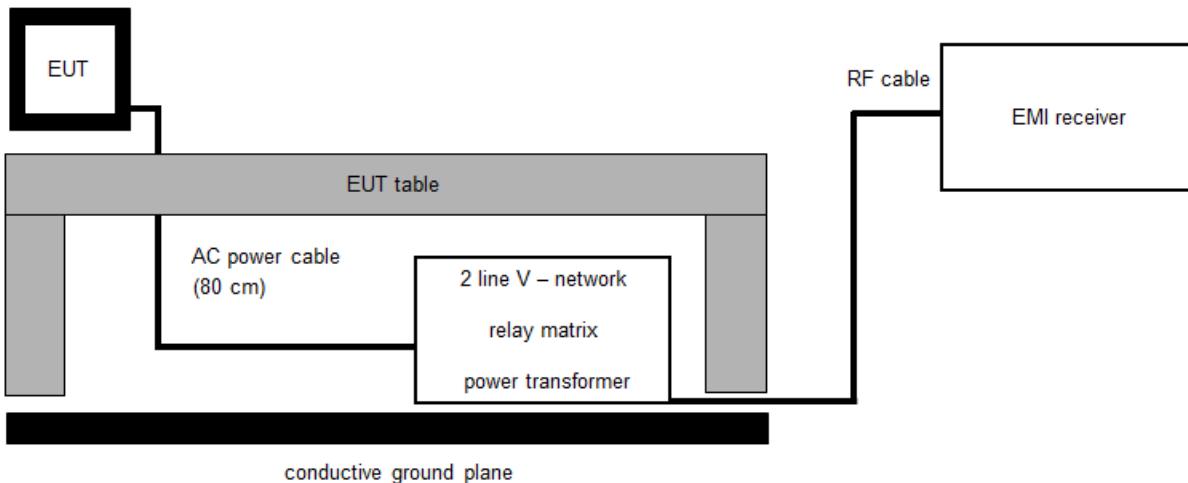

FS = UR + CF + VC

(FS-field strength; UR-voltage at the receiver; CR-loss of the cable and filter; VC-correction factor of the ISN)

Example calculation:

$$FS \text{ [dB}\mu\text{V/m]} = 37.62 \text{ [dB}\mu\text{V/m]} + 9.90 \text{ [dB]} + 0.23 \text{ [dB]} = 47.75 \text{ [dB}\mu\text{V/m]} (244.06 \mu\text{V/m})$$

Equipment table:

No.	Setup	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Two-line V-Network (LISN) 9 kHz to 30 MHz	ESH3-Z5	Rohde & Schwarz	892475/017	300002209	vIKI!	14.12.2021	13.12.2023
2	A	RF-Filter-section	85420E	HP	3427A00162	300002214	NK!	-/-	-/-
3	A	EMI Test Receiver	ESCI 3	R&S	100083	300003312	k	09.12.2021	08.12.2022
4	A	Analyzer-Reference-System (Harmonics and Flicker)	ARS 16/1	SPS	A3509 07/0 0205	300003314	vIKI!	29.12.2021	28.12.2023
5	A	Hochpass 150 kHz	EZ-25	R&S	100010	300003798	ev	-/-	-/-
6	A	PC	TecLine	F+W		300003532	ne	-/-	-/-
7	A	Switch-Unit	3488A	HP	2719A14505	300000368	ev	-/-	-/-

8 Sequence of testing

8.1 Sequence of testing radiated spurious 9 kHz to 30 MHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, it is placed on a table with 0.8 m height.
- If the EUT is a floor standing device, it is placed directly on the turn table.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

Premereasurement*

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 1 m.
- At each turntable position the analyzer sweeps with positive-peak detector to find the maximum of all emissions.

Final measurement

- Identified emissions during the pre-measurement are maximized by the software by rotating the turntable from 0° to 360°.
- Loop antenna is rotated about its vertical axis for maximum response at each azimuth about the EUT. (For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT)
- The final measurement is done in the position (turntable and elevation) causing the highest emissions with quasi-peak (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. A plot with the graph of the premeasurement and the limit is stored.

*Note: The sequence will be repeated three times with different EUT orientations.

8.2 Sequence of testing radiated spurious 30 MHz to 1 GHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 10 m or 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 m to 3 m.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximize the peaks by changing turntable position $\pm 45^\circ$ and antenna height between 1 and 4 m.
- The final measurement is done with quasi-peak detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.

8.3 Sequence of testing radiated spurious 1 GHz to 18 GHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a 2-axis positioner with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed directly on the turn table.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height is 1.5 m.
- At each turntable position and antenna polarization the analyzer sweeps with positive peak detector to find the maximum of all emissions.

Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximizes the peaks by rotating the turntable from 0° to 360°. This measurement is repeated for different EUT-table positions (0° to 150° in 30°-steps) and for both antenna polarizations.
- The final measurement is done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and RMS detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.

8.4 Sequence of testing radiated spurious above 18 GHz

Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet.
- The measurement distance is as appropriate (e.g. 0.5 m).
- The EUT is set into operation.

Premeasurement

- The test antenna is handheld and moved carefully over the EUT to cover the EUT's whole sphere and different polarizations of the antenna.

Final measurement

- The final measurement is performed at the position and antenna orientation causing the highest emissions with Peak and RMS detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement and the limit is stored.

9 Measurement uncertainty

Measurement uncertainty		
Test case	Uncertainty	
Antenna gain	± 3 dB	
Power spectral density	± 1.56 dB	
DTS bandwidth	± 100 kHz (depends on the used RBW)	
Occupied bandwidth	± 100 kHz (depends on the used RBW)	
Maximum output power conducted	± 1.56 dB	
Detailed spurious emissions @ the band edge - conducted	± 1.56 dB	
Band edge compliance radiated	± 3 dB	
Spurious emissions conducted	> 3.6 GHz	± 1.56 dB
	> 7 GHz	± 1.56 dB
	> 18 GHz	± 2.31 dB
	≥ 40 GHz	± 2.97 dB
Spurious emissions radiated below 30 MHz	± 3 dB	
Spurious emissions radiated 30 MHz to 1 GHz	± 3 dB	
Spurious emissions radiated 1 GHz to 12.75 GHz	± 3.7 dB	
Spurious emissions radiated above 12.75 GHz	± 4.5 dB	
Spurious emissions conducted below 30 MHz (AC conducted)	± 2.6 dB	

10 Summary of measurement results

<input checked="" type="checkbox"/>	No deviations from the technical specifications were ascertained
<input type="checkbox"/>	There were deviations from the technical specifications ascertained
<input type="checkbox"/>	This test report is only a partial test report. The content and verdict of the performed test cases are listed below.

TC Identifier	Description	Verdict	Date	Remark
RF-Testing	CFR Part 15 RSS - 247, Issue 2	See table!	2022-05-27	-/-

Test specification clause	Test case	Guideline	Temperature & voltage conditions	C	NC	NA	NP	Remark
§15.247(b)(4) RSS - 247 / 5.4 (f)(ii)	Antenna gain	-/-	Nominal	Declared by customer				-/-
§15.35	Duty cycle	-/-	Nominal	-/-				-/-
§15.247(e) RSS - 247 / 5.2 (b)	Power spectral density	KDB 558074 DTS clause: 8.4	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.247(a)(2) RSS - 247 / 5.2 (a)	DTS bandwidth	KDB 558074 DTS clause: 8.2	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
RSS Gen clause 4.6.1	Occupied bandwidth	-/-	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.247(b)(3) RSS - 247 / 5.4 (d)	Maximum output power	KDB 558074 DTS clause: 8.3.1.3	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.247(d) RSS - 247 / 5.5	Detailed spurious emissions @ the band edge – cond.	-/-	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.205 RSS - 247 / 5.5 RSS - Gen	Band edge compliance cond. or rad.	KDB 558074 DTS clause: 8.7.3	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.247(d) RSS - 247 / 5.5	TX spurious emissions cond.	KDB 558074 DTS clause: 8.5	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.209(a) RSS-Gen	TX spurious emissions rad. below 30 MHz	-/-	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.247(d) RSS - 247 / 5.5 RSS-Gen	TX spurious emissions rad. 30 MHz to 1 GHz	-/-	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.247(d) RSS - 247 / 5.5 RSS-Gen	TX spurious emissions rad. above 1 GHz	-/-	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.107(a) §15.207	Conducted emissions < 30 MHz	-/-	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-

Notes:

C	Compliant	NC	Not compliant	NA	Not applicable	NP	Not performed
----------	-----------	-----------	---------------	-----------	----------------	-----------	---------------

11 Additional information and comments

Reference documents: None

Co-applicable documents:

- 1-3977_22-01-04_Annex_MR_A1.pdf (802.11b)
- 1-3977_22-01-04_Annex_MR_A2.pdf (802.11g)
- 1-3977_22-01-04_Annex_MR_A3.pdf (802.11n HT20)
- 1-3977_22-01-04_Annex_MR_A4.pdf (802.11n HT40)
- 1-3977_22-01-04_Annex_MR_A5.pdf (802.11ax HE20)
- 1-3977_22-01-04_Annex_MR_A6.pdf (802.11ax HE40)

Special test descriptions:

All tests were performed with the EUT transmitting on all ports/antennas simultaneously with >98% duty cycle.
 For all tests the power setting 48 was used.

Configuration descriptions: None

EUT selection:

- Only one device available
- Devices selected by the customer
- Devices selected by the laboratory (Randomly)

Provided channels:

Channels with 20 MHz channel bandwidth:

channel number & center frequency													
channel	1	2	3	4	5	6	7	8	9	10	11	12	13
f _c / MHz	2412	2417	2422	2427	2432	2437	2442	2447	2452	2457	2462	2467	2472

Channels with 40 MHz channel bandwidth:

channel number & center frequency													
channel	-/-	-/-	3	4	5	6	7	8	9	10	11	-/-	-/-
f _c / MHz	-/-	-/-	2422	2427	2432	2437	2442	2447	2452	2457	2462	-/-	-/-

Note: The channels used for the tests are marked in bold in the list.

12 Additional EUT parameter

Test mode:

No test mode available
Iperf was used to ping another device with the largest support packet size

Test mode available
Special software is used.
EUT is transmitting pseudo random data by itself

Modulation types:

Wide Band Modulation (None Hopping – e.g. DSSS, OFDM)

Frequency Hopping Spread Spectrum (FHSS)

Antennas and transmit operating modes:

Operating mode 1 (single antenna)
- *Equipment with 1 antenna,*
- *Equipment with 2 diversity antennas operating in switched diversity mode by which at any moment in time only 1 antenna is used,*
- *Smart antenna system with 2 or more transmit/receive chains, but operating in a mode where only 1 transmit/receive chain is used)*

Operating mode 2 (multiple antennas, no beamforming)
- *Equipment operating in this mode contains a smart antenna system using two or more transmit/receive chains simultaneously but without beamforming.*

Operating mode 3 (multiple antennas, with beamforming)
- *Equipment operating in this mode contains a smart antenna system using two or more transmit/receive chains simultaneously with beamforming.*
In addition to the antenna assembly gain (G), the beamforming gain (Y) may have to be taken into account when performing the measurements.

13 Measurement results

13.1 Antenna gain

Limits:

FCC
6 dBi / > 6 dBi output power and power density reduction required

Results:

Combined gain for 4x4 MIMO	lowest channel	middle channel	highest channel
Gain [dBi] / Declared		0.6	

Beamforming gain for 4x4 MIMO	lowest channel	middle channel	highest channel
Gain [dBi] / Declared		5.2	

Conclusion: The sum of combined gain and beamforming gain is lower than 6 dBi.

13.2 Identify worst case data rate

Results:

Modulation scheme / bandwidth	
802.11b	1 Mbit/s
802.11g	6 Mbit/s
802.11n HT20	MCS24
802.11n HT40	MCS24
802.11ax HE20	HEONSS4
802.11ax HE40	HEONSS4

The worst case data rates are declared by manufacturer.

13.3 Maximum output power

Description:

Measurement of the maximum conducted peak output power. The measurements are performed using the data rate identified in the previous chapter.

Measurement:

Measurement parameter	
Average measurement method according to ANSI C63.10-2013 Chapter 11.9.2.2.2	
External result file(s)	1-3977_22-01-04_Annex_MR_A1.pdf (802.11b) 1-3977_22-01-04_Annex_MR_A2.pdf (802.11g) 1-3977_22-01-04_Annex_MR_A3.pdf (802.11n HT20) 1-3977_22-01-04_Annex_MR_A4.pdf (802.11n HT40) 1-3977_22-01-04_Annex_MR_A5.pdf (802.11ax HE20) 1-3977_22-01-04_Annex_MR_A6.pdf (802.11ax HE40)
Test setup	See chapter 7.3 setup A
Measurement uncertainty	See chapter 9

Limits:

FCC
Conducted 1.0 W / 30 dBm with an antenna gain of max. 6 dBi

Results:

antenna port 1	maximum output power / [dBm]		
	lowest channel	middle channel	highest channel
802.11b	21.3	21.5	21.6
802.11g	22.9	23.3	23.1
802.11n HT20	22.9	23.4	22.8
802.11n HT40	22.7	23.3	23.3
802.11ax HE20	23.3	23.9	23.2
802.11ax HE40	23.2	23.7	23.6

antenna port 2	maximum output power / [dBm]		
	lowest channel	middle channel	highest channel
802.11b	21.3	21.9	21.6
802.11g	22.9	23.3	23.1
802.11n HT20	22.8	23.4	23.0
802.11n HT40	23.3	23.0	23.1
802.11ax HE20	23.0	23.6	23.1
802.11ax HE40	22.7	23.2	23.2

antenna port 3	maximum output power / [dBm]		
	lowest channel	middle channel	highest channel
802.11b	21.3	21.7	21.8
802.11g	23.0	23.7	23.3
802.11n HT20	22.6	23.4	23.1
802.11n HT40	23.5	23.5	23.4
802.11ax HE20	22.8	23.9	23.3
802.11ax HE40	24.1	23.8	23.6

antenna port 4	maximum output power / [dBm]		
	lowest channel	middle channel	highest channel
802.11b	21.3	21.4	21.9
802.11g	23.1	23.2	23.5
802.11n HT20	22.8	23.1	23.4
802.11n HT40	23.5	23.6	23.8
802.11ax HE20	23.1	23.5	23.4
802.11ax HE40	23.2	23.5	23.9

Sum of antenna ports 1, 2, 3 and 4	maximum output power / [dBm]		
	lowest channel	middle channel	highest channel
802.11b	27.3	27.7	27.8
802.11g	29.0	29.4	29.3
802.11n HT20	28.8	29.4	29.1
802.11n HT40	29.3	29.4	29.4
802.11ax HE20	29.1	29.8	29.3
802.11ax HE40	29.4	29.6	29.6

13.4 Duty cycle

Limits:

FCC
No limitation!

Results:

Duty cycle / correction factor	lowest channel	middle channel	highest channel
802.11b	100 % / 0.0 dB	100 % / 0.0 dB	100 % / 0.0 dB
802.11g	100 % / 0.0 dB	100 % / 0.0 dB	100 % / 0.0 dB
802.11n HT20	100 % / 0.0 dB	100 % / 0.0 dB	100 % / 0.0 dB
802.11n HT40	100 % / 0.0 dB	100 % / 0.0 dB	100 % / 0.0 dB
802.11ax HE20	100 % / 0.0 dB	100 % / 0.0 dB	100 % / 0.0 dB
802.11ax HE40	100 % / 0.0 dB	100 % / 0.0 dB	100 % / 0.0 dB

13.5 Average power spectral density

Description:

Measurement of the peak power spectral density of a digital modulated system. The PSD shows the strength of the variations as a function of the frequency.

Measurement:

Measurement parameter	
Average measurement method according to ANSI C63.10-2013 Chapter 11.10.5	
External result file(s)	1-3977_22-01-04_Annex_MR_A1.pdf (802.11b) 1-3977_22-01-04_Annex_MR_A2.pdf (802.11g) 1-3977_22-01-04_Annex_MR_A3.pdf (802.11n HT20) 1-3977_22-01-04_Annex_MR_A4.pdf (802.11n HT40) 1-3977_22-01-04_Annex_MR_A5.pdf (802.11ax HE20) 1-3977_22-01-04_Annex_MR_A6.pdf (802.11ax HE40)
Test setup	See chapter 7.3 setup A
Measurement uncertainty	See chapter 9

Limits:

FCC
8 dBm / 3 kHz (conducted)

Results:

antenna port 1	peak power spectral density / [dBm] @ 3 kHz		
	lowest channel	middle channel	highest channel
802.11b	-9.2	-8.5	-8.5
802.11g	-11.1	-11.0	-11.4
802.11n HT20	-12.1	-11.8	-11.7
802.11n HT40	-14.9	14.5	-14.2
802.11ax HE20	-13.0	-12.7	-12.7
802.11ax HE40	-16.2	-15.4	-15.2

antenna port 2	peak power spectral density / [dBm] @ 3 kHz		
	lowest channel	middle channel	highest channel
802.11b	-9.2	-8.6	-9.1
802.11g	-11.9	-11.1	-11.7
802.11n HT20	-12.0	-11.6	-11.8
802.11n HT40	-14.7	-14.6	-14.2
802.11ax HE20	-13.0	-12.7	-12.7
802.11ax HE40	-16.2	-15.4	-15.2

antenna port 3	peak power spectral density / [dBm] @ 3 kHz		
	lowest channel	middle channel	highest channel
802.11b	-9.1	-8.9	-8.9
802.11g	-12.1	-11.1	-11.5
802.11n HT20	-12.1	-11.5	-11.9
802.11n HT40	-14.0	-14.2	-14.6
802.11ax HE20	-13.3	-12.5	-13.2
802.11ax HE40	-14.7	-15.2	-15.2

antenna port 4	peak power spectral density / [dBm] @ 3 kHz		
	lowest channel	middle channel	highest channel
802.11b	-9.4	-9.3	-8.8
802.11g	-11.2	-11.3	-11.1
802.11n HT20	-12.1	-12.1	-11.6
802.11n HT40	-14.2	-14.2	-14.1
802.11ax HE20	-13.2	-13.0	-12.8
802.11ax HE40	-16.2	-15.7	-15.6

Sum of antenna ports 1, 2, 3 and 4	peak power spectral density / [dBm] @ 3 kHz		
	lowest channel	middle channel	highest channel
802.11b	-3.2	-2.8	-2.8
802.11g	-5.5	-5.1	-5.4
802.11n HT20	-6.1	-5.7	-5.7
802.11n HT40	-8.4	-8.4	-8.3
802.11ax HE20	-7.2	-6.8	-7.0
802.11ax HE40	-9.7	-9.6	-9.4

13.6 6 dB DTS bandwidth

Description:

Measurement of the 6 dB bandwidth of the modulated signal.

Measurement:

Measurement parameter	
According to DTS clause: 8.2	
Detector	Peak
Sweep time	Auto
Resolution bandwidth	100 kHz
Video bandwidth	500 kHz
Span	30 MHz / 50 MHz
Trace mode	Single count with 200 counts
External result file(s)	1-3977_22-01-04_Annex_MR_A1.pdf (802.11b) 1-3977_22-01-04_Annex_MR_A2.pdf (802.11g) 1-3977_22-01-04_Annex_MR_A3.pdf (802.11n HT20) 1-3977_22-01-04_Annex_MR_A4.pdf (802.11n HT40) 1-3977_22-01-04_Annex_MR_A5.pdf (802.11ax HE20) 1-3977_22-01-04_Annex_MR_A6.pdf (802.11ax HE40)
Test setup	See chapter 7.3 setup A
Measurement uncertainty	See chapter 9

Limits:

FCC
Systems using digital modulation techniques may operate in the 2400–2483.5 MHz band. The minimum 6 dB bandwidth shall be at least 500 kHz.

Results:

antenna port 1	6 dB DTS bandwidth / [kHz]		
	lowest channel	middle channel	highest channel
802.11b	7040	8032	8008
802.11g	15924	16044	15716
802.11n HT20	17020	17280	17132
802.11n HT40	35696	35632	35688
802.11ax HE20	18644	18860	18852
802.11ax HE40	37744	37888	36520

antenna port 2	6 dB DTS bandwidth / [kHz]		
	lowest channel	middle channel	highest channel
802.11b	8016	8012	8028
802.11g	15944	16304	16312
802.11n HT20	17296	17284	17540
802.11n HT40	35704	35064	35408
802.11ax HE20	18796	18812	18512
802.11ax HE40	37656	37552	37368

antenna port 3	6 dB DTS bandwidth / [kHz]		
	lowest channel	middle channel	highest channel
802.11b	8008	7536	7552
802.11g	16308	16308	16036
802.11n HT20	17292	17264	17556
802.11n HT40	35672	35448	35408
802.11ax HE20	18400	18492	18564
802.11ax HE40	36560	37320	37416

antenna port 4	6 dB DTS bandwidth / [kHz]		
	lowest channel	middle channel	highest channel
802.11b	8016	7552	8000
802.11g	16032	16300	15880
802.11n HT20	17140	17516	16888
802.11n HT40	35288	35408	35656
802.11ax HE20	18500	18648	18080
802.11ax HE40	37688	37344	36560

13.7 Occupied bandwidth – 20 dB bandwidth

Description:

Measurement of the 20 dB bandwidth of the modulated carrier.

Measurement:

Measurement parameter	
Detector	Peak
Sweep time	Auto
Resolution bandwidth	100 kHz
Video bandwidth	500 kHz
Span	30 MHz / 50 MHz
Trace mode	Single count with min. 200 counts
External result file(s)	1-3977_22-01-04_Annex_MR_A1.pdf (802.11b) 1-3977_22-01-04_Annex_MR_A2.pdf (802.11g) 1-3977_22-01-04_Annex_MR_A3.pdf (802.11n HT20) 1-3977_22-01-04_Annex_MR_A4.pdf (802.11n HT40) 1-3977_22-01-04_Annex_MR_A5.pdf (802.11ax HE20) 1-3977_22-01-04_Annex_MR_A6.pdf (802.11ax HE40)
Test setup	See chapter 7.3 setup A
Measurement uncertainty	See chapter 9

Usage:

FCC
The complete bandwidth has to be within the frequency range of the band.

Results:

antenna port 1	20 dB bandwidth / [MHz]		
	lowest channel	middle channel	highest channel
802.11b	14772	14468	14860
802.11g	18440	18728	18700
802.11n HT20	19804	19824	19900
802.11n HT40	39560	39744	39792
802.11ax HE20	20744	20764	20940
802.11ax HE40	40496	40656	40696

antenna port 2	20 dB bandwidth / [MHz]		
	lowest channel	middle channel	highest channel
802.11b	14440	14476	15236
802.11g	18844	18876	19712
802.11n HT20	19652	19636	20008
802.11n HT40	39280	39200	39240
802.11ax HE20	20784	20656	20868
802.11ax HE40	40496	40600	40584

antenna port 3	20 dB bandwidth / [MHz]		
	lowest channel	middle channel	highest channel
802.11b	14456	14752	15232
802.11g	18576	18604	19440
802.11n HT20	19620	19620	20072
802.11n HT40	39664	39704	39688
802.11ax HE20	20584	20716	20824
802.11ax HE40	40656	40616	40488

antenna port 4	20 dB bandwidth / [MHz]		
	lowest channel	middle channel	highest channel
802.11b	14796	14460	14764
802.11g	18420	18224	18404
802.11n HT20	19708	19560	19472
802.11n HT40	39336	39288	39056
802.11ax HE20	20692	20696	20868
802.11ax HE40	40672	40552	40608

13.8 Band edge compliance radiated

Description:

Measurement of the radiated band edge compliance. The EUT is turned in the position that results in the maximum level at the band edge. Then a sweep over the corresponding restricted band is performed. The EUT is set to the lowest channel for the lower restricted band and to the highest channel for the upper restricted band. Measurement distance is 3 meter.

Measurement:

	Measurement parameter for peak measurements	Measurement parameter for average measurements
		According to DTS clause: 8.7.3
Detector	Peak	RMS
Sweep time	Auto	Auto
Resolution bandwidth	1 MHz	100 kHz
Video bandwidth	3 MHz	300 kHz
Span	50 MHz	2 MHz
Trace mode	Max. hold	RMS Average over 101 sweeps
Analyzer function	-/-	Band power function (Compute the power by integrating the spectrum over 1 MHz)
Test setup	See chapter 7.2 setup A	
Measurement uncertainty	See chapter 9	

Limits:

FCC
74 dB μ V/m @ 3 m (Peak) 54 dB μ V/m @ 3 m (AVG)

Results:

Scenario	Band edge compliance radiated [dB μ V/m]
Mode	802.11b
Lower restricted band	38.8 dB μ V/m AVG 52.2 dB μ V/m Peak
Upper restricted band	39.5 dB μ V/m AVG 53.4 dB μ V/m Peak
Mode	802.11g
Lower restricted band	47.8 dB μ V/m AVG 65.6 dB μ V/m Peak
Upper restricted band	49.9 dB μ V/m AVG 67.3 dB μ V/m Peak
Mode	802.11n HT20
Lower restricted band	52.9 dB μ V/m AVG 69.4 dB μ V/m Peak
Upper restricted band	49.6 dB μ V/m AVG 65.7 dB μ V/m Peak
Mode	802.11n HT40
Lower restricted band	43.4 dB μ V/m AVG 59.5 dB μ V/m Peak
Upper restricted band	50.5 dB μ V/m AVG 65.7 dB μ V/m Peak
Mode	802.11ax HE20
Lower restricted band	52.9 dB μ V/m AVG 70.2 dB μ V/m Peak
Upper restricted band	53.2 dB μ V/m AVG 70.7 dB μ V/m Peak
Mode	802.11ax HE40
Lower restricted band	44.2 dB μ V/m AVG 59.3 dB μ V/m Peak
Upper restricted band	49.4 dB μ V/m AVG 65.0 dB μ V/m Peak

13.9 Spurious emissions conducted

Description:

Measurement of the conducted spurious emissions in transmit mode. The measurement is performed at the lowest; the middle and the highest channel.

Measurement:

Measurement parameter	
Detector	Peak
Sweep time	Auto
Resolution bandwidth	100 kHz
Video bandwidth	500 kHz
Span	9 kHz to 25 GHz
Trace mode	Max Hold
External result file(s)	1-3977_22-01-04_Annex_MR_A1.pdf (802.11b) 1-3977_22-01-04_Annex_MR_A2.pdf (802.11g) 1-3977_22-01-04_Annex_MR_A3.pdf (802.11n HT20) 1-3977_22-01-04_Annex_MR_A4.pdf (802.11n HT40) 1-3977_22-01-04_Annex_MR_A5.pdf (802.11ax HE20) 1-3977_22-01-04_Annex_MR_A6.pdf (802.11ax HE40)
Test setup	See chapter 7.3 setup A
Measurement uncertainty	See chapter 9

Limits:

FCC
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required

Results: 802.11b; antenna port 1

TX spurious emissions conducted					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
Lowest channel		13.8	30 dBm		Operating frequency
All detected emissions are below the 30 dBc criteria.			-30 dBc (average)		compliant
Middle channel		14.4	30 dBm		Operating frequency
All detected emissions are below the 30 dBc criteria.			-30 dBc (average)		compliant
Highest channel		15.5	30 dBm		Operating frequency
All detected emissions are below the 30 dBc criteria.			-30 dBc (average)		compliant

Results: 802.11b; antenna port 2

TX spurious emissions conducted					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
Lowest channel		15.3	30 dBm		Operating frequency
All detected emissions are below the 30 dBc criteria.			-30 dBc (average)		compliant
Middle channel		14.8	30 dBm		Operating frequency
All detected emissions are below the 30 dBc criteria.			-30 dBc (average)		compliant
Highest channel		14.6	30 dBm		Operating frequency
All detected emissions are below the 30 dBc criteria.			-30 dBc (average)		compliant

Results: 802.11b; antenna port 3

TX spurious emissions conducted					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
Lowest channel		14.4	30 dBm		Operating frequency
All detected emissions are below the 30 dBc criteria.			-30 dBc (average)		compliant
Middle channel		14.6	30 dBm		Operating frequency
All detected emissions are below the 30 dBc criteria.			-30 dBc (average)		compliant
Highest channel		14.4	30 dBm		Operating frequency
All detected emissions are below the 30 dBc criteria.			-30 dBc (average)		compliant

Results: 802.11b; antenna port 4

TX spurious emissions conducted					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
Lowest channel		15.1	30 dBm		Operating frequency
All detected emissions are below the 30 dBc criteria.			-30 dBc (average)		compliant
Middle channel		14.8	30 dBm		Operating frequency
All detected emissions are below the 30 dBc criteria.			-30 dBc (average)		compliant
Highest channel		14.7	30 dBm		Operating frequency
All detected emissions are below the 30 dBc criteria.			-30 dBc (average)		compliant

Results: 802.11g; antenna port 1

TX spurious emissions conducted					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
Lowest channel		11.6	30 dBm		Operating frequency
All detected emissions are below the 30 dBc criteria.			-30 dBc (average)		compliant
Middle channel		12.4	30 dBm		Operating frequency
All detected emissions are below the 30 dBc criteria.			-30 dBc (average)		compliant
Highest channel		11.8	30 dBm		Operating frequency
All detected emissions are below the 30 dBc criteria.			-30 dBc (average)		compliant

Results: 802.11g; antenna port 2

TX spurious emissions conducted					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
Lowest channel		11.5	30 dBm		Operating frequency
All detected emissions are below the 30 dBc criteria.			-30 dBc (average)		compliant
Middle channel		11.8	30 dBm		Operating frequency
All detected emissions are below the 30 dBc criteria.			-30 dBc (average)		compliant
Highest channel		11.9	30 dBm		Operating frequency
All detected emissions are below the 30 dBc criteria.			-30 dBc (average)		compliant

Results: 802.11g; antenna port 3

TX spurious emissions conducted					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
Lowest channel		12.0	30 dBm		Operating frequency
All detected emissions are below the 30 dBc criteria.			-30 dBc (average)		compliant
Middle channel		12.0	30 dBm		Operating frequency
All detected emissions are below the 30 dBc criteria.			-30 dBc (average)		compliant
Highest channel		11.9	30 dBm		Operating frequency
All detected emissions are below the 30 dBc criteria.			-30 dBc (average)		compliant

Results: 802.11g; antenna port 4

TX spurious emissions conducted					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
Lowest channel		11.9	30 dBm		Operating frequency
All detected emissions are below the 30 dBc criteria.			-30 dBc (average)		compliant
Middle channel		11.5	30 dBm		Operating frequency
All detected emissions are below the 30 dBc criteria.			-30 dBc (average)		compliant
Highest channel		12.1	30 dBm		Operating frequency
All detected emissions are below the 30 dBc criteria.			-30 dBc (average)		compliant

Results: 802.11n HT20; antenna port 1

TX spurious emissions conducted					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
Lowest channel		12.5	30 dBm		Operating frequency
All detected emissions are below the 30 dBc criteria.			-30 dBc (average)		compliant
Middle channel		9.9	30 dBm		Operating frequency
All detected emissions are below the 30 dBc criteria.			-30 dBc (average)		compliant
Highest channel		10.3	30 dBm		Operating frequency
All detected emissions are below the 30 dBc criteria.			-30 dBc (average)		compliant

Results: 802.11n HT20; antenna port 2

TX spurious emissions conducted					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
Lowest channel		12.5	30 dBm		Operating frequency
All detected emissions are below the 30 dBc criteria.			-30 dBc (average)		compliant
Middle channel		12.4	30 dBm		Operating frequency
All detected emissions are below the 30 dBc criteria.			-30 dBc (average)		compliant
Highest channel		11.6	30 dBm		Operating frequency
All detected emissions are below the 30 dBc criteria.			-30 dBc (average)		compliant

Results: 802.11n HT20; antenna port 3

TX spurious emissions conducted					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
Lowest channel		11.1	30 dBm		Operating frequency
All detected emissions are below the 30 dBc criteria.			-30 dBc (average)		compliant
Middle channel		9.6	30 dBm		Operating frequency
All detected emissions are below the 30 dBc criteria.			-30 dBc (average)		compliant
Highest channel		11.4	30 dBm		Operating frequency
All detected emissions are below the 30 dBc criteria.			-30 dBc (average)		compliant

Results: 802.11n HT20; antenna port 4

TX spurious emissions conducted					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
Lowest channel		12.4	30 dBm		Operating frequency
All detected emissions are below the 30 dBc criteria.			-30 dBc (average)		compliant
Middle channel		10.9	30 dBm		Operating frequency
All detected emissions are below the 30 dBc criteria.			-30 dBc (average)		compliant
Highest channel		12.0	30 dBm		Operating frequency
All detected emissions are below the 30 dBc criteria.			-30 dBc (average)		compliant

Results: 802.11n HT40; antenna port 1

TX spurious emissions conducted					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
Lowest channel		8.3	30 dBm		Operating frequency
All detected emissions are below the 30 dBc criteria.			-30 dBc (average)		compliant
Middle channel		8.8	30 dBm		Operating frequency
All detected emissions are below the 30 dBc criteria.			-30 dBc (average)		compliant
Highest channel		8.9	30 dBm		Operating frequency
All detected emissions are below the 30 dBc criteria.			-30 dBc (average)		compliant

Results: 802.11n HT40; antenna port 2

TX spurious emissions conducted					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
Lowest channel		9.2	30 dBm		Operating frequency
All detected emissions are below the 30 dBc criteria.			-30 dBc (average)		compliant
Middle channel		8.1	30 dBm		Operating frequency
All detected emissions are below the 30 dBc criteria.			-30 dBc (average)		compliant
Highest channel		8.5	30 dBm		Operating frequency
All detected emissions are below the 30 dBc criteria.			-30 dBc (average)		compliant

Results: 802.11n HT40; antenna port 3

TX spurious emissions conducted					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
Lowest channel		9.5	30 dBm		Operating frequency
All detected emissions are below the 30 dBc criteria.			-30 dBc (average)		compliant
Middle channel		9.0	30 dBm		Operating frequency
All detected emissions are below the 30 dBc criteria.			-30 dBc (average)		compliant
Highest channel		9.4	30 dBm		Operating frequency
All detected emissions are below the 30 dBc criteria.			-30 dBc (average)		compliant

Results: 802.11n HT40; antenna port 4

TX spurious emissions conducted					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
Lowest channel		9.2	30 dBm		Operating frequency
All detected emissions are below the 30 dBc criteria.			-30 dBc (average)		compliant
Middle channel		9.6	30 dBm		Operating frequency
All detected emissions are below the 30 dBc criteria.			-30 dBc (average)		compliant
Highest channel		9.9	30 dBm		Operating frequency
All detected emissions are below the 30 dBc criteria.			-30 dBc (average)		compliant

Results: 802.11ax HE20; antenna port 1

TX spurious emissions conducted					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
Lowest channel		11.4	30 dBm		Operating frequency
All detected emissions are below the 30 dBc criteria.			-30 dBc (average)		compliant
Middle channel		11.5	30 dBm		Operating frequency
All detected emissions are below the 30 dBc criteria.			-30 dBc (average)		compliant
Highest channel		10.8	30 dBm		Operating frequency
All detected emissions are below the 30 dBc criteria.			-30 dBc (average)		compliant

Results: 802.11ax HE20; antenna port 2

TX spurious emissions conducted					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
Lowest channel		11.3	30 dBm		Operating frequency
All detected emissions are below the 30 dBc criteria.			-30 dBc (average)		compliant
Middle channel		11.8	30 dBm		Operating frequency
All detected emissions are below the 30 dBc criteria.			-30 dBc (average)		compliant
Highest channel		12.7	30 dBm		Operating frequency
All detected emissions are below the 30 dBc criteria.			-30 dBc (average)		compliant

Results: 802.11ax HE20; antenna port 3

TX spurious emissions conducted					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
Lowest channel		11.0	30 dBm		Operating frequency
All detected emissions are below the 30 dBc criteria.			-30 dBc (average)		compliant
Middle channel		12.5	30 dBm		Operating frequency
All detected emissions are below the 30 dBc criteria.			-30 dBc (average)		compliant
Highest channel		12.4	30 dBm		Operating frequency
All detected emissions are below the 30 dBc criteria.			-30 dBc (average)		compliant

Results: 802.11ax HE20; antenna port 4

TX spurious emissions conducted					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
Lowest channel		11.4	30 dBm		Operating frequency
All detected emissions are below the 30 dBc criteria.			-30 dBc (average)		compliant
Middle channel		9.7	30 dBm		Operating frequency
All detected emissions are below the 30 dBc criteria.			-30 dBc (average)		compliant
Highest channel		10.7	30 dBm		Operating frequency
All detected emissions are below the 30 dBc criteria.			-30 dBc (average)		compliant

Results: 802.11ax HE40; antenna port 1

TX spurious emissions conducted					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
Lowest channel		9.1	30 dBm		Operating frequency
All detected emissions are below the 30 dBc criteria.			-30 dBc (average)		compliant
Middle channel		9.7	30 dBm		Operating frequency
All detected emissions are below the 30 dBc criteria.			-30 dBc (average)		compliant
Highest channel		9.3	30 dBm		Operating frequency
All detected emissions are below the 30 dBc criteria.			-30 dBc (average)		compliant

Results: 802.11ax HE40; antenna port 2

TX spurious emissions conducted					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
Lowest channel		9.7	30 dBm		Operating frequency
All detected emissions are below the 30 dBc criteria.			-30 dBc (average)		compliant
Middle channel		9.1	30 dBm		Operating frequency
All detected emissions are below the 30 dBc criteria.			-30 dBc (average)		compliant
Highest channel		7.6	30 dBm		Operating frequency
All detected emissions are below the 30 dBc criteria.			-30 dBc (average)		compliant

Results: 802.11ax HE40; antenna port 3

TX spurious emissions conducted					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
Lowest channel		8.6	30 dBm		Operating frequency
All detected emissions are below the 30 dBc criteria.			-30 dBc (average)		compliant
Middle channel		9.8	30 dBm		Operating frequency
All detected emissions are below the 30 dBc criteria.			-30 dBc (average)		compliant
Highest channel		9.4	30 dBm		Operating frequency
All detected emissions are below the 30 dBc criteria.			-30 dBc (average)		compliant

Results: 802.11ax HE40; antenna port 4

TX spurious emissions conducted					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
Lowest channel		9.8	30 dBm		Operating frequency
All detected emissions are below the 30 dBc criteria.			-30 dBc (average)		compliant
Middle channel		8.9	30 dBm		Operating frequency
All detected emissions are below the 30 dBc criteria.			-30 dBc (average)		compliant
Highest channel		9.6	30 dBm		Operating frequency
All detected emissions are below the 30 dBc criteria.			-30 dBc (average)		compliant

13.10 Spurious emissions radiated below 30 MHz

Description:

Measurement of the radiated spurious emissions in transmit mode below 30 MHz. The limits are recalculated to a measurement distance of 3 m with 40 dB/decade according CFR Part 2.

Measurement:

Measurement parameter	
Detector	Peak / Quasi Peak
Sweep time	Auto
Resolution bandwidth	F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz
Video bandwidth	F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz
Span	9 kHz to 30 MHz
Trace mode	Max Hold
Measured modulation	<input checked="" type="checkbox"/> 802.11b <input checked="" type="checkbox"/> 802.11g <input type="checkbox"/> 802.11n HT20 <input type="checkbox"/> 802.11n HT40 <input type="checkbox"/> 802.11ax HE20 <input checked="" type="checkbox"/> 802.11ax HE40
Test setup	See chapter 7.2 setup C
Measurement uncertainty	See chapter 9

Limits:


FCC		
Frequency / MHz	Field Strength / (dB μ V / m)	Measurement distance / m
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30

Results:


TX spurious emissions radiated < 30 MHz / (dB μ V / m) @ 3 m		
Frequency / MHz	Detector	Level / (dB μ V / m)
All detected peaks are more than 20 dB below the limit.		

Plots: 802.11b


Plot 1: 9 kHz to 30 MHz, lowest channel

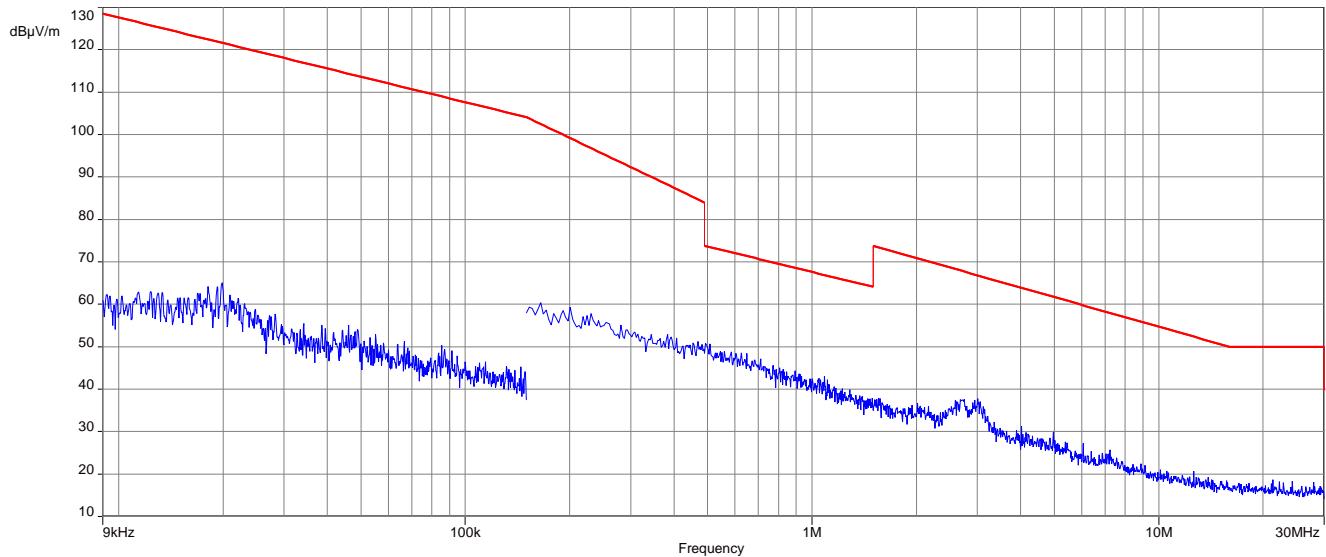

Plot 2: 9 kHz to 30 MHz, middle channel

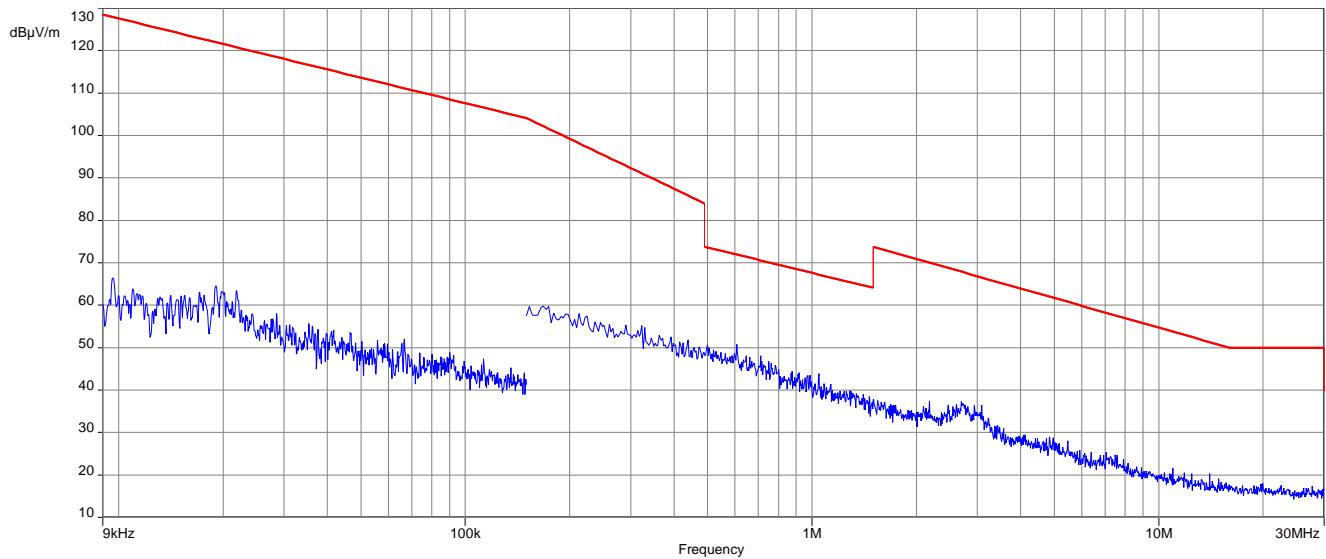


Plot 3: 9 kHz to 30 MHz, highest channel

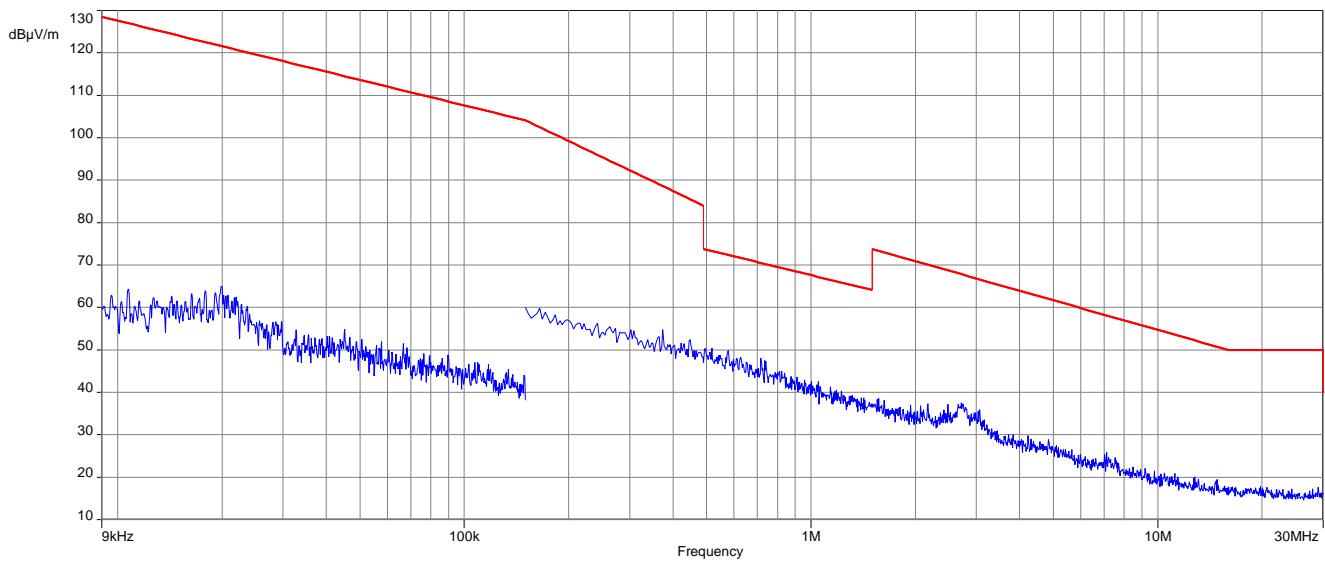


Plots: 802.11g


Plot 1: 9 kHz to 30 MHz, lowest channel

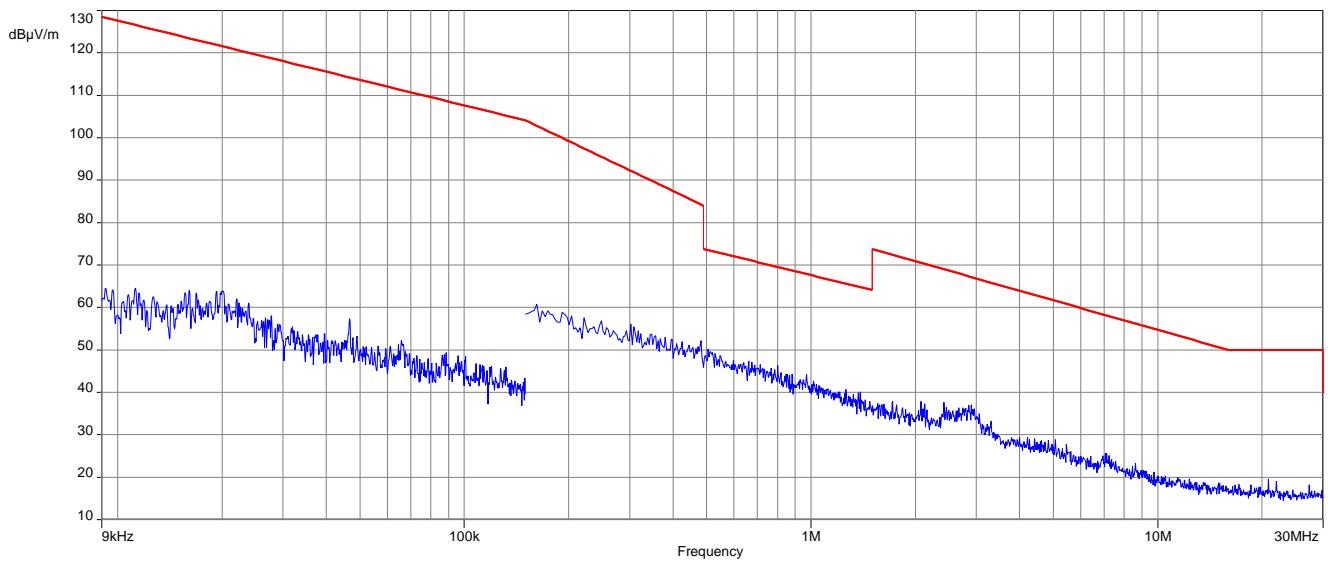

Plot 2: 9 kHz to 30 MHz, middle channel

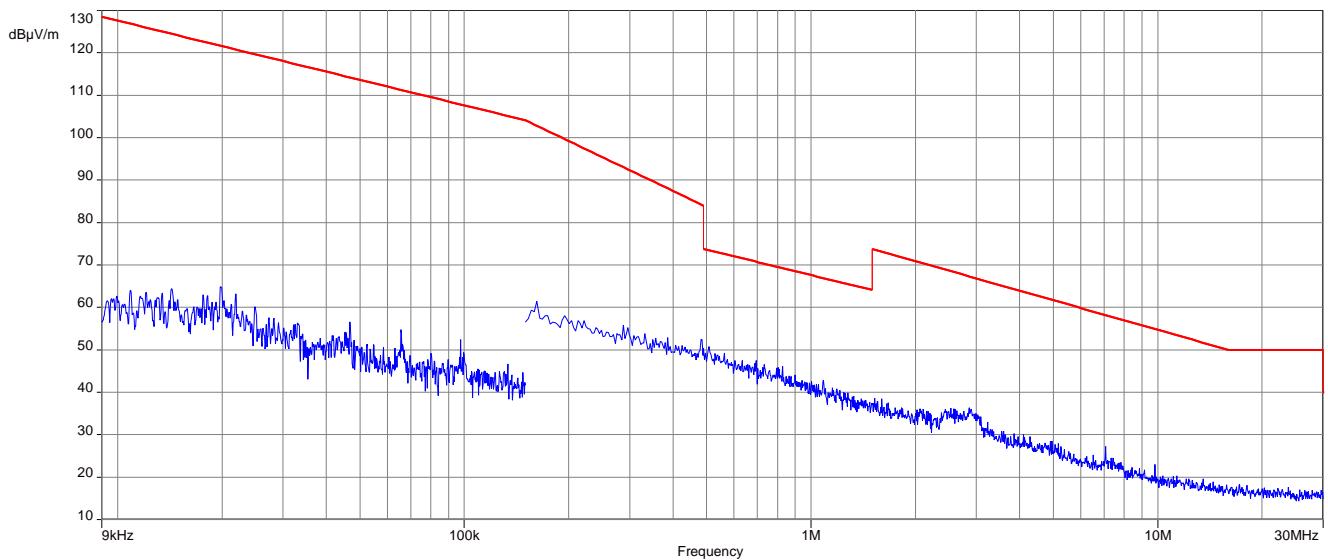


Plot 3: 9 kHz to 30 MHz, highest channel

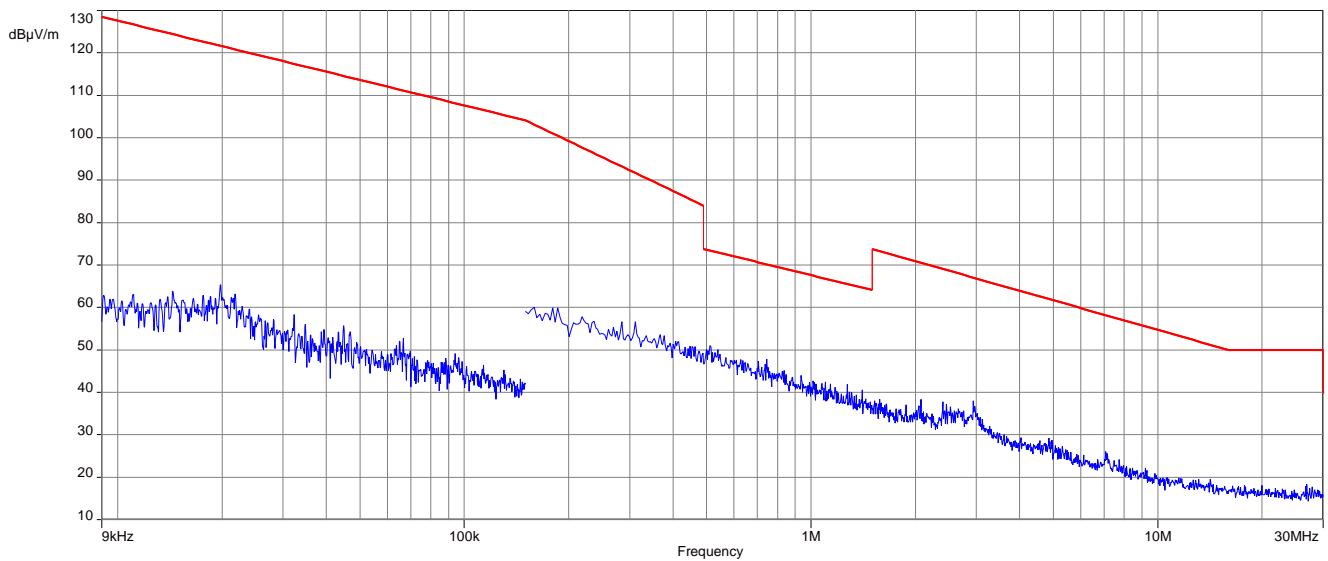


Plots: 802.11ax HE40


Plot 1: 9 kHz to 30 MHz, lowest channel

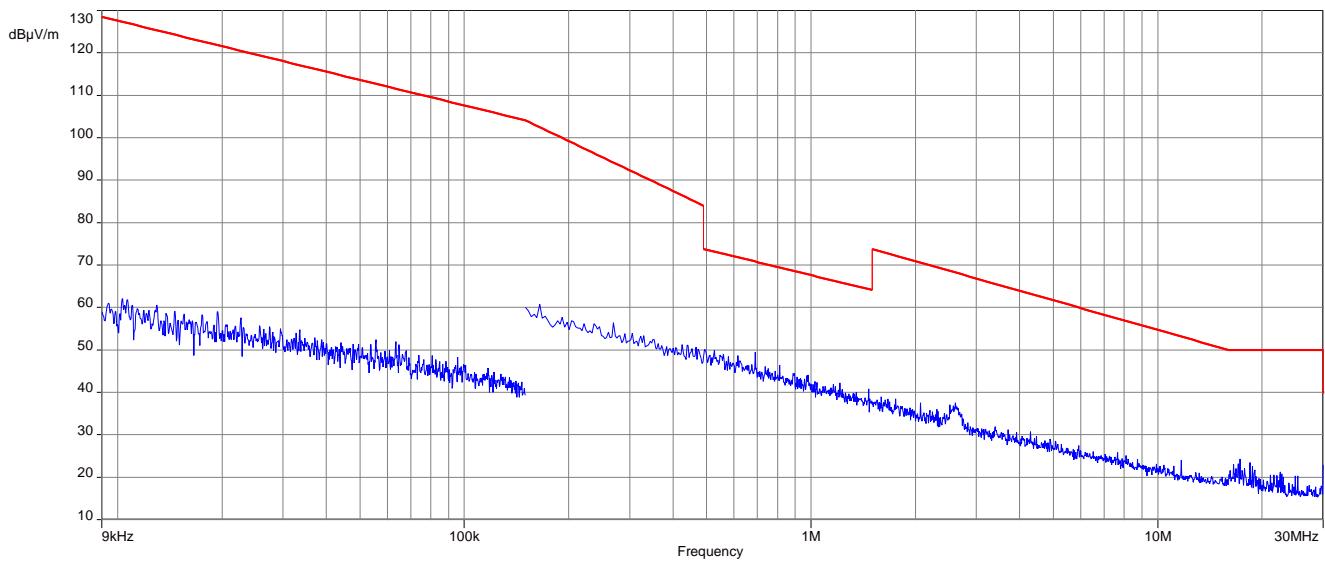

Plot 2: 9 kHz to 30 MHz, middle channel

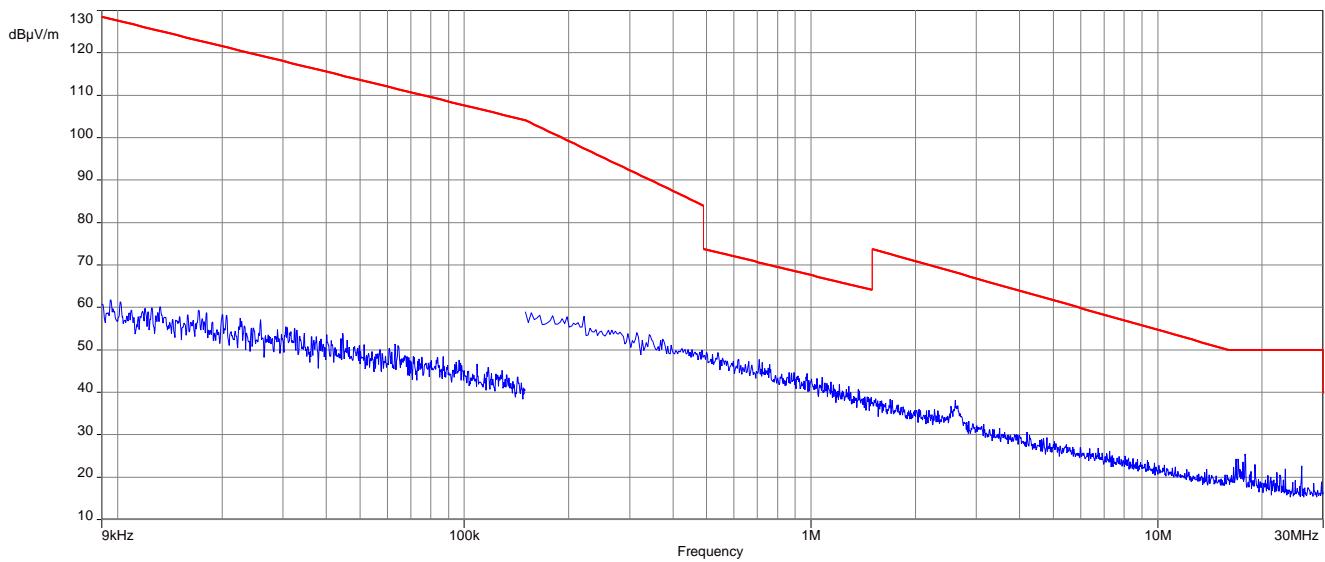

Plot 3: 9 kHz to 30 MHz, highest channel

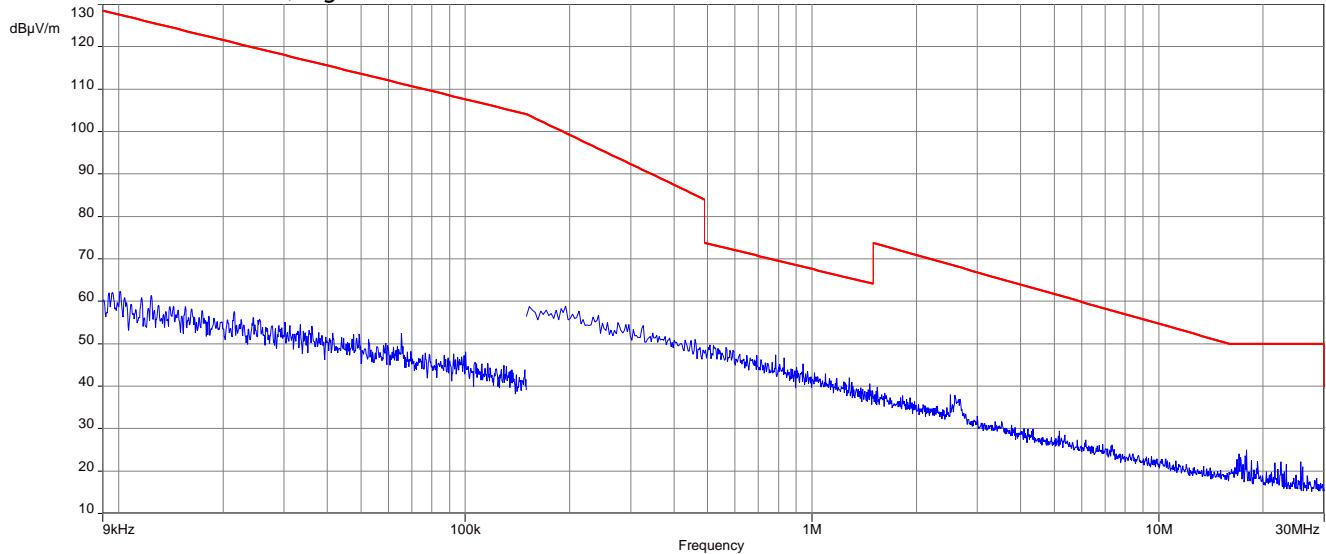

13.11 Spurious emissions radiated 30 MHz to 1 GHz

Description:

Measurement of the radiated spurious emissions and cabinet radiations below 1 GHz.

Measurement:


Measurement parameter	
Detector	Peak / Quasi Peak
Sweep time	Auto
Resolution bandwidth	120 kHz
Video bandwidth	3 x RBW
Span	30 MHz to 1 GHz
Trace mode	Max Hold
Test setup	See chapter 7.1 setup A
Measurement uncertainty	See chapter 9

Limits:

FCC		
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).		
Frequency / MHz	Field Strength / (dB μ V / m)	Measurement distance / m
30 – 88	30.0	10
88 – 216	33.5	10
216 – 960	36.0	10


Plot:

Plot 1: 30 MHz to 1 GHz, vertical & horizontal polarization, 802.11b, channel 6, valid for all channels of 802.11b

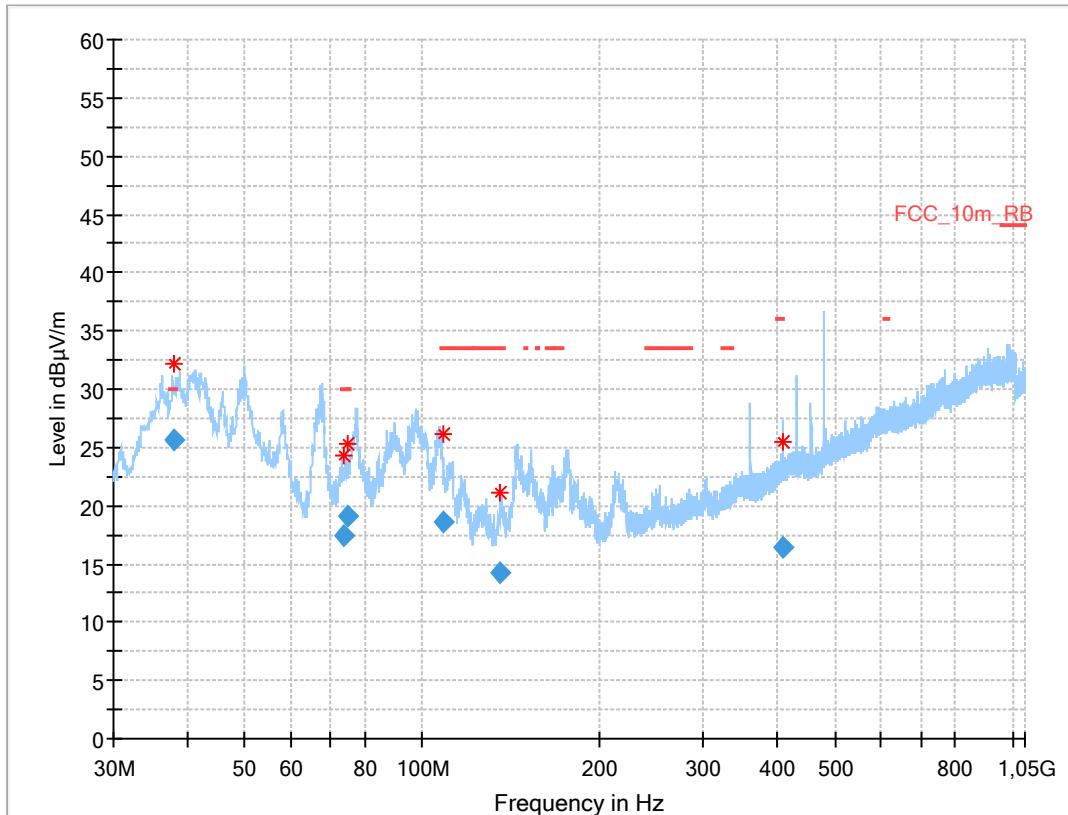**Final results:**

Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
37.931	25.69	30.0	4.3	1000	120.0	220.0	V	206	14
73.687	17.48	30.0	12.5	1000	120.0	207.0	V	180	8
74.657	19.08	---	---	1000	120.0	220.0	V	132	8
108.528	18.64	33.5	14.9	1000	120.0	109.0	V	-40	13
135.667	14.17	33.5	19.3	1000	120.0	200.0	V	309	10
408.023	16.44	36.0	19.6	1000	120.0	200.0	H	79	18


Plot 2: 30 MHz to 1 GHz, vertical & horizontal polarization, 802.11n HT20, channel 6, valid for all channels of all 20 MHz modes

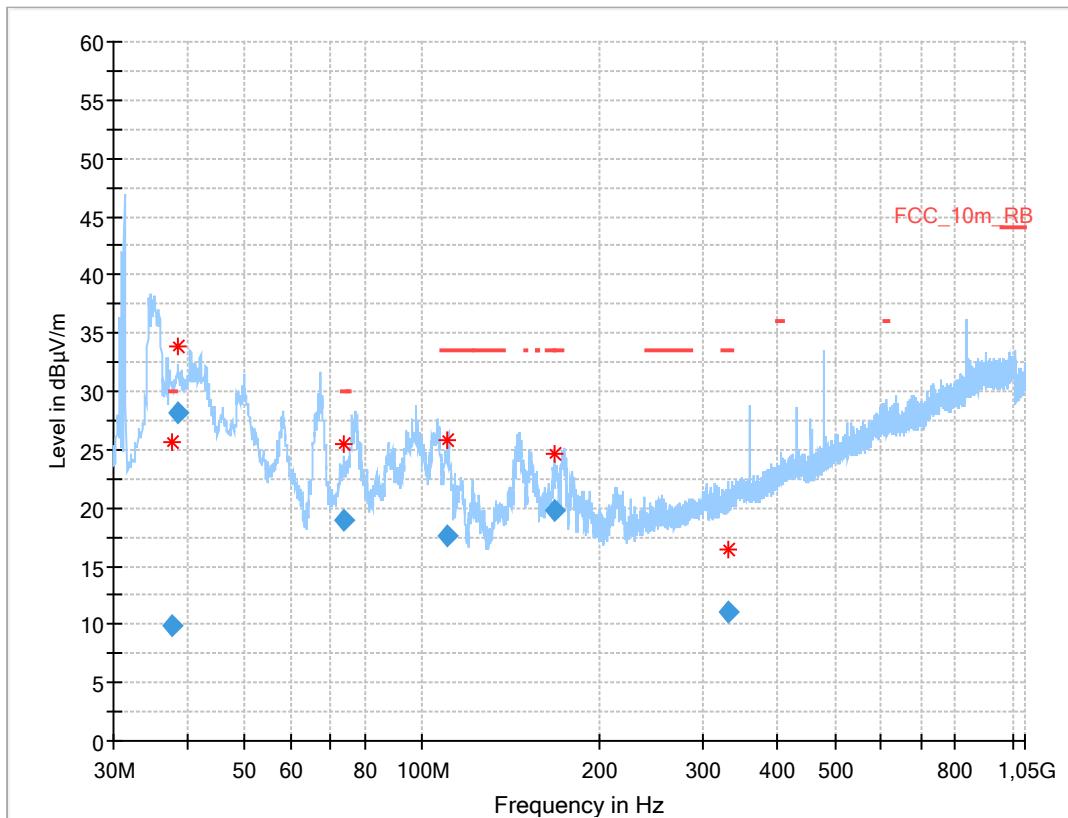

Final results:

Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
37.657	9.89	30.0	20.1	1000	120.0	128.0	H	58	14
38.526	28.17	---	---	1000	120.0	149.0	V	223	14
73.503	18.99	30.0	11.0	1000	120.0	370.0	V	90	8
110.237	17.65	33.5	15.9	1000	120.0	116.0	V	336	13
167.364	19.77	---	---	1000	120.0	100.0	V	45	11
330.292	11.06	33.5	22.4	1000	120.0	400.0	V	-45	16

Plot 3: 30 MHz to 1 GHz, vertical & horizontal polarization, 802.11ax HE40, channel 6, valid for all channels of all 40 MHz modes

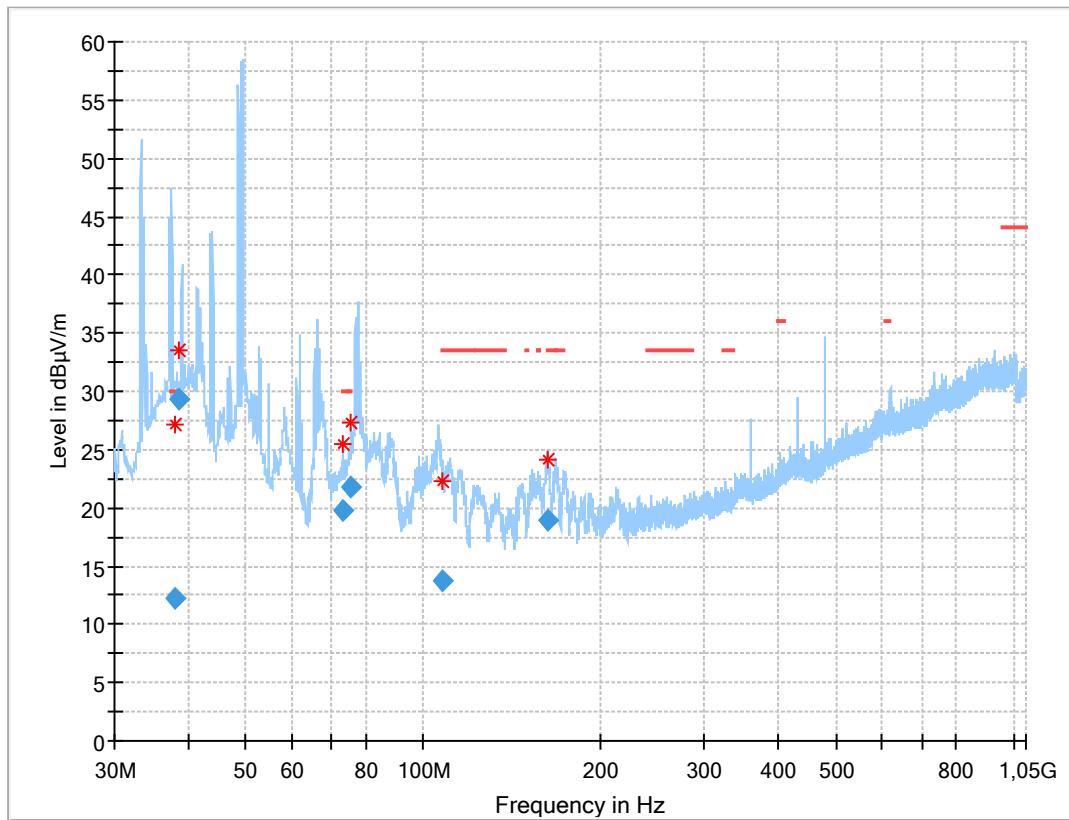

Final results:

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
38.128	12.26	30.0	17.7	1000	120.0	132.0	H	10	14
38.542	29.25	---	---	1000	120.0	203.0	V	139	14
73.223	19.76	30.0	10.2	1000	120.0	231.0	V	14	8
75.592	21.76	---	---	1000	120.0	314.0	V	75	8
107.534	13.81	---	---	1000	120.0	281.0	V	105	14
162.074	18.94	33.5	14.6	1000	120.0	104.0	V	120	11

13.12 Spurious emissions radiated above 1 GHz

Description:

Measurement of the radiated spurious emissions above 1 GHz in transmit mode.

Measurement:

Measurement parameter	
Detector	Peak / RMS
Sweep time	Auto
Resolution bandwidth	1 MHz
Video bandwidth	3 x RBW
Span	1 GHz to 26 GHz
Trace mode	Max Hold
Measured modulation	<input checked="" type="checkbox"/> 802.11b <input checked="" type="checkbox"/> 802.11g <input type="checkbox"/> 802.11n HT20 <input type="checkbox"/> 802.11n HT40 <input type="checkbox"/> 802.11ax HE20 <input checked="" type="checkbox"/> 802.11ax HE40
Test setup	See chapter 7.2 setup B & 7.4 setup A
Measurement uncertainty	See chapter 9

Limits:

FCC		
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).		
Frequency / MHz	Field Strength / (dB μ V / m)	Measurement distance / m
Above 960	54.0 (AVG)	3
	74.0 (peak)	

Results: 802.11b



TX spurious emissions radiated / dB μ V/m @ 3 m								
lowest channel			middle channel			highest channel		
f / MHz	Detector	Level / dB μ V/m	f / MHz	Detector	Level / dB μ V/m	f / MHz	Detector	Level / dB μ V/m
4824	Peak	53.2	4874	Peak	57.8	4924	Peak	56.0
	AVG	49.9		AVG	49.6		AVG	53.4
-/-	Peak	-/-	-/-	Peak	-/-	7384	Peak	50.9
	AVG	-/-		AVG	-/-		AVG	46.8

Results: 802.11g


TX spurious emissions radiated / dB μ V/m @ 3 m								
lowest channel			middle channel			highest channel		
f / MHz	Detector	Level / dB μ V/m	f / MHz	Detector	Level / dB μ V/m	f / MHz	Detector	Level / dB μ V/m
-/-	Peak	-/-	4874	Peak	50.7	4918	Peak	49.6
	AVG	-/-		AVG	41.9		AVG	40.2
-/-	Peak	-/-	-/-	Peak	-/-	7385	Peak	53.0
	AVG	-/-		AVG	-/-		AVG	43.3

Results: 802.11ax HE40


TX spurious emissions radiated / dB μ V/m @ 3 m								
lowest channel			middle channel			highest channel		
f / MHz	Detector	Level / dB μ V/m	f / MHz	Detector	Level / dB μ V/m	f / MHz	Detector	Level / dB μ V/m
1320	Peak	42.0	1320	Peak	42.0	4915	Peak	56.6
	AVG	25.2		AVG	25.2		AVG	40.7
-/-	Peak	-/-	4900	Peak	54.9	-/-	Peak	-/-
	AVG	-/-		AVG	38.8		AVG	-/-

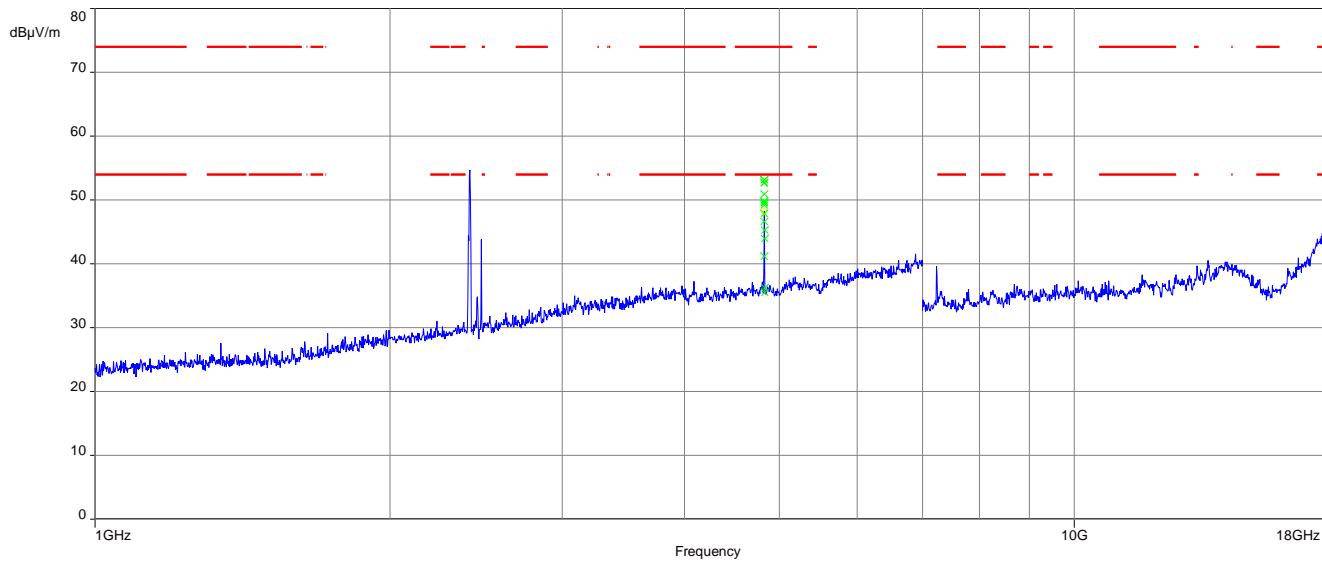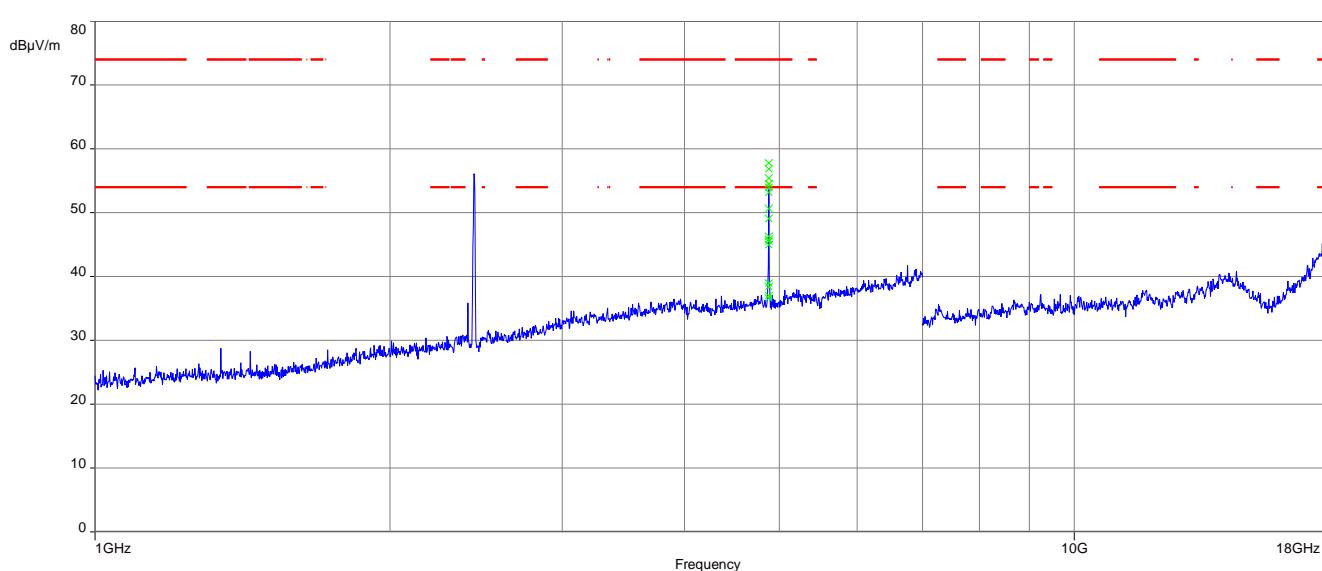Plots: 802.11b**Plot 1: Lowest channel, 1 GHz to 18 GHz, vertical & horizontal polarization****Plot 2: Middle channel, 1 GHz to 18 GHz, vertical & horizontal polarization**


Plot 3: Highest channel, 1 GHz to 18 GHz, vertical & horizontal polarization

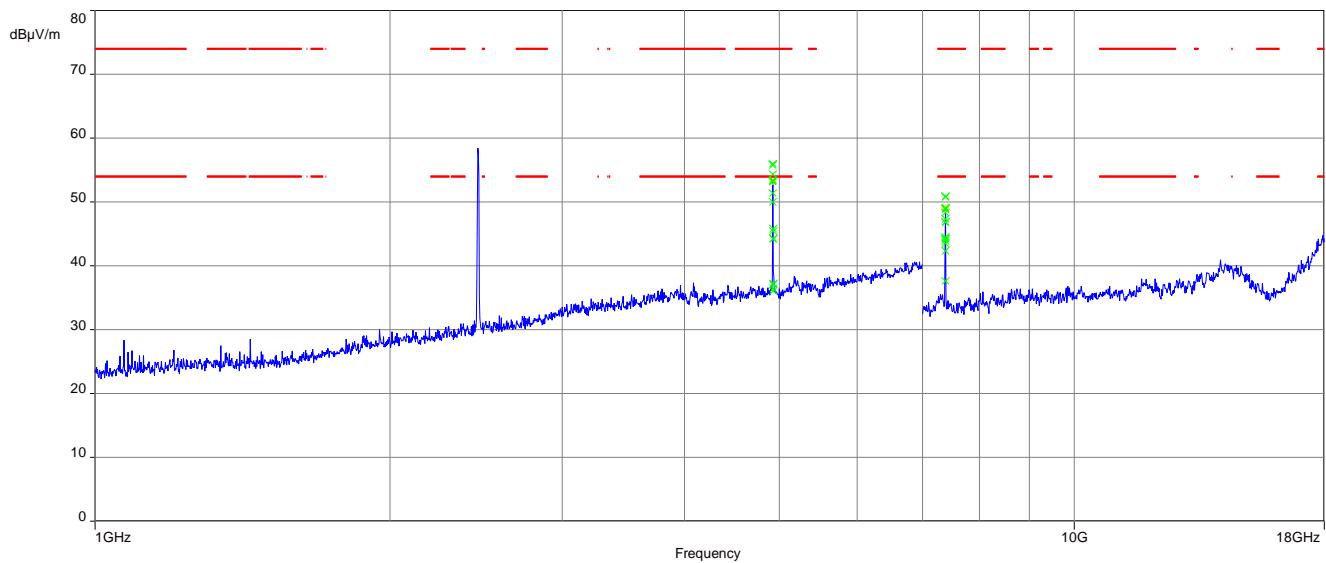

The carrier signal is notched with a 2.4 GHz band rejection filter.

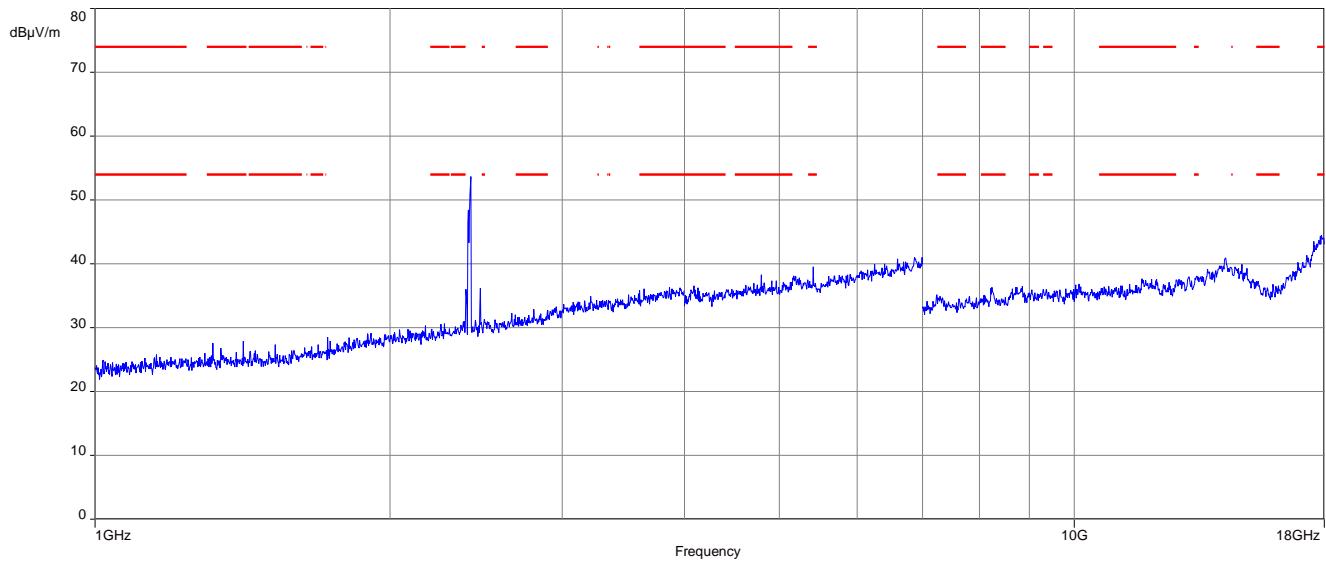
Plots: 802.11g**Plot 1: Lowest channel, 1 GHz to 18 GHz, vertical & horizontal polarization**

The carrier signal is notched with a 2.4 GHz band rejection filter.


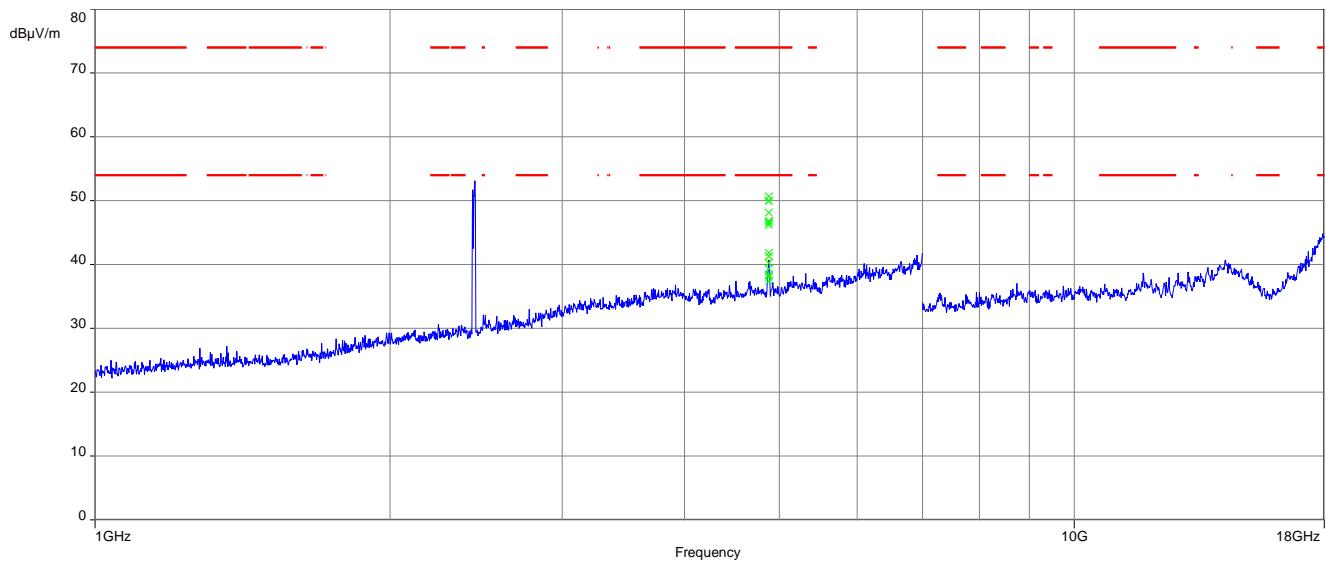
Plot 2: Middle channel, 1 GHz to 18 GHz, vertical & horizontal polarization



The carrier signal is notched with a 2.4 GHz band rejection filter.

Plot 3: Highest channel, 1 GHz to 18 GHz, vertical & horizontal polarization

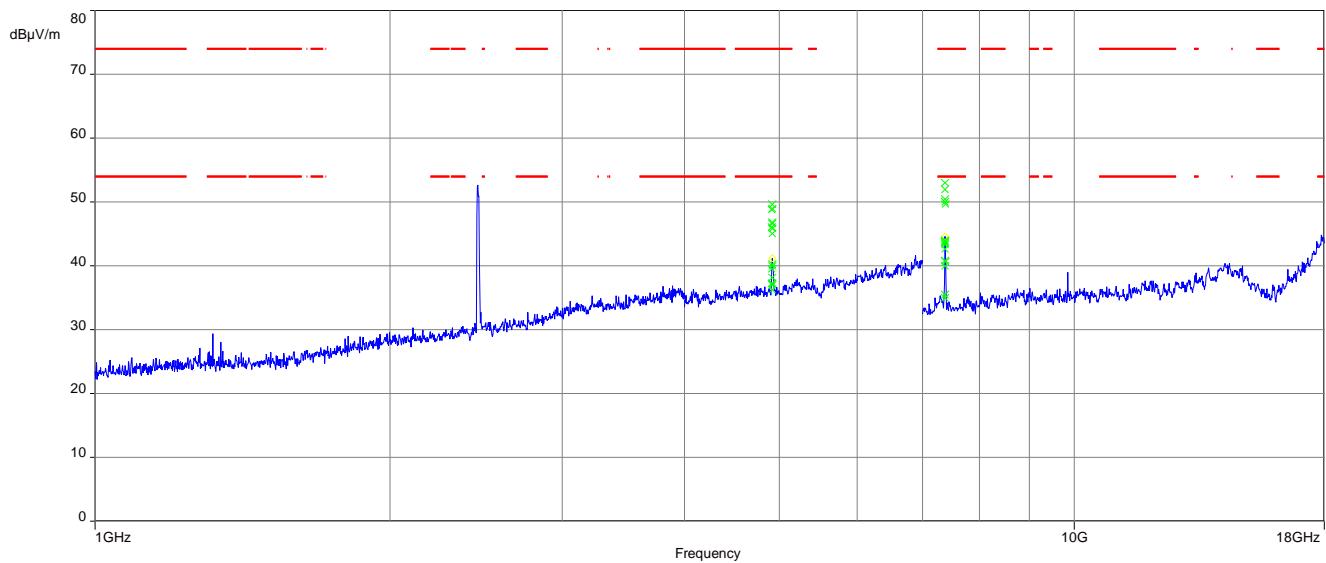

The carrier signal is notched with a 2.4 GHz band rejection filter.

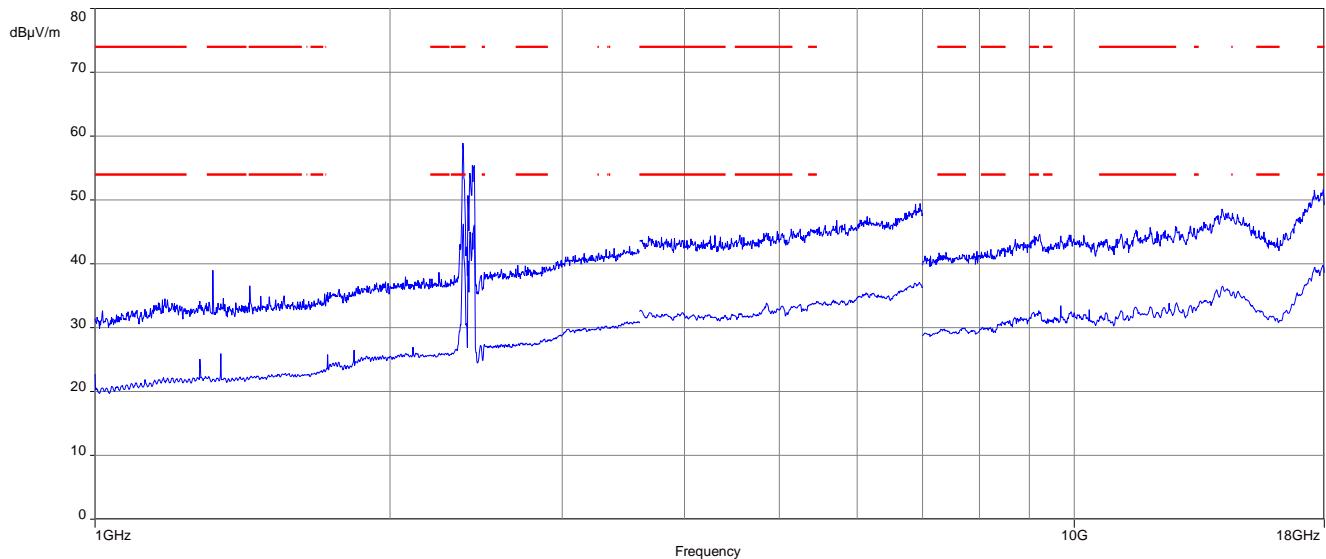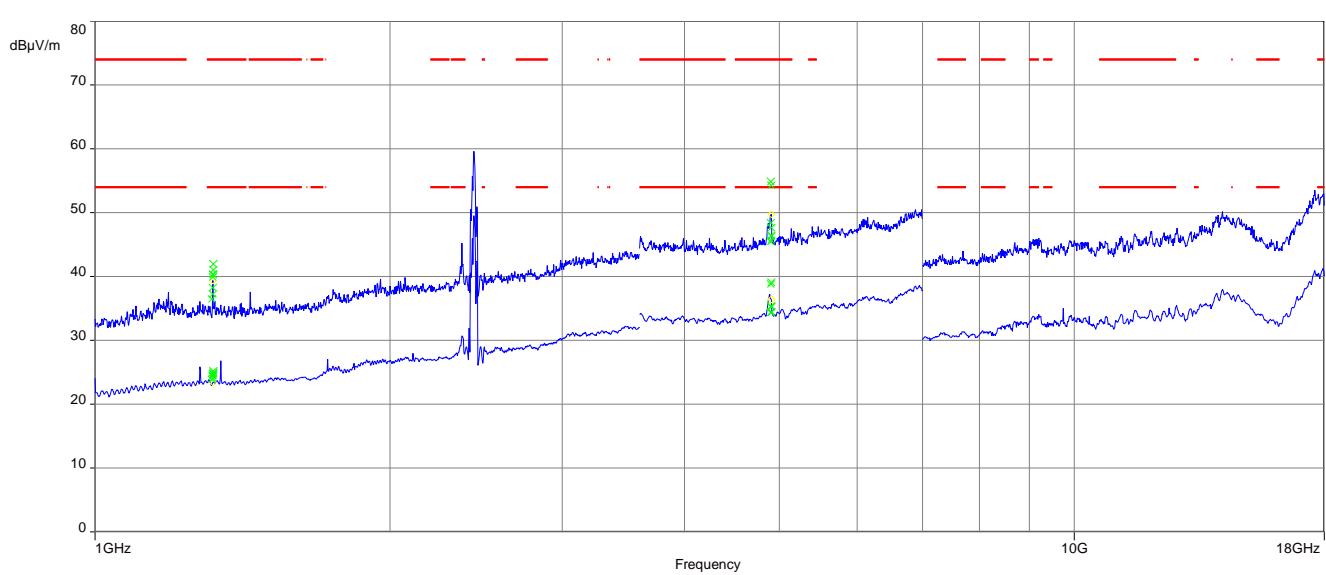Plots: 802.11ax HE40**Plot 1: Lowest channel, 1 GHz to 18 GHz, vertical & horizontal polarization****Plot 2: Middle channel, 1 GHz to 18 GHz, vertical & horizontal polarization**

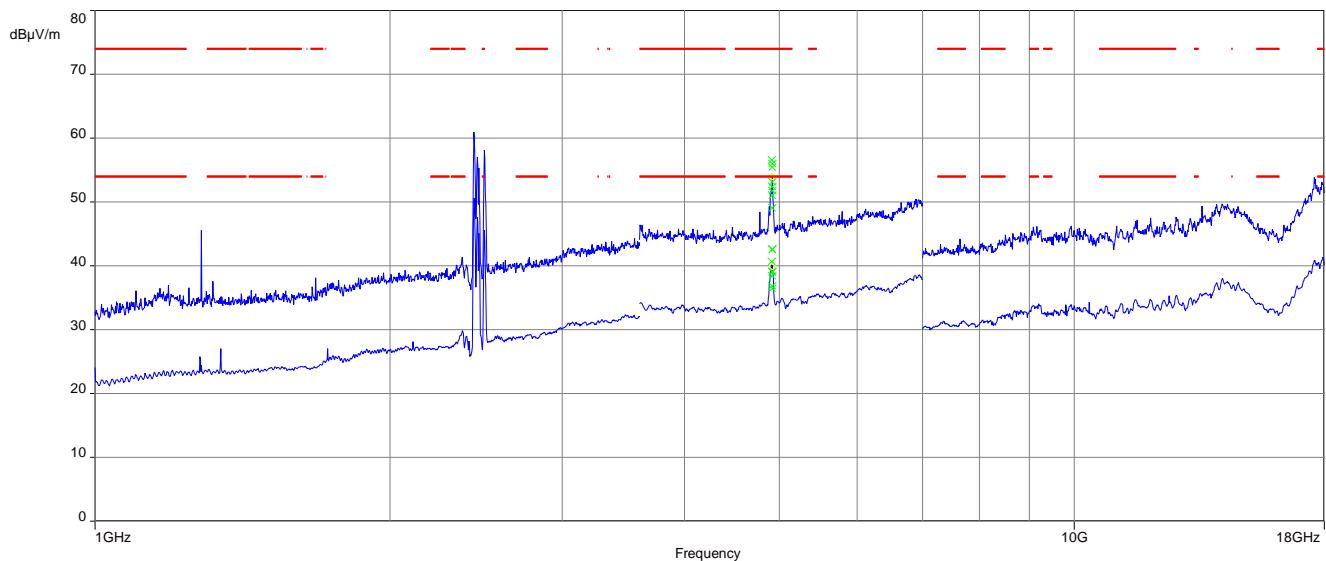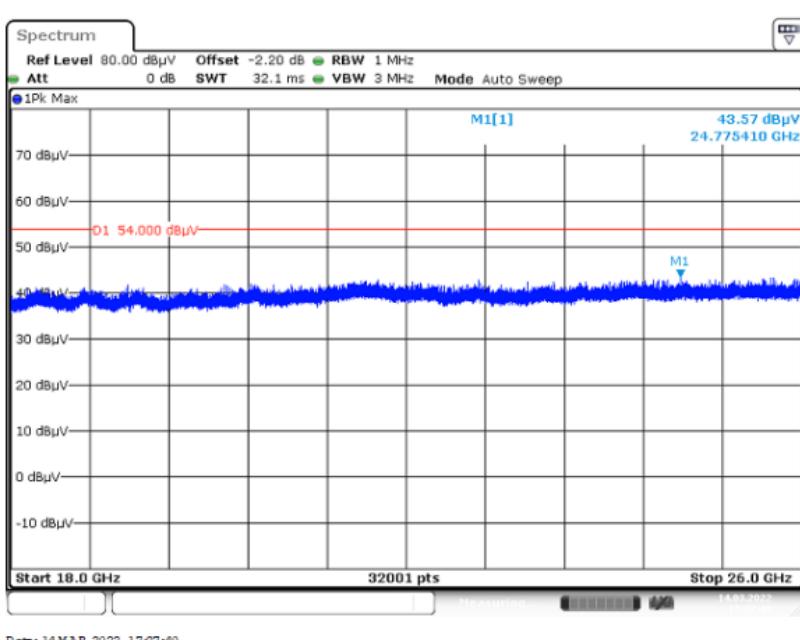Plot 3: Highest channel, 1 GHz to 18 GHz, vertical & horizontal polarization

Plot 6: Highest channel, 18 GHz to 26 GHz, vertical & horizontal polarization, valid for all channels and all modes


13.13 Spurious emissions conducted below 30 MHz (AC conducted)

Description:

Measurement of the conducted spurious emissions in transmit mode below 30 MHz. Both power lines, phase and neutral line, are measured. Found peaks are re-measured with average and quasi peak detection to show compliance to the limits.


Measurement:

Measurement parameter	
Detector	Peak - Quasi Peak / Average
Sweep time	Auto
Resolution bandwidth	F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz
Video bandwidth	F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz
Span	9 kHz to 30 MHz
Trace mode	Max. hold
Test setup	See chapter 7.5 setup A
Measurement uncertainty	See chapter 9


Limits:

FCC		
Frequency / MHz	Quasi-Peak / (dB μ V / m)	Average / (dB μ V / m)
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30.0	60	50

*Decreases with the logarithm of the frequency

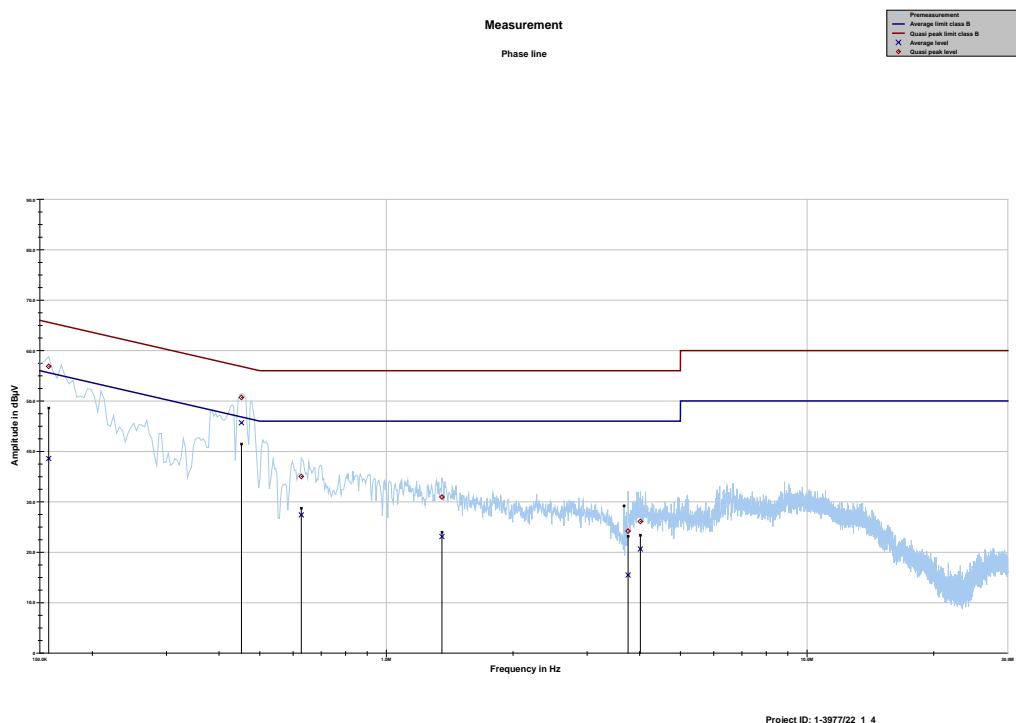Plots:**Plot 1:** 150 kHz to 30 MHz, phase line**Final results:**

Frequency	Quasi peak level	Margin quasi peak	Limit QP	Average level	Margin Average	Limit AV
MHz	dBµV	dB	dBµV	dBµV	dB	dBµV
0.157463	56.87	8.72	65.597	38.60	17.19	55.787
0.452231	50.71	6.12	56.834	45.69	1.67	47.365
0.627600	35.03	20.97	56.000	27.41	18.59	46.000
1.355194	30.94	25.06	56.000	23.11	22.89	46.000
3.754387	24.18	31.82	56.000	15.48	30.52	46.000
4.015575	26.12	29.88	56.000	20.65	25.35	46.000

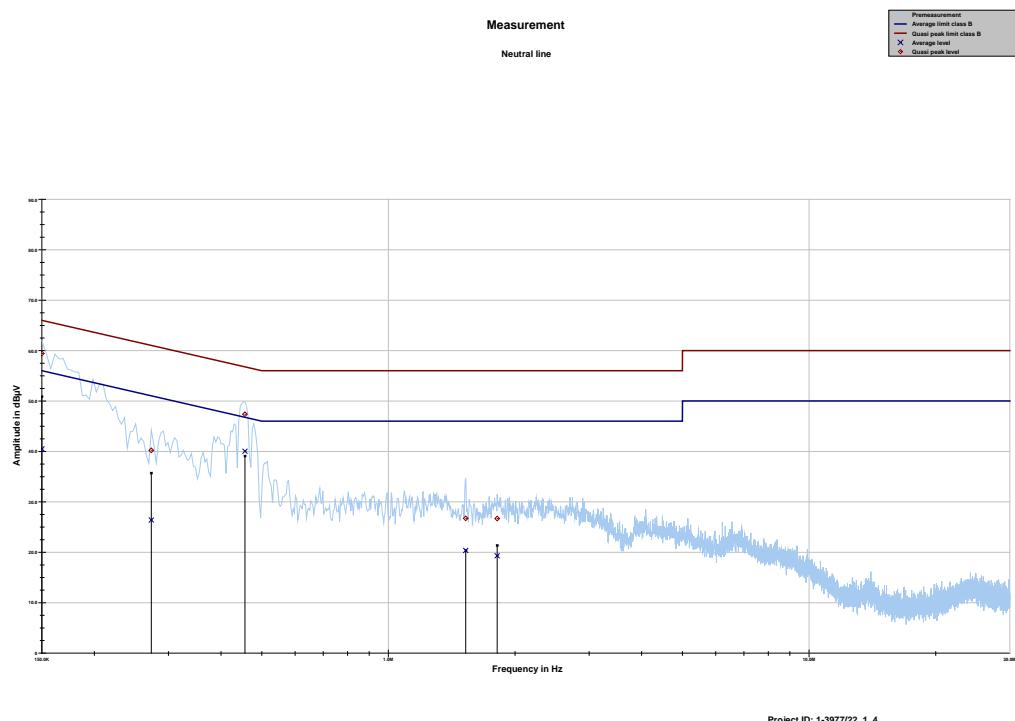Plot 2: 150 kHz to 30 MHz, neutral line

Final results:

Frequency	Quasi peak level	Margin quasi peak	Limit QP	Average level	Margin Average	Limit AV
MHz	dBµV	dB	dBµV	dBµV	dB	dBµV
0.150000	59.42	6.58	66.000	40.49	15.51	56.000
0.273131	40.22	20.80	61.022	26.39	26.09	52.482
0.455962	47.38	9.38	56.766	40.04	7.22	47.258
1.526831	26.71	29.29	56.000	20.36	25.64	46.000
1.814137	26.69	29.31	56.000	19.30	26.70	46.000

14 Glossary

EUT	Equipment under test
DUT	Device under test
UUT	Unit under test
GUE	GNSS User Equipment
ETSI	European Telecommunications Standards Institute
EN	European Standard
FCC	Federal Communications Commission
FCC ID	Company Identifier at FCC
IC	Industry Canada
PMN	Product marketing name
HMN	Host marketing name
HVIN	Hardware version identification number
FVIN	Firmware version identification number
EMC	Electromagnetic Compatibility
HW	Hardware
SW	Software
Inv. No.	Inventory number
S/N or SN	Serial number
C	Compliant
NC	Not compliant
NA	Not applicable
NP	Not performed
PP	Positive peak
QP	Quasi peak
AVG	Average
OC	Operating channel
OCW	Operating channel bandwidth
OBW	Occupied bandwidth
OOB	Out of band
DFS	Dynamic frequency selection
CAC	Channel availability check
OP	Occupancy period
NOP	Non occupancy period
DC	Duty cycle
PER	Packet error rate
CW	Clean wave
MC	Modulated carrier
WLAN	Wireless local area network
RLAN	Radio local area network
DSSS	Dynamic sequence spread spectrum
OFDM	Orthogonal frequency division multiplexing
FHSS	Frequency hopping spread spectrum
GNSS	Global Navigation Satellite System
C/N₀	Carrier to noise-density ratio, expressed in dB-Hz

15 Document history

Version	Applied changes	Date of release
-/-	Initial release	2022-05-25
A	Firmware information added	2022-05-27

16 Accreditation Certificate – D-PL-12076-01-05

first page	last page
 <p>Deutsche Akkreditierungsstelle GmbH</p> <p>Entrusted according to Section 8 subsection 1 AkkStelleG in connection with Section 1 subsection 1 AkkStelleGBV Signatory to the Multilateral Agreements of EA, ILAC and IAF for Mutual Recognition</p> <p>Accreditation </p> <p>The Deutsche Akkreditierungsstelle GmbH attests that the testing laboratory CTC advanced GmbH Untertürkheimer Straße 6-10, 66117 Saarbrücken is competent under the terms of DIN EN ISO/IEC 17025:2018 to carry out tests in the following fields: Telecommunication (FCC Requirements)</p> <p>The accreditation certificate shall only apply in connection with the notice of accreditation of 09.06.2020 with the accreditation number D-PL-12076-01. It comprises the cover sheet, the reverse side of the cover sheet and the following annex with a total of 05 pages.</p> <p>Registration number of the certificate: D-PL-12076-01-05</p> <p>Frankfurt am Main, 09.06.2020 by order of Dr.-Ing. (FH) Ulf Eigner Head of Division </p> <p><small>The certificate together with its annex reflects the status at the time of the date of issue. The current status of the scope of accreditation can be found in the database of accredited bodies of Deutsche Akkreditierungsstelle GmbH. https://www.dakks.de/en/content/accredited-bodies-dakks See notes overleaf.</small></p>	<p>Deutsche Akkreditierungsstelle GmbH</p> <p>Office Berlin Spittelmarkt 10 10117 Berlin</p> <p>Office Frankfurt am Main Europa-Allee 52 60327 Frankfurt am Main</p> <p>Office Braunschweig Bundesallee 100 38116 Braunschweig</p> <p>The publication of extracts of the accreditation certificate is subject to the prior written approval by Deutsche Akkreditierungsstelle GmbH (DAkkS). Exempted is the unchanged form of separate disseminations of the cover sheet by the conformity assessment body mentioned overleaf.</p> <p>No impression shall be made that the accreditation also extends to fields beyond the scope of accreditation attested by DAkkS.</p> <p>The accreditation was granted pursuant to the Act on the Accreditation Body (AkkStelleG) of 31 July 2009 (Federal Law Gazette I p. 2625) and the Regulation (EU) No 765/2008 of the European Parliament and of the Council of 9 July 2008 setting out the requirements for accreditation and market surveillance relating to the marketing of products (Official Journal of the European Union L 218 of 9 July 2008, p. 30). DAkkS is a signatory to the Multilateral Agreements for Mutual Recognition of the European co-operation for Accreditation (EA), International Accreditation Forum (IAF) and International Laboratory Accreditation Cooperation (ILAC). The signatories to these agreements recognise each other's accreditation.</p> <p>The up-to-date state of membership can be retrieved from the following websites: EA: www.european-accreditation.org ILAC: www.ilac.org IAF: www.iaf.nu</p>

Note: The current certificate annex is published on the websites (link see below).

<https://www.dakks.de/files/data/as/pdf/D-PL-12076-01-05e.pdf>

or

https://ctcadvanced.com/app/uploads/2020/06/D-PL-12076-01-05_TCB_USA.pdf

END OF TEST REPORT