

TEST REPORT

Test report no.: 1-3977/22-02-17

Testing laboratory

CTC advanced GmbH
Untertuerkheimer Strasse 6 – 10
66117 Saarbruecken / Germany
Phone: + 49 681 5 98 - 0
Fax: + 49 681 5 98 - 9075
Internet: <https://www.ctcadvanced.com>
e-mail: mail@ctcadvanced.com

Accredited Testing Laboratory:

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2018-03) by the Deutsche Akkreditierungsstelle GmbH (DAkkS)
The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate starting with the registration number: D-PL-12076-01.

Applicant

SAGEMCOM BROADBAND SAS
250, route de l' Empereur
92848 Rueil-Malmaison Cedex / FRANCE
Phone: -/-
Contact: Ludovic Bomba
e-mail: ludovic.bomba-ext@sagemcom.com

Manufacturer

SAGEMCOM BROADBAND SAS
250, route de l' Empereur
92848 Rueil-Malmaison Cedex / FRANCE

Test standard/s

FCC - Title 47 CFR Part 27 FCC - Title 47 of the Code of Federal Regulations; Chapter I; Part 27 -
Miscellaneous wireless communications services

For further applied test standards please refer to section 3 of this test report.

Test Item

Kind of test item:	Gateway
Model name:	F5688W
FCC ID:	VW3FAST5688W
Frequency:	Band 41
Technology tested:	5G NR
Antenna:	4 integrated antennas
Power supply:	120 V AC by power supply unit
Temperature range:	0°C to +50°C

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

Test report authorized:

Michael Dorongovski
Lab Manager
Radio Communications

Test performed:

Andreas Luckenbill
Head of Department
Radio Communications

1 Table of contents

1	Table of contents	2
2	General information	3
2.1	Notes and disclaimer	3
2.2	Application details	3
2.3	Test laboratories sub-contracted	3
3	Test standard/s, references and accreditations	4
4	Reporting statements of conformity – decision rule	5
5	Test environment	6
6	Test item	6
6.1	General description	6
6.2	Additional information	6
7	Description of the test setup	7
7.1	Conducted measurements normal and extreme conditions	8
8	Measurement uncertainty	9
9	Additional information and comments	10
10	Summary of measurement results	11
10.1	Part 27: 5G NR band 41	11
11	RF measurements	12
11.1	Description of test setup	12
11.2	Results 5G NR band 41	12
11.2.1	RF output power	12
11.2.2	Frequency stability	15
11.2.3	Spurious emissions conducted	17
11.2.4	Block edge compliance	21
11.2.5	Occupied bandwidth	22
12	Glossary	25
13	Document history	26
14	Accreditation Certificate – D-PL-12076-01-05	26

2 General information

2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. CTC advanced GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CTC advanced GmbH.

The testing service provided by CTC advanced GmbH has been rendered under the current "General Terms and Conditions for CTC advanced GmbH".

CTC advanced GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CTC advanced GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CTC advanced GmbH test report include or imply any product or service warranties from CTC advanced GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CTC advanced GmbH.

All rights and remedies regarding vendor's products and services for which CTC advanced GmbH has prepared this test report shall be provided by the party offering such products or services and not by CTC advanced GmbH. In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

2.2 Application details

Date of receipt of order: 2022-03-11

Date of receipt of test item: 2022-02-16

Start of test: 2022-05-01

End of test: 2022-07-01

Person(s) present during the test: -/-

*Date of each measurement, if not shown in the plot, can be requested. Dates are stored in the measurement software.

2.3 Test laboratories sub-contracted

None

3 Test standard/s, references and accreditations

Test standard	Date	Description
FCC - Title 47 CFR Part 27		FCC - Title 47 of the Code of Federal Regulations; Chapter I; Part 27 - Miscellaneous wireless communications services
Guidance	Version	Description
ANSI C63.4-2014	-/-	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
ANSI C63.26-2015	-/-	American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services
KDB 662911 D01	v02r01	Emissions Testing of Transmitters with Multiple Outputs in the Same Band
Power Meas License Systems: KDB 971168 D01	v03r01	Measurement Guidance for Certification of Licensed Digital Transmitters
Accreditation	Description	
D-PL-12076-01-05	Telecommunication FCC requirements https://www.dakks.de/as/ast/d/D-PL-12076-01-05e.pdf	

FCC designation number: DE0002




4 Reporting statements of conformity – decision rule

Only the measured values related to their corresponding limits will be used to decide whether the equipment under test meets the requirements of the test standards listed in chapter 3.

The measurement uncertainty is mentioned in this test report, see chapter 9, but is not taken into account - neither to the limits nor to the measurement results. Measurement results with a smaller margin to the corresponding limits than the measurement uncertainty have a potential risk of more than 5% that the decision might be wrong."

measured value, measurement uncertainty, verdict

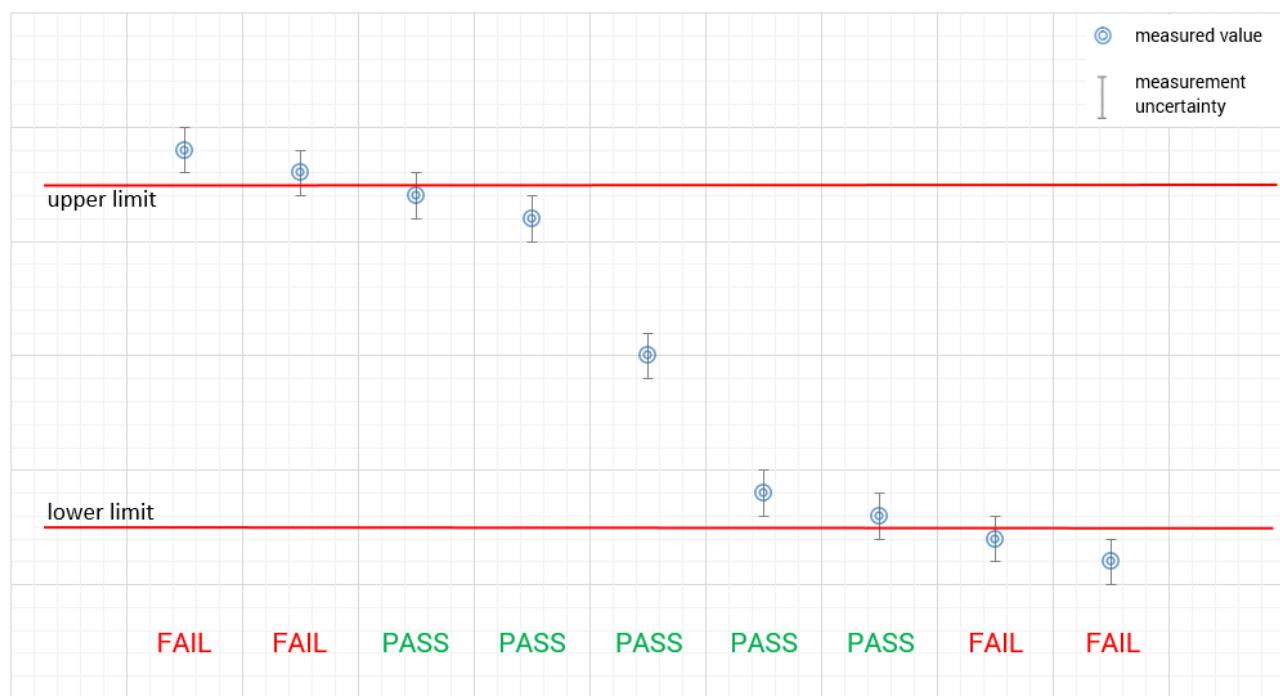

5 Test environment

Temperature :	T_{nom}	+22 °C during room temperature tests
	T_{max}	+50 °C during high temperature tests
	T_{min}	-30 °C during low temperature tests
Relative humidity content :		55 %
Barometric pressure :		1021 hpa
Power supply :	V_{nom}	120 V AC by power supply unit.
	V_{max}	138 V AC by external power supply.
	V_{min}	102 V AC by external power supply.

6 Test item

6.1 General description

Kind of test item :	Gateway
Model name :	F5688W
S/N serial number :	Conducted units: DM2205259000045 (IMEI: 359509840012014)
Hardware status :	V1.0
Software status :	SG520TMDAR01A04M4G_BETA_20220524A_01.001.01.001
Firmware status :	SG520TMDAR01A04M4G_BETA_20220524A_01.001.01.001
Frequency band :	Band 41
Type of radio transmission :	Modulated carrier
Use of frequency spectrum :	
Type of modulation :	BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM
Antenna :	4 integrated antennas
Power supply :	120 V AC by power supply unit
Temperature range :	0°C to +50°C

6.2 Additional information

The content of the following annexes is defined in the QA. It may be that not all of the listed annexes are necessary for this report, thus some values in between may be missing.

Test setup and EUT photos are included in test report: 1-3977/22-02-01_AnnexA
1-3977/22-02-01_AnnexB
1-3977/22-02-01_AnnexC

7 Description of the test setup

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, RF generating and signaling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).

In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Lab/Item).


Each block diagram listed can contain several test setup configurations. All devices belonging to a test setup are identified with the same letter syntax. For example: Column Setup and all devices with an A.

Agenda: Kind of Calibration

k	calibration / calibrated	EK	limited calibration
ne	not required (k, ev, izw, zw not required)	zw	cyclical maintenance (external cyclical maintenance)
ev	periodic self verification	izw	internal cyclical maintenance
Ve	long-term stability recognized	g	blocked for accredited testing
vlkl!	Attention: extended calibration interval	*	next calibration ordered / currently in progress
NK!	Attention: not calibrated		

7.1 Conducted measurements normal and extreme conditions

Conducted measurements normal & extreme conditions

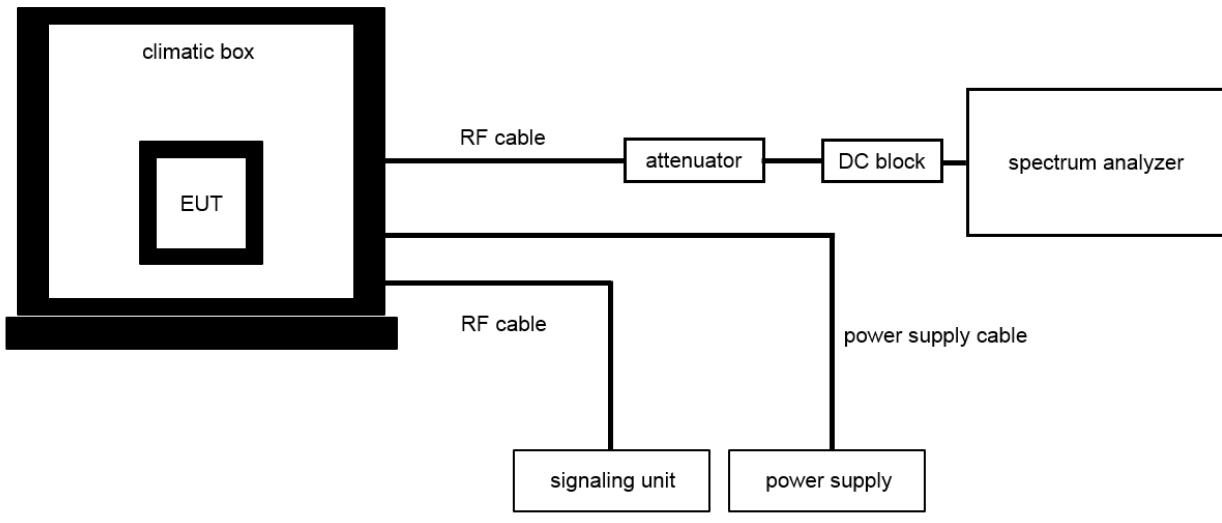

OP = AV + CA
 (OP-output power; AV-analyzer value; CA-loss signal path)

Example calculation:

$$\text{OP [dBm]} = 6.0 \text{ [dBm]} + 11.7 \text{ [dB]} = 17.7 \text{ [dBm]} (58.88 \text{ mW})$$

Equipment table:

No.	Setup	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Signal analyzer	FSV40	Rohde&Schwarz	101042	300004517	k	25.01.2022	31.01.2023
2	A	Teststand	Teststand Custom Sequence Editor	National Instruments GmbH		300004590	ne	-/-	-/-
3	A	RF-Cable	ST18/SMAm/SMAm /72	Huber & Suhner	Batch no. 699714	400001184	ev	-/-	-/-
4	A	DC-Blocker 0.1-40 GHz	8141A	Inmet		400001185	ev	-/-	-/-
5	A	RF-Cable	ST18/SMAm/SMAm /36	Huber & Suhner	Batch no. 601494	400001309	ev	-/-	-/-
6	A	Temperature Test Chamber	T-40/50	CTS GmbH	064023	300003540	ev	09.05.2022	08.05.2024

NOTE: Frequency tolerance tests over temperature were performed before 2022-05-07.

8 Measurement uncertainty

Measurement uncertainty		
Test case	Uncertainty	
Antenna gain	± 3 dB	
99 % bandwidth	± RBW	
-26 dB bandwidth	± RBW	
Frequency stability	10 ⁻⁶	
Maximum output power conducted	± 1.56 dB	
Block edge compliance	± 1.56 dB	
Spurious emissions conducted	> 3.6 GHz	± 1.56 dB
	> 7 GHz	± 1.56 dB
	> 18 GHz	± 2.31 dB
	≥ 40 GHz	± 2.97 dB
Spurious emissions radiated below 30 MHz	± 3 dB	
Spurious emissions radiated 30 MHz to 1 GHz	± 3 dB	
Spurious emissions radiated 1 GHz to 12.75 GHz	± 3.7 dB	
Spurious emissions radiated above 12.75 GHz	± 4.5 dB	

9 Additional information and comments

Reference documents:	Customer Questionnaire_F5688W_Sagemcom_v3.docx F5866WTMO_ANTENNA MAPPING_v2.xlsx 1-3977_22-02-17_Annex_MR_A1 (5G NR plots) 1-3977_22-02-08 (test report for all other bandwidths)
Special test descriptions:	Although the device has 4 integrated antennas, for 5G NR band 41 only 2 antennas are used for TX mode (LTE_M and 5GNR_P). Supported bandwidths for 5G NR band 41: 70 MHz CP-OFDM and DFT-s-OFDM were investigated for SISO and DFT-s-OFDM was found to be the worst case for SISO. CP-OFDM is used for MIMO. For 5G NR tests the MT8000A from Anritsu with the serial number SN6262186399 was used. BPSK is only used on ANT2. All other modulations are used in MIMO mode. The antenna gain was extracted from test report no. 1-3977_22-02-08.
Configuration descriptions:	ANT1 = LTE_M ANT2 = 5GNR_P
EUT selection:	<input type="checkbox"/> Only one device available <input type="checkbox"/> Devices selected by the customer <input checked="" type="checkbox"/> Devices selected by the laboratory (Randomly)

10 Summary of measurement results

<input checked="" type="checkbox"/>	No deviations from the technical specifications were ascertained
<input type="checkbox"/>	There were deviations from the technical specifications ascertained
<input type="checkbox"/>	This test report is only a partial test report. The content and verdict of the performed test cases are listed below.

TC identifier	Description	verdict	date	Remark
RF-Testing	FCC: CFR Part 2 & Part 27	See table!	2022-07-28	-/-

10.1 Part 27: 5G NR band 41

Test Case	temperature conditions	power source voltages	C	NC	NA	NP	Remark
RF Output Power	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
Frequency Stability	Extreme	Extreme	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
Spurious Emissions Radiated	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	-/-
Spurious Emissions Conducted	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
Block Edge Compliance	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
Occupied Bandwidth	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-

Notes:

C	Compliant	NC	Not compliant	NA	Not applicable	NP	Not performed
---	-----------	----	---------------	----	----------------	----	---------------

11 RF measurements

11.1 Description of test setup

For the spurious measurements we use the substitution method according TIA/EIA 603.

11.2 Results 5G NR band 41

The EUT was set to transmit the maximum power.

11.2.1 RF output power

Description:

This paragraph contains average power, peak output power and EIRP measurements for the mobile station. In all cases, the peak output power is within the required mask (this mask is specified in the JTC standards, TIA PN3389 Vol. 1 Chap 7, and is no FCC requirement).

Measurement:

The mobile was set up for the maximum output power with pseudo random data modulation.

To determine the Peak-To-Average Power Ratio (PAPR) the measurement was performed with the Power Complementary Cumulative Distribution Function (CCDF).

Measurement parameters	
Power meter and MT8000A	
Used equipment:	See chapter 7.1 setup A
Measurement uncertainty:	See chapter 8
Measurement procedure:	FCC: § 2.1046

Limits:

FCC
§27.50(h)(2)
<i>Mobile and other user stations.</i> Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.
Power: 33 dBm EIRP PAPR: Reporting only

Results:

Output Power (conducted) ANT1 + ANT2 sum								ANT2	
Band-width (MHz)	Channel / Frequency (MHz)	Resource block allocation			Average Output Power (dBm)	Average Output Power (dBm)	Average Output Power (dBm)	Average Output Power (dBm)	
		RB configuration	RB Allocation	RB Offset	QPSK	16-QAM	64-QAM	256-QAM	
70	506202 / 2531.01	1 RB low	1	0	25.4	25.5	25.3	22.4	21.7
		1 RB low+1	1	1	27.5	27.0	25.2	22.5	25.3
		1 RB high-1	1	187	27.5	27.0	25.1	22.2	25.6
		1 RB high	1	188	25.4	25.3	25.1	22.2	25.5
		50% RB mid	95	47	27.6	27.1	25.6	22.7	25.3
		100% RB	189	0	26.0	26.1	25.6	22.6	24.9
	518598 / 2592.99	1 RB low	1	0	25.5	25.5	25.4	22.4	22.4
		1 RB low+1	1	1	27.5	26.9	25.3	22.3	25.8
		1 RB high-1	1	187	27.1	26.7	25.0	21.9	25.8
		1 RB high	1	188	25.0	25.1	24.9	22.0	25.7
		50% RB mid	95	47	27.5	26.9	25.4	22.5	25.9
		100% RB	189	0	25.8	25.8	25.3	22.4	25.3
	531000 / 2655.00	1 RB low	1	0	25.0	25.1	24.9	22.0	22.3
		1 RB low+1	1	1	27.0	26.6	25.0	22.0	25.8
		1 RB high-1	1	187	26.7	26.3	24.9	21.7	25.1
		1 RB high	1	188	24.7	24.7	24.7	21.7	25.0
		50% RB mid	95	47	27.0	26.5	25.1	22.1	25.5
		100% RB	189	0	25.5	25.5	25.0	22.0	24.9

PAPR conducted (ANT1) – 100% RB					
Bandwidth (MHz)	Channel / Frequency (MHz)	Average Output Power (dBm) QPSK	Average Output Power (dBm) 16-QAM	Average Output Power (dBm) 64-QAM	Average Output Power (dBm) 256-QAM
70	518598 / 2592.99	6.2	6.7	5.9	7.3

PAPR conducted (ANT2) – 100% RB					
Bandwidth (MHz)	Channel / Frequency (MHz)	Average Output Power (dBm) QPSK	Average Output Power (dBm) 16-QAM	Average Output Power (dBm) 64-QAM	Average Output Power (dBm) 256-QAM
70	518598 / 2592.99	6.5	7.0	6.4	6.9

The radiated output power is measured in the mode with the highest conducted output power.

Output Power (EIRP)						
-/-		MIMO				SISO
Bandwidth (MHz)	Channel / Frequency (MHz)	Average Output Power (dBm) QPSK	Average Output Power (dBm) 16-QAM	Average Output Power (dBm) 64-QAM	Average Output Power (dBm) 256-QAM	Average Output Power (dBm) PI/2BPSK
70	506202 / 2531.01	31.9	31.3	29.8	26.9	30.3
	518598 / 2592.99	30.3	29.7	28.3	25.2	28.8
	531000 / 2655.00	28.6	28.2	26.6	23.7	27.9

11.2.2 Frequency stability

Description:

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the mobile station in a “call mode”. This is accomplished with the use of a MT8000A DIGITAL RADIOCOMMUNICATION TESTER.

1. Measure the carrier frequency at room temperature.
2. Subject the mobile station to overnight soak at -30 C.
3. With the mobile station, powered with V_{nom} , connected to the MT8000A and in a simulated call on channel 18900 (center channel), measure the carrier frequency. These measurements should be made within two minutes of powering up the mobile station, to prevent significant self warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
5. Re-measure carrier frequency at room temperature with V_{nom} . Vary supply voltage from V_{min} to V_{max} , in 0.1 Volt steps re-measuring carrier frequency at each voltage. Pause at V_{nom} for 1.5 hours unpowered, to allow any self heating to stabilize, before continuing.
6. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

Measurement:

Measurement parameters	
Detector:	
Sweep time:	
Video bandwidth:	
Resolution bandwidth:	Measured with MT8000A
Span:	
Trace mode:	
Used equipment:	See chapter 7.1 setup A
Measurement uncertainty:	See chapter 8
Measurement procedure:	FCC: § 2.1055

Limits:

FCC
§27.54
The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

Results:**AFC FREQ ERROR versus VOLTAGE**

Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
102	19	0.0101
120	21	0.0112
138	17	0.0090

AFC FREQ ERROR versus TEMPERATURE

Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
-30	12	0.0064
-20	19	0.0101
-10	13	0.0069
± 0	21	0.0112
10	16	0.0085
20	13	0.0069
30	15	0.0080
40	-15	-0.0080
50	10	0.0053

11.2.3 Spurious emissions conducted

Description:

The following steps outline the procedure used to measure the conducted emissions from the mobile station.

1. Determine frequency range for measurements: From § 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency.
2. Determine mobile station transmits frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.

Measurement:

Measurement parameters	
Detector:	Peak
Sweep time:	Auto
Video bandwidth:	3 MHz
Resolution bandwidth:	1 MHz
Log file:	1-3977_22-02-17_Annex_MR_A1
Span:	30 MHz – 26 GHz
Trace mode:	Max Hold
Used equipment:	See chapter 7.1 setup A
Measurement uncertainty:	See chapter 8
Measurement procedure	FCC: § 2.1051

Limits:

FCC
§ 27.53 (m) (4)
For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.
-25 dBm

Results: ANT1**QPSK:**

Spurious Emission Level					
Lowest channel		Middle channel		Highest channel	
Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]
-/-		-/-		-/-	

NOTE: The limit of -25 dBm is fulfilled.

16-QAM:

Spurious Emission Level					
Lowest channel		Middle channel		Highest channel	
Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]
-/-		-/-		-/-	

NOTE: The limit of -25 dBm is fulfilled.

64-QAM:

Spurious Emission Level					
Lowest channel		Middle channel		Highest channel	
Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]
-/-		-/-		-/-	

NOTE: The limit of -25 dBm is fulfilled.

256-QAM:

Spurious Emission Level					
Lowest channel		Middle channel		Highest channel	
Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]
-/-		-/-		-/-	

NOTE: The limit of -25 dBm is fulfilled.

Results: ANT2**BPSK:**

Spurious Emission Level					
Lowest channel		Middle channel		Highest channel	
Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]
-/-		-/-		-/-	

NOTE: The limit of -25 dBm is fulfilled.

QPSK:

Spurious Emission Level					
Lowest channel		Middle channel		Highest channel	
Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]
-/-		-/-		-/-	

NOTE: The limit of -25 dBm is fulfilled.

16-QAM:

Spurious Emission Level					
Lowest channel		Middle channel		Highest channel	
Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]
-/-		-/-		-/-	

NOTE: The limit of -25 dBm is fulfilled.

64-QAM:

Spurious Emission Level					
Lowest channel		Middle channel		Highest channel	
Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]
-/-		-/-		-/-	

NOTE: The limit of -25 dBm is fulfilled.

256-QAM:

Spurious Emission Level					
Lowest channel		Middle channel		Highest channel	
Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]	Spurious emissions	Level [dBm]
-/-		-/-		-/-	

NOTE: The limit of -25 dBm is fulfilled.

11.2.4 Block edge compliance

Description:

The spectrum at the band edges must comply with the spurious emissions limits.

Measurement:

Measurement parameters	
Detector:	RMS
Sweep time:	See plots
Video bandwidth:	See plots
Resolution bandwidth:	See plots
Log file:	1-3977_22-02-17_Annex_MR_A1
Span:	1 MHz steps
Trace mode:	Max Hold
Used equipment:	See chapter 7.1 setup A
Measurement uncertainty:	See chapter 8
Measurement procedure	FCC: § 2.1051

Limits:

FCC
§ 27.53 (m) (4)
For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.
-13 dBm

Results: PASS (See log files)

11.2.5 Occupied bandwidth

Description:

Measurement of the occupied bandwidth of the transmitted signal.

Measurement:

Similar to conducted emissions, occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequencies of the 5G NR band 41 frequency band. The table below lists the measured 99% power and -26dBc occupied bandwidths. Spectrum analyzer plots are included on the following pages.

Measurement parameters	
Detector:	Peak
Sweep time:	See plots
Video bandwidth:	See plots
Resolution bandwidth:	See plots
Log file:	1-3977_22-02-17_Annex_MR_A1
Span:	2 x nominal bandwidth
Trace mode:	Max Hold
Used equipment:	See chapter 7.1 setup A
Measurement uncertainty:	See chapter 8
Measurement procedure	FCC: § 2.1049

Limits:

FCC
§ 2.1049
Reporting only

Results: ANT1

Occupied Bandwidth – QPSK			
Bandwidth	Channel	99% OBW (MHz)	-26 dBc BW (MHz)
70 MHz	low	67.5	70.5
70 MHz	mid	67.6	70.7
70 MHz	high	67.5	70.9

Occupied Bandwidth – 16-QAM			
Bandwidth	Channel	99% OBW (MHz)	-26 dBc BW (MHz)
70 MHz	low	67.5	70.7
70 MHz	mid	67.5	70.9
70 MHz	high	67.5	70.7

Occupied Bandwidth – 64-QAM			
Bandwidth	Channel	99% OBW (MHz)	-26 dBc BW (MHz)
70 MHz	low	67.5	70.7
70 MHz	mid	67.5	70.5
70 MHz	high	67.5	70.5

Occupied Bandwidth – 256-QAM			
Bandwidth	Channel	99% OBW (MHz)	-26 dBc BW (MHz)
70 MHz	low	67.5	70.4
70 MHz	mid	67.5	70.7
70 MHz	high	67.5	70.4

Results: ANT2

Occupied Bandwidth – BPSK			
Bandwidth	Channel	99% OBW (MHz)	-26 dBc BW (MHz)
70 MHz	low	64.2	67.0
70 MHz	mid	64.2	67.4
70 MHz	high	64.2	67.6

Occupied Bandwidth – QPSK			
Bandwidth	Channel	99% OBW (MHz)	-26 dBc BW (MHz)
70 MHz	low	67.5	70.4
70 MHz	mid	67.7	70.7
70 MHz	high	67.5	70.5

Occupied Bandwidth – 16-QAM			
Bandwidth	Channel	99% OBW (MHz)	-26 dBc BW (MHz)
70 MHz	low	67.3	70.9
70 MHz	mid	67.5	70.7
70 MHz	high	67.5	70.7

Occupied Bandwidth – 64-QAM			
Bandwidth	Channel	99% OBW (MHz)	-26 dBc BW (MHz)
70 MHz	low	67.5	70.7
70 MHz	mid	67.7	70.5
70 MHz	high	67.5	70.7

Occupied Bandwidth – 256-QAM			
Bandwidth	Channel	99% OBW (MHz)	-26 dBc BW (MHz)
70 MHz	low	67.3	70.4
70 MHz	mid	67.5	70.2
70 MHz	high	67.3	70.5

12 Glossary

EUT	Equipment under test
DUT	Device under test
UUT	Unit under test
GUE	GNSS User Equipment
ETSI	European Telecommunications Standards Institute
EN	European Standard
FCC	Federal Communications Commission
FCC ID	Company Identifier at FCC
IC	Industry Canada
PMN	Product marketing name
HMN	Host marketing name
HVIN	Hardware version identification number
FVIN	Firmware version identification number
EMC	Electromagnetic Compatibility
HW	Hardware
SW	Software
Inv. No.	Inventory number
S/N or SN	Serial number
C	Compliant
NC	Not compliant
NA	Not applicable
NP	Not performed
PP	Positive peak
QP	Quasi peak
AVG	Average
OC	Operating channel
OCW	Operating channel bandwidth
OBW	Occupied bandwidth
OOB	Out of band
DFS	Dynamic frequency selection
CAC	Channel availability check
OP	Occupancy period
NOP	Non occupancy period
DC	Duty cycle
PER	Packet error rate
CW	Clean wave
MC	Modulated carrier
WLAN	Wireless local area network
RLAN	Radio local area network
DSSS	Dynamic sequence spread spectrum
OFDM	Orthogonal frequency division multiplexing
FHSS	Frequency hopping spread spectrum
GNSS	Global Navigation Satellite System
C/N₀	Carrier to noise-density ratio, expressed in dB-Hz

13 Document history

Version	Applied changes	Date of release
-/-	Initial release	2022-07-28

14 Accreditation Certificate – D-PL-12076-01-05

first page	last page
 Deutsche Akkreditierungsstelle GmbH Entrusted according to Section 8 subsection 1 AkkStelleG in connection with Section 1 subsection 1 AkkStelleGBV Signatory to the Multilateral Agreements of EA, ILAC and IAF for Mutual Recognition Accreditation  The Deutsche Akkreditierungsstelle GmbH attests that the testing laboratory CTC advanced GmbH Untertürkheimer Straße 6-10, 66117 Saarbrücken is competent under the terms of DIN EN ISO/IEC 17025:2018 to carry out tests in the following fields: Telecommunication (FCC Requirements) The accreditation certificate shall only apply in connection with the notice of accreditation of 09.06.2020 with the accreditation number D-PL-12076-01. It comprises the cover sheet, the reverse side of the cover sheet and the following annex with a total of 05 pages. Registration number of the certificate: D-PL-12076-01-05  Frankfurt am Main, 09.06.2020 by order Dr.-Ing. (FH) G. Egner Head of Division The certificate together with its annex reflects the status at the time of the date of issue. The current status of the scope of accreditation can be found in the database of accredited bodies of Deutsche Akkreditierungsstelle GmbH. https://www.dakks.de/en/content/accredited-bodies-dakks See notes overleaf.	Deutsche Akkreditierungsstelle GmbH Office Berlin Spittelmarkt 10 10117 Berlin Office Frankfurt am Main Europa-Allee 52 60327 Frankfurt am Main Office Braunschweig Bundesallee 100 38116 Braunschweig The publication of extracts of the accreditation certificate is subject to the prior written approval by Deutsche Akkreditierungsstelle GmbH (DAkkS). Exempted is the unchanged form of separate disseminations of the cover sheet by the conformity assessment body mentioned overleaf. No impression shall be made that the accreditation also extends to fields beyond the scope of accreditation attested by DAkkS. The accreditation was granted pursuant to the Act on the Accreditation Body (AkkStelleG) of 31 July 2009 (Federal Law Gazette I p. 2625) and the Regulation (EC) No 765/2008 of the European Parliament and of the Council of 9 July 2008 setting out the requirements for accreditation and market surveillance relating to the marketing of products (Official Journal of the European Union L 238 of 9 July 2008, p. 30). DAkkS is a signatory to the Multilateral Agreements for Mutual Recognition of the European co-operation for Accreditation (EA), International Accreditation Forum (IAF) and International Laboratory Accreditation Cooperation (ILAC). The signatories to these agreements recognise each other's accreditations. The up-to-date state of membership can be retrieved from the following websites: EA: www.european-accreditation.org ILAC: www.ilac.org IAF: www.iaf.org

Note: The current certificate annex is published on the websites (link see below).

<https://www.dakks.de/files/data/as/pdf/D-PL-12076-01-05e.pdf>

or

https://ctcadvanced.com/app/uploads/2020/06/D-PL-12076-01-05_TCB_USA.pdf

END OF TEST REPORT