


Site	SIP-AC2	Test Date	2025-03-23
Temperature	15.6 °C	Humidity	48.9 %
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	Giga Hub 2.0	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11g at 2412MHz		

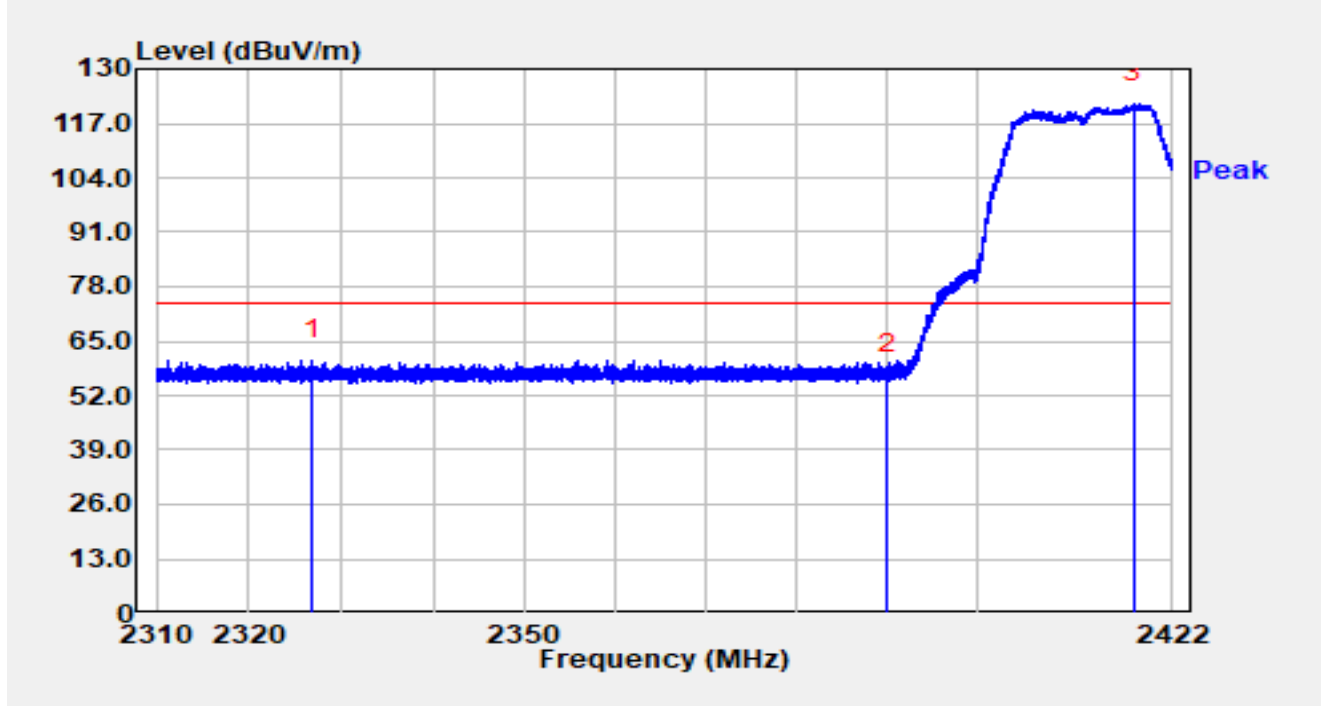


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2326.79	26.74	33.65	60.39	-13.61	74.00	Peak
2		2390.00	23.59	33.38	56.97	-17.03	74.00	Peak
3		2417.65	88.44	33.32	121.76	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-03-23
Temperature	15.6 °C	Humidity	48.9 %
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	Giga Hub 2.0	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11g at 2412MHz		

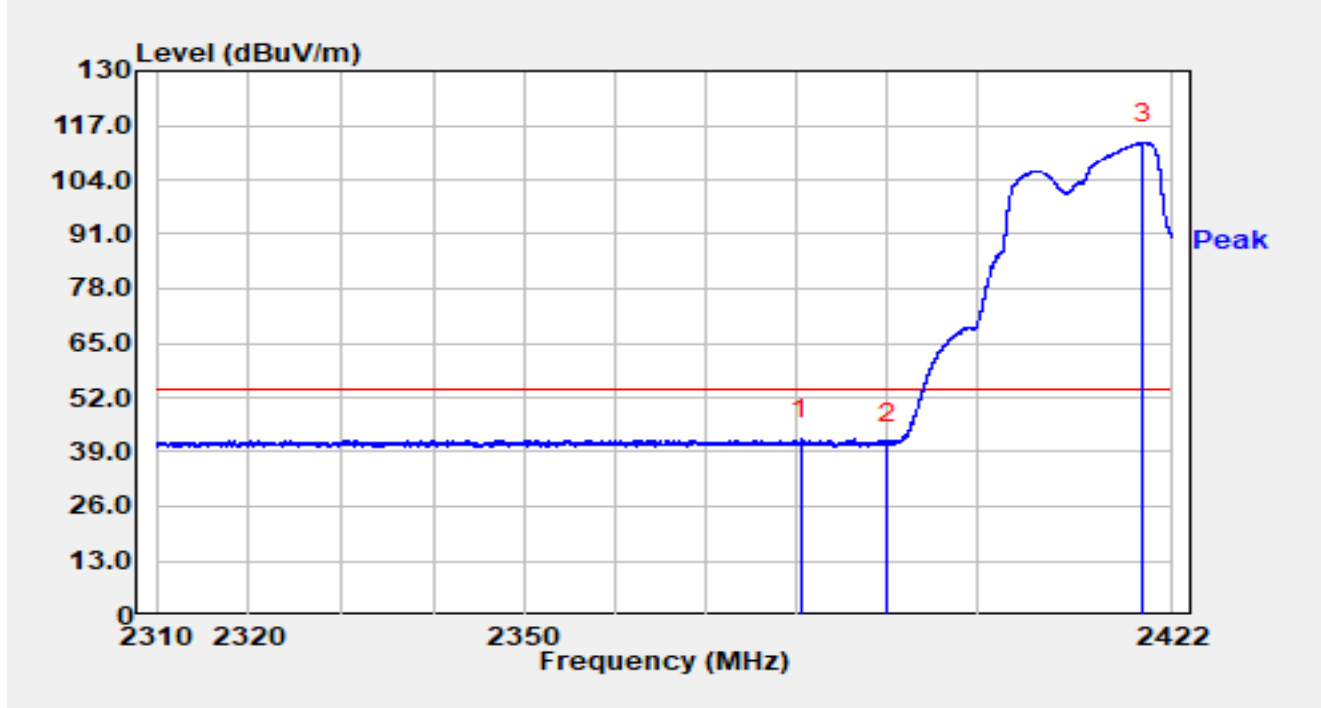


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2380.41	8.61	33.41	42.02	-11.98	54.00	Average
2		2390.00	7.70	33.38	41.07	-12.93	54.00	Average
3		2418.61	79.49	33.32	112.81	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-03-23
Temperature	15.6 °C	Humidity	48.9 %
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	Giga Hub 2.0	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11g at 2412MHz		

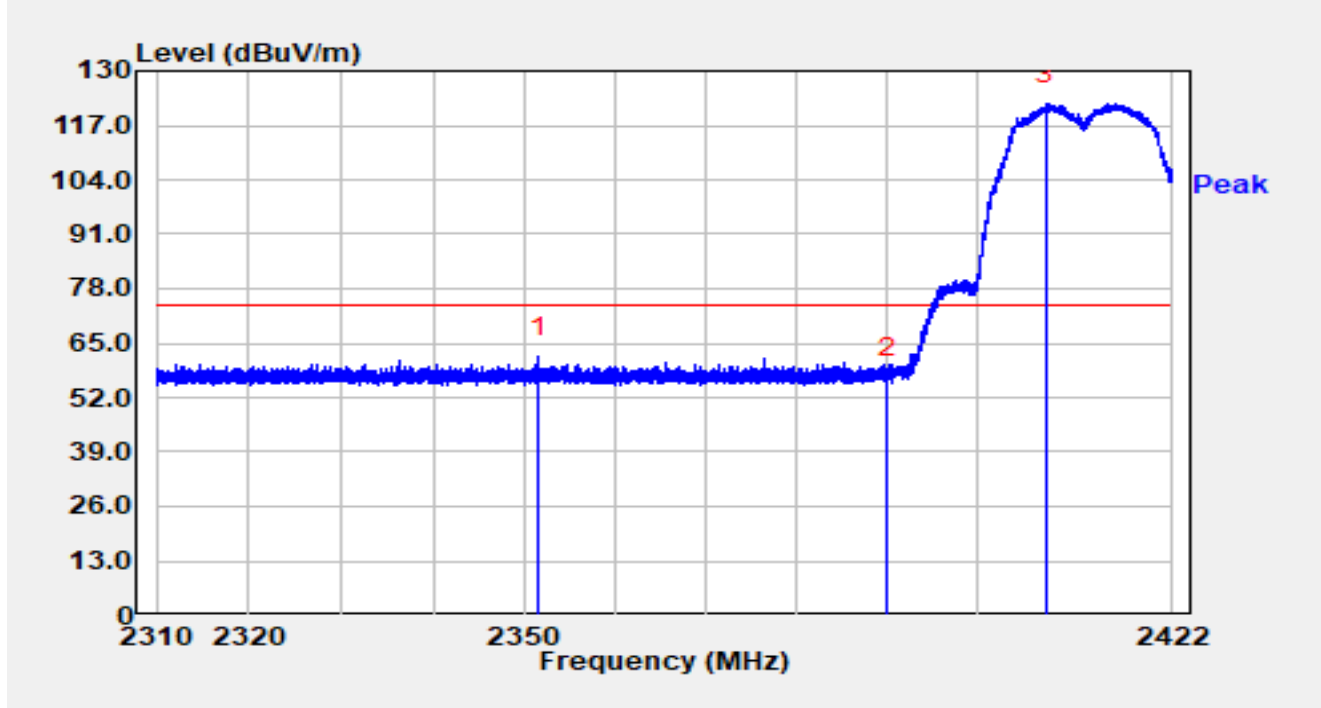


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2351.46	28.16	33.52	61.68	-12.32	74.00	Peak
2		2390.00	23.20	33.38	56.58	-17.42	74.00	Peak
3		2407.81	88.80	33.30	122.11	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-03-23
Temperature	15.6 °C	Humidity	48.9 %
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	Giga Hub 2.0	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11g at 2412MHz		

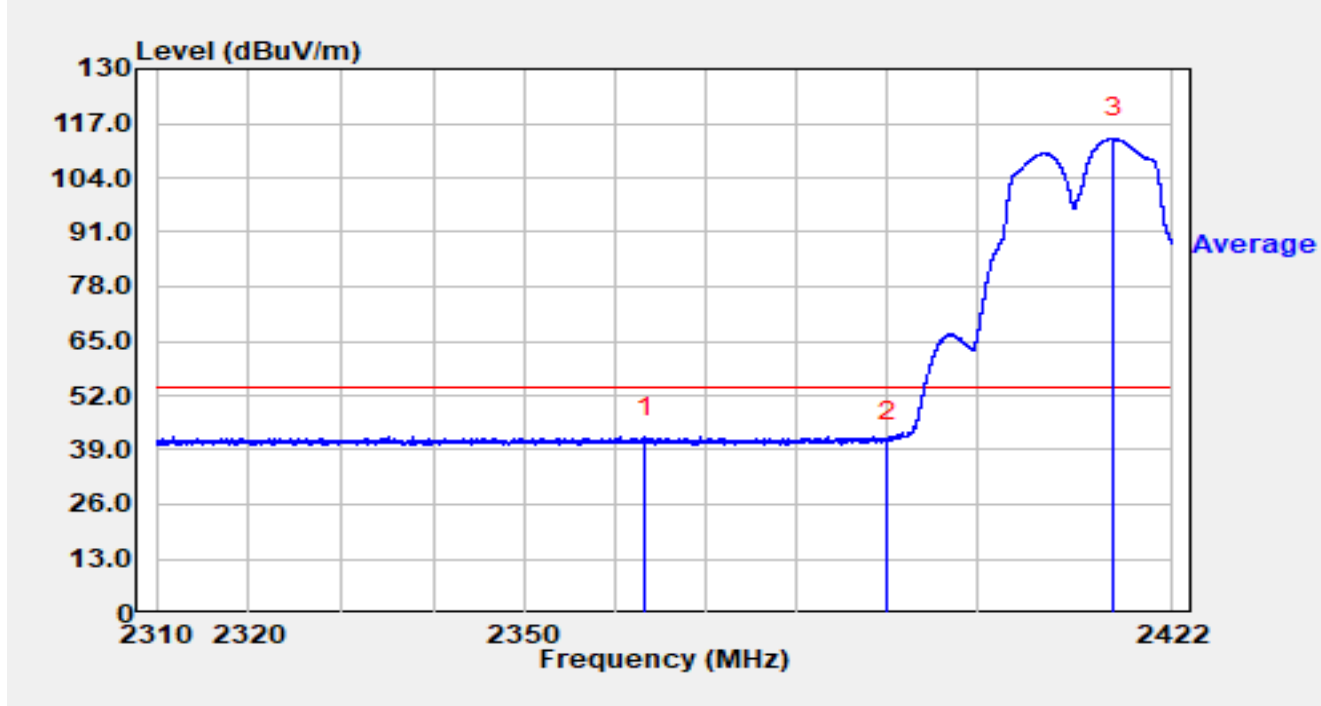


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2363.25	8.64	33.51	42.16	-11.84	54.00	Average
2		2390.00	7.73	33.38	41.10	-12.90	54.00	Average
3		2415.44	80.02	33.31	113.33	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-03-23
Temperature	15.6 °C	Humidity	48.9 %
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	Giga Hub 2.0	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11g at 2462MHz		

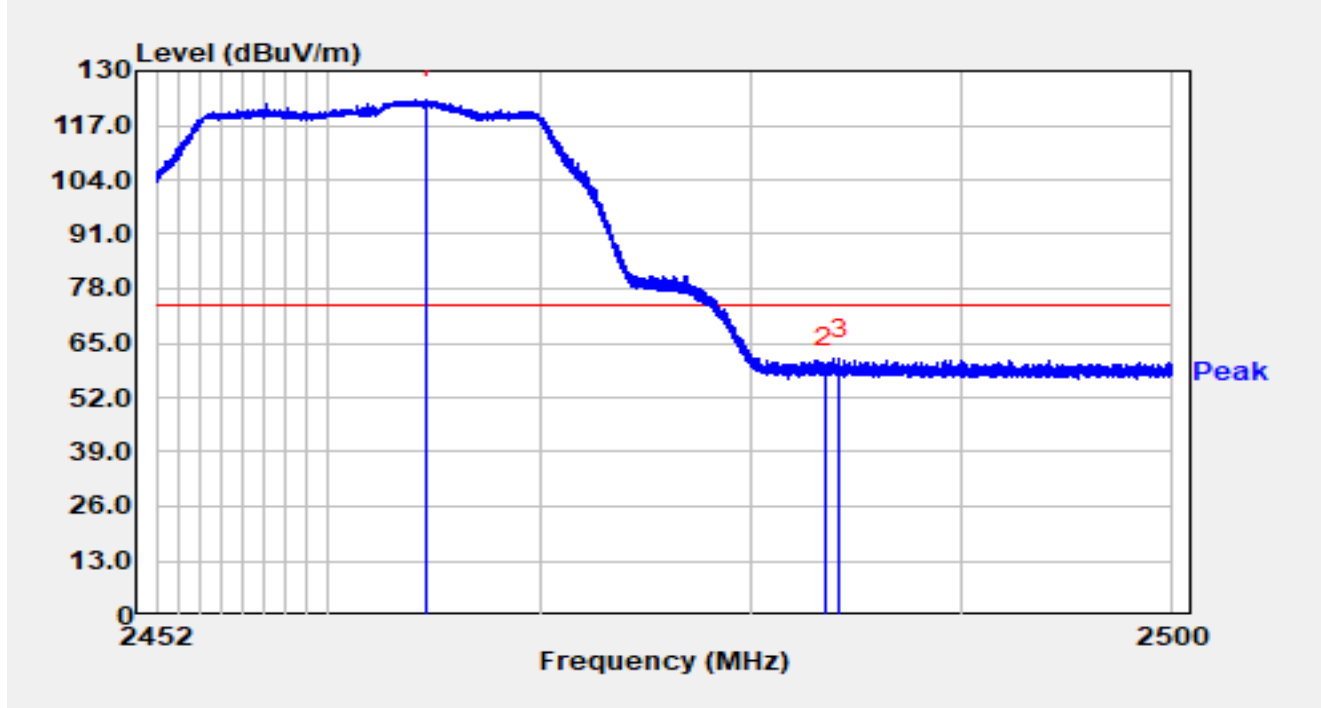


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2464.61	89.87	33.28	123.15	N/A	N/A	Peak
2		2483.50	25.81	33.25	59.06	-14.94	74.00	Peak
3	*	2484.17	27.97	33.25	61.23	-12.77	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-03-23
Temperature	15.6 °C	Humidity	48.9 %
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	Giga Hub 2.0	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11g at 2462MHz		

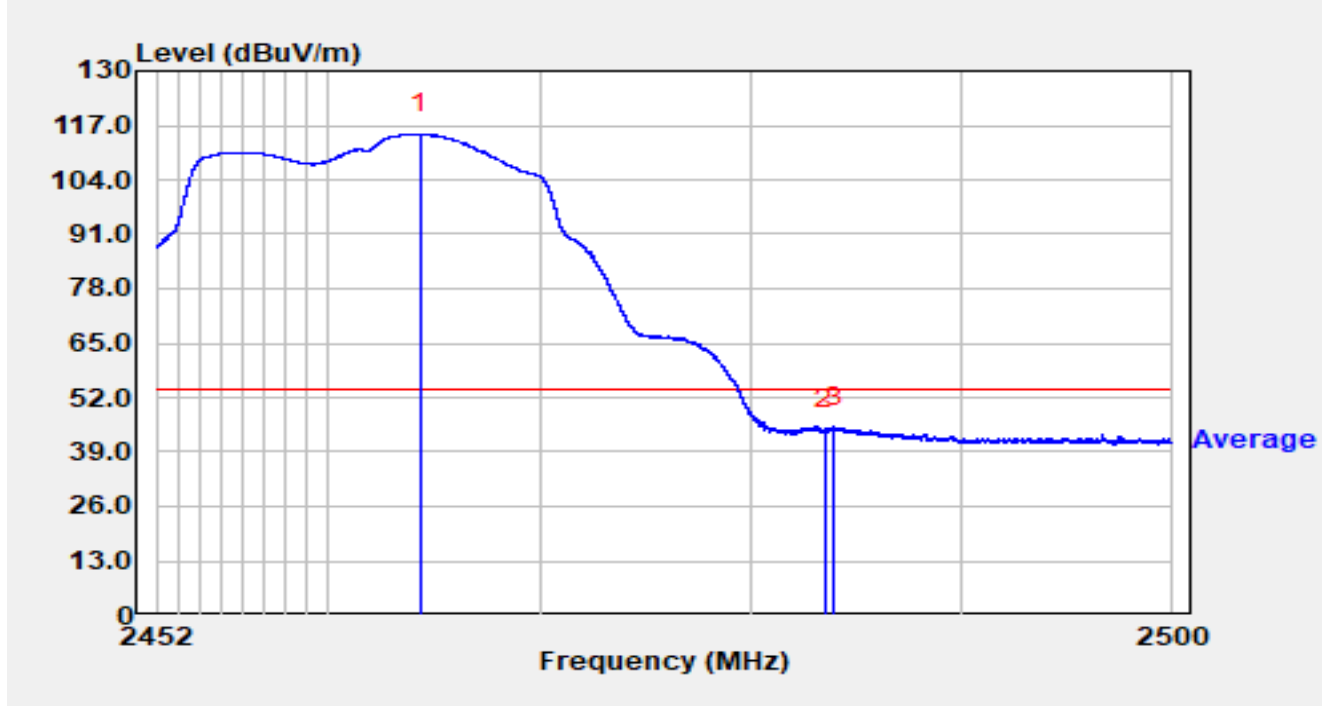


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2464.40	81.68	33.29	114.97	N/A	N/A	Average
2		2483.50	11.09	33.25	44.35	-9.65	54.00	Average
3	*	2483.90	11.71	33.25	44.97	-9.03	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-03-23
Temperature	15.6 °C	Humidity	48.9 %
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	Giga Hub 2.0	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11g at 2462MHz		

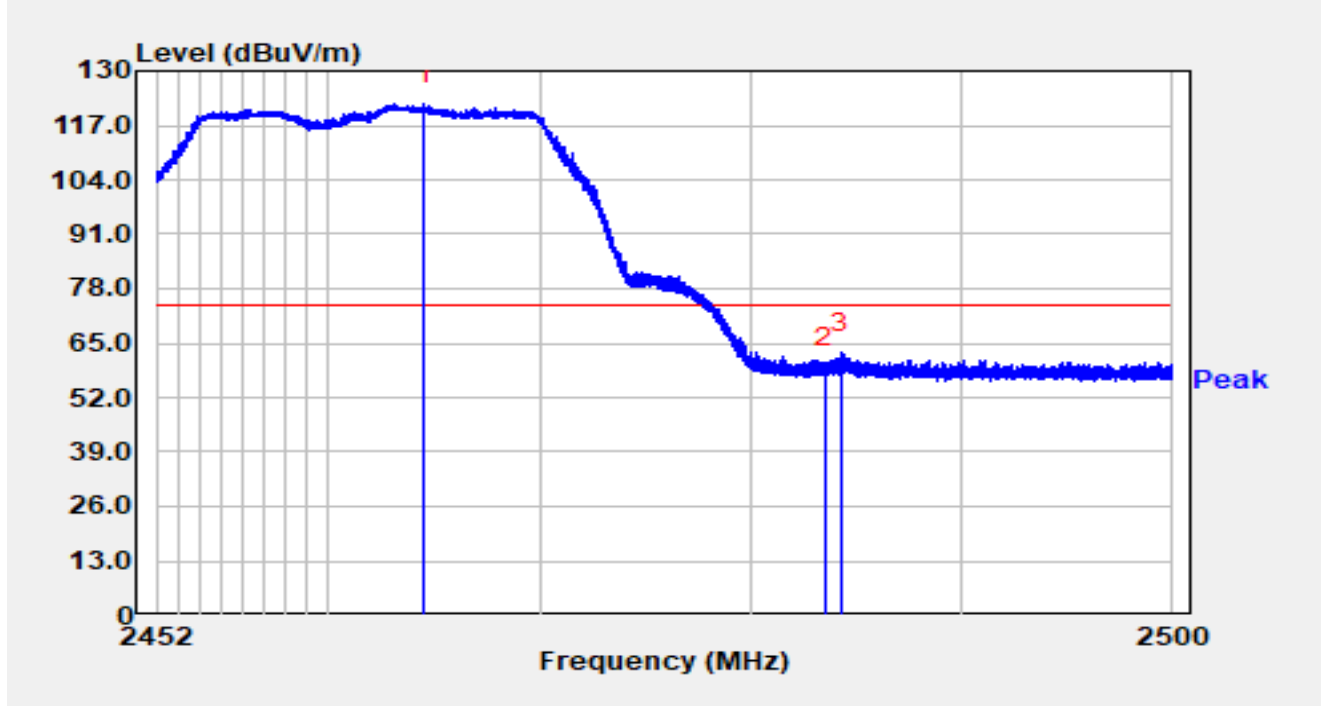


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2464.59	88.79	33.28	122.08	N/A	N/A	Peak
2		2483.50	25.96	33.25	59.21	-14.79	74.00	Peak
3	*	2484.21	29.32	33.26	62.57	-11.43	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-03-23
Temperature	15.6 °C	Humidity	48.9 %
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	Giga Hub 2.0	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11g at 2462MHz		

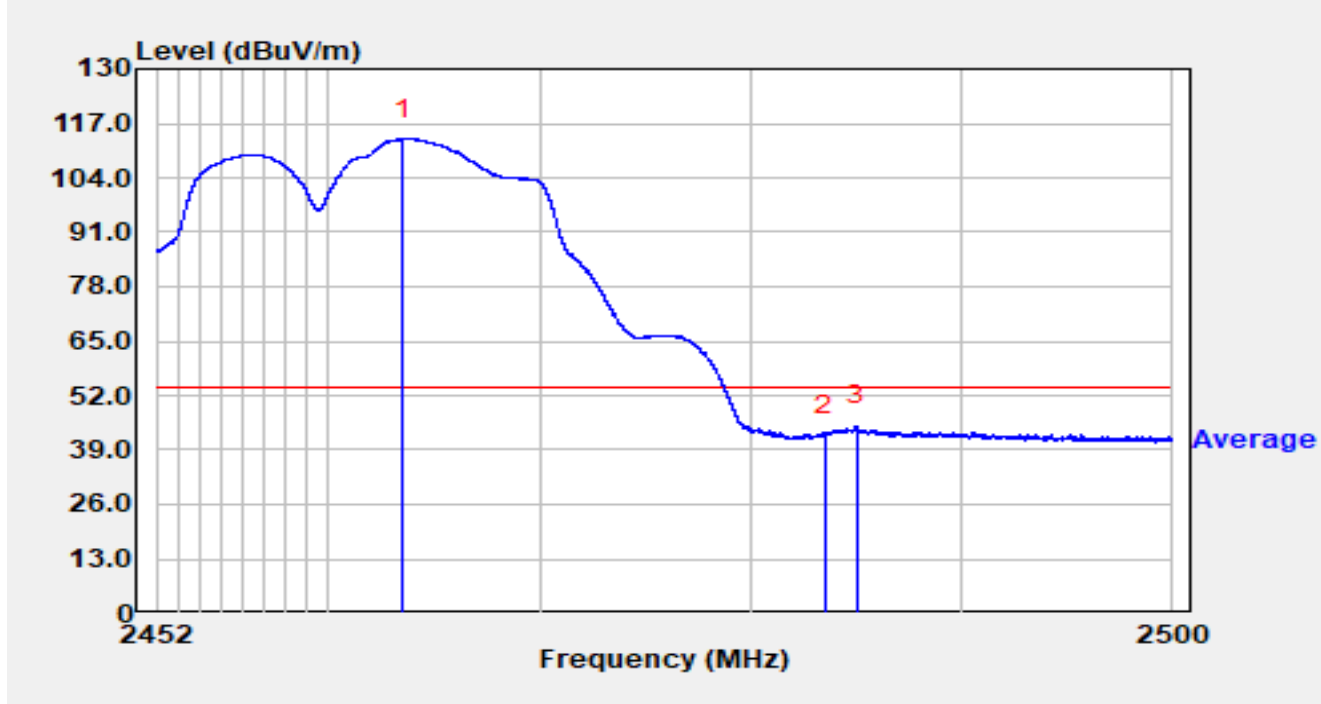


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2463.59	79.97	33.29	113.26	N/A	N/A	Average
2		2483.50	9.39	33.25	42.64	-11.36	54.00	Average
3	*	2484.97	11.47	33.26	44.73	-9.27	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-03-23
Temperature	15.6 °C	Humidity	48.9 %
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	Giga Hub 2.0	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11n-HT20 at 2412MHz		

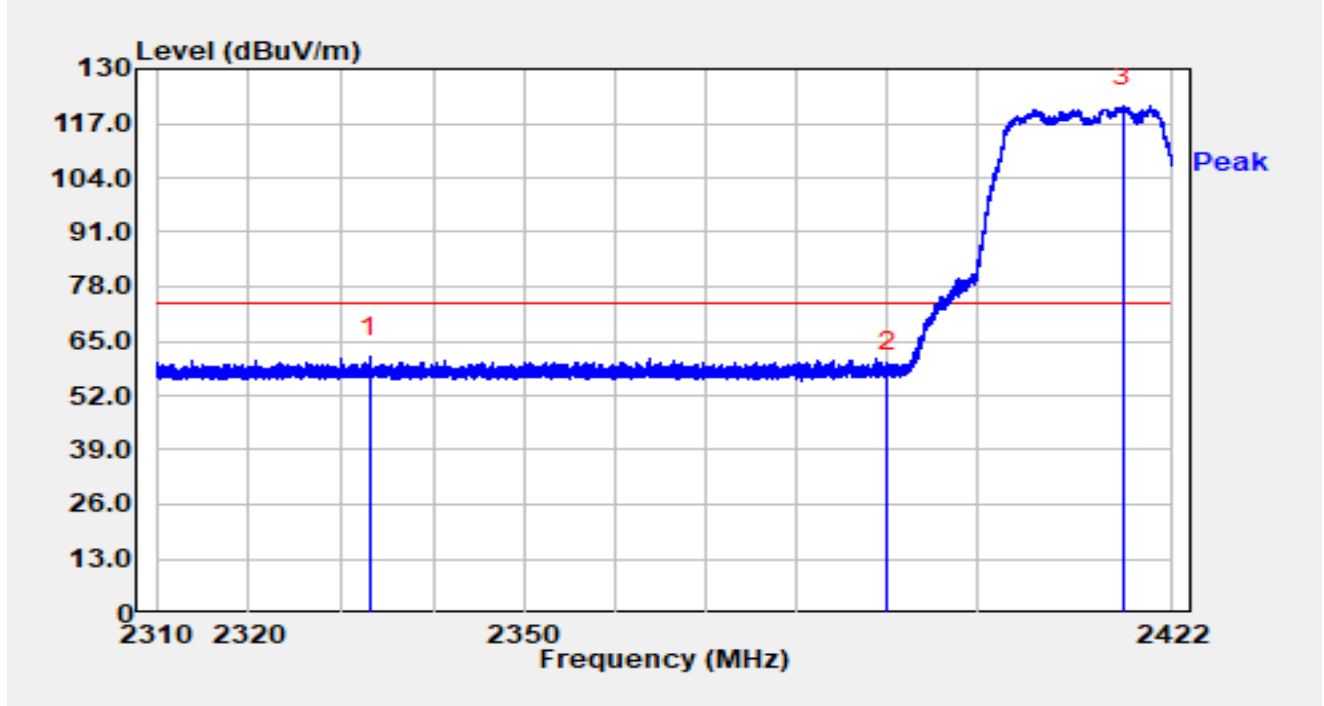


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2333.08	27.68	33.60	61.28	-12.72	74.00	Peak
2		2390.00	24.10	33.38	57.47	-16.53	74.00	Peak
3		2416.45	87.70	33.31	121.01	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-03-23
Temperature	15.6 °C	Humidity	48.9 %
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	Giga Hub 2.0	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11n-HT20 at 2412MHz		

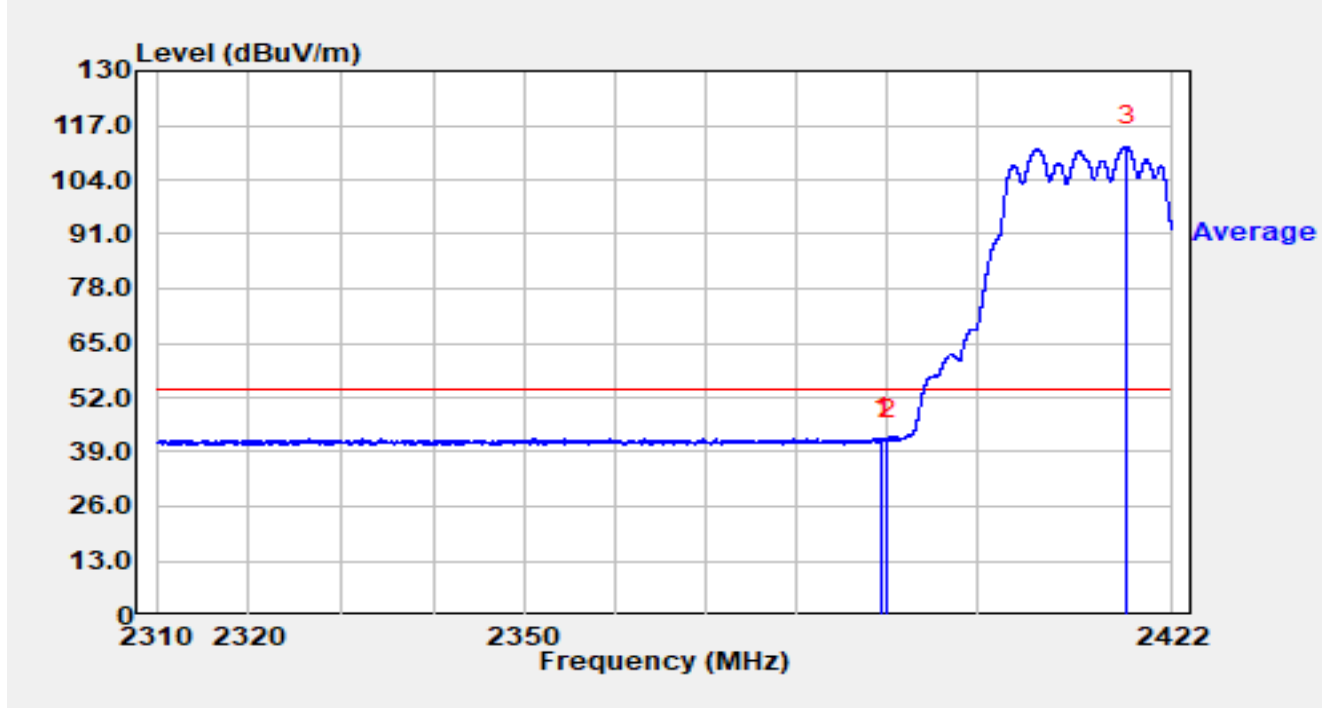


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2389.40	9.02	33.38	42.39	-11.61	54.00	Average
2		2390.00	8.61	33.38	41.98	-12.02	54.00	Average
3		2416.87	78.77	33.31	112.08	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-03-23
Temperature	15.6 °C	Humidity	48.9 %
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	Giga Hub 2.0	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11n-HT20 at 2412MHz		

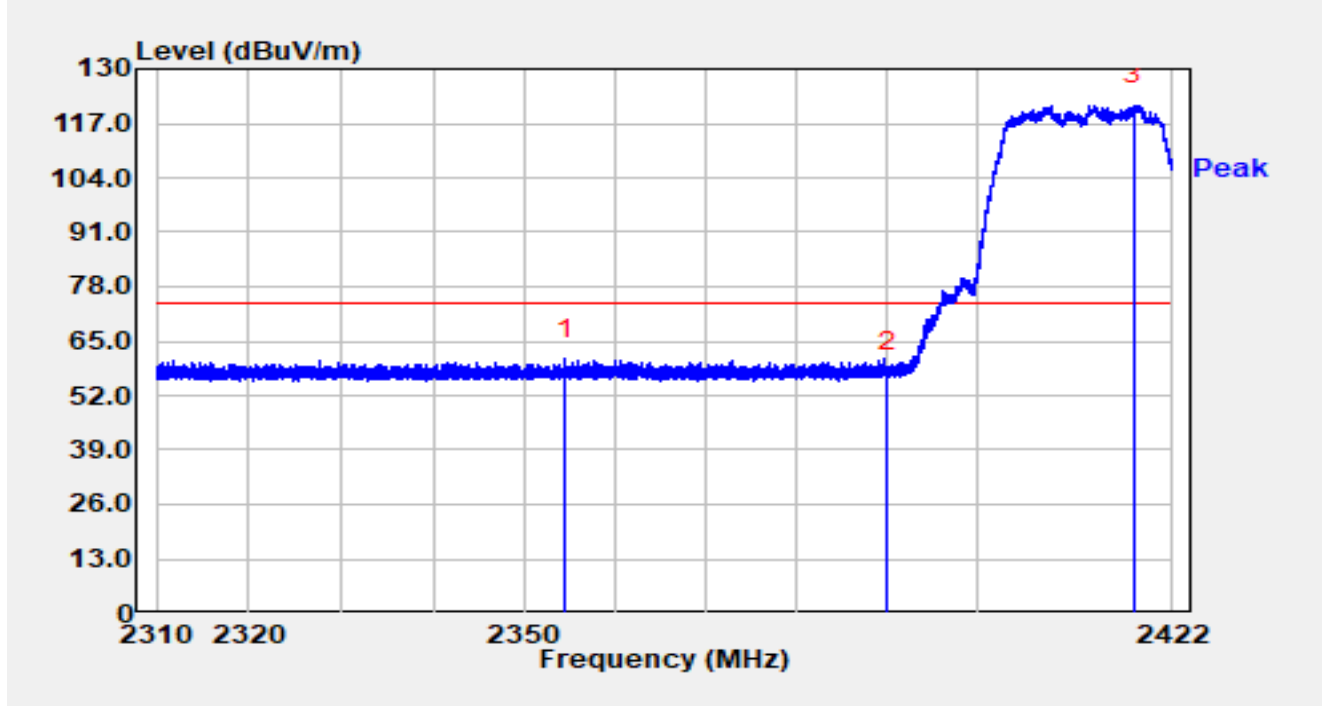


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2354.43	27.25	33.53	60.77	-13.23	74.00	Peak
2		2390.00	24.30	33.38	57.67	-16.33	74.00	Peak
3		2417.67	88.01	33.32	121.32	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-03-23
Temperature	15.6 °C	Humidity	48.9 %
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	Giga Hub 2.0	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11n-HT20 at 2412MHz		

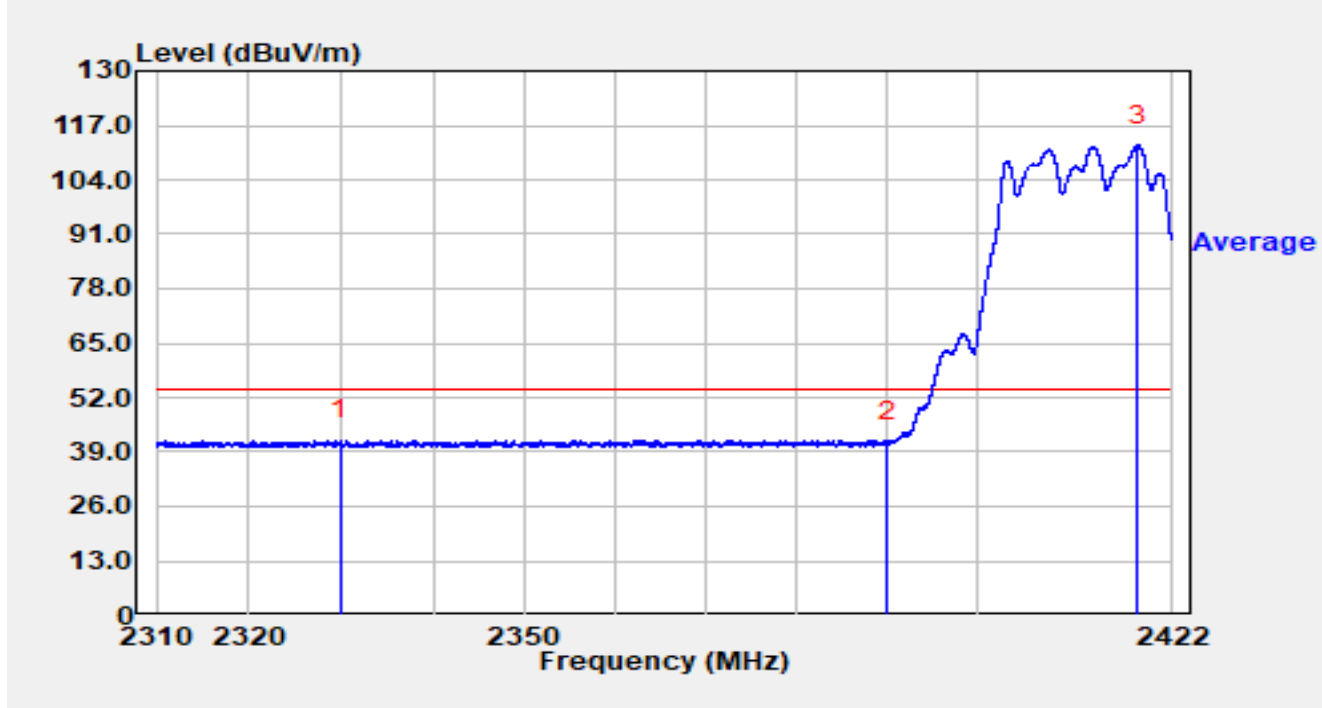


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1	*	2329.90	8.21	33.63	41.83	-12.17	54.00	Average
2		2390.00	8.13	33.38	41.50	-12.50	54.00	Average
3		2417.99	78.96	33.32	112.27	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-03-23
Temperature	15.6 °C	Humidity	48.9 %
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	Giga Hub 2.0	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11n-HT20 at 2462MHz		

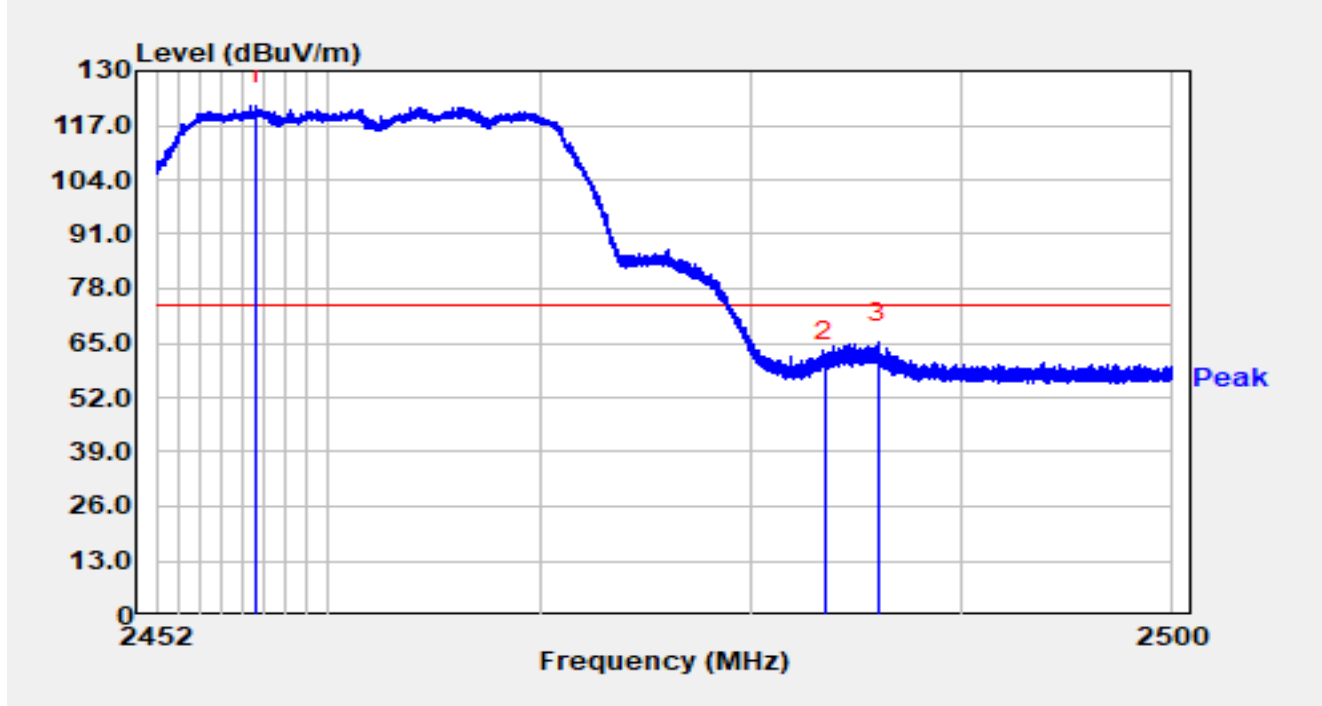


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1		2456.66	88.58	33.29	121.87	N/A	N/A	Peak
2		2483.50	27.16	33.25	60.42	-13.58	74.00	Peak
3	*	2486.01	31.88	33.27	65.15	-8.85	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-03-23
Temperature	15.6 °C	Humidity	48.9 %
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	Giga Hub 2.0	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11n-HT20 at 2462MHz		

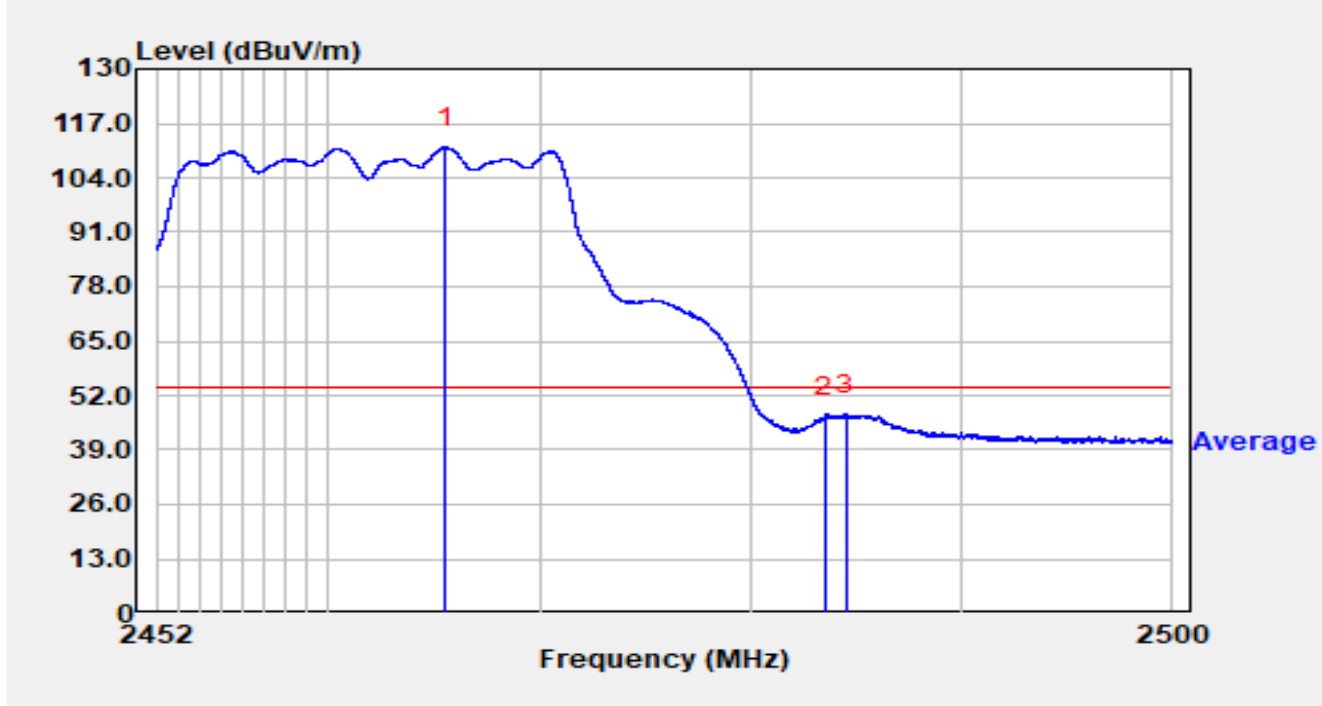


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2465.59	77.98	33.28	111.26	N/A	N/A	Average
2		2483.50	13.68	33.25	46.93	-7.07	54.00	Average
3	*	2484.51	14.24	33.26	47.49	-6.51	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-03-23
Temperature	15.6 °C	Humidity	48.9 %
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	Giga Hub 2.0	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11n-HT20 at 2462MHz		

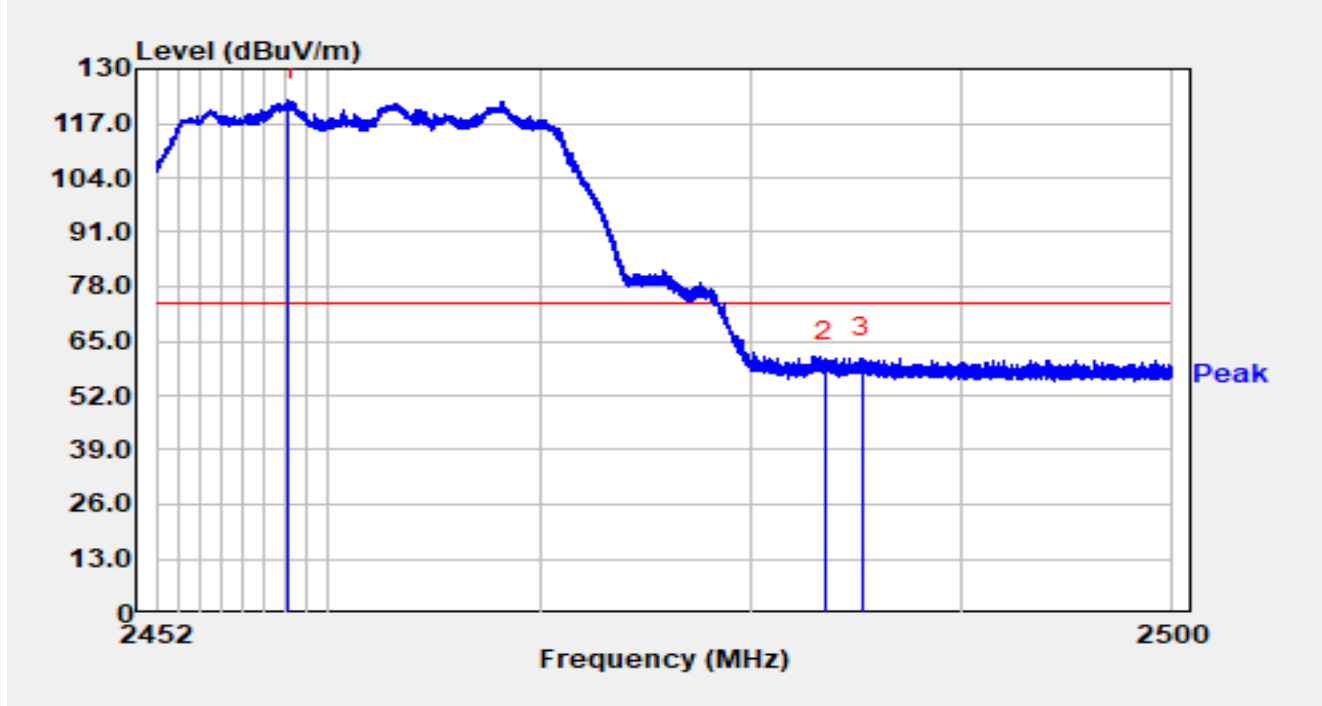


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2458.17	89.26	33.29	122.55	N/A	N/A	Peak
2		2483.50	26.68	33.25	59.93	-14.07	74.00	Peak
3	*	2485.21	27.77	33.26	61.03	-12.97	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-03-23
Temperature	15.6 °C	Humidity	48.9 %
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	Giga Hub 2.0	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11n-HT20 at 2462MHz		

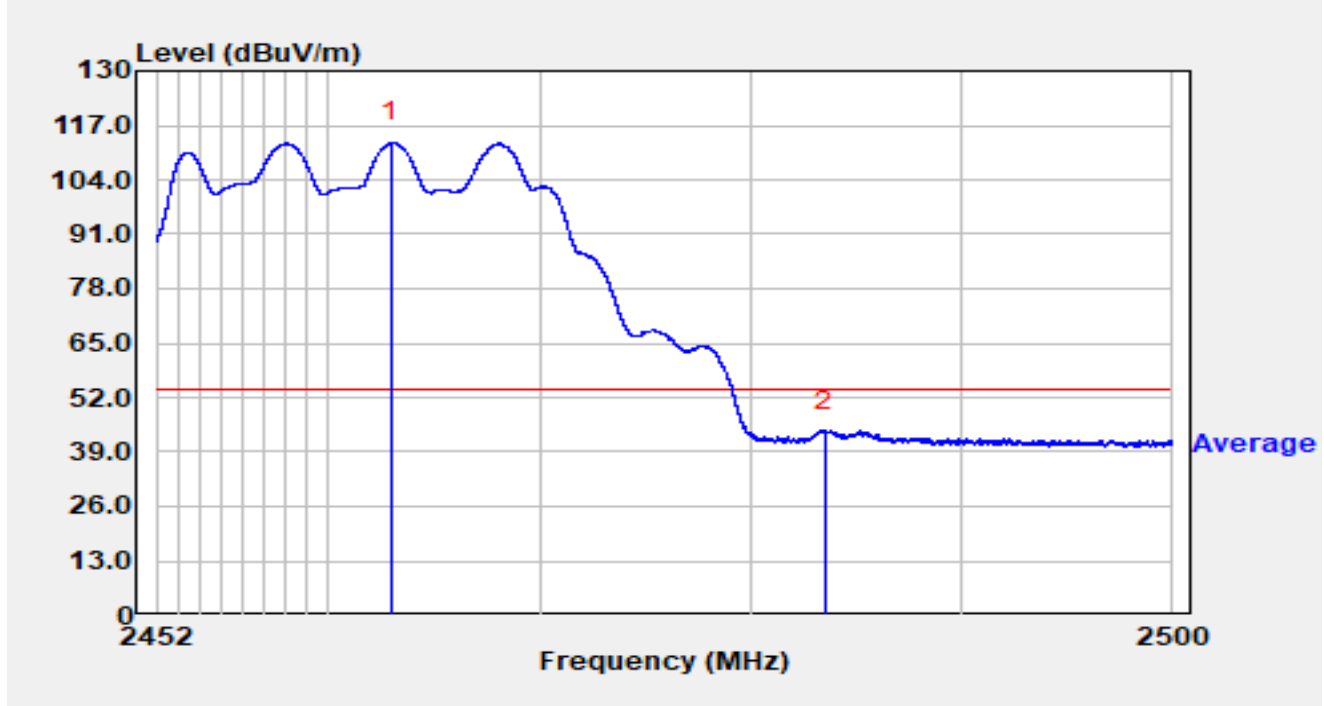


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2463.02	79.54	33.29	112.83	N/A	N/A	Average
2	*	2483.50	10.75	33.25	44.00	-10.00	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-03-23
Temperature	15.6 °C	Humidity	48.9 %
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	Giga Hub 2.0	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11n-HT40 at 2422MHz		

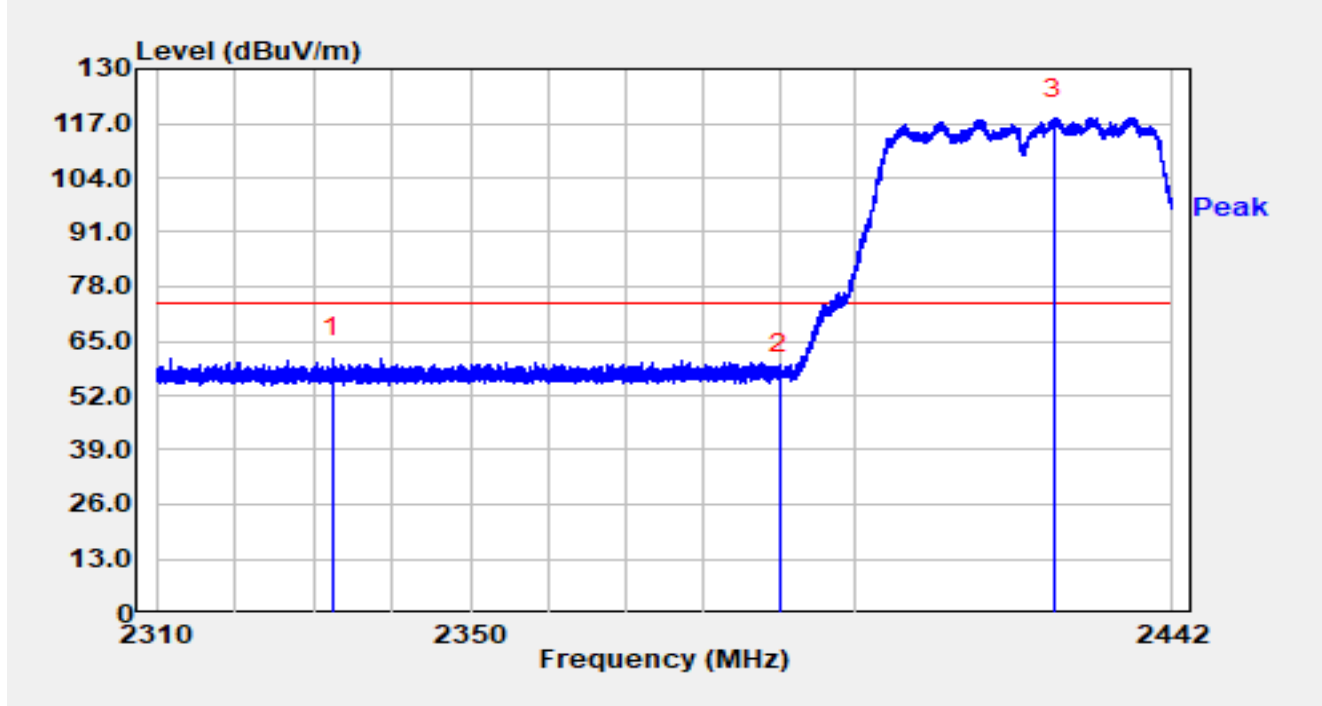


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2332.39	27.30	33.61	60.91	-13.09	74.00	Peak
2		2390.00	23.70	33.38	57.08	-16.92	74.00	Peak
3		2426.23	84.83	33.36	118.19	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-03-23
Temperature	15.6 °C	Humidity	48.9 %
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	Giga Hub 2.0	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11n-HT40 at 2422MHz		

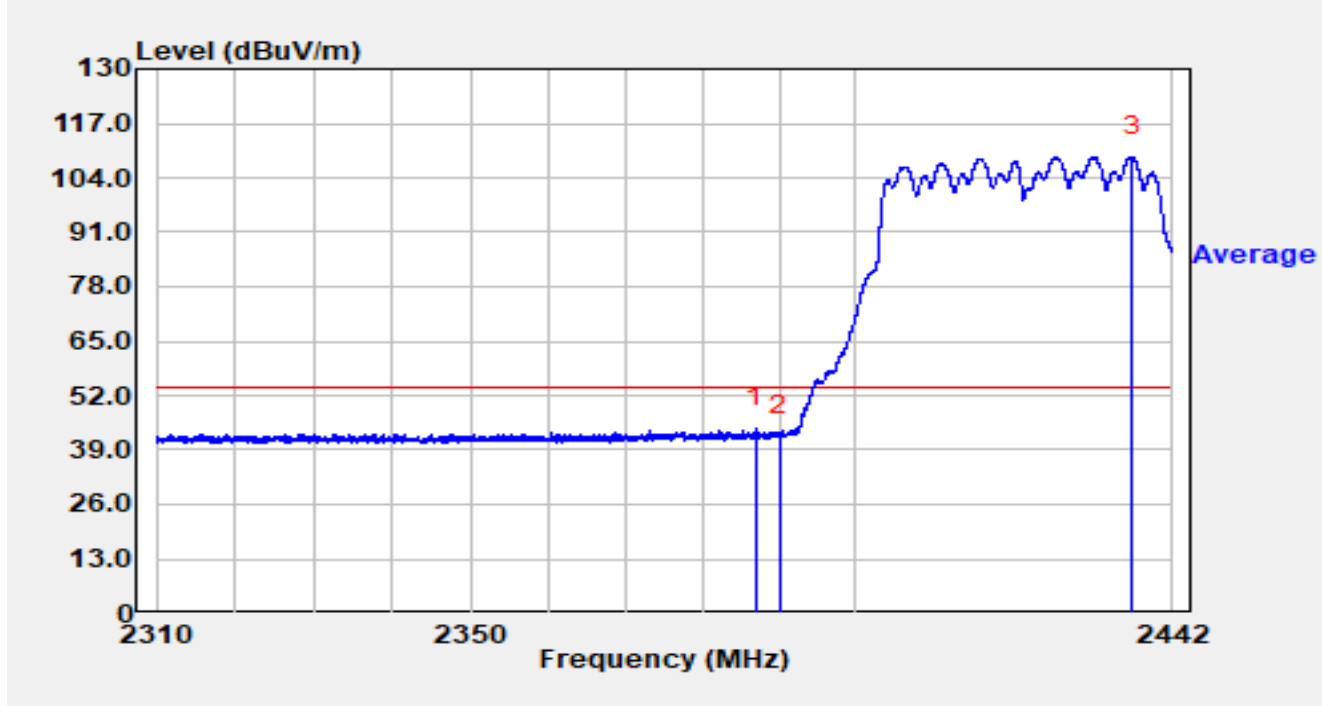


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2386.94	10.96	33.39	44.34	-9.66	54.00	Average
2		2390.00	9.15	33.38	42.53	-11.47	54.00	Average
3		2436.58	75.66	33.32	108.97	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-03-23
Temperature	15.6 °C	Humidity	48.9 %
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	Giga Hub 2.0	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11n-HT40 at 2422MHz		

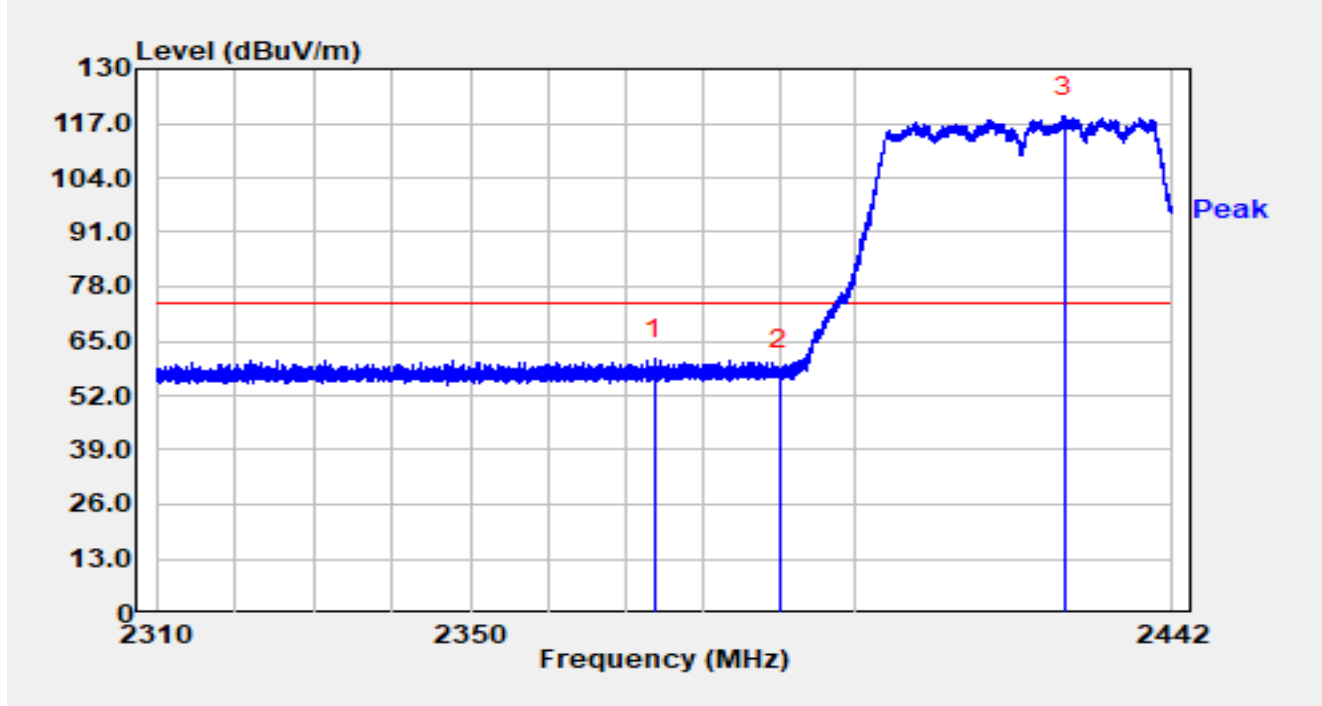


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2373.77	27.17	33.45	60.62	-13.38	74.00	Peak
2		2390.00	24.83	33.38	58.21	-15.79	74.00	Peak
3		2427.63	85.28	33.36	118.64	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-03-23
Temperature	15.6 °C	Humidity	48.9 %
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	Giga Hub 2.0	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11n-HT40 at 2422MHz		

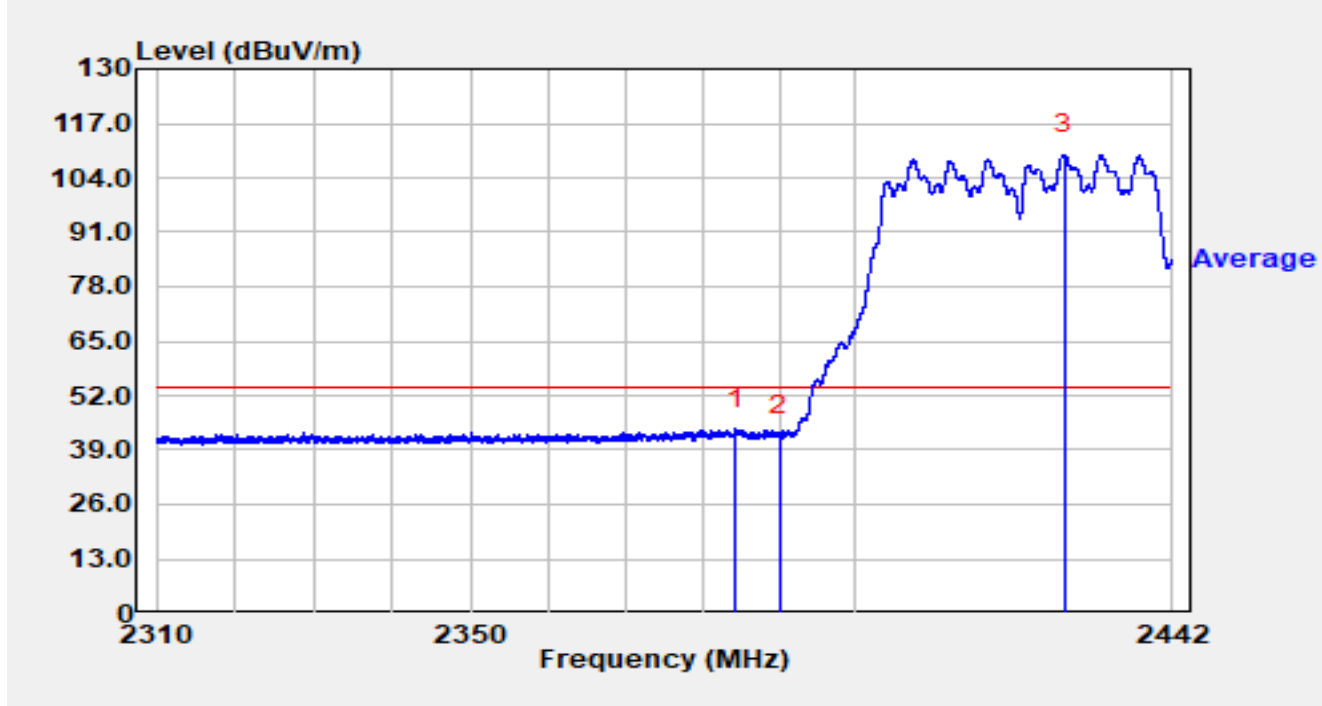


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2384.33	10.65	33.40	44.05	-9.95	54.00	Average
2		2390.00	9.11	33.38	42.49	-11.51	54.00	Average
3		2427.61	76.16	33.36	109.53	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-03-23
Temperature	15.6 °C	Humidity	48.9 %
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	Giga Hub 2.0	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11n-HT40 at 2452MHz		

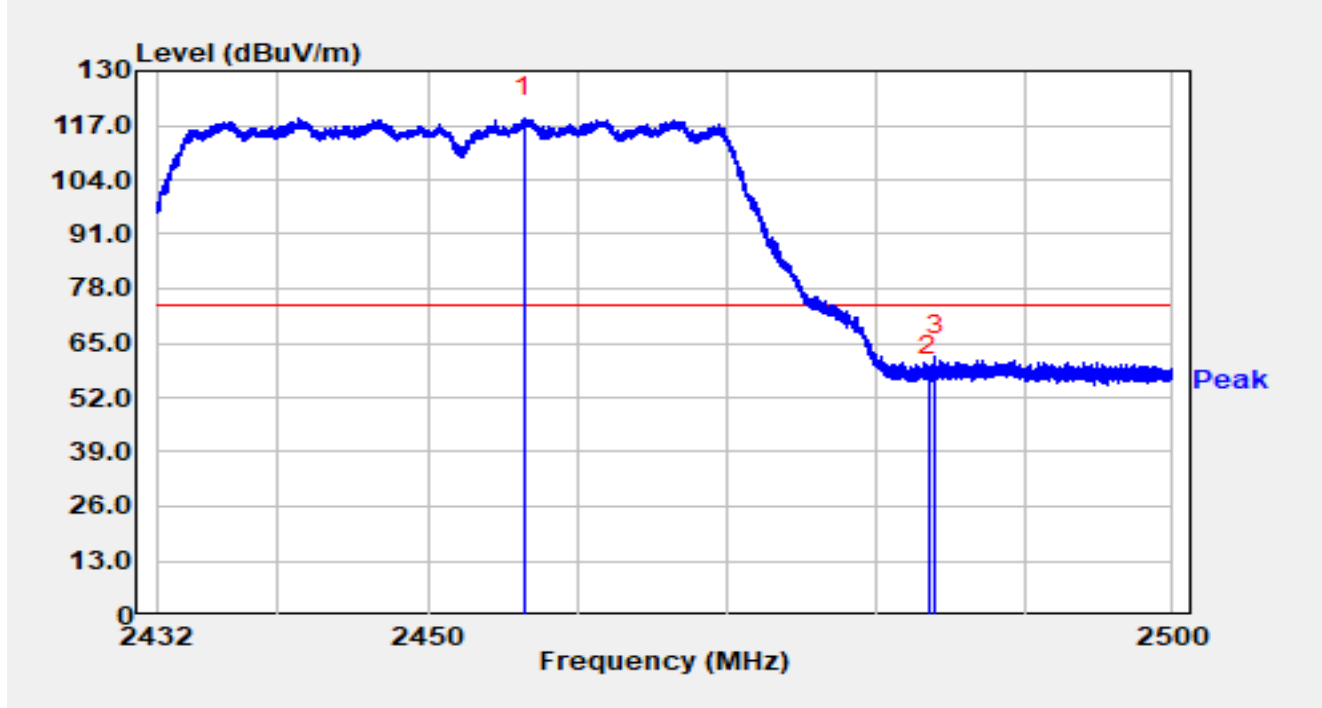


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2456.35	85.54	33.29	118.83	N/A	N/A	Peak
2		2483.50	24.10	33.25	57.35	-16.65	74.00	Peak
3	*	2483.96	28.72	33.25	61.97	-12.03	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-03-23
Temperature	15.6 °C	Humidity	48.9 %
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	Giga Hub 2.0	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11n-HT40 at 2452MHz		

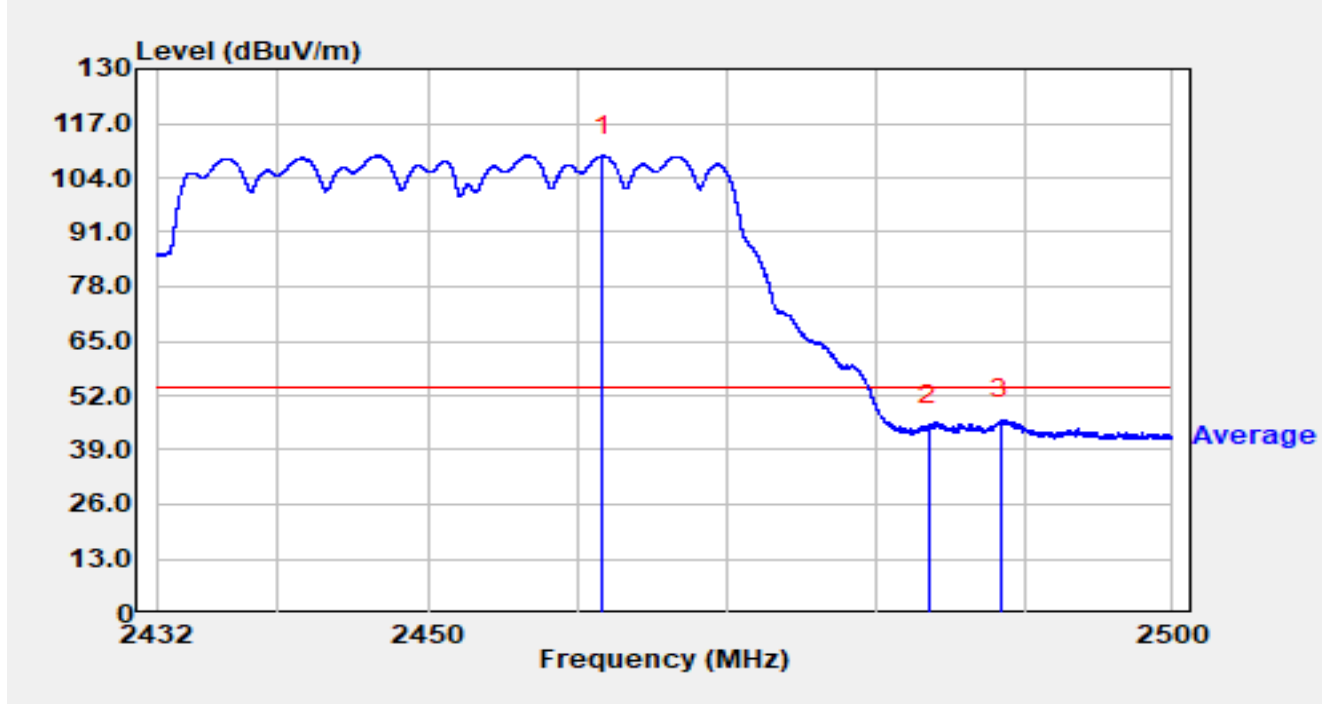


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2461.65	76.03	33.30	109.33	N/A	N/A	Average
2		2483.50	11.41	33.25	44.66	-9.34	54.00	Average
3	*	2488.35	12.91	33.28	46.19	-7.81	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-03-23
Temperature	15.6 °C	Humidity	48.9 %
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	Giga Hub 2.0	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11n-HT40 at 2452MHz		

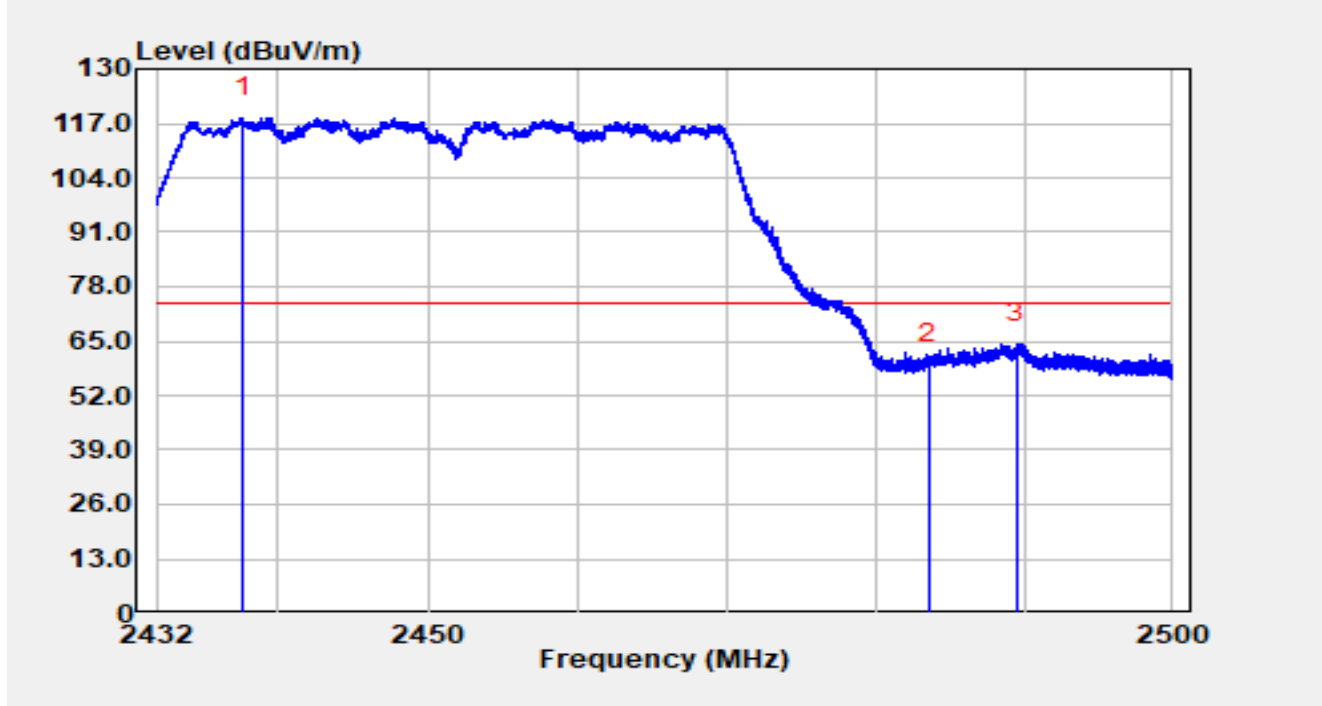


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2437.77	85.13	33.31	118.44	N/A	N/A	Peak
2		2483.50	26.24	33.25	59.49	-14.51	74.00	Peak
3	*	2489.46	31.06	33.29	64.35	-9.65	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-03-23
Temperature	15.6 °C	Humidity	48.9 %
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	Giga Hub 2.0	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11n-HT40 at 2452MHz		

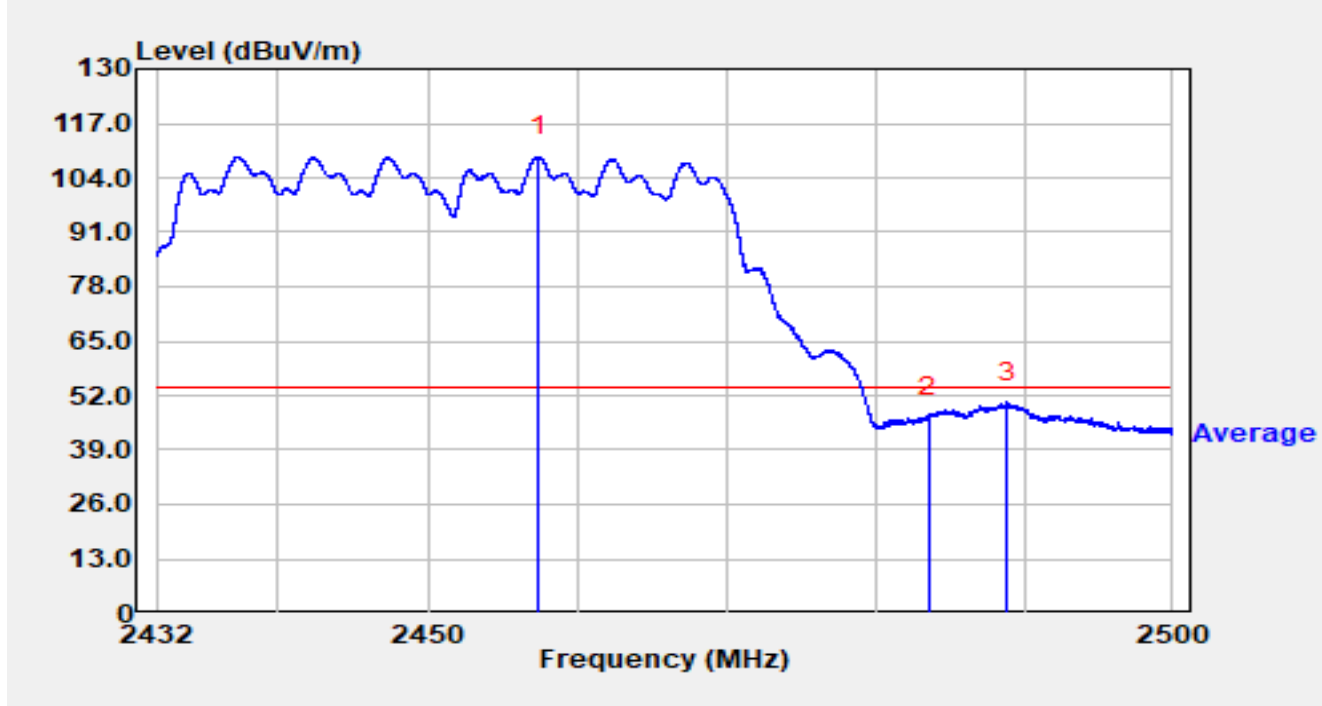


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1		2457.32	75.70	33.29	108.99	N/A	N/A	Average
2		2483.50	13.81	33.25	47.06	-6.94	54.00	Average
3	*	2488.83	17.04	33.28	50.32	-3.68	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-03-23
Temperature	15.6 °C	Humidity	48.9 %
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	Giga Hub 2.0	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 2412MHz		

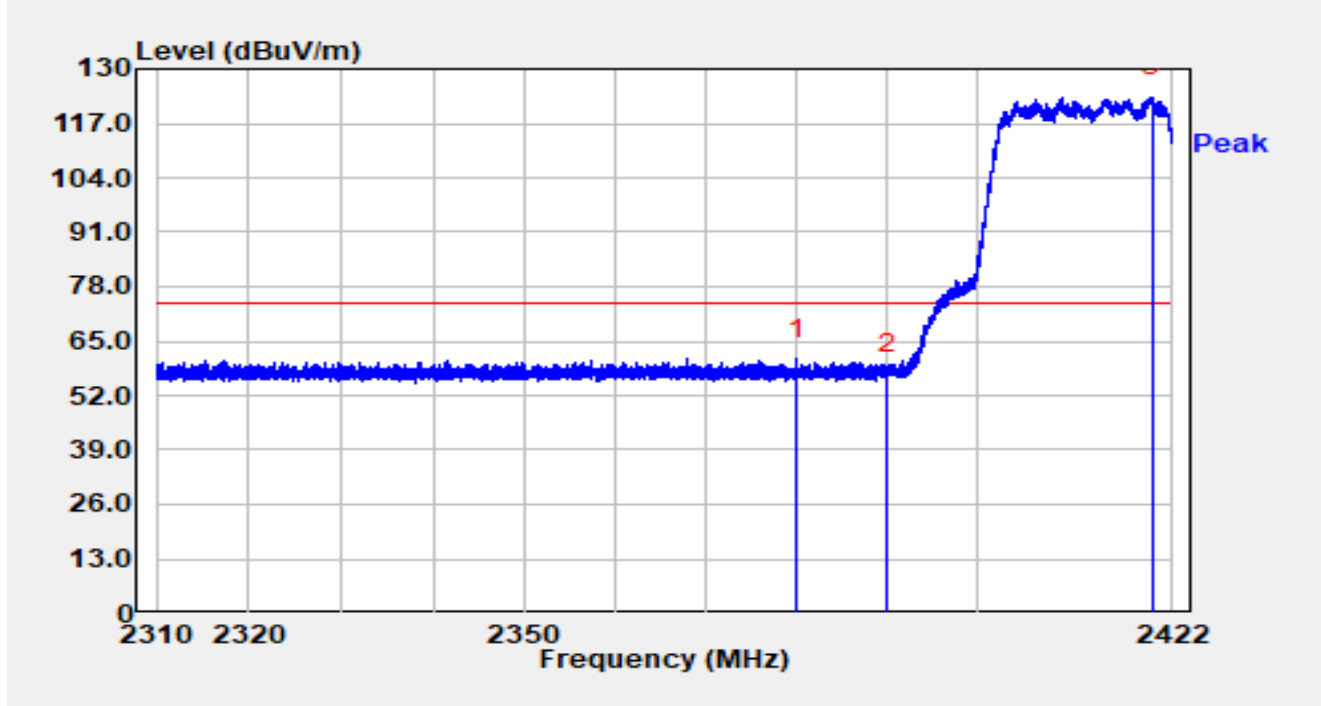


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2379.96	27.26	33.42	60.67	-13.33	74.00	Peak
2		2390.00	23.65	33.38	57.02	-16.98	74.00	Peak
3		2419.74	89.97	33.32	123.30	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-03-23
Temperature	15.6 °C	Humidity	48.9 %
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	Giga Hub 2.0	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 2412MHz		

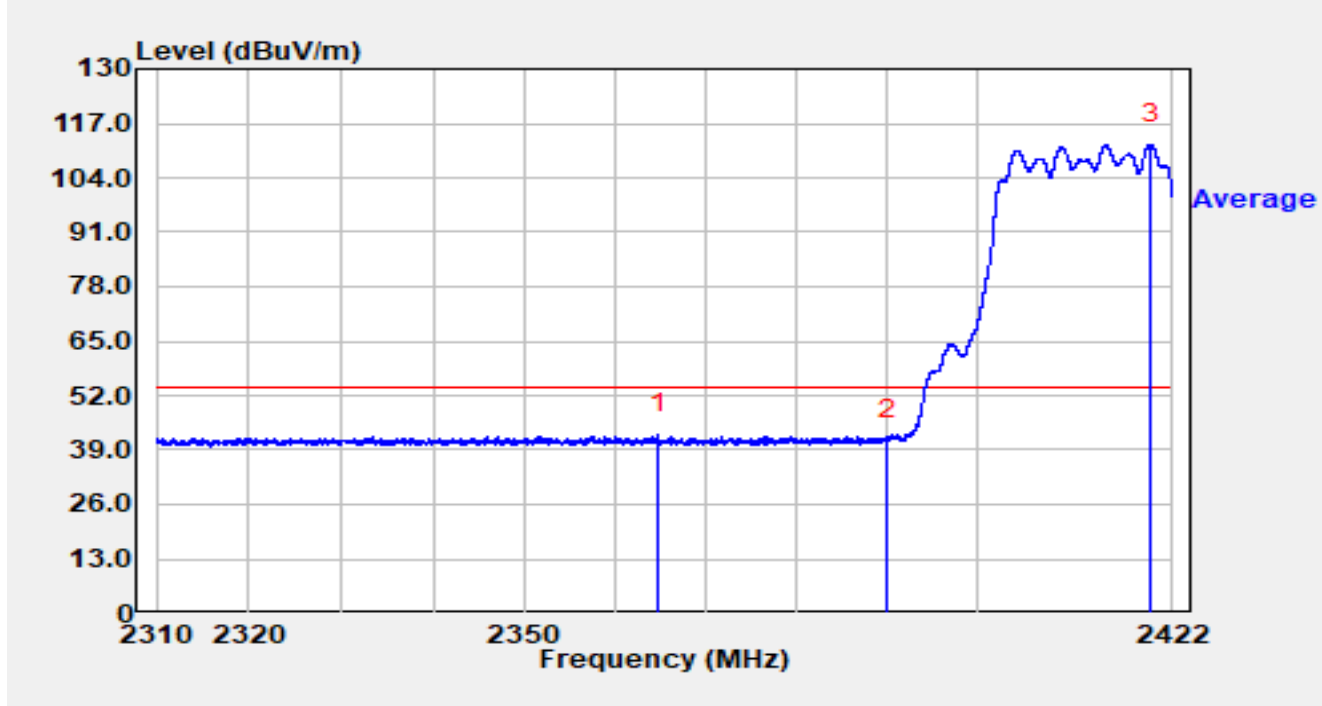


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2364.62	9.34	33.51	42.84	-11.16	54.00	Average
2		2390.00	8.05	33.38	41.43	-12.57	54.00	Average
3		2419.58	78.59	33.32	111.91	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-03-23
Temperature	15.6 °C	Humidity	48.9 %
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	Giga Hub 2.0	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 2412MHz		

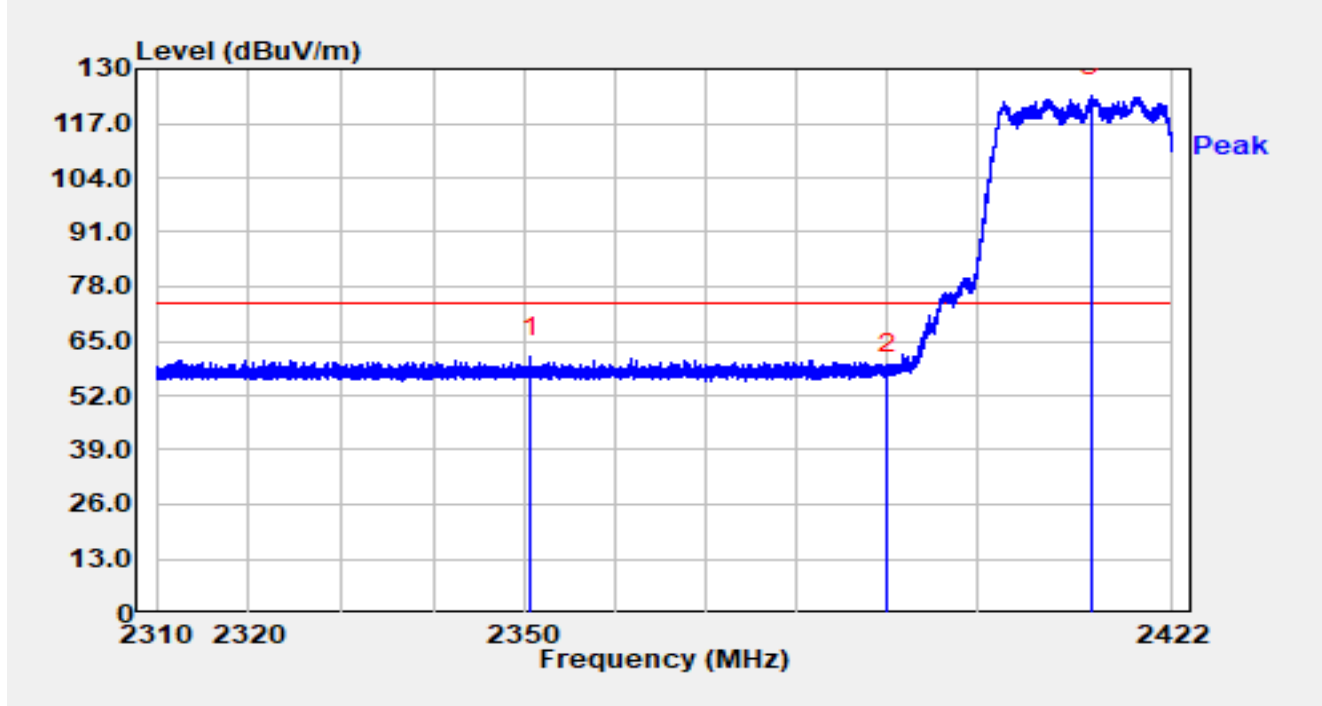


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2350.63	27.63	33.52	61.15	-12.85	74.00	Peak
2		2390.00	23.66	33.38	57.04	-16.96	74.00	Peak
3		2412.77	90.16	33.30	123.46	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-03-23
Temperature	15.6 °C	Humidity	48.9 %
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	Giga Hub 2.0	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 2412MHz		

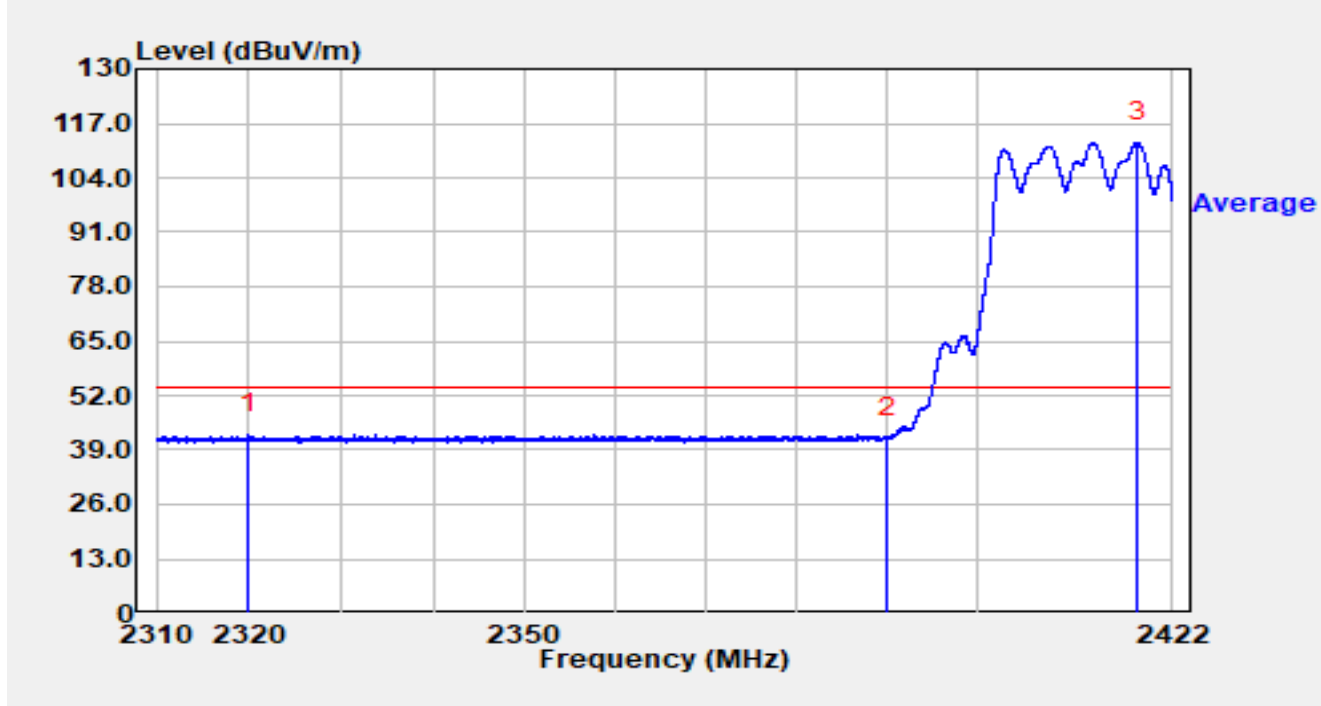


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2319.96	9.20	33.65	42.85	-11.15	54.00	Average
2		2390.00	8.39	33.38	41.76	-12.24	54.00	Average
3		2417.99	79.11	33.32	112.42	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-03-23
Temperature	15.6 °C	Humidity	48.9 %
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	Giga Hub 2.0	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 2462MHz		

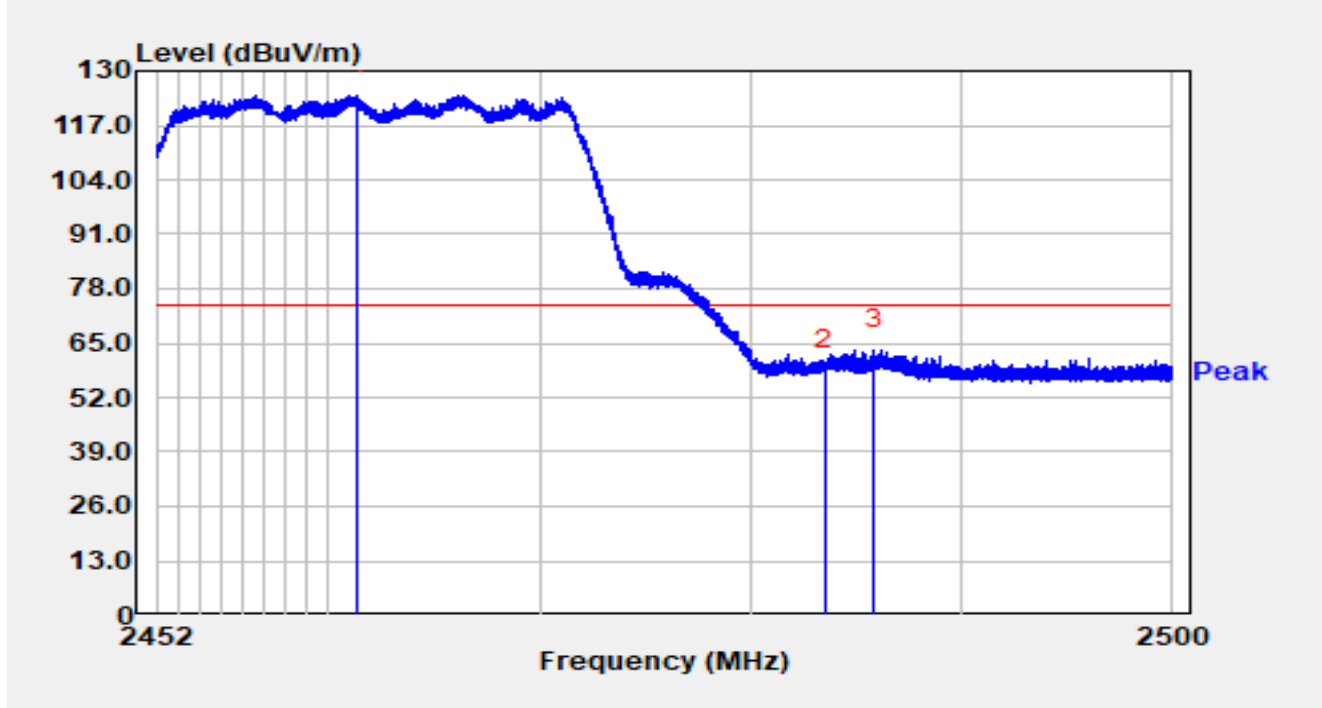


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2461.42	90.82	33.30	124.12	N/A	N/A	Peak
2		2483.50	25.13	33.25	58.38	-15.62	74.00	Peak
3	*	2485.83	30.08	33.26	63.35	-10.65	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-03-23
Temperature	15.6 °C	Humidity	48.9 %
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	Giga Hub 2.0	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 2462MHz		

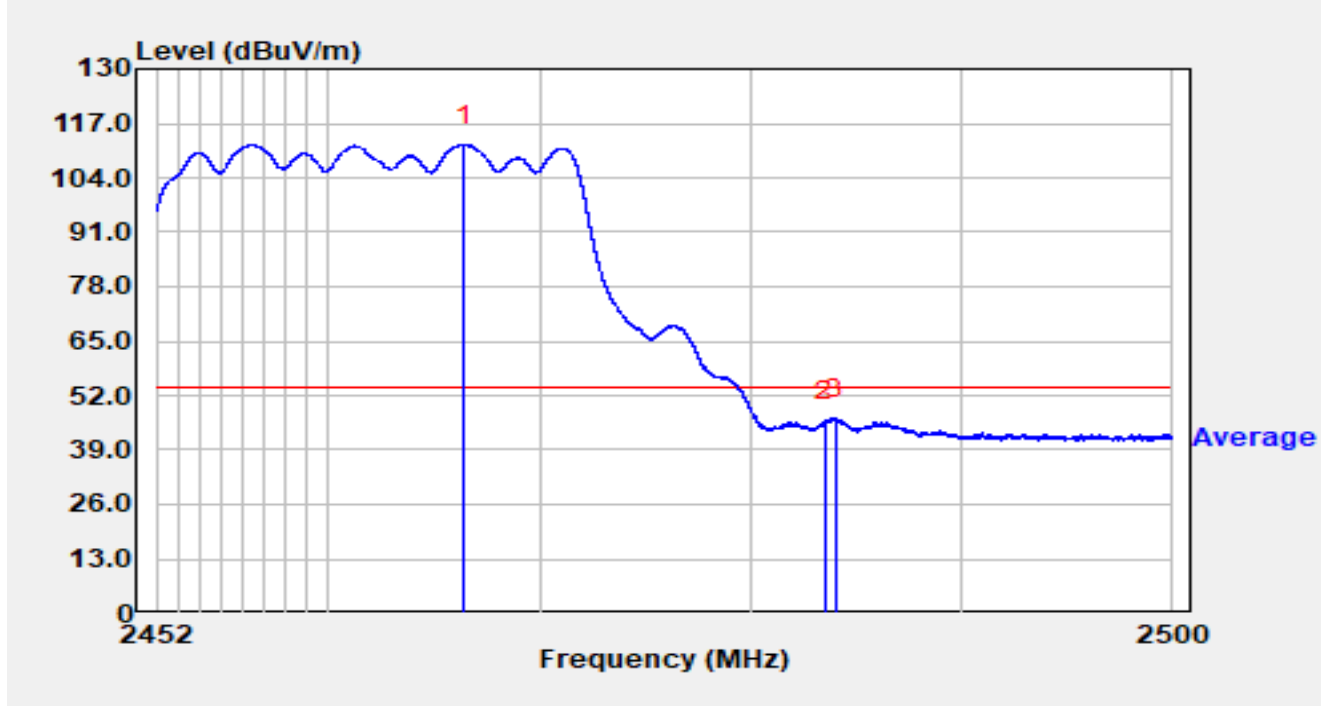


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2466.43	78.57	33.28	111.85	N/A	N/A	Average
2		2483.50	12.66	33.25	45.91	-8.09	54.00	Average
3	*	2483.96	13.30	33.25	46.55	-7.45	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-03-23
Temperature	15.6 °C	Humidity	48.9 %
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	Giga Hub 2.0	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 2462MHz		

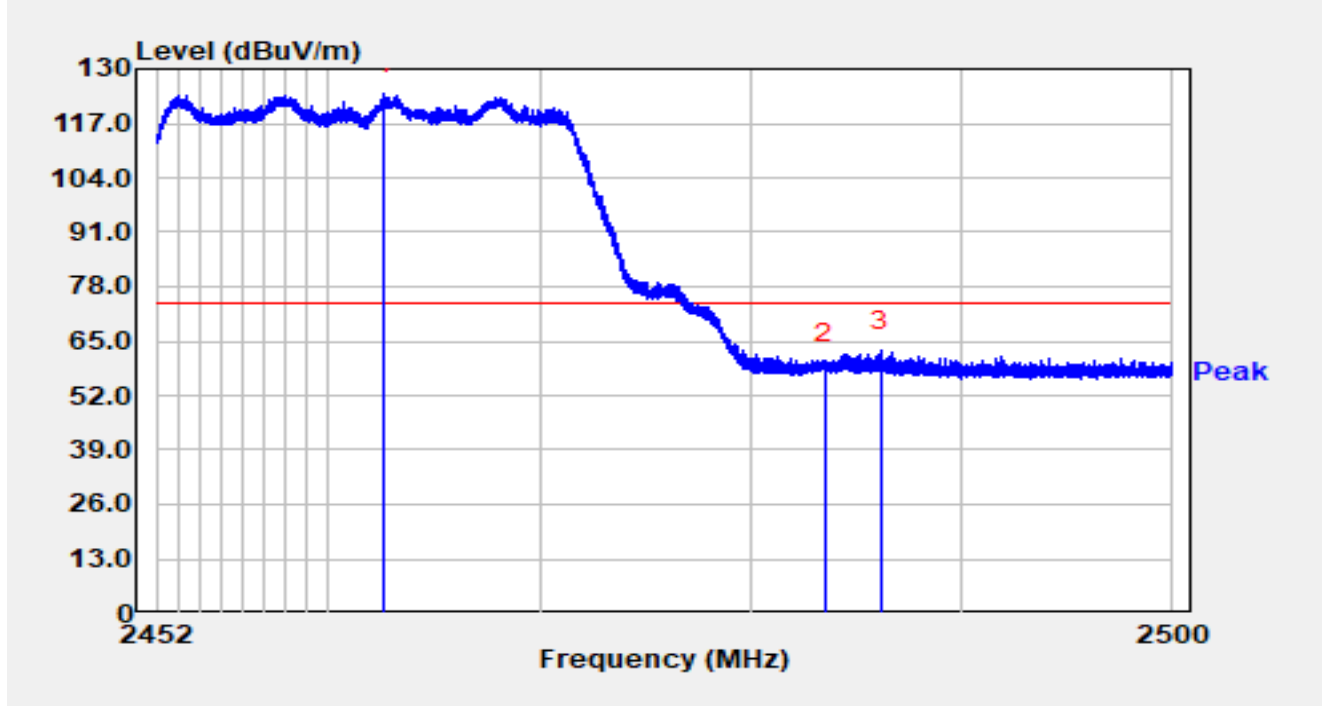


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2462.68	90.68	33.29	123.97	N/A	N/A	Peak
2		2483.50	26.45	33.25	59.70	-14.30	74.00	Peak
3	*	2486.13	29.37	33.27	62.64	-11.36	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-03-23
Temperature	15.6 °C	Humidity	48.9 %
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	Giga Hub 2.0	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT20 at 2462MHz		

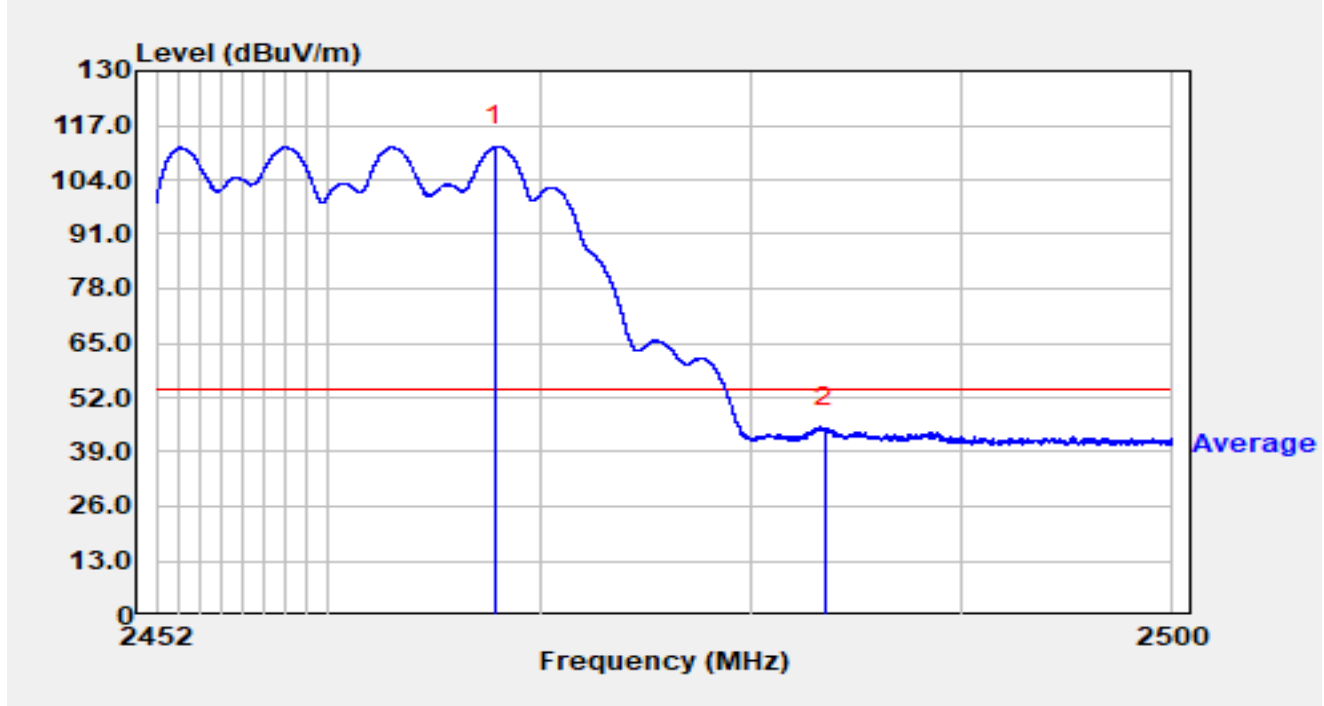


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2467.86	78.71	33.27	111.98	N/A	N/A	Average
2	*	2483.50	11.50	33.25	44.76	-9.24	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-03-23
Temperature	15.6 °C	Humidity	48.9 %
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	Giga Hub 2.0	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 2422MHz		

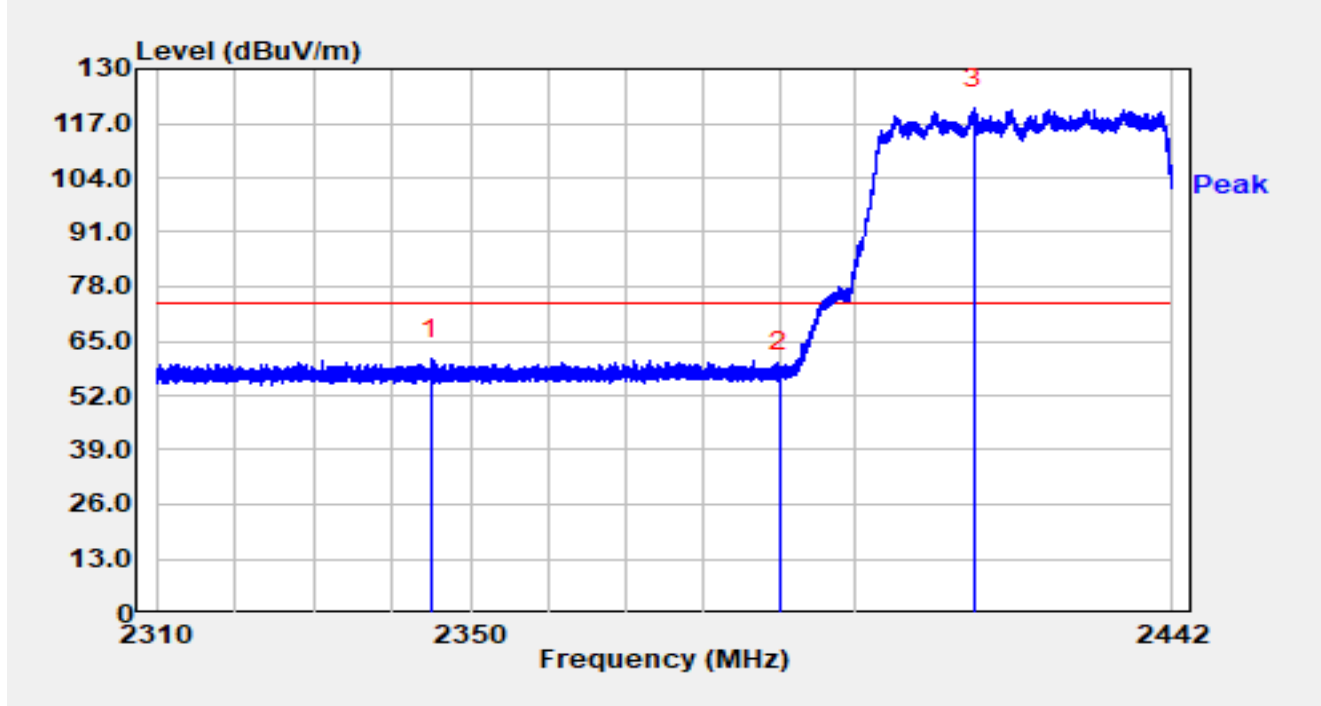


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2344.97	27.29	33.52	60.80	-13.20	74.00	Peak
2		2390.00	24.16	33.38	57.53	-16.47	74.00	Peak
3		2415.59	87.32	33.31	120.63	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-03-23
Temperature	15.6 °C	Humidity	48.9 %
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	Giga Hub 2.0	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 2422MHz		

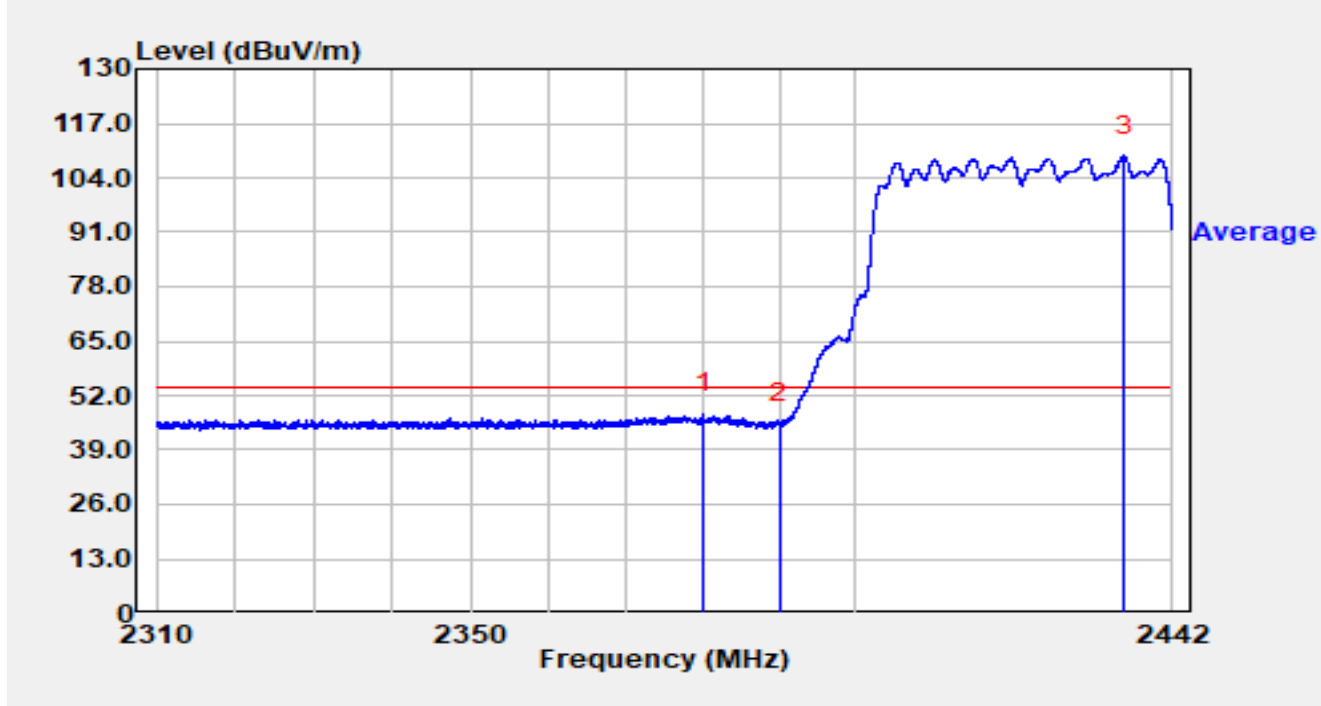


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2380.12	14.31	33.42	47.72	-6.28	54.00	Average
2		2390.00	11.93	33.38	45.31	-8.69	54.00	Average
3		2435.52	76.01	33.32	109.33	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-03-23
Temperature	15.6 °C	Humidity	48.9 %
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	Giga Hub 2.0	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 2422MHz		

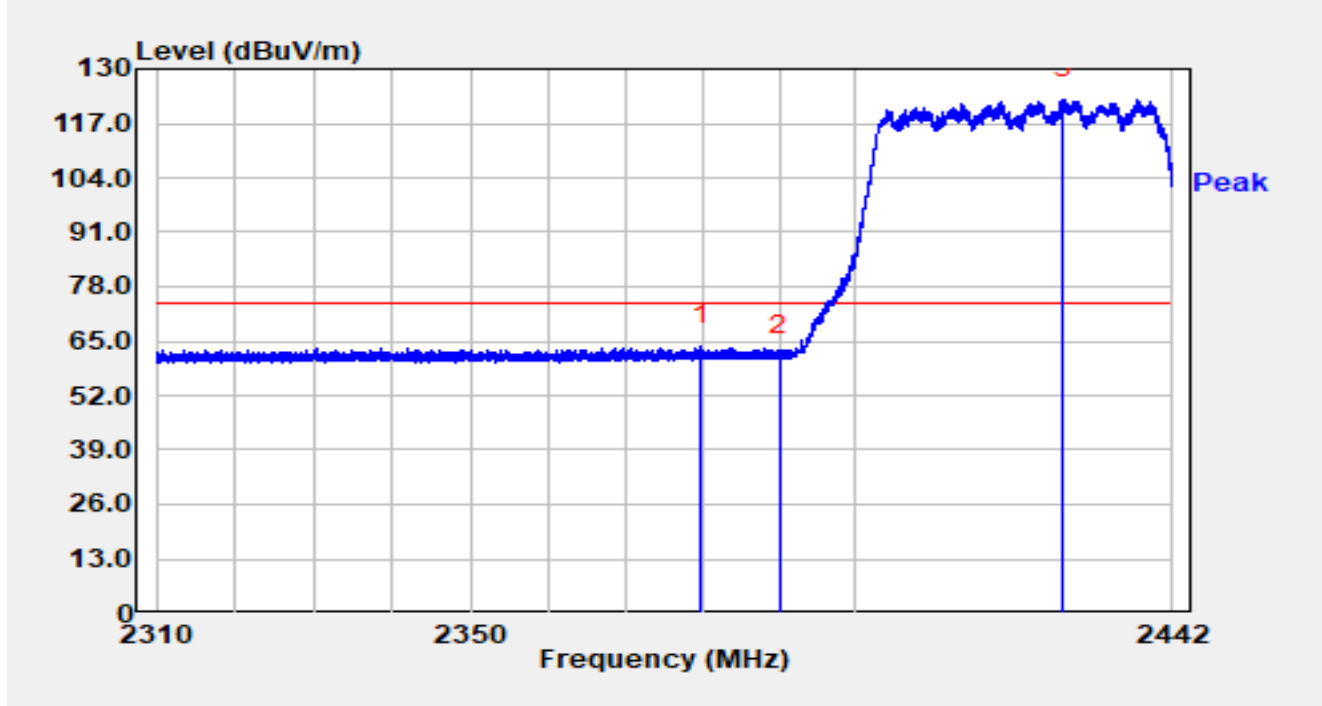


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2379.83	30.44	33.42	63.85	-10.15	74.00	Peak
2		2390.00	27.99	33.38	61.37	-12.63	74.00	Peak
3		2427.38	89.44	33.36	122.80	N/A	N/A	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-03-23
Temperature	15.6 °C	Humidity	48.9 %
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	Giga Hub 2.0	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 2422MHz		

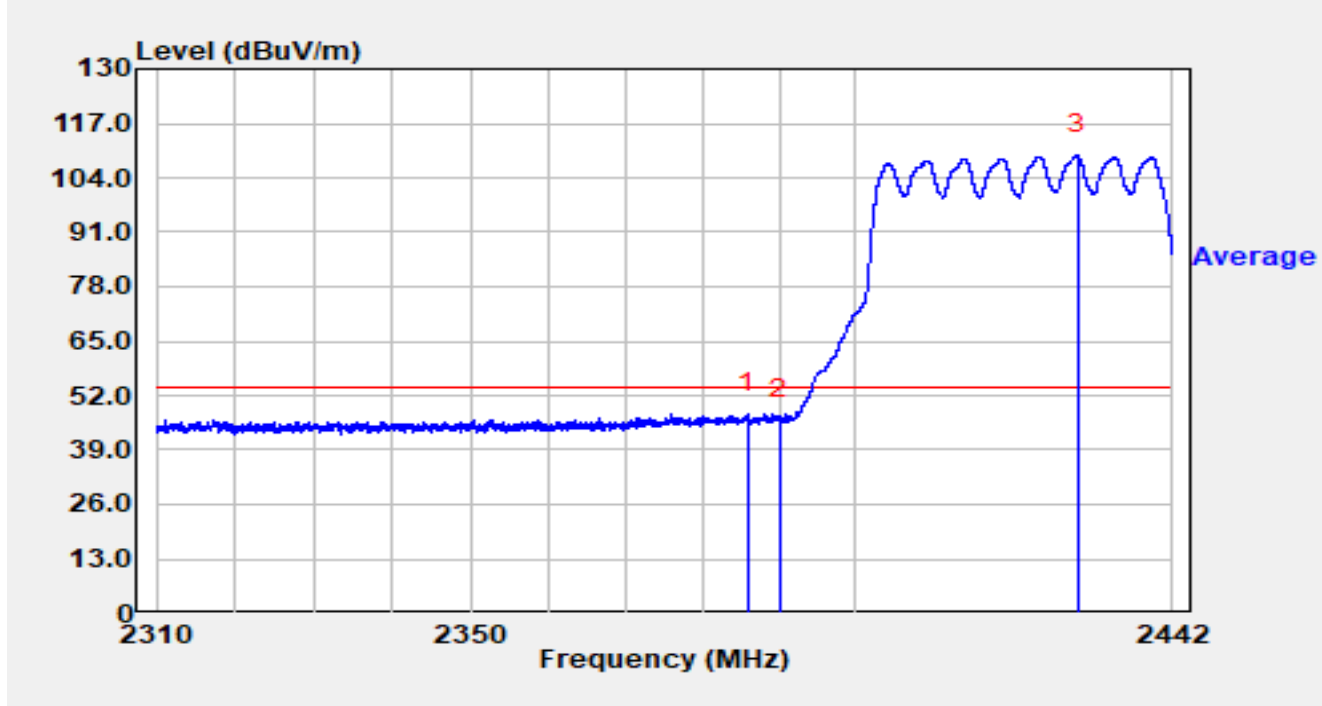


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	2385.94	14.40	33.39	47.80	-6.20	54.00	Average
2		2390.00	12.75	33.38	46.13	-7.87	54.00	Average
3		2429.35	76.20	33.36	109.56	N/A	N/A	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-03-23
Temperature	15.6 °C	Humidity	48.9 %
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	Giga Hub 2.0	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 2452MHz		

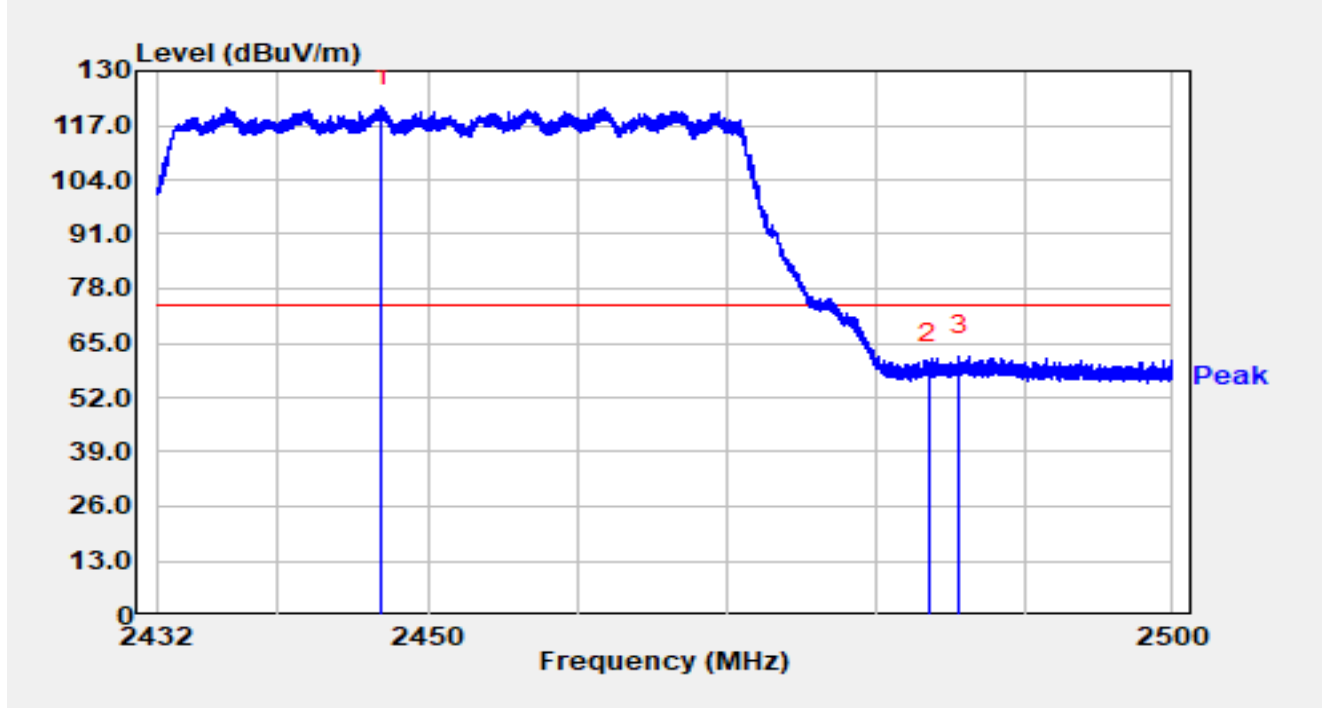


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2446.91	88.36	33.27	121.64	N/A	N/A	Peak
2		2483.50	26.92	33.25	60.17	-13.83	74.00	Peak
3	*	2485.58	28.63	33.26	61.89	-12.11	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-03-23
Temperature	15.6 °C	Humidity	48.9 %
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Horizontal
EUT	Giga Hub 2.0	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 2452MHz		

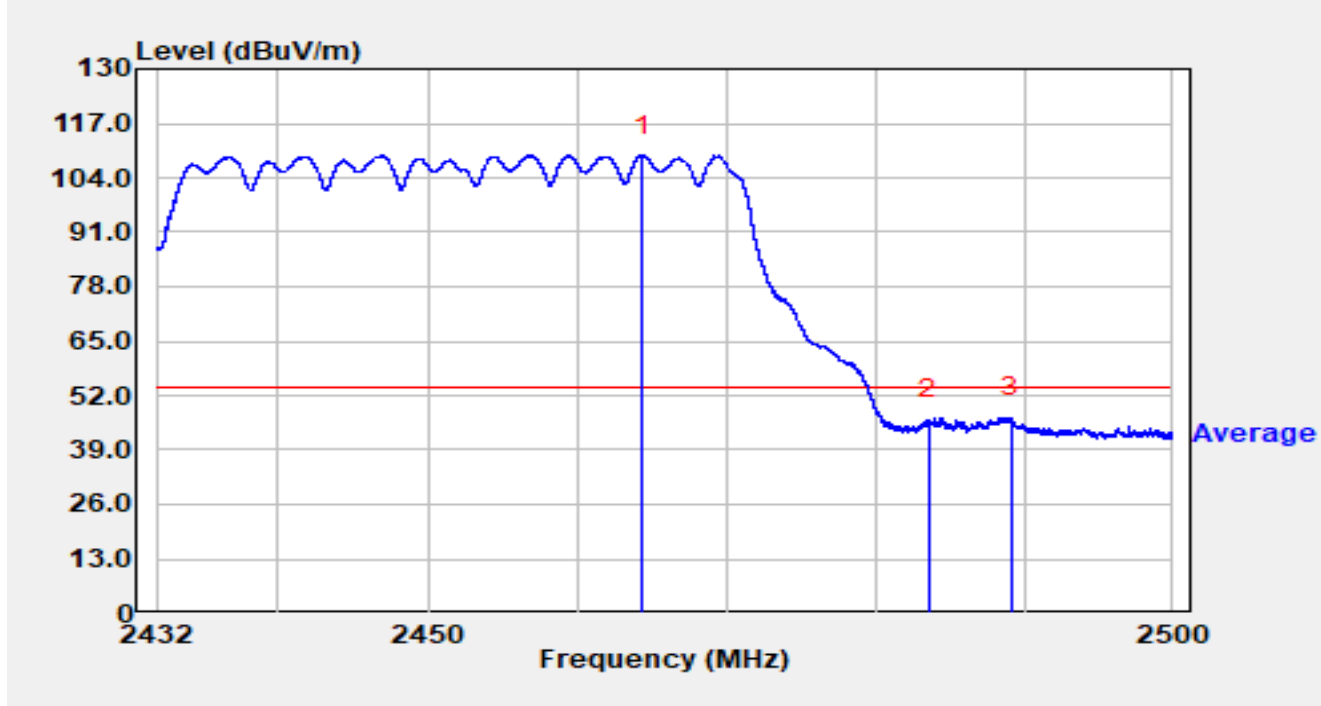


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2464.29	76.09	33.29	109.37	N/A	N/A	Average
2		2483.50	12.86	33.25	46.12	-7.88	54.00	Average
3	*	2489.06	13.53	33.28	46.82	-7.18	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-03-23
Temperature	15.6 °C	Humidity	48.9 %
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	Giga Hub 2.0	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 2452MHz		

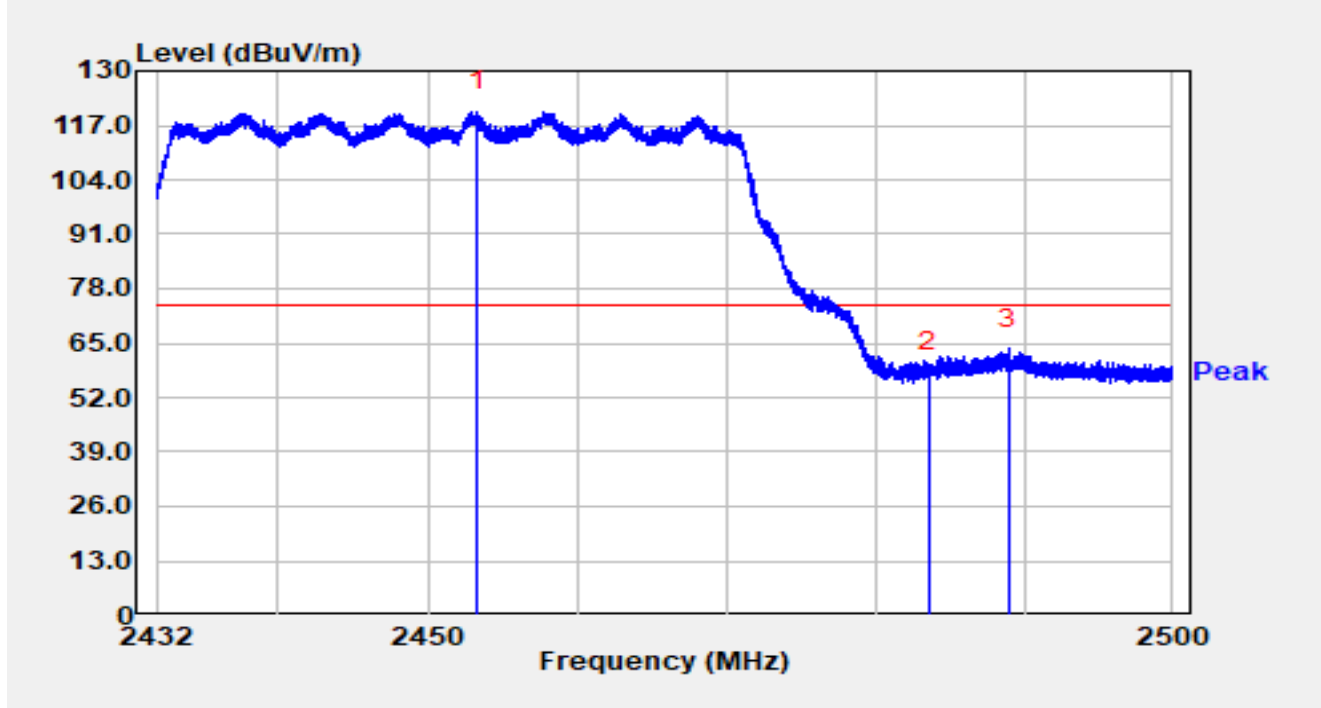


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2453.32	86.91	33.28	120.19	N/A	N/A	Peak
2		2483.50	24.75	33.25	58.00	-16.00	74.00	Peak
3	*	2488.90	30.29	33.28	63.57	-10.43	74.00	Peak

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC2	Test Date	2025-03-23
Temperature	15.6 °C	Humidity	48.9 %
Limit	FCC_Part 15_Band Edge(3m)	Test Engineer	Mero Zhou
Factor	BBHA 9120D_02042	Polarity	Vertical
EUT	Giga Hub 2.0	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11be-EHT40 at 2452MHz		

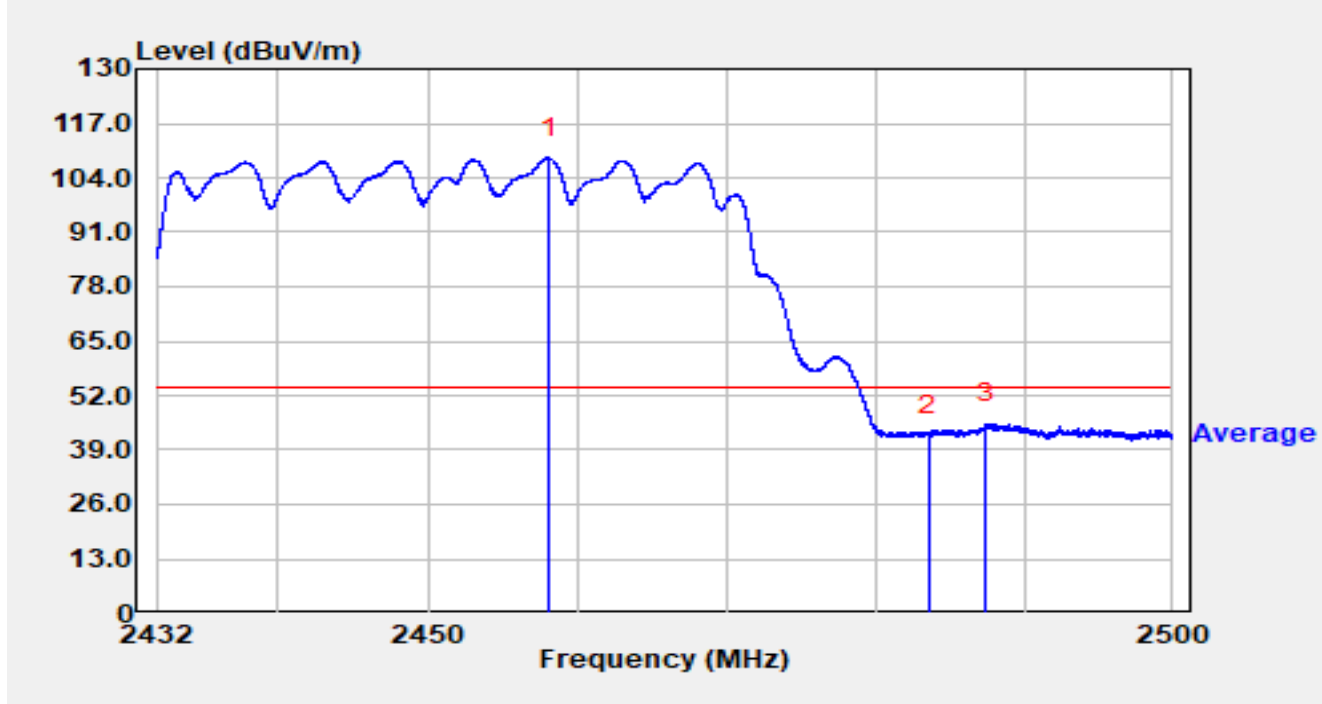


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		2458.05	75.54	33.29	108.84	N/A	N/A	Average
2		2483.50	9.20	33.25	42.45	-11.55	54.00	Average
3	*	2487.41	12.01	33.27	45.28	-8.72	54.00	Average

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

A.8 AC Conducted Emissions Test Result

Site	SIP-SR2	Test Date	2025-04-18
Temperature	24.9 °C	Humidity	51.1 %
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Henry Wang
Factor	ENV216_101684_C	Polarity	Line
EUT	Giga Hub 2.0	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11g at 2412MHz		

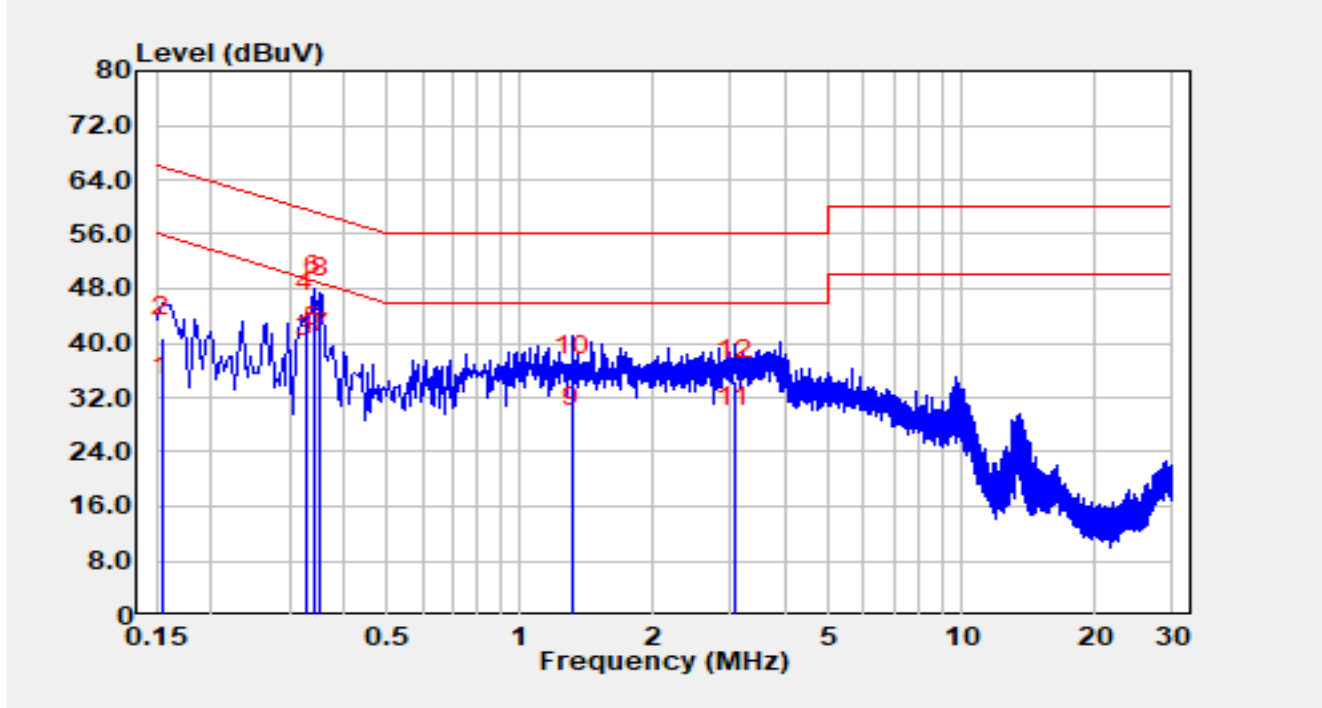


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.154	22.44	9.65	32.09	-23.69	55.78	Average
2		0.154	31.22	9.65	40.87	-24.91	65.78	QP
3		0.326	28.02	9.74	37.75	-11.80	49.55	Average
4		0.326	34.87	9.74	44.61	-14.94	59.55	QP
5	*	0.342	29.55	9.74	39.29	-9.87	49.16	Average
6		0.342	37.34	9.74	47.07	-12.08	59.16	QP
7		0.354	28.67	9.73	38.40	-10.47	48.87	Average
8		0.354	36.83	9.73	46.56	-12.31	58.87	QP
9		1.310	17.96	9.75	27.71	-18.29	46.00	Average
10		1.310	25.49	9.75	35.24	-20.76	56.00	QP
11		3.062	17.96	9.80	27.76	-18.24	46.00	Average
12		3.062	24.67	9.80	34.47	-21.53	56.00	QP

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
3. Measurement (dB μ V) = Reading (dB μ V) + C.F (dB).

Site	SIP-SR2	Test Date	2025-04-18
Temperature	24.9 °C	Humidity	51.1 %
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Henry Wang
Factor	ENV216_101684_C	Polarity	Neutral
EUT	Giga Hub 2.0	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by 802.11g at 2412MHz		

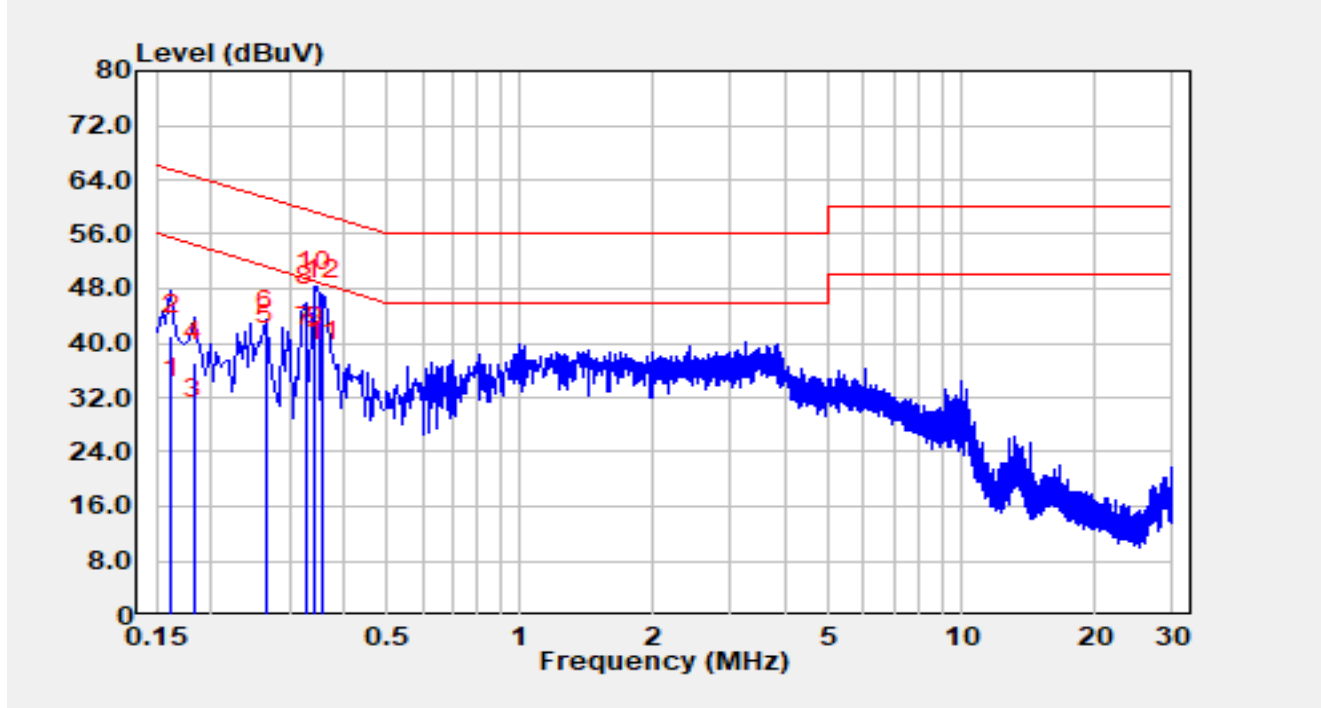

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.162	22.22	9.68	31.90	-23.46	55.36	Average
2		0.162	31.41	9.68	41.09	-24.27	65.36	QP
3		0.182	19.26	9.68	28.94	-25.46	54.39	Average
4		0.182	27.53	9.68	37.21	-27.18	64.39	QP
5		0.266	30.10	9.74	39.84	-11.40	51.24	Average
6		0.266	32.13	9.74	41.87	-19.37	61.24	QP
7		0.326	29.61	9.76	39.37	-10.18	49.55	Average
8		0.326	35.78	9.76	45.54	-14.02	59.55	QP
9	*	0.342	29.60	9.76	39.36	-9.79	49.15	Average
10		0.342	37.76	9.76	47.52	-11.63	59.15	QP
11		0.358	27.58	9.75	37.33	-11.44	48.77	Average
12		0.358	36.52	9.75	46.27	-12.50	58.77	QP

Notes:

1. " * ", means this data is the worst emission level.
2. C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
3. Measurement (dB μ V) = Reading (dB μ V) + C.F (dB).

Appendix B – Test Setup Photograph

Refer to “R25S1048034-UT” file.

Appendix C – EUT Photograph

Refer to “R25S1048034-UE” file.

The End
