



RF MEASUREMENT REPORT

FCC ID: VW3FAST5697
Applicant: SAGEMCOM BROADBAND SAS
Product: Giga Hub 2.0
Model No.: FAST5697
Brand Name: SAGEMCOM
FCC Classification: 15E 6GHz Low Power Indoor Access Point (6ID)
FCC Rule Part(s): Part 15 Subpart E (Section 15.407)
Result: Complies
Received Date: 2025-03-19
Test Date: 2025-03-26 ~ 2025-04-23

Reviewed By:

Sunny Sun

Approved By:

Robin Wu



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB789033. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
R25S1048034-U206	V01	Initial Report	2025-06-03	Valid

CONTENTS

Description	Page
1. General Information	6
1.1. Applicant	6
1.2. Manufacturer	6
1.3. Testing Facility	6
1.4. Product Information	7
1.5. Radio Specification under Test	8
1.6. Working Frequencies	8
1.7. Antenna Details	10
2. Test Configuration	11
2.1. Test Mode	11
2.2. Test System Connection Diagram	12
2.3. Test Software	12
2.4. Applied Standards	12
2.5. Test Environment Condition	13
3. Antenna Requirements	14
4. Measuring Instrument	15
5. Decision Rules and Measurement Uncertainty	16
5.1. Decision Rules	16
5.2. Measurement Uncertainty	16
6. Test Result	17
6.1. Summary	17
6.2. 26dB Bandwidth Measurement	18
6.2.1. Test Limit	18
6.2.2. Test Procedure	18
6.2.3. Test Setting	18
6.2.4. Test Setup	19
6.2.5. Test Result	19
6.3. Output Power Measurement	20
6.3.1. Test Limit	20
6.3.2. Test Procedure	20
6.3.3. Test Setting	20
6.3.4. Test Setup	21
6.3.5. Test Result	21
6.4. Power Spectral Density Measurement	22
6.4.1. Test Limit	22

6.4.2.	Test Procedure	22
6.4.3.	Test Setting	22
6.4.4.	Test Setup.....	23
6.4.5.	Test Result.....	23
6.5.	In-Band Emission Measurement	24
6.5.1.	Test Limit	24
6.5.2.	Test Procedure	24
6.5.3.	Test Setting	24
6.5.4.	Test Setup.....	25
6.5.5.	Test Result.....	25
6.6.	Frequency Stability Measurement.....	26
6.6.1.	Test Limit	26
6.6.2.	Test Procedure	26
6.6.3.	Test Setup.....	26
6.6.4.	Test Result.....	27
6.7.	Contention Based Protocol Measurement	28
6.7.1.	Test Limit	28
6.7.2.	Test Procedure	28
6.7.3.	Test Setting	28
6.7.4.	Test Setup.....	29
6.7.5.	Test Result.....	29
6.8.	Radiated Spurious Emission Measurement	30
6.8.1.	Test Limit	30
6.8.2.	Test Procedure	30
6.8.3.	Test Setting	31
6.8.4.	Test Setup.....	33
6.8.5.	Test Result.....	34
6.9.	Radiated Restricted Band Edge Measurement.....	35
6.9.1.	Test Limit	35
6.9.2.	Test Procedure	37
6.9.3.	Test Setting	37
6.9.4.	Test Setup.....	38
6.9.5.	Test Result.....	38
6.10.	AC Conducted Emissions Measurement.....	39
6.10.1.	Test Limit	39
6.10.2.	Test Setup.....	39
6.10.3.	Test Result.....	39
Appendix A – Test Result.....		40

A.1	Duty Cycle Test Result	40
A.2	26dB Bandwidth Test Result	42
A.3	Output Power Test Result	56
A.4	Power Spectral Density Test Result	59
A.5	In-Band Emission Measurement	73
A.6	Frequency Stability Test Result	84
A.7	Contention Based Protocol Test Result	85
A.8	Radiated Spurious Emission Test Result	97
A.9	Radiated Restricted Band Edge Test Result	163
A.10	AC Conducted Emissions Test Result	219
Appendix B – Test Setup Photograph		223
Appendix C – EUT Photograph		224

1. General Information

1.1. Applicant

SAGEMCOM BROADBAND SAS
4 ALLEE DES MESSAGERIES
92271 BOIS-COLOMBES CEDEX - FRANCE

1.2. Manufacturer

SAGEMCOM BROADBAND SAS
4 ALLEE DES MESSAGERIES
92271 BOIS-COLOMBES CEDEX - FRANCE

1.3. Testing Facility

☒	Test Site – MRT Suzhou Laboratory			
	Laboratory Location (Suzhou - Wuzhong)			
	D8 Building, No.2 Tian’edang Rd., Wuzhong Economic Development Zone, Suzhou, China			
	Laboratory Location (Suzhou - SIP)			
	4b Building, Liando U Valley, No.200 Xingpu Rd., Shengpu Town, Suzhou Industrial Park, China			
	Laboratory Location (Suzhou - Wujiang)			
	Building 1, No.1 Xingdong Road, Wujiang, Suzhou, Jiangsu, People’s Republic of China			
☒	Laboratory Accreditations			
	A2LA: 3628.01		CNAS: L10551	
	FCC: CN1166		ISED: CN0001	
	VCCI:	☐ R-20025	☐ G-20034	☐ C-20020
		☐ T-20020		
		☐ R-20141	☐ G-20134	☐ C-20103
			☐ T-20104	
☐	Test Site – MRT Shenzhen Laboratory			
	Laboratory Location (Shenzhen)			
	1G, Building A, Junxiangda Building, Zhongshanyuan Road West, Nanshan District, Shenzhen, China			
	Laboratory Accreditations			
	A2LA: 3628.02		CNAS: L10551	
☐	FCC: CN1284		ISED: CN0105	
	Test Site – MRT Taiwan Laboratory			
	Laboratory Location (Taiwan)			
	No. 38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)			
	Laboratory Accreditations			
☐	TAF: 3261			
	FCC: 291082, TW3261		ISED: TW3261	

1.4. Product Information

Product Name	Giga Hub 2.0
Model No.	FAST5697
EUT Identification No.	20250319Sample#19 (Conducted) 20250319Sample#21 (Radiated)
Bluetooth Specification	Bluetooth_LE 1M
Zigbee Specification	802.15.4
Z-Wave Specification	902 ~ 928MHz
Wi-Fi Specification	802.11a/b/g/n/ac/ax/be
Antenna Information	Refer to section 1.7
Working Voltage	By Adapter
Operating Environment	Indoor Use
Accessories	
Adapter #1	Model: ADS-65HI-12A-2 12060E-L Input: 100-127V ~ 50/60Hz 1.5A Output: 12V=5.0A
Adapter #2	Model: NBS42G120500M2 Input: 100-127V ~ 50/60Hz 1.5A Output: 12V=5.0A
Adapter #3	Model: NBS60E120500M2 Input: 100-120V ~ 50/60Hz 1.5A Output: 12V=5.0A
Adapter #4	Model: MS-Z5000R120-060C0-P Input: 100-127V ~ 50/60Hz 1.5A Output: 12V=5.0A
Adapter #5	Model: ADS-65HI-12-2 12060E-L Input: 100-127V ~ 50/60Hz 1.5A Output: 12V=5.0A
Remarks:	
1. The information of EUT was provided by the manufacturer, and the accuracy of the information shall be the responsibility of the manufacturer.	
2. For this report, we select AC Adapter #1 for testing.	

1.5. Radio Specification under Test

Frequency Range	For 802.11a/ax-HE20/be-EHT20: 5955 ~ 7095MHz For 802.11ax-HE40/be-EHT40: 5965 ~ 7085MHz For 802.11ax-HE80/be-EHT80: 5985 ~ 7025MHz For 802.11ax-HE160/be-EHT160: 6025 ~ 6985MHz For 802.11be-EHT320: 6105 ~ 6905MHz	
Type of Modulation	802.11ax/be: OFDMA	
Data Rate	802.11ax: up to 4083.9Mbps 802.11be: up to 11529.6Mbps	
Channel Puncturing Function	☐ Supported	☒ Unsupported
Support RU	☒ Full RU	☐ Partial RU

1.6. Working Frequencies

802.11a/ax-HE20/be-EHT20

Channel	Frequency	Channel	Frequency	Channel	Frequency
1	5955 MHz	5	5975 MHz	9	5995 MHz
13	6015 MHz	17	6035 MHz	21	6055 MHz
25	6075 MHz	29	6095 MHz	33	6115 MHz
37	6135 MHz	41	6155 MHz	45	6175 MHz
49	6195 MHz	53	6215 MHz	57	6235 MHz
61	6255 MHz	65	6275 MHz	69	6295 MHz
73	6315 MHz	77	6335 MHz	81	6355 MHz
85	6375 MHz	89	6395 MHz	93	6415 MHz
97	6435 MHz	101	6455 MHz	105	6475 MHz
109	6495 MHz	113	6515 MHz	117	6535 MHz
121	6555 MHz	125	6575 MHz	129	6595 MHz
133	6615 MHz	137	6635 MHz	141	6655 MHz
145	6675 MHz	149	6695 MHz	153	6715 MHz
157	6735 MHz	161	6755 MHz	165	6775 MHz
169	6795 MHz	173	6815 MHz	177	6835 MHz
181	6855 MHz	185	6875 MHz	189	6895 MHz
193	6915 MHz	197	6935 MHz	201	6955 MHz
205	6975 MHz	209	6995 MHz	213	7015 MHz
217	7035 MHz	221	7055 MHz	225	7075 MHz
229	7095 MHz	--	--	--	--

802.11ax-HE40/be-EHT40

Channel	Frequency	Channel	Frequency	Channel	Frequency
3	5965 MHz	11	6005 MHz	19	6045 MHz
27	6085 MHz	35	6125 MHz	43	6165 MHz
51	6205 MHz	59	6245 MHz	67	6285 MHz
75	6325 MHz	83	6365 MHz	91	6405 MHz
99	6445 MHz	107	6485 MHz	115	6525 MHz
123	6565 MHz	131	6605 MHz	139	6645 MHz
147	6685 MHz	155	6725 MHz	163	6765 MHz
171	6805 MHz	179	6845 MHz	187	6885 MHz
195	6925 MHz	203	6965 MHz	211	7005 MHz
219	7045 MHz	227	7085 MHz	--	--

802.11ax-HE80/be-EHT80

Channel	Frequency	Channel	Frequency	Channel	Frequency
7	5985 MHz	23	6065 MHz	39	6145 MHz
55	6225 MHz	71	6305 MHz	87	6385 MHz
103	6465 MHz	119	6545 MHz	135	6625 MHz
151	6705 MHz	167	6785 MHz	183	6865 MHz
199	6945 MHz	215	7025 MHz	--	--

802.11ax-HE160/be-EHT160

Channel	Frequency	Channel	Frequency	Channel	Frequency
15	6025 MHz	47	6185 MHz	79	6345 MHz
111	6505 MHz	143	6665 MHz	175	6825 MHz
207	6985 MHz	--	--	--	--

802.11be-EHT320

Channel	Frequency	Channel	Frequency	Channel	Frequency
31	6105 MHz	63	6265 MHz	95	6425 MHz
127	6585 MHz	159	6745 MHz	191	6905 MHz

1.7. Antenna Details

Antenna Type	Frequency Band (GHz)	Antenna Gain (dBi)				Directional Gain (dBi)	
		Ant 0	Ant 1	Ant 2	Ant 3	For Power	For PSD
Wi-Fi Internal Antenna							
PCB Antenna	2412 ~ 2462	4.59	3.50	2.28	3.62	4.59	5.00
	5150 ~ 5250	4.78	4.31	2.73	5.45	5.45	5.48
	5250 ~ 5350	5.62	4.48	3.08	4.44	5.62	5.78
	5470 ~ 5725	4.99	3.27	1.61	5.12	4.99	5.78
	5725 ~ 5850	5.19	4.69	2.80	4.51	5.19	6.64
	5925 ~ 7125	4.75	4.39	4.30	6.84	6.84	6.63
Note 1: The antenna gain and directional gain refer to manufacturer's antenna specification.							
Note 2: The EUT supports Cyclic Delay Diversity (CDD) mode for 802.11a/b/g/n/ac/ax/be.							
Note 3: Software automatically backs power down based on CDD power for beamforming operation.							


2. Test Configuration

2.1. Test Mode

Mode 1: Transmit by 802.11a (6Mbps)
Mode 2: Transmit by 802.11be-EHT20 (MCS0)
Mode 3: Transmit by 802.11be-EHT40 (MCS0)
Mode 4: Transmit by 802.11be-EHT80 (MCS0)
Mode 5: Transmit by 802.11be-EHT160 (MCS0)
Mode 6: Transmit by 802.11be-EHT320 (MCS0)
Notes: 1. All modes of operation and data rates were investigated, so all RF test requirements shall be executed at the worst data rate. 2. For CDD mode, this device supports 4 N_{SS} and power level is the same of spatial multiplexing. The worst case is $N_{SS}=1$. 3. For beamforming operation, manufacturer automatically backs power down based on a $10\log(N_{ANT})$ factor based on CDD power. Therefore, only the CDD mode was evaluated in this report 4. 802.11ax and 802.11be have the same modulation type and same power value, so we only show 802.11be test data in report.

2.2. Test System Connection Diagram

The device was tested per the guidance ANSI C63.10: 2013 was used to reference the appropriate EUT setup for radiated emissions testing and AC line conducted testing.

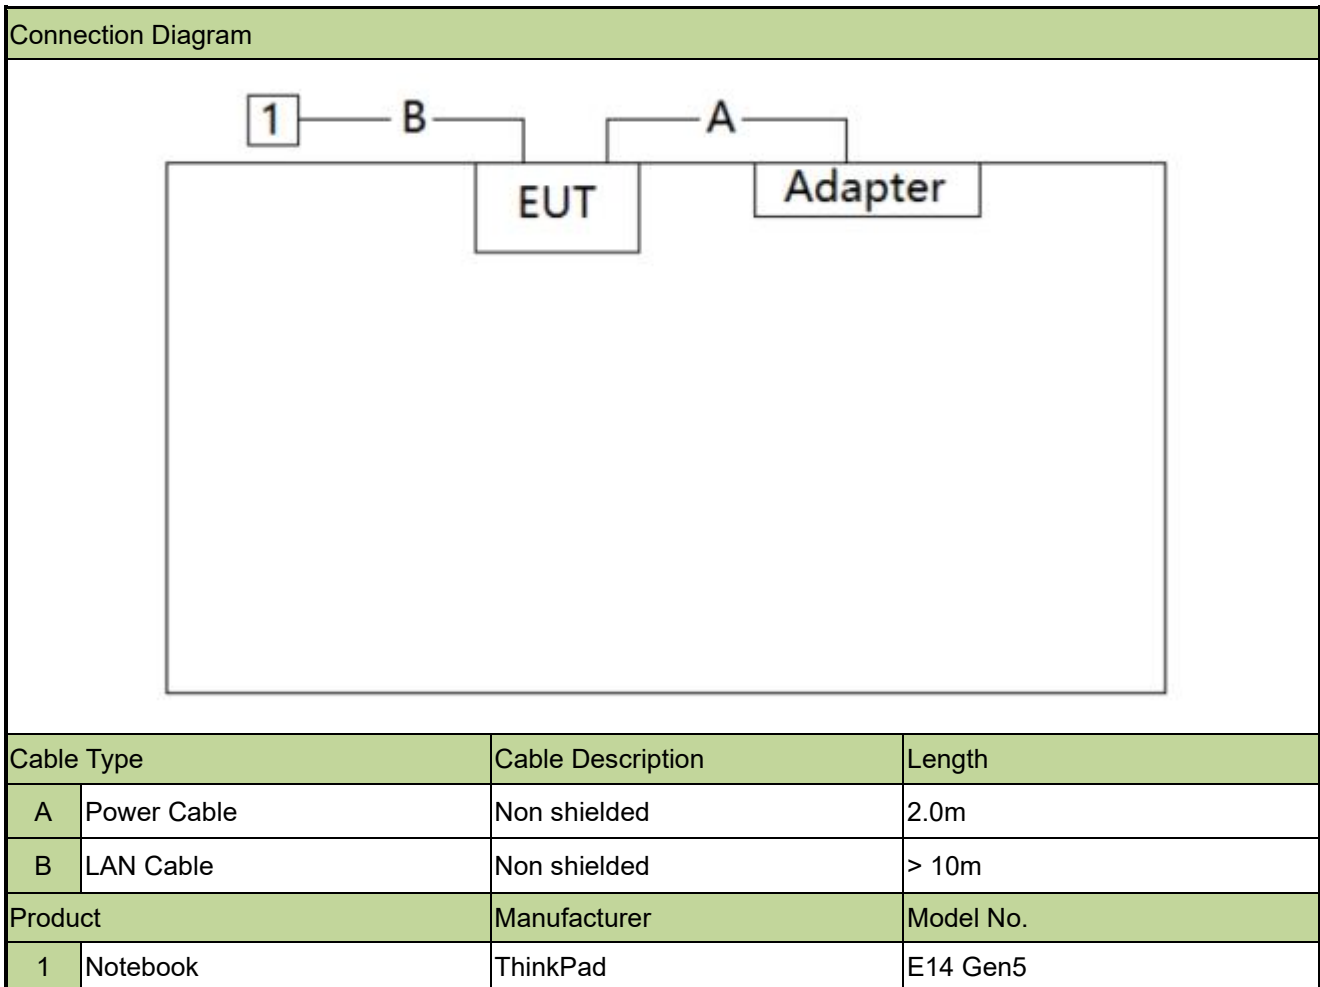

2.3. Test Software

The test utility software used during testing was “accessMTool.exe”, and the version was 3.3.0.6.

2.4. Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ANSI C63.10-2013
- FCC KDB 789033 D02v02r01
- FCC KDB 987594 D02v03
- FCC KDB 987594 D04v03

- FCC KDB 662911 D01v02r01
- FCC KDB 414788 D01v01r01
- FCC KDB 412172 D01v01r01

2.5. Test Environment Condition

Ambient Temperature	15 ~ 35°C
Relative Humidity	20 ~ 75%RH

3. Antenna Requirements

Excerpt from §15.407(a)(9) of the FCC Rules/Regulations:

Access points operating under the provisions of paragraphs (a)(5) and (a)(6) of this section must employ a permanently attached integrated antenna.

- The antenna of the device is built in and locked inside the enclosure.

Conclusion:

The device complies with the requirement of §15.407(a)(9).

4. Measuring Instrument

Instrument	Manufacturer	Model No.	Asset No.	Cali. Interval	Cali. Due Date	Test Site
Active Loop Antenna	Schwarzbeck	FMZB 1519-60 D	MRTSUE07075	1 year	2025-11-19	SIP-AC3
EMI Test Receiver	R&S	ESR3	MRTSUE06185	1 year	2025-12-05	SIP-AC3
TRILOG Antenna	Schwarzbeck	VULB 9168	MRTSUE06646	1 year	2025-07-29	SIP-AC3
Signal Analyzer	Keysight	N9010B	MRTSUE06559	1 year	2025-05-08	SIP-AC3
Thermohygrometer	testo	608-H1	MRTSUE06619	1 year	2025-10-16	SIP-AC3
Preamplifier	EMCI	EMC012645SE	MRTSUE06642	1 year	2026-01-05	SIP-AC3
Horn Antenna	R&S	HF907	MRTSUE06611	1 year	2025-07-07	SIP-AC3
Preamplifier	EMCI	EMC184045SE	MRTSUE06602	1 year	2025-10-08	SIP-AC3
Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06599	1 year	2025-09-08	SIP-AC3
Anechoic Chamber	RIKEN	SIP-AC3	MRTSUE06782	1 year	2025-12-19	SIP-AC3
Two-Line V-Network	R&S	ENV216	MRTSUE06003	1 year	2025-05-08	SIP-SR2
EMI Test Receiver	R&S	ESR3	MRTSUE06612	1 year	2025-05-08	SIP-SR2
Four-Line V-Network	R&S	ENV432	MRTSUE06614	1 year	2025-10-13	SIP-SR2
Thermohygrometer	testo	608-H1	MRTSUE06621	1 year	2025-10-29	SIP-SR2
Shielding Room	MIX-BEP	SIP-SR2	MRTSUE06949	5 years	2029-10-13	SIP-SR2
USB Power Sensor	Keysight	U2021XA	MRTSUE06596	1 year	2025-07-23	SIP-TR1
Temperature Chamber	BAOYT	BYG-408CS	MRTSUE06847	1 year	2026-01-21	SIP-TR1
Pxle Microwave Vector Signal Source test set	Keysight	M9384B	MRTSUE06994	1 year	2025-12-23	SIP-TR1
Signal Analyzer	Keysight	N9010B	MRTSUE07036	1 year	2026-01-21	SIP-TR1
Thermohygrometer	testo	608-H1	MRTSUE11022	1 year	2025-10-16	SIP-TR1

Software	Version	Function
e3	230711	EMI Test Software
Agilent Power Analyzer/Agilent Power Panel	V R03.09.00	Power
Controller_MF 7802BS	1.02	RE Antenna & Turntable

5. Decision Rules and Measurement Uncertainty

5.1. Decision Rules

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4: 2012 Clause 8.2.
(Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

5.2. Measurement Uncertainty

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement
The maximum measurement uncertainty is evaluated as: 9kHz~150kHz: 3.58dB 150kHz~30MHz: 3.20dB
Radiated Emission Measurement
The maximum measurement uncertainty is evaluated as: Coaxial: 9kHz~30MHz: 2.35dB Coplanar: 9kHz~30MHz: 2.37dB Horizontal: 30MHz~200MHz: 3.47dB 200MHz~1GHz: 4.17dB 1GHz~40GHz: 4.97dB Vertical: 30MHz~200MHz: 4.07dB 200MHz~1GHz: 5.28dB 1GHz~40GHz: 4.84dB
Spurious Emissions, Conducted
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 2.5dB
Output Power
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 1.5dB
Power Spectrum Density
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 2.5dB
Occupied Bandwidth
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 3.2%

6. Test Result

6.1. Summary

FCC Section(s)	Test Description	Test Condition	Verdict
15.407(a)(10)	26dB Bandwidth	Conducted	Pass
15.407(a)(5)	Maximum Equivalent Isotropically Radiated Power (EIRP)		Pass
15.407(a)(5)	Maximum Power Spectral Density (EIRP)		Pass
15.407(b)(7)	In-Band Emission		Pass
15.407(d)(6)	Contention-Based Protocol		Pass
15.407(b)(6)	Unwanted Emissions	Radiated	Pass
15.407(b)(9), (10)	General Field Strength (Restricted Bands and Radiated Emission)		Pass
15.207	AC Conducted Emissions 150kHz - 30MHz	Line Conducted	Pass

Notes:

- The analyzer plots shown in this section were captured using a correction table to account for cable and attenuator losses in the system connecting the EUT to the analyzer across relevant frequencies.
- For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst-case emissions.

6.2. 26dB Bandwidth Measurement

6.2.1. Test Limit

The maximum transmitter channel bandwidth for U–NII devices in the 5.925–7.125 GHz band is 320 megahertz.

6.2.2. Test Procedure

KDB 789033 D02v02r01- Section II)C)1) (26dB Bandwidth)

KDB 789033 D02v02r01- Section II)D) (99% Bandwidth)

6.2.3. Test Setting

26dB Bandwidth


1. The analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth
2. RBW = approximately 1% of the emission bandwidth.
3. VBW > RBW
4. Detector = Peak.
5. Trace mode = max hold.
6. Measure the maximum width of the emission that is 26 dB down from the maximum of the emission.
Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

99% Bandwidth

1. Set center frequency to the nominal EUT channel center frequency.
2. RBW = 1% to 5% of the OBW
3. $VBW \geq 3 \times RBW$
4. Span = 1.5 times to 5 times the OBW
5. Detector = peak
6. Trace mode = max hold
7. Allow the trace to stabilize
8. Use the 99% power bandwidth function of the instrument.

6.2.4. Test Setup

Spectrum Analyzer



DC Block
&
Attenuator



EUT



6.2.5. Test Result

Refer to Appendix A.1.

6.3. Output Power Measurement

6.3.1. Test Limit

For an indoor access point operating in the 5.925-7.125 GHz band, the maximum EIRP over the frequency band of operation must not exceed 30 dBm.


6.3.2. Test Procedure

KDB 789033D02v02r01- Section E)2)d) Method SA-2

6.3.3. Test Setting

1. Set span to encompass the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal
2. Set RBW = 1 MHz
3. Set VBW $\geq$ 3 MHz
4. Number of points in sweep $\geq 2 \times \text{span} / \text{RBW}$
5. Sweep time = auto
6. Detector = power averaging (rms)
7. Allow the sweep to “free run”
8. Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces to be averaged shall be increased above 100 as needed to ensure that the average accurately represents the true average over the on and off periods of the transmitter.
9. Use the Channel Power function of the instrument.
10. Add $10 \log (1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times

6.3.4. Test Setup

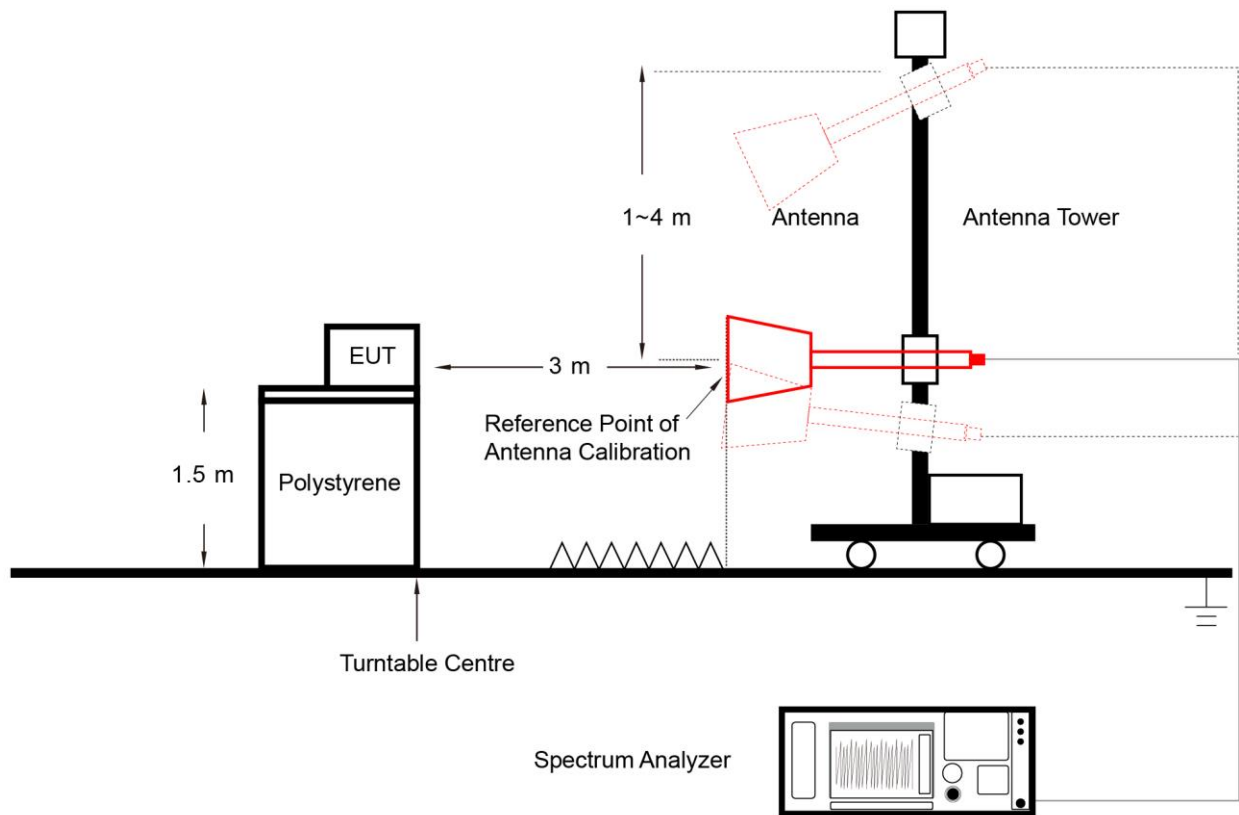

6.3.5. Test Result

Refer to Appendix A.2.

6.4. Power Spectral Density Measurement

6.4.1. Test Limit

For an indoor access point operating in the 5.925-7.125 GHz band, the maximum power spectral density must not exceed 5 dBm EIRP in any 1-megahertz band.


6.4.2. Test Procedure

KDB 789033 D02v02r01-Section II)F)

6.4.3. Test Setting

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire 26dB EBW of the signal.
3. RBW = 1MHz
4. VBW = 3MHz
5. Number of sweep points $\geq 2 \times (\text{span} / \text{RBW})$
6. Detector = power averaging (Average)
7. Sweep time = auto
8. Trigger = free run
9. Trace average at least 100 traces in power averaging (rms) mode; however, the number of traces to be averaged shall be increased above 100 as needed to ensure that the average accurately represents the true average over the on and off periods of the transmitter.
10. Use the peak search function on the instrument to find the peak of the spectrum and record its value.
11. Add $10 \cdot \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission). For example, add $10 \cdot \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

6.4.4. Test Setup

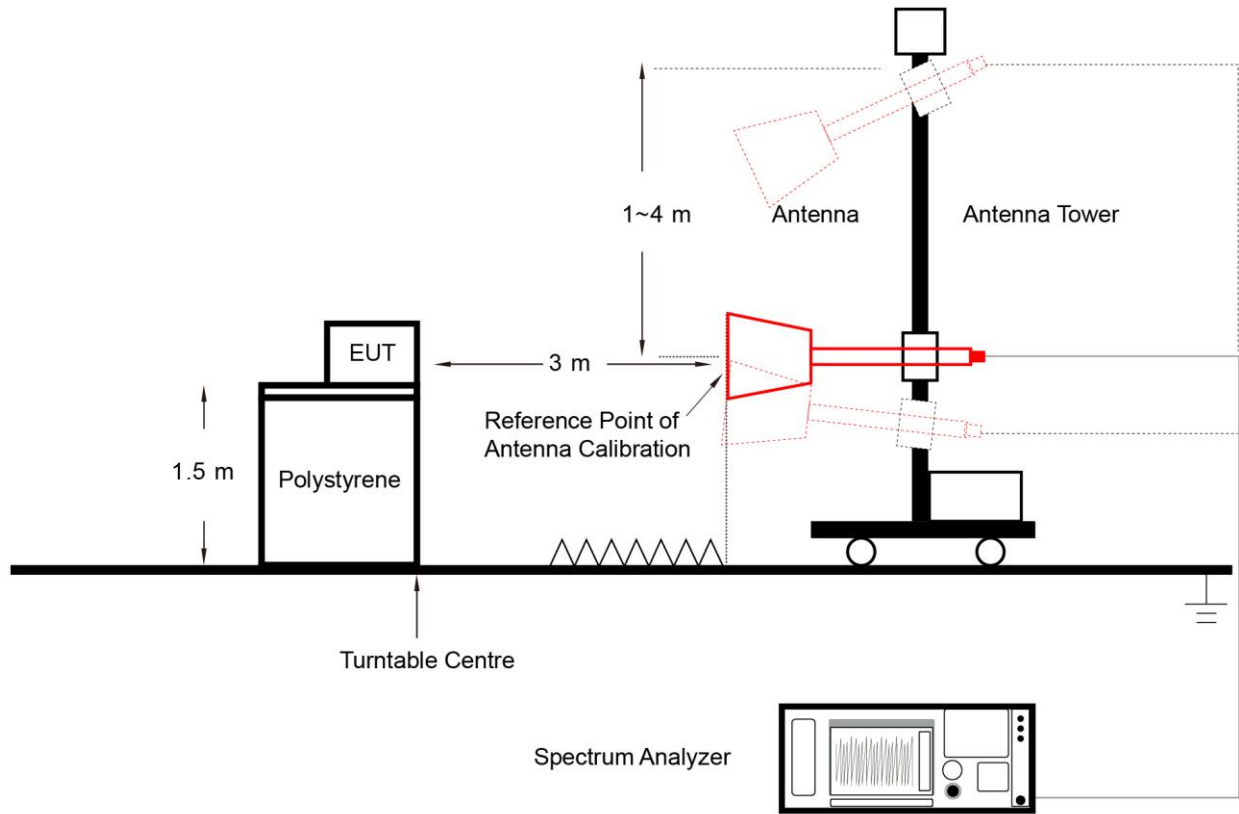

6.4.5. Test Result

Refer to Appendix A.3.

6.5. In-Band Emission Measurement

6.5.1. Test Limit

Suppressed by 20 dB at 1 MHz outside of the channel edge.

(The channel edge is defined as the 26-dB point on either side of the carrier center frequency.)

Suppressed by 28 dB at one channel bandwidth from the channel center.

Suppressed by 40 dB at one- and one-half times the channel bandwidth from the channel center.

6.5.2. Test Procedure

KDB 987594 D02v03 - Section J

6.5.3. Test Setting


Emissions Mask Reference Level Measurement

1. Set the span to encompass the entire 26 dB EBW of the signal.
2. Set RBW = same RBW used for 26 dB EBW measurement.
3. Set VBW $\geq 3 \times$ RBW.
4. Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$.
5. Sweep time = auto.
6. Detector = RMS.
7. Trace average at least 100 traces in power averaging (rms) mode.
8. Use the peak search function on the instrument to find the peak of the spectrum.

In-Band Emission

1. Using the measuring equipment limit line function, develop the emissions mask based on rule.
2. Adjust the span to encompass the entire mask as necessary.
3. Clear trace.
4. Trace average at least 100 traces in power averaging (rms) mode.
5. Adjust the reference level as necessary so that the crest of the channel touches the top of the emission mask.

6.5.4. Test Setup

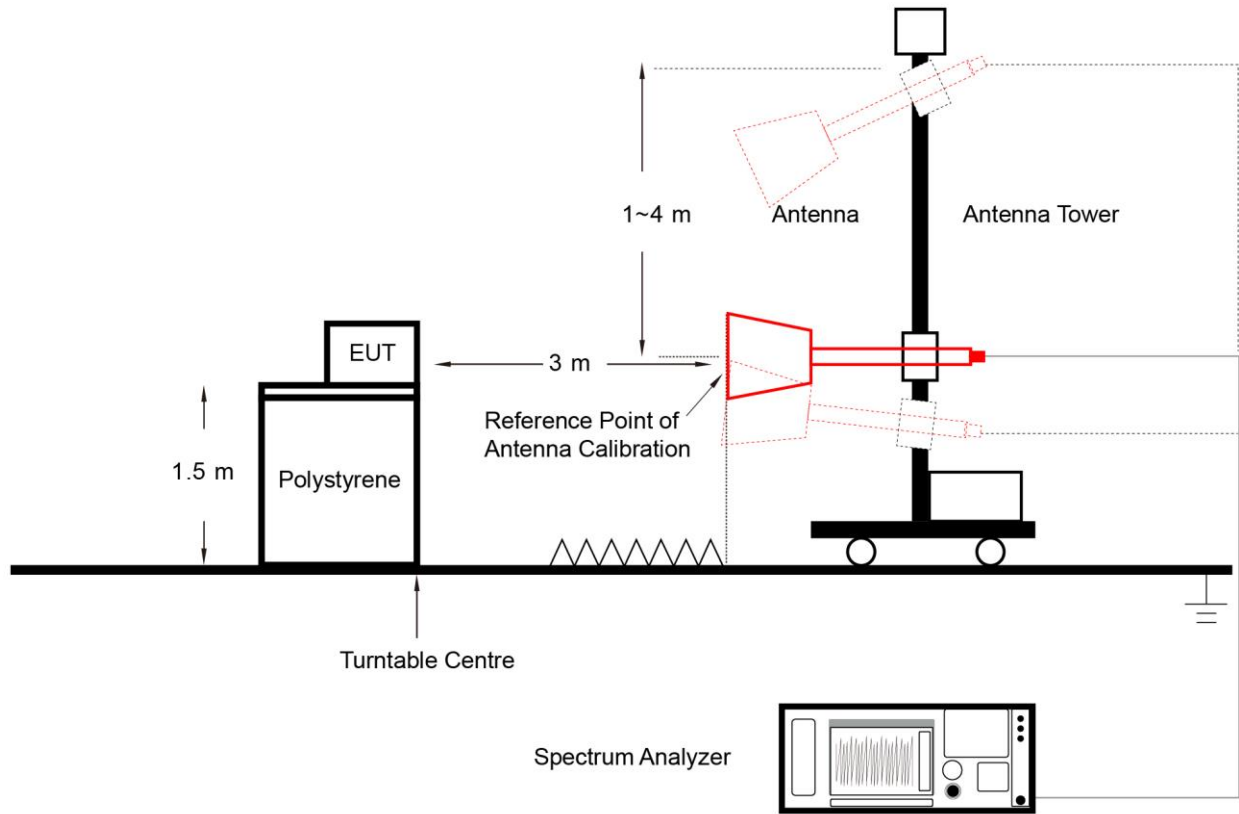

6.5.5. Test Result

Refer to Appendix A.4.

6.6. Frequency Stability Measurement

6.6.1. Test Limit

Manufactures of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

6.6.2. Test Procedure

Frequency Stability Under Temperature Variations:


The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to highest. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C decreased per stage until the lowest temperature reached.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

6.6.3. Test Setup

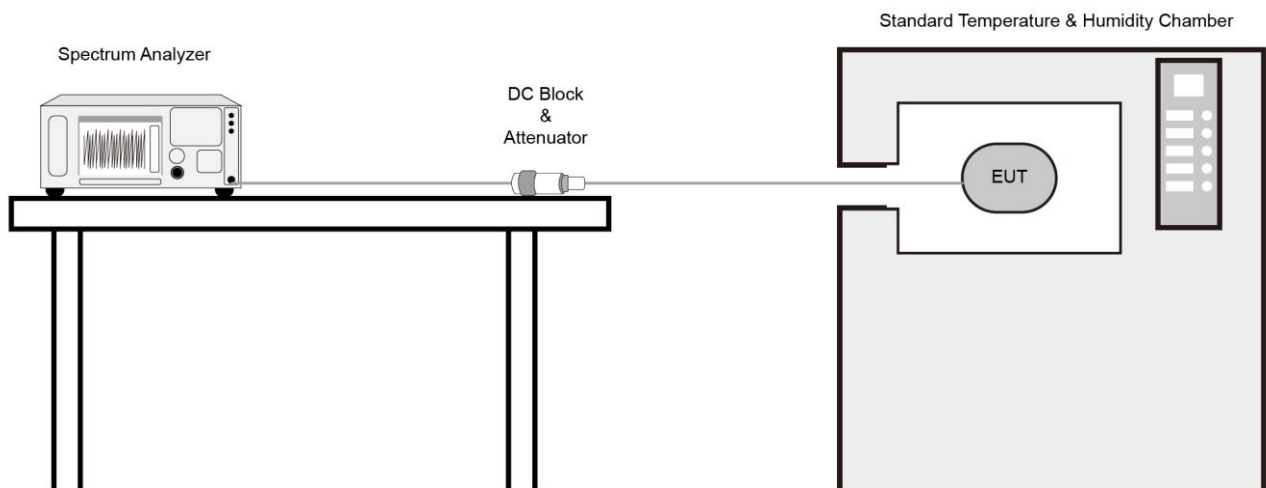

6.6.4. Test Result

Refer to Appendix A.5.

6.7. Contention Based Protocol Measurement

6.7.1. Test Limit

Unlicensed indoor low power device must detect co-channel radio frequency power that is at least -62dBm (The threshold is referenced to a 0dBi antenna gain.) or low.

Indoor low power device must detect an AWGN signal with 90% (or better) level of certainty.

6.7.2. Test Procedure

KDB 987594 D02v03- Section I

6.7.3. Test Setting


1. Configure the EUT to transmit with a constant duty cycle.
2. Set the operating parameters of the EUT including power level, operating frequency, modulation and bandwidth.
3. Set the signal analyzer center frequency to the nominal EUT channel center frequency. The span range of the signal analyzer shall be between two times and five times the OBW of the EUT.

Connect the output port of the EUT to the signal analyzer 2. Ensure that the attenuator 2 provides enough attenuation to not overload the signal analyzer 2 receiver.

4. Monitoring the signal analyzer 2, verify the EUT is operating and transmitting with the parameters set at step two.
5. Using an AWGN signal source, generate a 10 MHz-wide AWGN signal. Use Table 1 of KDB 987594 to determine the center frequency of the 10 MHz AWGN signal relative to the EUT's channel bandwidth and center frequency.
6. Set the AWGN signal power to an extremely low level. Connect the AWGN signal source, via a 3-dB splitter, to the signal analyzer 1 and the EUT as shown in below figure.
7. Transmit the AWGN signal (RF ON) and verify its characteristics on the signal analyzer 1.
8. Monitor the signal analyzer 2 to verify if the AWGN signal has been detected and the EUT has ceased transmission. If the EUT continues to transmit, then incrementally increase the AWGN signal power level until the EUT stops transmitting.
9. Determine and record the AWGN signal power level (at the EUT's antenna port) at which the EUT ceased transmission. Repeat the procedure at least 10 times to verify the EUT can detect an AWGN signal with 90% (or better) level of certainty.
10. Refer to Table 1 to determine number of times the detection threshold testing needs to be repeated. If

testing is required more than once, then go back to step 5, choose a different center frequency for the AWGN signal and repeat the process.

6.7.4. Test Setup

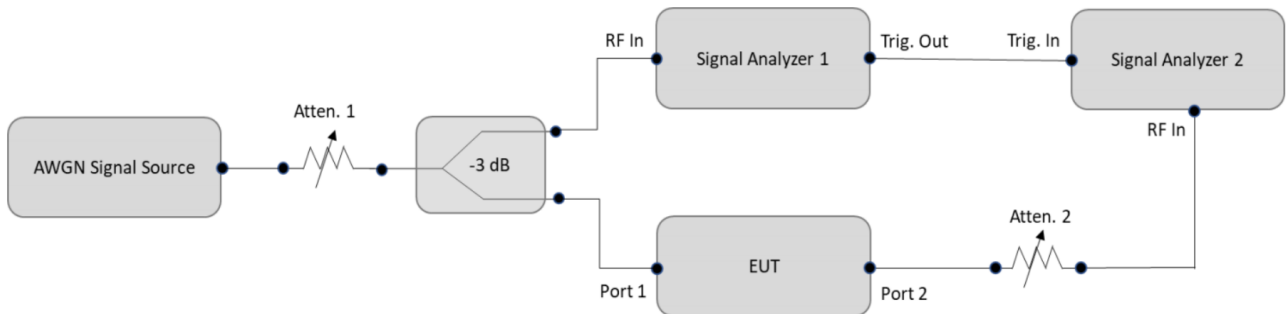

6.7.5. Test Result

Refer to Appendix A.6.

6.8. Radiated Spurious Emission Measurement

6.8.1. Test Limit

For 15.407(b)(5) requirement

For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925-7.125 GHz band must not exceed an EIRP. of -27 dBm/MHz.

Refer to 987594 D02 U-NII 6GHz EMC Measurement v03 clause G

Use guidance in KDB 789033 for measurements below 1000 MHz and above 1000 MHz. Unwanted emissions outside of restricted bands are measured with a RMS detector. In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.8.2. Test Procedure

KDB 789033 D02v02r01-Section II)G)

6.8.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000MHz	1MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.

If the EUT duty cycle is $< 98\%$, set $\text{VBW} \geq 1/T$. T is the minimum transmission duration.


4. As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = auto
7. Trace mode = max hold
8. Allow max hold to run for at least 50 times (1/duty cycle) traces

6.8.4. Test Setup


Below 30MHz Test Setup:

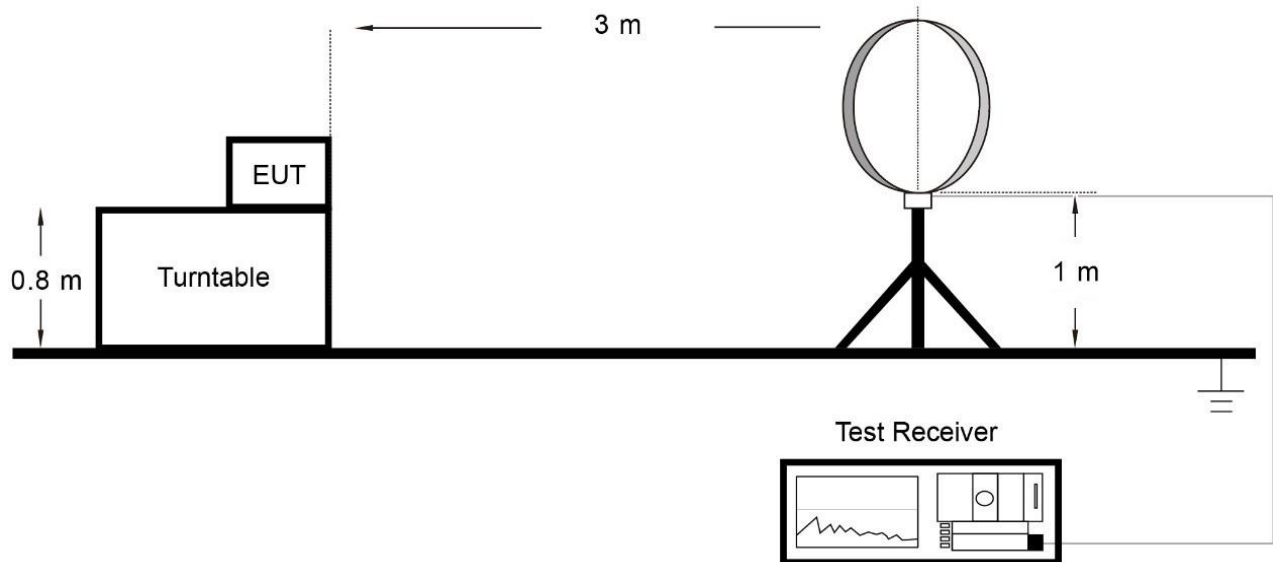

Below 1GHz Test Setup:

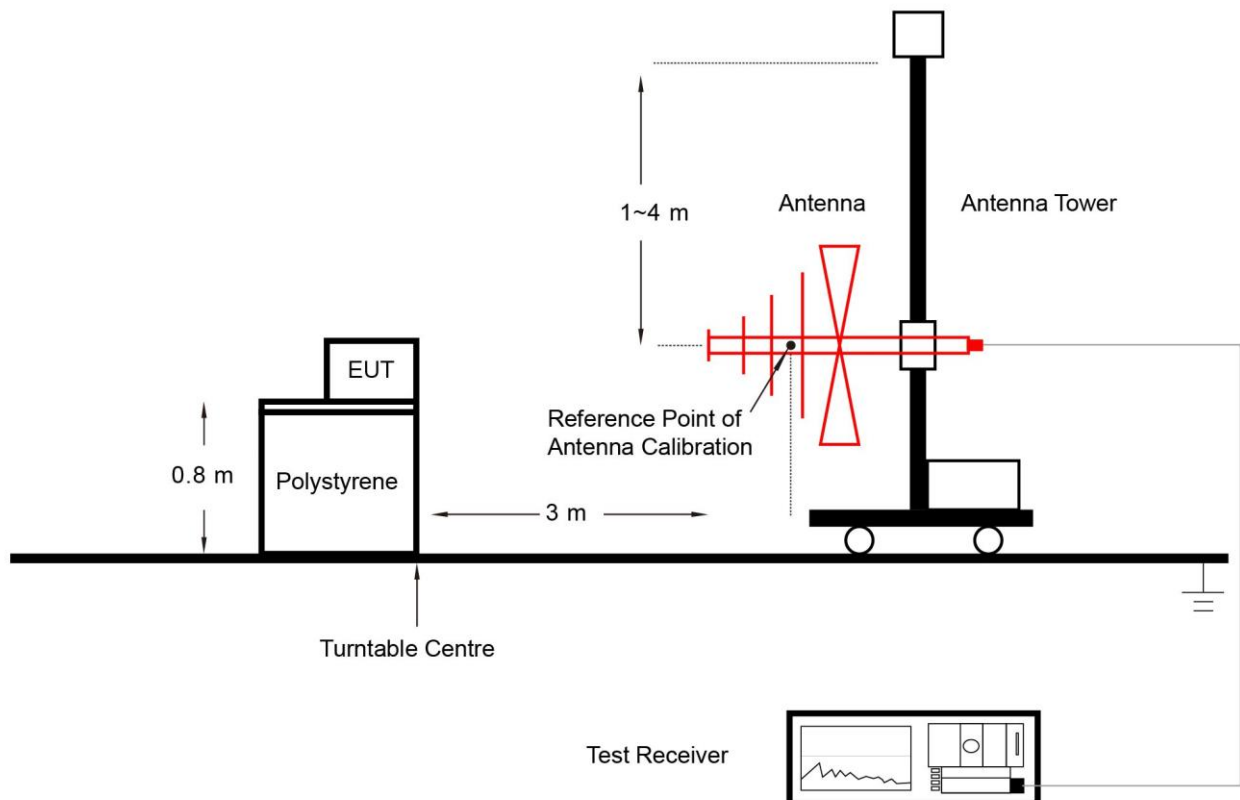

Above 1GHz Test Setup:

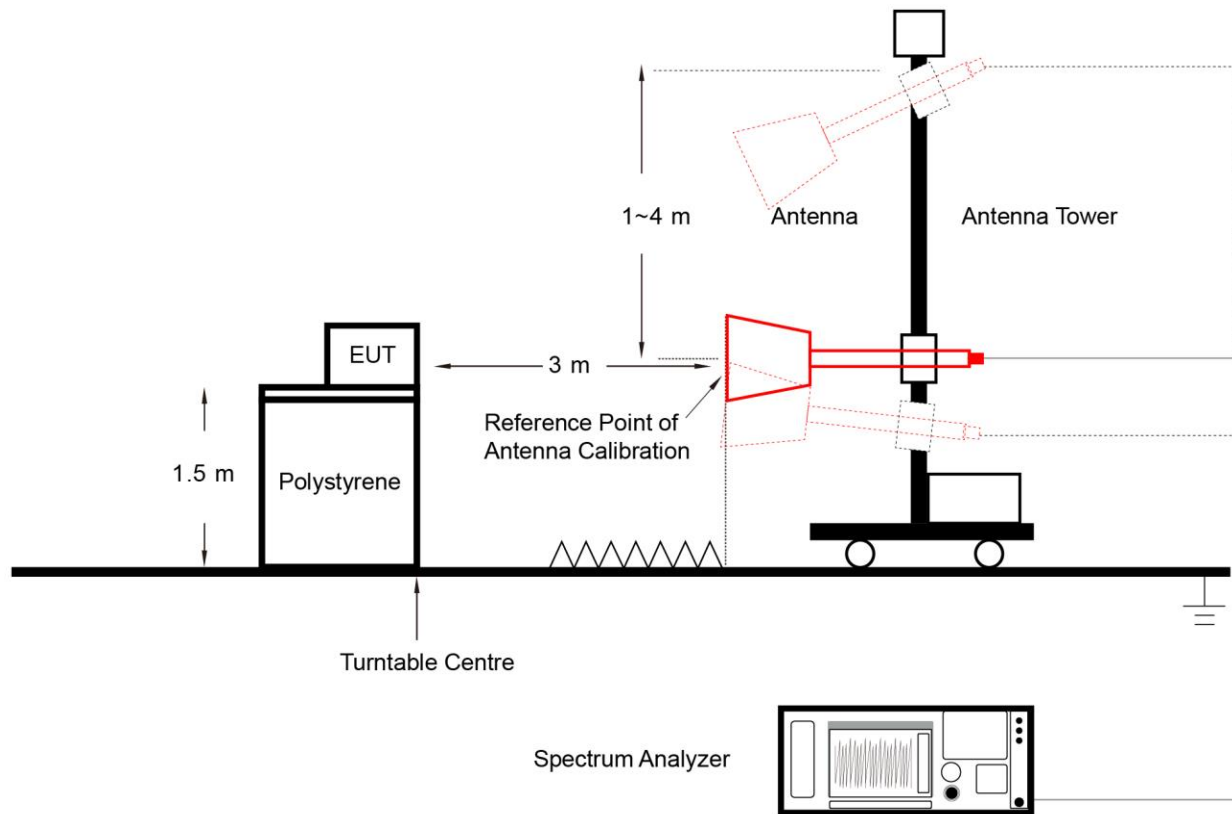

6.8.5. Test Result

Refer to Appendix A.7.

6.9. Radiated Restricted Band Edge Measurement

6.9.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

For 15.407(b)(5) requirement:

For transmitters operating within the 5.925-7.125 GHz band: Any emissions outside of the 5.925-7.125 GHz band must not exceed an EIRP. of -27 dBm/MHz.

Refer to 987594 D02 U-NII 6GHz EMC Measurement v03 clause G - Unwanted Emission Measurement

Use guidance in KDB 789033 for measurements below 1000 MHz and above 1000 MHz. Unwanted emissions outside of restricted bands are measured with a RMS detector. In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.9.2. Test Procedure

KDB 789033 D02v02r01-Section II)G)

6.9.3. Test Setting


Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Peak
5. Sweep time = Auto couple
6. Trace mode = Max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set $\text{VBW} \geq 1/T$. T is the minimum transmission duration.
4. As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = Auto
7. Trace mode = Max hold
8. Trace was allowed to stabilize

6.9.4. Test Setup

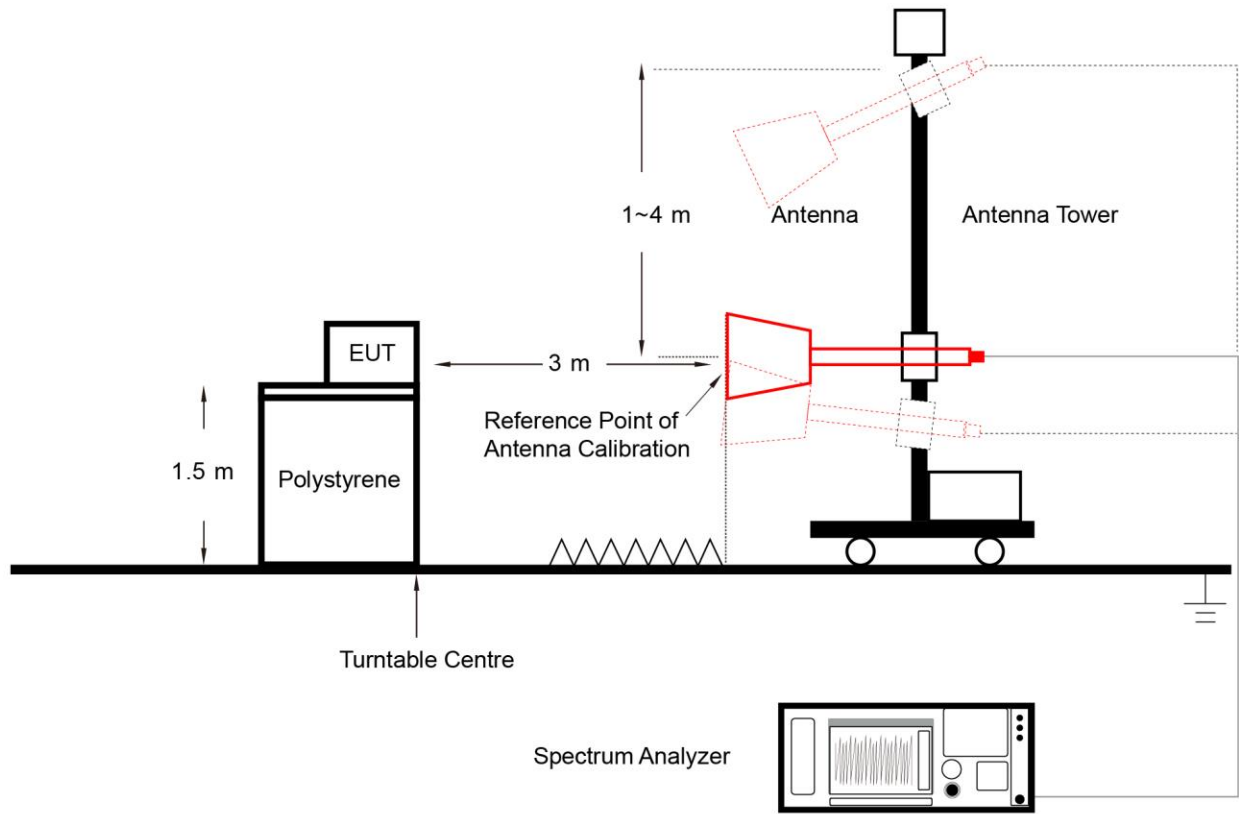

6.9.5. Test Result

Refer to Appendix A.8.

6.10. AC Conducted Emissions Measurement


6.10.1. Test Limit

FCC Part 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

6.10.2. Test Setup

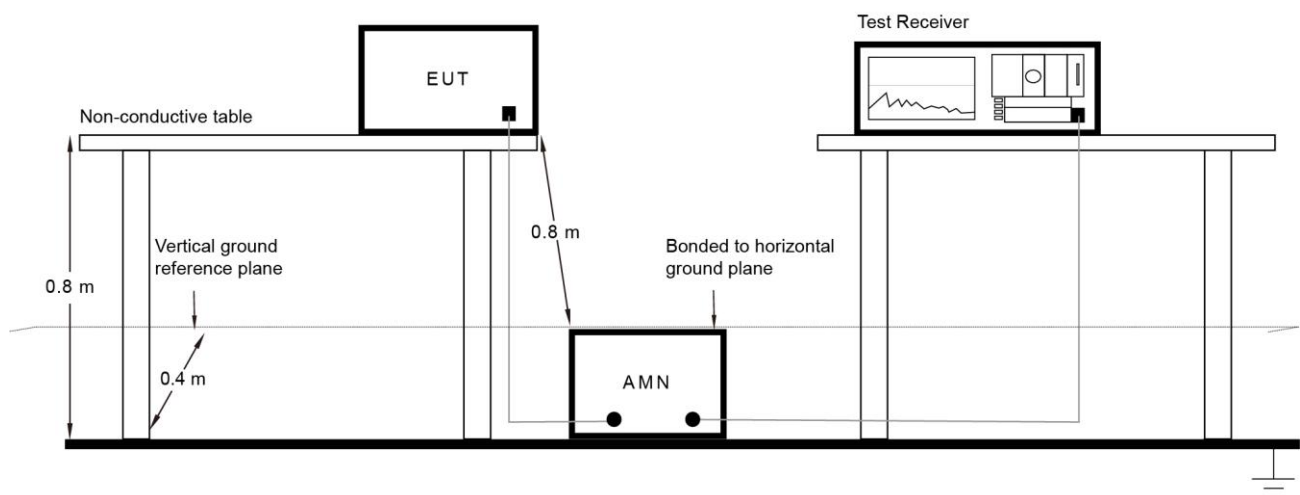

6.10.3. Test Result

Refer to Appendix A.9.

Appendix A – Test Result


A.1 Duty Cycle Test Result

Test Site	SIP-TR1	Test Engineer	Nolan Chen
Test Date	2025-03-26 ~ 2025-04-02		


Test Mode	Duty Cycle	Test Mode	Duty Cycle
802.11a	95.18%	802.11be-EHT160	88.23%
802.11be-EHT20	97.84%	802.11be-EHT320-1	83.19%
802.11be-EHT40	96.06%	802.11be-EHT320-2	83.19%
802.11be-EHT80	92.74%	--	--

Duty Cycle (T = Transmission Duration)


802.11a (T = 2.072ms)

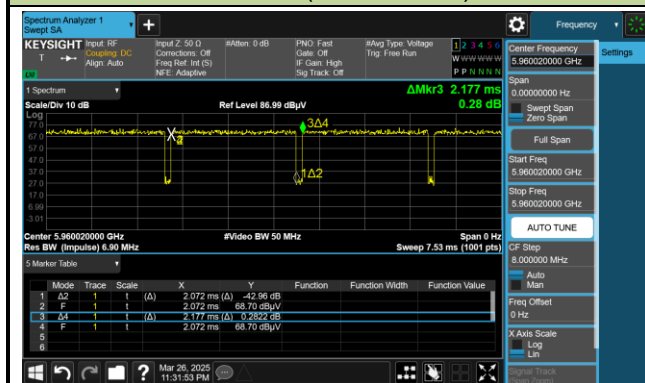


802.11be-EHT20 (T = 1.495ms)

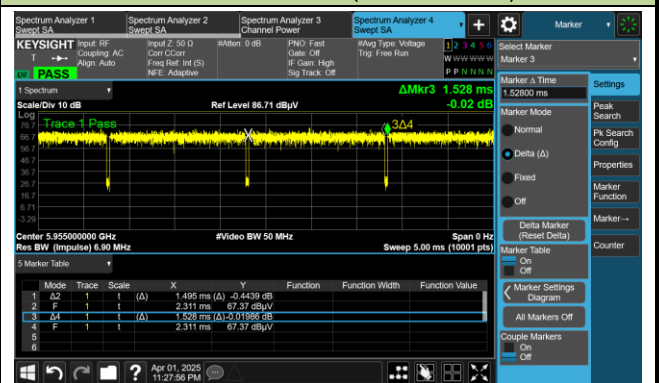

802.11be-EHT40 (T = 780.0μs)

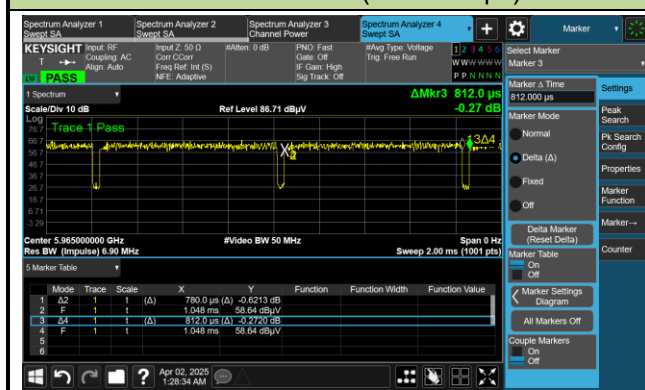


802.11be-EHT80 (T = 409.0μs)

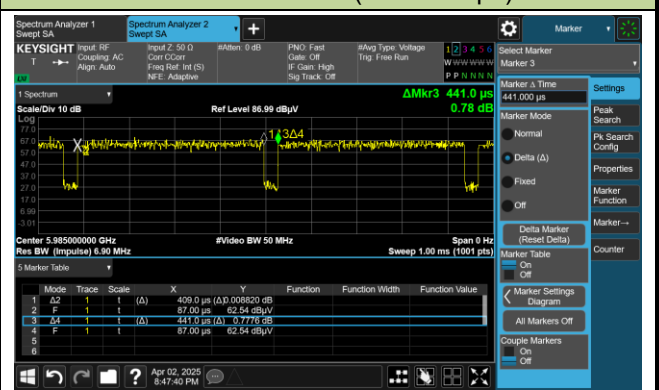


Duty Cycle (T = Transmission Duration)


802.11be-EHT160 (T = 240.0µs)

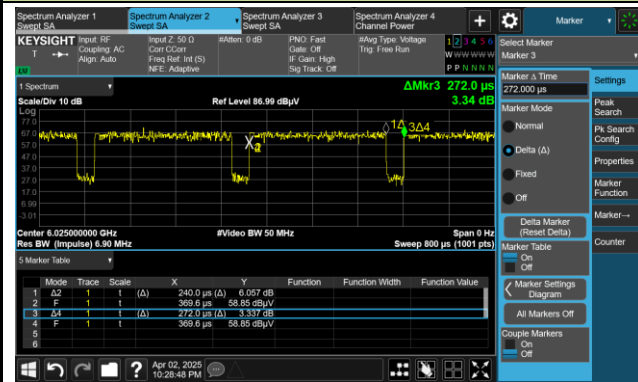

802.11be-EHT320-1 (T = 158.4µs)

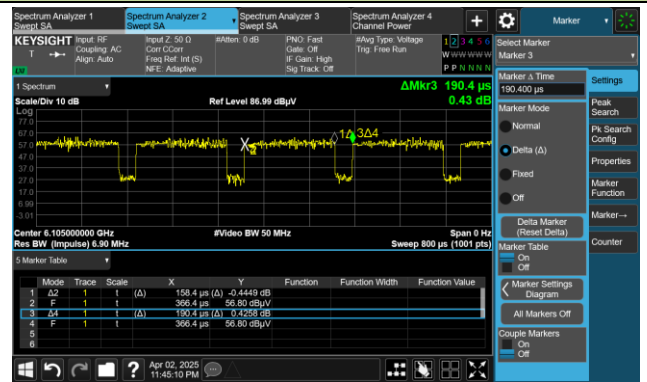

802.11be-EHT320-2 (T = 158.4µs)

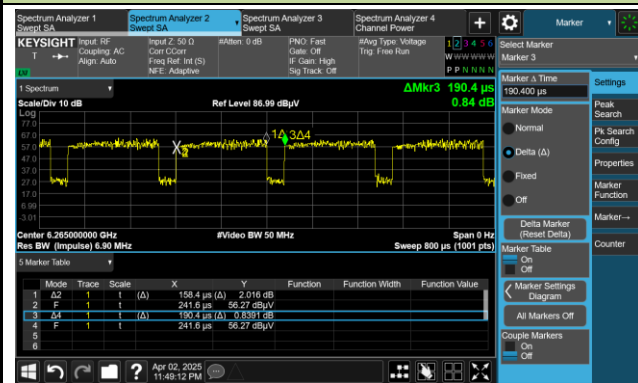

A.2 26dB Bandwidth Test Result

Test Site	SIP-TR1	Test Engineer	Nolan Chen
Test Date	2025-04-14 ~ 2025-04-15		

Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)	Test Limit (MHz)
802.11a	MCS0	1	5955	21.20	16.772	≤ 320
802.11a	MCS0	49	6195	21.24	16.734	≤ 320
802.11a	MCS0	93	6415	21.48	16.806	≤ 320
802.11a	MCS0	97	6435	21.23	16.748	≤ 320
802.11a	MCS0	105	6475	21.25	16.726	≤ 320
802.11a	MCS0	113	6515	21.20	16.731	≤ 320
802.11a	MCS0	117	6535	21.19	16.693	≤ 320
802.11a	MCS0	149	6695	21.39	16.770	≤ 320
802.11a	MCS0	181	6855	21.45	16.806	≤ 320
802.11a	MCS0	185	6875	21.43	16.816	≤ 320
802.11a	MCS0	189	6895	21.41	16.788	≤ 320
802.11a	MCS0	209	6995	21.27	16.774	≤ 320
802.11a	MCS0	229	7095	21.47	16.808	≤ 320
802.11be-EHT20	MCS0	1	5955	20.99	19.032	≤ 320
802.11be-EHT20	MCS0	49	6195	21.28	19.032	≤ 320
802.11be-EHT20	MCS0	61	6255	21.56	19.083	≤ 320
802.11be-EHT20	MCS0	93	6415	21.59	19.066	≤ 320
802.11be-EHT20	MCS0	97	6435	21.34	19.011	≤ 320
802.11be-EHT20	MCS0	105	6475	21.22	19.106	≤ 320
802.11be-EHT20	MCS0	113	6515	21.39	19.111	≤ 320
802.11be-EHT20	MCS0	117	6535	21.22	19.044	≤ 320
802.11be-EHT20	MCS0	149	6695	21.39	19.064	≤ 320
802.11be-EHT20	MCS0	181	6855	21.45	18.981	≤ 320
802.11be-EHT20	MCS0	185	6875	21.57	19.118	≤ 320
802.11be-EHT20	MCS0	189	6895	21.45	19.068	≤ 320
802.11be-EHT20	MCS0	209	6995	21.27	19.041	≤ 320
802.11be-EHT20	MCS0	229	7095	21.37	19.079	≤ 320

Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)	Test Limit (MHz)
802.11be-EHT40	MCS0	3	5965	40.40	37.682	≤ 320
802.11be-EHT40	MCS0	51	6205	40.00	37.711	≤ 320
802.11be-EHT40	MCS0	91	6405	40.22	37.713	≤ 320
802.11be-EHT40	MCS0	99	6445	40.08	37.747	≤ 320
802.11be-EHT40	MCS0	107	6485	40.09	37.681	≤ 320
802.11be-EHT40	MCS0	115	6525	39.75	37.708	≤ 320
802.11be-EHT40	MCS0	123	6565	40.24	37.793	≤ 320
802.11be-EHT40	MCS0	147	6685	40.13	37.706	≤ 320
802.11be-EHT40	MCS0	179	6845	39.66	37.698	≤ 320
802.11be-EHT40	MCS0	187	6885	39.98	37.747	≤ 320
802.11be-EHT40	MCS0	195	6925	40.16	37.722	≤ 320
802.11be-EHT40	MCS0	211	7005	40.27	37.696	≤ 320
802.11be-EHT40	MCS0	227	7085	40.34	37.765	≤ 320
802.11be-EHT80	MCS0	7	5985	81.45	76.991	≤ 320
802.11be-EHT80	MCS0	55	6225	80.94	77.132	≤ 320
802.11be-EHT80	MCS0	87	6385	80.86	77.238	≤ 320
802.11be-EHT80	MCS0	103	6465	81.36	77.248	≤ 320
802.11be-EHT80	MCS0	119	6545	81.08	77.190	≤ 320
802.11be-EHT80	MCS0	135	6625	81.45	77.160	≤ 320
802.11be-EHT80	MCS0	151	6705	81.08	77.211	≤ 320
802.11be-EHT80	MCS0	167	6785	81.20	77.129	≤ 320
802.11be-EHT80	MCS0	183	6865	80.98	77.113	≤ 320
802.11be-EHT80	MCS0	199	6945	80.56	77.206	≤ 320
802.11be-EHT80	MCS0	215	7025	80.92	77.115	≤ 320
802.11be-EHT160	MCS0	15	6025	163.8	155.92	≤ 320
802.11be-EHT160	MCS0	47	6185	162.6	156.47	≤ 320
802.11be-EHT160	MCS0	79	6345	163.6	156.33	≤ 320
802.11be-EHT160	MCS0	111	6505	163.7	156.02	≤ 320
802.11be-EHT160	MCS0	143	6665	164.2	156.35	≤ 320
802.11be-EHT160	MCS0	175	6825	163.0	156.21	≤ 320
802.11be-EHT160	MCS0	207	6985	164.0	156.33	≤ 320

Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)	99% Bandwidth (MHz)	Test Limit (MHz)
802.11be-EHT320-1	MCS0	31	6105	327.7	313.40	≤ 320
802.11be-EHT320-1	MCS0	95	6425	328.6	315.23	≤ 320
802.11be-EHT320-1	MCS0	159	6745	418.8	315.89	≤ 320
802.11be-EHT320-2	MCS0	63	6265	328.3	314.56	≤ 320
802.11be-EHT320-2	MCS0	127	6585	328.8	314.54	≤ 320
802.11be-EHT320-2	MCS0	191	6905	345.8	315.13	≤ 320


Note:

For channels with a nominal bandwidth less than 320 MHz compliance is demonstrated by way of the 26 dB EBW.

For channels with a nominal bandwidth of 320 MHz compliance is demonstrated by way of the 99% BW.

802.11a 26dB Bandwidth & 99% Bandwidth


Channel 1 (5955MHz)

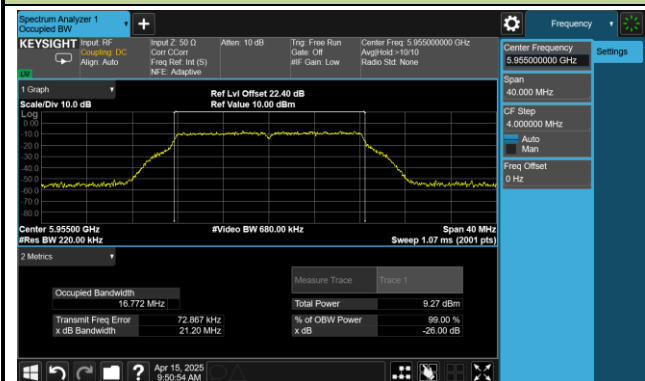


Channel 49 (6195MHz)




Channel 93 (6415MHz)

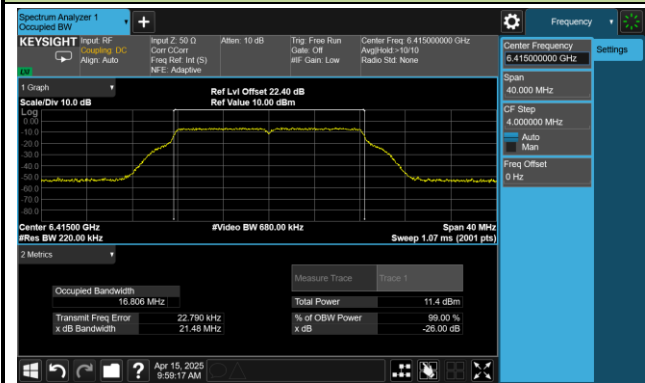


Channel 97 (6435MHz)

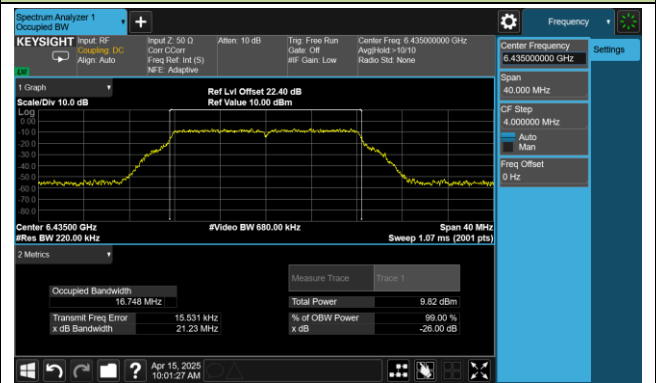


Channel 105 (6475MHz)

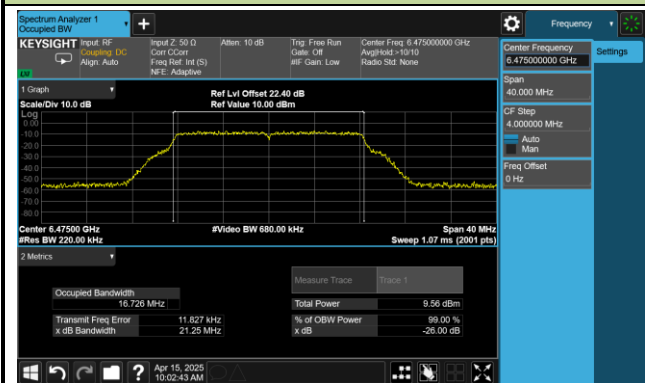


Channel 113 (6515MHz)

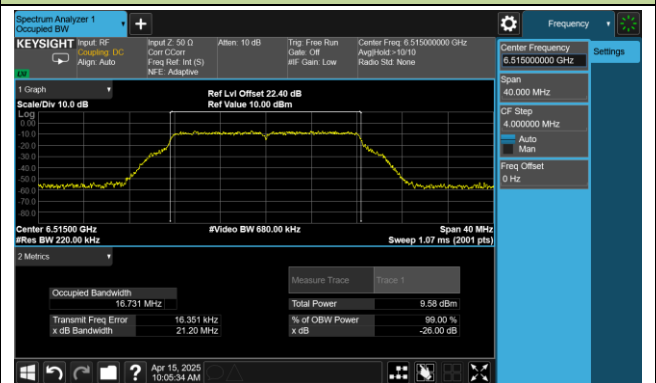

Channel 117 (6535MHz)

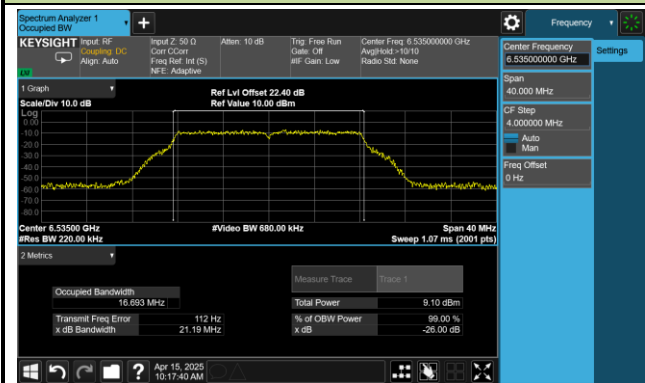


Channel 149 (6695MHz)

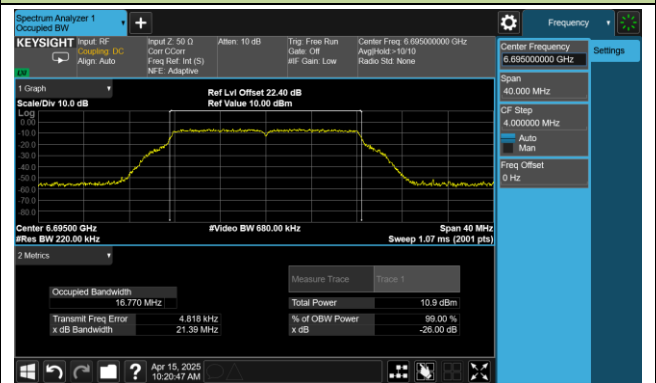


802.11a 26dB Bandwidth & 99% Bandwidth


Channel 181 (6855MHz)

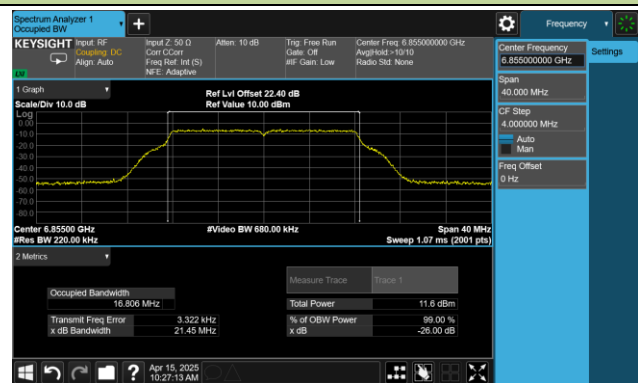


Channel 185 (6875MHz)

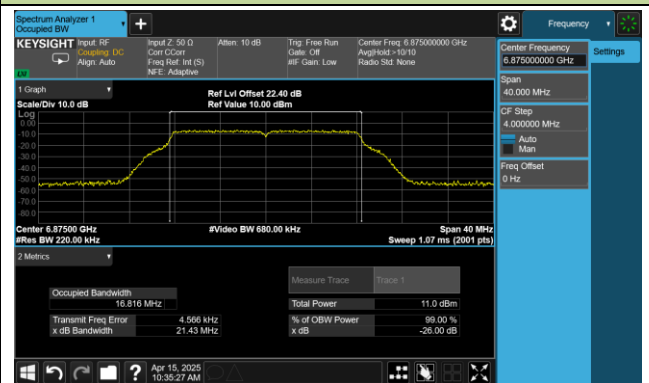


Channel 189 (6895MHz)

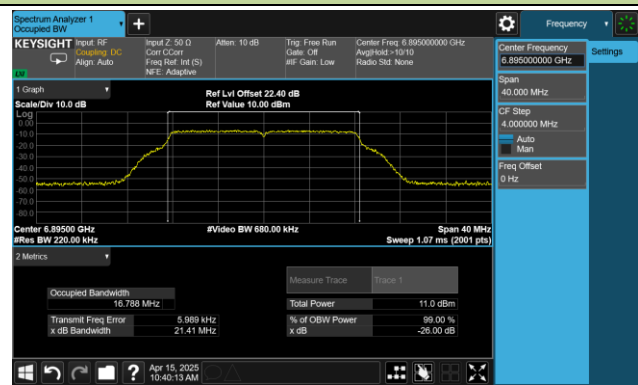

Channel 209 (6995MHz)

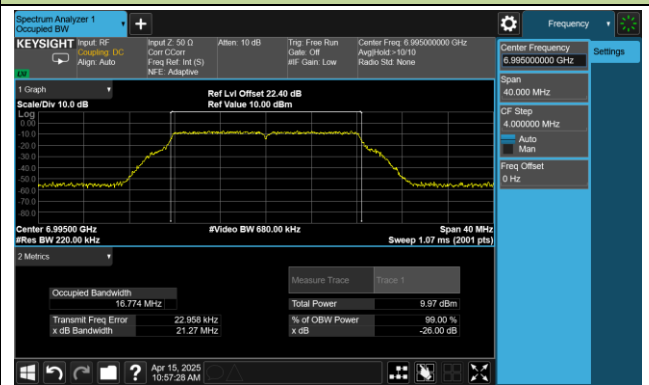


Channel 229 (7095MHz)

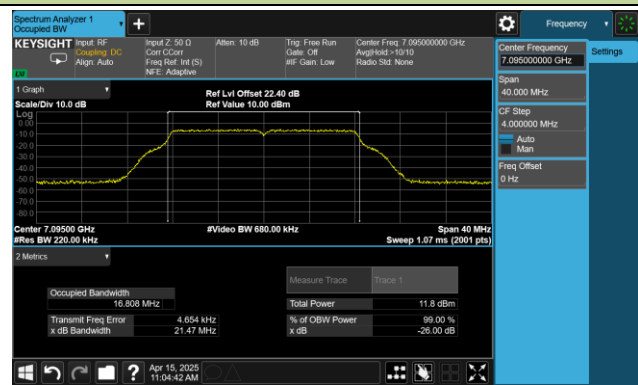


802.11be-EHT20 26dB Bandwidth & 99% Bandwidth


Channel 1 (5955MHz)

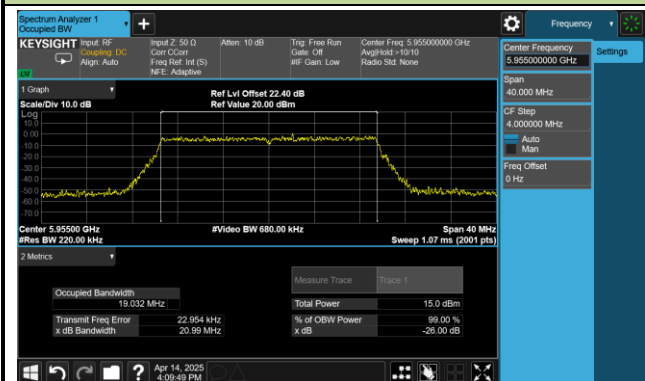


Channel 49 (6195MHz)

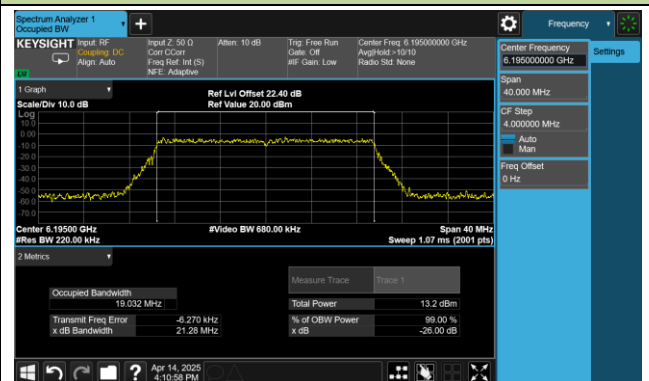


Channel 61 (6255MHz)

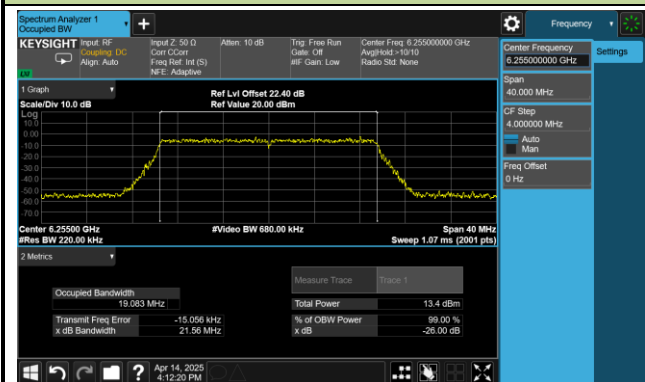


Channel 93 (6415MHz)

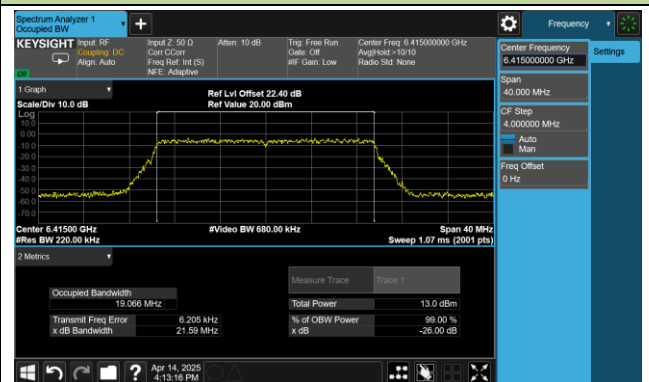


Channel 97 (6435MHz)

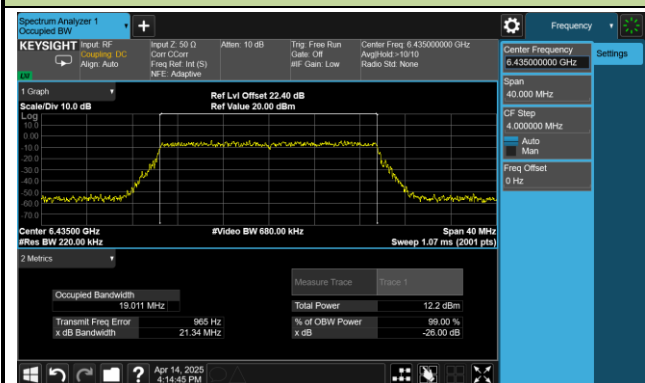


Channel 105 (6475MHz)

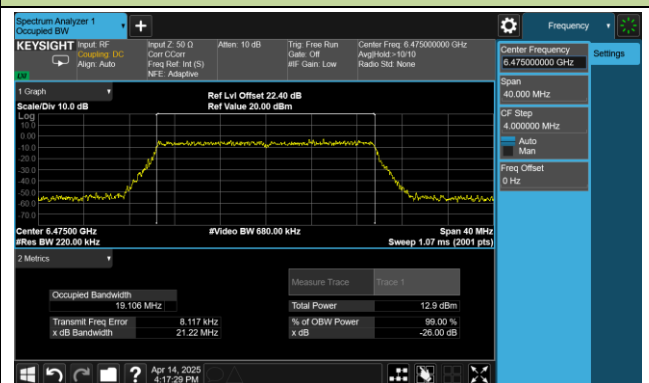

Channel 113 (6515MHz)

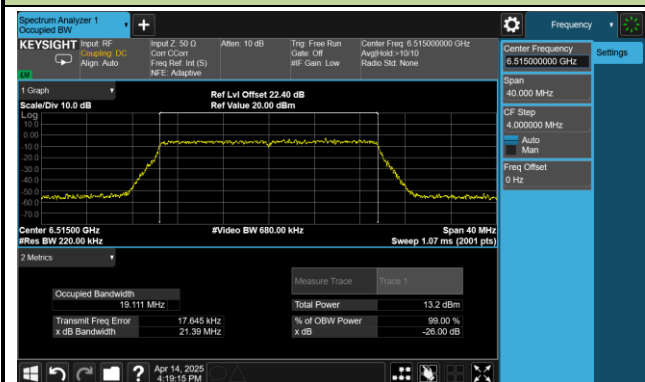


Channel 117 (6535MHz)

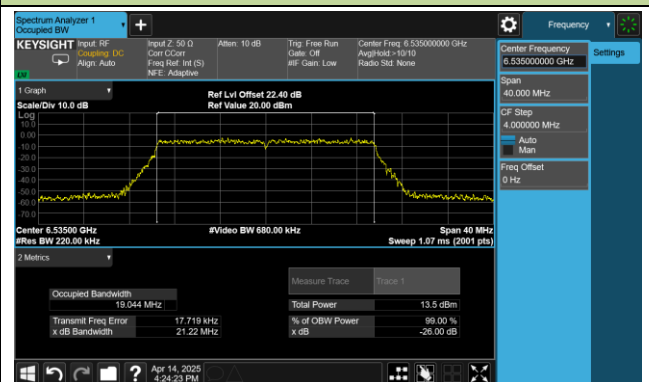


802.11be-EHT20 26dB Bandwidth & 99% Bandwidth


Channel 149 (6695MHz)

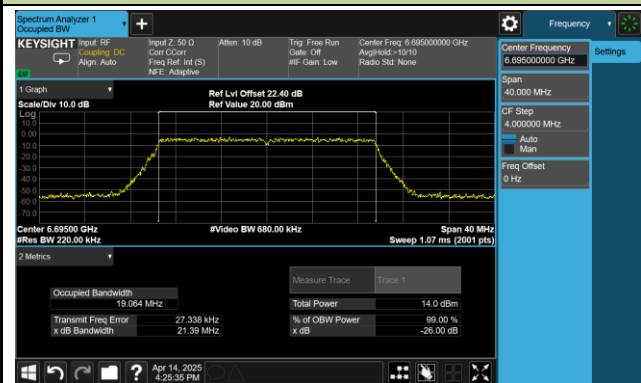


Channel 181 (6855MHz)

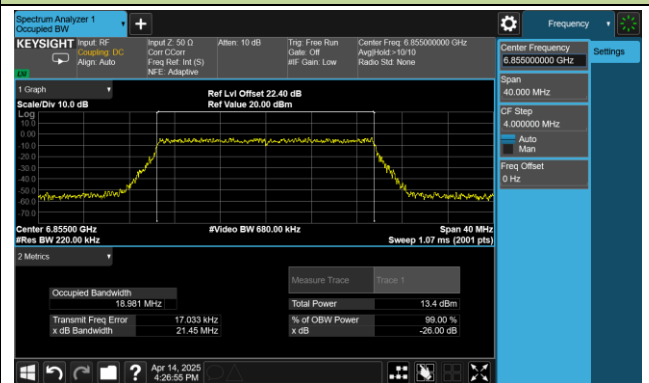


Channel 185 (6875MHz)

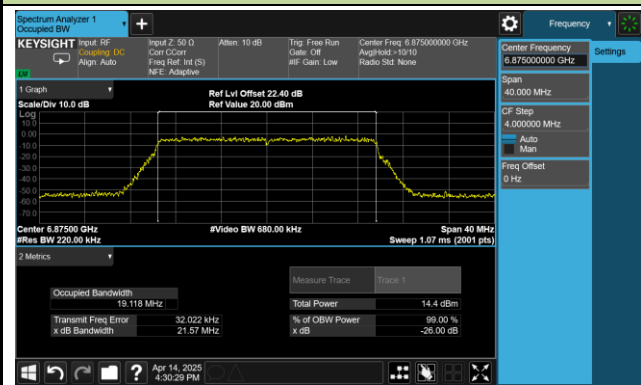


Channel 189 (6895MHz)

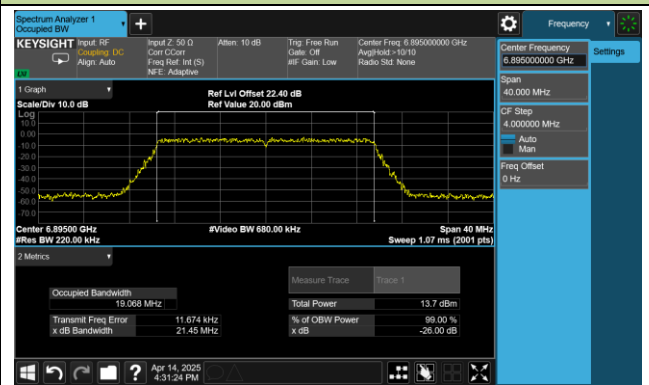

Channel 209 (6995MHz)

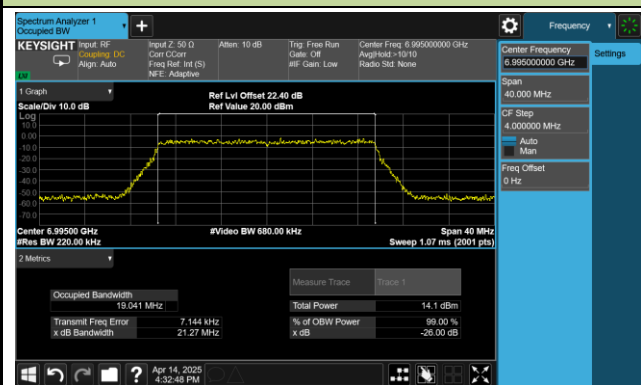


Channel 229 (7095MHz)

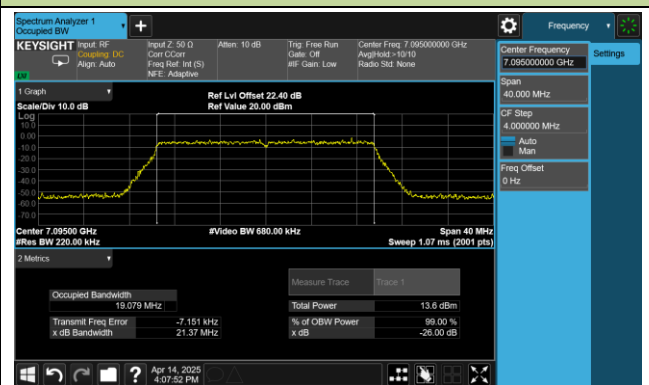


802.11be-EHT40 26dB Bandwidth & 99% Bandwidth


Channel 3 (5965MHz)

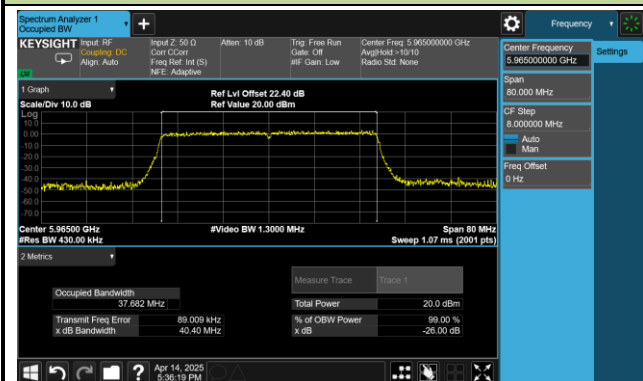


Channel 51 (6205MHz)

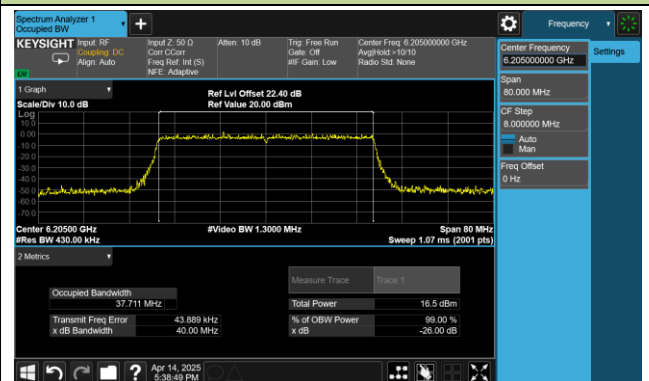


Channel 91 (6405MHz)

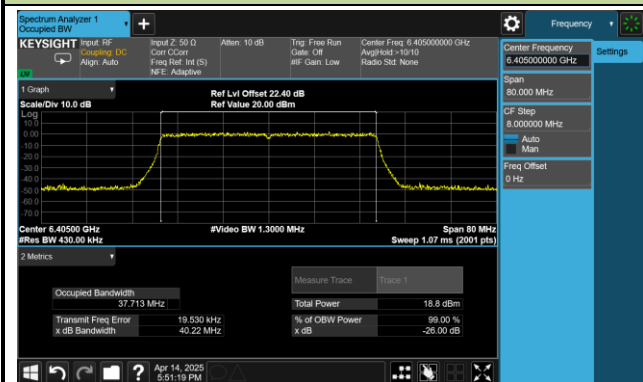


Channel 99 (6445MHz)

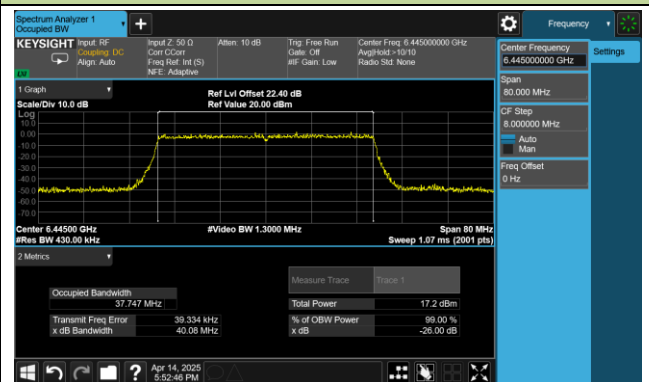


Channel 107 (6485MHz)

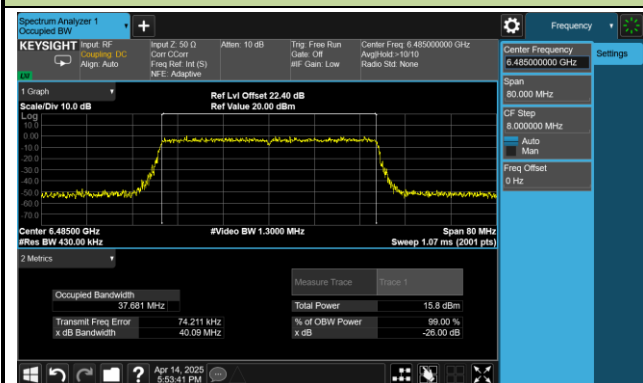


Channel 115 (6525MHz)

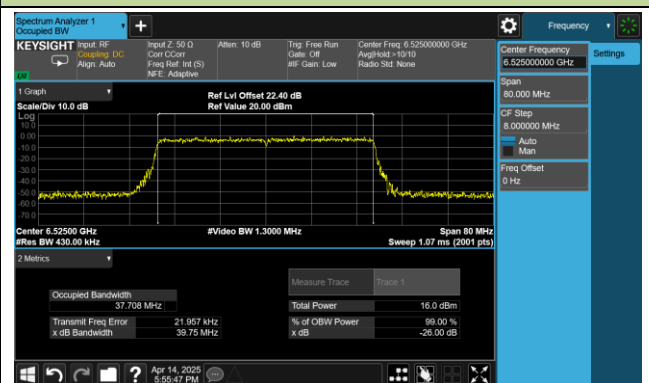

Channel 123 (6565MHz)

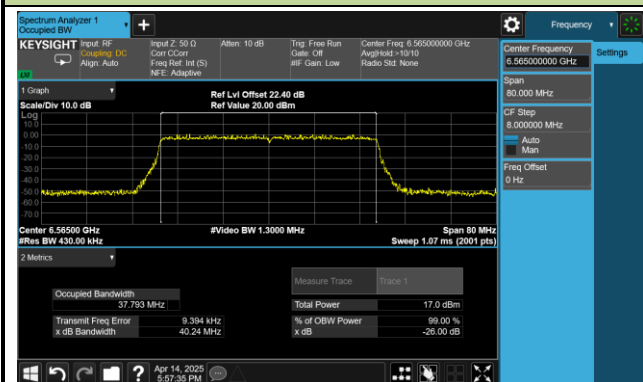


Channel 147 (6685MHz)

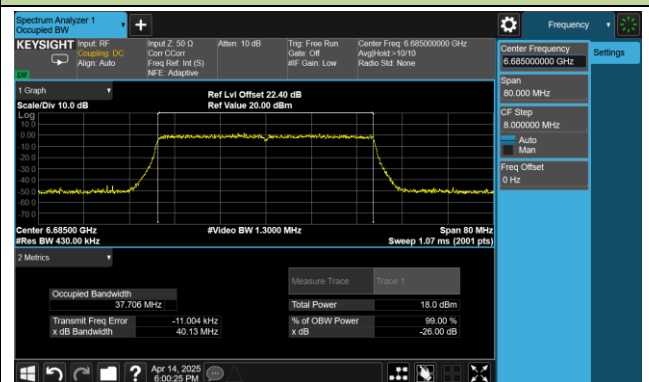


802.11be-EHT40 26dB Bandwidth & 99% Bandwidth


Channel 179 (6845MHz)

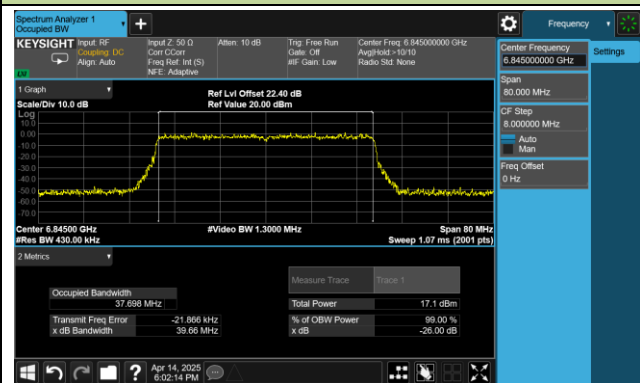


Channel 187 (6885MHz)

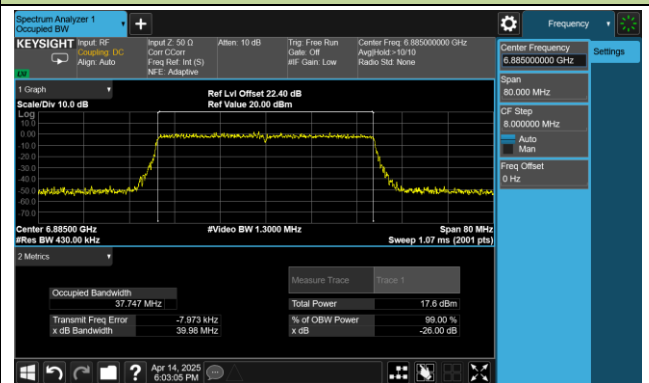


Channel 195 (6925MHz)

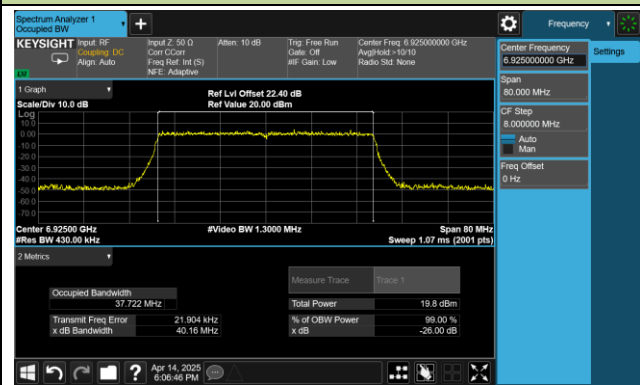

Channel 211 (7005MHz)

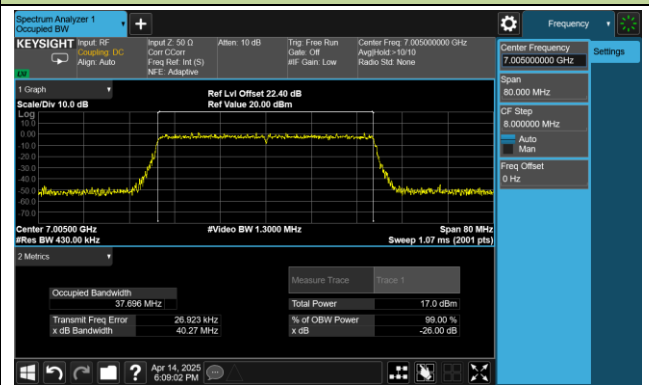


Channel 227 (7085MHz)

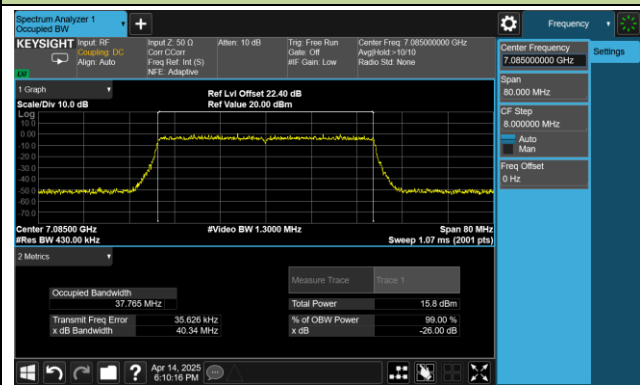


802.11be-EHT80 26dB Bandwidth & 99% Bandwidth


Channel 7 (5985MHz)

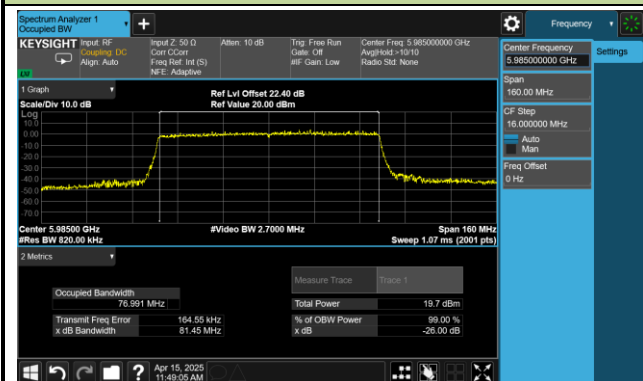


Channel 55 (6225MHz)

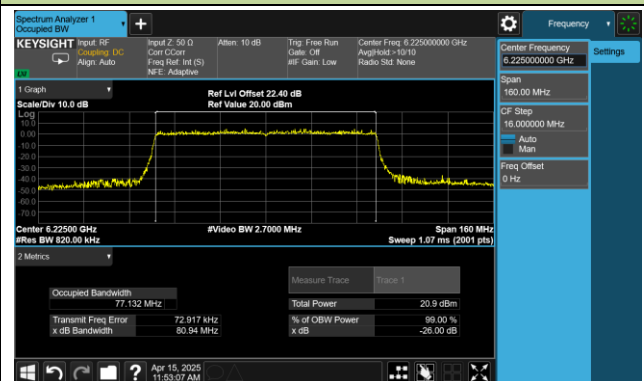


Channel 87 (6385MHz)

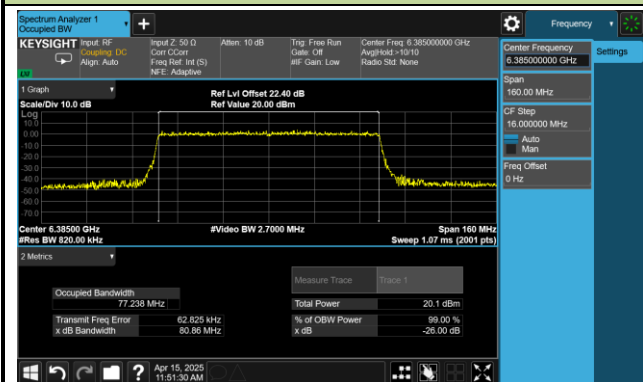


Channel 103 (6465MHz)

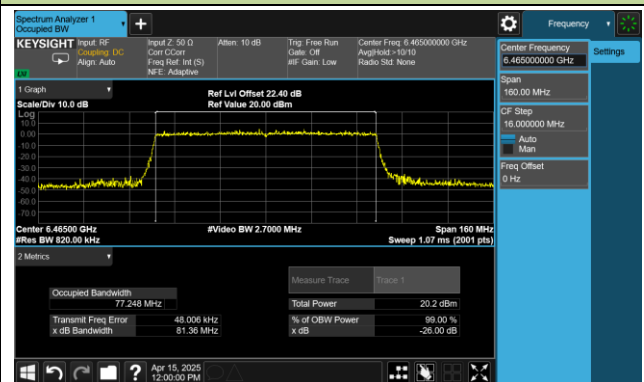


Channel 119 (6545MHz)

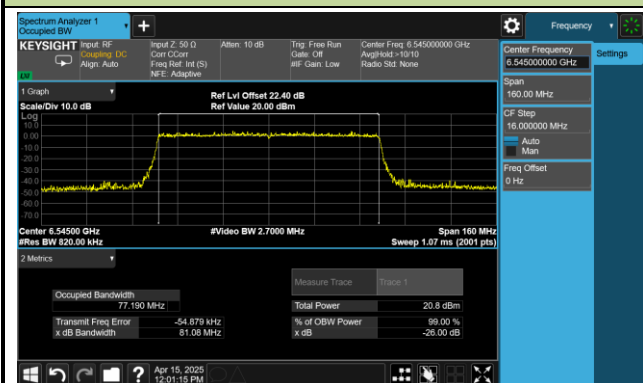


Channel 135 (6625MHz)

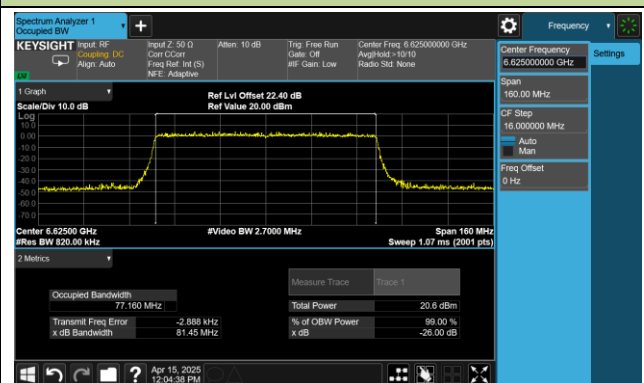


Channel 151 (6705MHz)

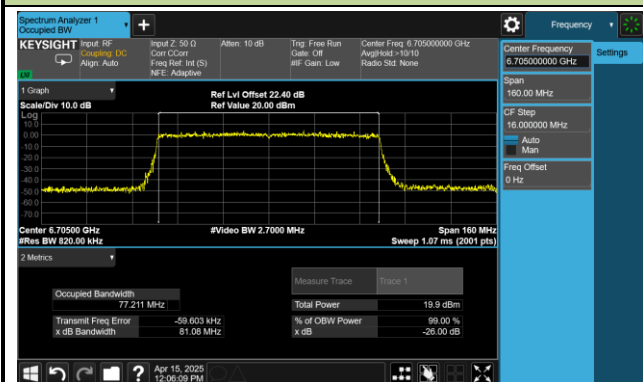


Channel 167 (6785MHz)

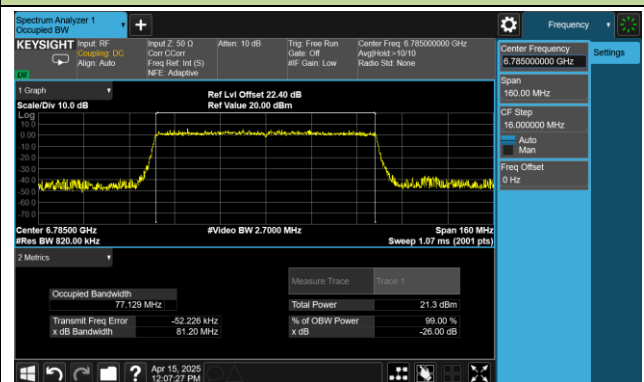

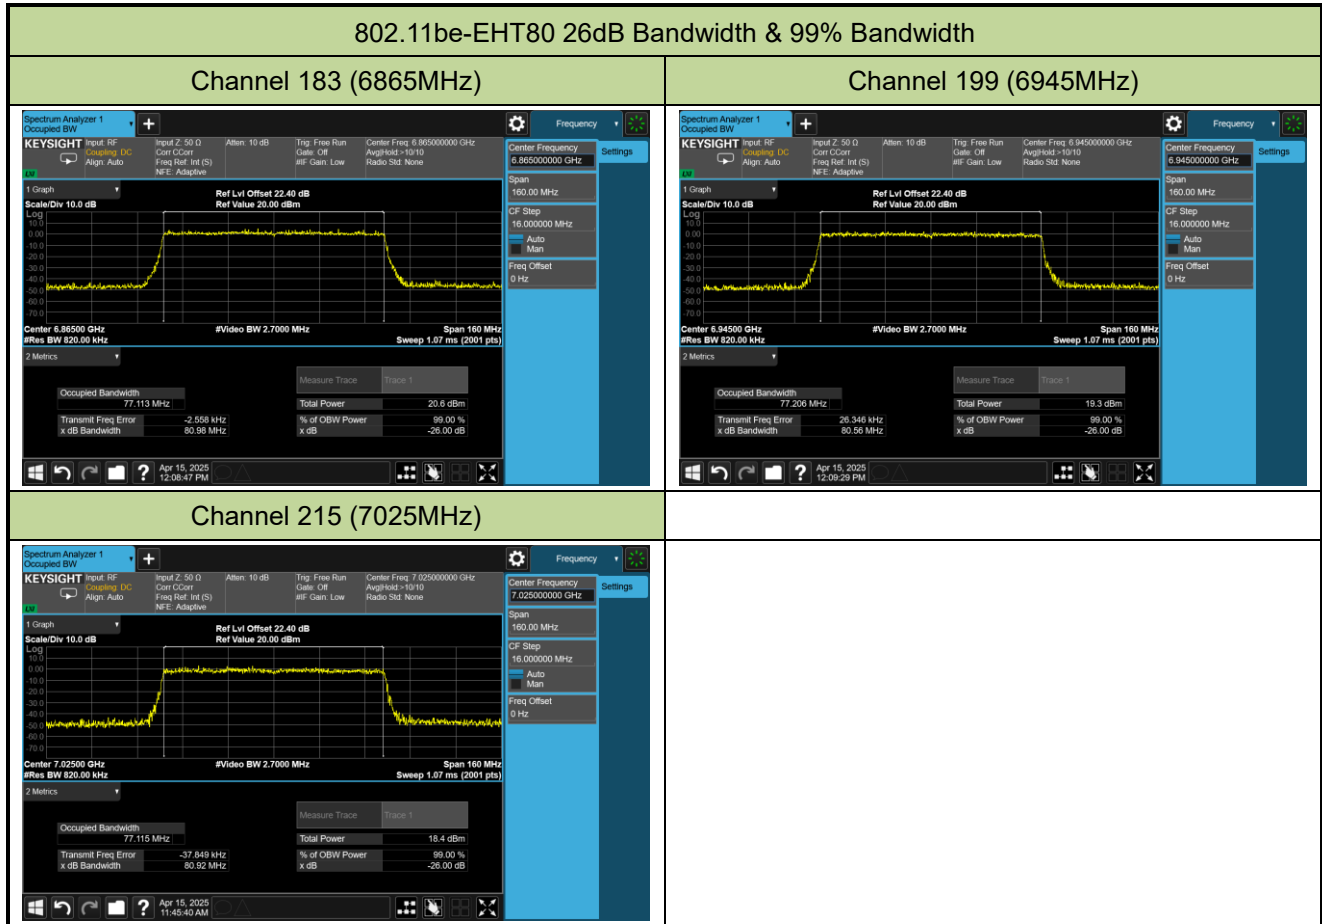

802.11be-EHT160 26dB Bandwidth & 99% Bandwidth


Channel 15 (6025MHz)

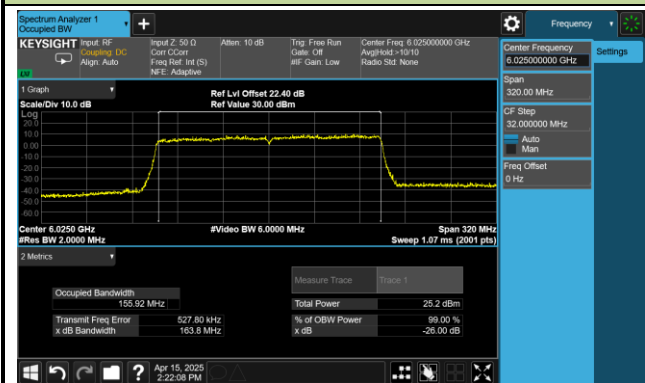


Channel 47 (6185MHz)




Channel 79 (6345MHz)

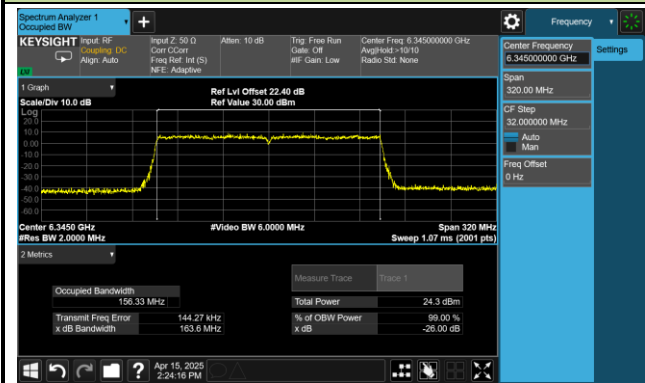


Channel 111 (6505MHz)

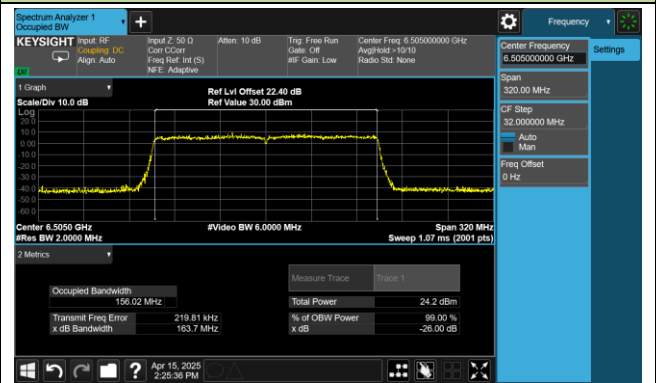


Channel 143 (6665MHz)

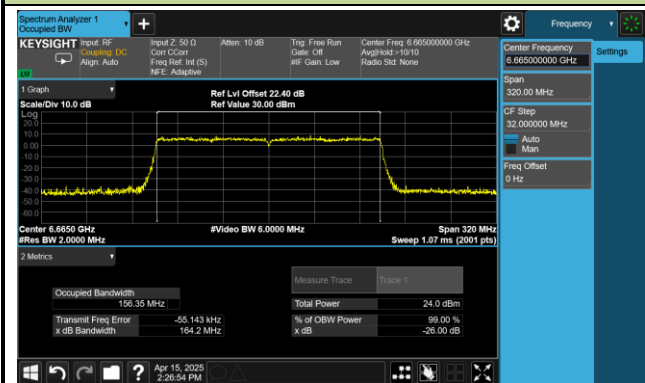

Channel 175 (6825MHz)

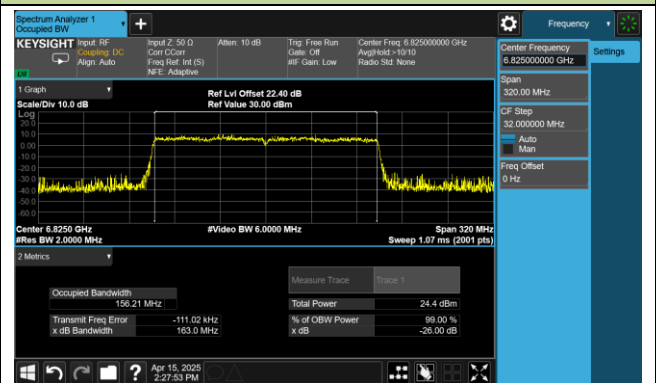


Channel 207 (6985MHz)

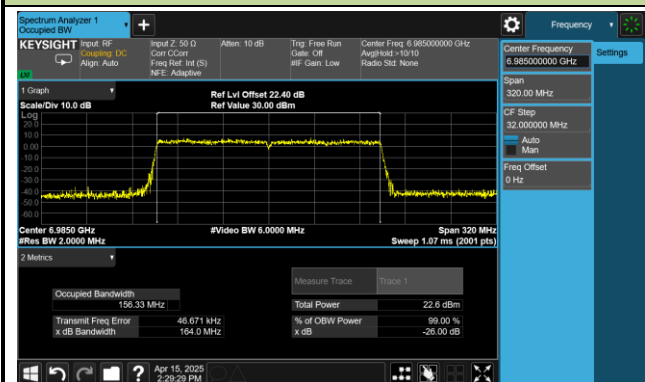


802.11be-EHT320-1 26dB Bandwidth & 99% Bandwidth


Channel 31 (6105MHz)

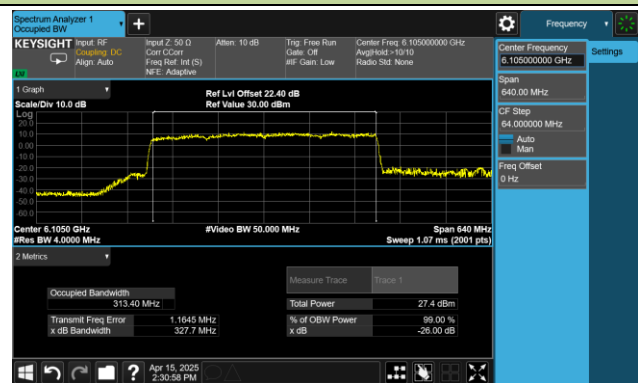

Channel 95 (6425MHz)

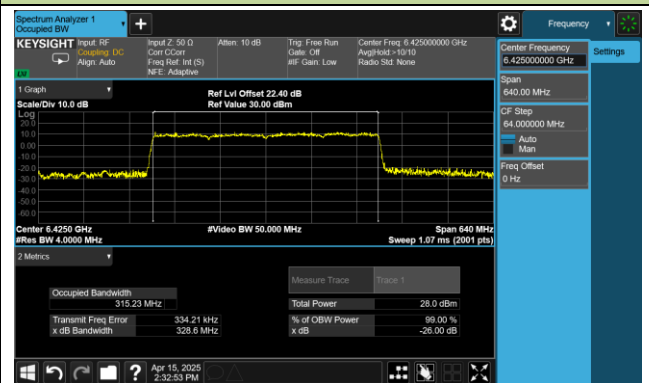


Channel 159 (6745MHz)

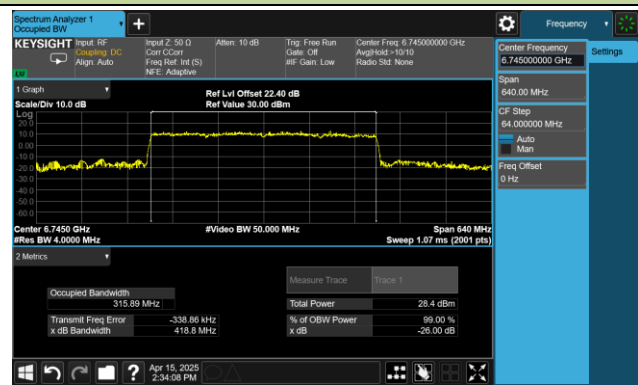


802.11be-EHT320-2 26dB Bandwidth & 99% Bandwidth


Channel 63 (6265MHz)

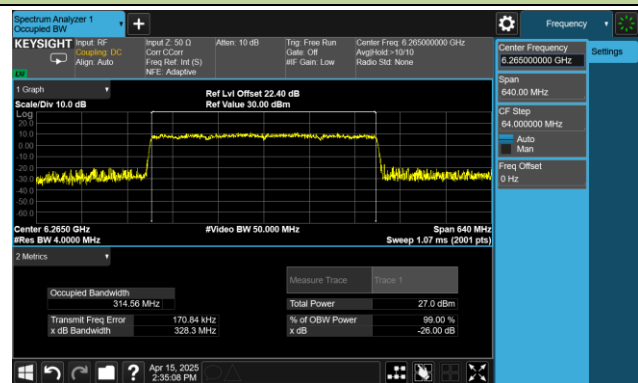

Channel 127 (6585MHz)

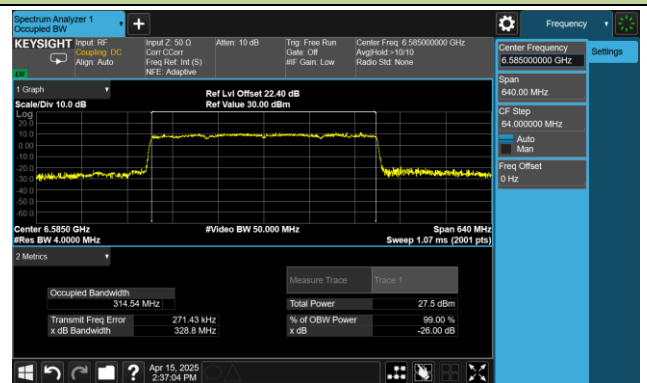

Channel 191 (6905MHz)

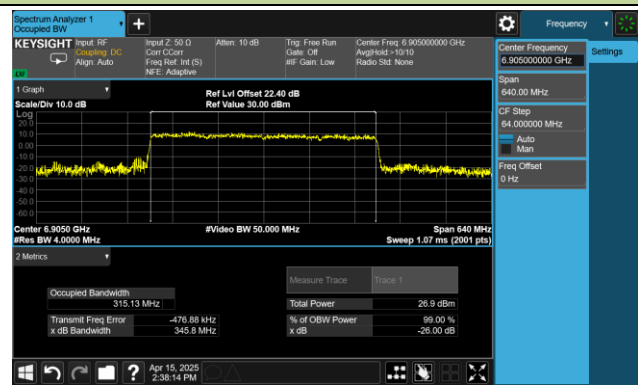

A.3 Output Power Test Result

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-04-20		

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	EIRP (dBμV/m)	EIRP (dBm)	Duty Cycle (%)	10*log (1/x)	Total EIRP (dBm)	Limit (dBm)
802.11a	MCS0	1	5955	109.3	14.10	95.18	0.21	14.31	≤ 30.00
802.11a	MCS0	49	6195	106.9	11.70	95.18	0.21	11.91	≤ 30.00
802.11a	MCS0	93	6415	107.0	11.80	95.18	0.21	12.01	≤ 30.00
802.11a	MCS0	97	6435	107.1	11.90	95.18	0.21	12.11	≤ 30.00
802.11a	MCS0	105	6475	107.1	11.90	95.18	0.21	12.11	≤ 30.00
802.11a	MCS0	113	6515	107.3	12.10	95.18	0.21	12.31	≤ 30.00
802.11a	MCS0	117	6535	107.3	12.10	95.18	0.21	12.31	≤ 30.00
802.11a	MCS0	149	6695	107.3	12.10	95.18	0.21	12.31	≤ 30.00
802.11a	MCS0	181	6855	108.1	12.90	95.18	0.21	13.11	≤ 30.00
802.11a	MCS0	185	6875	108.8	13.60	95.18	0.21	13.81	≤ 30.00
802.11a	MCS0	189	6895	108.7	13.50	95.18	0.21	13.71	≤ 30.00
802.11a	MCS0	209	6995	108.8	13.60	95.18	0.21	13.81	≤ 30.00
802.11a	MCS0	229	7095	107.7	12.50	95.18	0.21	12.71	≤ 30.00
802.11be-EHT20	MCS0	1	5955	110.4	15.20	97.84	0.09	15.29	≤ 30.00
802.11be-EHT20	MCS0	49	6195	109.9	14.70	97.84	0.09	14.79	≤ 30.00
802.11be-EHT20	MCS0	61	6255	110.2	15.00	97.84	0.09	15.09	≤ 30.00
802.11be-EHT20	MCS0	93	6415	110.4	15.20	97.84	0.09	15.29	≤ 30.00
802.11be-EHT20	MCS0	97	6435	111.0	15.80	97.84	0.09	15.89	≤ 30.00
802.11be-EHT20	MCS0	105	6475	110.1	14.90	97.84	0.09	14.99	≤ 30.00
802.11be-EHT20	MCS0	113	6515	109.6	14.40	97.84	0.09	14.49	≤ 30.00
802.11be-EHT20	MCS0	117	6535	109.9	14.70	97.84	0.09	14.79	≤ 30.00
802.11be-EHT20	MCS0	149	6695	110.3	15.10	97.84	0.09	15.19	≤ 30.00
802.11be-EHT20	MCS0	181	6855	110.2	15.00	97.84	0.09	15.09	≤ 30.00
802.11be-EHT20	MCS0	185	6875	110.7	15.50	97.84	0.09	15.59	≤ 30.00
802.11be-EHT20	MCS0	189	6895	110.2	15.00	97.84	0.09	15.09	≤ 30.00
802.11be-EHT20	MCS0	209	6995	110.5	15.30	97.84	0.09	15.39	≤ 30.00
802.11be-EHT20	MCS0	229	7095	109.4	14.20	97.84	0.09	14.29	≤ 30.00

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	EIRP (dBμV/m)	EIRP (dBm)	Duty Cycle (%)	10*log (1/x)	Total EIRP (dBm)	Limit (dBm)
802.11be-EHT40	MCS0	3	5965	113.1	17.90	96.06	0.17	18.07	≤ 30.00
802.11be-EHT40	MCS0	51	6205	113.2	18.00	96.06	0.17	18.17	≤ 30.00
802.11be-EHT40	MCS0	91	6405	112.8	17.60	96.06	0.17	17.77	≤ 30.00
802.11be-EHT40	MCS0	99	6445	113.0	17.80	96.06	0.17	17.97	≤ 30.00
802.11be-EHT40	MCS0	107	6485	112.1	16.90	96.06	0.17	17.07	≤ 30.00
802.11be-EHT40	MCS0	115	6525	112.5	17.30	96.06	0.17	17.47	≤ 30.00
802.11be-EHT40	MCS0	123	6565	112.8	17.60	96.06	0.17	17.77	≤ 30.00
802.11be-EHT40	MCS0	147	6685	112.7	17.50	96.06	0.17	17.67	≤ 30.00
802.11be-EHT40	MCS0	179	6845	112.9	17.70	96.06	0.17	17.87	≤ 30.00
802.11be-EHT40	MCS0	187	6885	113.0	17.80	96.06	0.17	17.97	≤ 30.00
802.11be-EHT40	MCS0	195	6925	112.8	17.60	96.06	0.17	17.77	≤ 30.00
802.11be-EHT40	MCS0	211	7005	113.8	18.60	96.06	0.17	18.77	≤ 30.00
802.11be-EHT40	MCS0	227	7085	112.2	17.00	96.06	0.17	17.17	≤ 30.00
802.11be-EHT80	MCS0	7	5985	115.4	20.20	92.74	0.33	20.53	≤ 30.00
802.11be-EHT80	MCS0	55	6225	115.0	19.80	92.74	0.33	20.13	≤ 30.00
802.11be-EHT80	MCS0	87	6385	114.1	18.90	92.74	0.33	19.23	≤ 30.00
802.11be-EHT80	MCS0	103	6465	114.3	19.10	92.74	0.33	19.43	≤ 30.00
802.11be-EHT80	MCS0	119	6545	115.4	20.20	92.74	0.33	20.53	≤ 30.00
802.11be-EHT80	MCS0	135	6625	114.3	19.10	92.74	0.33	19.43	≤ 30.00
802.11be-EHT80	MCS0	151	6705	115.3	20.10	92.74	0.33	20.43	≤ 30.00
802.11be-EHT80	MCS0	167	6785	114.4	19.20	92.74	0.33	19.53	≤ 30.00
802.11be-EHT80	MCS0	183	6865	114.8	19.60	92.74	0.33	19.93	≤ 30.00
802.11be-EHT80	MCS0	199	6945	114.7	19.50	92.74	0.33	19.83	≤ 30.00
802.11be-EHT80	MCS0	215	7025	114.5	19.30	92.74	0.33	19.63	≤ 30.00
802.11be-EHT160	MCS0	15	6025	117.8	22.60	88.23	0.54	23.14	≤ 30.00
802.11be-EHT160	MCS0	47	6185	117.6	22.40	88.23	0.54	22.94	≤ 30.00
802.11be-EHT160	MCS0	79	6345	117.5	22.30	88.23	0.54	22.84	≤ 30.00
802.11be-EHT160	MCS0	111	6505	117.4	22.20	88.23	0.54	22.74	≤ 30.00
802.11be-EHT160	MCS0	143	6665	118.1	22.90	88.23	0.54	23.44	≤ 30.00
802.11be-EHT160	MCS0	175	6825	118.4	23.20	88.23	0.54	23.74	≤ 30.00
802.11be-EHT160	MCS0	207	6985	117.6	22.40	88.23	0.54	22.94	≤ 30.00

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	EIRP (dBμV/m)	EIRP (dBm)	Duty Cycle (%)	10*log (1/x)	Total EIRP (dBm)	Limit (dBm)
802.11be-EHT320-1	MCS0	31	6105	120.9	25.70	83.19	0.80	26.50	≤ 30.00
802.11be-EHT320-1	MCS0	95	6425	121.3	26.10	83.19	0.80	26.90	≤ 30.00
802.11be-EHT320-1	MCS0	159	6745	120.7	25.50	83.19	0.80	26.30	≤ 30.00
802.11be-EHT320-2	MCS0	63	6265	121.6	26.40	83.19	0.80	27.20	≤ 30.00
802.11be-EHT320-2	MCS0	127	6585	120.4	25.20	83.19	0.80	26.00	≤ 30.00
802.11be-EHT320-2	MCS0	191	6905	121.2	26.00	83.19	0.80	26.80	≤ 30.00

Note 1: EIRP (dBm) = EIRP (dBμV/m) - 95.2.

Note 2: Total EIRP (dBm) = EIRP (dBm) + 10*log (1/Duty cycle).

A.4 Power Spectral Density Test Result

Test Site	SIP-AC3	Test Engineer	Justin Guo
Test Date	2025-03-27 ~ 2025-04-09		

Test Mode	Data Rate/MCS	Channel No.	Freq. (MHz)	EIRP PSD (dBμV/m)	EIRP PSD (dBm/MHz)	Duty Cycle (%)	10*log (1/x)	Final EIRP PSD (dBm/MHz)	Limit (dBm)
802.11a	MCS0	1	5955	99.639	4.439	95.18	0.21	4.654	≤ 5.00
802.11a	MCS0	49	6195	99.863	4.663	95.18	0.21	4.878	≤ 5.00
802.11a	MCS0	93	6415	99.813	4.613	95.18	0.21	4.828	≤ 5.00
802.11a	MCS0	97	6435	99.792	4.592	95.18	0.21	4.807	≤ 5.00
802.11a	MCS0	105	6475	99.626	4.426	95.18	0.21	4.641	≤ 5.00
802.11a	MCS0	113	6515	99.953	4.753	95.18	0.21	4.968	≤ 5.00
802.11a	MCS0	117	6535	99.736	4.536	95.18	0.21	4.751	≤ 5.00
802.11a	MCS0	149	6695	99.931	4.731	95.18	0.21	4.946	≤ 5.00
802.11a	MCS0	181	6855	99.972	4.772	95.18	0.21	4.987	≤ 5.00
802.11a	MCS0	185	6875	99.859	4.659	95.18	0.21	4.874	≤ 5.00
802.11a	MCS0	189	6895	99.791	4.591	95.18	0.21	4.806	≤ 5.00
802.11a	MCS0	209	6995	99.979	4.779	95.18	0.21	4.994	≤ 5.00
802.11a	MCS0	229	7095	99.888	4.688	95.18	0.21	4.903	≤ 5.00
802.11be-EHT20	MCS0	1	5955	99.919	4.719	97.84	0.09	4.814	≤ 5.00
802.11be-EHT20	MCS0	49	6195	99.767	4.567	97.84	0.09	4.662	≤ 5.00
802.11be-EHT20	MCS0	61	6255	99.920	4.720	97.84	0.09	4.815	≤ 5.00
802.11be-EHT20	MCS0	93	6415	100.029	4.829	97.84	0.09	4.924	≤ 5.00
802.11be-EHT20	MCS0	97	6435	99.952	4.752	97.84	0.09	4.847	≤ 5.00
802.11be-EHT20	MCS0	105	6475	100.052	4.852	97.84	0.09	4.947	≤ 5.00
802.11be-EHT20	MCS0	113	6515	99.825	4.625	97.84	0.09	4.720	≤ 5.00
802.11be-EHT20	MCS0	117	6535	99.991	4.791	97.84	0.09	4.886	≤ 5.00
802.11be-EHT20	MCS0	149	6695	99.862	4.662	97.84	0.09	4.757	≤ 5.00
802.11be-EHT20	MCS0	181	6855	100.002	4.802	97.84	0.09	4.897	≤ 5.00
802.11be-EHT20	MCS0	185	6875	99.943	4.743	97.84	0.09	4.838	≤ 5.00
802.11be-EHT20	MCS0	189	6895	99.802	4.602	97.84	0.09	4.697	≤ 5.00
802.11be-EHT20	MCS0	209	6995	100.023	4.823	97.84	0.09	4.918	≤ 5.00
802.11be-EHT20	MCS0	229	7095	99.768	4.568	97.84	0.09	4.663	≤ 5.00

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	EIRP PSD (dBμV/m)	EIRP PSD (dBm/MHz)	Duty Cycle (%)	10*log (1/x)	Final EIRP PSD (dBm/MHz)	Limit (dBm)
802.11be-EHT40	MCS0	3	5965	100.006	4.806	96.06	0.17	4.981	≤ 5.00
802.11be-EHT40	MCS0	51	6205	99.742	4.542	96.06	0.17	4.717	≤ 5.00
802.11be-EHT40	MCS0	91	6405	99.938	4.738	96.06	0.17	4.913	≤ 5.00
802.11be-EHT40	MCS0	99	6445	99.752	4.552	96.06	0.17	4.727	≤ 5.00
802.11be-EHT40	MCS0	107	6485	99.826	4.626	96.06	0.17	4.801	≤ 5.00
802.11be-EHT40	MCS0	115	6525	99.740	4.540	96.06	0.17	4.715	≤ 5.00
802.11be-EHT40	MCS0	123	6565	99.716	4.516	96.06	0.17	4.691	≤ 5.00
802.11be-EHT40	MCS0	147	6685	99.727	4.527	96.06	0.17	4.702	≤ 5.00
802.11be-EHT40	MCS0	179	6845	99.725	4.525	96.06	0.17	4.700	≤ 5.00
802.11be-EHT40	MCS0	187	6885	99.743	4.543	96.06	0.17	4.718	≤ 5.00
802.11be-EHT40	MCS0	195	6925	99.962	4.762	96.06	0.17	4.937	≤ 5.00
802.11be-EHT40	MCS0	211	7005	99.975	4.775	96.06	0.17	4.950	≤ 5.00
802.11be-EHT40	MCS0	227	7085	99.639	4.439	96.06	0.17	4.614	≤ 5.00
802.11be-EHT80	MCS0	7	5985	99.496	4.296	92.74	0.33	4.623	≤ 5.00
802.11be-EHT80	MCS0	55	6225	99.482	4.282	92.74	0.33	4.609	≤ 5.00
802.11be-EHT80	MCS0	87	6385	99.454	4.254	92.74	0.33	4.581	≤ 5.00
802.11be-EHT80	MCS0	103	6465	99.454	4.254	92.74	0.33	4.581	≤ 5.00
802.11be-EHT80	MCS0	119	6545	99.761	4.561	92.74	0.33	4.888	≤ 5.00
802.11be-EHT80	MCS0	135	6625	99.555	4.355	92.74	0.33	4.682	≤ 5.00
802.11be-EHT80	MCS0	151	6705	99.745	4.545	92.74	0.33	4.872	≤ 5.00
802.11be-EHT80	MCS0	167	6785	99.502	4.302	92.74	0.33	4.629	≤ 5.00
802.11be-EHT80	MCS0	183	6865	99.666	4.466	92.74	0.33	4.793	≤ 5.00
802.11be-EHT80	MCS0	199	6945	99.580	4.380	92.74	0.33	4.707	≤ 5.00
802.11be-EHT80	MCS0	215	7025	99.481	4.281	92.74	0.33	4.608	≤ 5.00
802.11be-EHT160	MCS0	15	6025	99.556	4.356	88.23	0.54	4.900	≤ 5.00
802.11be-EHT160	MCS0	47	6185	99.337	4.137	88.23	0.54	4.681	≤ 5.00
802.11be-EHT160	MCS0	79	6345	99.381	4.181	88.23	0.54	4.725	≤ 5.00
802.11be-EHT160	MCS0	111	6505	99.243	4.043	88.23	0.54	4.587	≤ 5.00
802.11be-EHT160	MCS0	143	6665	99.228	4.028	88.23	0.54	4.572	≤ 5.00
802.11be-EHT160	MCS0	175	6825	99.490	4.290	88.23	0.54	4.834	≤ 5.00
802.11be-EHT160	MCS0	207	6985	99.446	4.246	88.23	0.54	4.790	≤ 5.00

Test Mode	Data Rate/MCS	Channel No.	Freq. (MHz)	EIRP PSD (dBμV/m)	EIRP PSD (dBm/MHz)	Duty Cycle (%)	10*log (1/x)	Final EIRP PSD (dBm/MHz)	Limit (dBm)
802.11be-EHT320-1	MCS0	31	6105	99.094	3.894	83.19	0.80	4.693	≤ 5.00
802.11be-EHT320-1	MCS0	95	6425	99.111	3.911	83.19	0.80	4.710	≤ 5.00
802.11be-EHT320-1	MCS0	159	6745	99.029	3.829	83.19	0.80	4.628	≤ 5.00
802.11be-EHT320-2	MCS0	63	6265	99.240	4.040	83.19	0.80	4.839	≤ 5.00
802.11be-EHT320-2	MCS0	127	6585	99.282	4.082	83.19	0.80	4.881	≤ 5.00
802.11be-EHT320-2	MCS0	191	6905	99.128	3.928	83.19	0.80	4.727	≤ 5.00

Note 1: EIRP PSD (dBm/MHz) = EIRP (dBμV/m) - 95.2.

Note 2: If duty cycle < 98%, Final EIRP PSD (dBm/MHz) = EIRP PSD (dBm/MHz) + 10*log(1/Duty cycle).

If duty cycle ≥ 98%, Final EIRP PSD (dBm/MHz) = EIRP PSD (dBm/MHz).