

SCHMIDT & CO., (HK) LTD.

G-BOX INTELLIGENT RF READER

Model: GBOX-P18SK

10 January 2008

Report No.: SL07111504-SCH-001 (15.247)(GBOX-P18SK)
(This report supersedes NONE)



Modifications made to the product : None

This Test Report is Issued Under the Authority of:

Dan Coronia Test Engineer	Leslie Bai Engineering Reviewer

This test report may be reproduced in full only.
Test result presented in this test report is applicable to the representative sample only.





Title: RF Test Report of Schmidt Co., (HK) Ltd, model : GBOX-P18SK
To FCC 15.247 2007

Serial# SL07111504-SCH-001(15.247)(GBOX-P18SK)
Issue Date 10 January 2008
Page 2 of 66
www.siemic.com

SIEMIC ACREDITATION DETAILS: NVLAP Lab Code: 200729-0

United States Department of Commerce
National Institute of Standards and Technology



Certificate of Accreditation to ISO/IEC 17025:2005

NVLAP LAB CODE: 200729-0

SIEMIC Laboratories
San Jose, CA

*is accredited by the National Voluntary Laboratory Accreditation Program for specific services,
listed on the Scope of Accreditation, for:*

ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS

*This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005.
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality
management system (refer to joint ISO-IAC-IAF Communiqué dated 18 June 2005).*

2008-01-01 through 2008-12-31

Effective dates



Sally S. Bruce
For the National Institute of Standards and Technology



Title: RF Test Report of Schmidt Co., (HK) Ltd, model : GBOX-P18SK
To FCC 15.247 2007

Serial# SL07111504-SCH-001(15.247)(GBOX-P18SK)
Issue Date 10 January 2008
Page 3 of 66
www.siemic.com

SIEMIC ACREDITATION DETAILS: FCC Registration No. 783147

FEDERAL COMMUNICATIONS COMMISSION

Laboratory Division
7435 Oakland Mills Road
Columbia, MD 21046

January 27, 2005

Registration Number: 783147

SIEMIC Laboratories
2206 Ringwood Avenue
San Jose, CA 95131

Attention: Leslie Bai

Re: Measurement facility located at San Jose
3 & 10 meter site
Date of Renewal: January 27, 2005

Dear Sir or Madam:

Your request for renewal of the registration of the subject measurement facility has been received. The information submitted has been placed in your file and the registration has been renewed. The name of your organization will remain on the list of facilities whose measurement data will be accepted in conjunction with applications for Certification under Parts 15 or 18 of the Commission's Rules. Please note that the file must be updated for any changes made to the facility and the registration must be renewed at least every three years.

Measurement facilities that have indicated that they are available to the public to perform measurement services on a fee basis may be found on the FCC website www.fcc.gov under E-Filing, OET Equipment Authorization Electronic Filing, Test Firms.

Sincerely,

Phyllis Parrish
Information Technician



Title: RF Test Report of Schmidt Co., (HK) Ltd, model : GBOX-P18SK
To FCC 15.247 2007

Serial# SL07111504-SCH-001(15.247)(GBOX-P18SK)
Issue Date 10 January 2008
Page 4 of 66
www.siemic.com

SIEMIC ACREDITATION DETAILS: Industry of Canada Registration No. 4842-1



April 26, 2006

OUR FILE: 46405-4842
Submission No: 114591

Siemic Inc.
2106 Ringwood Ave.,
San Jose, CA 95131

Dear Sir/Madame:

The Bureau has received your application for the Alternate Test Site and the filing is satisfactory to Industry Canada.


Please reference to the file number (4842-1) in the body of all test reports containing measurements performed on the site.

Renewal of the filing is required every two years.

If you have any questions, you may contact the Bureau at the telephone number below or by e-mail at certification.bureau@ic.gc.ca. Please reference our file number above for all correspondence.

Yours sincerely,

Robert Corey
Manager Certification
Certification and Engineering Bureau
3701 Carling Ave., Building 94
Ottawa, Ontario
K2H 8S2
Tel. No. (613) 990-3869

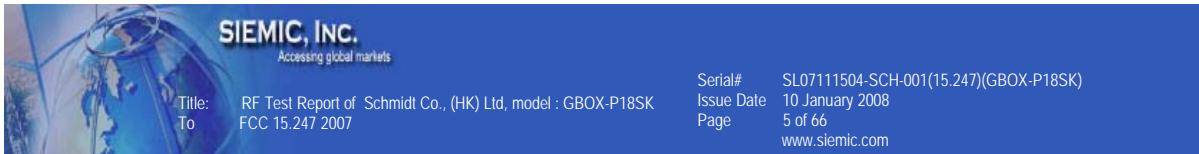

SIEMIC ACREDITATION DETAILS: Japan VCCI Registration No. 2195



Voluntary Control Council for Interference
by Information Technology Equipment
7F NDA Bldg. 2-3-5, Azabudai,
Minato-Ku, Tokyo, Japan, 106-0041
Tel+81-3-5575-3138
Fax+81-3-5575-3137
<http://www.vcci.or.jp>

February 12, 2004

TO: SIEMIC, INC.

Membership NO: 2195

We confirmed your payment for annual membership fee and admission fee. Thank you very much for your remitting.

Please find enclosed VCCI documents. As admission fee and annual membership fee were confirmed, your company registered as VCCI official member.

From now on, it is possible for your company to submit conformity verification report or/and application for registration of measurement facilities.

Please find necessary forms for your submission from VCCI web-site.
www.vcci.or.jp

When you submit conformity verification report, please submit to Ms. Yoko Inagaki / inagaki@vcci.or.jp and application for registration of measurement facilities, please submit to Mr. Masaru Denda / denda@vcci.or.jp


Their address, phone and fax number are absolutely same as L. Please refer address indicated on top right-hand corner of this page.

If you have any other questions regarding membership, feel free to contact me. Thank you very much.

Best Regards,


Naoko Hori (Ms.)
VCCI
hori@vcci.or.jp

Enclosure

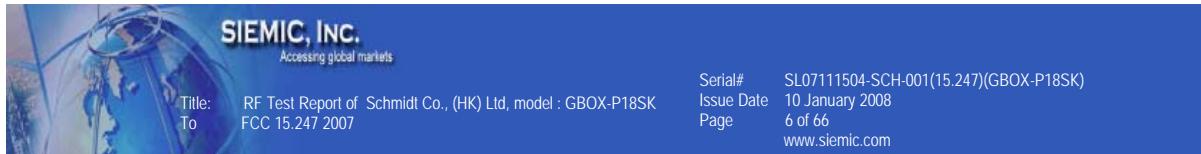

SIEMIC ACREDITATION DETAILS: Japan RF Technologies Accreditation No. MRF050927



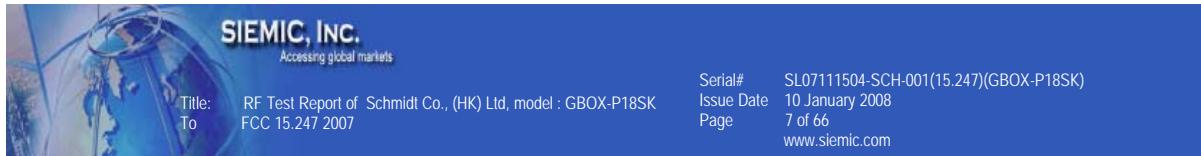

SIEMIC ACREDITATION DETAILS: Korea MIC Lab Code: KR0032



SIEMIC ACREDITATION DETAILS: Korea CAB ID: US0160



UNITED STATES DEPARTMENT OF COMMERCE
National Institute of Standards and Technology
Gaithersburg, Maryland 20889

April 17, 2006

Mr. Leslie Bai
SIEMIC Laboratories
2206 Ringwood Avenue
San Jose, CA 95131

Dear Mr. Bai:

I am pleased to inform you that your laboratory has been recognized by the Ministry of Information and Communication's Radio Research Laboratory (RRL) under the Asia Pacific Economic Cooperation (APEC) Mutual Recognition Arrangement (MRA). Your laboratory is now designated to act as a Conformity Assessment Body (CAB) under Appendix B, **Phase I** Procedures, of the APEC Tel MRA. The pertinent information about your laboratory's designation is as follows:

CAB Name: **SIEMIC Laboratories**
Identification No.: **US0160**
Scope:

Coverage	Standards	Date of Recognition
Electro Magnetic Interference	1. RRL Notice No. 2005-82: Technical Requirements for Electromagnetic Interference 2. Annex 8(KN-22), RRL Notice No. 2005-131: Conformity Assessment Procedure for Electromagnetic Interference	April 13, 2006
Electro Magnetic Susceptibility	1. RRL Notice No. 2005-130: Technical Requirements for Electromagnetic Susceptibility 2. Annex 1-7(KN-61000-4-2, -4-3, -4-4, -4-5, -4-6, -4-8, -4-11), RRL Notice No. 2005-132: Conformity Assessment Procedure for Electromagnetic Susceptibility	April 13, 2006


You may submit test data to RRL to verify that the equipment to be imported into Korea satisfies the applicable requirements. The designation of your organization will remain in force as long as its accreditation for the designated scope remains valid and comply with the designation requirements.

The names of all recognized CABs will be posted on the NIST website at <http://ts.nist.gov/mra>. If you have any questions please contact Mr. Jagindar (Joe) Dhillon at (301) 975-5521. We appreciate your continued interest in our international conformity assessment activities.

Sincerely,

David F. Alderman
Group Leader, Standards Coordination and Conformity Group

cc: Jagindar Dhillon

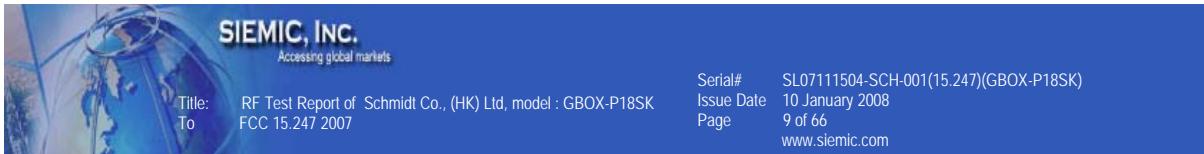

SIEMIC ACREDITATION DETAILS: Taiwan BSMI Accreditation No. SL2-IN-E-1130R



UNITED STATES DEPARTMENT OF COMMERCE
National Institute of Standards and Technology
Gaithersburg, Maryland 20883

May 3, 2006

Mr. Leslie Bai
SIEMIC Laboratories
2206 Ringwood Avenue
San Jose, CA 95131

Dear Mr. Bai:

I am pleased to inform you that your laboratory has been recognized by the Chinese Taipei's Bureau of Standards, Metrology, and Inspection (BSMI) under the Asia Pacific Economic Cooperation (APEC) Mutual Recognition Arrangement (MRA). Your laboratory is now designated to act as a Conformity Assessment Body (CAB) under Appendix B, **Phase I** Procedures, of the APEC Tel MRA. You may submit test data to BSMI to verify that the equipment to be imported into Chinese Taipei satisfies the applicable requirements. The designation of your organization will remain in force as long as its accreditation for the designated scope remains valid and comply with the designation requirements. The pertinent designation information is as follows:

- BSMI number: **SL2-IN-E-1130R** (Must be applied to the test reports)
- U.S Identification No: **US0160**
- Scope of Designation: **CNS 13438**
- Authorized signatory: **Mr. Leslie Bai**


The names of all recognized CABs will be posted on the NIST website at <http://ts.nist.gov/mra>. If you have any questions, please contact Mr. Dhillon at 301-975-5521. We appreciate your continued interest in our international conformity assessment activities.

Sincerely,

David F. Alderman
Group Leader, Standards Coordination and Conformity Group

cc: Joginder Dhillon

NIST

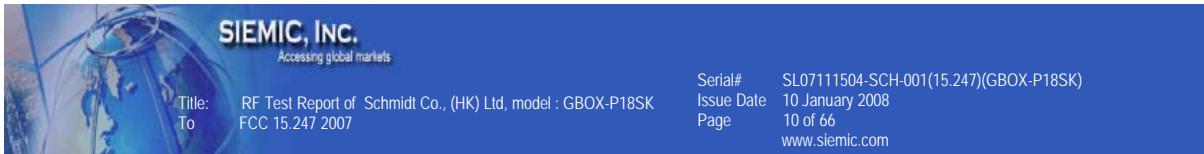

SIEMIC ACREDITATION DETAILS: Taiwan NCC CAB ID: US0160



UNITED STATES DEPARTMENT OF COMMERCE
National Institute of Standards and Technology
Gaithersburg, Maryland 20885

August 8, 2006

Mr. Leslie Bai
SIEMIC Laboratories
2206 Ringwood Avenue
San Jose, CA 95131

Dear Mr. Bai:

I am pleased to inform you that SIEMIC Laboratories has been recognized by the Chinese Taipei's National Communications Commission (NCC) under the Asia Pacific Economic Cooperation for Telecommunications and Information, Mutual Recognition Arrangement (APEC Tel MRA). Your laboratory is now designated to act as a Conformity Assessment Body (CAB) under Appendix B, **Phase I** Procedures, of the APEC Tel MRA.

You may submit test data to NCC to verify that the equipment to be imported into Chinese Taipei satisfies their applicable requirements using the following guidelines:

- Your laboratory's assigned 6-digit U.S. identification number is **US0160**. You should reference this number in your correspondence.
- The scope of designation is limited to **LP0002**. Your designation will remain in force as long as your accreditation remains valid for the scope of designation.

If you have any questions please contact Mr. Jogindar Dhillon via email at dhillon@nist.gov or via fax at 301-975-5414. The names of all recognized laboratories will be posted on the NIST website at <http://ts.nist.gov/mra>. We appreciate your continued interest in our international conformity assessment activities.

Sincerely,

David F. Alderman
Group Leader, Standards Coordination and Conformity Group

cc: Jogindar Dhillon

NIST

SIEMIC ACREDITATION DETAILS: Mexico NOM Recognition


Laboratorio Valentín V. Rivero

CAMARA NACIONAL
DE LA INDUSTRIA
ELECTRONICA, DE
TELECOMUNICACIONES
E INFORMATICA

México D.F. a 16 de octubre de 2006.

LESLIE BAI
DIRECTOR OF CERTIFICATION
SIEMIC LABORATORIES, INC.
ACCESSING GLOBAL MARKETS
P R E S E N T E

En contestación a su escrito de fecha 5 de septiembre del año en curso, le comento que estamos muy interesados en su intención de firmar un Acuerdo de Reconocimiento Mutuo, para lo cual adjunto a este escrito encontrara el Acuerdo en idioma inglés y español prellenado de los cuales le pido sea revisado y en su caso corregido, para que si esta de acuerdo poder firmarlo para mandarlo con las autoridades Mexicanas para su visto bueno y así poder ejercer dicho acuerdo.


Aprovecho este escrito para mencionarle que nuestro intermediario gestor será la empresa Isabel de México, S. A. de C. V., empresa que ha colaborado durante mucho tiempo con nosotros en lo relacionado a la evaluación de la conformidad y que cuenta con amplia experiencia en la gestoría de la certificación de cumplimiento con Normas Oficiales Mexicanas de producto en México.

Me despido de usted enviándole un cordial saludo y esperando sus comentarios al Acuerdo que nos ocupa.

Atentamente:


Ing. Faustino López González
Gerente Técnico del Laboratorio de
CANIEI.

Callejón 71
Hacienda Condessa
C.P. 11000 México, D.F.
Tel. 5264-0308 con 12 líneas
Fax 5264-0488
www.caniei.org

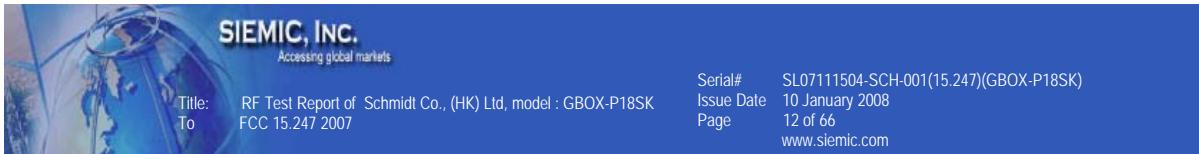

SIEMIC ACREDITATION DETAILS: Hong Kong OFTA Recognition No. D23/16V



Your Ref 来函檔號 : D23/16 V
Our Ref 本局檔號 :

Telephone 電話 : (852) 2961 6320
Fax No 圖文傳真 : (852) 2838 5004
E-mail 電郵地址 : 20 July 2005

Mr. Leslie Bai
Director of Certification,
SIEMIC Laboratories
2206 Ringwood Avenue
San Jose, California 95131
USA

Dear Mr. Bai,

Application of Recognised Testing Agency (RTA)

Referring your subenmission of 28 June 2005 in relation to the application of RTA, I am pleased to inform you that OFTA has appointed SIEMIC Laboratories (SIEMIC) as a Recognised Testing Agency (RTA) :

Please note that, under the Hong Kong Telecommunications Equipment Evaluation and Certification (HKTEC) Scheme, SIEMIC is authorized to conduct evaluation tests on telecommunications equipment against the following HKTA specifications :

Scope of recognition (HKTA Specifications):

1001, 1002, 1004, 1006, 1007, 1008
1010, 1015, 1016
1022, 1026, 1027, 1029
1030, 1031, 1032, 1033, 1034, 1035, 1039
1041, 1042, 1043, 1045, 1047, 1048
2001

You are requested to refer to and comply with the code of practice and guidelines for RTA as given in the Information Note OFTA I 411 "Recognised Testing Agency (RTA) for Conducting Evaluation Test of Telecommunications Equipment", which can be downloaded from OFTA's homepage at <http://www.ofta.gov.hk/tec/information-notes.html>.


If you have any queries, please do not hesitate to contact me.

Yours sincerely,


(K. K. Sin)
for Director-General
of Telecommunications

Office of the Telecommunications Authority
29/F Wu Chung House 213 Queen's Road East Wan Chai Hong Kong
電訊管理局
香港灣仔皇后大道東 213 號胡忠大廈 29 字樓

<http://www.ofta.gov.hk>

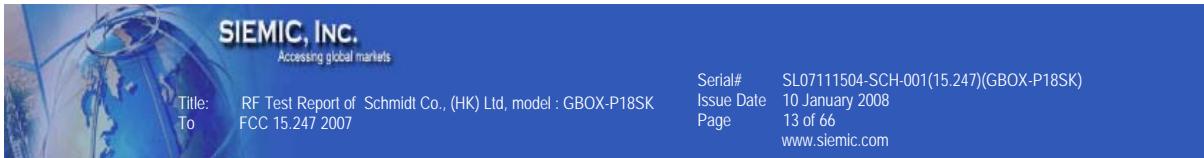


This page has been left blank intentionally.

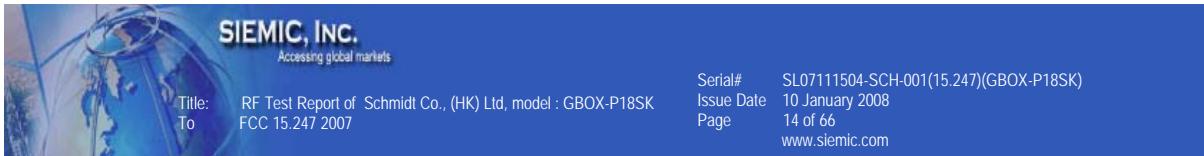

CONTENTS

1	EXECUTIVE SUMMARY & EUT INFORMATION	3
2	TECHNICAL DETAILS.....	3
3	MODIFICATION.....	3
4	TEST SUMMARY.....	3
5	MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	3
	ANNEX A. TEST INSTRUMENT & METHOD	3
	ANNEX B EUT AND TEST SETUP PHOTOGRAPHS	3
	ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT	3
	ANNEX D USER MANUAL, BLOCK & CIRCUIT DIAGRAM	3

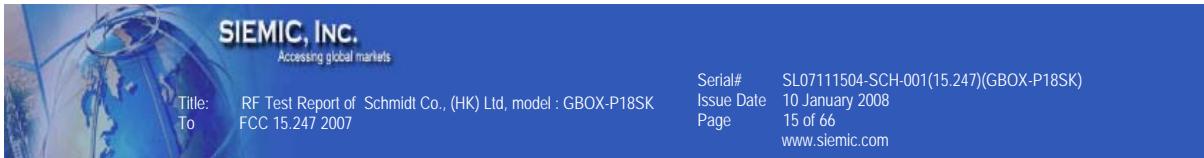


This page has been left blank intentionally.

1 Executive Summary & EUT information

The purpose of this test programme was to demonstrate compliance of the SCHMIDT CO., (HK) LTD., model: GBOX-P18SK against the current Stipulated Standards. The G-Box Intelligent RFID Reader have demonstrated compliance with the FCC 15.247 2007.


EUT Information

EUT Description	: In order for RFID readers to do more than simply read and act as a data conduit, they need processing speed and ample memory. With the powerful combination of an Intel Pentium M 1.8GHz processor and up to 1GB of optional memory, the Schmidt RFID™ G-BOX intelligent reader is the smartest RFID reader available, capable of running complex RFID applications delivering faster processing and localized intelligence.
	<ul style="list-style-type: none">• The G-Box Intelligent RFID Reader uses an EPC global All certified Skye Module M9 (902-928 MHz RFID frequency band).
Model No	: GBOX-P18SK
Serial No	: N/A
Input Power	: 100-240 Vac
Classification	: Frequency Hopping Spread Spectrum / Device
Per Stipulated Test Standard	

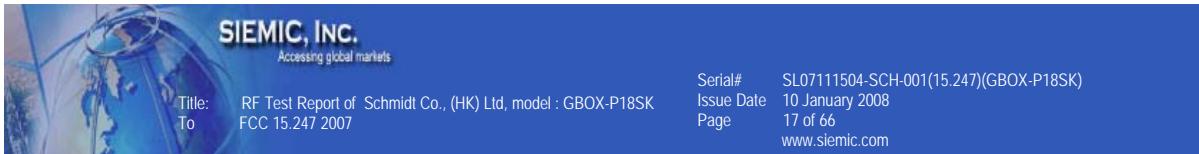

2 TECHNICAL DETAILS

Purpose	Compliance testing of RFID Reader with stipulated standard
Applicant / Client	SCHMIDT & CO., (HK) LTD.
Manufacturer	Schmidt & Co., (HK) Ltd. 21/F, Citicorp Centre, 18 Whitfield Road. Causeway Bay, Hong Kong
Laboratory performing the tests	SIEMIC Laboratories
Test report reference number	SL07111504-SCH-001 (15.247)(GBOX-P18SK)
Date EUT received	10 December 2007
Standard applied	47 CFR §15.247 (2007)
Dates of test (from – to)	09 January 2008 – 10 January 2008
No of Units:	2
Equipment Category:	DSS
Trade Name:	SCHMIDT
Model :	GBOX-P18SK
RF Operating Frequency (ies)	902.7 to 927.3 MHz
Number of Channels :	124
Modulation :	ISO 18000-6B , ISO 18000-6C
FCC ID :	VW6-GBOXPSKGEN2
IC ID :	N/A

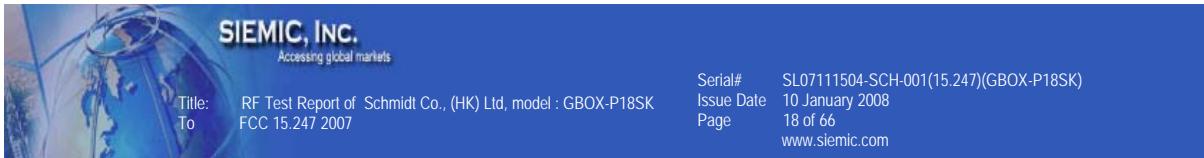

3 MODIFICATION

NONE


4 TEST SUMMARY

The product was tested in accordance with the following specifications. All Testing has been performed according to below product classification:

Frequency Hopping Spread Spectrum / Device

Test Results Summary

Test Standard		Description	Pass / Fail
CFR 47 Part 15.247: 2007	RSS 210 Issue 7: 2007		
15.203		Antenna Requirement	Pass
15.205	RSS210(A8.5)	Restricted Band of Operation	Pass
15.207(a)	RSSGen(7.2.2)	AC Line Conducted Emissions Voltage	Pass
15.247(a) (1)	RSS210(A8.1)	Channel Separation	Pass
15.247(a)(1)	RSS210(A8.1)	Occupied Bandwidth	Pass
15.247(a) (2)	RSS210 (A8.2)	6dB Bandwidth	N/A
15.247(a) (1) (i)	RSS210(A8.1)	Number of Hopping Channels	Pass
15.247(a) (1) (i)	RSS210(A8.1)	Time of Occupancy	Pass
15.247(b) (2)	RSS210(A8.4)	Output Power	Pass
15.247(c)	RSS210(A8.4)	Antenna Gain > 6 dBi	Pass
15.247(d)	RSS210(A8.5)	Antenna Port Conducted Spurious Emissions	Pass
15.209; 15.247(d)	RSS210(A8.5)	Radiated Spurious Emissions	Pass
15.247(e)	RSS210(A8.3)	Power Spectral Density	N/A
15.247(f)	RSS210(A8.3)	Hybrid System Requirement	N/A
15.247(g)	RSS210(A8.1)	Hopping Capability	Pass
15.247(h)	RSS210(A8.1)	Hopping Coordination Requirement	Pass
15.247(i) §2.1091& §2.1093	RSSGen(5.5)	Maximum Permissible Exposure	Pass
15.247 (d)		100 kHz Bandwidth of Frequency Band Edge	Pass
	RSSGen(4.8)	Receiver Spurious Emissions	N/A
ANSI C63.4: 2003/ RSS-Gen Issue 2: 2007			
PS: All measurement uncertainties are not taken into consideration for all presented test result.			

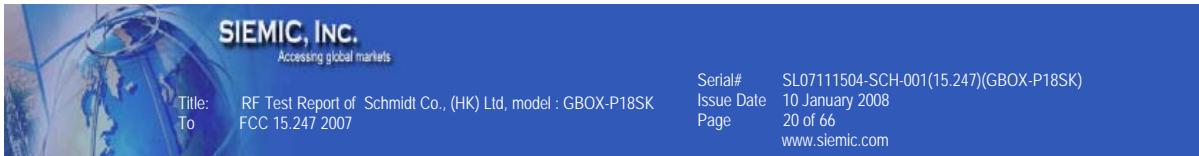

5 MEASUREMENTS, EXAMINATION AND DERIVED RESULTS

5.1 Antenna Requirement

Requirement(s): 47 CFR §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna requirement must meet at least one of the following:

- a) Antenna must be permanently attached to the device.
- b) Antenna must use a unique type of connector to attach to the device.
- c) Device must be professionally installed. Installer shall be responsible for ensuring that the correct antenna is employed with the device.

The below antenna system will require professional installation. The following list is the recommend antenna system for GBOX-P18SK:

Antenna Installation: Please see user manual for detail.

Attach one to four RFID antennas to the RFID antenna ports, starting with port 1. Do not remove the terminators from unused antenna ports.

Each port must have either an antenna or a terminator connected. Do not apply power to the reader unless an antenna or terminator is installed on each antenna port.

1. Vertical Polar Panel Antenna

Model No.: Sense-G900D-8
Manufacturer: Sense Technology
Frequency Range: 902-928 MHz
Maximum Gain: 8dBi
Antenna Type/Pattern: Circular Polarization

2. RFID Patch Antenna

Model No.: PATCH-A0025
Manufacturer: Tunity Technologies Pte., Ltd.
Frequency Range: 902-928 MHz
Maximum Gain: 7dBi
Antenna Type/Pattern: Circular Polarization

3. CS-771 Mono-Static Antenna

Model No.: CS-771
Manufacturer: CCL Convergence Ltd.
Frequency Range: 902-928 MHz
Maximum Gain: 6dBi
Antenna Type/Pattern: Circular Polarization

5.2 Conducted Emissions Voltage

Requirement:

Frequency of emission (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15–0.5	66 to 56*	56 to 46*
0.5–5	56	46
5–30	60	50

*Decreases with the logarithm of the frequency.

Procedures:


1. All possible modes of operation were investigated. Only the 6 worst case emissions measured, using the correct CISPR and Average detectors, are reported. All other emissions were relatively insignificant.
2. A "-ve" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency.
3. Conducted Emissions Measurement Uncertainty
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 9kHz – 30MHz (Average & Quasi-peak) is ± 3.5 dB.
4. Environmental Conditions

Temperature	23°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar

Test Date : January 10, 2008


Tested By :Dan Corona

Results: Note – Average Limit Quasi-Peak Limit

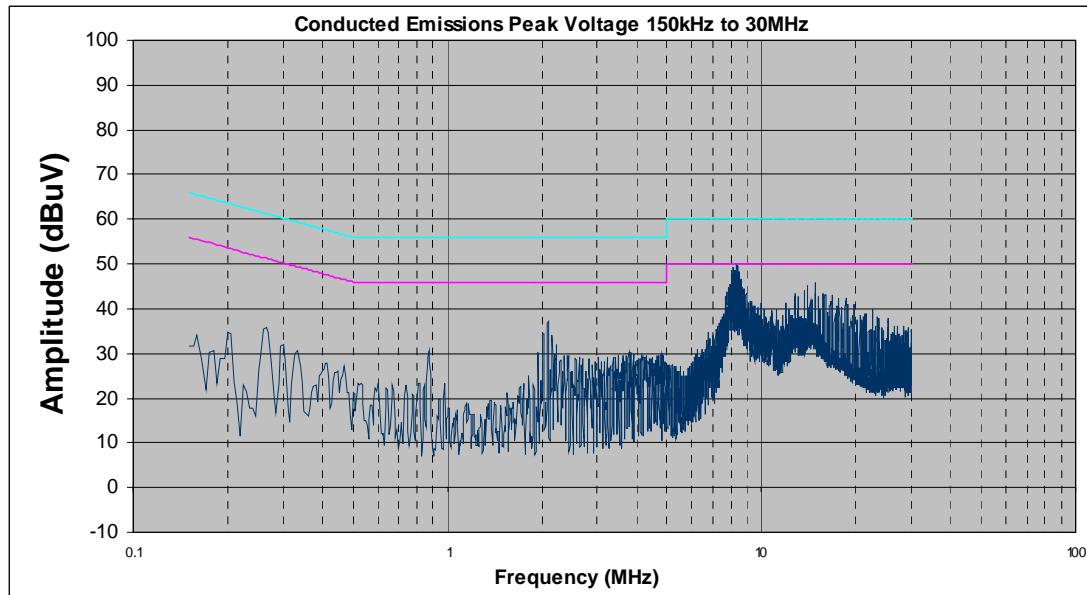

Phase Line Plot at 120Vac, 60Hz

Line Under Test	Frequency (MHz)	Corrected Amplitude (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Corrected Amplitude (dBuV) AVG	Limit (dBuV) AVG	Margin (dB) AVG
Neutral	8.48	40.50	60.00	-19.50	37.30	50.00	-12.70
Neutral	2.09	33.00	56.00	-23.00	20.20	46.86	-25.80
Neutral	0.27	32.40	61.15	-28.75	23.50	51.15	-27.65
Neutral	0.41	26.20	57.58	-31.38	25.80	47.58	-21.78
Neutral	0.45	24.40	56.86	-32.46	20.40	46.86	-26.46
Neutral	0.34	22.50	59.18	-36.68	16.50	49.18	-32.68

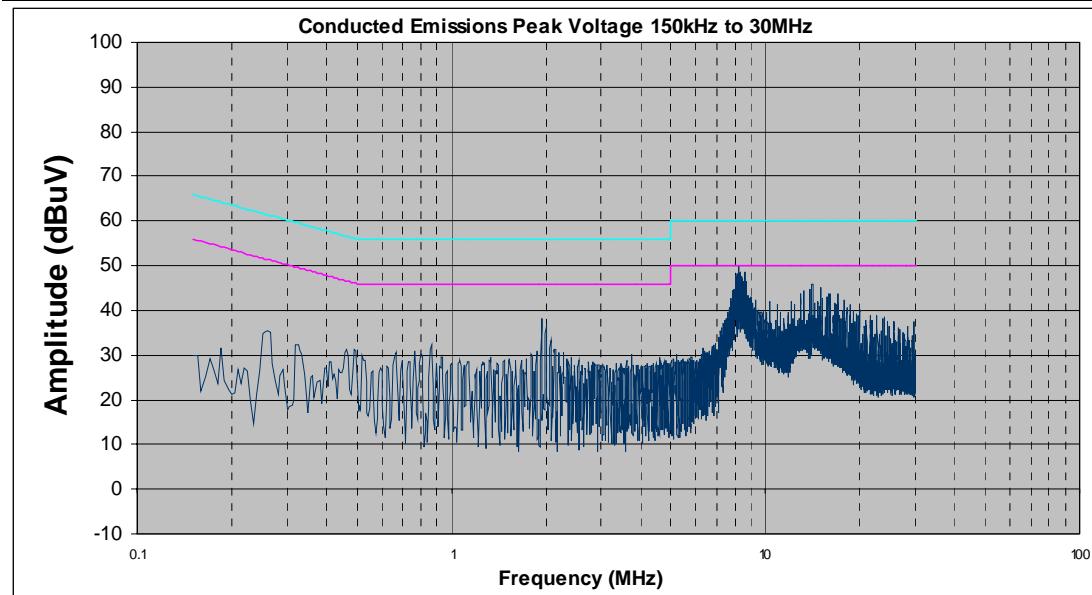

Neutral Line Plot at 120Vac, 60Hz

Line Under Test	Frequency (MHz)	Corrected Amplitude (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Corrected Amplitude (dBuV) AVG	Limit (dBuV) AVG	Margin (dB) AVG
Line	8.48	41.70	60.00	-18.30	39.50	50.00	-10.50
Line	2.09	33.90	56.00	-22.10	25.40	46.00	-20.60
Line	0.47	28.90	56.50	-27.60	27.10	46.50	-19.40
Line	0.29	32.70	60.64	-27.94	28.40	50.64	-22.24
Line	0.34	29.60	59.33	-29.73	25.10	49.33	-24.23
Line	0.42	26.20	57.55	-31.35	22.40	47.55	-25.15

5.3 Channel Separation

1. Conducted Measurement

EUT was set for low, mid, high channel with modulated mode and highest RF output power.
The spectrum analyzer was connected to the antenna terminal.

2 Environmental Conditions

Temperature	23°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar

3 Conducted Emissions Measurement Uncertainty

All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz - 20GHz is ± 1.5 dB.

4 Test Date : January 08, 2008


Tested By : Dan Corona

Requirement(s): 47 CFR §15.247(a)(1)(i)


Procedures: The Channel Separation was measured conducted using a spectrum analyzer at low, mid, and hi channels.

Frequency hopping systems in the 902-928 MHz shall have, hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies.


Channel	Channel Frequency (MHz)	Channel Separation (MHz)	20 dB Channel Bandwidth (KHz)	
			ISO 18000-6B	ISO 18000-6C (EPC global UHF Gen 2
Low	902.700	0.200	107	110
Mid	915.100	0.200	107	107
High	927.300	0.200	103	107

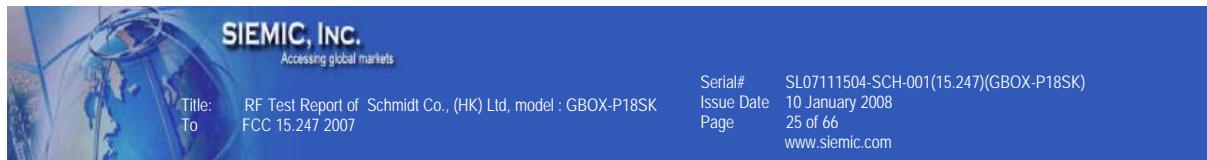


Channel Separation - Low Channel

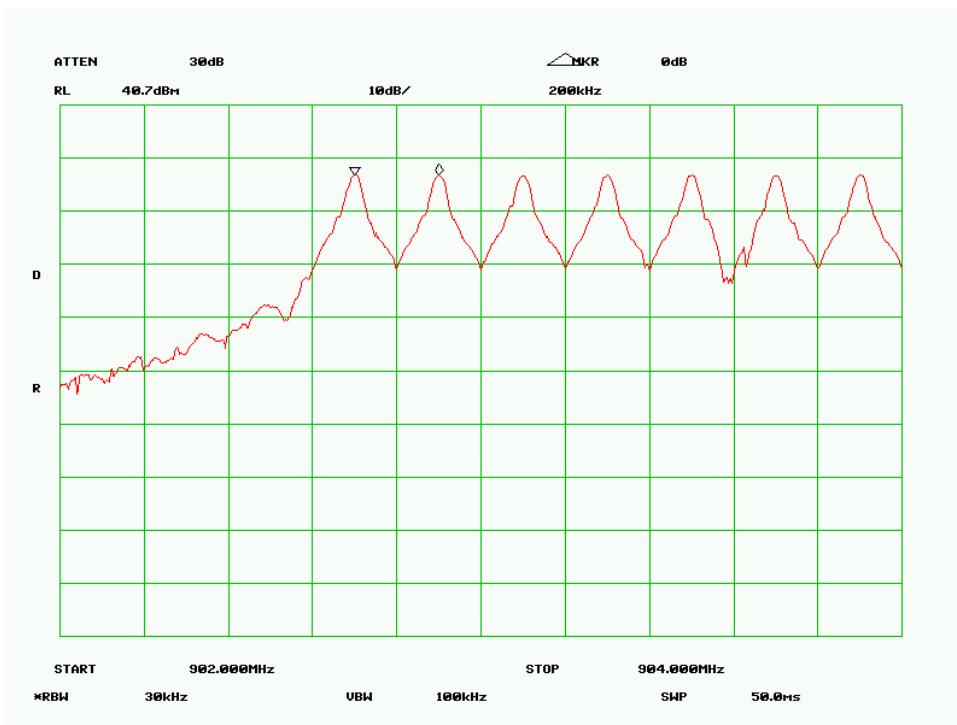


Channel Separation – Mid Channel

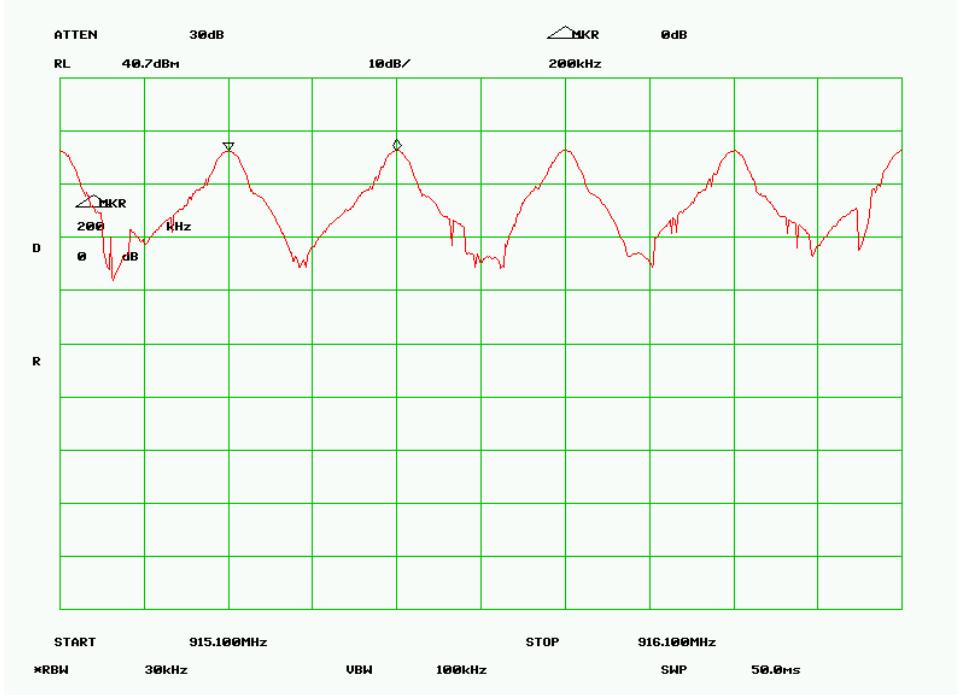

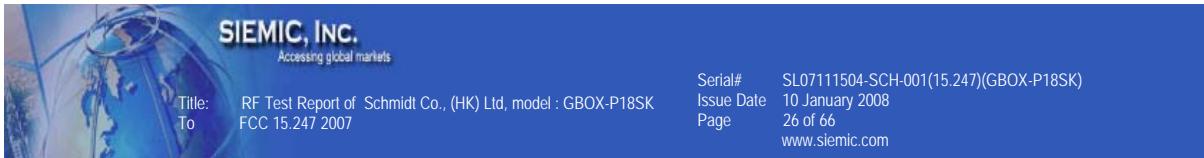

Channel Separation – High Channel

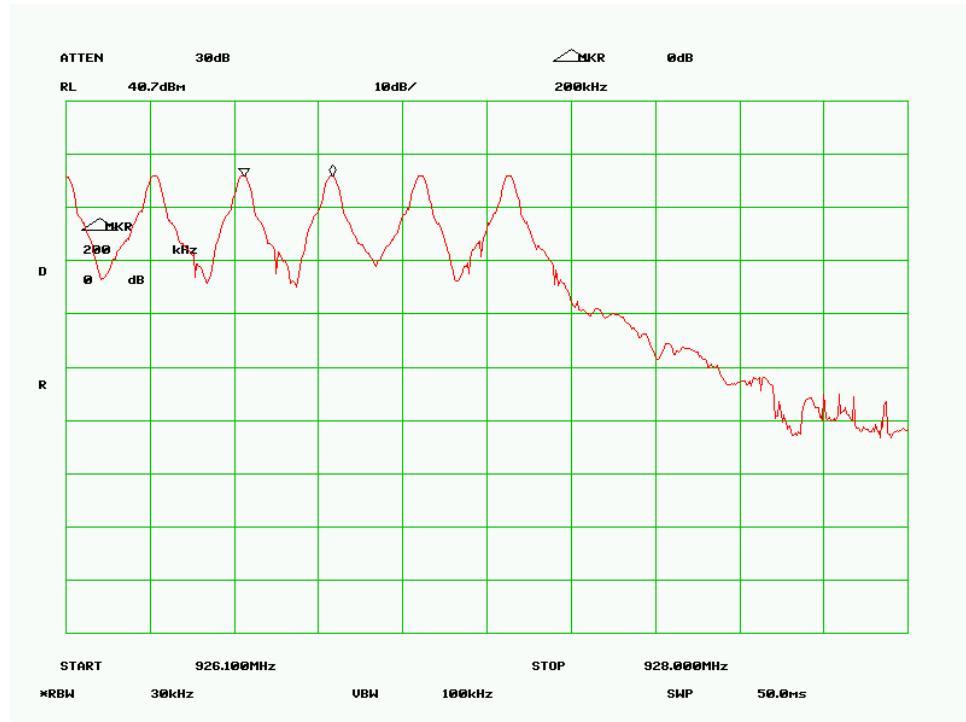

5.4 20dB Occupied Bandwidth

1. Conducted Measurement

EUT was set for low, mid, high channel with modulated mode and highest RF output power. The spectrum analyzer was connected to the antenna terminal.

2. Environmental Conditions

Temperature	23°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar

3. Conducted Emissions Measurement Uncertainty

All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 20GHz is ± 1.5 dB.

4. Test Date : January 08, 2008

Tested By :Dan Corona

Requirement(s): 47 CFR §15.247(a)(1)(i)

Procedures: The 20dB bandwidths were measured conducted using a spectrum analyzer at low, mid, and hi channels.


Note: The maximum allowed 20 dB bandwidth of the hopping is 500 kHz.

TAG Type: ISO 18000-6B

Channel	Channel Frequency (MHz)	20 dB Channel Bandwidth (KHz)
Low	902.700	107
Mid	915.100	107
High	927.300	103


TAG Type: ISO 18000-6C (EPC global UHF Gen 2)

Channel	Channel Frequency (MHz)	20 dB Channel Bandwidth (KHz)
Low	902.700	110
Mid	915.100	107
High	927.300	107

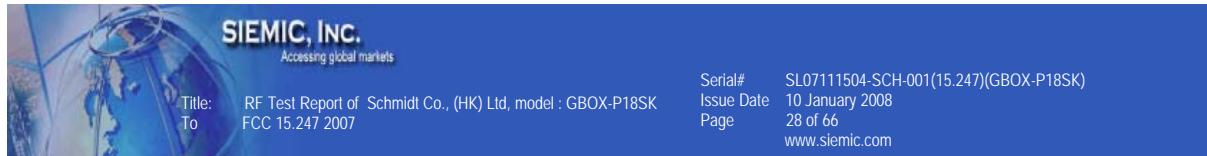



Refer to the attached plots.

20dB Bandwidth - Low Channel (ISO 18000-6B)

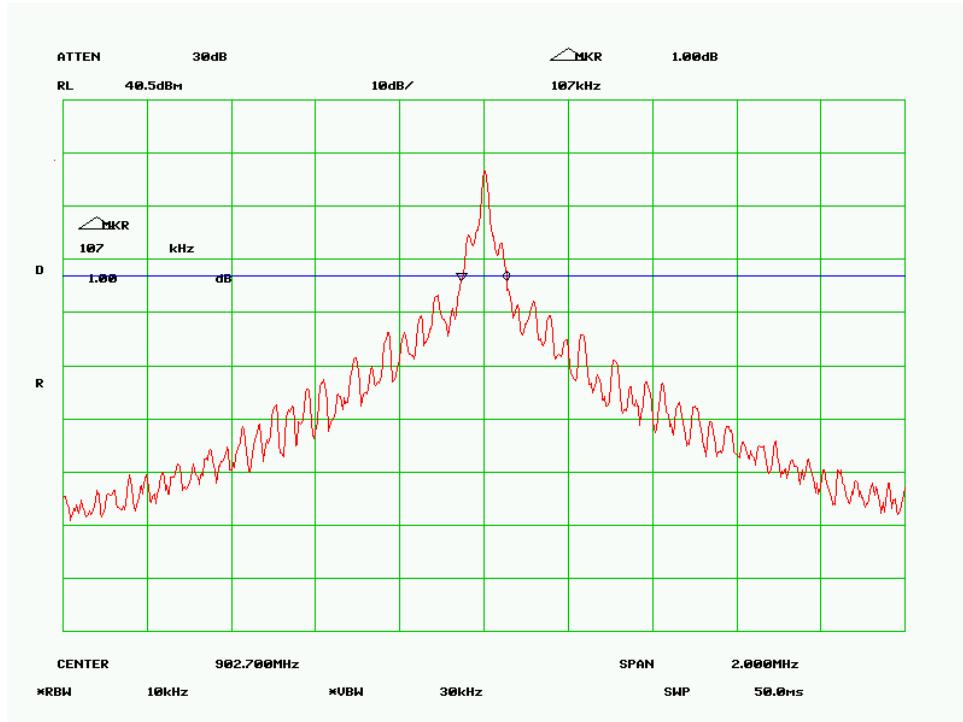



20dB Bandwidth – Mid Channel (ISO 18000-6B)

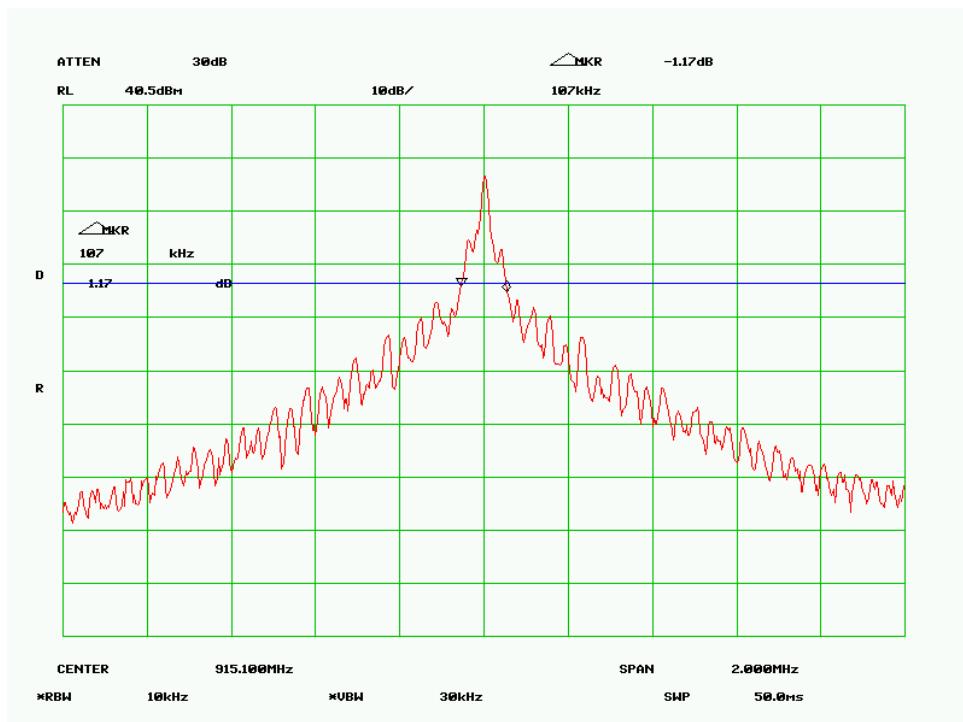

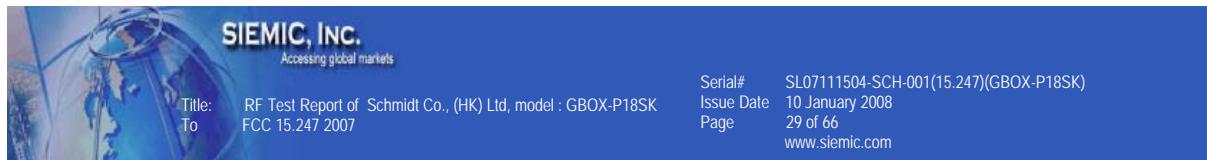


20dB Bandwidth - High Channel (ISO 18000-6B)

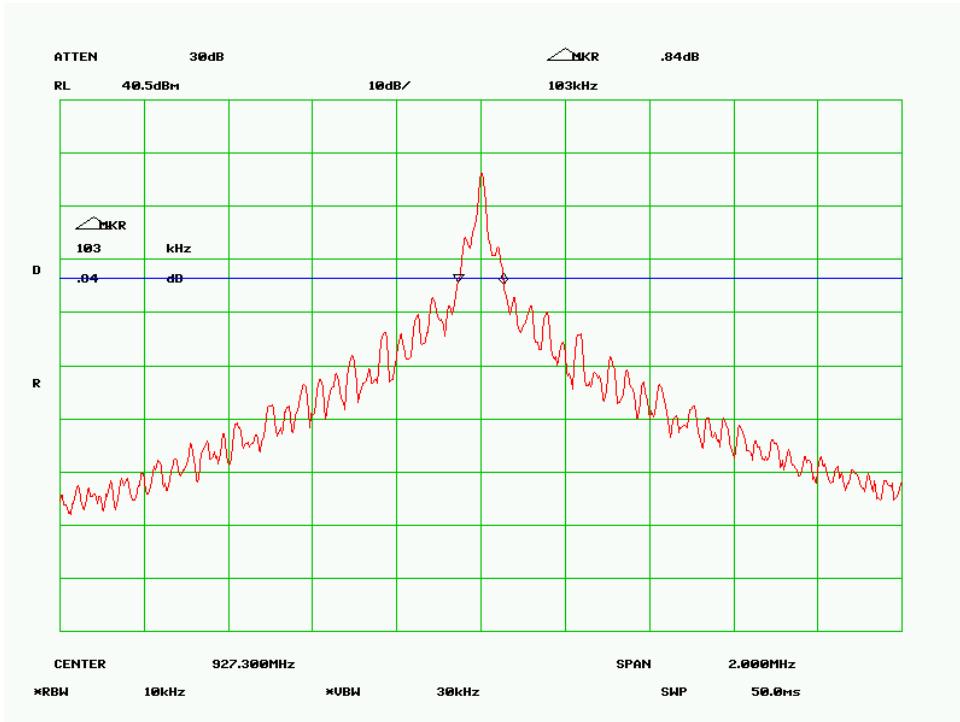


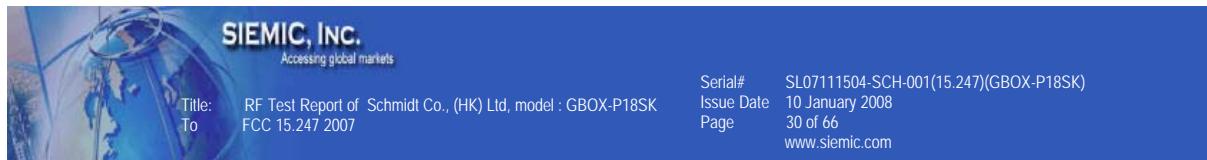


20dB Bandwidth - Low Channel (ISO 18000-6C EPC global UHF Gen 2)

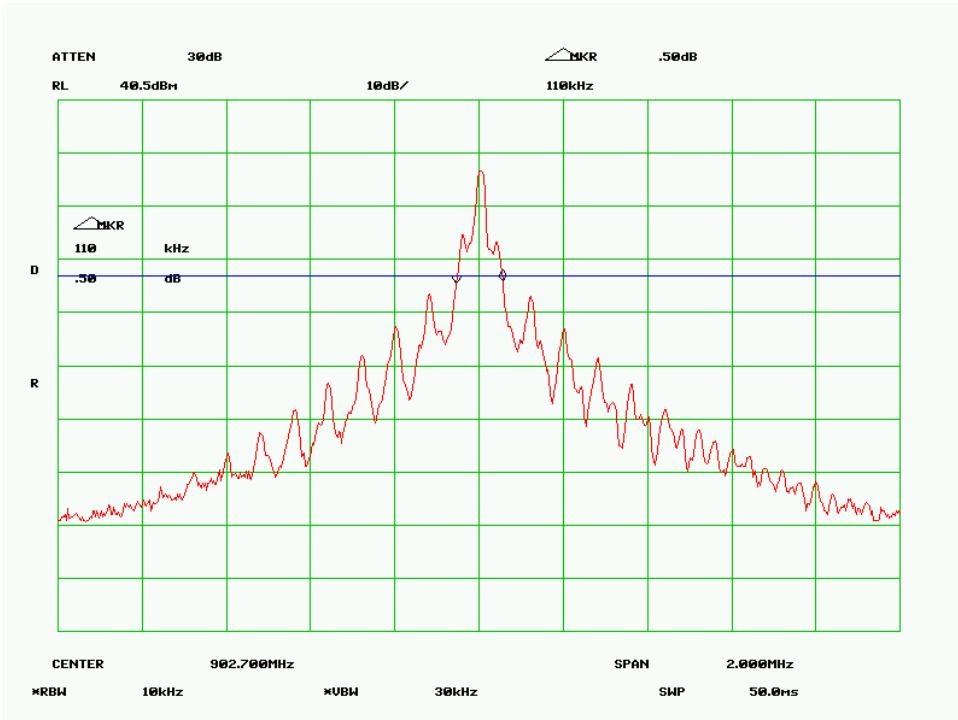


20dB Bandwidth – Mid Channel (ISO 18000-6C EPC global UHF Gen 2)

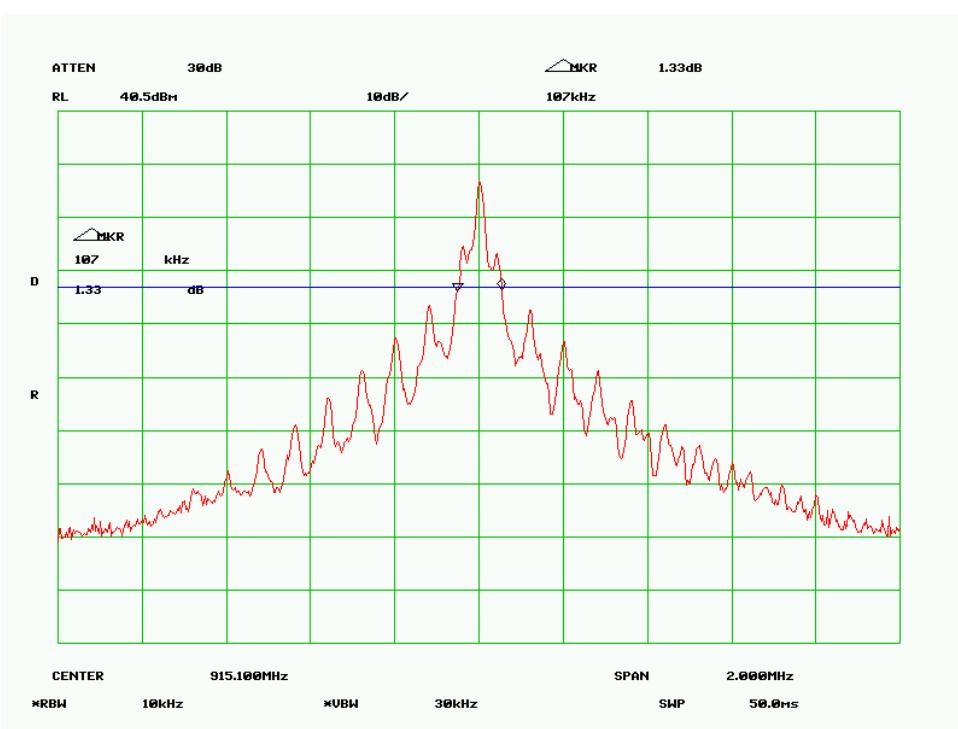

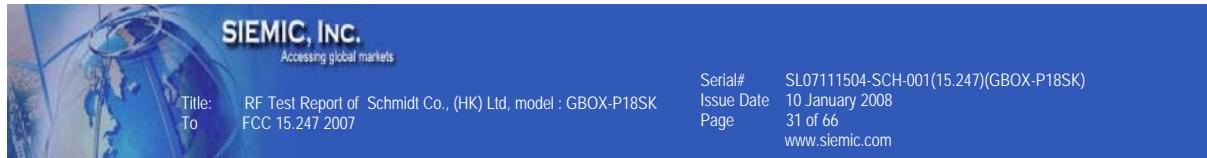

20dB Bandwidth - High Channel (ISO 18000-6C EPC global UHF Gen 2)

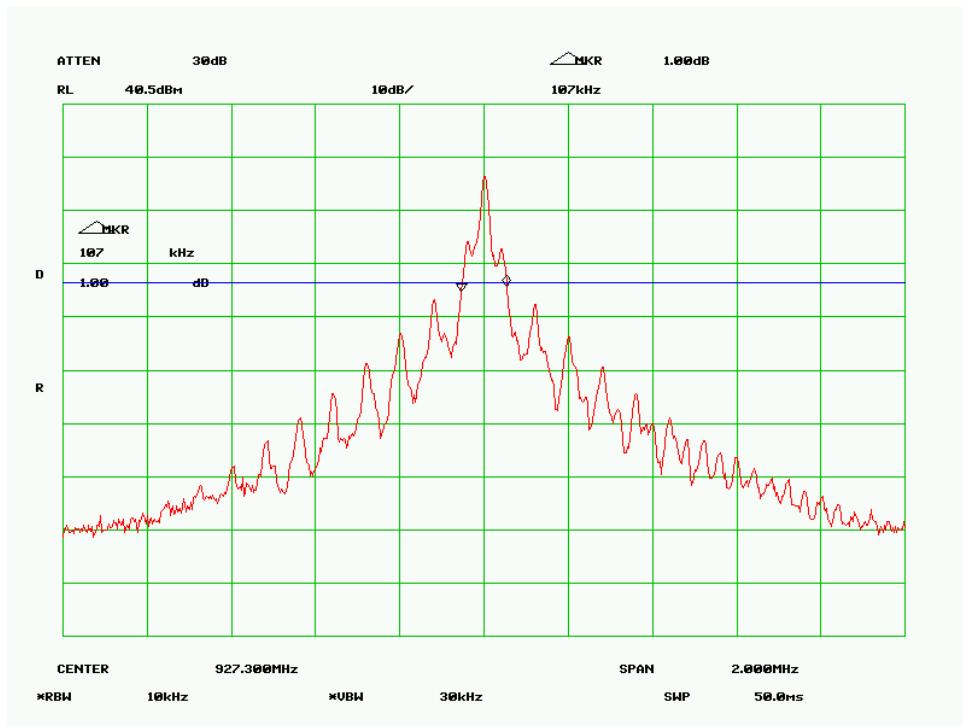

5.5 Number of Hopping Channel

1. Conducted Measurement
EUT was set for low , mid, high channel with modulated mode and highest RF output power.
The spectrum analyzer was connected to the antenna terminal.
2. Conducted Emissions Measurement Uncertainty
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz - 20GHz is ± 1.5 dB.
3. Environmental Conditions

Temperature	23°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar
4. Test Date : January 08, 2008
Tested By :Dan Corona

Standard Requirement : 47 CFR §15.247(a)(1)(iii)


For frequency hopping systems operating in the 902–928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

Procedures: The Number of Hopping Channel measurement was taken conducted using a spectrum analyzer.

RBW=30 KHz, VBW > RBW


Test Result:

Total Channel: 124 Channels

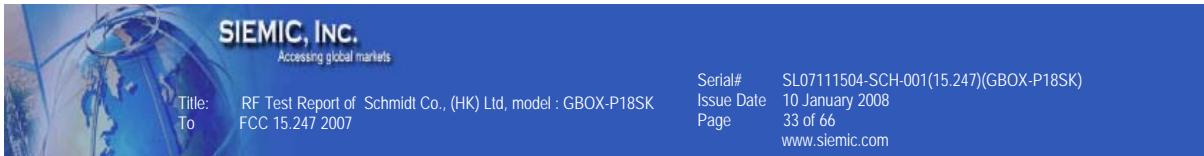

Number of Hopping Channel

902 – 928 MHz: 124 Channels

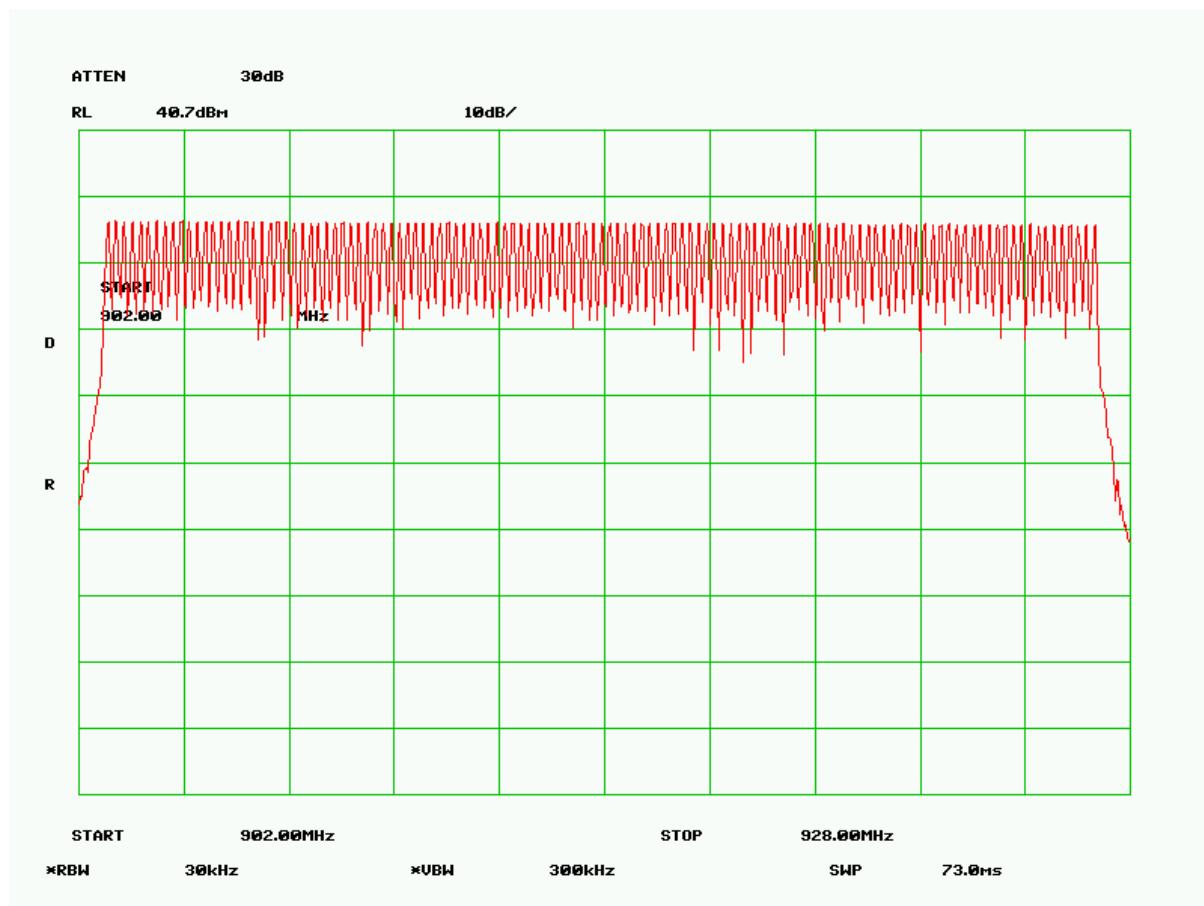

5.6 Time of Occupancy

1. Conducted Measurement
EUT was set for low , mid, high channel with modulated mode and highest RF output power.
The spectrum analyzer was connected to the antenna terminal.
2. Conducted Emissions Measurement Uncertainty
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz - 20GHz is $\pm 1.5\text{dB}$.
3. Environmental Conditions

Temperature	23°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar
4. Test Date : January 08, 2008
Tested By :Dan Corona

Standard Requirement: 47 CFR §15.247(a)(1)

For frequency hopping systems operating in the 902–928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period.

Procedures: The Time of Occupancy measurement was taken conducted using a spectrum analyzer.


Test Result:

TAG Type: ISO 18000-6B



Channel	Channel Frequency (MHz)	Dwell Time (sec)	Limit (sec)
Low	902.700	0.151	0.4
Mid	915.000	0.127	0.4
High	927.300	0.125	0.4


TAG Type: ISO 18000-6C (EPC global UHF Gen 2)

Channel	Channel Frequency (MHz)	Dwell Time (sec)	Limit (sec)
Low	902.700	0.190	0.4
Mid	915.000	0.169	0.4
High	927.300	0.138	0.4


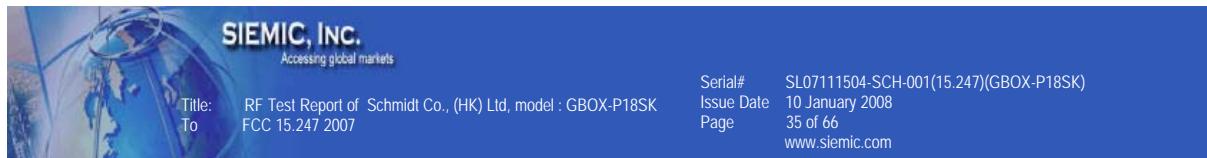



Low Channel (ISO 18000-6B)

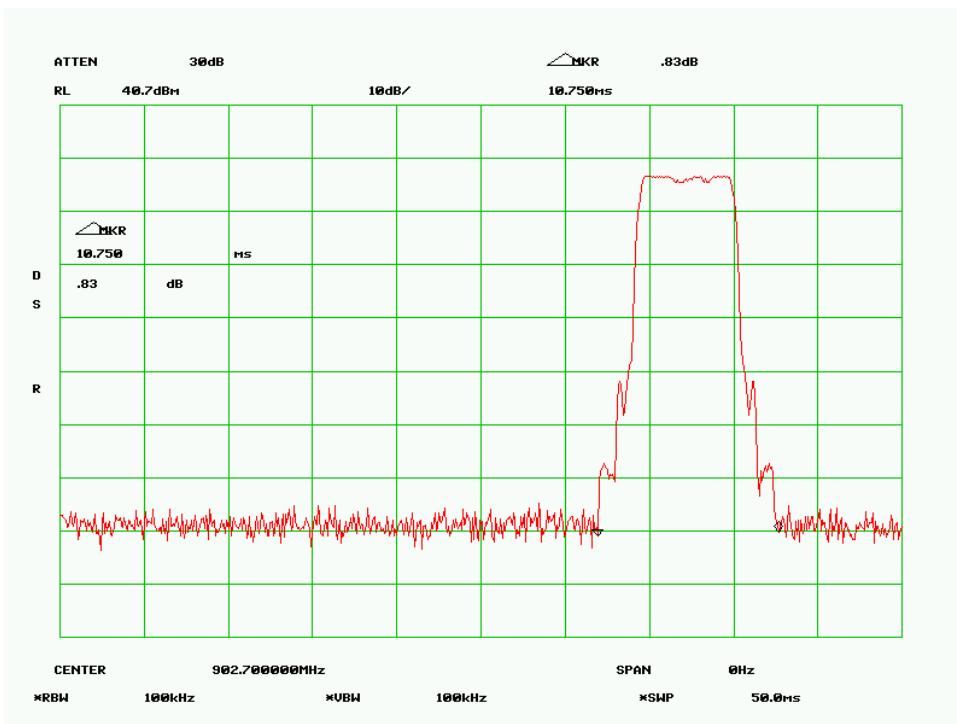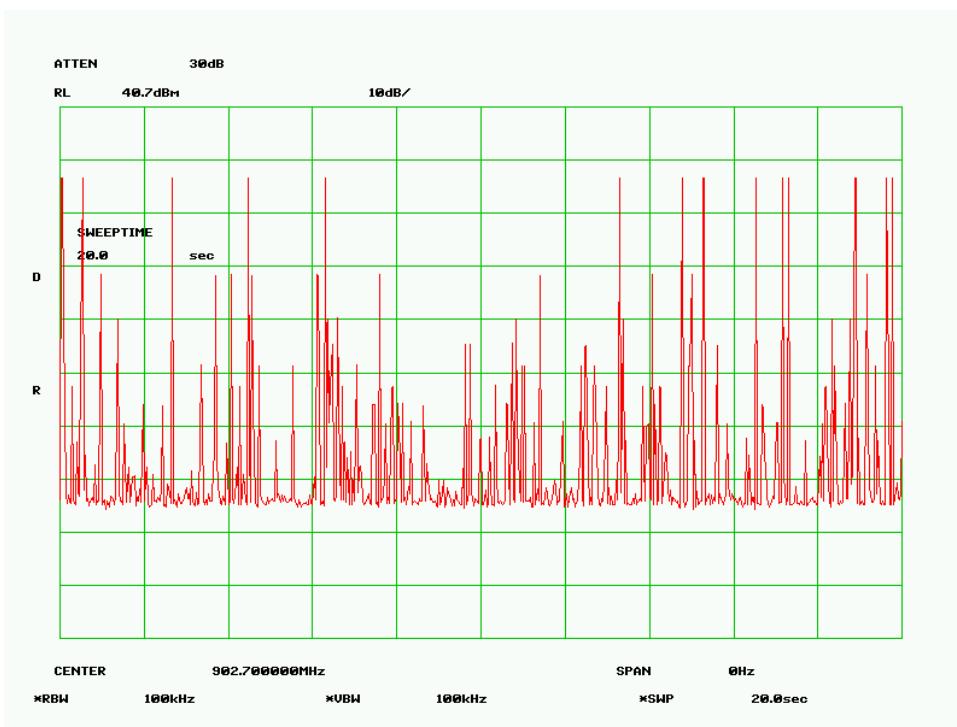


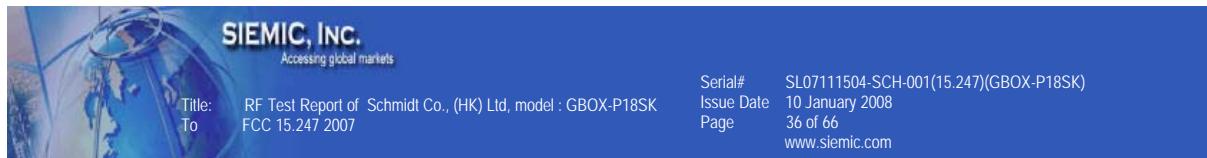



Mid Channel (ISO 18000-6B)

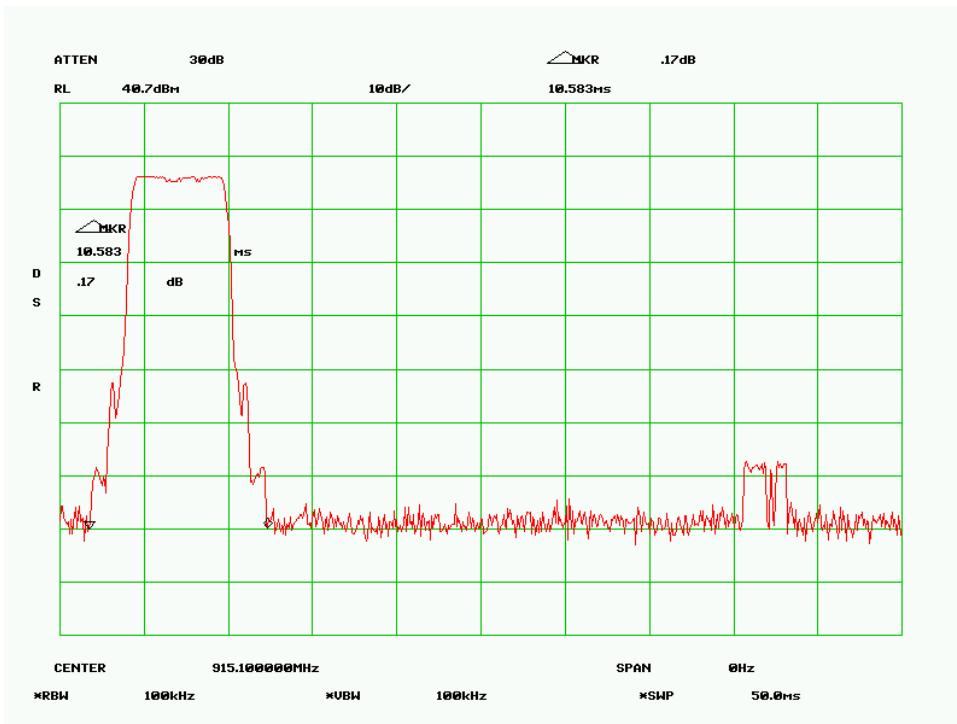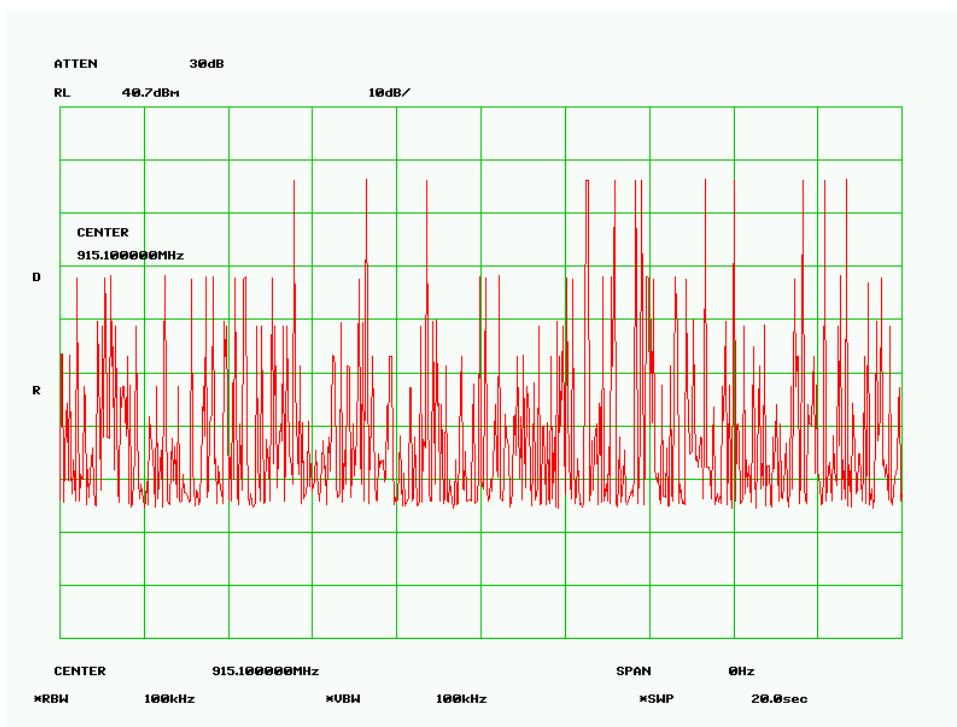


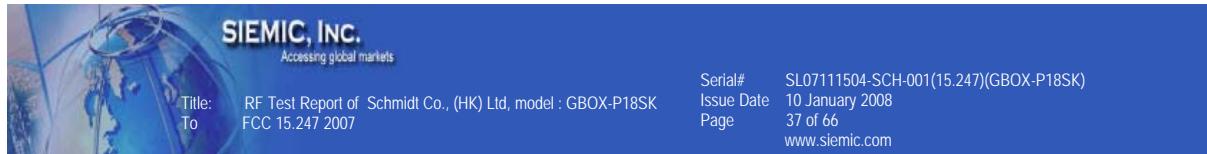



High Channel (ISO 18000-6B)

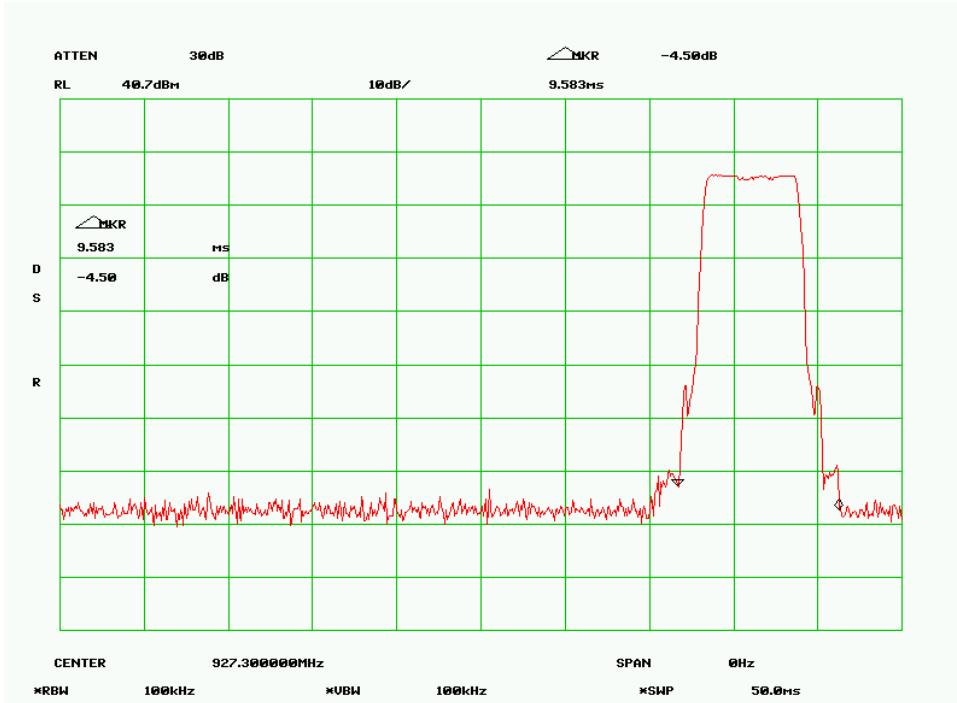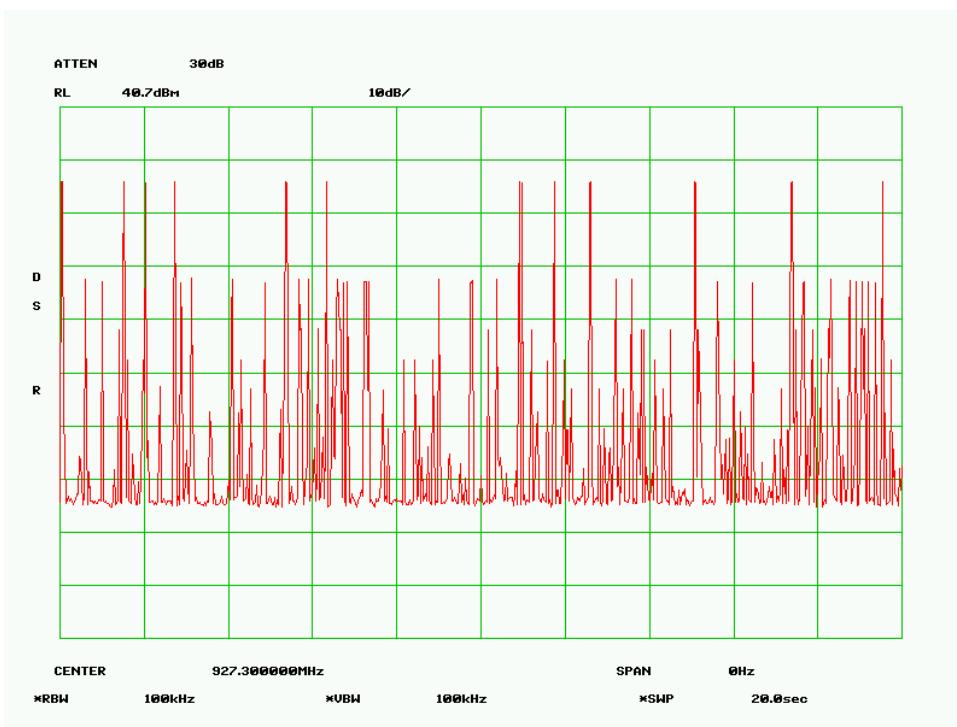


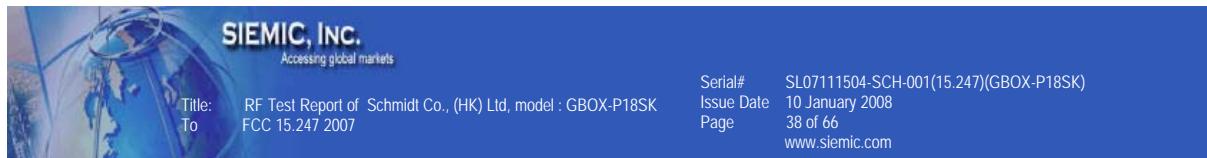



Low Channel (ISO 18000-6C EPC global UHF Gen 2)

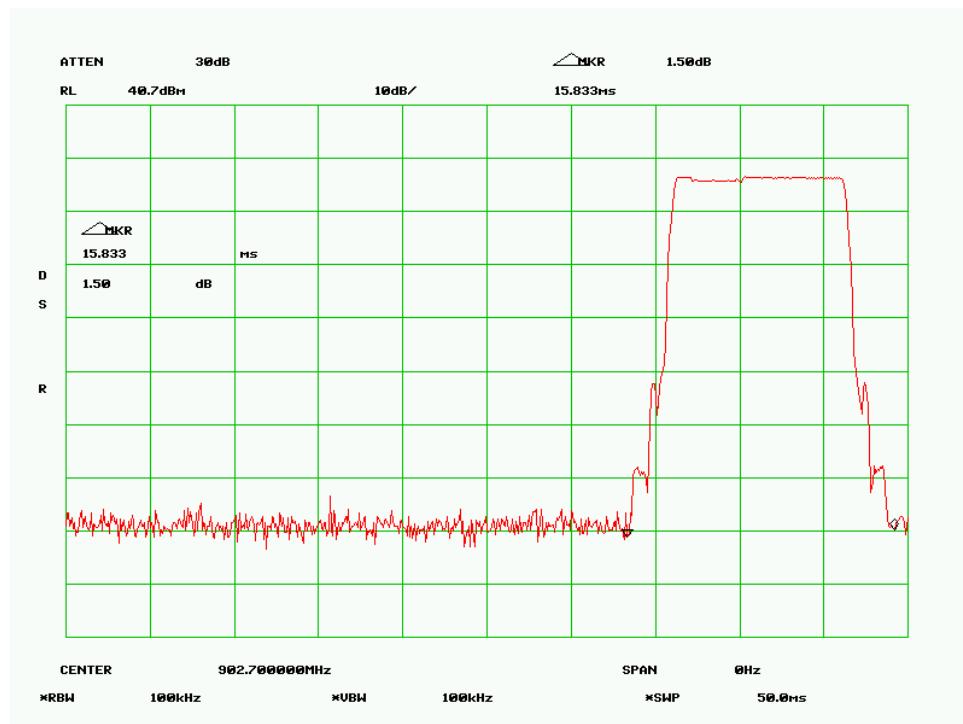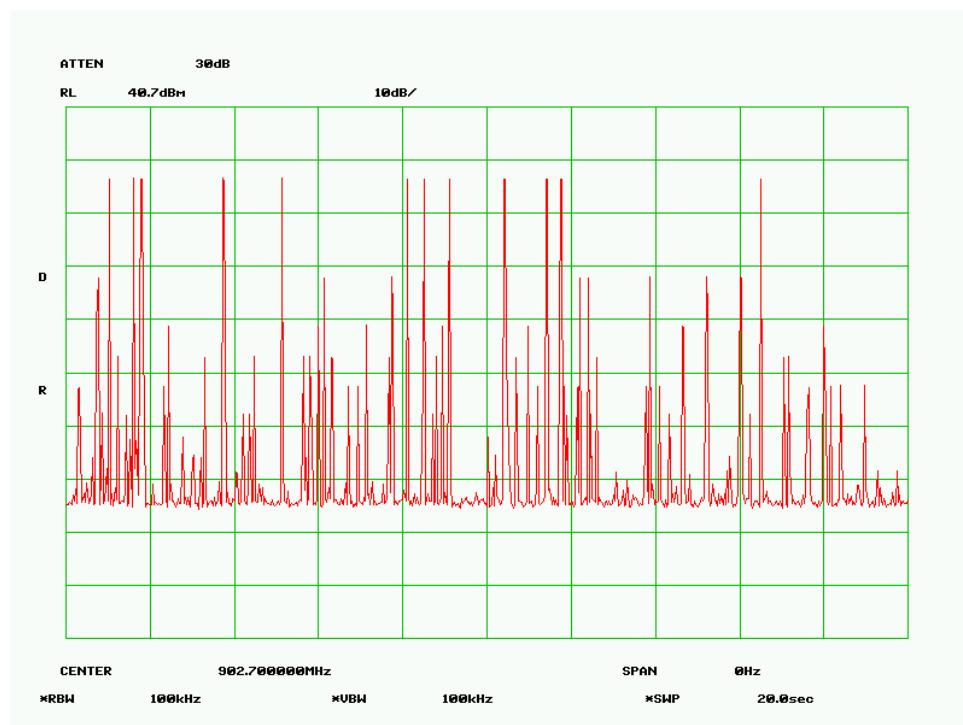


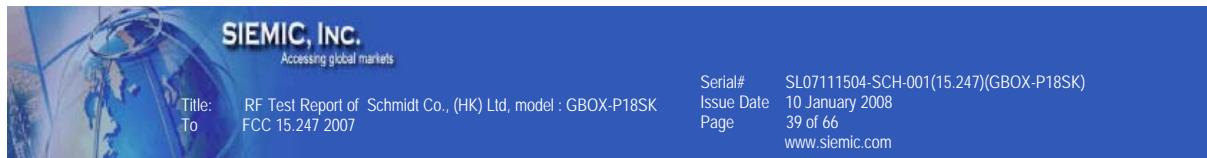


Mid Channel (ISO 18000-6C EPC global UHF Gen 2)

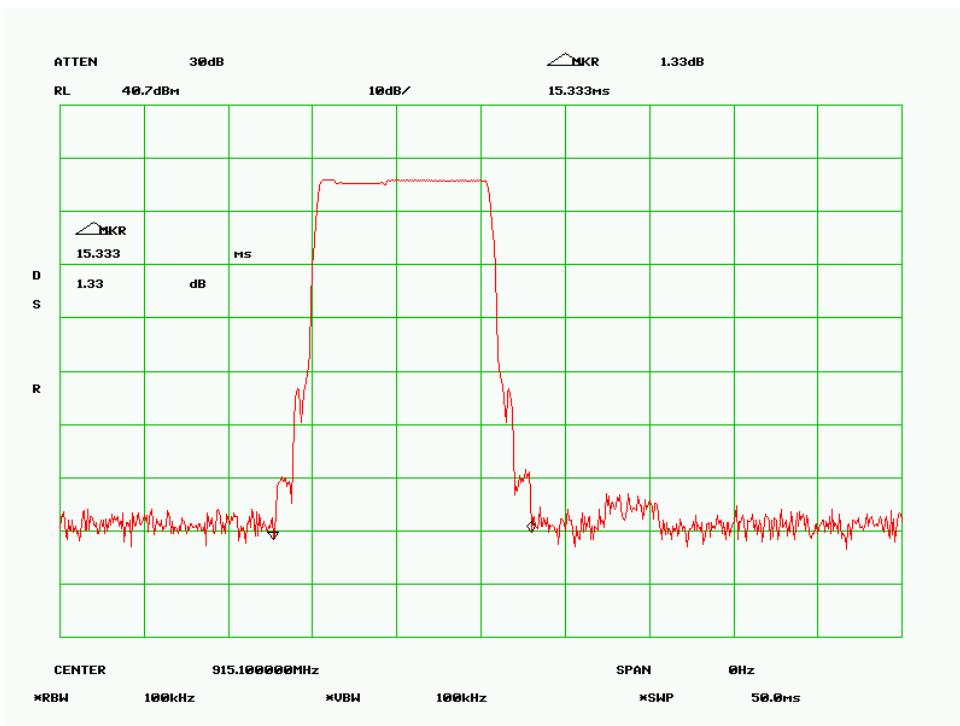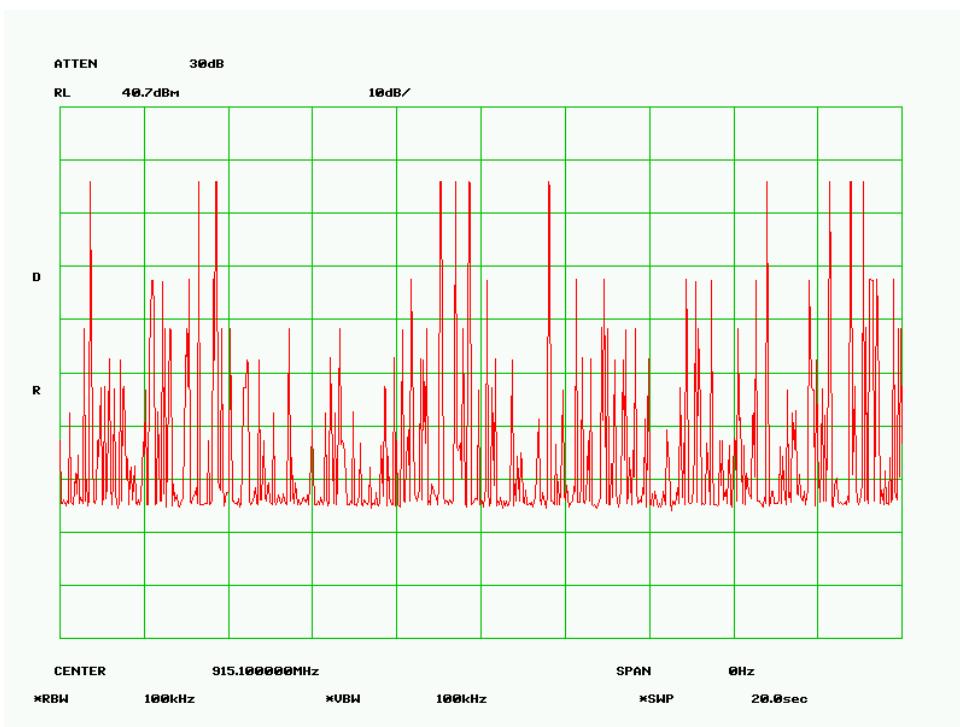

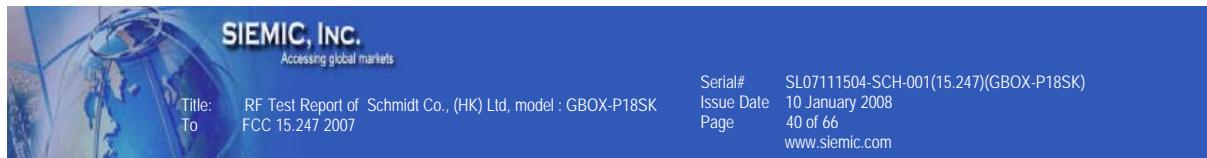

High Channel (ISO 18000-6C EPC global UHF Gen 2)

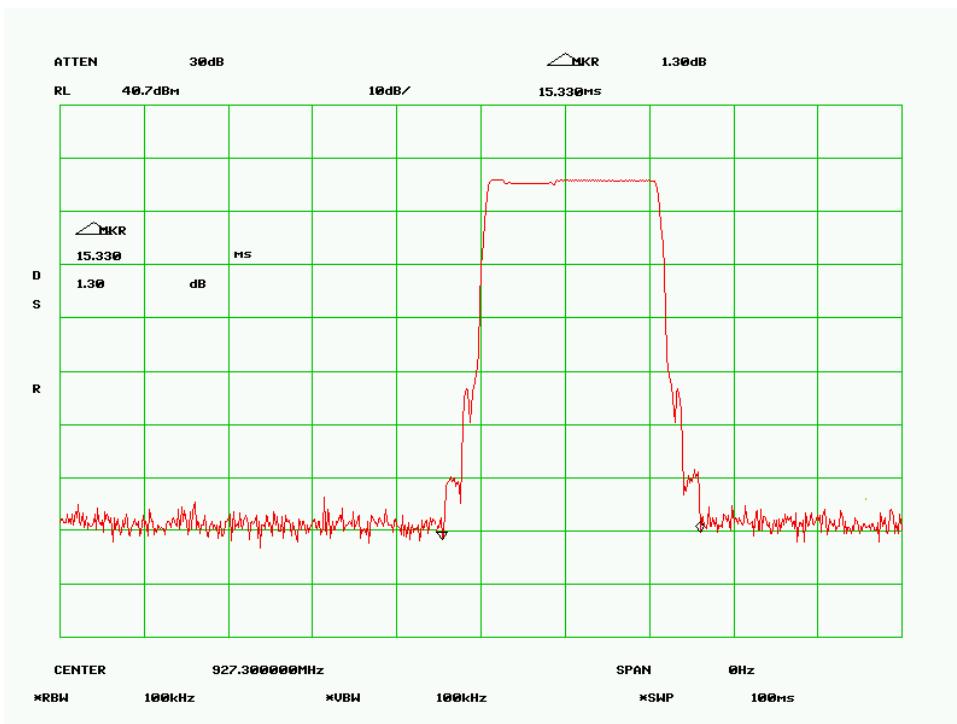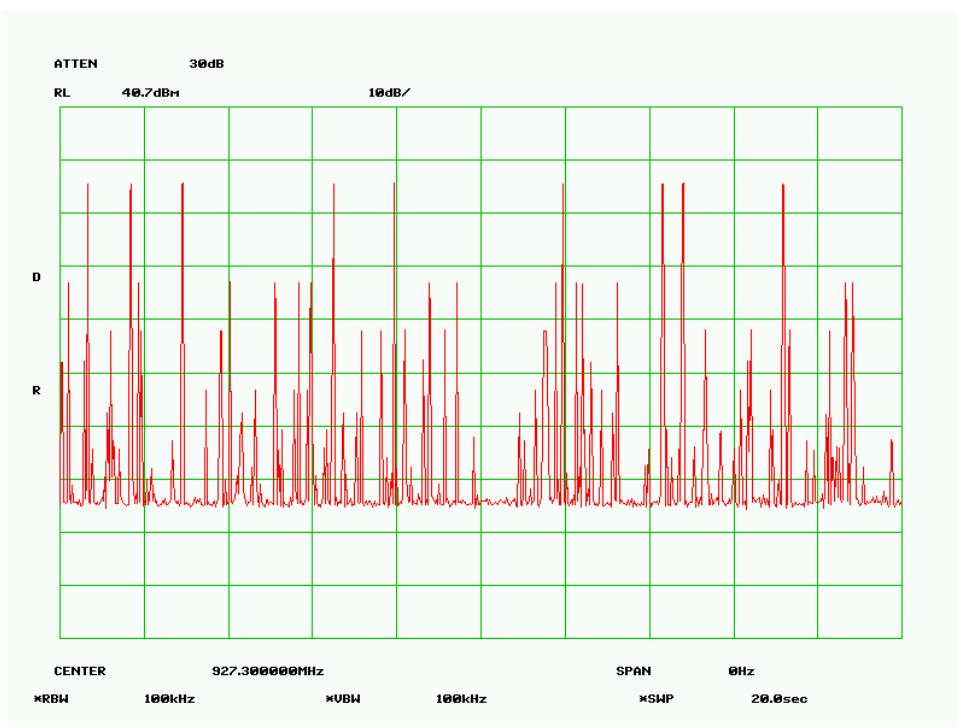

5.7 Peak Output Power

1. Conducted Measurement
EUT was set for low , mid, high channel with modulated mode and highest RF output power.
The spectrum analyzer was connected to the antenna terminal.
2. Conducted Emissions Measurement Uncertainty
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 40GHz is ± 1.5 dB.
3. Environmental Conditions

Temperature	23°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar
4. Test Date : January 08, 2008
Tested By :Dan Corona

Standard Requirement : 47 CFR §15.247(b)


Procedures: The peak output power was measured conducted using a spectrum analyzer at low, mid, and hi channels. Peak detector was set to measure the power output. The power is converted from watt to dBm, therefore, 1 watt = 30 dBm. The highest antenna gain that will be used is 8 dBi.

Note: For frequency hopping systems operating in the 902–928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.


Test Result :

Channel	Channel Frequency (MHz)	Measured Output Power (dBm)	Peak Output Power Limit (dBm)
Low	902.700	26.70	28
Mid	915.100	26.70	28
High	927.300	26.37	28


PS: Output power is same for both modulations, Only ISO 18000-6C is presented.

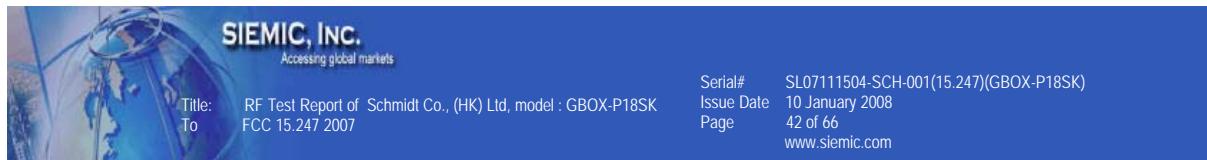


Output Power Low Channel

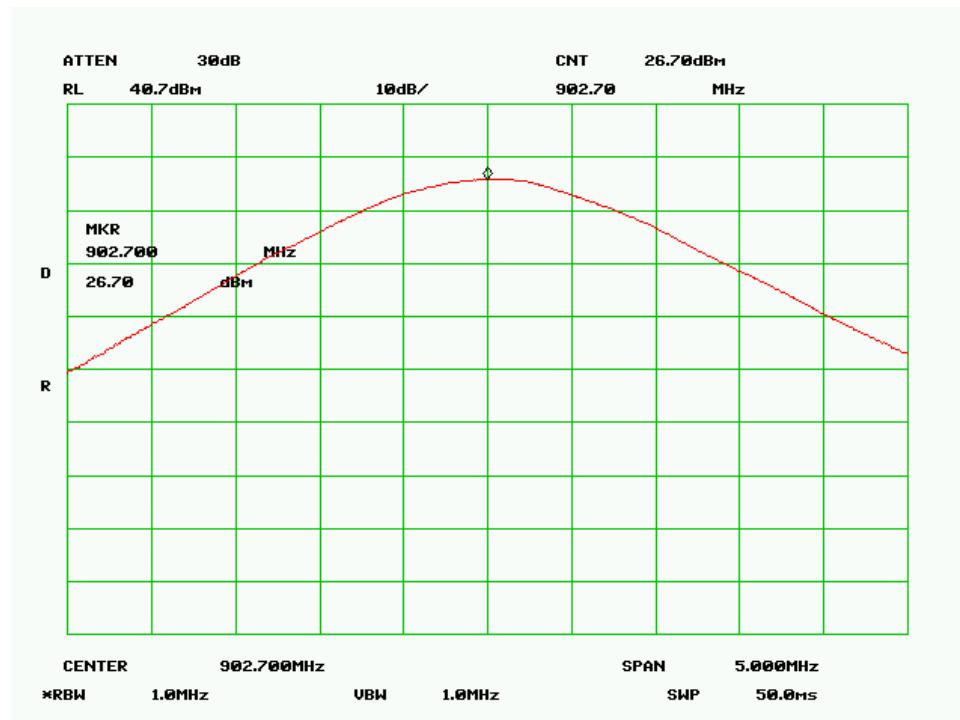

Output Power Mid Channel

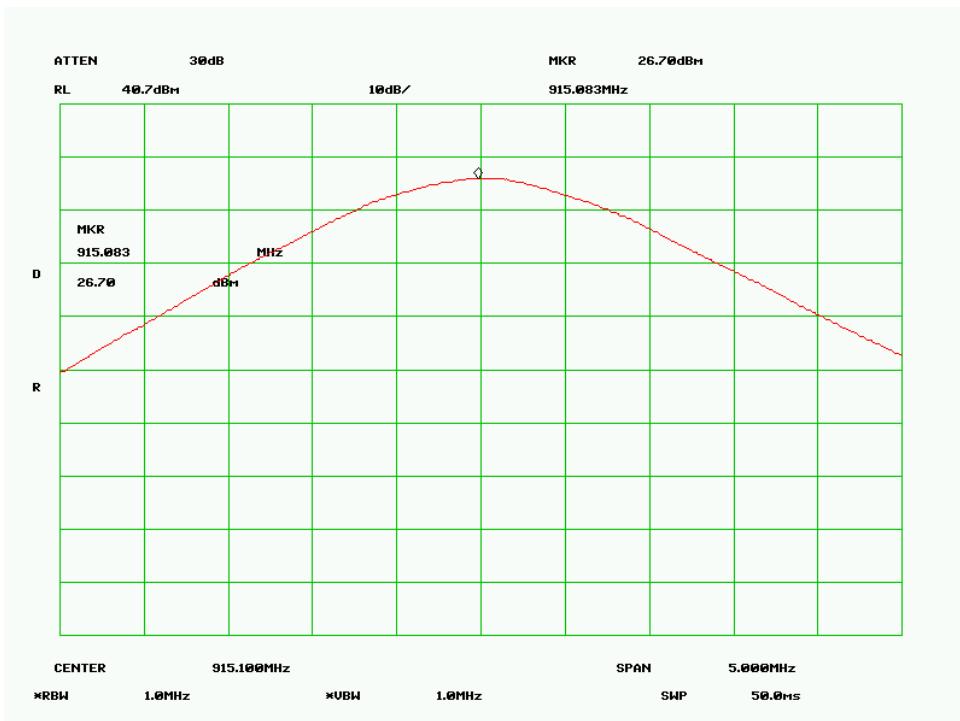

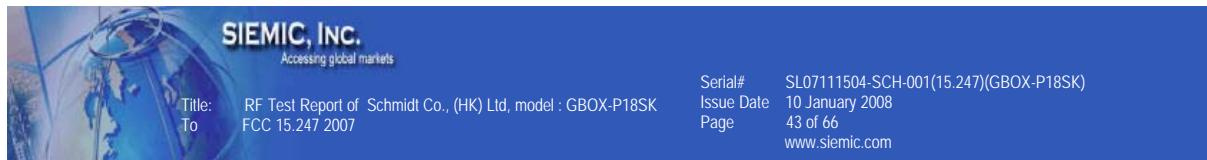

Output Power High Channel



5.8 100 kHz Bandwidth of Frequency Band Edge

1. Conducted Measurement
EUT was set for low, mid, high channel with modulated mode and highest RF output power.
The spectrum analyzer was connected to the antenna terminal.
2. Conducted Emissions Measurement Uncertainty
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 20GHz is ± 1.5 dB.
3. Environmental Conditions


Temperature	23°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar
4. Test Date : January 08, 2008
Tested By :Dan Coronia

Standard Requirement : 47 CFR §15.247(b)


Procedures: in any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in §15.209(a) is not required.

Test Result :


Both Modulations has been investigated, only worst case (ISO 18000-6C) is presented.

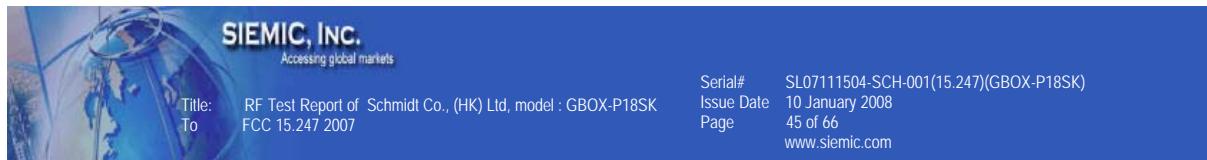

Low Channel

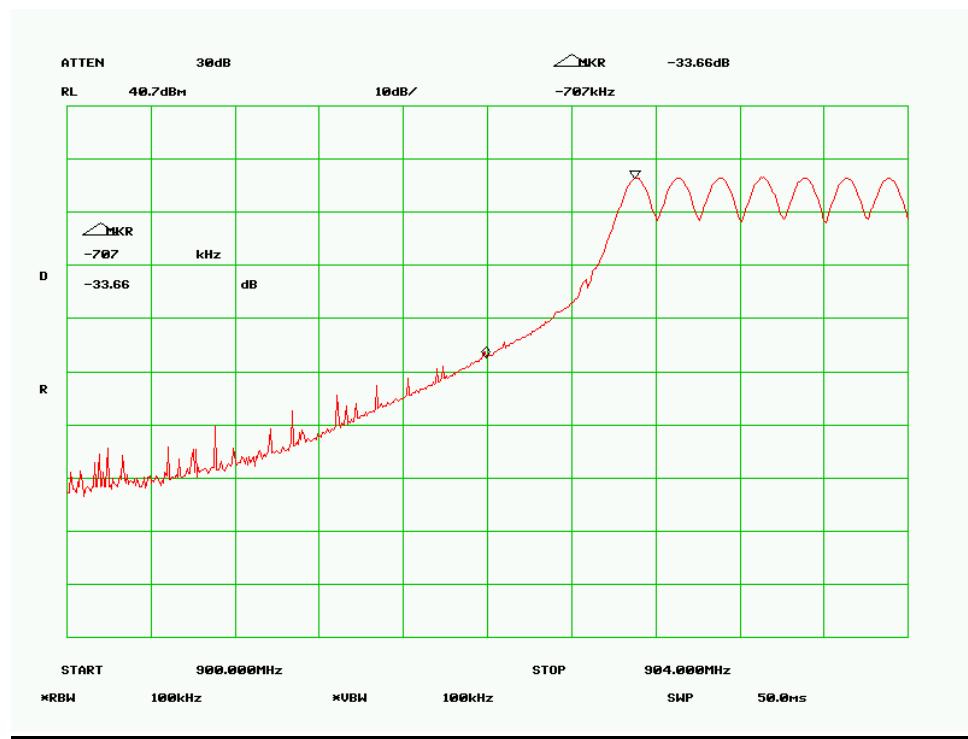

High Channel

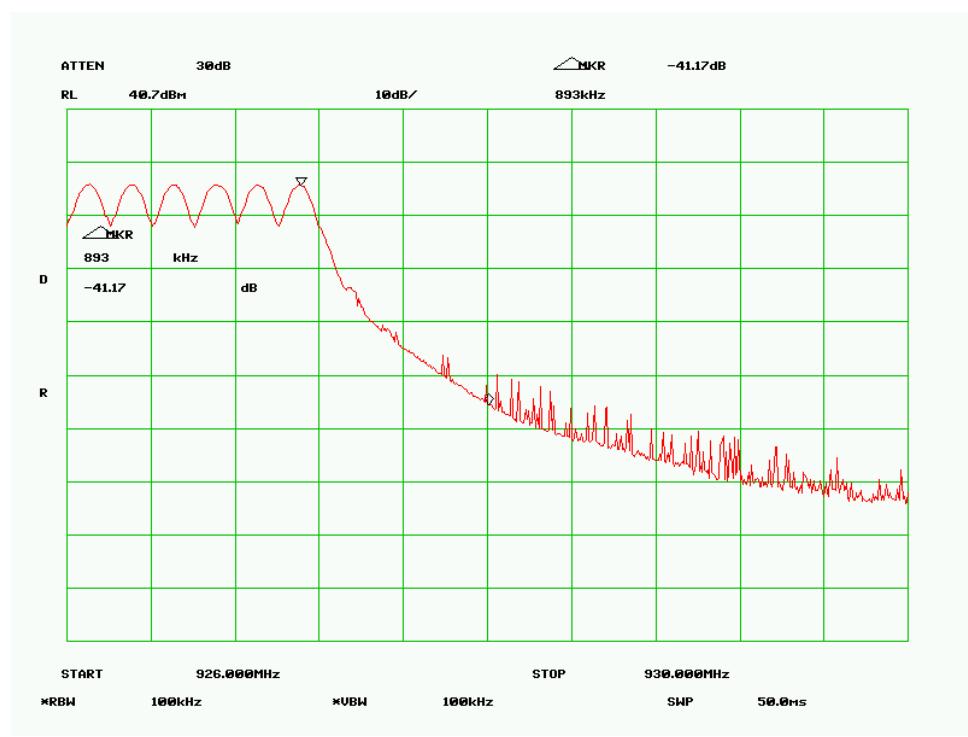

Antenna Port Emission


1. Conducted Measurement
EUT was set for low , mid, high channel with modulated mode and highest RF output power.
The spectrum analyzer was connected to the antenna terminal.
2. Conducted Emissions Measurement Uncertainty
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 20GHz is ±1.5dB.
3. Environmental Conditions Temperature 23°C
 Relative Humidity 50%
 Atmospheric Pressure 1019mbar
4. Test Date : January 08, 2008
Tested By :Dan Corona

Standard Requirement : 47 CFR §15.247(c)


Procedures: The conducted spurious emissions were measured conducted using a spectrum analyzer at low, mid, and hi channels. The limit was determined by attenuating 20 dB of the RF peak power output

Test Result:


Both Modulation has been investigated, only worst case (ISO 18000-6C) is presented.

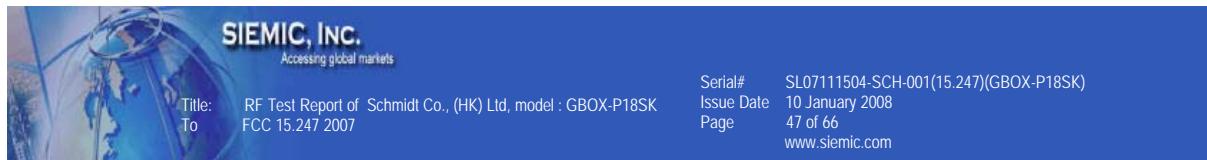


Low Channel -1

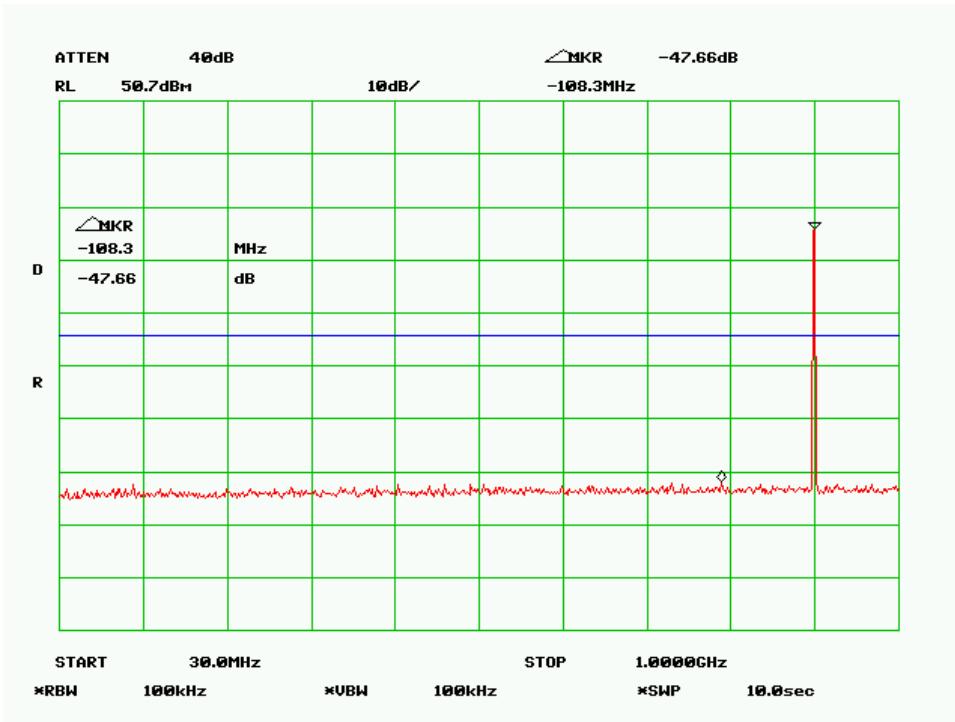


Low Channel -2

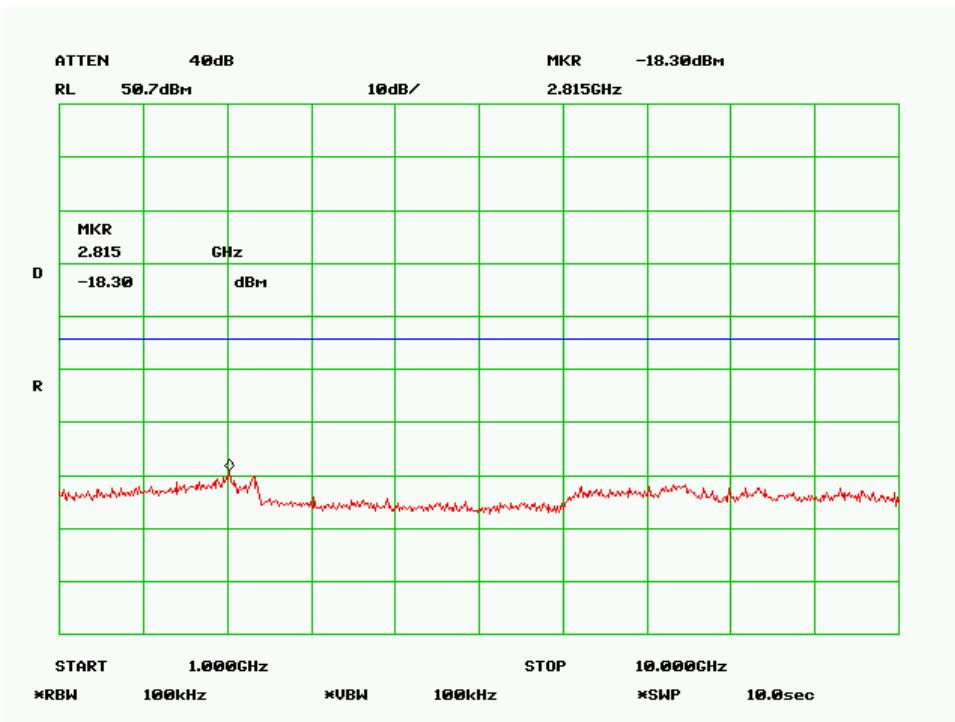


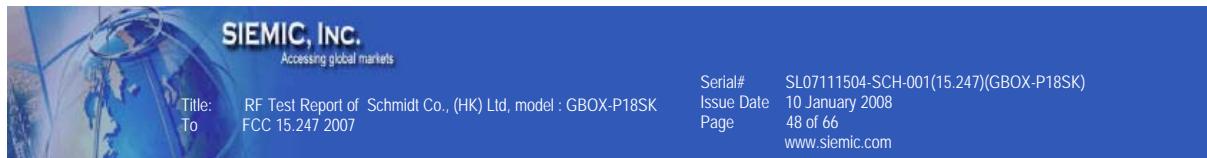


Mid Channel -1

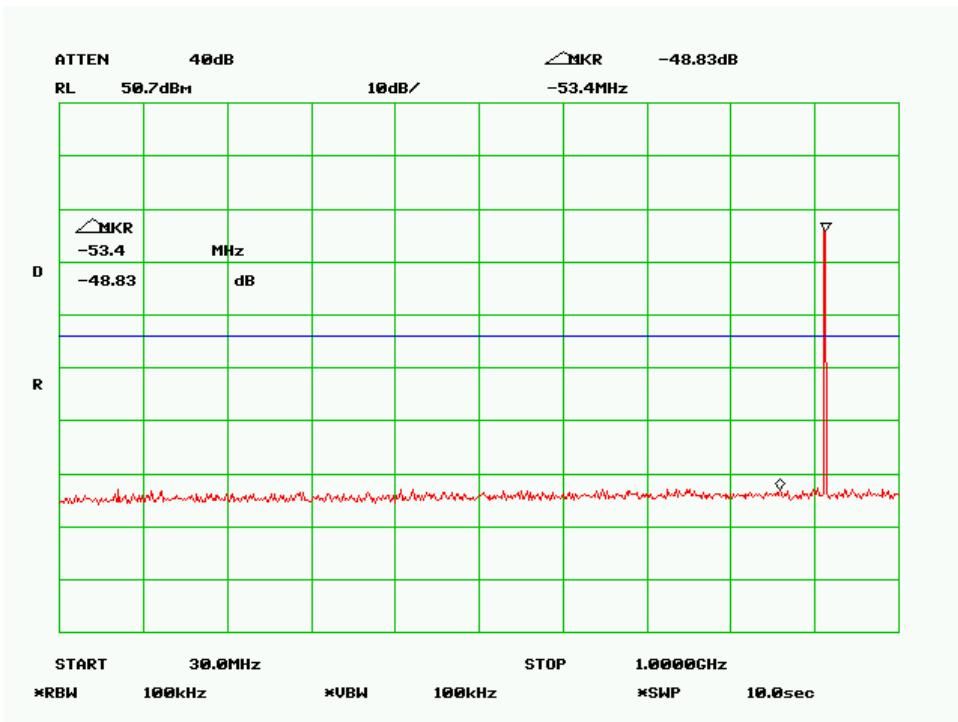


Mid Channel - 2

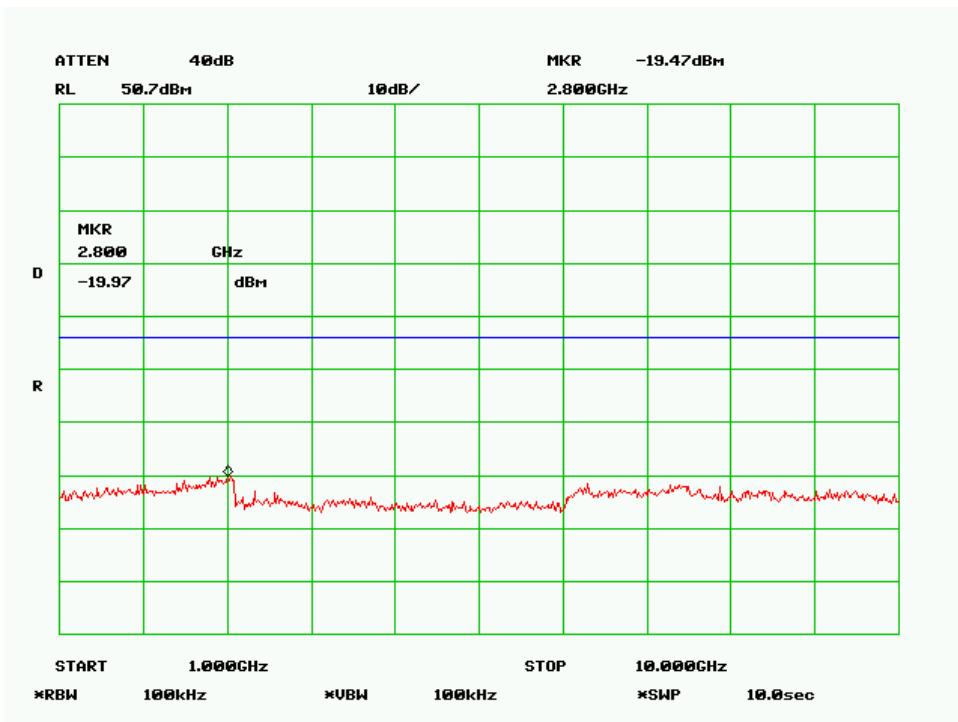


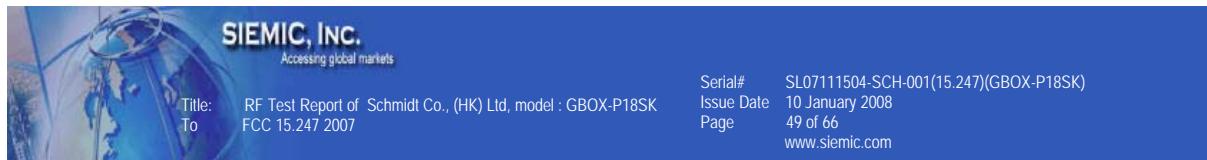

High Channel -1

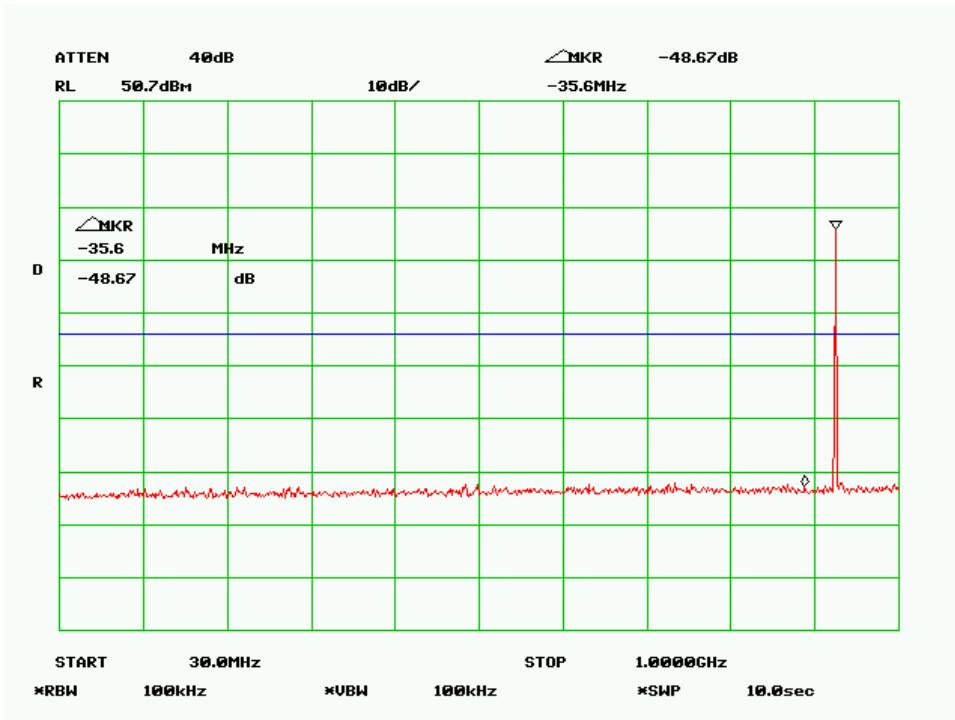

High Channel -2

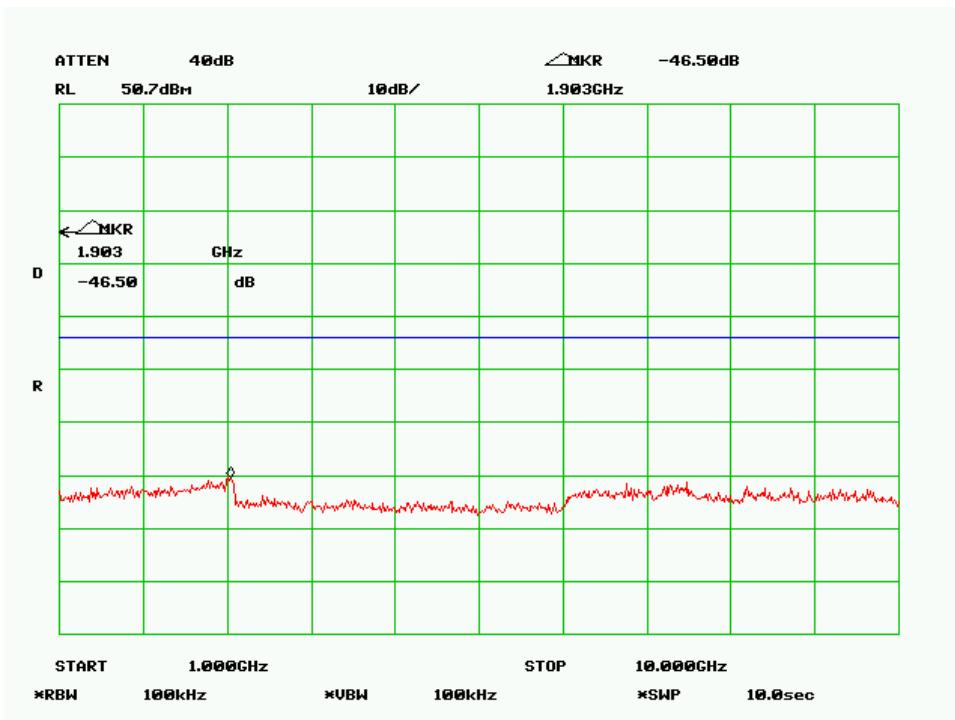

5.11 Radiated Spurious Emission < 1GHz

Test Date : January 10, 2008
Tested By :Dan Corona

Standard Requirement : 47 CFR §15.247(c)

Procedures: Radiated emissions were measured according to ANSI C63.4. The EUT was set to transmit at the highest output power. The EUT was set to transmit at mid channel. Note that setting the channel other than mid, the spurious emissions are the same.


The limit is converted from microvolts/meter to decibel microvolts/meter.

Sample Calculation: Corrected Amplitude = Raw Amplitude (dBuV/m) + ACF(dB) + Cable Loss(dB)

Test Result:

Radiated Emission Plot (Transmit Mode)

Host EUT: GBOX-P18SK

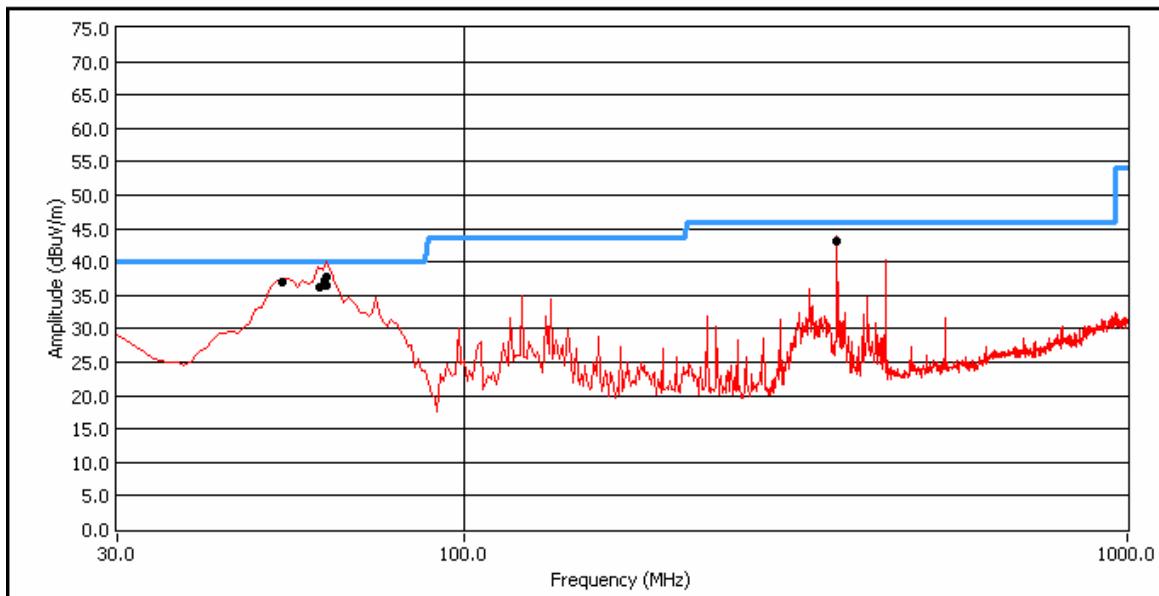

Test Data

Frequency (MHz)	Quasi-Peak (dB μ V/m)	Antenna height (cm)	Polarity	Turntable position (deg)	Limit (dB μ V/m)	Margin (dB)
62.07	37.74	105	V	32	40	-2.25
60.13	36.41	112	V	42	40	-3.58
61.10	36.20	120	V	12	40	-3.79
63.04	37.13	116	V	53	40	-2.86
365.34	43.15	102	H	120	46	-2.84
53.32	37.11	100	V	12	40	-2.88

PS: Notch filter is used to block fundamental.

5.12 Radiated Spurious Emissions > 1GHz

1. All possible modes of operation were investigated. Only the 6 worst case emissions measured, using the correct CISPR detectors, are reported. All other emissions were relatively insignificant.
2. A "-ve" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency.
3. Radiated Emissions Measurement Uncertainty
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 1GHz – 20GH is +5.6dB/-4.5dB (for EUTs < 0.5m X 0.5m X 0.5m).
4. Environmental Conditions Temperature 23°C
 Relative Humidity 50%
 Atmospheric Pressure 1019mbar

Test Date : December 20 2007

Tested By :Dan Corona


Standard Requirement : 47 CFR §15.247(d)

Procedures: Equipment was setup in a semi-anechoic chamber. For measurements above 1 GHz an average measurement was taken with a 10Hz video bandwidth. The EUT was tested at low, mid and high with the highest output power. Investigated up to 10th harmonic of the operating frequency.

Sample Calculation:

EUT Field Strength = Raw Amplitude(dB μ V/m) – Amplifier Gain(dB) + Antenna Factor(dB) + Cable Loss(dB) + Filter Attenuation(dB, if used)

Test Result:

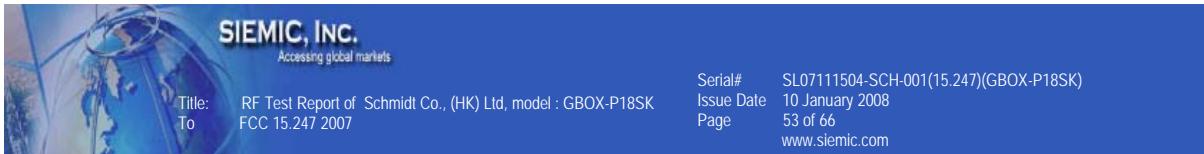

Host EUT: GBOX-P18SK

@ 902.7MHz @ 3 Meter (Vertical Polar Panel Antenna: 8dBi)


Frequency (GHz)	Azimuth (Degrees)	Antenna Polarity (H/V)	Height (m)	Raw Amp. @ 1m (dBuV)	Pre Amp. (dB)	Ant.Corr. Factor (dB)	Cable Loss (dB)	EUT Final Field Strength (dBuV/m)	Limit @ 3m (dBuV/m)	Delta (dBuV/m)	Detector (pk/avg)
1.8054	45	V	2.00	57.00	32.01	27.49	2.01	54.49	74	-19.51	pk
1.8054	45	V	2.00	54.83	32.01	27.49	2.01	52.32	54	-1.68	avg
1.8054	230	H	1.6	56.33	32.01	27.84	2.01	54.17	74	-19.83	pk
1.8054	230	H	1.6	53.67	32.01	27.84	2.01	51.51	54	-2.49	avg
2.7081	90	V	1.60	50.83	32.18	30.06	2.51	51.22	74	-22.78	pk
2.7081	90	V	1.60	42.17	32.18	30.06	2.51	42.56	54	-11.44	avg
2.7081	55	H	1.3	51.33	32.18	30.55	2.51	52.20	74	-21.79	pk
2.7081	55	H	1.3	46.83	32.18	30.55	2.51	47.70	54	-6.29	avg
3.6108	220	V	1.40	45.33	32.37	31.91	2.99	47.85	74	-26.14	pk
3.6108	220	V	1.40	37.33	32.37	31.91	2.99	39.85	54	-14.14	avg
3.6108	80	H	1.5	45.50	32.37	32.72	2.99	48.84	74	-25.16	avg
3.6108	80	H	1.5	35.83	32.37	32.72	2.99	39.17	54	-14.83	pk

Emission was scanned up to 10GHz.

@ 915.100MHz @ 3Meter

Frequency (GHz)	Azimuth (Degrees)	Antenna Polarity (H/V)	Height (m)	Raw Amp. @ 1m (dBuV)	Pre Amp. (dB)	Ant.Corr. Factor (dB)	Cable Loss (dB)	EUT Final Field Strength (dBuV/m)	Limit @ 3m (dBuV/m)	Delta (dBuV/m)	Detector (pk/avg)
1.8300	260	V	1.80	53.00	32.02	27.59	2.02	50.60	74	-23.40	pk
1.8300	260	V	1.80	49.33	32.02	27.59	2.02	46.93	54	-7.07	avg
1.8300	220	H	1.3	54.33	32.02	27.96	2.02	52.30	74	-21.70	pk
1.8300	220	H	1.3	51.67	32.02	27.96	2.02	49.64	54	-4.36	avg
2.7450	55	V	1.40	48.50	32.21	30.26	2.53	49.09	74	-24.91	pk
2.7450	55	V	1.40	40.50	32.21	30.26	2.53	41.09	54	-12.91	avg
2.7450	48	H	1.2	50.17	32.21	30.69	2.53	51.19	74	-22.81	pk
2.7450	48	H	1.2	43.83	32.21	30.69	2.53	44.85	54	-9.15	avg
3.6600	220	V	1.60	44.00	32.37	32.03	3.01	46.67	74	-27.33	pk
3.6600	220	V	1.60	30.63	32.37	32.03	3.01	33.30	54	-20.70	avg
3.6600	230	H	1.1	42.83	32.37	32.83	3.01	46.30	74	-27.69	pk
3.6600	230	H	1.1	31.83	32.37	32.83	3.01	35.30	54	-18.69	avg


Emission was scanned up to 10GHz.

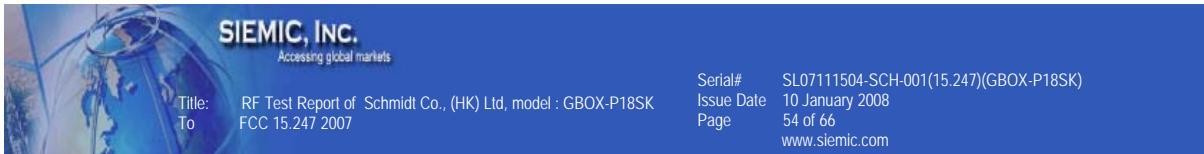

@ 927.300MHz @ 3Meter

Frequency (GHz)	Azimuth (Degrees)	Antenna Polarity (H/V)	Height (m)	Raw Amp. @ 1m (dBuV)	Pre Amp. (dB)	Ant .Corr. Factor (dB)	Cable Loss (dB)	EUT Final Field Strength (dBuV/m)	Limit @ 3m (dBuV/m)	Delta (dBuV/m)	Detector (pk/avg)
1.8546	280	V	1.80	53.33	32.02	27.69	2.03	51.04	74	-22.96	pk
1.8546	280	V	1.80	49.50	32.02	27.69	2.03	47.21	54	-6.79	avg
1.8546	230	H	1.2	53.50	32.02	28.09	2.03	51.60	74	-22.40	pk
1.8546	230	H	1.2	50.50	32.02	28.09	2.03	48.60	54	-5.40	avg
2.7819	48	V	1.60	51.17	32.23	30.46	2.56	51.96	74	-22.04	pk
2.7819	48	V	1.60	45.17	32.23	30.46	2.56	45.96	54	-8.04	avg
2.7819	85	H	1.3	50.17	32.23	30.84	2.56	51.34	74	-22.66	pk
2.7819	85	H	1.3	42.67	32.23	30.84	2.56	43.84	54	-10.16	avg
3.7092	90	V	1.20	43.83	32.37	32.16	3.04	46.65	74	-27.34	pk
3.7092	90	V	1.20	31.17	32.37	32.16	3.04	33.99	54	-20.00	avg
3.7092	220	H	1.6	43.12	32.37	32.94	3.04	46.73	74	-27.27	pk
3.7092	220	H	1.6	30.83	32.37	32.94	3.04	34.44	54	-19.56	avg

Emission was scanned up to 10GHz.

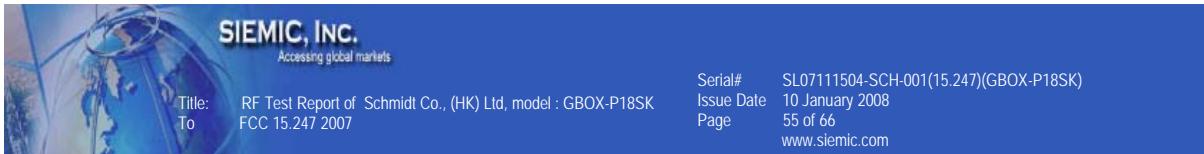

@ 902.7MHz @ 3 Meter (RFID PATCH Antenna: 7dBi)


Frequency (GHz)	Azimuth (Degrees)	Antenna Polarity (H/V)	Height (m)	Raw Amp. @ 1m (dBuV)	Pre Amp. (dB)	Ant .Corr. Factor (dB)	Cable Loss (dB)	EUT Final Field Strength (dBuV/m)	Limit @ 3m (dBuV/m)	Delta (dBuV/m)	Detector (pk/avg)
1.8054	280	V	1.20	50.50	32.01	27.49	2.01	47.99	74	-26.01	pk
1.8054	280	V	1.20	45.33	32.01	27.49	2.01	42.82	54	-11.18	avg
1.8054	200	H	1.7	51.20	32.01	27.84	2.01	49.04	74	-24.96	pk
1.8054	200	H	1.7	46.80	32.01	27.84	2.01	44.64	54	-9.36	avg
2.7081	90	V	1.30	48.67	32.18	30.06	2.51	49.06	74	-24.94	pk
2.7081	90	V	1.30	38.17	32.18	30.06	2.51	38.56	54	-15.44	avg
2.7081	80	H	1.5	49.50	32.18	30.55	2.51	50.37	74	-23.62	pk
2.7081	80	H	1.5	39.33	32.18	30.55	2.51	40.20	54	-13.79	avg
3.6108	265	V	1.60	43.50	32.37	31.91	2.99	46.02	74	-27.97	pk
3.6108	265	V	1.60	30.17	32.37	31.91	2.99	32.69	54	-21.30	avg
3.6108	100	H	1.2	45.28	32.37	32.72	2.99	48.62	74	-25.38	avg
3.6108	100	H	1.2	31.36	32.37	32.72	2.99	34.70	54	-19.30	pk

Emission was scanned up to 10GHz.

@ 915.100MHz @ 3Meter

Frequency (GHz)	Azimuth (Degrees)	Antenna Polarity (H/V)	Height (m)	Raw Amp. @ 1m (dBuV)	Pre Amp. (dB)	Ant .Corr. Factor (dB)	Cable Loss (dB)	EUT Final Field Strength (dBuV/m)	Limit @ 3m (dBuV/m)	Delta (dBuV/m)	Detector (pk/avg)
1.8300	79	V	1.20	48.90	32.02	27.59	2.02	46.50	74	-27.50	pk
1.8300	79	V	1.20	40.76	32.02	27.59	2.02	38.36	54	-15.64	avg
1.8300	100	H	1.4	49.34	32.02	27.96	2.02	47.31	74	-26.69	pk
1.8300	100	H	1.4	41.89	32.02	27.96	2.02	39.86	54	-14.14	avg
2.7450	100	V	1.40	48.19	32.21	30.26	2.53	48.78	74	-25.22	pk
2.7450	100	V	1.40	37.87	32.21	30.26	2.53	38.46	54	-15.54	avg
2.7450	70	H	1.1	48.56	32.21	30.69	2.53	49.58	74	-24.42	pk
2.7450	70	H	1.1	39.68	32.21	30.69	2.53	40.70	54	-13.30	avg
3.6600	200	V	1.10	43.28	32.37	32.03	3.01	45.95	74	-28.05	pk
3.6600	200	V	1.10	30.19	32.37	32.03	3.01	32.86	54	-21.14	avg
3.6600	190	H	1.3	44.78	32.37	32.83	3.01	48.25	74	-25.74	pk
3.6600	190	H	1.3	30.90	32.37	32.83	3.01	34.37	54	-19.62	avg

Emission was scanned up to 10GHz.

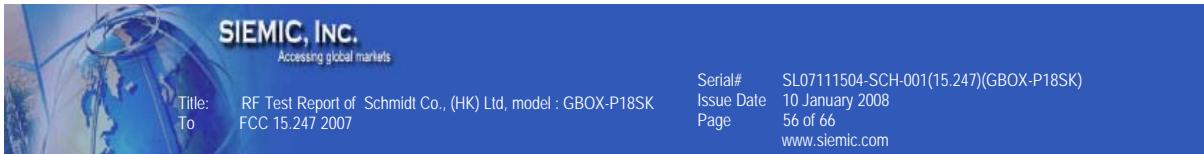

@ 927.300MHz @ 3Meter


Frequency (GHz)	Azimuth (Degrees)	Antenna Polarity (H/V)	Height (m)	Raw Amp. @ 1m (dBuV)	Pre Amp. (dB)	Ant .Corr. Factor (dB)	Cable Loss (dB)	EUT Final Field Strength (dBuV/m)	Limit @ 3m (dBuV/m)	Delta (dBuV/m)	Detector (pk/avg)
1.8546	60	V	1.10	48.17	32.02	27.69	2.03	45.88	74	-28.12	pk
1.8546	60	V	1.10	40.33	32.02	27.69	2.03	38.04	54	-15.96	avg
1.8546	90	H	1.3	48.50	32.02	28.09	2.03	46.60	74	-27.40	pk
1.8546	90	H	1.3	41.33	32.02	28.09	2.03	39.43	54	-14.57	avg
2.7819	90	V	1.20	49.00	32.23	30.46	2.56	49.79	74	-24.21	pk
2.7819	90	V	1.20	38.00	32.23	30.46	2.56	38.79	54	-15.21	avg
2.7819	45	H	1.2	49.67	32.23	30.84	2.56	50.84	74	-23.16	pk
2.7819	45	H	1.2	39.17	32.23	30.84	2.56	40.34	54	-13.66	avg
3.7092	180	V	1.30	40.35	32.37	32.16	3.04	43.17	74	-30.82	pk
3.7092	180	V	1.30	30.33	32.37	32.16	3.04	33.15	54	-20.84	avg
3.7092	221	H	1.4	42.67	32.37	32.94	3.04	46.28	74	-27.72	pk
3.7092	221	H	1.4	30.83	32.37	32.94	3.04	34.44	54	-19.56	avg

Emission was scanned up to 10GHz.

@ 902.7MHz @ 3 Meter (CS-771 Mono-Static Antenna: 6dBi)

Frequency (GHz)	Azimuth (Degrees)	Antenna Polarity (H/V)	Height (m)	Raw Amp. @ 1m (dBuV)	Pre Amp. (dB)	Ant .Corr. Factor (dB)	Cable Loss (dB)	EUT Final Field Strength (dBuV/m)	Limit @ 3m (dBuV/m)	Delta (dBuV/m)	Detector (pk/avg)
1.8054	80	V	1.70	50.12	32.01	27.49	2.01	47.61	74	-26.39	pk
1.8054	80	V	1.70	42.25	32.01	27.49	2.01	39.74	54	-14.26	avg
1.8054	180	H	1.6	50.17	32.01	27.84	2.01	48.01	74	-25.99	pk
1.8054	180	H	1.6	43.00	32.01	27.84	2.01	40.84	54	-13.16	avg
2.7081	100	V	1.30	48.90	32.18	30.06	2.51	49.29	74	-24.71	pk
2.7081	100	V	1.30	39.15	32.18	30.06	2.51	39.54	54	-14.46	avg
2.7081	90	H	1.4	49.10	32.18	30.55	2.51	49.97	74	-24.02	pk
2.7081	90	H	1.4	39.67	32.18	30.55	2.51	40.54	54	-13.45	avg
3.6108	210	V	1.50	43.80	32.37	31.91	2.99	46.32	74	-27.67	pk
3.6108	210	V	1.50	30.34	32.37	31.91	2.99	32.86	54	-21.13	avg
3.6108	130	H	1.1	44.96	32.37	32.72	2.99	48.30	74	-25.70	avg
3.6108	130	H	1.1	30.89	32.37	32.72	2.99	34.23	54	-19.77	pk

Emission was scanned up to 10GHz.

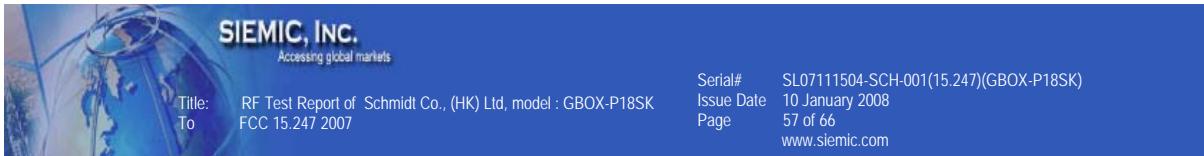

@ 915.100MHz @ 3Meter


Frequency (GHz)	Azimuth (Degrees)	Antenna Polarity (H/V)	Height (m)	Raw Amp. @ 1m (dBuV)	Pre Amp. (dB)	Ant. Corr. Factor (dB)	Cable Loss (dB)	EUT Final Field Strength (dBuV/m)	Limit @ 3m (dBuV/m)	Delta (dBuV/m)	Detector (pk/avg)
1.8300	230	V	1.70	49.00	32.02	27.59	2.02	46.60	74	-27.40	pk
1.8300	230	V	1.70	41.67	32.02	27.59	2.02	39.27	54	-14.73	avg
1.8300	200	H	1.4	49.67	32.02	27.96	2.02	47.64	74	-26.36	pk
1.8300	200	H	1.4	42.67	32.02	27.96	2.02	40.64	54	-13.36	avg
2.7450	80	V	1.20	48.20	32.21	30.26	2.53	48.79	74	-25.21	pk
2.7450	80	V	1.20	37.90	32.21	30.26	2.53	38.49	54	-15.51	avg
2.7450	50	H	1.1	48.90	32.21	30.69	2.53	49.92	74	-24.08	pk
2.7450	50	H	1.1	38.75	32.21	30.69	2.53	39.77	54	-14.23	avg
3.6600	190	V	1.50	42.34	32.37	32.03	3.01	45.01	74	-28.99	pk
3.6600	190	V	1.50	30.87	32.37	32.03	3.01	33.54	54	-20.46	avg
3.6600	210	H	1.3	43.45	32.37	32.83	3.01	46.92	74	-27.07	pk
3.6600	210	H	1.3	30.56	32.37	32.83	3.01	34.03	54	-19.96	avg

Emission was scanned up to 10GHz.

@ 927.300MHz @ 3Meter

Frequency (GHz)	Azimuth (Degrees)	Antenna Polarity (H/V)	Height (m)	Raw Amp. @ 1m (dBuV)	Pre Amp. (dB)	Ant. Corr. Factor (dB)	Cable Loss (dB)	EUT Final Field Strength (dBuV/m)	Limit @ 3m (dBuV/m)	Delta (dBuV/m)	Detector (pk/avg)
1.8546	230	V	1.60	49.00	32.02	27.69	2.03	46.71	74	-27.29	pk
1.8546	230	V	1.60	41.58	32.02	27.69	2.03	39.29	54	-14.71	avg
1.8546	190	H	1.5	49.23	32.02	28.09	2.03	47.33	74	-26.63	pk
1.8546	190	H	1.5	42.10	32.02	28.09	2.03	40.20	54	-13.80	avg
2.7819	70	V	1.50	47.98	32.23	30.46	2.56	48.77	74	-25.23	pk
2.7819	70	V	1.50	38.10	32.23	30.46	2.56	38.89	54	-15.11	avg
2.7819	100	H	1.3	48.35	32.23	30.84	2.56	49.52	74	-24.48	pk
2.7819	100	H	1.3	38.56	32.23	30.84	2.56	39.73	54	-14.27	avg
3.7092	120	V	1.30	42.35	32.37	32.16	3.04	45.17	74	-28.82	pk
3.7092	120	V	1.30	31.00	32.37	32.16	3.04	33.82	54	-20.17	avg
3.7092	220	H	1.6	42.90	32.37	32.94	3.04	46.51	74	-27.49	pk
3.7092	220	H	1.6	31.23	32.37	32.94	3.04	34.84	54	-19.16	avg

Emission was scanned up to 10GHz.

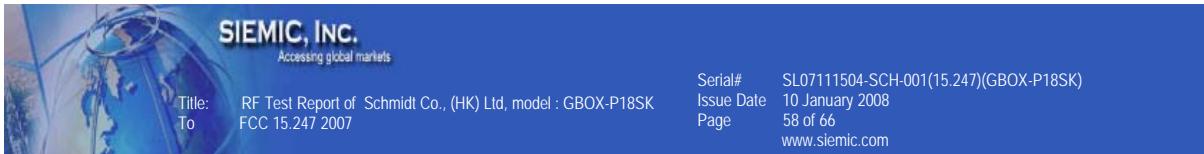

Annex A. TEST INSTRUMENT & METHOD

Annex A.i. TEST INSTRUMENTATION & GENERAL PROCEDURES

Instrument	Manufacturer	Model	CAL Due Date
Spectrum Analyzer	HP	8564E	05/01/2008
EMI Receiver	Rohde & Schwarz	ESIB 40	02/07/2008
R&S LISN	R&S	ESH2-Z5	04/27/2008
CHASE LISN	Chase	MN2050B	04/26/2008
Antenna (1 ~18GHz)	Emco	3115	08/17/2008
Antenna (30MHz~2GHz)	Sunol Sciences	JB1	10/04/2008
Chamber	Lingren	3m	09/28/2008
Pre-Amplifier(1 ~ 26GHz)	HP	8449	05/01/2008
DMM	Fluke	73III	05/01/2008
Variac	KRM	AEEC-2090	See Note
DMM	Fluke	51II	See Note
Horn Antenna (18~40GHz)	Com Power	AH-840	5/21/2008
Microwave Pre-Amp (18~40GHz)	Com Power	PA-840	5/21/2008

Note: No calibration required.

Annex A.ii. CONDUCTED EMISSIONS TEST DESCRIPTION

Test Set-up

1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table, as shown in Annex B.
2. The power supply for the EUT was fed through a $50\Omega/50\mu\text{H}$ EUT LISN, connected to filtered mains.
3. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable.
4. All other supporting equipments were powered separately from another main supply.

Test Method

1. The EUT was switched on and allowed to warm up to its normal operating condition.
2. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver.
3. High peaks, relative to the limit line, were then selected.
4. The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 KHz. For FCC tests, only Quasi-peak measurements were made; while for CISPR/EN tests, both Quasi-peak and Average measurements were made.
5. Steps 2 to 4 were then repeated for the LIVE line (for AC mains) or DC line (for DC power).

Sample Calculation Example

At 20 MHz

limit = $250 \mu\text{V} = 47.96 \text{ dB}\mu\text{V}$

Transducer factor of LISN, pulse limiter & cable loss at 20 MHz = 11.20 dB

Q-P reading obtained directly from EMI Receiver = $40.00 \text{ dB}\mu\text{V}$
(Calibrated for system losses)

Therefore, Q-P margin = $47.96 - 40.00 = 7.96$

i.e. **7.96 dB below limit**

Annex A. iii RADIATED EMISSIONS TEST DESCRIPTION


EUT Characterisation

EUT characterisation, over the frequency range from 30MHz to 10th Harmonic, was done in order to minimise radiated emissions testing time while still maintaining high confidence in the test results.

The EUT was placed in the chamber, at a height of about 0.8m on a turntable. Its radiated emissions frequency profile was observed, using a spectrum analyzer /receiver with the appropriate broadband antenna placed 3m away from the EUT. Radiated emissions from the EUT were maximised by rotating the turntable manually, changing the antenna polarisation and manipulating the EUT cables while observing the frequency profile on the spectrum analyzer / receiver. Frequency points at which maximum emissions occurred, clock frequencies and operating frequencies were then noted for the formal radiated emissions test at the Open Area Test Site (OATS).

Test Set-up

1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m X 1.0m X 0.8m high, non-metallic table.
2. The filtered power supply for the EUT and supporting equipment were tapped from the appropriate power sockets located on the turntable.
3. The relevant broadband antenna was set at the required test distance away from the EUT and supporting equipment boundary.

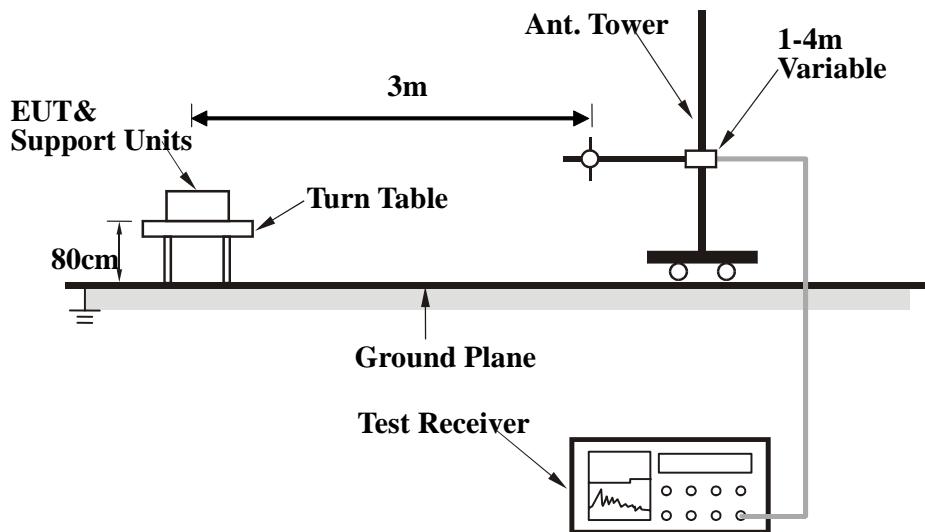

Test Method

The following procedure was performed to determine the maximum emission axis of EUT:

1. With the receiving antenna is H polarization, rotate the EUT in turns with three orthogonal axes to determine the axis of maximum emission.
2. With the receiving antenna is V polarization, rotate the EUT in turns with three orthogonal axes to determine the axis of maximum emission.
3. Compare the results derived from above two steps. So, the axis of maximum emission from EUT was determined and the configuration was used to perform the final measurement.

Final Radiated Emission Measurement

1. Setup the configuration according to figure 1. Turn on EUT and make sure that it is in normal function.
2. For emission frequencies measured below 1 GHz, a pre-scan is performed in a shielded chamber to determine the accurate frequencies of higher emissions will be checked on a open test site. As the same purpose, for emission frequencies measured above 1 GHz, a pre-scan also be performed with a 1 meter measuring distance before final test.
3. For emission frequencies measured below and above 1 GHz, set the spectrum analyzer on a 100 kHz and 1 MHz resolution bandwidth respectively for each frequency measured in step 2.
4. The search antenna is to be raised and lowered over a range from 1 to 4 meters in horizontally polarized orientation. Position the highness when the highest value is indicated on spectrum analyzer, then change the orientation of EUT on test table over a range from 0° to 360° with a speed as slow as possible, and keep the azimuth that highest emission is indicated on the spectrum analyzer. Vary the antenna position again and record the highest value as a final reading.
5. Repeat step 4 until all frequencies need to be measured were complete.
6. Repeat step 5 with search antenna in vertical polarized orientations.

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	Peak	100 kHz	100 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	10 Hz

Sample Calculation Example

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. For the limit is employed average value, therefore the peak value can be transferred to average value by subtracting the duty factor. The basic equation with a sample calculation is as follows:

$$\text{Peak} = \text{Reading} + \text{Corrected Factor}$$

where

$$\text{Corr. Factor} = \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain (if any)}$$

And the average value is

$$\text{Average} = \text{Peak Value} + \text{Duty Factor} \text{ or}$$

$$\text{Set RBW} = 1\text{MHz}, \text{VBW} = 10\text{Hz}.$$

Note :

If the measured frequencies are fall in the restricted frequency band, the limit employed must be quasi peak value when frequencies are below or equal to 1 GHz. And the measuring instrument is set to quasi peak detector function.



Title: RF Test Report of Schmidt Co., (HK) Ltd, model : GBOX-P18SK
To FCC 15.247 2007

Serial# SL07111504-SCH-001(15.247)(GBOX-P18SK)
Issue Date 10 January 2008
Page 62 of 66
www.siemic.com

Annex B EUT AND TEST SETUP PHOTOGRAPHS

Please see the attachment

Annex C. TEST SETUP AND SUPPORTING EQUIPMENT


EUT TEST CONDITIONS

Annex C. i. SUPPORTING EQUIPMENT DESCRIPTION


The following is a description of supporting equipment and details of cables used with the EUT.


Equipment Description (Including Brand Name)	Model & Serial Number	Cable Description (List Length, Type & Purpose)
LCD monitor / DELL	DELL	Serial Cable , 1meter From LCD monitor to EUT

Block Configuration Diagram for Radiated Emission

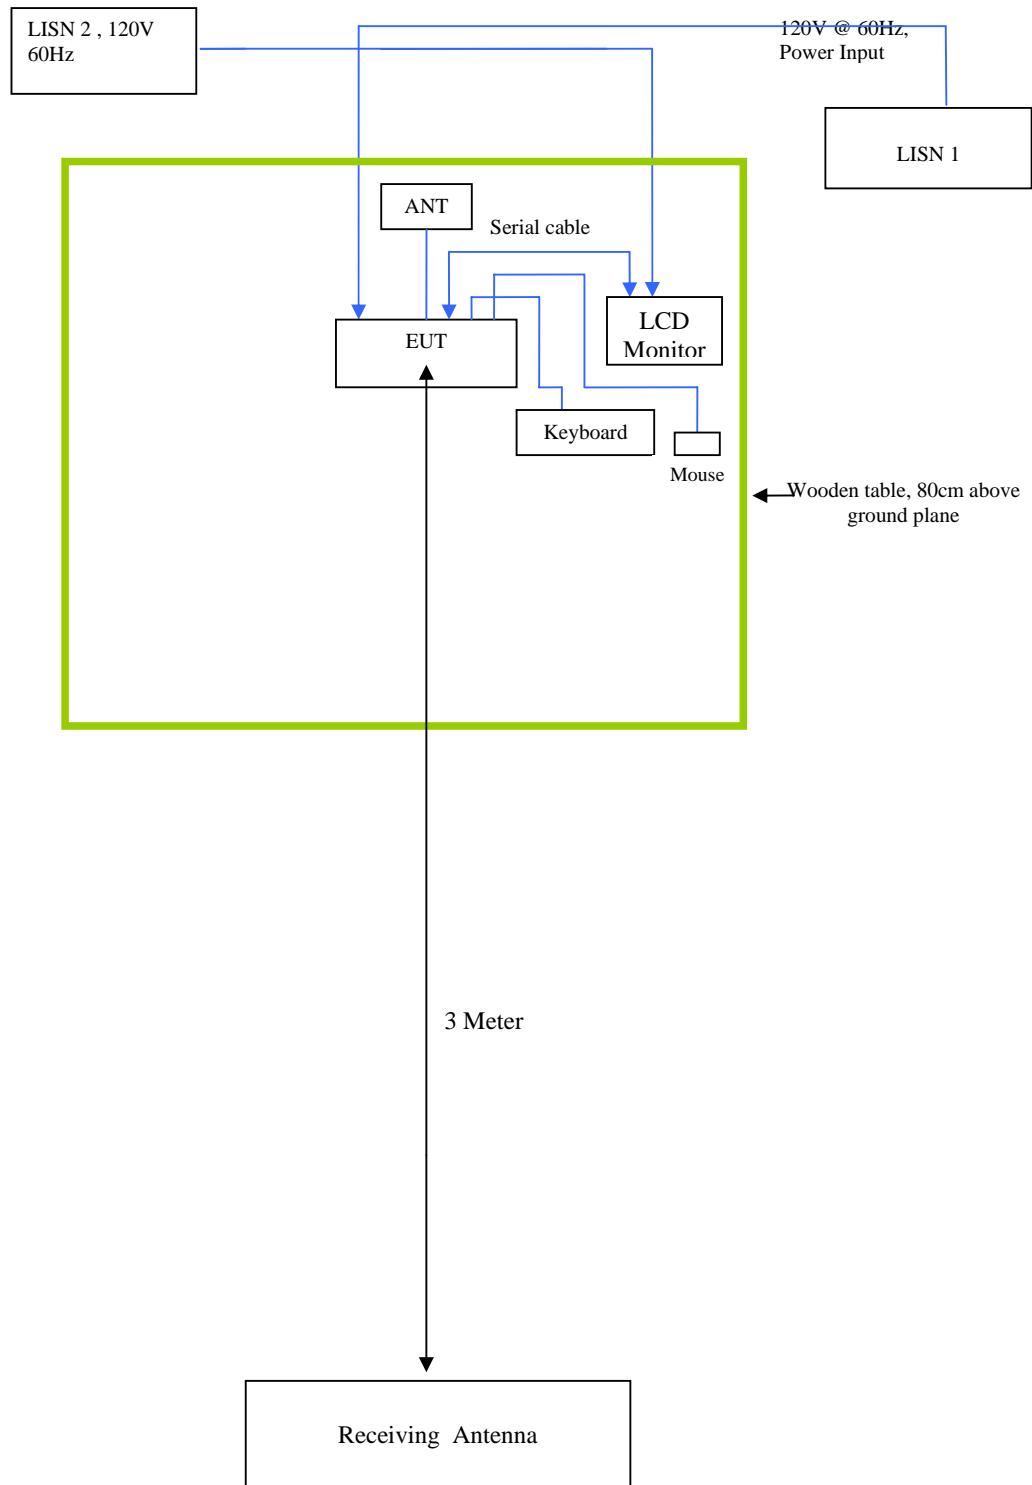

Block Configuration Diagram for Conducted Emission

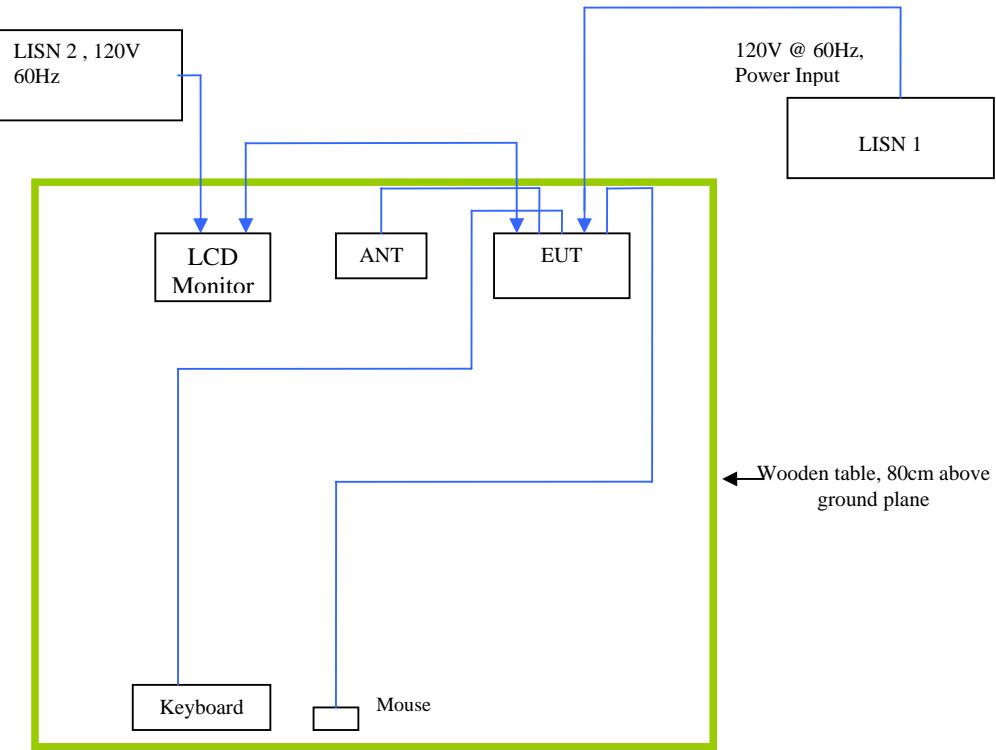

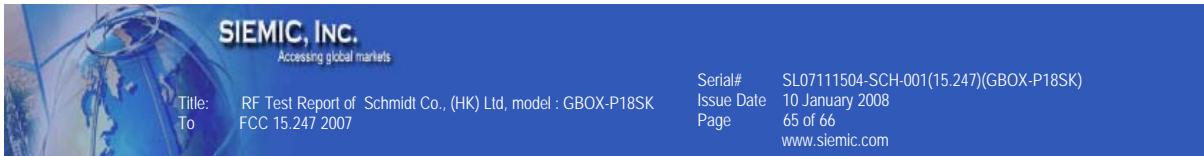

Annex C.ii. EUT OPERATING CONDITIONS

The following is the description of how the EUT is exercised during testing.

Test	Description Of Operation
Emissions Testing	The EUT was controlled via PC Using manufacturer's program. Modulation depth is 80%, Power setting is 27dBm.
Others Testing	The EUT was controlled via PC Using manufacturer's program. Modulation depth is 80%, Power setting is 27dBm.



Title: RF Test Report of Schmidt Co., (HK) Ltd, model : GBOX-P18SK
To FCC 15.247 2007

Serial# SL07111504-SCH-001(15.247)(GBOX-P18SK)
Issue Date 10 January 2008
Page 66 of 66
www.siemic.com

Annex D USER MANUAL, BLOCK & CIRCUIT DIAGRAM

Please see attachment