## FCC 47 CFR PART 15 SUBPART E

Report No.: C170704Z01-RP1-2

for

802.11ac VDSL2 IAD, 802.11ac VDSL2 GATEWAY
MODEL: SR616ac, SR516ac
Brand: SmartRG

Test Report Number:

C170704Z01-RP1-2

Issued Date: September 11, 2017

Issued for

# SmartRG Inc. 501 SE Columbia Shores Boulevard, Suite 500 Vancouver, Washington 98661

Issued by:

#### Compliance Certification Services (Shenzhen) Inc.

No.10-1 Mingkeda Logistics park, No.18, Huanguan South Rd., Guan Lan Town, Baoan District, Shenzhen, China

> TEL: 86-755-28055000 FAX: 86-755-28055221 E-Mail: service@ccssz.com



Certificate Number: 2861.01

**Note:** This report shall not be reproduced except in full, without the written approval of Compliance Certification Services (Shenzhen) Inc. This document may be altered or revised by Compliance Certification Services (Shenzhen) Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, A2LA, NVLAP, NIST or any government agencies. The TEST RESULTS in the report only apply to the tested sample.

FCC ID: VW7SR616A Page 1 / 184

# **Revision History**

Report No.: C170704Z01-RP1-2

Rev.	Issue Date	Revisions	Effect Page	Revised By
00 September 11, 2017		Initial Issue	ALL	Sabrina Wang

FCC ID: VW7SR616A Page 2 / 184
This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

## **TABLE OF CONTENTS**

1. TE	ST CERTIFICATION	4
2. EL	JT DESCRIPTION	5
	ST METHODOLOGY	
	EUT CONFIGURATION	
	2 EUT EXERCISE	
	3 GENERAL TEST PROCEDURES	
	FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS	
3.5	5 DESCRIPTION OF TEST MODES	10
4. SE	TUP OF EQUIPMENT UNDER TEST	11
4.1	DESCRIPTION OF SUPPORT UNITS	11
4.2	CONFIGURATION OF SYSTEM UNDER TEST	11
5. FA	ACILITIES AND ACCREDITATIONS	12
5.1	FACILITIES	12
	2 EQUIPMENT	
	3 ACCREDITATIONS	
	MEASUREMENT UNCERTAINTY	
	CC PART 15 REQUIREMENTS	
	I 26dB EMISSION BANDWIDTH	
	2 6dB BANDWIDTH MEASUREMENT	
	3 ANTENNA GAIN	
	OUTPUT POWER	
	BAND EDGES MEASUREMENT	
	PEAK POWER SPECTAL DENSITY	
	7 RADIATED UNDESIABLE EMISSION	
	3 CONDUCTED UNDESIRABLE EMISSION	
	POWERLINE CONDUCTED EMISSIONS	
6.1	10 FREQUENCY STABILITY	162

## 1. TEST CERTIFICATION

Product	802.11ac VDSL2 IAD, 802.11ac VDSL2 GATEWAY
Model	SR616ac, SR516ac
Brand	SmartRG
Tested	July 4~ September 11, 2017
Applicant	SmartRG Inc. 501 SE Columbia Shores Boulevard, Suite 500 Vancouver, Washington 98661
Manufacturer	SmartRG Inc. 501 SE Columbia Shores Boulevard, Suite 500 Vancouver, Washington 98661

APPLICABLE STANDARDS				
STANDARD TEST RESULT				
FCC 47 CFR Part 15 Subpart E	No non-compliance noted			

## We hereby certify that:

Compliance Certification Services (Shenzhen) Inc. tested the above equipment. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10: 2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.407、FCC 14-30.

The TEST RESULTS of this report relate only to the tested sample identified in this report.

Approved by:

Reviewed by:

Sunday Hu

Supervisor of EMC Dept.

**Compliance Certification Services (Shenzhen)** 

Inc.

Ruby Zhang

Supervisor of Report Dept.

**Compliance Certification Services (Shenzhen)** 

Report No.: C170704Z01-RP1-2

Inc.

# 2. EUT DESCRIPTION

Product	802.11ac VDSL2 IAD, 802.11ac VDSL2 GATEWAY					
Model Number	SR616ac, SR516ac					
Brand	SmartRG					
Model Discrepancy	Compare with the two models, the model SR516ac is less than two voip over SR516ac.					
Serial Number	C170704Z01-RP1-2					
Received Date	July 4, 2017					
EUT Power Rating	DC12V supply by the adapter					
Adapter Manufacturer & Model	Shenzhen Gongjin Electronics Co Input: AC100-240V~50/60Hz max Output: DC12V 2A DC Output Cable: Unsheilded1.00					
Frequency Range	UNII Band I:  IEEE 802.11a, 802.11n HT20 : 5180MHz ~ 5240MHz;  IEEE 802.11n HT40: 5190MHz ~ 5230MHz  IEEE 802.11ac 80: 5210MHz  UNII Band IV  IEEE 802.11a, 802.11n HT20 : 5745MHz ~ 5825MHz  IEEE 802.11n HT40: 5755MHz ~ 5795MHz  IEEE 802.11ac 80: 5775MHz					
Transmit Power	UNII Band I:  IEEE 802.11a:  Combine with Antenna 0 and AntelleE 802.11n HT 20 MHz mode: IEEE 802.11n HT 40 MHz mode: IEEE 802.11ac 80: UNII Band IV  IEEE 802.11a:  Combine with Antenna 0 and AntelleE 802.11n HT 20 MHz mode: IEEE 802.11n HT 20 MHz mode: IEEE 802.11n HT 40 MHz mode: IEEE 802.11ac 80:	12.54 dBm 15.25 dBm 17.90 dBm  18.55 dBm (Antenna 0) 18.61 dBm (Antenna 1) 18.74 dBm (Antenna 2) enna 1and Antenna 2: 21.27 dBm				
Modulation Technique	OFDM (QPSK, BPSK, 16-QAM, 64-QAM)					
Transmit Data Rate	IEEE 802.11a mode: 48, 36, 24, 18, 12, 9, 6Mbps IEEE802.11n HT20MHz mode(800ns GI): 13,26,39,52,78,104,117,130Mbps IEEE802.11n HT40MHz mode(800ns GI): 27,54,81,108,162,216,243,270Mbps IEEE802.11ac 80 mode(800ns GI): 58.6,117,175.6,234,351,468,526.6, 585,702,780Mbps					
Number of Channels	UNII Band I: IEEE 802.11a, 802.11n HT20 : 4 Channels IEEE 802.11n HT40 : 2 Channels IEEE 802.11ac 80: 1 Channel UNII Band IV					

Report No.: C170704Z01-RP1-2

FCC ID: VW7SR616A Page 5 / 184
This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.



	IEEE 802.11a, 802.11n HT20 : 5 Channels IEEE 802.11n HT 40 MHz mode: 2 Channels IEEE 802.11ac 80: 1 Channel
Antenna Specification	Embedded Antenna with 3dBi gain (Max) Directional Gain= G <sub>ant</sub> + 10log (N <sub>ant</sub> ) dBi=7.77dBi
Channels Spacing	IEEE 802.11a, 802.11n HT20 : 20MHz IEEE 802.11n HT40: 40MHz IEEE 802.11ac 80: 80MHz
Temperature Range	0°C ~ +40°C
Hardware Version	A0
Software Version	1.0.0.75

**Note:** 1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.

FCC ID: VW7SR616A Page 6 / 184

## **Operation Frequency:**

UNLICENSED NATIONAL INFORMATION INFRASTRUCTURE (U-NII)				
CHANNEL	MHz			
36	5180			
38	5190			
40	5200			
42	5210			
44	5220			
46	5230			
48	5240			
149	5745			
151	5755			
153	5765			
155	5775			
157	5785			
159	5795			
161	5805			
165	5825			

#### Remark:

- 1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.
- 2. This submittal(s) (test report) is intended for FCC ID: **VW7SR616A** filing to comply with Section 15.407 of the FCC Part 15, Subpart E Rules and FCC 14-30.

## 3. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10 Radiated testing was performed at an antenna to EUT distance 3 meters.

Report No.: C170704Z01-RP1-2

The tests documented in this report were performed in accordance with ANSI C63.10: 2013 and FCC CFR 47 Part 15.207, 15.209, 15.407 and FCC 14-30.

Radio testing was performed according to KDB DA 02-2138、KDB 789033 D02、KDB 905462 D06:

#### 3.1 EUT CONFIGURATION

The EUT configuration for testing is installed for RF field strength measurement to meet the Commissions requirement, and is operated in a manner intended to generate the maximum emission in a continuous normal application.

#### 3.2 EUT EXERCISE

The EUT is operated in the engineering mode to fix the TX frequency for the purposes of measurement.

According to its specifications, the EUT must comply with the requirements of Section 15.407 under the FCC Rules Part 15 Subpart E.

#### 3.3 GENERAL TEST PROCEDURES

#### **Conducted Emissions**

The EUT is placed on the turntable, which is positioned at 0.8 m above the ground plane. According to the requirements in Section 6.2 of ANSI C63.10, the conducted emission from the EUT is measured in the frequency range between 0.15 MHz and 30MHz, using the CISPR Quasi-Peak detector mode.

#### **Radiated Emissions**

The EUT is placed on the turntable, which is 0.8 m (below 1GHz) /1.5m (Above 1GHz) above the ground plane. The turntable is then rotated for 360 degrees to determine the proper orientation for the maximum emission level. The EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission level. And, each emission is to be maximized by changing the horizontal and vertical polarization of the receiving antenna. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 6.4 to Section 6.6 of ANSI C63.10.

FCC ID: VW7SR616A Page 8 / 184

## 3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

Report No.: C170704Z01-RP1-2

MHz	MHz	MHz	GHz
0.090 - 0.110	0.090 - 0.110		4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41	322 - 335.4		

<sup>&</sup>lt;sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

FCC ID: VW7SR616A Page 9 / 184

<sup>&</sup>lt;sup>2</sup> Above 38.6

#### 3.5 DESCRIPTION OF TEST MODES

The EUT is a 3x3 configuration spatial MIMO (3TX & 3RX) without beam forming function. Use Mtool to control the EUT for staying in continuous transmitting mode was programmed.

Report No.: C170704Z01-RP1-2

Test Item	Test mode	Worse mode
Conducted	<b>Mode 1:</b> 1000Mbps 20%(AC120V/60Hz)	$\boxtimes$
Emission	<b>Mode 2</b> : 1000Mbps 20%(AC240V/50Hz)	
Radiated Emission	Mode 1: Continuously Transmitting	$\boxtimes$

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz, which worst case was in normal link mode only.

#### **UNII Band I:**

#### IEEE 802.11a for 5180 ~ 5240MHz:

Channel Low (5180MHz), Channel Mid (5200MHz) and Channel High (5240MHz) with 6Mbps data rate were chosen for full testing.

#### IEEE 802.11n HT 20 MHz for 5180 ~ 5240MHz:

Channel Low (5180MHz), Channel Mid (5200MHz) and Channel High (5240MHz) with 13Mbps data rate were chosen for full testing.

#### IEEE 802.11n HT 40 MHz Channel for 5190 ~ 5230MHz:

Channel Low (5190MHz) and Channel High (5230MHz) with 27Mbps data rate were chosen for full testing.

#### IEEE 802.11ac 80 Channel for 5210MHz:

Channel Low (5210MHz) with 27Mbps data rate were chosen for full testing.

#### **UNII Band IV:**

#### IEEE 802.11a for 5745 ~ 5825MHz:

Channel Low (5745MHz), Channel Mid (5785MHz) and Channel High (5825MHz) with 6Mbps data rate were chosen for full testing.

#### IEEE 802.11n HT 20 MHz for 5745 ~ 5825MHz:

Channel Low (5745MHz), Channel Mid (5785MHz) and Channel High (5825MHz) with 13Mbps data rate were chosen for full testing.

#### IEEE 802.11n HT 40 MHz Channel for 5755~ 5795MHz:

Channel Low (5755MHz) and Channel High (5795MHz) with 27Mbps data rate were chosen for full testing.

#### **IEEE 802.11ac 80 Channel for 5775MHz:**

Channel Low (5775MHz) with 27Mbps data rate were chosen for full testing.

FCC ID: VW7SR616A Page 10 / 184

## 4. SETUP OF EQUIPMENT UNDER TEST

## 4.1 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Report No.: C170704Z01-RP1-2

No.	Equipment	Model No.	Serial No.	FCC ID	Brand	Data Cable	Power Cord
1	Notebook 1	E335	N/A	DoC	Thinkpad	Unshielded 2.00m	Unshielded 1.20m (AC Cable) Shielded 1.50m (DC Cable)
2	Notebook 2	Probook 5310M	N/A	DoC	НР	Unshielded 2.00m	Unshielded 1.20m (AC Cable) Shielded 1.50m (DC Cable)
3	lpod	A1285	YM91546Y3 QY	DoC	Apple	Shielded 2.00m	N/A
4	OLT	9806	N/A	DoC	ZTE	Unshielded 8.00m	N/A
5	Telephone 1	HCD6238	N/A	DoC	CHINO-E	Unshielded 1.00m	N/A
6	Telephone 2	HCD868	N/A	DoC	TCL	Unshielded 1.00m	N/A

#### Note:

Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

## 4.2 CONFIGURATION OF SYSTEM UNDER TEST

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

FCC ID: VW7SR616A Page 11 / 184

## 5. FACILITIES AND ACCREDITATIONS

#### 5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at No.10-1 Mingkeda Logistics park, No.18, Huanguan South Rd., Guan Lan Town, Baoan District, Shenzhen, China

Report No.: C170704Z01-RP1-2

The sites are constructed in conformance with the requirements of ANSI C63.10, ANSI C63.7 and CISPR Publication 22.

#### **5.2 EQUIPMENT**

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

#### 5.3 ACCREDITATIONS

Our laboratories are accredited and approved by the following accreditation body according to ISO/IEC 17025.

USA A2LA China CNAS

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

USA FCC

Japan VCCI(C-3478, R-3135, T-652, G-10624)

Canada INDUSTRY CANADA

Copies of granted accreditation certificates are available for downloading from our web site, http://www.ccssz.com

FCC ID: VW7SR616A Page 12 / 184

## **5.4 MEASUREMENT UNCERTAINTY**

Parameter	Uncertainty
RF frequency	+/-1 * 10-5
RF power conducted	+/- 1,5 dB
RF power radiated	+/- 6 dB
Spurious emissions, conducted	+/- 3 dB
Spurious emissions, radiated	+/- 6 dB
Humidity	+/- 5 %
Temperature	+/- 1°C
Time	+/-10 %

**Remark:** This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Report No.: C170704Z01-RP1-2

FCC ID: VW7SR616A Page 13 / 184
This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

## 6. FCC PART 15 REQUIREMENTS

#### 6.1 26dB EMISSION BANDWIDTH

#### 6.1.1 LIMIT

According to §15.403(c), for purposes of this subpart the emission bandwidth shall be determined by measuring the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that are 26 dB down relative to the maximum level of the modulated carrier. Compliance with the emissions limits is based on the use of measurement instrumentation employing a peak detector function with an instrument resolutions bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement.


Report No.: C170704Z01-RP1-2

#### 6.1.2 MEASUREMENT EQUIPMENT USED

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	N9010A	MY52221469	02/21/2017	02/20/2018

Remark: Each piece of equipment is scheduled for calibration once a year.

#### 6.1.3 TEST CONFIGURATION



#### **6.1.4TEST PROCEDURE**

- 1. Place the EUT on the table and set it in the transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low-loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set the spectrum analyzer as RBW > 1%EBW, VBW > RBW, Span >26dB bandwidth, Detector = Peak, and Sweep = auto.
- 4. Mark the peak frequency and –26dB (upper and lower) frequency.
- 5. Repeat until all the rest channels were investigated.

FCC ID: VW7SR616A Page 14 / 184

#### 6.1.5 TEST RESULTS

No non-compliance noted

## **Test Data**

Test mode: IEEE 802.11a mode / 5180 ~ 5240MHz

Channel	Frequency	26dB Bandwidth(B) (MHz)				
<u> </u>	(MHz)	Antenna 0	Antenna 1	Antenna 2		
Low	5180	20.94	21.03	21.05		
Mid	5200	21.09	21.17	21.16		
High	5240	21.05	21.16	21.17		

Report No.: C170704Z01-RP1-2

Test mode: IEEE 802.11n HT 20 MHz mode / 5180 ~ 5240MHz

Channel	Frequency	26dB Bandwidth(B) (MHz)				
	(MHz)	Antenna 0	Antenna 1	Antenna 2		
Low	5180	20.94	21.50	21.24		
Mid	5200	20.89	21.33	21.37		
High	5240	21.30	21.11	21.25		

Test mode: IEEE 802.11n HT 40 MHz mode / 5190 ~ 5230MHz

Channel	Frequency	2	26dB Bandwidth(B (MHz)	)
<u> </u>	(MHz)	Antenna 0	Antenna 1	Antenna 2
Low	5190	40.31	40.60	40.60
High	5230	40.36	40.36	40.49

Test mode: IEEE 802.11ac 80 mode / 5210MHz

Channel	Frequency (MHz)	26dB Bandwidth(B) (MHz)		
		Antenna 0	Antenna 1	Antenna 2
	5210	82.23	82.50	82.18


FCC ID: VW7SR616A Page 15 / 184
This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.


## **Test Plot**



FCC ID: VW7SR616A Page 16 / 184


This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

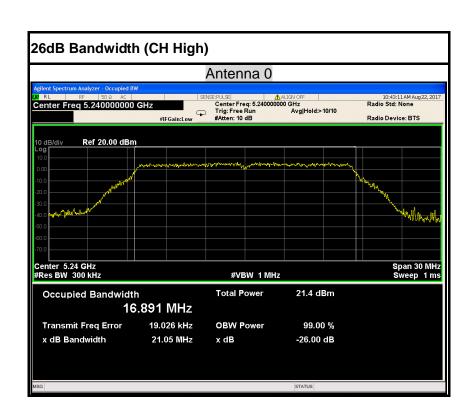


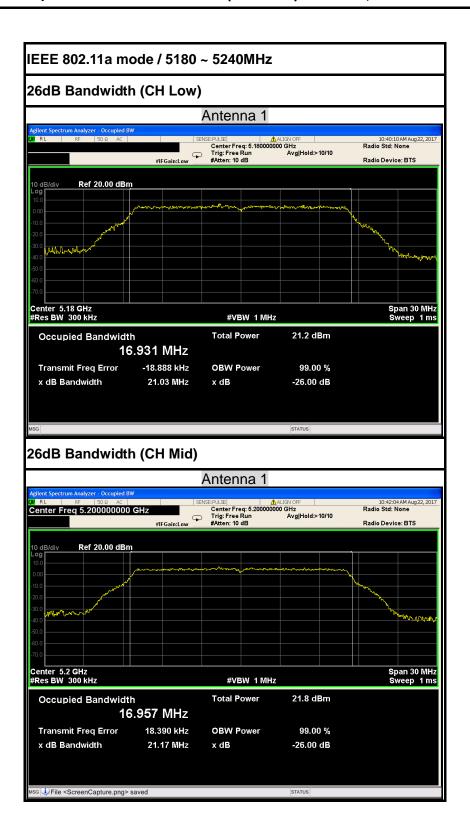


FCC ID: VW7SR616A Page 18 / 184



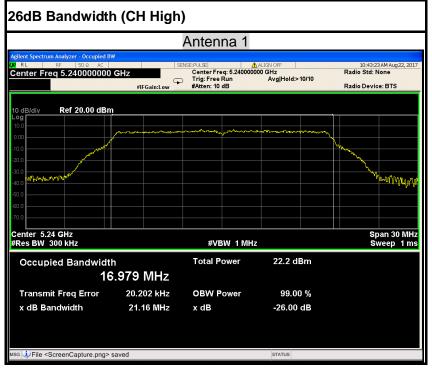


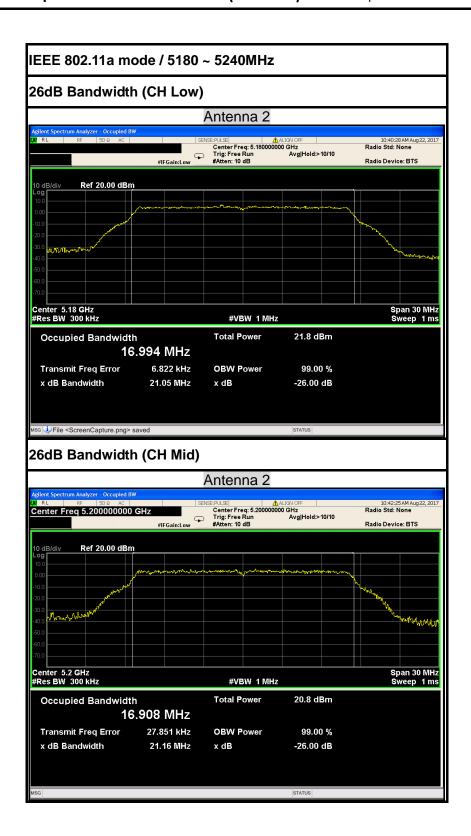



FCC ID: VW7SR616A Page 20 / 184
This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

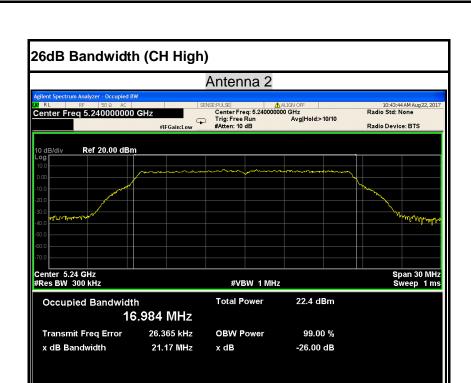

G i File <ScreenCapture.png> saved

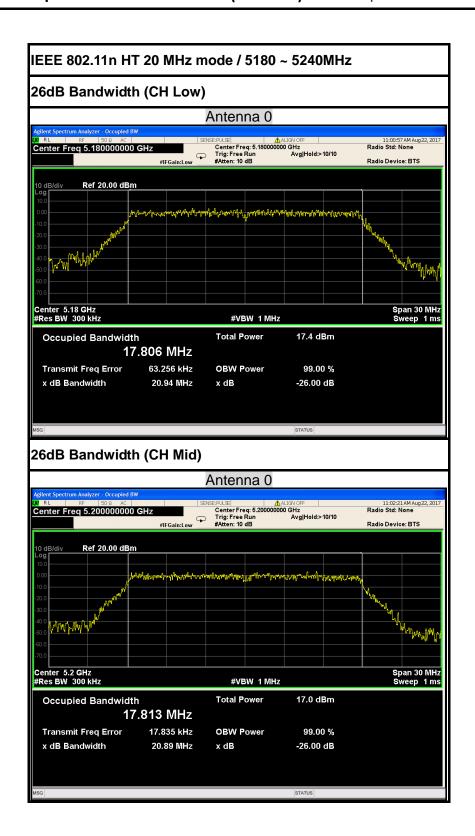


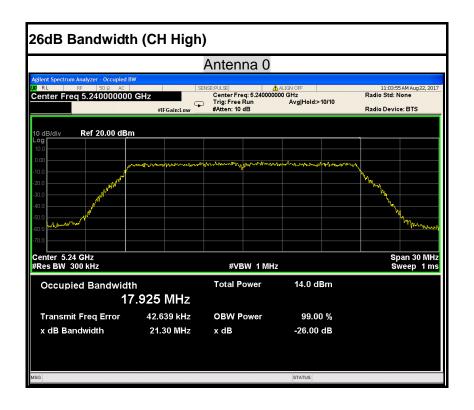


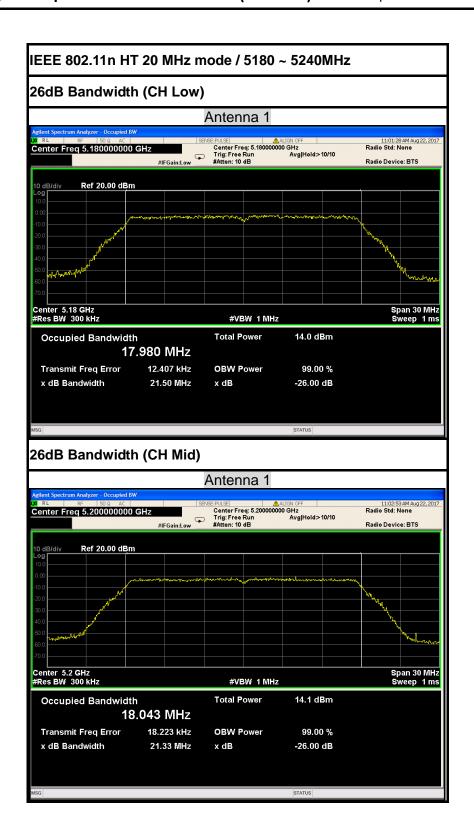



FCC ID: VW7SR616A Page 24 / 184


This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

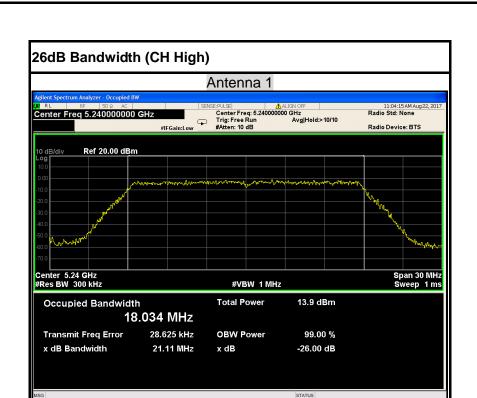

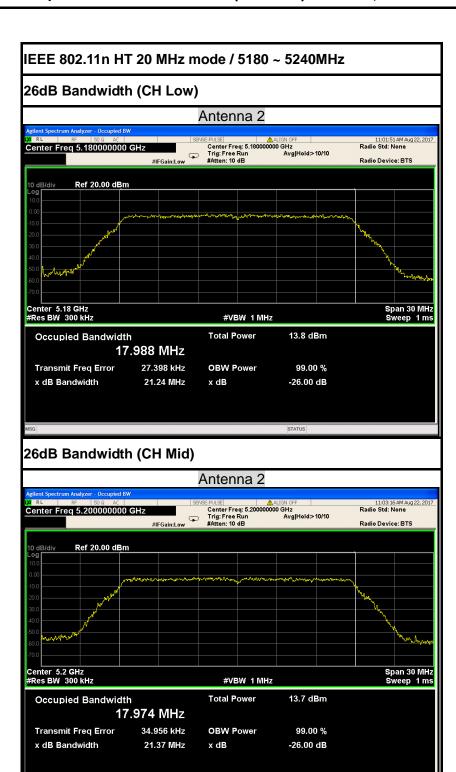

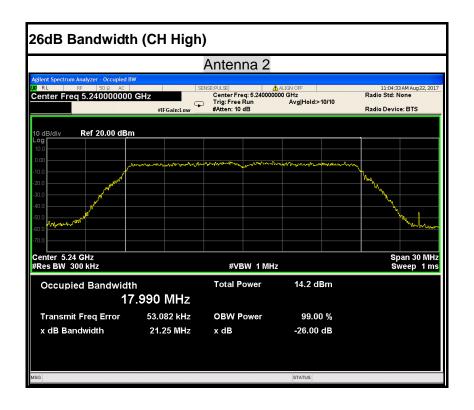


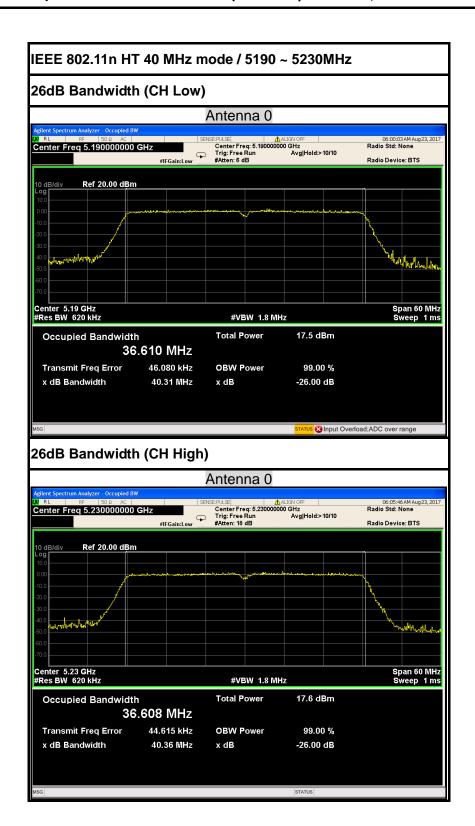

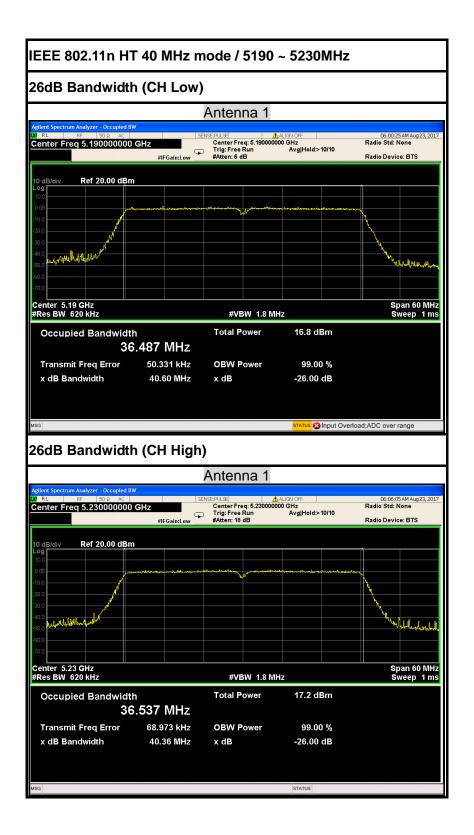



FCC ID: VW7SR616A Page 29 / 184



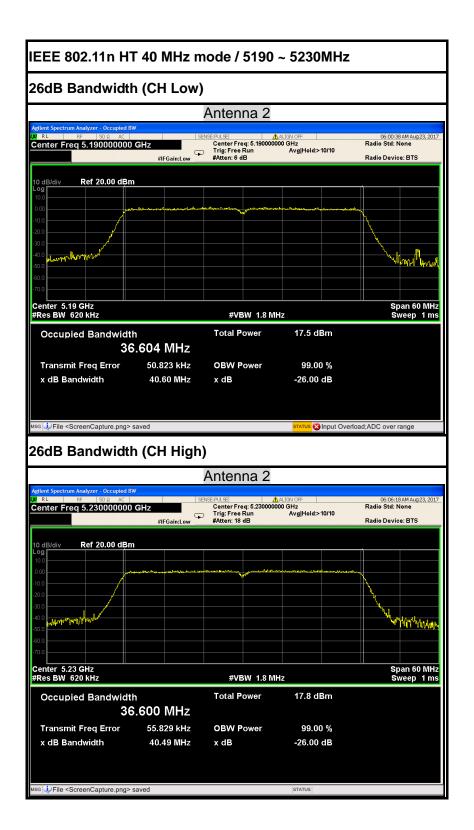

FCC ID: VW7SR616A Page 30 / 184 This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.




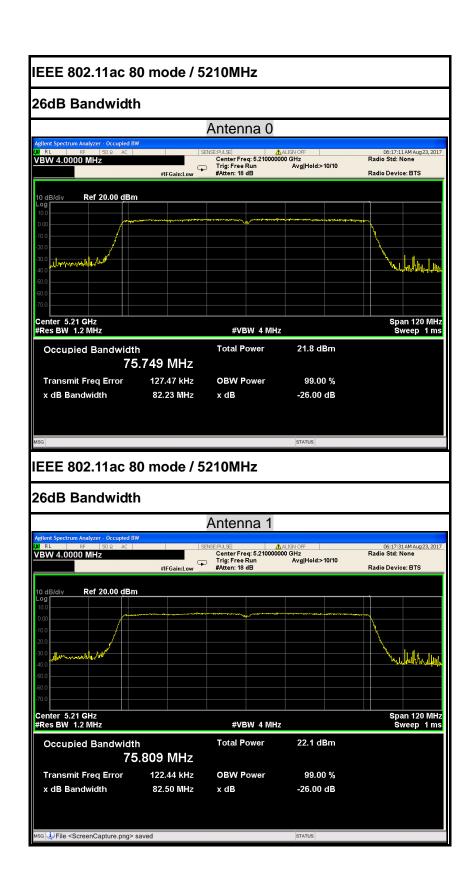

FCC ID: VW7SR616A Page 31 / 184

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.



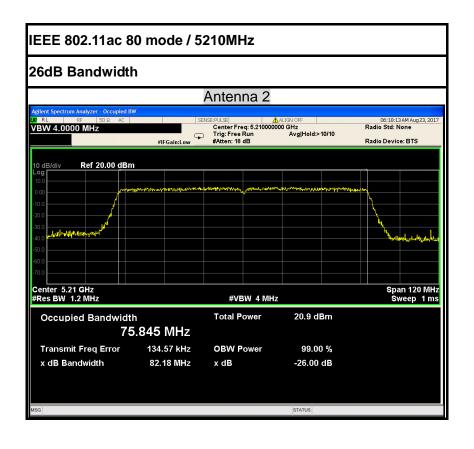

FCC ID: VW7SR616A Page 32 / 184
This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

#### 6.2 6dB BANDWIDTH MEASUREMENT

#### **6.2.1 LIMITS**

According to §15.407(e), Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

Report No.: C170704Z01-RP1-2

#### 6.2.2 TEST INSTRUMENTS


Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Calibration Due
Spectrum Analyzer	Agilent	N9010A	MY52221469	02/21/2017	02/20/2018

#### **6.2.3 TEST PROCEDURES** (please refer to measurement standard)

#### 8.1 Option 2:

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described above (i.e., RBW = 100 kHz, VBW  $\geq$  3 RBW, peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be  $\geq$  6 dB.

#### 6.2.4 TEST SETUP



FCC ID: VW7SR616A Page 33 / 184

#### 6.2.5 TEST RESULTS

No non-compliance noted

## **Test Data**

Test mode: IEEE 802.11a mode / 5745 ~ 5825MHz

Channel	Frequency	60	dB Bandwidth(I (MHz)	Limit	Test Result	
	(MHz)	Antenna 0	Antenna 1	Antenna 2	(kHz)	
Low	5745	16.37	16.37	16.36		PASS
Mid	5785	16.44	16.38	16.34	>500	PASS
High	5825	16.37	16.37	16.39		PASS

Report No.: C170704Z01-RP1-2

Test mode: IEEE 802.11n HT 20 MHz mode / 5745 ~ 5825MHz

	Frequency	60	dB Bandwidth(	Limit			
Channel (MHz)		Antenna 0	(MHz) Antenna 1	Antenna 2	(kHz)	Test Result	
Low	5745	17.63	17.62	17.64	>500	PASS	
Mid	5785	17.60	17.61	17.60		PASS	
High	5825	17.65	17.65	17.54		PASS	

Test mode: IEEE 802.11n HT 40 MHz mode / 5755 ~ 5795MHz


Channel	Frequency	60	dB Bandwidth(I (MHz)	В)	Limit	Test Result
C.1.0.111101	(MHz)	Antenna 0	Antenna 1	Antenna 2	(kHz)	
Low	5755	36.07	36.38	36.37	. F00	PASS
High	5795	36.37	36.12	36.12	>500	PASS

Test mode: IEEE 802.11ac 80 mode / 5775MHz

Channel	Frequency	6dB Bandwidth(B) (MHz)			Limit	Test Result
Onamio.	(MHz)	Antenna 0	Antenna 1	Antenna 2	(kHz)	
	5775	75.62	75.33	75.62	>500	PASS


FCC ID: VW7SR616A Page 34 / 184

#### **Test Plot**

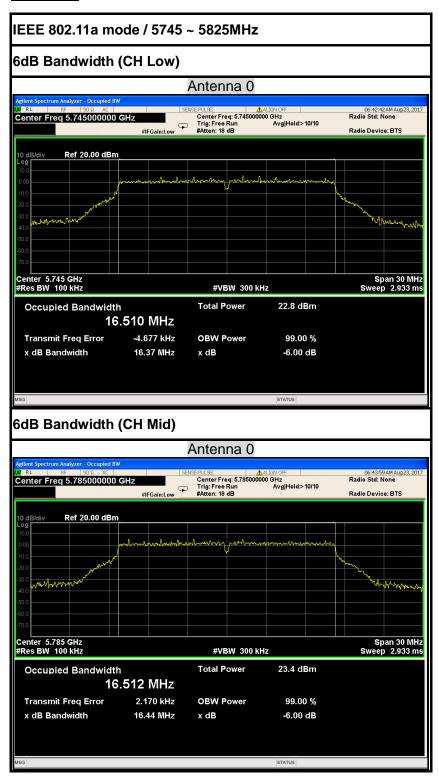


FCC ID: VW7SR616A Page 35 / 184


This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

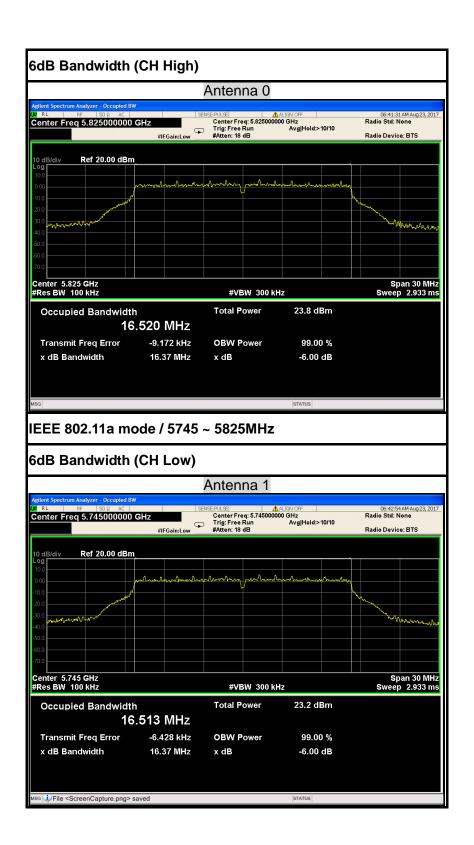


FCC ID: VW7SR616A Page 36 / 184

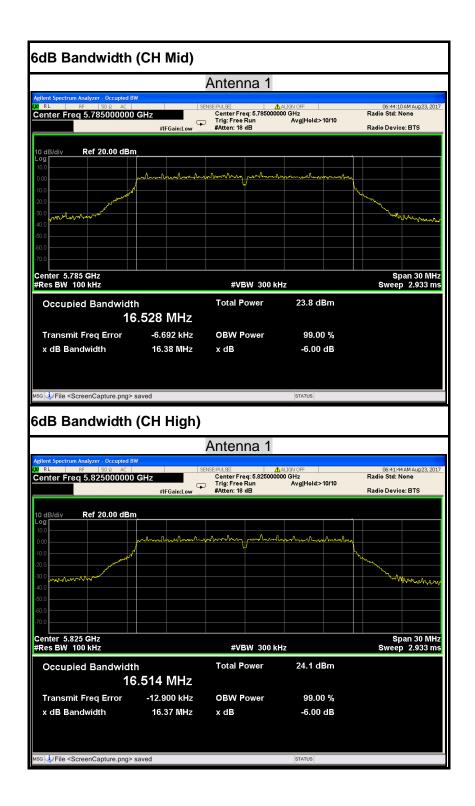


FCC ID: VW7SR616A Page 37 / 184 This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

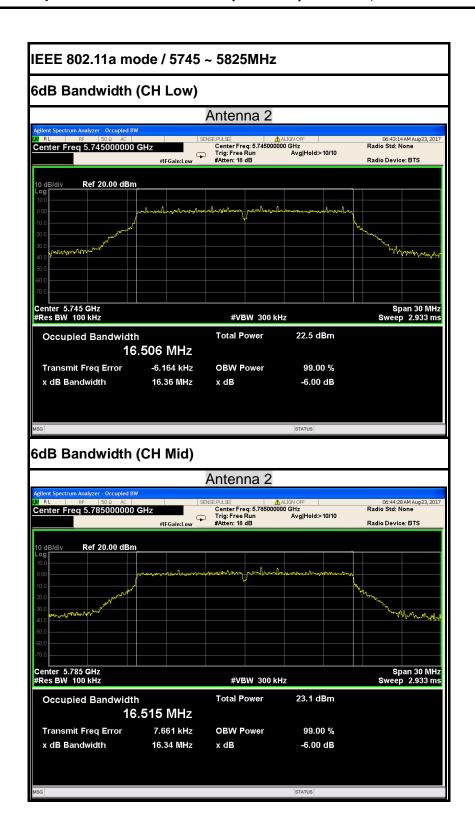

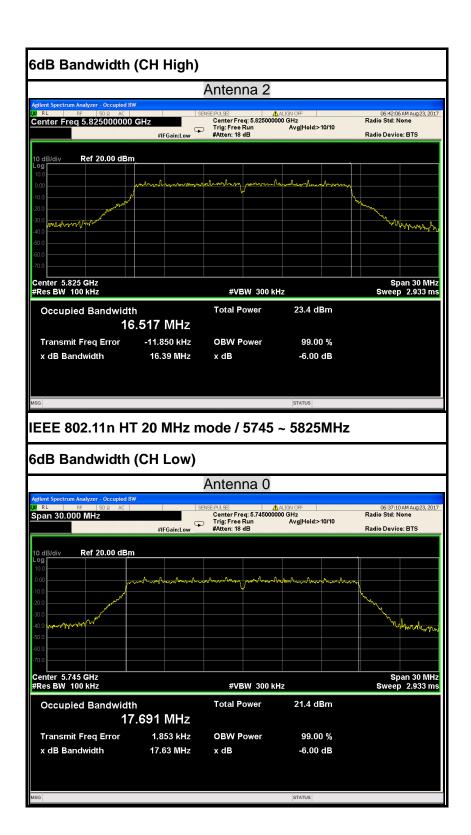


FCC ID: VW7SR616A Page 39 / 184


This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

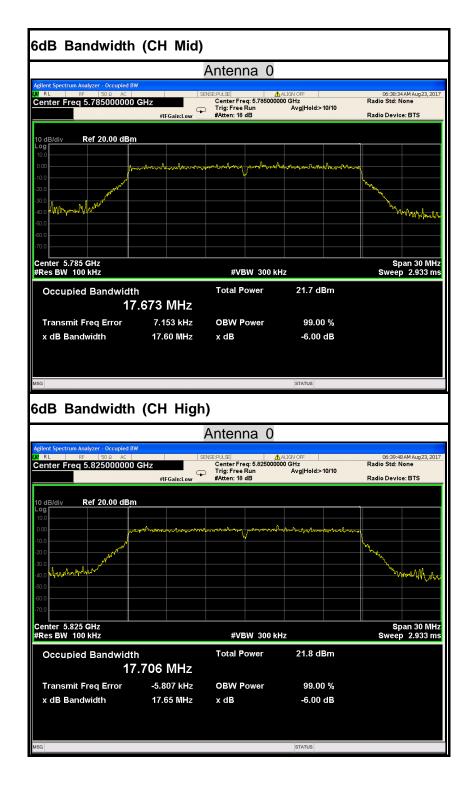


FCC ID: VW7SR616A Page 40 / 184
This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

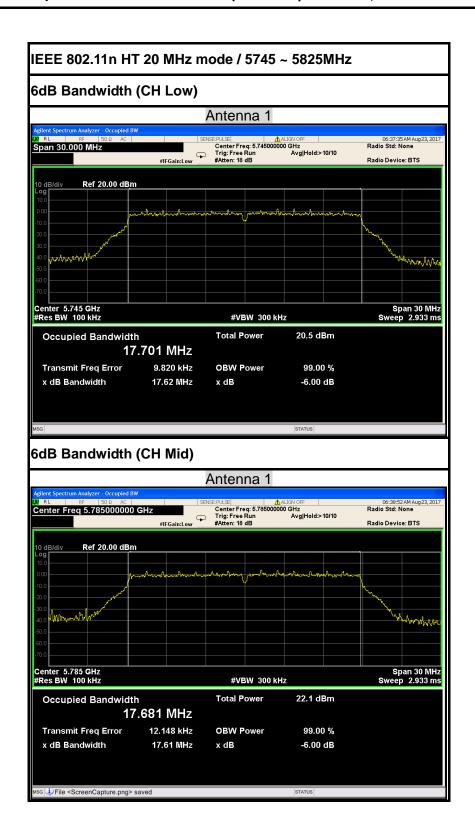

FCC ID: VW7SR616A Page 41 / 184
This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

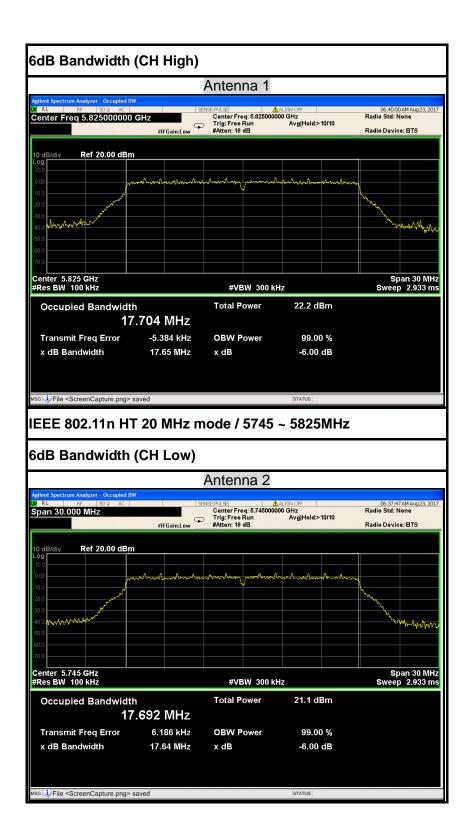



FCC ID: VW7SR616A Page 42 / 184
This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

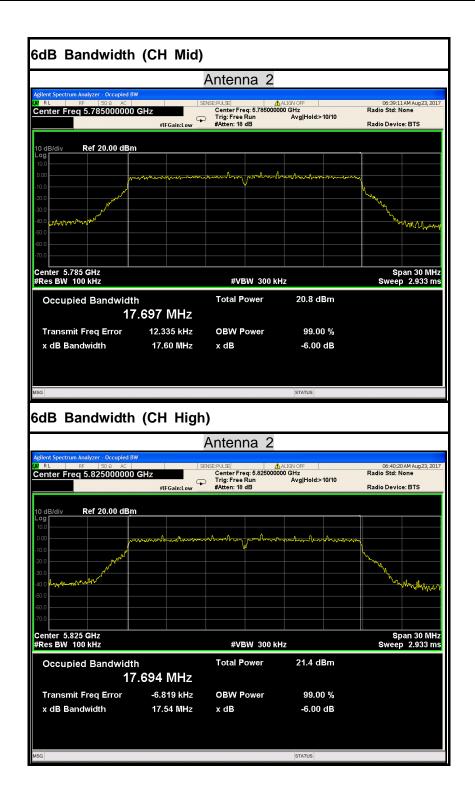

FCC ID: VW7SR616A Page 43 / 184


This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

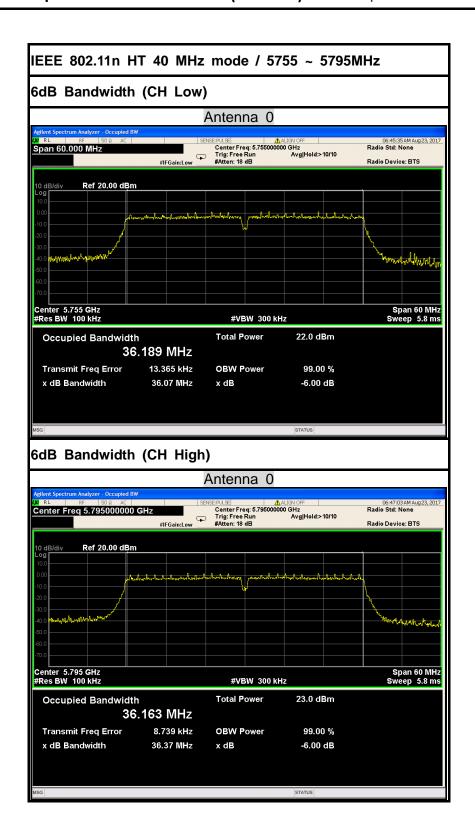

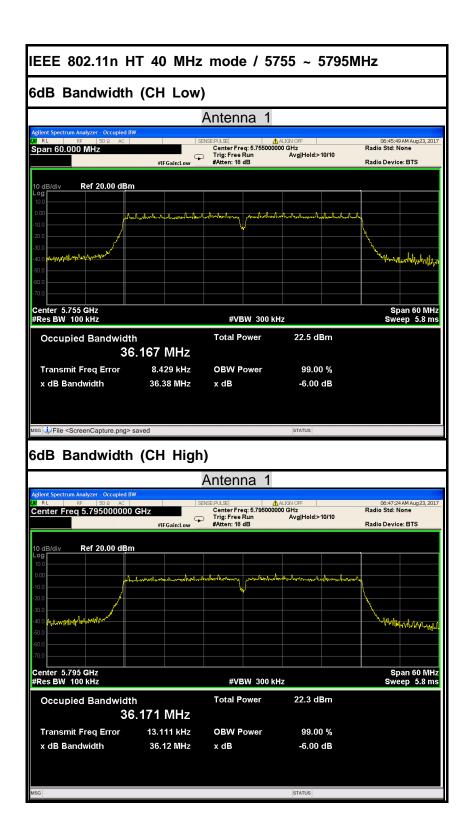


FCC ID: VW7SR616A Page 45 / 184

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

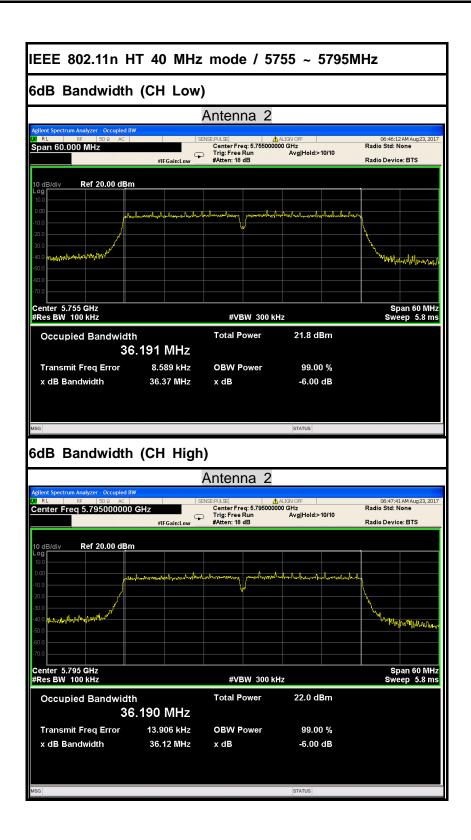


FCC ID: VW7SR616A Page 46 / 184
This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.



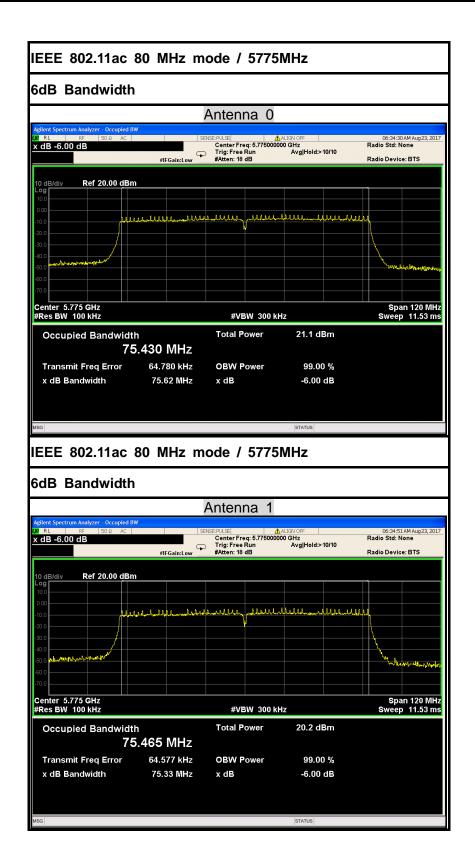

FCC ID: VW7SR616A Page 47 / 184 This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

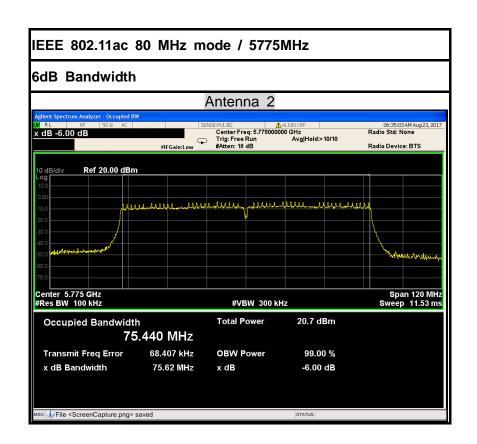

## **6.3 ANTENNA GAIN**

# **MEASUREMENT**

The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module. For UNII devices, the IEEE 802.11a mode is used.

Report No.: C170704Z01-RP1-2

# **MEASUREMENT PARAMETERS**

Measurement parameter				
Detector	Peak			
Sweep time	Auto			
Resolution bandwidth	3 MHz			
Video bandwidth	3 MHz			
Trace-Mode	Max hold			

# **LIMITS**

FCC	IC			
Antenna Gain				
6 dBi				

FCC ID: VW7SR616A Page 49 / 184

# **TEST RESULTS**

### Antenna 0

## IEEE 802.11a mode / 5180 ~ 5240MHz

T <sub>nom</sub>	V <sub>nom</sub>	Lowest channel 5180MHz	Highest channel 5240MHz	
Conducted power [dBm] Measured with OFDM modulation		2.73	3.16	
Radiated power [dBm] Measured with OFDM modulation		5.26	5.81	
Gain [dBi] Calculated		2.53	2.65	
Measurement und	certainty	± 1.5 dB (cond.) / ± 3 dB (rad.)		

Report No.: C170704Z01-RP1-2

### IEEE 802.11a mode / 5745 ~ 5825MHz

T <sub>nom</sub> V <sub>nom</sub>		Lowest channel 5745MHz	Highest channel 5825MHz
Conducted power [dBm] Measured with OFDM modulation		5.28	5.18
Radiated power [dBm] Measured with OFDM modulation		7.23	7.31
Gain [dBi] Calculated		1.95	2.13
Measurement und	certainty	± 1.5 dB (cond.	) / ± 3 dB (rad.)

## Antenna 1

## IEEE 802.11a mode / 5180 ~ 5240MHz

T <sub>nom</sub>	V <sub>nom</sub>	Lowest channel 5180MHz	Highest channel 5240MHz
Conducted power [dBm] Measured with OFDM modulation		2.90	3.04
Radiated power [dBm] Measured with OFDM modulation			
Gain [dBi] Calculated		2.25	2.22
Measurement und	ertainty	± 1.5 dB (cond.	) / ± 3 dB (rad.)

# IEEE 802.11a mode / 5745 ~ 5825MHz

T <sub>nom</sub>	V <sub>nom</sub>	Lowest channel 5745MHz	Highest channel 5825MHz	
Conducted power [dBm] Measured with OFDM modulation		5.34	5.16	
Radiated power [o with OFDM modu		7.15	7.26	
Gain [dBi] Calculated		1.81	2.10	
Measurement und	ertainty	± 1.5 dB (cond.) / ± 3 dB (rad.)		

FCC ID: VW7SR616A Page 50 / 184

# Antenna 2

## IEEE 802.11a mode / 5180 ~ 5240MHz

T <sub>nom</sub> V <sub>nom</sub>		T <sub>nom</sub> V <sub>nom</sub> Lowest channel 5180MHz		
Conducted power [dBm] Measured with OFDM modulation		2.32	2.42	
Radiated power [dBm] Measured with OFDM modulation		4.82	5.18	
Gain [dBi] Calculated		2.50	2.76	
Measurement und	ertainty	± 1.5 dB (cond.	) / ± 3 dB (rad.)	

Report No.: C170704Z01-RP1-2

# IEEE 802.11a mode / 5745 ~ 5825MHz

T <sub>nom</sub>	V <sub>nom</sub>	Lowest channel 5745MHz	Highest channel 5825MHz
Conducted power [dBm] Measured with OFDM modulation		5.54	5.34
Radiated power [dBm] Measured with OFDM modulation		7.26	7.26
Gain [dBi] Calculated		1.72	1.92
Measurement und	ertainty	± 1.5 dB (cond.	) / ± 3 dB (rad.)

FCC ID: VW7SR616A Page 51 / 184
This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

### **6.4 OUTPUT POWER**

#### 6.4.1 LIMIT

### According to §15.407(a)& FCC R&O FCC 14 - 30,

- (1) For the band 5.15-5.25 GHz.
- (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

Report No.: C170704Z01-RP1-2

- (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.
- (iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- (2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

FCC ID: VW7SR616A Page 52 / 184

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Report No.: C170704Z01-RP1-2

Note to paragraph (a)(3): The Commission strongly recommends that parties employing U-NII devices to provide critical communications services should determine if there are any nearby Government radar systems that could affect their operation.

#### **Specified Limit of the Output Power**

Since the EUT only has band I, band IV/


### **6.4.2 MEASUREMENT EQUIPMENT USED**

Name of Equipment	Manufacturer	Model	Serial Number	Last Calibration	Calibration Due
Power Meter	Anritsu	ML2495A	1204003	02/21/2017	02/20/2018
Power Sensor	Anritsu	MA2411B	1126150	02/21/2017	02/20/2018

Report No.: C170704Z01-RP1-2

Remark: Each piece of equipment is scheduled for calibration once a year.

### **6.4.3 TEST CONFIGURATIONS**



### **6.4.4 TEST PROCEDURE**

The EUT was connected to a Power Meter through a  $50\Omega$  RF cable.

#### 6.4.5 TEST RESULTS

No non-compliance noted

FCC ID: VW7SR616A Page 54 / 184

### 6.4.6 TEST DATA

#### IEEE 802.11a mode / 5180 ~ 5240MHz

Channel	Frequency (MHz)	AVG Output Power (dBm)		quency (dBm) (W)				Limit (dBm)	Result
(1411 12)		Antenna 0	Antenna 1	Antenna 2	Antenna 0	Antenna 1	Antenna 2	(aBiii)	
Low	5180	15.94	16.13	15.55	0.03926	0.04102	0.03589		PASS
Mid	5200	16.12	16.09	15.56	0.04093	0.04064	0.03597	30.00	PASS
High	5240	16.39	16.30	15.68	0.04355	0.04266	0.03698		PASS

Report No.: C170704Z01-RP1-2

IEEE 802.11a mode / 5745 ~ 5825MHz

Channel	Frequency (MHz)	AVG Output Power (dBm)			•			Limit (dBm)	Result
	(111112)	Antenna 0	Antenna 1	Antenna 2	Antenna 0	Antenna 1	Antenna 2	(uBiii)	
Low	5745	18.55	18.61	18.74	0.07161	0.07261	0.07482		PASS
Mid	5785	18.42	18.39	18.74	0.06950	0.06902	0.07482	30.00	PASS
High	5825	18.38	18.42	18.65	0.06887	0.06950	0.07328		PASS

#### IEEE 802.11n HT 20 MHz mode / 5180 ~ 5240MHz

Channel	nnel Frequency (dBm) AVG Output Power (dBm)		AVG Output Power (W)	Limit (dBm)	Result			
	(111112)	Antenna 0	Antenna 1	Antenna 2	Total			
Low	5180	7.41	7.88	8.00	12.54	0.01796		PASS
Mid	5200	7.40	7.58	8.04	12.45	0.01759	28.23	PASS
High	5240	7.34	7.61	7.96	12.42	0.01744		PASS

### IEEE 802.11n HT 20 MHz mode / 5745 ~ 5825MHz

Channel	Frequency (MHz)	AVG Output Power (dBm)				AVG Output Power (W)	Limit (dBm)	Result
	(	Antenna 0	Antenna 1	Antenna 2	Total	1 ower (W)	(45111)	
Low	5745	16.58	16.55	16.35	21.27	0.13384		PASS
Mid	5785	16.60	16.48	16.14	21.18	0.13129	28.23	PASS
High	5825	16.33	16.33	16.25	21.07	0.12808		PASS

FCC ID: VW7SR616A Page 55 / 184
This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

#### IEEE 802.11n HT 40 MHz mode / 5190 ~ 5230MHz

Channel	Frequency (MHz)	AVG Output Power (dBm)				AVG Output Power (W)	Limit (dBm)	Result
		Antenna 0	Antenna 1	Antenna 2	Total	i olioi (ii)	(uBiii)	
Low	5190	10.52	10.23	10.68	15.25	0.03351	28.23	PASS
High	5230	10.46	10.04	10.86	15.24	0.03340	20.23	PASS

# IEEE 802.11n HT 40 MHz mode / 5755 ~ 5795MHz

Channel	Frequency (MHz)	AVG Output Power (dBm)				AVG Output Power (W)	Limit (dBm)	Result
		Antenna 0	Antenna 1	Antenna 2	Total	i olioi (ii)	(uBiii)	
Low	5775	16.74	16.64	14.18	20.77	0.11952	28.23	PASS
High	5795	16.77	16.75	14.12	20.82	0.12067	20.23	PASS

### IEEE 802.11ac 80 mode / 5210MHz

Channel	Frequency (MHz)	AVG Output Power (dBm)				AVG Output Power (W)	Limit (dBm)	Result
		Antenna 0	Antenna 1	Antenna 2	Total	1 01101 (11)	(~2111)	
	5210	13.10	13.23	13.05	17.90	0.06164	28.23	PASS

#### IEEE 802.11ac 80 mode / 5775MHz

Channel	Frequency (MHz)	AVG Output Power (dBm)				AVG Output Power (W)	Limit (dBm)	Result
		Antenna 0	Antenna 1	Antenna 2	Total	1 0 11 0 1 (11)	(aBiii)	
	5775	16.36	16.72	14.15	20.65	0.11624	28.23	PASS

FCC ID: VW7SR616A Page 56 / 184

### 6.5 BAND EDGES MEASUREMENT

#### 6.5.1 LIMIT

According to §15.407(b)

- (1) The provisions of Section 15.205 of this part apply to intentional radiators operating under this section.
- (2) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency block edges as the design of the equipment permits.

Report No.: C170704Z01-RP1-2

#### **6.5.2 MEASUREMENT EQUIPMENT USED**


Radiated Emission Test Site 966 (2)										
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration					
PSA Series Spectrum Analyzer	Agilent	N9010A	MY52221469	02/21/2017	02/20/2018					
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	02/21/2017	02/20/2018					
Amplifier	EMEC	EM330	060661	03/18/2017	03/17/2018					
High Noise Amplifier	Agilent	8449B	3008A01838	02/21/2017	02/20/2018					
Loop Antenna	COM-POWER	AL-130	121044	09/25/2016	09/24/2017					
Bilog Antenna	SCHAFFNER	CBL6143	5082	02/21/2017	02/20/2018					
Horn Antenna	SCHWARZBECK	BBHA9120	D286	02/27/2017	02/27/2018					
Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170-497	02/27/2017	02/27/2018					
Turn Table	N/A	N/A	N/A	N.C.R	N.C.R					
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R					
Controller	Sunol Sciences	SC104V	022310-1	N.C.R	N.C.R					
Controller	СТ	N/A	N/A	N.C.R	N.C.R					
Temp. / Humidity Meter	Anymetre	JR913	N/A	02/21/2017	02/20/2018					
Test S/W	FARAD	LZ-RF / CCS-SZ-3A2								

**NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

- 2. The FCC Site Registration number is 101879.
- 3. N.C.R = No Calibration Required.

FCC ID: VW7SR616A Page 57 / 184

#### **6.5.3 TEST CONFIGURATION**

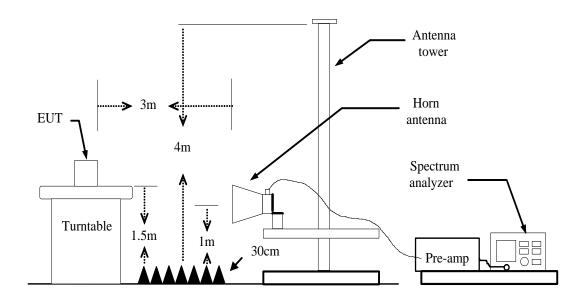

Report No.: C170704Z01-RP1-2

#### **6.5.4 TEST PROCEDURE**

- 1. The EUT is placed on a turntable, which is 1.5m above the ground plane.
- 2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
- 3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
- 4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
  - (a) PEAK: RBW=1 / VBW=3MHz / Sweep=AUTO
  - (b) AVERAGE: RBW=1MHz / VBW=1/T / Sweep=AUTO / Detector=Peak
- 5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.


FCC ID: VW7SR616A Page 58 / 184

This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

# 6.5.5 TEST RESULT


# **Test Plot**

IEEE 802.11a mode / 5180MHz (Antenna 0)

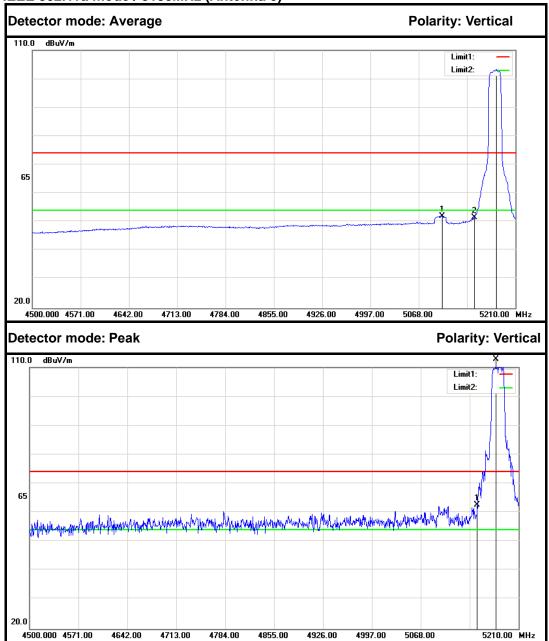

No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1	5102.080	46.94	5.16	52.10	54.00	-1.90	Average	Vertical
2	5150.000	46.40	5.25	51.65	54.00	-2.35	Average	Vertical
3	5182.310	97.97	5.30	103.27			Average	Vertical
1	5150.000	57.31	5.25	62.56	74.00	-11.44	Peak	Vertical
2	5177.340	107.69	5.30	112.99			Peak	Vertical

FCC ID: VW7SR616A Page 59 / 184 This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.

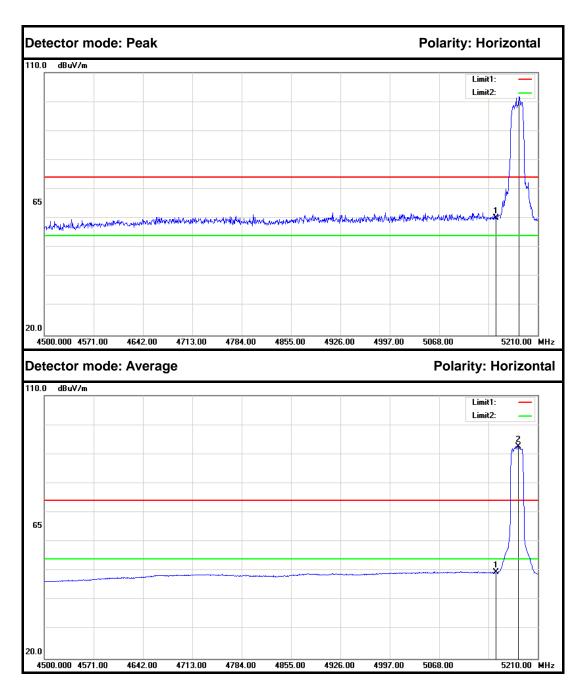

No.	Frequency (MHz)	Reading (dB)	Factor (dB/m)	Result (dB/m)	Limit (dB/m)	Margin (dB)	Remark	Antenna Polar
1	5150.000	54.87	5.25	60.12	74.00	-13.88	Peak	Horizontal
2	5183.020	96.40	5.31	101.71			Peak	Horizontal
1	5150.000	44.24	5.25	49.49	54.00	-4.51	Average	Horizontal
2	5181.600	87.33	5.30	92.63			Average	Horizontal

FCC ID: VW7SR616A Page 60 / 184
This report shall not be reproduced except in full, without the written approval of Compliance Certification Services.