



FCC PART 15:2006

Test Report

For

Wireless Speaker

Model Number:256-002

Brand Name: Hammacher Schlemmer

Report No.: SZAGC045071201E5

Date of Issue: Jan.25, 2008

Prepared For

Standard Merit USA LLC

**Rm E.Floor 18, JinRun Mansion 6019 Shenzhen Rd,
Shenzhen City, P.R.China**

Tel: 86-755-82720100

Fax: 86-755-82800558

Prepared By

Shenzhen Attestation of Global Compliance Science & Technology Co., Ltd.
Suite B11/B12, Huafeng Mall, Chuangye 2nd Road,
25 District, Bao'an, Shenzhen

Tel: 86-755-2974 2355

Fax: 86-755-2600 8484

TABLE OF CONTENTS

1. VERIFICATION OF COMPLIANCE	2
2. PRODUCT INFORMATION	3
3. TEST FACILITY	4
4. TEST EQUIPMENT LIST	5
5. SUPPORT EQUIPMENT LIST	6
6. SYSTEM DESCRIPTION	7
7. FCC LINE CONDUCTED EMISSION TEST	8
7.1 LIMITS OF LINE CONDUCTED EMISSION TEST	8
7.2 BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	8
7.3 PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	9
7.4 FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	9
7.5 TEST RESULT OF LINE CONDUCTED EMISSION TEST	10
8. FCC RADIATED EMISSION TEST	11
8.1 LIMITS OF RADIATED EMISSION TEST	11
8.2 BLOCK DIAGRAM OF RADIATED EMISSION TEST	11
8.3 PRELIMINARY PROCEDURE OF RADIATED EMISSION TEST	11
8.3 PRELIMINARY PROCEDURE OF RADIATED EMISSION TEST	12
8.4 FINAL PROCEDURE OF RADIATED EMISSION TEST	12
8.5 TEST RESULT OF RADIATED EMISSION TEST	13
APPENDIX 1	14
PHOTOGRAPHS OF TEST SETUP	14
APPENDIX 2	15
PHOTOGRAPHS OF EUT	15

1. VERIFICATION OF COMPLIANCE

Equipment Under Test:	Wireless Speaker
Brand Name:	Hammacher Schlemmer
Model Number:	256-002
Serial Number:	N/A
Applicant:	Standard Merit USA LLC Rm E.Floor 18, JinRun Mansion 6019 Shenzhen Rd, Shenzhen City, P.R.China
Manufacturer:	Standard Merit USA LLC Rm E.Floor 18, JinRun Mansion 6019 Shenzhen Rd, Shenzhen City, P.R.China
Type of Test:	FCC Class B (Declaration)
Measurement Procedure:	ANSI C63.4: 2003
File Number:	SZAGC045071201E5
Date of test:	Jan.2~ Jan.24, 2008
Deviation:	None
Condition of Test Sample:	Normal

The above equipment was tested by Shenzhen Attestation Of Global Compliance Science & Technology Co., Ltd. For compliance with the requirements set forth in the FCC Rules and Regulations Part 15, Subpart B and the measurement procedure according to ANSI C63.4:2003. This said equipment in the configuration described in this report shows the maximum emission levels emanating from equipment are within the compliance requirements.

The test results of this report relate only to the tested sample identified in this report.

Prepared By

Tony Tian

Tony Tian Jan 25 2008

Checked By

Randy He

Randy He Jan.25, 2008

Authorized By

King Zhang

King Zhang Jan.25, 2008

2. PRODUCT INFORMATION

Housing Type: Plastic

EUT Rating Voltage: DC 12V By Adapter

I/O Ports of EUT

I/O Port Type	Q'TY	Tested with
DC INPUT PORT	1	1

3. TEST FACILITY

Location: 1-2F, Dachong Science & Technology Building, No.28 of Tonggu Road, Nanshan District, Shenzhen, P. R. China

Description: There is one 3m semi-anechoic chamber for final test, the Line Conducted labs are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2003 and CISPR 22/EN 55022 requirements.

Site Filing: FCC test site Registration Number: 276008

Instrument Tolerance: All measuring equipment is in accord with ANSI C63.4:2003 and CISPR 22 requirements that meet industry regulatory agency and accreditation agency requirement.

Ground Plane: Two conductive reference ground planes were used during the Line Conducted Emission, one in vertical and the other in horizontal. The dimensions of these ground planes are as below. The vertical ground plane was placed distancing 40 cm to the rear of the wooden test table on where the EUT and the support equipment were placed during test. The horizontal ground plane projected 50 cm beyond the footprint of the EUT system and distanced 80 cm to the wooden test table. For radiated emission test, one horizontal conductive ground plane extended at least 1m beyond the periphery of the EUT and the largest measuring antenna, and covered the entire area between the EUT and the antenna. It has no holes or gaps having longitudinal dimensions larger than one-tenth of a wavelength at the highest frequency of measurement up to 1GHz.

4. TEST EQUIPMENT LIST

Instrumentation: The following list contains equipment used at Compliance Certification Services (Shenzhen) Inc. for testing. The equipment conforms to the CISPR 16-1 / ANSI C63.2 Specifications for Electromagnetic Interference and Field Strength Instrumentation from 10 kHz to 1.0GHz or above.

Equipment used during the tests:

3m semi-anechoic chamber					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL. DUE
EMI test receiver	R&S	ESCS30	100343	07/29/2007	07/28/2008
Amplifier	H.P.	HP8447E	2945A02715	08/08/2007	08/07/2008
Antenna	Sunol Science Corp.	JB3	A021907	06/09/2007	06/08/2008

Note: The measure uncertainty is less than +/-2.5078dB, which is evaluated as per the UKAS LAB34 and CISPR/A/291/CDV.

Conducted Emission Test Site Shielding room 3#					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL. DUE
EMI Test Receiver	H.P.	8546A	3625A00349	07/29/2007	07/28/2008
LISN	AFJ	LS16	16010222119	07/27/2007	07/26/2008

Note: The measure uncertainty is less than +/-2.2318dB, which is evaluated as per the UKAS LAB34 and CISPR/A/291/CDV.

The calibrations of the measuring instruments, including any accessories that may effect such calibration, are checked frequently to assure their accuracy. Adjustments are made and correction factors applied in accordance with instructions contained in the manual for the measuring instrument.

5. SUPPORT EQUIPMENT LIST

Device Type	Manufacturer	Model Name	Serial No.	Data Cable	Power Cable
NOTEBOOK	ASUS	X80-H	--	--	--
2.4G Transmitter	Standardmerit	256	--	--	--

**Note: All the above equipment/cables were placed in worse case positions to maximize emission signals during emission test.

Grounding: Grounding was in accordance with the manufacturer's requirements and conditions for the intended use.

6. SYSTEM DESCRIPTION

EUT test procedure:

1. Connect EUT and peripheral device if need.
2. Power on the 2.4 G Transmitter, then the EUT begins to receive signal, amplify and transmit.
3. Make sure the EUT operates normally during the test.

7. FCC LINE CONDUCTED EMISSION TEST


7.1 LIMITS OF LINE CONDUCTED EMISSION TEST

Frequency	Maximum RF Line Voltage	
	Q.P.(dBuV)	Average(dBuV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

**Note: 1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

7.2 BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

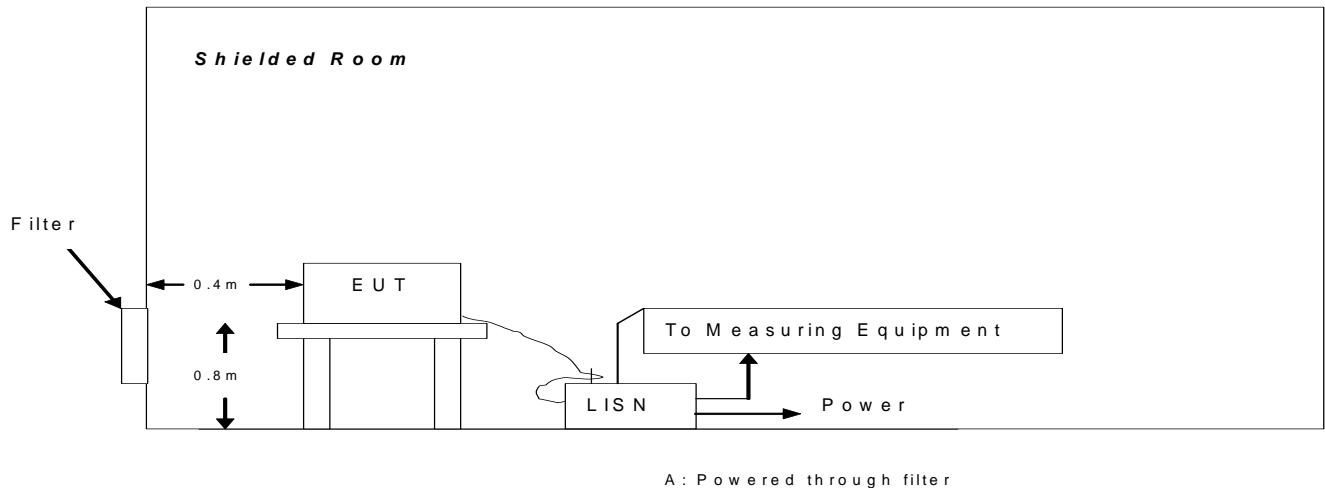

7.3 PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1) The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4:2003 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2) Support equipment, if needed, was placed as per ANSI C63.4:2003.
- 3) All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4:2003.
- 4) The EUT received power through a Line Impedance Stabilization Network (LISN) that was grounded to the protect earth.
- 5) All support equipments received AC power from a second LISN, if any.
- 6) The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7) Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8) During the above scans, the emissions were maximized by cable manipulation.
- 9) The following test mode(s) were scanned during the preliminary test:

Preliminary Line Conducted Emission Test				
Frequency Range Investigated		150 KHz TO 30 MHz		
Mode of operation	Date	Report No.	Data#	Worst Mode
NORMAL	2008.1.12	SZAGC045071201E5	256-002_(L, N)	<input checked="" type="checkbox"/>

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

7.4 FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1) EUT and support equipment was set up on the test bench as per step 9 of the preliminary test.
- 2) A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3) The test data of the worst case condition(s) was reported on the Summary Data page.

7.5 TEST RESULT OF LINE CONDUCTED EMISSION TEST

EUT: Wireless Speaker

Power: DC 12V

M/N: 256-002

Temperature: 26°C

Mode: NORMAL

Humidity: 60%

Conducted Emission Test Result													
Frequency	Reading Level (dBuV)			Factor	Emission Level (dBuV)			Limits		Margin		Result	Remarks
(MHz)	Peak	Q.P.	Avg.	dB	Peak	Q.P.	Avg.	Q.P.	Avg.	Q.P.	Avg.	(P/F)	(L/N)
0.594	29.08	--	25.19	13.78	42.86	--	38.97	56	46	-13.14	-7.03	P	L
4.253	27.76	--	23.11	15.54	43.30	--	38.65	56	46	-12.70	-7.35	P	L
7.176	30.76	--	21.09	16.09	46.85	--	37.18	60	50	-13.15	-12.82	P	L
12.803	29.87	--	19.88	17.76	47.63	--	37.64	60	50	-12.37	-12.36	P	L
19.873	31.26	--	18.76	15.43	46.69	--	34.19	60	50	-13.31	-15.81	P	L
24.762	29.98	--	17.76	18.08	48.06	--	35.84	60	50	-11.94	-14.16	P	L
0.983	28.78	--	17.67	15.76	44.54	--	33.43	56	46	-11.46	-12.57	P	N
2.654	24.87	--	19.87	15.87	40.74	--	35.74	56	46	-15.26	-10.26	P	N
10.983	28.78	--	20.98	16.87	45.65	--	37.85	60	50	-14.35	-12.15	P	N
14.675	27.65	--	19.88	14.76	42.41	--	34.64	60	50	-17.59	-15.36	P	N
19.760	26.98	--	18.76	15.26	42.24	--	34.02	60	50	-17.76	-15.98	P	N
26.673	26.89	--	17.09	15.19	42.08	--	32.28	60	50	-17.92	-17.72	P	N

Note:

- 1) Freq. = Emission frequency in MHz
- 2) Reading level = Uncorrected Analyzer/Receiver reading
- 3) Factor = Cable loss + LISN inserting loss
- 4) Emission level = Reading level + Factor
- 5) Limit = Limit stated in standard
- 6) Margin = Reading in reference to limit
- 7) “--“ = The emission level complied with the Average limits, with at least 2 dB margin, so no further recheck.


8. FCC RADIATED EMISSION TEST

8.1 LIMITS OF RADIATED EMISSION TEST

Frequency (MHz)	Distance (m)	Maximum Field Strength Limit (dB _u V/m/ Q.P.)
30~88	3	40.0
88~216	3	43.5
216~960	3	46.0
Above 960	3	54.0

**Note: The lower limit shall apply at the transition frequency.

8.2 BLOCK DIAGRAM OF RADIATED EMISSION TEST

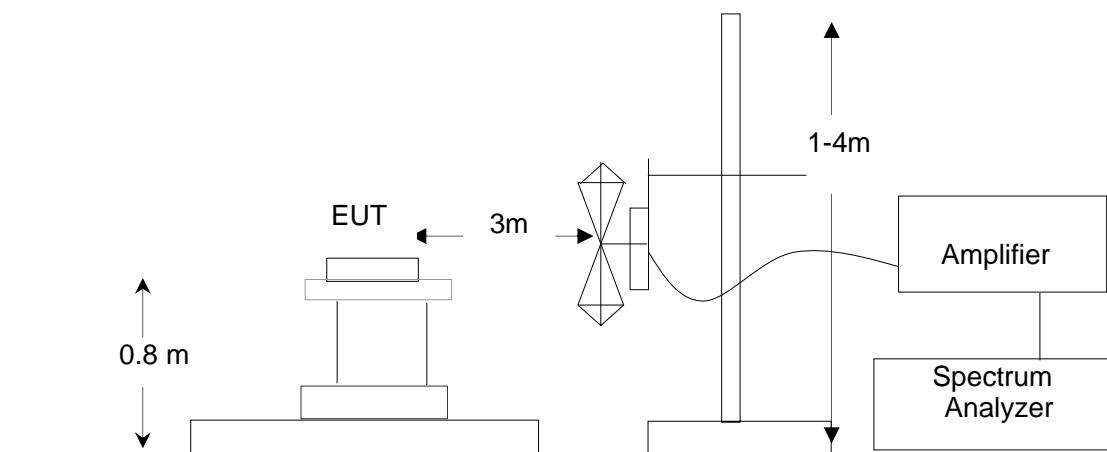

8.3 PRELIMINARY PROCEDURE OF RADIATED EMISSION TEST

- 1) The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden turntable with a height of 0.8 meters is used which is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2) Support equipment, if needed, was placed as per ANSI C63.4:2003.
- 3) All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4:2003.
- 4) The EUT received DC5V from the adapter. All support equipments received AC 120V/60Hz power from socket under the turntable, if any.
- 5) The antenna was placed at 3 meter away from the EUT as stated in FCC Part 15. The antenna connected to the Analyzer via a cable and at times a pre-amplifier would be used.
- 6) The Analyzer / Receiver quickly scanned from 30MHz to 1000MHz. The EUT test program was started. Emissions were scanned and measured rotating the EUT to 360 degrees and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.
- 7) The following test mode(s) were scanned during the preliminary test:

Preliminary Radiated Emission Test				
Frequency Range Investigated			30 MHz TO 1000 MHz	
Mode of operation	Date of test	Report No.	Data#	Worst Mode
NORMAL	2008.1.12	SZAGC045071201E5	256-002_0(H,V)	<input checked="" type="checkbox"/>

Then, the EUT and cable(s) configuration, antenna position, polarization and turntable position of the above highest emission level were recorded for final testing.

8.4 FINAL PROCEDURE OF RADIATED EMISSION TEST

EUT and support equipment were set up on the turntable as per step 7 of the preliminary test.

The Analyzer / Receiver scanned from 30MHz to 1000MHz. Emissions were scanned and measured rotating the EUT to 360 degrees, varying cable placement and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.

Recorded at least the six highest emissions. Emission frequency, amplitude, antenna position, polarization and turntable position were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit and Q.P/Peak. reading is presented.

The test data of the worst case condition(s) was reported on the Summary Data page.

8.5 TEST RESULT OF RADIATED EMISSION TEST

EUT: Wireless Speaker

Power: DC 12V

M/N: 256-002

Temperature: 26°C

Mode: NORMAL

Humidity: 60%

(The chart below shows the highest readings taken from the final data)

Radiated Emission Test Result													
Frequency (MHz)	Reading Level (dBuV)			Factor dB	Emission Level (dBuV/m)			Limits (dBuV/m)			Margin (dB)	Result (P/F)	Remarks (H/V)
	Peak	Q.P.	Avg.		Peak	Q.P.	Avg.	Peak	Q.P.	Avg.			
56.38	29.35	--	--	5.68	35.03	--	--	--	40	--	-4.97	P	H
83.96	29.88	--	--	6.47	36.35	--	--	--	40	--	-3.65	P	H
217.03	29.54	--	--	14.26	43.80	--	--	--	46	--	-2.20	P	H
320.69	23.14	--	--	15.36	38.50	--	--	--	46	--	-7.50	P	H
479.65	26.98	--	--	16.35	43.33	--	--	--	46	--	-2.67	P	H
600.93	23.14	--	--	17.42	40.56	--	--	--	46	--	-5.44	P	H
43.68	28.96	--	--	6.58	35.54	--	--	--	40	--	-4.46	P	V
80.15	20.14	--	--	7.25	27.39	--	--	--	40	--	-12.61	P	V
480.23	28.96	--	--	14.62	43.58	--	--	--	46	--	-2.42	P	V
600.52	18.36	--	--	15.29	33.65	--	--	--	46	--	-12.35	P	V
701.36	17.26	--	--	16.52	33.78	--	--	--	46	--	-12.22	P	V
841.36	19.68	--	--	18.93	38.61	--	--	--	46	--	-7.39	P	V

Note:


- 1) Freq. = Emission frequency in MHz
- 2) Reading Level = Uncorrected Analyzer / Receiver reading
- 3) Factor = Correction factors of antenna factor and cable loss
- 4) Emission Level = Reading Level + Factor
- 5) Limit = Limit stated in standard
- 6) Margin = Reading Level in reference to limit
- 7) QP = Quasi-peak

APPENDIX 1
PHOTOGRAPHS OF TEST SETUP

Test Setup of Radiated Emission



Test Setup of Conducted Emission

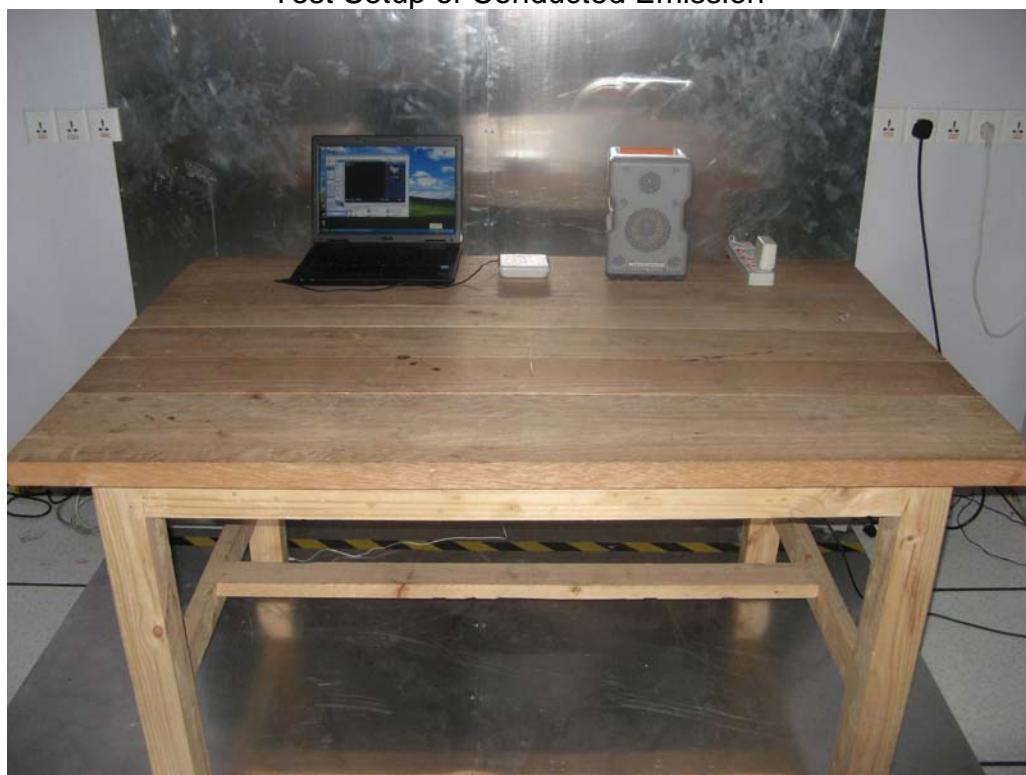

APPENDIX 2
PHOTOGRAPHS OF EUT
Front View of EUT



Back View of EUT



Left View of EUT




Right View of EUT



Top View of EUT



Bottom View of EUT

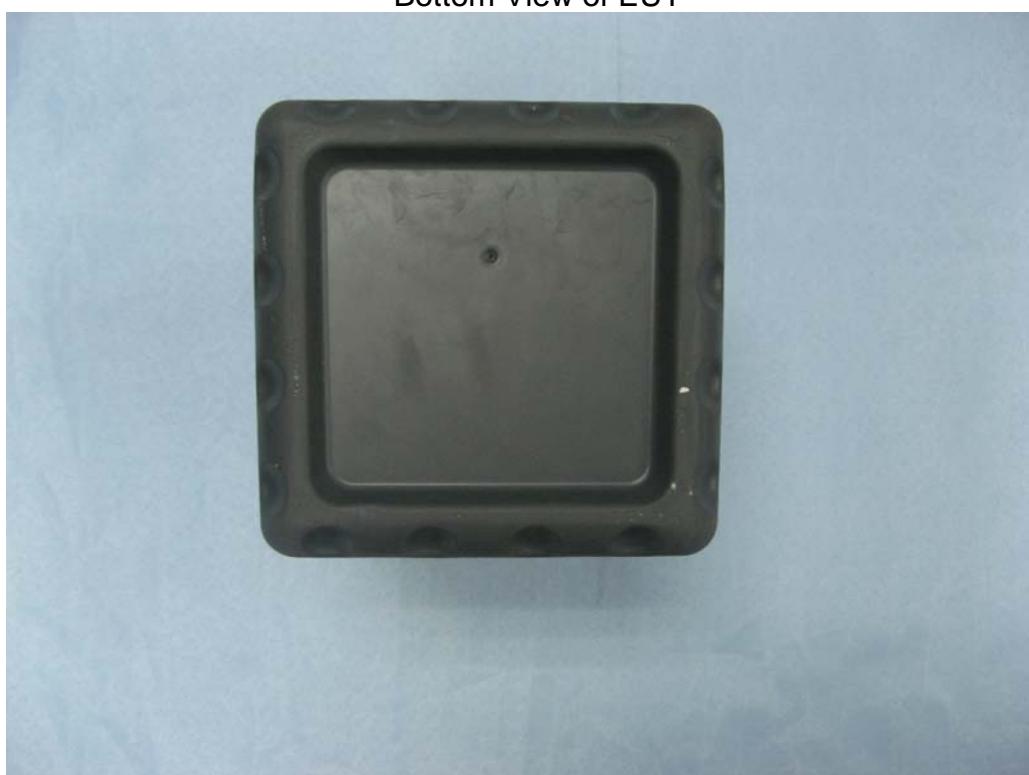

Accessory



-----END OF REPORT-----