



684 West Maude Avenue Sunnyvale, CA 94085
Tel: 650-988-0900 Fax: (650-988-6647)
www.ecmg-global.com

EMI Test Report

On Model Name: DTV Converter Box

Model Number: N9900T

FCC ID Number: VXF2007122901

Prepared for COSHIP ELECTRONICS CO., LTD

According to FCC Part 15 Class B

Test Report #: SHE-0712-0572-FCCID

Prepared by: Eddy Chen

Reviewed by: Ivan Wen

QC Manager: Paul Chen

Test Report Released by:

A handwritten signature in black ink that appears to read "Paul J. Chen".

Paul Chen

2007, Dec 29

Date

Test Location

Tests performed in a Certified ANSI Semi-Anechoic Chamber and Shielded Room.

Test Site Location: ***Shenzhen Academy of Metrology and Quality inspection***

Longzhu Road, Nanshan District, Shenzhen, Guangdong, China

Tel : 86-755-26941617

Fax : 86-755-26941615

FCC Registrantion Number : 274801

CNAS Number : L0579

Table of Contents

<i>GOVERNMENT DISCLAIMER NOTICE</i>	1
<i>REPRODUCTION CLAUSE</i>	1
<i>OPINIONS AND INTERPRETATIONS</i>	1
<i>STATEMENT OF MEASUREMENT UNCERTAINTY</i>	1
<i>ADMINISTRATIVE DATA</i>	2
<i>EUT DESCRIPTION</i>	2
<i>TEST SUMMARY</i>	3
<i>TEST MODE JUSTIFICATION</i>	4
<i>EQUIPMENT MODIFICATION</i>	4
<i>EUT SAMPLE PHOTOS - N9900T</i>	5
<i>TEST SYSTEM DETAILS</i>	10
<i>CONFIGURATION OF TESTED SYSTEM</i>	11
<i>ATTACHMENT 1 - CONDUCTED EMISSION MEASUREMENT</i>	13
<i>ATTACHMENT 2 - RADIATED EMISSION MEASUREMENT</i>	18
<i>ATTACHMENT 3 - ANTENNA-CONDUCTED POWER MEASUREMENT</i>	23
<i>ATTACHMENT 4 - OUTPUT AND SPURIOUS LEVEL MEASUREMENT</i>	28
<i>ATTACHMENT 5 - INCORPORATE CIRCUITRY TO AUTOMATICALLY PREVENT EMANATIONS</i>	35

Government Disclaimer Notice

When government drawing, specification, or other data are used for any purpose other than in connection with a definitely related government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawing, specifications, or other data, is not to be regarded by implication or otherwise in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell patented invention that may in any way be related thereto. This report must not be used to claim product endorsement by NVLAP or any agency of the U.S. Government.

Reproduction Clause

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from ECMG Worldwide Certification Solution Inc., 684 West Maude Avenue Sunnyvale, CA 94085

Opinions and Interpretations

This test report relates to the abovementioned equipment under test (EUT). Without the permission of ECMG Worldwide Certification Solution Inc. Test Lab this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark on this or similar products. The manufacturer has sole responsibility of continued compliance of the device.

Statement of Measurement Uncertainty

The data and results referenced in the document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities that can account for a nominal measurement error. Furthermore, component and process variability of devices similar to that tested may result in additional deviation.

Administrative Data

Test Sample : *DTV Converter Box*
Model Number : *N9900T*
Model Tested : *N9900T*
Date Tested : *2007, Dec 28 to 2008, Jan 08*
Applicant : *COSHIP ELECTRONICS CO., LTD*
7/F , Block A , W2 Bldg , Hi-Tech Industrial Park , Shenzhen , China
Telephone : *86-755-26990000-8699*
Fax : *86-755-26733777*
Manufacturer : *COSHIP ELECTRONICS CO., LTD*
7/F , Block A , W2 Bldg , Hi-Tech Industrial Park , Shenzhen . China

EUT Description

COSHIP ELECTRONICS CO., LTD model tested N9900T (referred to as the EUT in this report) is a DTV Converter Box.

Test Summary

The Electromagnetic Compatibility requirements on model N9900T for this test are stated below. All results listed in this report relate exclusively to this above-mentioned model as the Equipment Under Test. This report confers no approval or endorsement upon any other component, host or subsystem used in the test set-up.

Emission Tests				
Specifications	Description	Test Results	Test Point	Remark
Part 15. 107 ANSI C63.4 2003	Conducted Emission	Passed	AC Input Port	Attachment 1
Part 15.109 ANSI C63.4 2003	Radiated Emission	Passed	Enclosure	Attachment 2
Part 15.111(a) ANSI C63.4 2003	Antenna Power Conduction	Passed	RF input	Attachment 3
Part 15.115(b) ANSI C63.4 2003	Output and spurious conducted level	Passed	RF Output	Attachment 4
Part 15.115(d) ANSI C63.4 2003	Incorporate circuitry to automatically prevent emanations	Passed	RF Input	Attachment 5

Test Mode Justification

This device complies with Part 15 of the FCC rules. Operations is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

Equipment Modification

Any modifications installed previous to testing by COSHIP ELECTRONICS CO., LTD will be incorporated in each production model sold or leased in United States.

There were no modifications installed by ECMG Worldwide Certification Solution Inc. (China) test personnel.

EUT Sample Photos - N9900T



Front View



Back View



Top View




Bottom View




Remote Control



Inside View #1

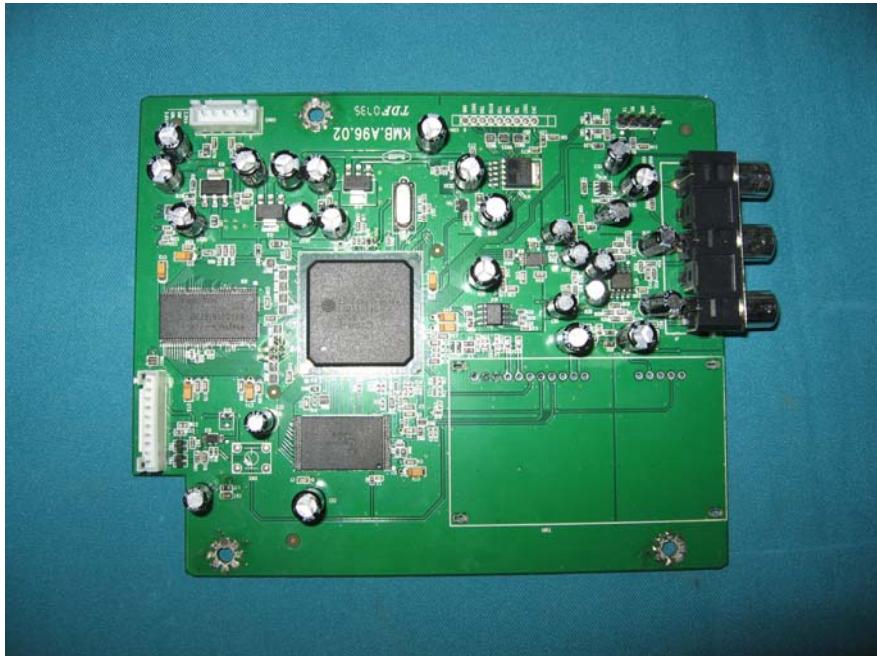

Main board View #1

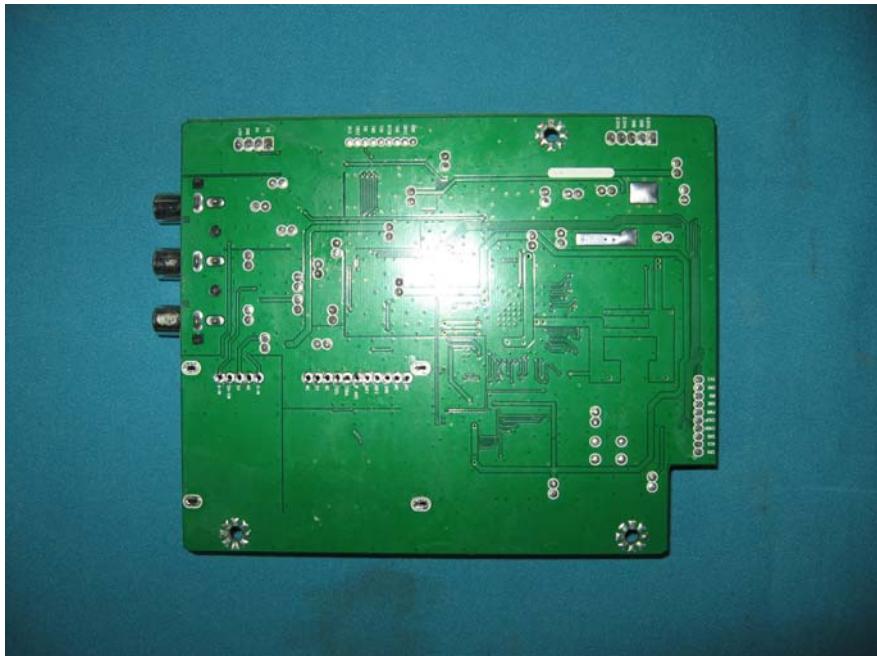


Main board View #2




Test System Details

<i>EUT</i>					
<i>Model Number:</i>	N9900T				
<i>Model Tested:</i>	N9900T				
<i>Description:</i>	DTV Converter Box				
<i>Manufacture:</i>	COSHIP ELECTRONICS CO., LTD				
<i>Support Equipment</i>					
<i>Description</i>	<i>Model Number</i>	<i>Serial Number</i>	<i>Manufacturer</i>		
Monitor	KV-HZ29M81	N/A	SONY		
<i>Cable Description</i>					
<i>Description</i>	<i>From</i>	<i>To</i>	<i>Length (Meters)</i>	<i>Shielded (Y/N)</i>	<i>Ferrite (Y/N)</i>
AC Power Cord	EUT	Plug	1.5	N	N
AV Cable	EUT	Monitor	1.1	N	N


Configuration of Tested System

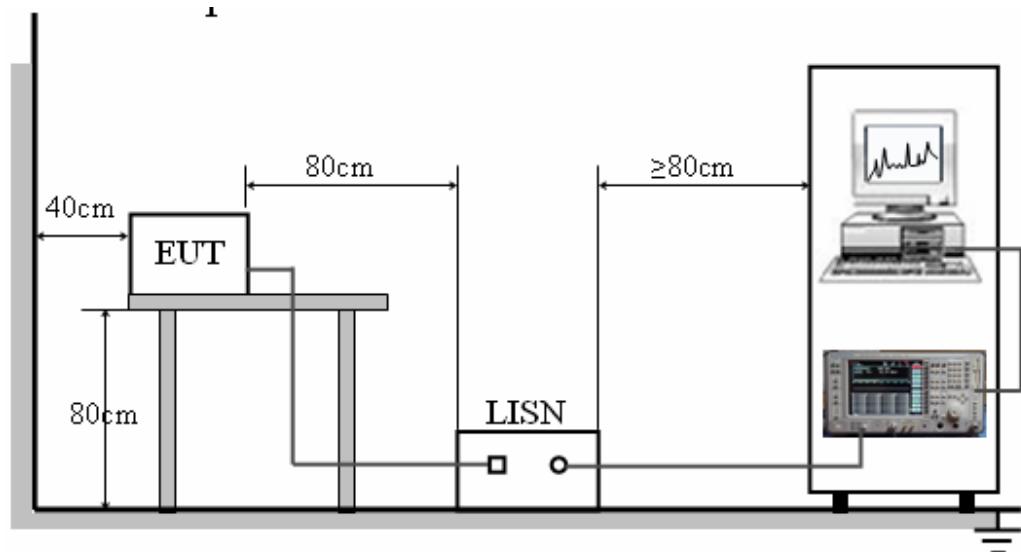

Conducted Emission Measurement

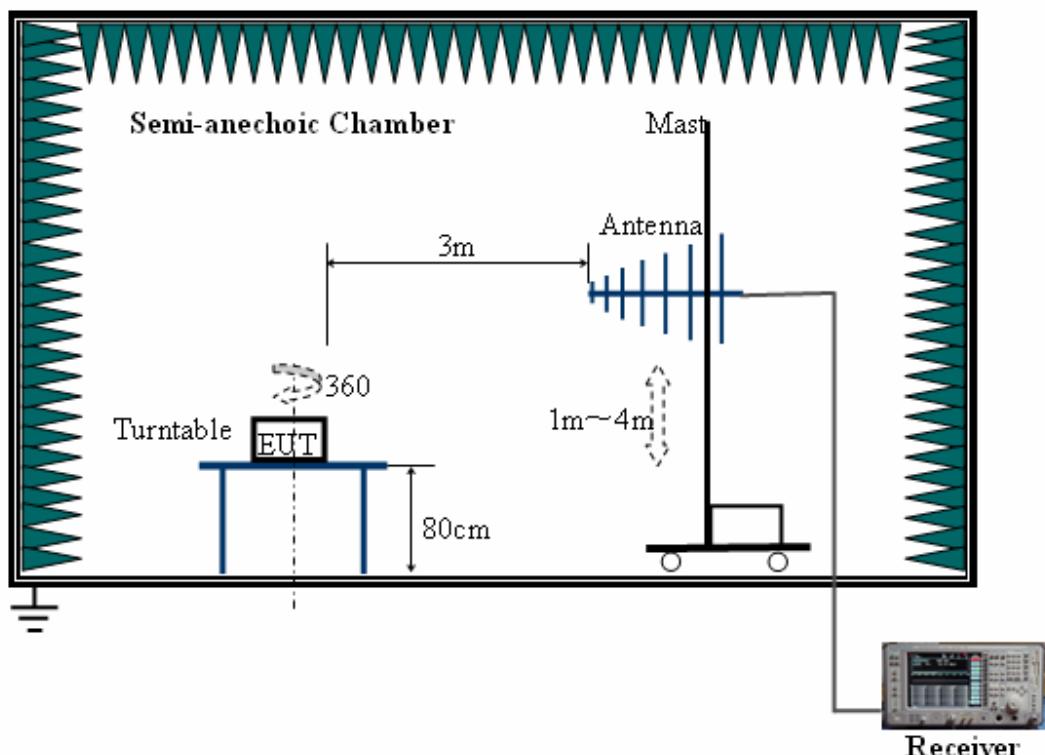

Radiated Emission Measurement

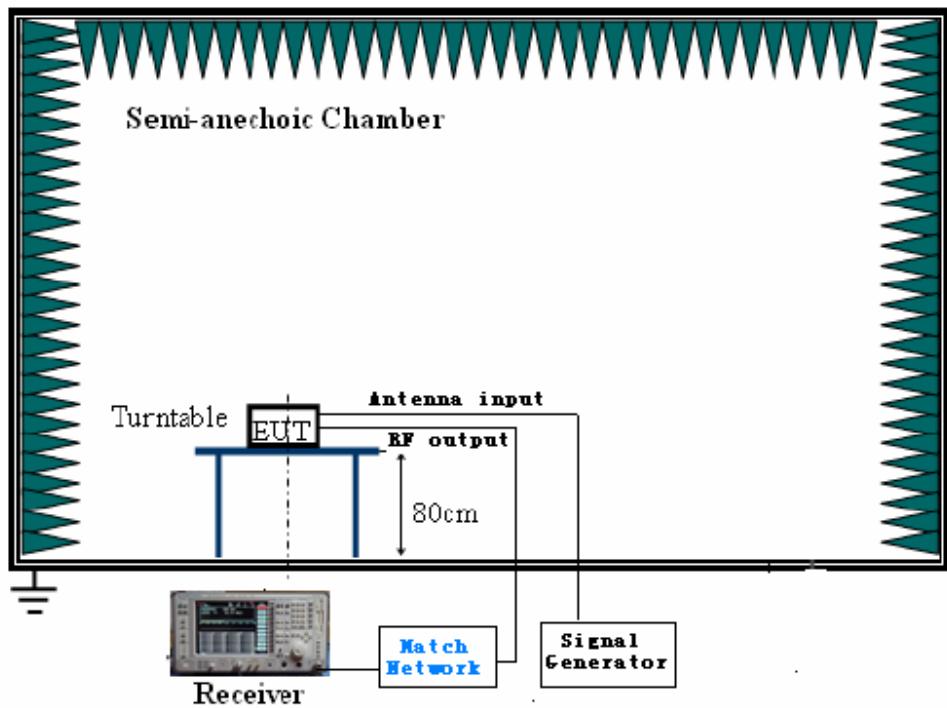

RF Output and Spurious Level Measurement


Attachment 1 – Conducted Emission Measurement

CLIENT:	COSHIP ELECTRONICS CO., LTD	TEST STANDERD:	FCC Part 15, Class B
MODEL NUMBERS:	N9900T	PRODUCT:	DTV Converter Box
EUT MODEL:	N9900T	EUT DESIGNATION:	TV Interface Device
TEMPERATURE:	23°C	HUMIDITY:	47%RH
ATM PRESSURE:	101.0kPa	GROUNDING:	Through AC Power Cord
TESTED BY:	Eddy Chen	DATE OF TEST:	2007, Dec 28
TEST REFERENCE:	ANSI C63.4: 2003, CISPR 16-1:2002		
TEST PROCEDURE:	The EUT was set up according to the guideline of ANSI C63.4: 2003 for conducted emissions. The measurement was using a AMN on each line and an EMI receiver peak scan was made at the frequency measurement range. The six highest significant peaks were then marked, and these signals were then quasi-peaked and averaged. The frequency range investigated was from 150KHz to 30MHz.		
TESTED RANGE:	150kHz to 30MHz		
TEST VOLTAGE:	120VAC / 60Hz		
RESULTS:	<p>The EUT meets the requirements of test reference for Conducted Emissions on line L by 9.7 dB of AV.</p> <p>The test results relate only to the equipment under test provided by client.</p>		
Changes or Modifications:	There were no modifications installed by ECMG Worldwide Certification Solution Inc. (China) test personnel.		
M. UNCERTAINTY:	Freq. $\pm 2 \times 10^{-7} \times$ Center Freq., Amp ± 2.6 dB		


15.107 Conducted limit:

Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the band edges.

Frequency of Emission (MHz)	Conducted Limit(dBuV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

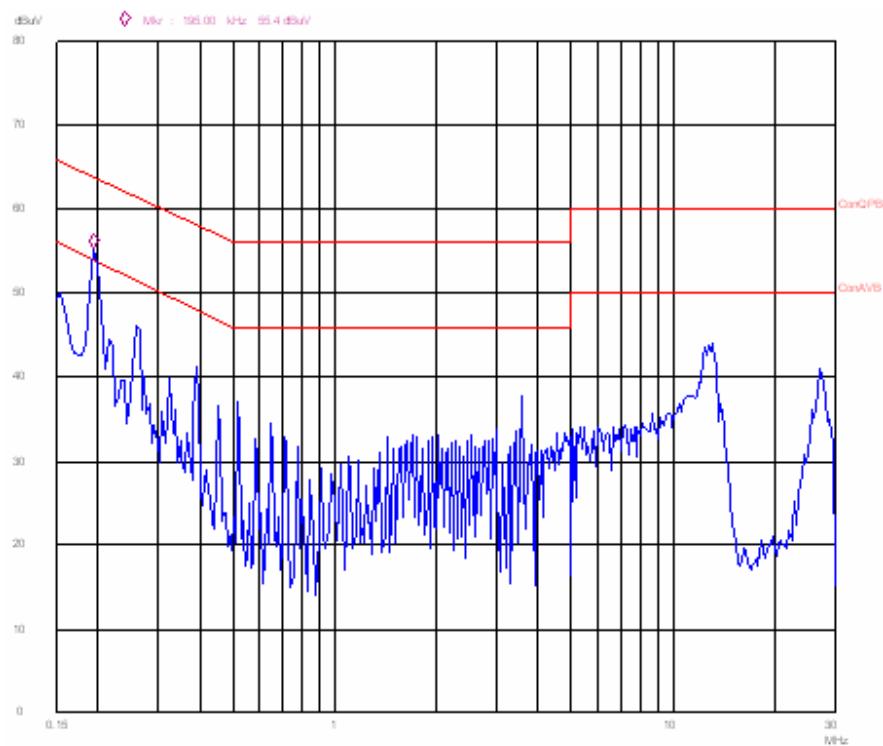

Line L Conducted Emission Graph(VGA Mode)

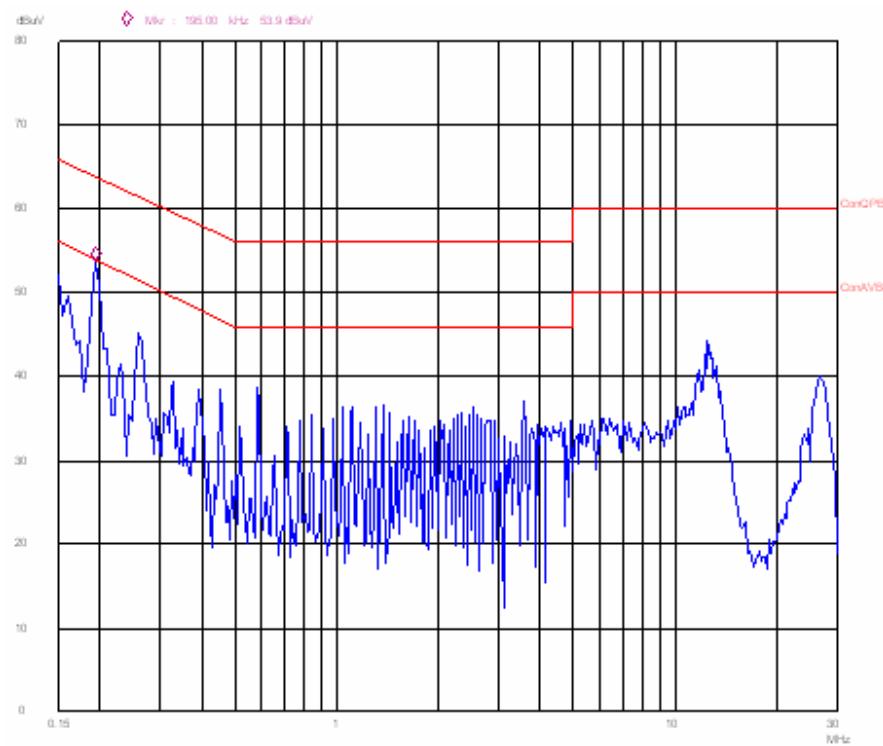

Line N Conducted Emission Graph(VGA Mode)

Test Data:

Line	Frequency (MHz)	Corrected QP Level (dBuV)	Limits QP (dBuV)	Margin QP (dB)	Corrected AV Level (dBuV)	Limits AV (dBuV)	Margin QP (dB)
L	0.195	53.8	63.8	-10.0	44.1	53.8	-9.7
L	0.260	44.5	61.4	-16.9	34.7	51.4	-16.8
L	0.590	32.8	56.0	-23.2	29.0	46.0	-17.0
N	0.195	52.6	63.8	-11.2	42.1	53.8	-11.7
N	0.260	43.7	61.4	-17.4	32.9	51.4	-18.5
N	4.370	33.5	56.0	-22.5	29.1	46.0	-16.9

Note: All readings are using a bandwidth of 9 kHz, with a 30 ms sweep time. A video filter was not used.

Test Equipment List :

Test Equipment	Model No.	Manufacturer	Serial No.	Last Cal.	Cal. Interval
EMI test receiver	ESCS30	R&S	830245/009	01/22/2007	01/21/2008
AMN	ESH2-Z5	R&S	100002	01/22/2007	01/21/2008
Signal Generator	SMY01	R&S	SB4033	01/22/2007	01/21/2008

Note: All testing were performed using internationally recognized standards. All test instruments were calibrated.

SIGNED BY: Z. Daly
ENGINEER

REVIEWED BY: J. Van Wren
SENIOR ENGINEER



Conducted Emission Test Set-up

Attachment 2 – Radiated Emission Measurement

CLIENT:	COSHIP ELECTRONICS CO., LTD	TEST STANDERD:	FCC Part 15, Class B
MODEL NUMBERS:	N9900T	PRODUCT:	DTV Converter Box
EUT MODEL:	N9900T	EUT DESIGNATION:	TV Interface Device
TEMPERATURE:	23°C	HUMIDITY:	47%RH
ATM PRESSURE:	101.0kPa	GROUNDING:	Through AC Power Cord
TESTED BY:	Eddy Chen	DATE OF TEST:	2007, Dec 28
TEST REFERENCE:	ANSI C63.4: 2003, CISPR 16-1: 2002		
TEST PROCEDURE:	<p>The EUT was set up according to the guidelines of ANSI C63.4: 2003 for radiated emissions.</p> <p>An EMI receiver peak scan was made at the frequency measurement range (pre-scan) in an Anechoic chamber. Signal discrimination was then performed and the significant peaks marked. These peaks were then quasi-peaked in the frequency range of 30 MHz to 1GHz and Average in the frequency range of 1GHz to 5GHz at an Anechoic chamber.</p> <p>The following data lists the significant emission frequencies, measured levels, correction factors (including cable and antenna correction factors), and the corrected readings against the limits. Explanation of the Correction Factor are given as follows:</p> <p>FS= RA + AF + CF - AG</p> <p>Where: FS = Field Strength</p> <p>RA = Receiver Amplitude</p> <p>AF = Antenna Factor</p> <p>CF = Cable Attenuation Factor</p> <p>AG = Amplifier Gain</p>		
TESTED RANGE:	30MHz to 5000MHz		
TEST VOLTAGE:	120VAC / 60Hz		
RESULTS:	<p>The EUT meets the requirements of test reference for Radiated Emissions on Vertical polarization by 3.7 dB at 525.010MHz.</p> <p>The test results relate only to the equipment under test provided by client.</p>		
CHANGES OR MODIFICATIONS:	There were no modifications installed by ECMG Worldwide Certification Solution Inc. (China) test personnel.		
M. UNCERTAINTY:	Freq. $\pm 2 \times 10^{-7} \times$ Center Freq., Amp ± 2.6 dB		

15.209 Limits of Radiated Emission :

The field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency of Emission (MHz)	Field Strength (μ V/m)	Field Strength ($dB\mu$ V/m)
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

Low Channel(198.31MHz):

Frequency [MHz]	Antenna Polarization [V/H]	Corrected Reading [$dB\mu$ V/m]	Margin [dB]	3 Meters Limits [$dB\mu$ V/m]
175.014	V	36.0	-7.5	43.5
261.691	V	31.4	-14.6	46.0
525.010	V	40.7	-5.3	46.0
175.014	H	39.7	-3.8	43.5
262.533	H	34.6	-11.4	46.0
350.010	H	35.4	-10.6	46.0

1. All readings are quasi-peak unless stated otherwise, using a QPA bandwidth of 120kHz, with a 30 ms sweep time. A video filter was not used.

2. Quasi-peaked in the frequency range of 30 MHz to 1GHz and Average in the frequency range of 1GHz to 5GHz

3. All other frequency are more than 20dB below the limit.

Mid Channel(560.31):

Frequency [MHz]	Antenna Polarization [V/H]	Corrected Reading [dB μ V/m]	Margin [dB]	3 Meters Limits [dB μ V/m]
175.034	V	36.3	-7.2	43.5
262.453	V	30.6	-15.4	46.0
525.010	V	41.7	-4.3	46.0
175.024	H	30.6	-12.9	43.5
262.677	H	34.0	-12.0	46.0
350.010	H	35.6	-10.4	46.0
1. All readings are quasi-peak unless stated otherwise, using a QPA bandwidth of 120kHz, with a 30 ms sweep time. A video filter was not used. 2. Quasi-peaked in the frequency range of 30 MHz to 1GHz and Average in the frequency range of 1GHz to 5GHz 3. All other frequency are more than 20dB below the limit.				

High Channel (848.31MHz):

Frequency [MHz]	Antenna Polarization [V/H]	Corrected Reading [dB μ V/m]	Margin [dB]	3 Meters Limits [dB μ V/m]
175.028	V	36.2	-7.3	43.5
262.556	V	31.5	-14.5	46.0
525.010	V	42.2	-3.7	46.0
175.054	H	31.8	-11.7	43.5
262.538	H	34.2	-11.8	46.0
350.098	H	36.8	-9.2	46.0
1. All readings are quasi-peak unless stated otherwise, using a QPA bandwidth of 120kHz, with a 30 ms sweep time. A video filter was not used. 2. Quasi-peaked in the frequency range of 30 MHz to 1GHz and Average in the frequency range of 1GHz to 5GHz 3. All other frequency are more than 20dB below the limit.				

Test Equipment List :

Test Equipment	Model No.	Manufacturer	Serial No.	Last Cal.	Cal. Due
EMI TEST RECEIVER	ESI26	R&S	838736/013	2007/01/25	2008/01/25
BILOG ANTENNA	CBL6112B	Chase	2591	2007/01/25	2008/01/25
HORN ANTENNA	HF906	R&S	SB3434	2007/01/25	2008/01/25
Signal Generator	SMY01	R&S	SB4033	01/22/2007	01/21/2008
3m SEMI-ANECHOIC CHAMBER	9X6X6	Albatross projects	---	2007/03/21	2009/03/21


Note: All testing were performed using internationally recognized standards. All test instruments were calibrated.

SIGNED BY: Z. Daly
ENGINEER

REVIEWED BY: J. van Wier
SENIOR ENGINEER



Radiated Emission Test Set-up(Below 1GHz)

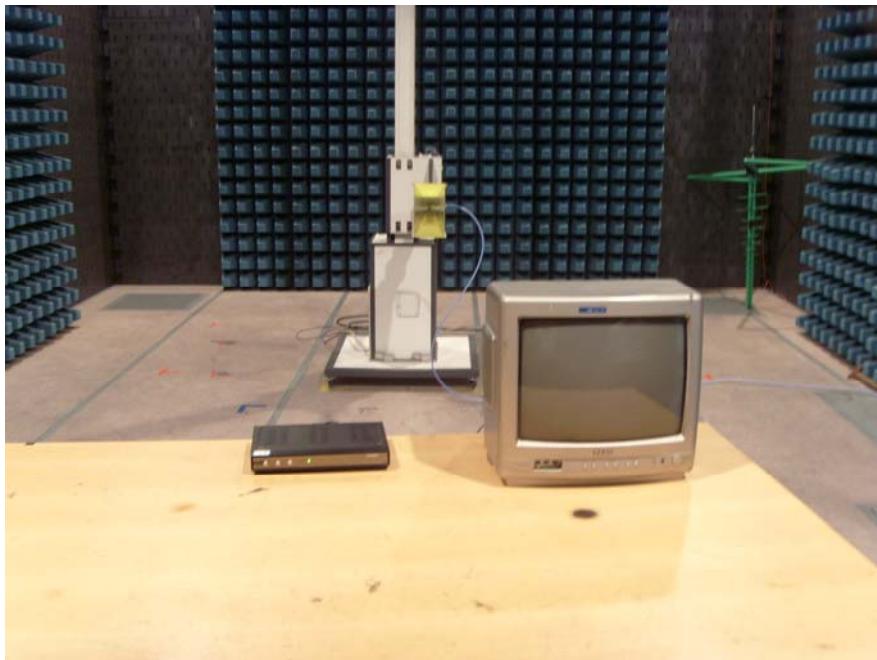

Radiated Emission Test Set-up(Above 1GHz)

Attachment 3 – Antenna-Conducted Power Measurement

CLIENT:	COSHIP ELECTRONICS CO., LTD	TEST STANDERD:	FCC Part 15, Class B
MODEL NUMBERS:	N9900T	PRODUCT:	DTV Converter Box
EUT MODEL:	N9900T	EUT DESIGNATION:	TV Interface Device
TEMPERATURE:	23°C	HUMIDITY:	47%RH
ATM PRESSURE:	101.0kPa	GROUNDING:	Through AC Power Cord
TESTED BY:	Eddy Chen	DATE OF TEST:	2007, Dec 28
TEST REFERENCE:	ANSI C63.4: 2003, CISPR 16-1: 2002		
TEST PROCEDURE:	<p>The EUT was set up according to the guidelines of ANSI C63.4: 2003 for antenna-conducted power.</p> <ol style="list-style-type: none"> The EUT antenna terminals connected to the EMI receiver , If the antenna impedance matches the impedance of the measuring instrument , Otherwise , use a balun or impedance-matching network to connect the measuring instrument to the antenna terminals of the EUT. Activate the EUT and the measuring instrument and Tune the EUT to one of the numbers of frequencies specified in 12.1.1 of ANSI C63.4 Measure both the frequency and voltage present at the antenna input terminals over the frequency range specified in the individual equipment requirement. Repeat this measurement with the EUT tuned to another frequency until the number of frequency has been successively measured, Power available from the antenna terminals is the ratio of V^2/R..Where V is the loss-corrected voltage measured at the antenna terminals, and R is the impedance of the measuring instrument. 		
TESTED RANGE:	30MHz to 1000MHz		
TEST VOLTAGE:	120VAC / 60Hz		
RESULTS:	<p>The EUT meets the requirements of test reference for antenna power conduction by 19.0 dB at 848.31MHz.</p> <p>The test results relate only to the equipment under test provided by client.</p>		
CHANGES OR MODIFICATIONS:	There were no modifications installed by ECMG Worldwide Certification Solution Inc. (China) test personnel.		
M. UNCERTAINTY:	Freq. $\pm 2 \times 10^{-7} \times$ Center Freq., Amp ± 2.6 dB		

Antenna Power Conduction Limit:

15.109 (f)

For a receiver which employs terminals for the connection of an external receiving antenna, the receiver shall be tested to demonstrate compliance with the provisions of this Section with an antenna connected to the antenna terminals unless the antenna conducted power is measured as specified in Section 15.111(a). If a permanently attached receiving antenna is used, the receiver shall be tested to demonstrate compliance with the provisions of this Section.

Section 15.111 (a)

In addition to the radiated emission limits, receivers that operate (tune) in the frequency range 30 to 960 MHz and CB receivers that provide terminals for the connection of an external receiving antenna may be tested to demonstrate compliance with the provisions of Section 15.109 with the antenna terminals shielded and terminated with a resistive termination equal to the impedance specified for the antenna, provided these receivers also comply with the following: with the receiver antenna terminal connected to a resistive termination equal to the impedance specified or employed for the antenna, the power at the antenna terminal at any frequency within the range of measurements specified in Section 15.33 shall not exceed 2.0 nanowatts.

Frequency(MHz)	QP-Limit (nW)	QP-Limit (dBuV)
30 to 1000	2	51.

Remark : The impedance used in test instrument is 50 Ω

Test Data:

<i>Source</i>		<i>limits</i> (dBuV)	<i>Emission Level</i> (dBuV)	<i>Margin</i> (dB)
<i>channel</i>	<i>Frequency(MHz)</i>			
11	<i>Fundamental</i>	198.31	51.7	32.5
	<i>Harmonics</i>	396.62	51.7	30.4
	<i>Harmonics</i>	594.93	51.7	28.6
	<i>Harmonics</i>	793.24	51.7	28.4
	<i>Harmonics</i>	991.55	51.7	28.4
15	<i>Fundamental</i>	476.31	51.7	32.6
	<i>Harmonics</i>	952.62	51.7	29.6
29	<i>Fundamental</i>	560.31	51.7	32.2
77	<i>Fundamental</i>	848.31	51.7	32.7

Test Equipment List:

Test Equipment	Model No.	Manufacturer	Serial No.	Last Cal.	Cal. Interval
EMI test receiver	ESCS30	R&S	830245/009	01/22/2007	01/21/2008
Match Network	12N50-75B	Anritsu	A0304264	01/22/2007	01/21/2008
Signal Generator	SMY01	R&S	SB4033	01/22/2007	01/21/2008
<i>Note: All testing were performed using internationally recognized standards. All test instruments were calibrated.</i>					

SIGNED BY: Z. Daly
ENGINEER

REVIEWED BY: J. Van Wren
SENIOR ENGINEER



Antenna Power Conduction Test Set Up

Attachment 4 – Output and Spurious level Measurement

CLIENT:	COSHIP ELECTRONICS CO., LTD	TEST STANDERD:	FCC Part 15, Class B
MODEL NUMBERS:	N9900T	PRODUCT:	DTV Converter Box
EUT MODEL:	N9900T	EUT DESIGNATION:	TV Interface Device
TEMPERATURE:	23°C	HUMIDITY:	47%RH
ATM PRESSURE:	101.0kPa	GROUNDING:	Through AC Power Cord
TESTED BY:	Eddy Chen	DATE OF TEST:	2007, Dec 28
TEST REFERENCE:	ANSI C63.4: 2003, CISPR 16-1: 2002		
TEST PROCEDURE:	<p>The EUT was set up according to the guidelines of ANSI C63.4: 2003 for out put and spurious level measurement .</p> <p>a) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external signal generator.</p> <p>b) A spectrum analyzer or other instrument providing a spectral display is recommended for exploratory measurements. Video filtering is not used during these tests. For measurements in the range 30 to 1000 MHz, set the bandwidth of the measuring instrument to 100 kHz and the detector function to the peak mode. The frequency range may be scanned in segments or in its entirety, adjusting the sweep speed control so that the display is calibrated.</p> <p>c) Configure the EUT as specified in 6.2 and 12.2.2. Remove the termination connected to the end of the EUT output cable, and connect the output cable to the measuring instrument, using an impedance-matching device or balun, as appropriate.</p> <p>d) Energize the EUT, and set it to one of its output channels.</p> <p>e) If the EUT</p> <ol style="list-style-type: none"> 1) Operates only from internal video signals, it shall be tested with these in normal operation. A VCR shall be tested in the record and play modes using a standard TV signal as the modulating signal. Measure the signal level at the visual and aural carrier frequencies. Also measure any emissions in the range from 30 MHz to 4.6 MHz below the visual carrier frequency, and any emissions in the range from 7.4 MHz above the visual carrier frequency to 1 GHz. 2) Also operates from externally generated video signal(s), it shall be tested with modulation as follows: <ol style="list-style-type: none"> i) With the internal signals described in step e), item I) ii) External VITS signal at 1 V peak to peak iii) External VITS signal at 5 V peak to peak Measure the signal level at the visual and aural carrier frequencies. Also measure any emissions in the range from 30 MHz to 4.6 MHz below the visual carrier frequency, and any emissions in the range from 7.4 MHz above the visual carrier frequency to 1 GHz. <p>f) Repeat step e1), step e2), or step e3), as appropriate, for any other available output channel(s) on the EUT.</p>		

TESTED RANGE:	30MHz to 1000MHz
TEST VOLTAGE:	120VAC / 60Hz
RESULTS:	<p>The EUT meets the requirements of test reference for RF output and spurious level .</p> <p>The test results relate only to the equipment under test provided by client.</p>
CHANGES OR MODIFICATIONS:	There were no modifications installed by ECMG Worldwide Certification Solution Inc. (China) test personnel.
M. UNCERTAINTY:	Freq. $\pm 2 \times 10^{-7} \times$ Center Freq., Amp ± 2.6 dB

Section 15.115(b) Output signal Limit :

(1) At any RF output terminal, the maximum measured RMS voltage, in microvolts, corresponding to the peak envelope power of the modulated signal during maximum amplitude peaks across a resistance (R in ohms) matching the rated output impedance of the TV interface device, shall not exceed the following:

(i) For a cable system terminal device or a TV interface device used with a master antenna, 692.8 times the square root of (R) for the video signal and 155 times the square root of (R) for the audio signal.

[At 75 ohms, this is 6000/1342 uV; at 300 ohms, this is 12,000/2685 uV. There is a 13 dB difference³⁸ between video and audio levels.]

(ii) For all other TV interface devices, 346.4 times the square root of (R) for the video signal and 77.5 times the square root of (R) for the audio signal.

[At 75 ohms, this is 3000/671 uV; at 300 ohms, this is 6000/1342 uV.]

(2) At any RF output terminal, the maximum measured RMS voltage, in microvolts, corresponding to the peak envelope power of the modulated signal during maximum amplitude peaks across a resistance (R in ohms) matching the rated output impedance of the TV interface device, of any emission appearing on frequencies removed by more than 4.6 MHz below or 7.4 MHz above the video carrier frequency on which the TV interface device is operated shall not exceed the following:

(i) For a cable system terminal device or a TV interface device used with a master antenna, 692.8 times the square root of (R).

(ii) For all other TV interface devices, 10.95 times the square root of (R).

[At 75 ohms, this is 95 uV; at 300 ohms, this is 190 uV; this represents a 30 dB attenuation.]

Level of the Carrier:

<i>Source</i>		<i>limits (dBuV)</i>	<i>Emission Level (dBuV)</i>	<i>Margin (dB)</i>
<i>channel</i>	<i>Carrier Frequency(MHz)</i>			
11	Video	69.54	61.31	-8.23
	Audio	56.53	49.49	-7.04
29	Video	69.54	61.12	-8.42
	Audio	56.53	49.42	-7.11
77	Video	69.54	61.28	-8.26
	Audio	56.53	49.45	-7.08

Note :The impedance of RF Output terminal is 75 ohm. (dBuV=20lgV)

Level of the spurious :

<i>Source</i>		<i>limits</i> (dBuV)	<i>Emission Level</i> (dBuV)	<i>Margin</i> (dB)	
<i>channel</i>	<i>Frequency(MHz)</i>				
11	<i>Spurious</i>	45.771	39.55	13.4	-26.15
	<i>Spurious</i>	66.292	39.55	11.4	-28.15
	<i>Spurious</i>	130.441	39.55	14.9	-24.65
	<i>Spurious</i>	245.552	39.55	12.4	-27.15
	<i>Spurious</i>	252.465	39.55	17.3	-22.25
	<i>Spurious</i>	374.068	39.55	11.3	-28.25
29	<i>Spurious</i>	245.771	39.55	12.3	-27.25
	<i>Spurious</i>	364.348	39.55	13.0	-26.55
	<i>Spurious</i>	430.441	39.55	14.8	-24.75
	<i>Spurious</i>	647.495	39.55	11.4	-28.15
	<i>Spurious</i>	752.465	39.55	18.2	-21.35
	<i>Spurious</i>	874.075	39.55	12.1	-27.45
77	<i>Spurious</i>	166.072	39.55	14.1	-25.45
	<i>Spurious</i>	245.771	39.55	13.6	-25.95
	<i>Spurious</i>	331.302	39.55	11.2	-28.35
	<i>Spurious</i>	895.856	39.55	16.8	-22.75
	<i>Spurious</i>	931.302	39.55	11.1	-28.45
	<i>Spurious</i>	974.069	39.55	12.7	-26.85
<i>Note :The impedance of RF Output terminal is 75 ohm. (dBuV=20lg<u>uV</u>)</i>					

Test equipment list:

Test Equipment	Model No.	Manufacturer	Serial No.	Last Cal.	Cal. Interval
EMI Test Receiver	ES126	R&S	SB3436	01/22/2007	01/21/2008
Match Network	12N50-75B	Anritsu	A0304264	01/22/2007	01/21/2008
Signal Generator	SMY01	R&S	SB4033	01/22/2007	01/21/2008
3m SEMI- ANECHOIC CHAMBER	9X6X6	Albatross projects	---	2007/03/21	2009/03/21
<i>Note: All testing were performed using internationally recognized standards. All test instruments were calibrated.</i>					

SIGNED BY: Z. Daly
ENGINEER

REVIEWED BY: J. Van Wren
SENIOR ENGINEER



Output and Spurious level test set up photo

Attachment 5 – Incorporate circuitry to automatically prevent emanations


CLIENT:	COSHIP ELECTRONICS CO., LTD	TEST STANDERD:	FCC Part 15, Class B
MODEL NUMBERS:	N9900T	PRODUCT:	DTV Converter Box
EUT MODEL:	N9900T	EUT DESIGNATION:	TV Interface Device
TEMPERATURE:	23°C	HUMIDITY:	47%RH
ATM PRESSURE:	101.0kPa	GROUNDING:	Through AC Power Cord
TESTED BY:	Eddy Chen	DATE OF TEST:	2008 , Jan. 08
TEST REFERENCE:	Part 15.115(d)		
TEST PROCEDURE:	<p>The EUT was set up according to 15.115(d)</p> <p>A TV interface device, including a cable system terminal device, shall incorporate circuitry to automatically prevent emanations from the device from exceeding the technical specifications in this Part.</p> <p>These circuits shall be adequate to accomplish their functions when the TV interface device is presented, if applicable, with video input signal levels in the range of one to five volts;</p>		
TESTED RANGE:	With video input signal levels in the range of one to five Volts.		
TEST VOLTAGE:	120VAC / 60Hz		
RESULTS:	<p>The EUT meets the requirements of 15.115(d),These circuits could accomplish their function when input a video input signal levels from one to five volts.</p> <p><u>The test results relate only to the equipment under test provided by client.</u></p>		
CHANGES OR MODIFICATIONS:	There were no modifications installed by ECMG Worldwide Certification Solution Inc. (China) test personnel.		
M. UNCERTAINTY:	Freq. $\pm 2 \times 10^{-7} \times$ Center Freq., Amp ± 2.6 dB		

Test equipment list:

Test Equipment	Model No.	Manufacturer	Serial No.	Last Cal.	Cal. Interval
Match Network	12N50-75B	Anritsu	A0304264	01/22/2007	01/21/2008
TV Signal Generator	PM5518	Philips	A9012042	01/22/2007	01/21/2008
Signal Generator	SMY01	R&S	SB4033	01/22/2007	01/21/2008
<i>Note: All testing were performed using internationally recognized standards. All test instruments were calibrated.</i>					

SIGNED BY: Z. Daly
ENGINEER

REVIEWED BY: J. Van Wren
SENIOR ENGINEER

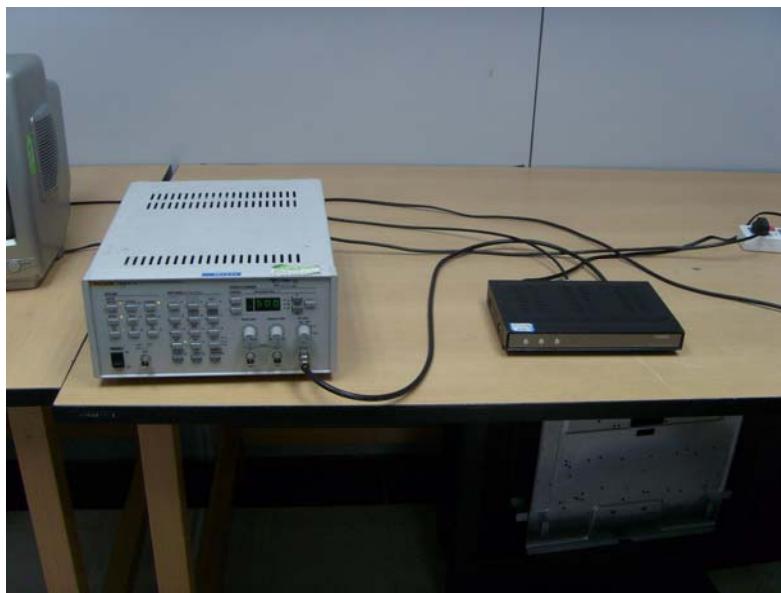

test set up photo