





Report

Dosimetric Assessment of the Portable Device GDP-04Ai from Jablocom (FCC ID: VXPGDP-04I)

According to the FCC Requirements

January 13, 2010

IMST GmbH

Carl-Friedrich-Gauß-Str. 2

D-47475 Kamp-Lintfort

Customer
7layers AG
Borsigstrasse 11
D-40880 Ratingen

The test results only relate to the items tested. This report shall not be reproduced except in full without the written approval of the testing laboratory.

Dasy_Report_FCC_Body_Card_850_1900_WCDMA II_WCDMA V_1.4.doc/20.06.2008/ABo

Executive Summary

The device GDP-04Ai is a new desktop phone from Jablocom operating in the 850 MHz, 900 MHz, 1800 MHz and 1900 MHz MHz frequency range. The device has an integrated antenna and the system concepts used are the GSM 850, GSM 900, GSM 1800 and GSM 1900 standards.

The objective of the measurements done by IMST was the dosimetric assessment of one device in body worn configuration in the GSM 850 and GSM 1900 standards. According to Fig. 4 the device was tested in four positions with the housing of the handheld in direct contact against the flat phantom. The examinations have been carried out with the dosimetric assessment system "DASY4".

The measurements were made according to the Supplement C to OET Bulletin 65 of the Federal Communications Commission (FCC) Guidelines [OET 65] for evaluating compliance of mobile and portable devices with FCC limits for human exposure (general population) to radiofrequency emissions. All measurements have been performed in accordance to the recommendations given by SPEAG.

Compliance statement

The Jablocom GDP-04Ai desktop phone (FCC ID: VXPGDP-04I) is in compliance with the Federal Communications Commission (FCC) Guidelines [OET 65] for uncontrolled exposure.

According to Fig. 4 the device was tested in four different positions in GSM 850 and GSM 1900 with the housing of the handheld in direct contact against the flat phantom.

Maximum SAR₁₀ = 0.239 W/kg (GSM 1900, Channel 661, Position 2)

prepared by:

Alexander Rahn test engineer

André van den Bosch quality assurance engineer

Table of Contents

1	SUB	JECT OF INVESTIOGATION	4
2	THE	IEEE STANDARD C95.1 AND THE FCC EXPOSURE CRITERIA	4
	2.1	DISTINCTION BETWEEN EXPOSED POPULATION, DURATION OF EXPOSURE AND FREQUENCIES	4
	2.2	DISTINCTION BETWEEN MAXIMUM PERMISSIBLE EXPOSURE AND SAR LIMITS	5
	2.3	GENERAL SAR LIMIT	<i>c</i>
3	THE	FCC MEASUREMENT PROCEDURE	6
	3.1	GENERAL REQUIREMENTS	<i>t</i>
	3.2	PHANTOM REQUIREMENTS	<i>(</i>
	3.3	TEST TO BE PERFORMED	<i>t</i>
4	THE	MEASUREMENT SYSTEM	9
	4.1	PHANTOM	10
	4.2	PROBE	11
	4.3	MEASUREMENT PROCEDURE	12
	4.4	UNCERTAINTY ASSESSMENT	13
5	SAR	RESULTS	14
6	EVA	LUATION	15
7	APP	ENDIX	16
	7.1	ADMINISTRATIVE DATA	16
	7.2	DEVICE UNDER TEST AND TEST CONDITIONS	16
	7.3	TISSUE RECIPES	17
	7.4	MATERIAL PARAMETERS	17
	7.5	SIMPLIFIED PERFORMANCE CHECKING	18
	7.6	ENVIRONMENT	22
	7.7	TEST EQUIPMENT	22
	7.8	CERTIFICATES OF CONFORMITY	24
	7.9	PICTURES OF THE DEVICE UNDER TEST	26
	7.9 7.10	PICTURES OF THE DEVICE UNDER TEST TEST POSITIONS FOR THE DEVICE UNDER TEST	
			27

1 Subject of Investiogation

The device GDP-04Ai is a new desktop phone from Jablocom operating in the 850 MHz, 900 MHz, 1800 MHz and 1900 MHz MHz frequency range. The device has an integrated antenna and the system concepts used are the GSM 850, GSM 900, GSM 1800 and GSM 1900 standards.





Fig. 1: Pictures of the device under test.

The objective of the measurements done by IMST was the dosimetric assessment of one device in body worn configuration in the GSM 850 and GSM 1900 standards. According to Fig. 4 the device was tested in four positions with the housing of the handheld in direct contact against the flat phantom. The examinations have been carried out with the dosimetric assessment system "DASY4" describes below.

2 The IEEE Standard C95.1 and the FCC Exposure Criteria

In the USA the FCC exposure criteria [OET 65] are based on the withdrawn IEEE Standard C95.1-1999 [IEEE C95.1-1999]. This version was replaced by the IEEE Standard C95.1-2005 [IEEE C95.1-2005] in October, 2005.

Both IEEE standards sets limits for human exposure to radio frequency electromagnetic fields in the frequency range 3 kHz to 300 GHz. One of the major differences in the newly revised C95.1-2005 is the change in the basic restrictions for localized exposure, from 1.6 W/kg averaged over 1 g tissue to 2.0 W/kg averaged over 10 g tissue, which is now identical to the ICNIRP guidelines [ICNIRP 1998].

2.1 Distinction Between Exposed Population, Duration of Exposure and Frequencies

The American Standard [IEEE C95.1-1999] distinguishes between controlled and uncontrolled environment. Controlled environments are locations where there is exposure that may be incurred by persons who are aware of the potential for exposure as a concomitant of employment or by other cognizant persons. Uncontrolled environments are locations where there is the exposure of individuals who have no knowledge or control of their exposure. The exposures may occur in living quarters or workplaces. For exposure in

controlled environments higher field strengths are admissible. In addition the duration of exposure is considered.

Due to the influence of frequency on important parameters, as the penetration depth of the electromagnetic fields into the human body and the absorption capability of different tissues, the limits in general vary with frequency.

2.2 Distinction between Maximum Permissible Exposure and SAR Limits

The biological relevant parameter describing the effects of electromagnetic fields in the frequency range of interest is the specific absorption rate SAR (dimension: power/mass). It is a measure of the power absorbed per unit mass. The SAR may be spatially averaged over the total mass of an exposed body or its parts. The SAR is calculated from the r.m.s. electric field strength E inside the human body, the conductivity σ and the mass density ρ of the biological tissue:

$$SAR = \sigma \frac{E^2}{\rho} = c \frac{\partial T}{\partial t} \Big|_{t \to 0+}$$
(1)

The specific absorption rate describes the initial rate of temperature rise $\partial T/\partial t$ as a function of the specific heat capacity c of the tissue. A limitation of the specific absorption rate prevents an excessive heating of the human body by electromagnetic energy.

As it is sometimes difficult to determine the SAR directly by measurement (e.g. whole body averaged SAR), the standard specifies more readily measurable maximum permissible exposures in terms of external electric E and magnetic field strength H and power density S, derived from the SAR limits. The limits for E, H and S have been fixed so that even under worst case conditions, the limits for the specific absorption rate SAR are not exceeded.

For the relevant frequency range the maximum permissible exposure may be exceeded if the exposure can be shown by appropriate techniques to produce SAR values below the corresponding limits.

2.3 General SAR Limit

In this report the comparison between the American exposure limits and the measured data is made using the spatial peak SAR; the power level of the device under test guarantees that the whole body averaged SAR is not exceeded.

Having in mind a worst case consideration, the SAR limit is valid for uncontrolled environment and mobile respectively portable transmitters. According to Table 1 the SAR values have to be averaged over a mass of 1 g (SAR_{1g}) with the shape of a cube.

Standard	Status	SAR limit [W/kg]
IEEE C95.1-1999	Replaced	1.6

Table 1: Relevant spatial peak SAR limit averaged over a mass of 1 g.

3 The FCC Measurement Procedure

The Federal Communications Commission (FCC) has published a report and order on the 1st of August 1996 [FCC 96-326], which requires routine dosimetric assessment of mobile telecommunications devices, either by laboratory measurement techniques or by computational modeling, prior to equipment authorization or use. In 2001 the Commission's Office of Engineering and Technology has released Edition 01-01 of Supplement C to OET Bulletin 65. This revised edition, which replaces Edition 97-01, provides additional guidance and information for evaluating compliance of mobile and portable devices with FCC limits for human exposure to radiofrequency emissions [OET 65].

3.1 General Requirements

The test shall be performed in a laboratory with an environment which avoids influence on SAR measurements by ambient EM sources and any reflection from the environment itself. The ambient temperature shall be in the range of 20°C to 26°C and 30-70% humidity.

3.2 Phantom Requirements

For body-worn and other configurations a flat phantom shall be used which is comprised of material with electrical properties similar to the corresponding tissues.

3.3 Test to be Performed

For purpose of determining test requirements, accessories may be divided into two categories: those that do not contain metallic components and those that do. For multiple accessories that do not contain metallic components, the device may be tested only with that accessory which provides the closest spacing to the body.

For multiple accessories that contain metallic components, the device must be tested with each accessory that contains a unique metallic component. If multiple accessories share an identical metallic component, only the accessory that provides the closest spacing to the body must be tested.

If the manufacturer provides none body-worn accessories a separation distance of 1.5 cm between the back of the device and the flat phantom is recommended. Other separation distances may be used, but they shall not exceed 2.5 cm. In these cases, the device may use body-worn accessories that provide a separation distance greater than that tested for the device provided however that the accessory contains no metallic components.

For devices with retractable antenna the SAR test shall be performed with the antenna fully extended and fully retracted. Other factors that may affect the exposure shall also be tested. For example, optional antennas or optional battery packs which may significantly change the volume, lengths, flip open/closed, etc. of the device, or any other accessories which might have the potential to considerably increase the peak spatial-average SAR value.

The SAR test shall be performed at the high, middle and low frequency channels of each operating mode. If the SAR measured at the middle channel for each test configuration is at least 3.0 dB lower than the SAR limit, testing at the high and low channels is optional.




Fig. 2: Lap-held position, bottom of the computer is touching the phantom.

If the host product provides antennas within the screen antenna, the device should be measured with the screen touching the phantom




Fig. 3: Lap-held position, back of the screen is touching the phantom.

Dasy_Report_FCC_Body_Card_850_1900_WCDMA II_WCDMA V_1.4.doc/20.06.2008/ABo

The typical measurement positions of a tablet PC are given below. For measurements of antennas which are mounted within the base of the PC, the base of the device is touching the phantom. Those antennas which are mounted within the edge of the PC were measured with the edge of the device touching the phantom.

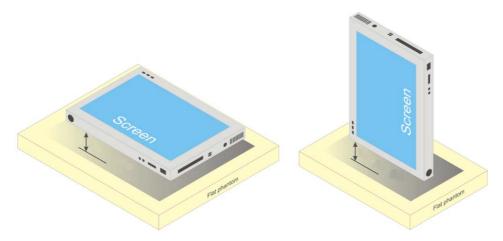


Fig. 4: Tablet PC, base and edge are touching the phantom.



Fig. . 5 Test positions for body worn devices.

For devices with multiple transmitters and antennas, the requirements of the KDB 648474 [KDB 648474] and / or KDB 616217 [KDB 616217] should be met.

4 The Measurement System

DASY is an abbreviation of "<u>D</u>osimetric <u>A</u>ssessment <u>Sy</u>stem" and describes a system that is able to determine the SAR distribution inside a phantom of a human being according to different standards. The DASY4 system consists of the following items as shown in Fig: 6. Additional Fig: 7 shows the equipment, similar to the installations in other laboratories.

- · High precision robot with controller
- Measurement server (for surveillance of the robot operation and signal filtering)
- Data acquisition electronics DAE (for signal amplification and filtering)
- Field probes calibrated for use in liquids
- Electro-optical converter EOC (conversion from the optical into a digital signal)
- Light beam (improving of the absolute probe positioning accuracy)
- Two SAM phantoms filled with tissue simulating liquid
- DASY4 software
- SEMCAD

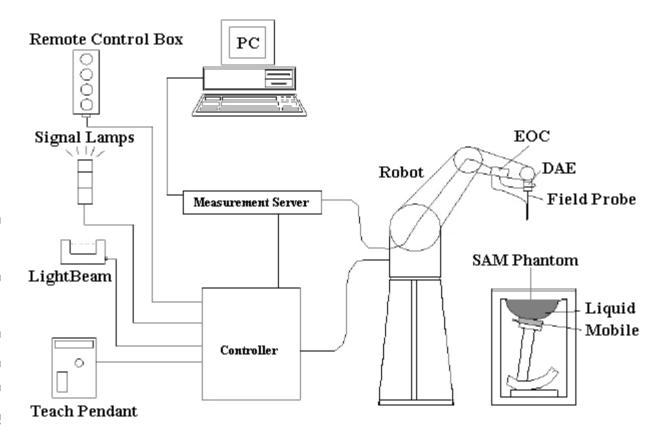


Fig. 6: The DASY4 measurement system.



Fig. 7: The measurement set-up with two SAM phantoms containing tissue simulating liquid.

The device operating at the maximum power level is placed by a non metallic device holder (delivered from Schmid & Partner) in the above described positions at a shell phantom of a human being. The distribution of the electric field strength E is measured in the tissue simulating liquid within the shell phantom. For this miniaturised field probes with high sensitivity and low field disturbance are used. Afterwards the corresponding SAR values are calculated with the known electrical conductivity σ and the mass density ρ of the tissue in the SEMCAD FDTD software. The software is able to determine the averaged SAR values (averaging region 1 g or 10 g) for compliance testing.

The measurements are done by two scans: first a coarse scan determines the region of the maximum SAR, afterwards the averaged SAR is measured in a second scan within the shape of a cube. The measurement time takes about 20 minutes.

4.1 Phantom

For the measurements the Specific Anthropomorphic Mannequin (SAM Twin Phantom V4.0) defined by the IEEE SCC-34/SC2 group and delivered by Schmid & Partner Engineering AG is used. The phantom is a fibreglass shell integrated in a wooden table. The thickness of the phantom amounts to 2 mm \pm 0.2 mm. It enables the dosimetric evaluation of left and right hand phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a coverage (polyethylene), which prevents the evaporation of the liquid. The details and the Certificate of conformity can be found in Fig. 13.

Dasy_Report_FCC_Body_Card_850_1900_WCDMA II_WCDMA V_1.4.doc/20.06.2008/ABo

4.2 Probe

For the measurements the Dosimetric E-Field Probes ET3DV6R or EX3DV4 with following specifications are used. They are manufactured and calibrated in accordance with FCC [OET 65] and IEEE [IEEE 1528-2003] recommendations annually by Schmid & Partner Engineering AG.

ET3DV6:

- Dynamic range: 5μW/g to > 100mW/g
- Tip diameter: 6.8 mm
- Probe linearity: ± 0.2 dB (30 MHz to 3 GHz)
- Axial isotropy: ± 0.2 dB
- Spherical isotropy: ± 0.4 dB
- Distance from probe tip to dipole centers: 2.7 mm
- Calibration range: 900MHz / 1850MHz for head and body simulating liquid
- Angle between probe axis (evaluation axis) and surface normal line: less than 30°

EX3DV4:

- Dynamic range: 10μW/g to > 100mW/g (noise typically < 1μW/g)
- Tip diameter: 2.5 mm
- Probe linearity: ± 0.2 dB (30 MHz to 6 GHz)
- Axial isotropy: ± 0.2 dB
- Spherical isotropy: ± 0.4 dB
- Distance from probe tip to dipole centers: 1.0 mm
- Calibration range: 1950 MHz / 2450MHz / 3500 MHz / 5200 MHz / 5500 MHz / 5800 MHz for head and body simulating liquid
- Angle between probe axis (evaluation axis) and surface normal line: less than 30°

Dasy Report FCC Body Card 850 1900 WCDMA II WCDMA V 1.4.doc/20.06.2008/ABo

4.3 Measurement Procedure

The following steps are used for each test position:

- Establish a call with the maximum output power with a base station simulator. The
 connection between the mobile phone and the base station simulator is established
 via air interface.
- Measurement of the local E-field value at a fixed location (P1). This value serves as a reference value for calculating a possible power drift.
- Measurement of the SAR distribution with a grid spacing of 15 mm x 15 mm and a
 constant distance to the inner surface of the phantom. Since the sensors can not
 directly measure at the inner phantom surface, the values between the sensors and
 the inner phantom surface are extrapolated. With this values the area of the
 maximum SAR is calculated by a interpolation scheme (combination of a leastsquare fitted function and a weighted average method). Additional all peaks within 2
 dB of the maximum SAR are searched.
- Around this points, a cube of 30 mm x 30 mm x 30 mm is assessed by measuring 7 x 7 x 7 points whereby the first two measurement points are within the required 10 mm of the surface. With these data, the peak spatial-average SAR value can be calculated within the SEMCAD software.
- The used extrapolation and interpolation routines are all based on the modified Quadratic Shepard's method [DASY4].
- Repetition of the E-field measurement at the fixed location (P1) and repetition of the whole procedure if the two results differ by more than ± 0.21dB.

4.4 Uncertainty Assessment

Table 2 includes the worst case uncertainty budget suggested by the [IEEE 1528-2003] and determined by Schmid & Partner Engineering AG. The expanded uncertainty (K=2) is assessed to be \pm 21.7% and is valid up to 3.0 GHz.

Error Sources	Uncertainty Value	Probability Distribution	Divisor	c i	Standard Uncertainty	v _i ² or v _{eff}
Measurement System						
Probe calibration	± 5.9 %	Normal	1	1	± 5.9 %	∞
Axial isotropy	± 4.7 %	Rectangular	√3	0.7	± 1.9 %	∞
Hemispherical isotropy	± 9.6 %	Rectangular	√3	0.7	± 3.9 %	8
Boundary effects	± 1.0 %	Rectangular	√3	1	± 0.6 %	8
Linearity	± 4.7 %	Rectangular	√3	1	± 2.7 %	∞
System detection limit	± 1.0 %	Rectangular	√3	1	± 0.6 %	∞
Readout electronics	± 1.0 %	Normal	1	1	± 1.0 %	∞
Response time	± 0.8 %	Rectangular	√3	1	± 0.5 %	∞
Integration time	± 2.6%	Rectangular	√3	1	± 1.5 %	∞
RF ambient conditions	± 3.0 %	Rectangular	√3	1	± 1.7 %	∞
Probe positioner	± 0.4 %	Rectangular	√3	1	± 0.2 %	∞
Probe positioning	± 2.9 %	Rectangular	√3	1	± 1.7 %	∞
Algorithm for max SAR eval.	± 1.0 %	Rectangular	√3	1	± 0.6 %	∞
Test Sample Related						
Device positioning	± 2.9 %	Normal	1	1	± 2.9 %	145
Device holder	± 3.6 %	Normal	1	1	± 3.6 %	5
Power drift	± 5.0 %	Rectangular	√3	1	± 2.9 %	∞
Phantom and Set-up						
Phantom uncertainty	± 4.0 %	Rectangular	√3	1	± 2.3 %	∞
Liquid conductivity (target)	± 5.0 %	Rectangular	√3	0.64	± 1.8 %	∞
Liquid conductivity (meas.)	± 2.5 %	Normal	1	0.64	± 1.6 %	∞
Liquid permittivity (target)	± 5.0 %	Rectangular	√3	0.6	± 1.7 %	∞
Liquid permittivity (meas.)	± 2.5 %	Normal	1	0.6	± 1.5 %	∞
Combined Uncertainty					± 10.8 %	

Table 2: Uncertainty budget of DASY4.

5 SAR Results

The Tables below contain the measured SAR values averaged over a mass of 1 g.

	SA	Temperature			
Test Position (Liquid depth 15.5 cm)	Channel 128 824.2 MHz 33.4 dBm	Channel 190 836.4 MHz 33.3 dBm	Channel 251 848.8 MHz 33.2 dBm	Ambient	Liquid [° C]
Position 1		0.153* (0.017)		20.6	20.2
Position 2		0.062 (0.032)		20.6	20.2
Position 3		0.009 (0.061)		20.6	20.2
Position 4		0.071* (-0.053)		20.6	20.2

Table 3: Measurement results for GSM 850 for the Jablocom GDP-04Ai (* Max Cube).

	SA	Temperature			
Test Position (Liquid depth 15.5 cm)	Channel 512 1850.2 MHz 29.1 dBm	Channel 661 1880.0 MHz 28.4dBm	Channel 810 1909.6 MHz 28.8 dBm	Ambient [° C]	Liquid [° C]
Position 1		0.151 (-0.140)		20.9	20.3
Position 2		0.239 (-0.141)		20.9	20.3
Position 3		0.011 (0.074)		20.9	20.3
Position 4		0.071 (-0.066)		20.9	20.3

Table 4: Measurement results for GSM 1900 for the Jablocom GDP-04Ai (* Max Cube).

The "* Max Cube" labeling indicates that during the grid scanning an additional peak was found which was within 2.0 dB of the highest peak. The value of the highest cube is given in the tables above, the value from the second assessed cube is given in the SAR distribution plots (see appendix).

To control the output power stability during the SAR test the used DASY4 system calculates the power drift by measuring the e-field at the same location at the beginning and at the end of the measurement for each test position. These drift values can be found in the above tables labeled as: (Drift[dB]). This ensures that the power drift during one measurement is within 5%.

6 Evaluation

In Fig. 8 - 9 the flat phantom SAR results for GPRS 850, GPRS 1900 and IEEE 802.11 b given in Table 3 - 4 are summarized and compared to the limit.

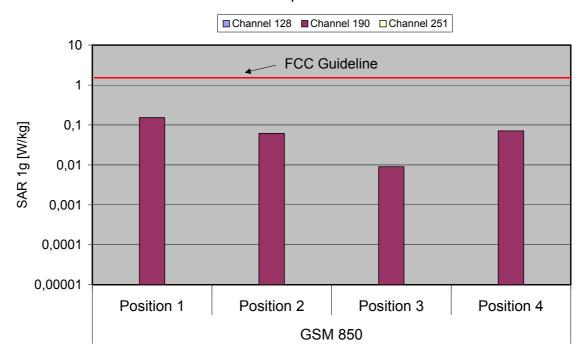


Fig. 8: The measured SAR values for the Jablocom GDP-04Ai for GSM 900 in comparison to the FCC exposure limit.

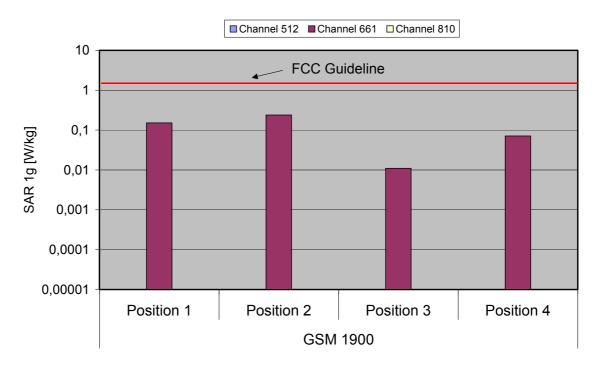


Fig. 9: The measured SAR values for the Jablocom GDP-04Ai for GSM 1900 in comparison to the FCC exposure limit.

Dasy_Report_ FCC_Body_Card_850_1900_WCDMA II_WCDMA V_1.4.doc/20.06.2008/ABo

7 Appendix

7.1 Administrative Data

Date of validation: 835 MHz: January 04, 2010

1900 MHz: January 12, 2010

Date of measurement: January 04, 2010 – January 12, 2010

Data stored: 7layers_6620_784

Contact: IMST GmbH

Carl-Friedrich-Gauß-Str. 2

D-47475 Kamp-Lintfort, Germany

Tel.: +49- 2842-981 378, Fax: +49- 2842-981 399

email: vandenbosch@imst.de

7.2 Device under Test and Test Conditions

MTE: Jablocom GDP-04Ai, identical prototype

Date of receipt: December 21, 2009 IMEI: 356614020036693

FCC ID: VXPGDP-04I Equipment class: Portable device

Power Class: GSM 850: 5, tested with power level 5

GSM 1900: 2, tested with power level 0

RF exposure environment: General Population/ Uncontrolled

Power supply: internal battery
Antenna: integrated

Measured Standards: GSM 850; GM 1900

Method to establish a call: Basestation simulator, using the air interface

Used Phantom: SAM Twin Phantom V4.0, as defined by the IEEE SCC-

34/SC2 group and delivered by Schmid & Partner

Engineering AG

Jablocom GDP-04Ai	TX Range [MHz]	RX Range [MHz]	Used Channels [low, middle, high]	Used Crest Factor
GSM 850	824.2 – 848.8	869.2 - 893.8	128, 190, 251	8
GSM 1900	1850.2 –1909.8	1930.2 – 1989.8	512, 661, 810	8

Table 5: Used channels and crest factors during the test.

Dasy_Report_ FCC_Body_Card_850_1900_WCDMA II_WCDMA V_1.4.doc/20.06.2008/ABo

7.3 Tissue Recipes

The following recipes are provided in percentage by weight.

52.40 %	De-Ionized Water
01.50 %	Salt
45.00 %	Sugar
00.10 %	Preventol D7
01.00 %	Hydroxyetyl-Cellulose
29.68%	Diethylenglykol-monobutylether
70.00%	De-Ionized Water
0.32%	Salt
	01.50 % 45.00 % 00.10 % 01.00 % 29.68% 70.00%

7.4 Material Parameters

For the measurement of the following parameters the HP 85070B dielectric probe kit is used, representing the open-ended coaxial probe measurement procedure. The measured values should be within \pm 5% of the recommended values given by the FCC.

Frequency		ϵ_{r}	σ [S/m]
	Recommended Value	55.20 ± 2.70	0.97 ± 0.10
835 MHz Body	Measured Value (Ch. 128)	57.80	0.97
835 MHZ BOUY	Measured Value (Ch. 190)	57.60	0.98
	Measured Value (Ch. 251)	57.30	0.98
	Recommended Value	53.30 ± 2.65	1.52 ± 0.15
1900 MHz Body	Measured Value (Ch. 512)	53.50	1.48
1000 Willia Body	Measured Value (Ch. 661)	53.40	1.53
	Measured Value (Ch. 810)	53.30	1.59

Table 6: Parameters of the tissue simulating liquid.

Dasy_Report_ FCC_Body_Card_850_1900_WCDMA II_WCDMA V_1.4.doc/20.06.2008/ABo

7.5 Simplified Performance Checking

The simplified performance check was realized using the dipole validation kits. The input power of the dipole antennas were 250 mW and they were placed under the flat part of the SAM phantoms. The target and measured results are listed in the Table 7 - 8 and shown in Fig. 10 - 11. The target values were adopted from the manufactures calibration certificates.

Available Dipoles		SAR _{1g} [W/kg]	ϵ_{r}	σ [S/m]
D835V2, SN #437	Target	2.62	57.10	1.00
D1900V2, SN #5d051	Values Body	9.42	52.90	1.54

Table 7: Dipole target results.

Used Dipoles		SAR _{1g} [W/kg]	ϵ_{r}	σ [S/m]
835 MHz, SN: 437	Measured	2.48	57.60	0.98
1900 MHz, SN: 5d051	Values Body	9.52	53.30	1.57

Table 8: Measured dipole validation results.

Test Laboratory: IMST GmbH, DASY Blue (I); File Name: 040110_b_1669.da4

DUT: Dipole 835 MHz SN437; Type: D835V2; Serial: D835V2 - SN:437

Program Name: System Performance Check at 835 MHz

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: f = 835 MHz; $\sigma = 0.98 \text{ mho/m}$; $\varepsilon_r = 57.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R SN1669; ConvF(5.89, 5.89, 5.89); Calibrated: 10.02.2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 09.02.2009
- Phantom: SAM Sugar 1059; Type: Speag; Serial: 1059
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

d=10mm, Pin=250mW/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 2.60 mW/g

d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 53.5 V/m; Power Drift = -0.001 dB

Peak SAR (extrapolated) = 3.56 W/kg

SAR(1 g) = 2.48 mW/g; SAR(10 g) = 1.62 mW/g Maximum value of SAR (measured) = 2.69 mW/g

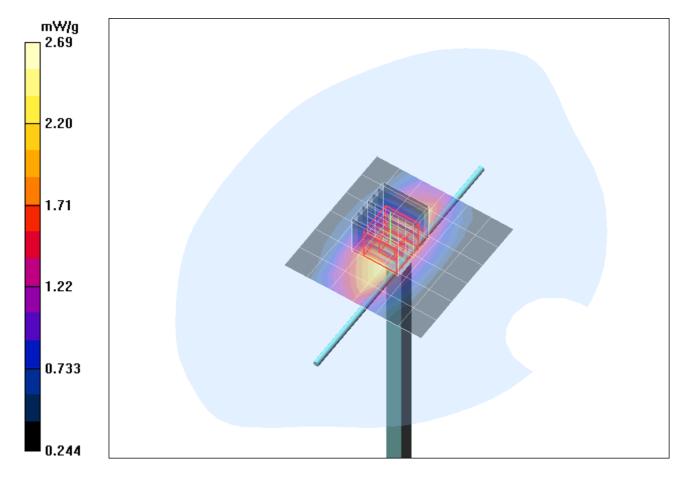


Fig. 10: Validation measurement 835 MHz Body (January 04, 2010), coarse grid. Ambient Temperature: 20.4°C, Liquid Temperature: 20.2°C.

Test Laboratory: Imst GmbH, DASY Yellow (II); File Name: 120110_y_3536.da4

DUT: Dipole 1900 MHz SN: 5d051; Type: D1900V2; Serial: D1900V2 - SN5d051 Program Name: System Performance Check at 1900 MHz

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: f = 1900 MHz; σ = 1.57 mho/m; ε_r = 53.3; ρ = 1000 kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 SN3536; ConvF(8.11, 8.11, 8.11); Calibrated: 18.09.2009
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 14.09.2009
- Phantom: SAM Glycol 1340; Type: QD 000 P40 CB; Serial: TP-1340
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

d=10mm, Pin=250mW/Area Scan (7x7x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 10.7 mW/g

d=10mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 82.9 V/m; Power Drift = 0.005 dB

Peak SAR (extrapolated) = 18.2 W/kg

SAR(1 g) = 9.52 mW/g; SAR(10 g) = 4.84 mW/g

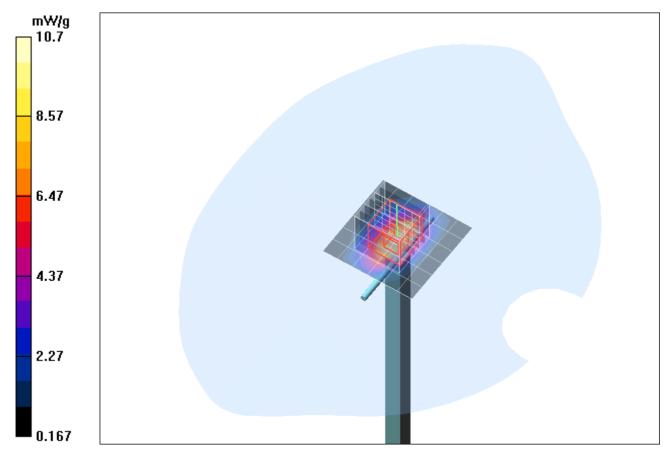


Fig. 11: Validation measurement 1900 MHz Body (January 12, 2010), coarse grid. Ambient Temperature: 20.7°C, Liquid Temperature: 20.2°C.

Error Sources	Uncertainty Value	Probability Distribution	Divis or	C _i	Standard Uncertainty	v _i ² or v _{eff}
Measurement System						
Probe calibration	± 4.8 %	Normal	1	1	± 4.8 %	8
Axial isotropy	± 4.7 %	Rectangular	√3	1	± 2.7 %	∞
Hemispherical isotropy	± 0 %	Rectangular	√3	1	± 0 %	8
Boundary effects	± 1.0 %	Rectangular	√3	1	± 0.6 %	8
Linearity	± 4.7 %	Rectangular	√3	1	± 2.7 %	∞
System detection limit	± 1.0 %	Rectangular	√3	1	± 0.6 %	∞
Readout electronics	± 1.0 %	Normal	1	1	± 1.0 %	∞
Response time	± 0 %	Rectangular	√3	1	± 0 %	∞
Integration time	± 0%	Rectangular	√3	1	± 0 %	∞
RF ambient conditions	± 3.0 %	Rectangular	√3	1	± 1.7 %	∞
Probe positioner	± 0.4 %	Rectangular	√3	1	± 0.2 %	∞
Probe positioning	± 2.9 %	Rectangular	√3	1	± 1.7 %	∞
Algorithms for max SAR eval.	± 1.0 %	Rectangular	√3	1	± 0.6 %	8
Dipole						
Dipole Axis to Liquid Distance	± 2.0 %	Rectangular	1	1	± 1.2 %	8
Input power and SAR drift mea.	± 4.7 %	Rectangular	√3	1	± 2.7 %	8
Phantom and Set-up						
Phantom uncertainty	± 4.0 %	Rectangular	√3	1	± 2.3 %	∞
Liquid conductivity (target)	± 5.0 %	Rectangular	√3	0.64	± 1.8 %	8
Liquid conductivity (meas.)	± 2.5 %	Normal	1	0.64	± 1.6 %	∞
Liquid permittivity (target)	± 5.0 %	Rectangular	√3	0.6	± 1.7 %	∞
Liquid permittivity (meas.)	± 2.5 %	Normal	1	0.6	± 1.5 %	∞
Combined Uncertainty					± 8.4 %	

Table 9: Uncertainty budget for the system performance check.

Dasy_Report_FCC_Body_Card_850_1900_WCDMA II_WCDMA V_1.4.doc/20.06.2008/ABo

7.6 Environment

To comply with the required noise level (less than 12 mW/kg) periodically measurements without a DUT were conducted. Humidity: $37\% \pm 5\%$

7.7 Test Equipment

Test Equipment	Model	Serial Number	Last Calibration	Next Calibration
DASY4 Systems				
Software Versions DASY4	V4.7	N/A	N/A	N/A
Software Versions SEMCAD	V1.8	N/A	N/A	N/A
Dosimetric E-Field Probe	ET3DV6	1669	02/2009	02/2010
Dosimetric E-Field Probe	EX3DV4	3536	09/2009	09/2010
Data Acquisition Electronics	DAE 3	335	02/2009	02/2010
Data Acquisition Electronics	DAE 4	631	09/2009	09/2010
Phantom	SAM	1059	N/A	N/A
Phantom	SAM	1176	N/A	N/A
Phantom	SAM	1340	N/A	N/A
Phantom	SAM	1341	N/A	N/A
Dipoles				
Validation Dipole	D835V2	437	12/2009	12/2011
Validation Dipole	D1900V2	535	12/2009	12/2011
Validation Dipole	D1900V2	5d051	09/2009	09/2011
Material Measurement				
Network Analyzer	E5071C	MY46103220	08/2009	08/2010
Dielectric Probe Kit	HP85070B	US33020263	N/A	N/A

Table 10: SAR equipment.

Test Equipment	Model	Serial Number	Last Calibration	Next Calibration
Power Meters				
Power Meter, Agilent	E4416A	GB41050414	12/2008	12/2010
Power Meter, Agilent	E4417A	GB41050441	12/2008	12/2010
Power Meter, Anritsu	ML2487A	6K00002319	12/2009	12/2011
Power Meter, Anritsu	ML2488A	6K00002078	12/2009	12/2011
Power Sensors				
Power Sensor, Agilent	E9301H	US40010212	12/2008	12/2010
Power Sensor, Agilent	E9301A	MY41495584	12/2008	12/2010
Power Sensor, Anritsu	MA2481B	031600	12/2009	12/2011
Power Sensor, Anritsu	MA2490A	031565	12/2009	12/2011
RF Sources				
Network Analyzer	E5071C	MY46103220	08/2009	08/2011
Rohde & Schwarz	SME300	100142	N/A	N/A
Amplifiers				
Mini Circuits	ZHL-42	D012296	N/A	N/A
Mini Circuits	ZHL-42	D031104#01	N/A	N/A
Mini Circuits	ZVE-8G	D031004	N/A	N/A
Radio Tester				
Rohde & Schwarz	CMU200	835305/050	12/2008	12/2010
Anritsu	MT8815B	6200586536	N/A	N/A

Table 11: Test equipment, General.

7.8 Certificates of conformity

Schmid & Partner Engineering AG

a q

Zeughausstrasse 43, 8004 Zurich, Switzerland Phone +41 44 245 9700. Fax +41 44 245 9779 info@speag.com, http://www.speag.com

Certificate of conformity

Item	Dosimetric Assessment System DASY4		
Type No	SD 000 401A, SD 000 402A		
Software Version No	DASY 4.7		
Manufacturer / Origin	Schmid & Partner Engineering AG Zeughausstrasse 43, CH-8004 Zürich, Switzerland		

- [1] IEEE 1528-2003, "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement
- Techniques, December 2003
 [2] EN 50361:2001, "Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300 MHz - 3 GHz)", July 2001
- [3] IEC 62209 1, "Specific Absorption Rate (SAR) in the frequency range of 300 MHz to 3 GHz Measurement Procedure, Part 1: Hand-held mobile wireless communication devices", February 2005
- [4] IEC 62209 2, Draft Version 0.9, "Evaluation of Human Exposure to Radio Frequency Fields from Handheld and Body-Mounted Wireless Communication Devices in the Frequency Range of 30 MHz to 6 GHz: Human models, Instrumentation and Procedures Part 2: Procedure to determine the Specific Absorption Rate (SAR) for ... including accessories and multiple transmitters", December 2004
- [5] OET Bulletin 65, Supplement C, "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields", Edition 01-01
- [6] ANSI-C63.19-2006, "American National Standard for Methods of Measurement of Compatibility between Wireless Communication Devices and Hearing Aids", June 2006
- ANSI-C63.19-2007, "American National Standard for Methods of Measurement of Compatibility between Wireless Communication Devices and Hearing Aids", June 2007

We certify that this system is designed to be fully compliant with the standards [1 - 7] for RF emission tests of wireless devices.

The uncertainty of the measurements with this system was evaluated according to the above standards and is documented in the applicable chapters of the DASY4 system handbook

The uncertainty values represent current state of methodology and are subject to changes. They are applicable to all laboratories using DASY4 provided the following requirements are met (responsibility of the system end user):

- the system is used by an experienced engineer who follows the manual and the guidelines taught 1) during the training provided by SPEAG,
- the probe and validation dipoles have been calibrated for the relevant frequency bands and media within the requested period,
- the DAE has been calibrated within the requested period,
- the "minimum distance" between probe sensor and inner phantom shell and the radiation source is 4) selected properly,
- the system performance check has been successful,
- the operational mode of the DUT is CW, CDMA, FDMA or TDMA (GSM, DCS, PCS, IS136, PDC) and the measurement/integration time per point is ≥ 500 ms,
- if applicable, the probe modulation factor is evaluated and applied according to field level, 7) modulation and frequency,
- the dielectric parameters of the liquid are conformant with the standard requirement,
- the DUT has been positioned as described in the manual.
- 10) the uncertainty values from the calibration certificates, and the laboratory and measurement equipment dependent uncertainties, are updated by end user accordingly. 18 miles

Date 24.4.2008

Signature / Stamp

Page 1 (1)

Doc No 880 - SD00040XA-Standards 0804 - F

Schmid & Partner Engineering AG

Zeughausstrasse 43, 8004 Zurich, Switzerland, Phone +41 1 245 97 00, Fax +41 1 245 97 79

Certificate of conformity / First Article Inspection

Item	SAM Twin Phantom V4.0		
Type No	QD 000 P40 BA		
Series No	TP-1002 and higher		
Manufacturer / Origin	Untersee Composites Hauptstr. 69 CH-8559 Fruthwilen Switzerland		

Tests

The series production process used allows the limitation to test of first articles. Complete tests were made on the pre-series Type No. QD 000 P40 AA, Serial No. TP-1001 and on the series first article Type No. QD 000 P40 BA, Serial No. TP-1006. Certain parameters have been retested using further series units (called samples).

Test	Requirement	Details	Units tested
Shape	Compliance with the geometry according to the CAD model.	IT'IS CAD File (*)	First article, Samples
Material thickness	Compliant with the requirements according to the standards	2mm +/- 0.2mm in specific areas	First article, Samples
Material parameters	Dielectric parameters for required frequencies	200 MHz – 3 GHz Relative permittivity < 5 Loss tangent < 0.05.	Material sample TP 104-5
Material resistivity	The material has been tested to be compatible with the liquids defined in the standards	Liquid type HSL 1800 and others according to the standard.	Pre-series, First article

Standards

- [1] CENELEC EN 50361
- [2] IEEE P1528-200x draft 6.5
- [3] IEC PT 62209 draft 0.9
- (*) The IT'IS CAD file is derived from [2] and is also within the tolerance requirements of the shapes of [1] and [3].

Conformity

Based on the sample tests above, we certify that this item is in compliance with the uncertainty requirements of SAR measurements specified in standard [1] and draft standards [2] and [3].

Signature / Stamp

Schmid & Partner

Engineering AG

Zeughausstrasse 43, CH-8004 Zurlch
Tel. +41 1 245 97 70, Fax +41 1 245 97 79

Doc No 881 - QD 000 P40 BA - B

Page

1 (1)

Fig. 13: Certificate of conformity for the used SAM phantom.

7.9 Pictures of the device under test

Fig. 14 - 16 show the device under test.



Fig. 14: Top view of the device GDP-04Ai.



Fig. 15: Back and bottom view of the device GDP-04Ai.



Fig. 16: Back and bottom view of the device GDP-04Ai.

7.10 Test Positions for the Device under Test

Fig. 17 – Fig. 20 show the test positions for the SAR measurements.



Fig. 17: Body worn configuration for the Jablocom GDP-04Ai, Position 1.



Fig. 18: Body worn configuration for the Jablocom GDP-04Ai, Position 2.

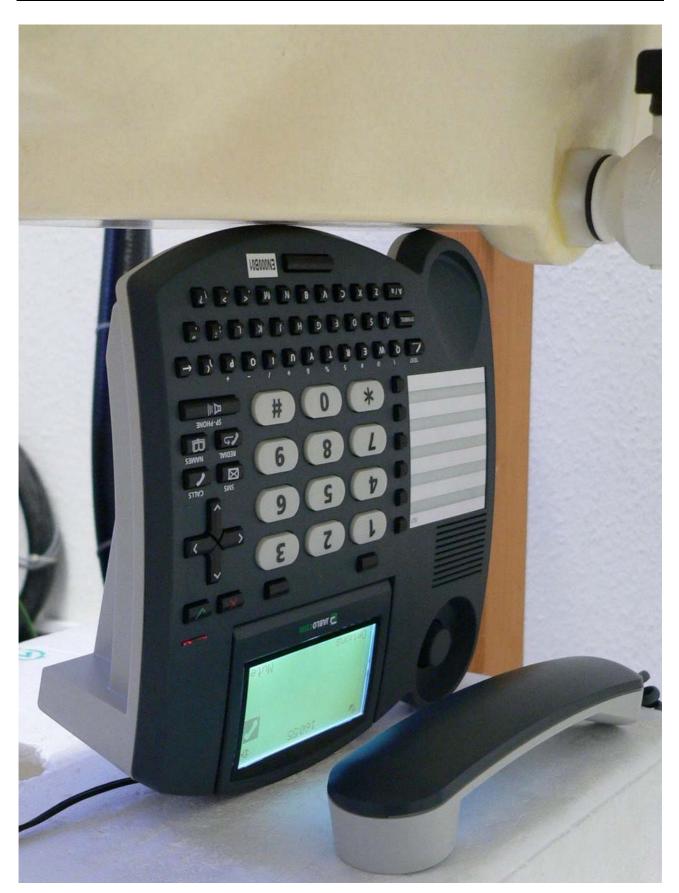


Fig. 19: Body worn configuration for the Jablocom GDP-04Ai, Position 3.

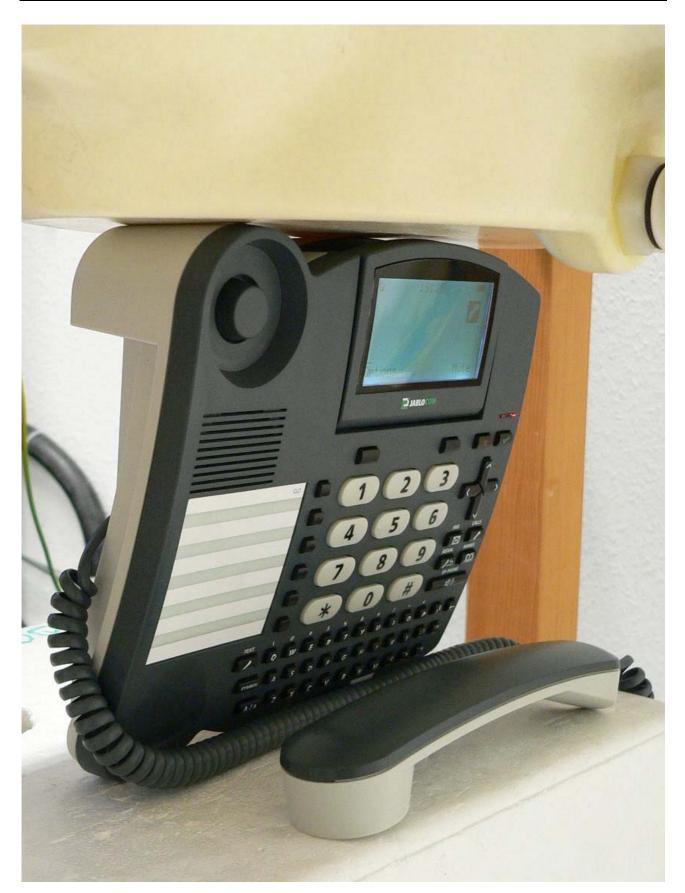


Fig. 20: Body worn configuration for the Jablocom GDP-04Ai, Position 4.

7.11 Pictures to demonstrate the required liquid depth

Fig. 21 - 22 show the liquid depth in the used SAM phantom.



Fig. 21: Liquid depth for GSM 850 Body measurements.

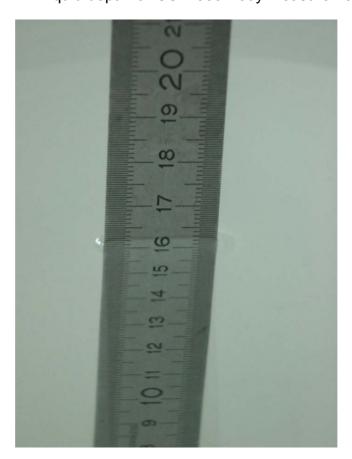


Fig. 22: Liquid depth for GSM 1900 Body measurements.

8 References

[OET 65] Federal Communications Commission: Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields, Supplement C (Edition 01-01) to OET Bulletin 65 (Edition 97-01), FCC, 2001.

[3G Devices] Laboratory Division, Office of Engineering and Technology, Federal Communications Commission: SAR Measurement Procedures for 3G Devices – CDMA 2000 / Ev-DO – WCDMA / HSDPA- (Rev. 2; October 2007)

[IEEE C95.1-1999] IEEE Std C95.1-1999: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz, Inst. of Electrical and Electronics Engineers, Inc., 1999.

[IEEE C95.1-2005] IEEE Std C95.1-2005: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz, Inst. of Electrical and Electronics Engineers, Inc., 2005.

[ICNIRP 1998] ICNIRP: Guidelines for Limiting Exposure to Time-varying Electric, Magnetic, and Electromagnetic Fields (up to 300 GHz), In: Health Physics, Vol. 74, No. 4, 494-522, 1998.

[IEEE 1528-2003] IEEE Std 1528-2003: IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques. 1528-2003, December 19, 2003, The Institute of Electrical and Electronics Engineers.

[NIST 1994] NIST: Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Results, Technical Note 1297 (TN1297), United States Department of Commerce Technology Administration, National Institute of Standards and Technology, 1994.

[DASY4] Schmid & Partner Engineering AG: DASY4 Manual. April 2008

[FCC 96-326] FCC 96-326, ET Docket No. 93-62, Report and Order, August 1, 1996
[3GPP 34.121] ETSI TS 134 121-1 V7.4.0, Universal Mobile Telecomunications
System (UMTS); User Equipment (UE) conformance specification;
Radio transmission and reception (FDD)

[KDB 447498] 447498 D01 Mobile Portable RF Exposure v03r02: Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies, 05/12/2008

[KDB 941225] 941225 D01 SAR Measurement Procedures for 3G Devices v02, October 2007

[KDB 648474] 647484 D01 SAR Evaluation Consideration for Handsets with Multiple Transmitters and Antennas; September 2008