



FCC TEST REPORT

Report Number : **709502501815-00B** Date of Issue: April 15, 2025

Model : DVQ24WE/S-0.6/34, DV24WE/S-0.6/34,
DVQ24WE/S-0.2/28, DV24WE/S-0.2/28

Product Type : DC Venetian Blinds Drive

Applicant : NINGBO DOOYA MECHANIC & ELECTRONIC TECHNOLOGY CO., LTD.

Address : No.168 Shengguang Road, Luotuo, Zhenhai, Ningbo ZHEJIANG, China

Manufacturer : NINGBO DOOYA MECHANIC & ELECTRONIC TECHNOLOGY CO., LTD.

Address : No.168 Shengguang Road, Luotuo, Zhenhai, Ningbo ZHEJIANG, China

Test Result : ☒ Positive ☐ Negative

Total pages including
Appendices : 31



TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch is a subcontractor to TÜV SÜD Product Service GmbH according to the principles outlined in ISO 17025.

TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch reports apply only to the specific samples tested under stated test conditions. Construction of the actual test samples has been documented. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. The manufacturer/importer is responsible to the Competent Authorities in Europe for any modifications made to the production units which result in non-compliance to the relevant regulations. TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval.



1 Table of Contents

1	Table of Contents.....	2
2	Report Modification Record.....	3
3	Details about the Test Laboratory.....	3
4	Description of the Equipment Under Test.....	4
5	Summary of Test Standards.....	5
6	Summary of Test Results.....	6
7	General Remarks.....	7
8	Systems test configuration.....	8
9	Test Setups.....	9
10	Test Methodology.....	11
10.1	Conducted Emission.....	11
10.2	The Field strength of Emissions.....	20
10.3	20 Bandwidth Measurement.....	26
10.4	Deactivation Time.....	28
11	Test Equipment List.....	30
12	System Measurement Uncertainty.....	31

2 Report Modification Record

Alterations and additions to this report will be issued to the holders of each copy in the form of a complete document.

Issue	Description of Change	Date of Issue
709502501815-00B	First Issue	04/14/2025

3 Details about the Test Laboratory

Test Site 1

Company name: TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch
No.16 Lane, 1951 Du Hui Road,
Shanghai 201108,
P.R. China

Telephone: +86 21 6141 0123

Fax: +86 21 6140 8600

FCC Registration No.: 820234

FCC Designation Number: CN1183

ISED CAB identifier CN0101

IC Registration No.: 31668

4 Description of the Equipment Under Test

Product: DC Venetian Blinds Drive

Model no: DVQ24WE/S-0.6/34, DV24WE/S-0.6/34,
DVQ24WE/S-0.2/28, DV24WE/S-0.2/28

FCC ID: VYYDV24WES0634V0

Rating: DC 8 V or DC 12V

RF Transmission Frequency: DSR:433.92MHz

Modulation: FSK

Hardware Version: V0

Software Version: 0.6/34 series: V0, 0.2/28 series: V1

Antenna Type: Line Antenna

Description of the EUT: The Equipment Under Test (EUT) is a DC Venetian Blinds Drive with 433.92MHz transceiver. All of the models have the same electrical construction except for the inner motor, software and the outside view. Detail information refer to below table:

Model name	Description
DV24WE/S-0.6/34, DVQ24WE/S-0.6/34	Only difference is the outside view
DV24WE/S-0.2/28, DVQ24WE/S-0.2/28	Only difference is the outside view
The only different between 0.2/28 series and 0.6/34 series is the inner motor and software and these difference will not affect RF tests.	

After technical evaluation, we chose model DVQ24WE/S-0.2/28 under DC 8V and DC 12V to perform all tests respectively and list the worst data in this report. The corresponding data is representative for other models as well.

Test sample no.: SHA-897429-7 (RF Radiated); SHA-897429-8

The sample's mentioned in this report is/are submitted/ supplied/ manufactured by client. The laboratory therefore assumes no responsibility for accuracy of information on the brand name, model number, origin of manufacture, consignment or any information supplied.



5 Summary of Test Standards

Test Standards	
FCC Part 15 Subpart C	PART 15 - RADIO FREQUENCY DEVICES Subpart C - Intentional Radiators

All the test methods were according to ANSI C63.10-2020.

6 Summary of Test Results

Technical Requirements				
FCC Part 15 Subpart C				
Test Condition		Pages	Test Site	Test Result
§15.207	Conducted emission AC power port	11-19	Shield room	Pass
§15.205, §15.209, 15.35 (c)§15.231(b)	The Field strength of Emissions	20-25	3m chamber	Pass
§15.231(c)	Bandwidth Measurement	26-27	Shield room	Pass
§15.231(a)(2)	Deactivation Time	28-29	Shield room	Pass
§15.203	Antenna requirement	--	See Note 1	Pass

Note 1: The EUT uses line antenna. In accordance to §15.203, It is considered sufficiently to comply with the provisions of this section.

7 General Remarks

Remarks

This submittal(s) (test report) is intended for FCC ID:VYYDV24WES0634V0, complies with Section 15.207, 15.205, 15.209, 15.231 of the FCC Part 15, Subpart C Rules.

SUMMARY:

All tests according to the regulations cited on page 5 were

■ - Performed

□ - **Not** Performed

The Equipment Under Test

■ - **Fulfills** the general approval requirements.

□ - **Does not** fulfill the general approval requirements.

Sample Received Date: March 14, 2025

Testing Start Date: March 17, 2025

Testing End Date: April 14, 2025

TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch

Reviewed by:

Prepared by:

Tested by:

Jiaxi Xu



Hui Tong

Tianji Xu

Jiaxi XU
Reviewer Manager

Hui TONG
Project Engineer

Tianji XU
Test Engineer


8 Systems test configuration

Auxiliary Equipment Used during Test:

DESCRIPTION	MANUFACTURER	MODEL NO.(SHIELD)	REMARK
AC/DC adapter	I.T.E	XSD-1201500NEUD	Rated input:100-240V~ Rated output:12V DC
AC/DC adapter	--	YSW05E58-0841500E	Rated input:100-240V~ Rated output:8.4V DC


9 Test Setups

9.1 AC Power Line Conducted Emission test setups

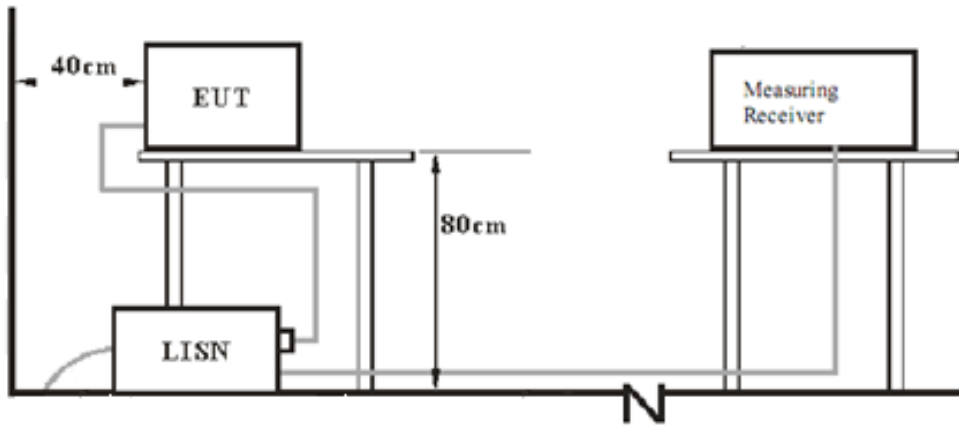


9.2 Radiated test setups


9kHz ~ 30MHz Test Setup:

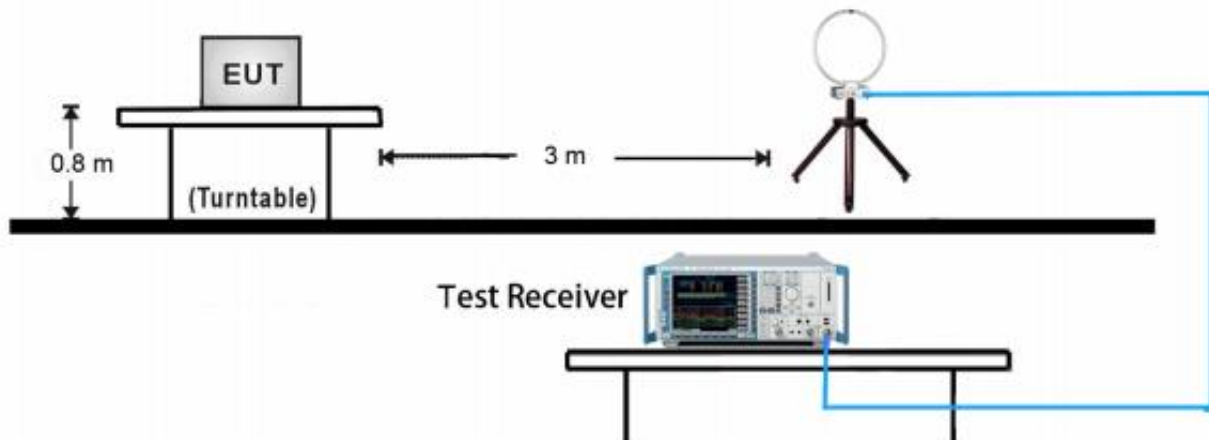

30MHz ~ 1GHz Test- Setup

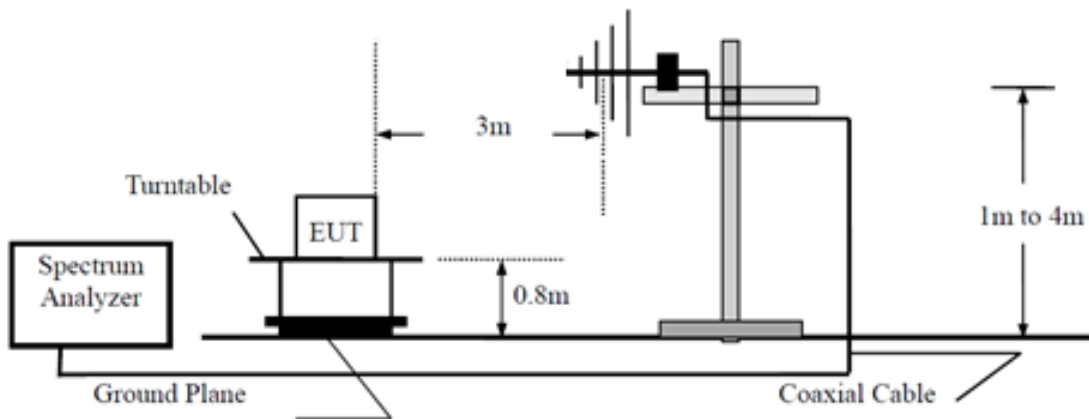

1GHz ~ 18GHz Test Setup:

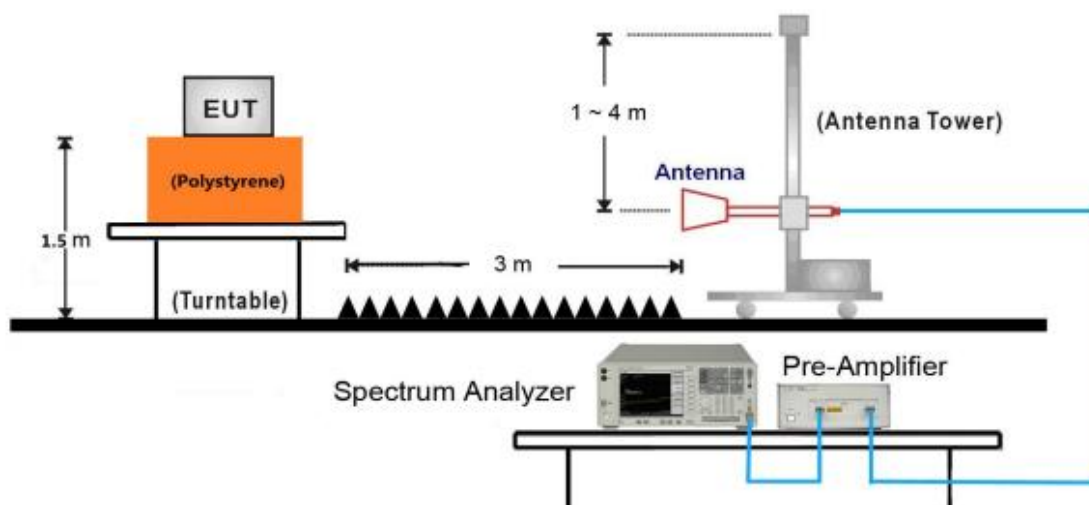

10 Test Methodology

10.1 Conducted Emission

Test Method

1. The EUT was placed on a table, which is 0.8m above ground plane
2. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.).
3. Maximum procedure was performed to ensure EUT compliance
4. A EMI test receiver is used to test the emissions from both sides of AC line

Limit

Frequency MHz	QP Limit dB μ V	AV Limit dB μ V
0.150-0.500	66-56*	56-46*
0.500-5	56	46
5-30	60	50

Decreasing linearly with logarithm of the frequency

Conducted Emission

150k-30MHz Conducted Emission Test


EUT Information

EUT Name:	DC Venetian Blinds Drive
Model	DVQ24WE/S-0.2/28
Client:	Ningbo Dooya Mechanic & Electronic Technology Co., Ltd
Op Cond	Transmit mode, DC 12V power on by adapter
Operator:	Tianji XU
Standard	FCC Part 15.207(a)
Sample No.:	SHA-897429-8

Scan Setup: Voltage with 2-Line-LISN pre [EMI conducted]

Hardware Setup:	Voltage with 2-Line-LISN
Receiver:	[ESR 3]
Level Unit:	dBuV

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamplifier
9 kHz - 150 kHz	100 Hz	PK+	200 Hz	0.02 s	0 dB
150 kHz - 30 MHz	4.5 kHz	PK+; AVG	9 kHz	0.01 s	0 dB

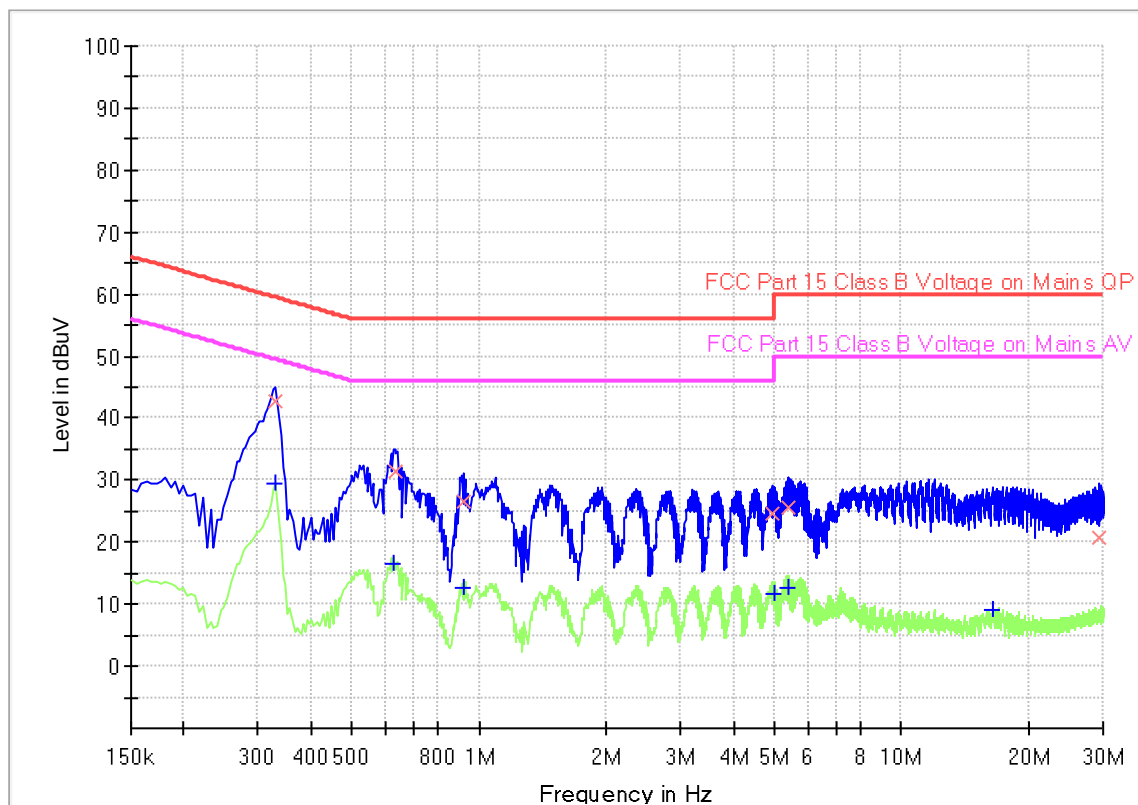



Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.330000	---	29.53	49.45	19.92	1000.0	9.000	L1	19.5
0.330000	42.71	---	59.45	16.74	1000.0	9.000	L1	19.5
0.627000	---	16.55	46.00	29.45	1000.0	9.000	L1	19.5
0.631500	31.44	---	56.00	24.56	1000.0	9.000	L1	19.5
0.919500	---	12.71	46.00	33.29	1000.0	9.000	L1	19.5
0.919500	26.67	---	56.00	29.33	1000.0	9.000	L1	19.5
4.969500	24.59	---	56.00	31.41	1000.0	9.000	L1	19.6
4.992000	---	11.63	46.00	34.37	1000.0	9.000	L1	19.6
5.379000	25.69	---	60.00	34.31	1000.0	9.000	L1	19.6
5.415000	---	12.79	50.00	37.21	1000.0	9.000	L1	19.6
16.449000	---	9.24	50.00	40.76	1000.0	9.000	L1	20.0
29.301000	20.82	---	60.00	39.18	1000.0	9.000	L1	21.0

150k-30MHz Conducted Emission Test


EUT Information

EUT Name:	DC Venetian Blinds Drive
Model	DVQ24WE/S-0.2/28
Client:	Ningbo Dooya Mechanic & Electronic Technology Co., Ltd
Op Cond	Transmit mode, DC 12V power on by adapter
Operator:	Tianji XU
Standard	FCC Part 15.207(a)
Sample No.:	SHA-897429-8

Scan Setup: Voltage with 2-Line-LISN pre [EMI conducted]

Hardware Setup:	Voltage with 2-Line-LISN
Receiver:	[ESR 3]
Level Unit:	dBuV

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
9 kHz - 150 kHz	100 Hz	PK+	200 Hz	0.02 s	0 dB
150 kHz - 30 MHz	4.5 kHz	PK+; AVG	9 kHz	0.01 s	0 dB

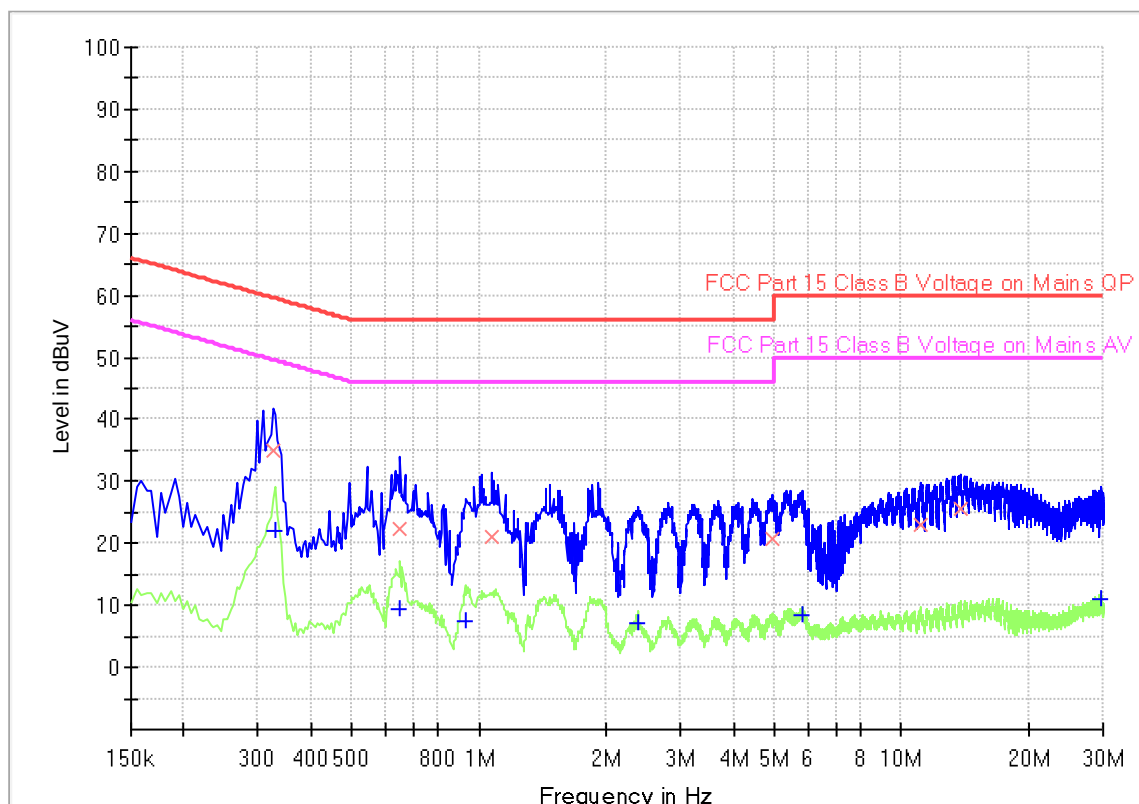



Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.325500	34.94	---	59.57	24.63	1000.0	9.000	N	19.4
0.330000	---	22.00	49.45	27.45	1000.0	9.000	N	19.4
0.649500	---	9.31	46.00	36.69	1000.0	9.000	N	19.5
0.649500	22.26	---	56.00	33.74	1000.0	9.000	N	19.5
0.928500	---	7.32	46.00	38.68	1000.0	9.000	N	19.5
1.072500	21.02	---	56.00	34.98	1000.0	9.000	N	19.5
2.373000	---	7.27	46.00	38.73	1000.0	9.000	N	19.5
4.951500	20.75	---	56.00	35.25	1000.0	9.000	N	19.6
5.851500	---	8.48	50.00	41.52	1000.0	9.000	N	19.6
11.139000	22.96	---	60.00	37.04	1000.0	9.000	N	19.7
13.753500	25.44	---	60.00	34.56	1000.0	9.000	N	19.9
29.629500	---	10.94	50.00	39.06	1000.0	9.000	N	20.8

150k-30MHz Conducted Emission Test


EUT Information

EUT Name:	DC Venetian Blinds Drive
Model	DVQ24WE/S-0.2/28
Client:	Ningbo Dooya Mechanic & Electronic Technology Co., Ltd
Op Cond	Transmit mode, DC 8V power on by adapter
Operator:	Tianji XU
Standard	FCC Part 15.207(a)
Sample No.:	SHA-897429-8

Scan Setup: Voltage with 2-Line-LISN pre [EMI conducted]

Hardware Setup:	Voltage with 2-Line-LISN
Receiver:	[ESR 3]
Level Unit:	dBuV

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
9 kHz - 150 kHz	100 Hz	PK+	200 Hz	0.02 s	0 dB
150 kHz - 30 MHz	4.5 kHz	PK+; AVG	9 kHz	0.01 s	0 dB

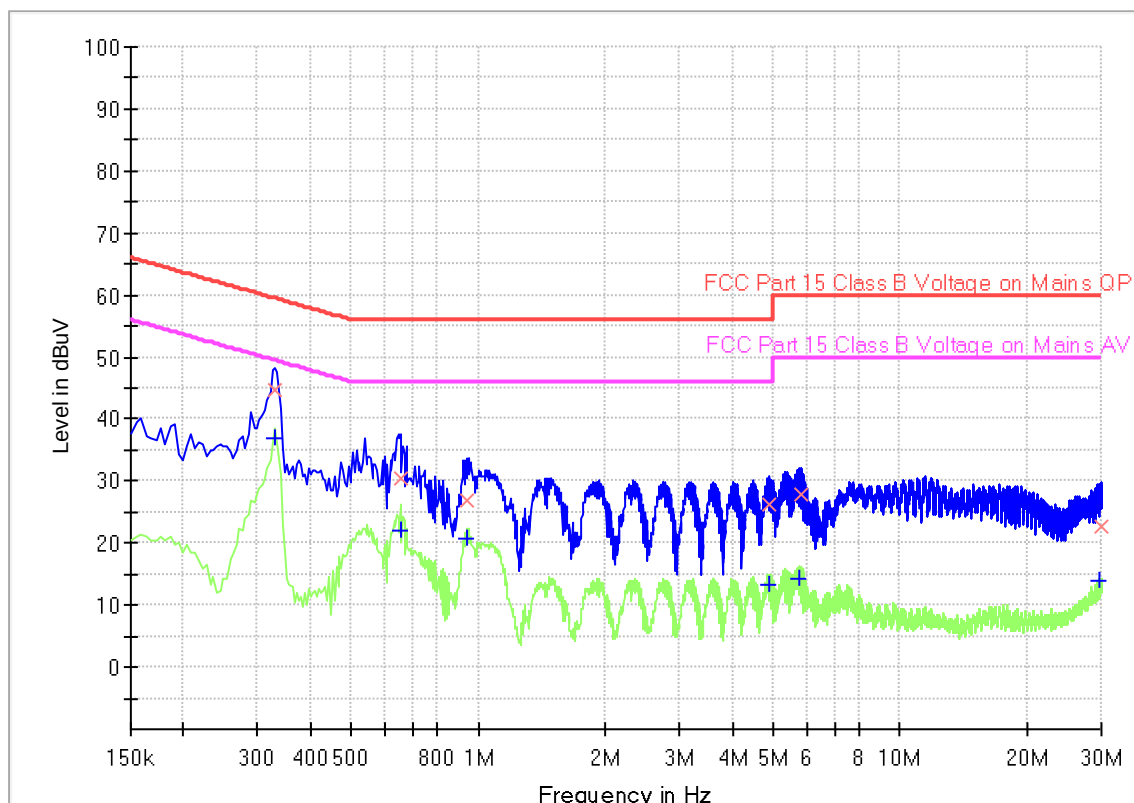



Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.330000	---	36.77	49.45	12.68	1000.0	9.000	L1	19.5
0.330000	44.77	---	59.45	14.68	1000.0	9.000	L1	19.5
0.654000	---	21.87	46.00	24.13	1000.0	9.000	L1	19.5
0.654000	30.57	---	56.00	25.43	1000.0	9.000	L1	19.5
0.942000	---	20.71	46.00	25.29	1000.0	9.000	L1	19.5
0.942000	26.98	---	56.00	29.02	1000.0	9.000	L1	19.5
4.897500	26.27	---	56.00	29.73	1000.0	9.000	L1	19.6
4.906500	---	13.27	46.00	32.73	1000.0	9.000	L1	19.6
5.766000	---	14.42	50.00	35.58	1000.0	9.000	L1	19.6
5.824500	27.82	---	60.00	32.18	1000.0	9.000	L1	19.6
29.796000	---	14.01	50.00	35.99	1000.0	9.000	L1	21.0
29.886000	22.67	---	60.00	37.33	1000.0	9.000	L1	21.0

150k-30MHz Conducted Emission Test


EUT Information

EUT Name:	DC Venetian Blinds Drive
Model	DVQ24WE/S-0.2/28
Client:	Ningbo Dooya Mechanic & Electronic Technology Co., Ltd
Op Cond	Transmit mode, DC 8V power on by adapter
Operator:	Tianji XU
Standard	FCC Part 15.207(a)
Sample No.:	SHA-897429-8

Scan Setup: Voltage with 2-Line-LISN pre [EMI conducted]

Hardware Setup:	Voltage with 2-Line-LISN
Receiver:	[ESR 3]
Level Unit:	dBuV

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
9 kHz - 150 kHz	100 Hz	PK+	200 Hz	0.02 s	0 dB
150 kHz - 30 MHz	4.5 kHz	PK+; AVG	9 kHz	0.01 s	0 dB

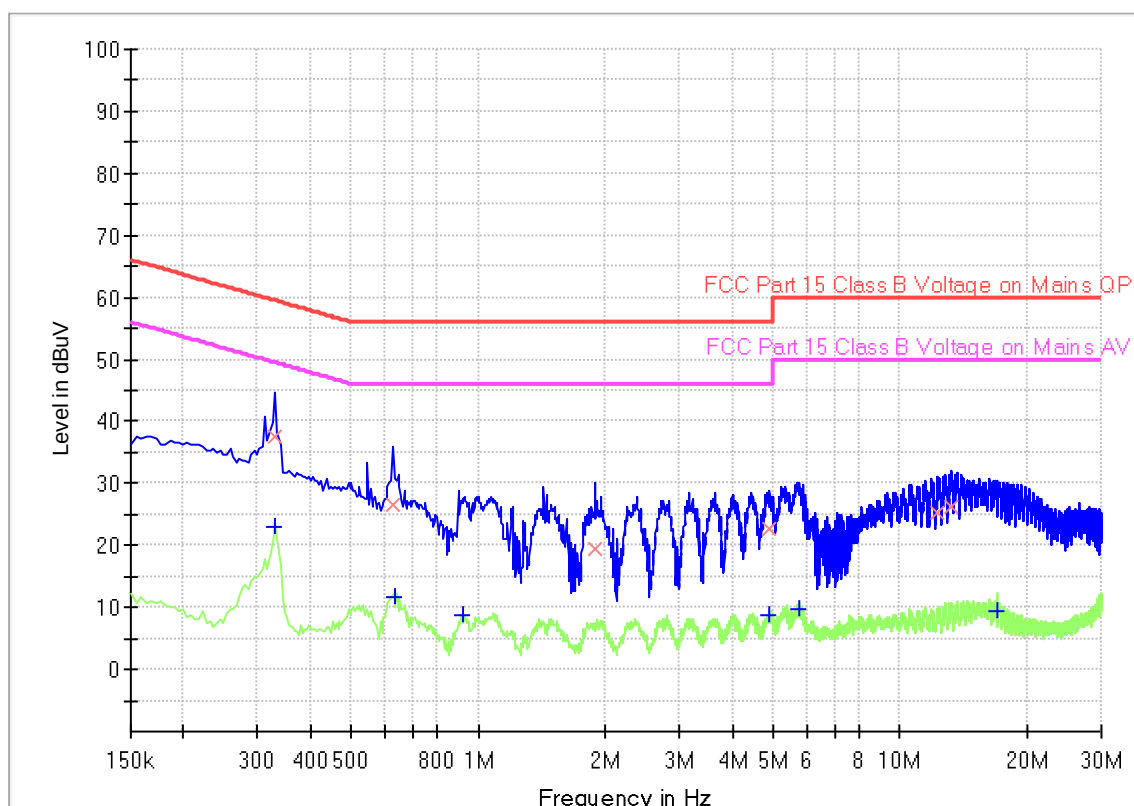

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)
0.330000	---	23.16	49.45	26.29	1000.0	9.000	N	19.4
0.330000	37.50	---	59.45	21.95	1000.0	9.000	N	19.4
0.627000	26.51	---	56.00	29.49	1000.0	9.000	N	19.5
0.631500	---	11.64	46.00	34.36	1000.0	9.000	N	19.5
0.919500	---	8.81	46.00	37.19	1000.0	9.000	N	19.5
1.891500	19.58	---	56.00	36.42	1000.0	9.000	N	19.5
4.884000	22.64	---	56.00	33.36	1000.0	9.000	N	19.6
4.893000	---	8.71	46.00	37.29	1000.0	9.000	N	19.6
5.752500	---	9.88	50.00	40.12	1000.0	9.000	N	19.6
12.313500	25.15	---	60.00	34.85	1000.0	9.000	N	19.8
13.177500	26.36	---	60.00	33.64	1000.0	9.000	N	19.8
17.065500	---	9.54	50.00	40.46	1000.0	9.000	N	20.1

10.2 The Field strength of Emissions

Test Method

- 1: The EUT was placed on a turn table which is 1.5m above ground plane for above 1GHz and 0.8m above ground for below 1GHz at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- 2: The EUT was set 3 meters away from the interference – receiving antenna, which was mounted on the top of a variable – height antenna tower.
- 3: The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- 4: For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- 5: Use the following spectrum analyzer settings According to C63.10:
9kHz -150kHz
RBW = 200Hz, VBW = 1kHz for peak measurement, Sweep = auto,
Detector function = peak, Trace = max hold.
150kHz - 30MHz
RBW = 10 kHz, VBW = 30 kHz for peak measurement, Sweep = auto,
Detector function = peak, Trace = max hold.
30MHz - 1GHz
RBW = 100 kHz, VBW = 300 kHz for peak measurement, Sweep = auto,
Detector function = peak, Trace = max hold.
For Above 1GHz
RBW = 1MHz, VBW $\geq$ 3RBW for peak measurement, Sweep = auto, Detector function = peak,
Trace = max hold.

Limit

1. FCC Limit: In addition to the provisions of § 15.205, the field strength of emissions from intentional radiators operated under this section shall not exceed the following:

Fundamental frequency (MHz)	Field Strength of Fundamental (Microvolts /meter)	Field Strength of spurious emissions ((Microvolts /meter)
40.66-40.70	2,250	225
70-130	1,250	125
130-174	1,250 to 3,750 *	125 to 375 *
174-260	3,750	375
260-470	3,750 to 12, 500*	375 to 1,250*
Above 470	12,500	1,250
*Linear interpolation with frequency		

(a) The above field strength limits are specified at a distance of 3 meters. The tighter limits apply at the band edges.

(b) Intentional radiators operating under the provisions of this section shall demonstrate compliance with the limits on the field strength of emissions, as shown in the above table, based on the average value of the measured emissions. As an alternative, compliance with the limits in the above table may be based on the use of measurement instrumentation with a CISPR quasi-peak detector. The specific method of measurement employed shall be specified in the application for equipment authorization. If average emission measurements are employed, the provisions in § 15.35 for averaging pulsed emissions and for limiting peak emissions apply. Further, compliance with the provisions of § 15.205 shall be demonstrated using the measurement instrumentation specified in that section.

(c) The limits on the field strength of the spurious emissions in the above table are based on the fundamental frequency of the intentional radiator. Spurious emissions shall be attenuated to the average (or, alternatively, CISPR quasi-peak) limits shown in this table or to the general limits shown in § 15.209, whichever limit permits a higher field strength.

Limits for 15.209 Radiated emission limits

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Field strength of Emissions

According to C63.10, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement, so AV emission value did not show in below table if the peak value complies with average limit.

Radiated Emission (Power by DC 12V)									
Value	Emissions	E-Field	PK	Corr.	Average	AV	Limit		Emission Type
	Frequency	Polarity	Emission	Factor	Factor	Emission	dBμV/m	Margin	
	MHz		dBμV/m	dB	dB	dBμV/m		dB	
Below 1GHz									
PK	433.92	H	85.90	25.70	0.00	/	100.80	14.90	Fundamental
AV	433.92	H	85.90	/	-22.62	63.28	80.80	17.52	Fundamental
PK	433.92	V	81.10	25.70	0.00	/	100.80	19.70	Fundamental
AV	433.92	V	81.10	/	-22.62	58.48	80.80	22.32	Fundamental
PK	867.84	H	35.32	33.00	0.00	/	80.80	45.48	Spurious
AV	867.84	H	35.45	/	-22.62	12.83	60.80	47.97	Spurious
PK	867.84	V	36.19	33.20	0.00	/	80.80	44.61	Spurious
AV	867.84	V	36.23	/	-22.62	13.61	60.80	47.19	Spurious
Above 1GHz									
PK	1624.10	H	33.89	-16.00	0.00	/	74.00	40.11	Restricted band*
AV	1624.10	H	33.89	/	-22.62	11.27	54.00	42.73	Restricted band*
PK	1735.50	H	45.20	-13.60	0.00	/	80.80	35.60	Spurious
AV	1735.50	H	45.20	/	-22.62	22.58	60.80	38.22	Spurious
PK	1597.11	V	33.69	-16.00	0.00	/	74.00	40.31	Restricted band*
AV	1597.11	V	31.36	/	-22.62	8.74	54.00	45.26	Restricted band*
PK	1735.50	V	51.40	-13.60	0.00	/	80.80	29.40	Spurious
AV	1735.50	V	51.40	/	-22.62	28.78	60.80	32.02	Spurious

Remark:

1: AV Emission Level= PK Emission Level+20log(dutycycle)

2: Data of measurement within this frequency range shown "/" in the table above means the reading of emissions are attenuated more than 20db below the permissible limits or the field strength is too small to be measured.

3: "*" means the emission(s) appear within the restrict bands shall follow the requirement of section 15.205.

4: Level= Reading Level + Correction Factor

Correction Factor = Antenna Factor + Cable Loss- Amplifier Gain


(The Reading Level is recorded by software which is not shown in the sheet)

Duty Cycle =7.391(ms)/100(ms) =7.391%


Duty Cycle Factor =20log (Duty Cycle) =-22.62



Duty Cycle

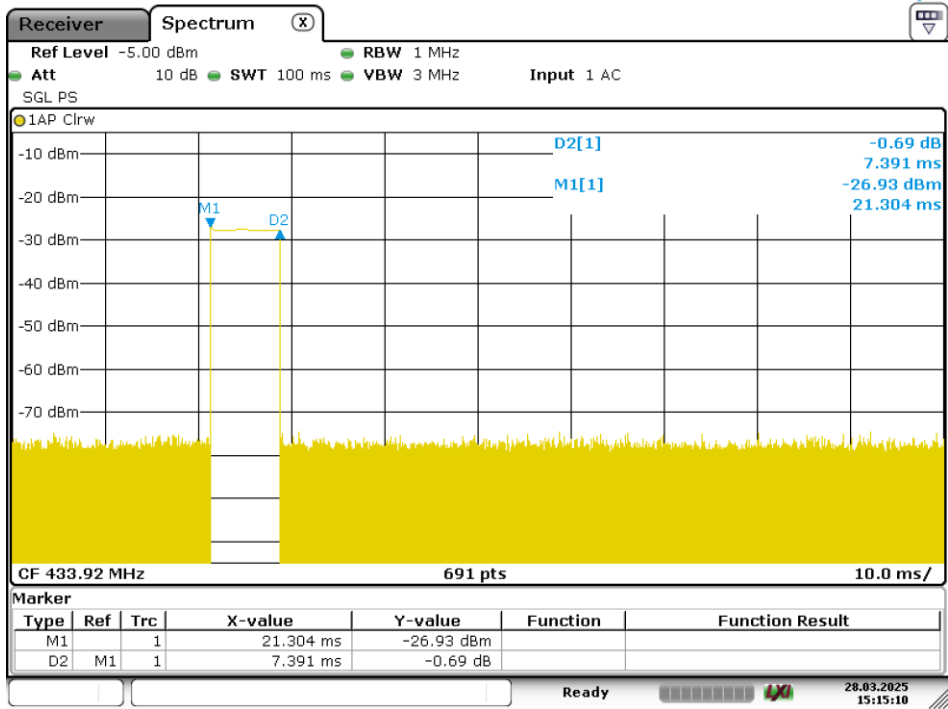

Date: 28.MAR.2025 15:15:11

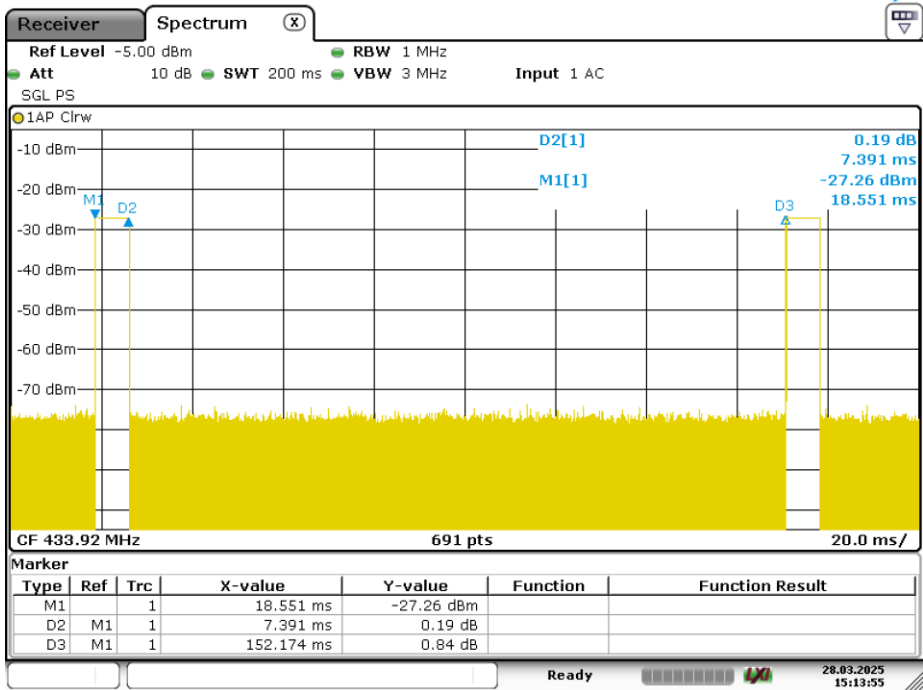

Date: 28.MAR.2025 15:13:55

Radiated Emission (Power by DC 8V)									
Value	Emissions	E-Field	PK	Corr.	Average	AV	Limit		Emission Type
	Frequency	Polarity	Emission	Factor	Factor	Emission	dBµV/m	Margin	
	MHz		dBµV/m	dB	dB	dBµV/m		dB	
Below 1GHz									
PK	433.92	H	91.10	25.70	0.00	/	100.80	9.70	Fundamental
AV	433.92	H	91.10	/	-22.79	68.31	80.80	12.49	Fundamental
PK	433.92	V	82.40	25.70	0.00	/	100.80	18.40	Fundamental
AV	433.92	V	82.40	/	-22.79	59.61	80.80	21.19	Fundamental
PK	867.84	H	35.22	33.00	0.00	/	80.80	45.58	Spurious
AV	867.84	H	35.22	/	-22.79	12.43	60.80	48.37	Spurious
PK	112.20	V	40.25	18.00	0.00	/	43.50	3.25	Restricted band*
QP	112.20	V	30.20	18.00	/	/	43.50	13.30	Restricted band*
PK	867.84	V	36.19	33.20	0.00	/	80.80	44.61	Spurious
AV	867.84	V	36.23	/	-22.79	13.44	60.80	47.36	Spurious
Above 1GHz									
PK	1124.50	H	31.09	-16.00	0.00	/	74.00	42.91	Restricted band*
AV	1124.50	H	31.09	/	-22.79	8.30	54.00	45.70	Restricted band*
PK	1737.00	H	43.31	-13.60	0.00	/	80.80	37.49	Spurious
AV	1737.00	H	43.31	/	-22.79	20.52	60.80	40.28	Spurious
PK	1625.50	V	33.56	-16.00	0.00	/	74.00	40.44	Restricted band*
AV	1625.50	V	33.56	/	-22.79	10.77	54.00	43.23	Restricted band*
PK	1736.50	V	40.21	-13.80	0.00	/	80.80	40.59	Spurious
AV	1736.50	V	40.21	/	-22.79	17.42	60.80	43.38	Spurious

Remark:

1: AV Emission Level= PK Emission Level+20log(dutycycle)

2: Data of measurement within this frequency range shown "/" in the table above means the reading of emissions are attenuated more than 20db below the permissible limits or the field strength is too small to be measured.

3: "*" means the emission(s) appear within the restrict bands shall follow the requirement of section 15.205.

4: Level= Reading Level + Correction Factor

Correction Factor = Antenna Factor + Cable Loss- Amplifier Gain


(The Reading Level is recorded by software which is not shown in the sheet)

Duty Cycle =7.246(ms)/100(ms) =7.246%


Duty Cycle Factor =20log (Duty Cycle) =-22.79



Duty Cycle

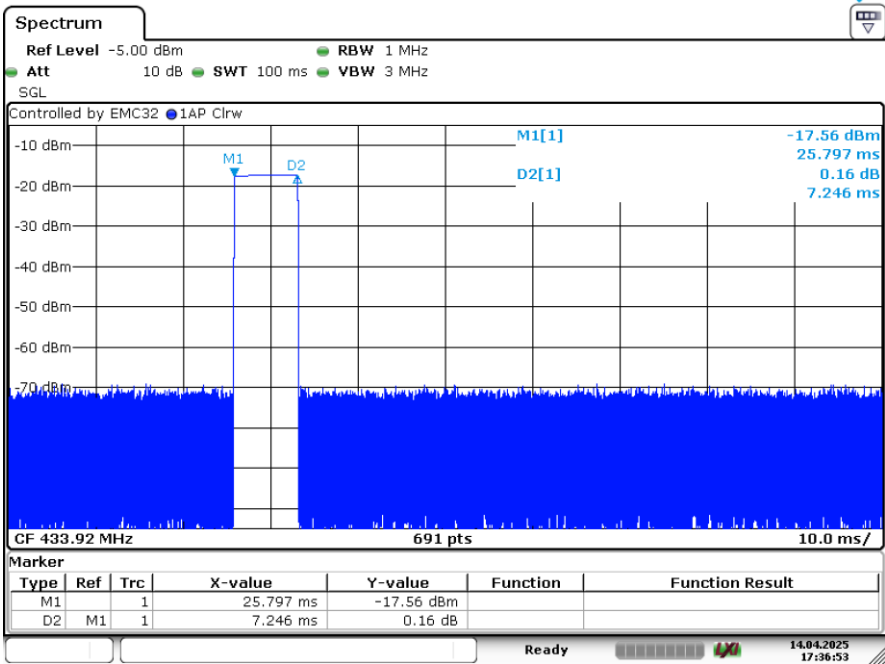

Date: 14.APR.2025 17:36:53

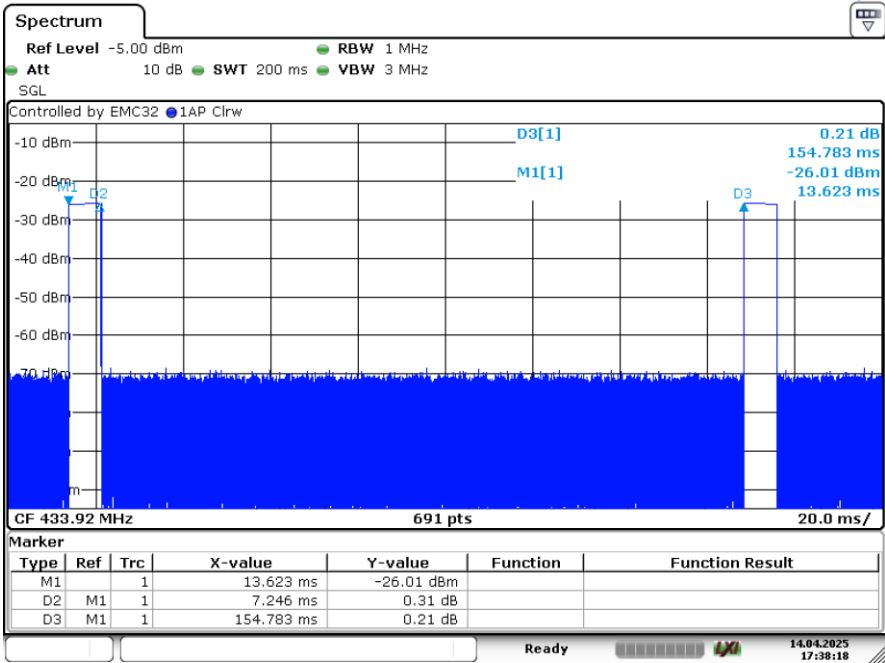

Date: 14.APR.2025 17:38:18

10.320 Bandwidth Measurement

Test Method

1. Set to the maximum power setting and enable the EUT transmit continuously.
2. Use the following test receiver settings:
Span = approximately 5 times the 20dB bandwidth, centered on a hopping channel
RBW =1% to 5% of the 20dB bandwidth of the emission being measured, VBW $\geq$ RBW,
Sweep = auto, Detector function = peak, Trace = max hold
3. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth. Record the results.
4. Repeat above procedures until all frequencies measured were complete.


Limit

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70MHz and below 900MHz. For devices operating above 900MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20dB down from the modulated carrier.

The limit for the EUT = 0.25% * 433.92 MHz = 1084.8 kHz


Test Result

Power	Channel	20dB Bandwidth (KHz)	Limit (KHz)
12V DC	1	81.699	≤1084.8

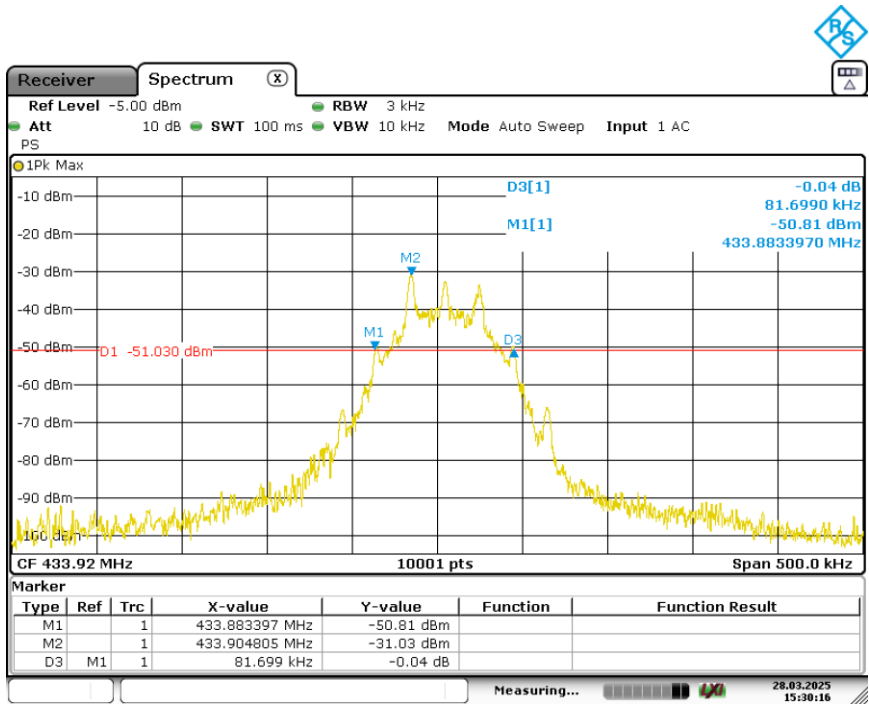

Date: 28.MAR.2025 15:30:17

Power	Channel	20dB Bandwidth (KHz)	Limit (KHz)
8V DC	1	82.192	≤1084.8

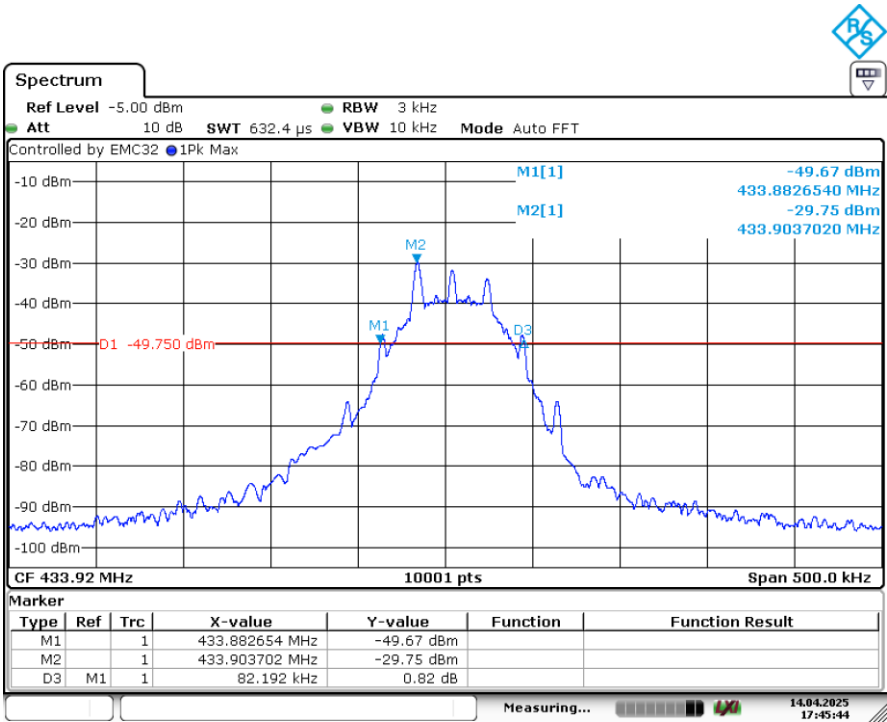

Date: 14.APR.2025 17:45:44

10.4 Deactivation Time

Test Method

1. The EUT was placed on 0.8m height table, the RF output of EUT was connected to the test receiver by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT in transmitting mode.
3. Set center frequency of spectrum analyzer=operating frequency.
4. Set the spectrum analyzer as $RBW \geq OBW$, $VBW \geq RBW$, Span=0Hz, detector=peak.
5. Repeat above procedures until all frequency measured was complete.

Limit

According to FCC Part 15.231 (a), the transmitter shall be complied the following requirements:

(1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.


(√) (2) A transmitter activated automatically shall cease transmission within 5 seconds after activation.

(3) Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions, including data, to determine system integrity of transmitters used in security or safety applications are allowed if the total duration of transmissions does not exceed more than two seconds per hour for each transmitter. There is no limit on the number of individual transmissions, provided the total transmission time does not exceed two seconds per hour.




Test Result

Power	Frequency	Deactivation Time	Limit	Result
12 V DC	433.92MHz	304.3ms	≤5S	Pass

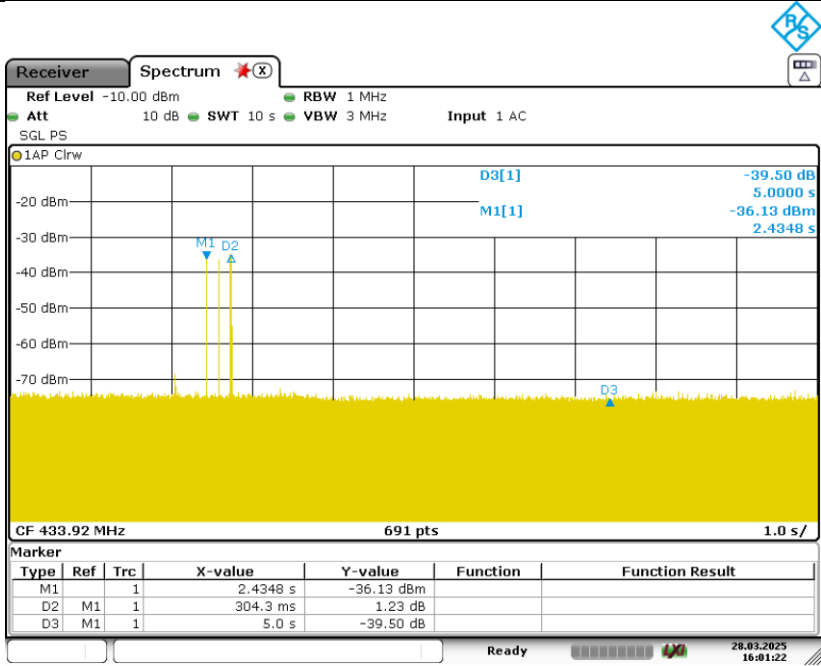

Date: 28.MAR.2025 16:01:22

Power	Frequency	Deactivation Time	Limit	Result
8 V DC	433.92MHz	318.8ms	≤5S	Pass

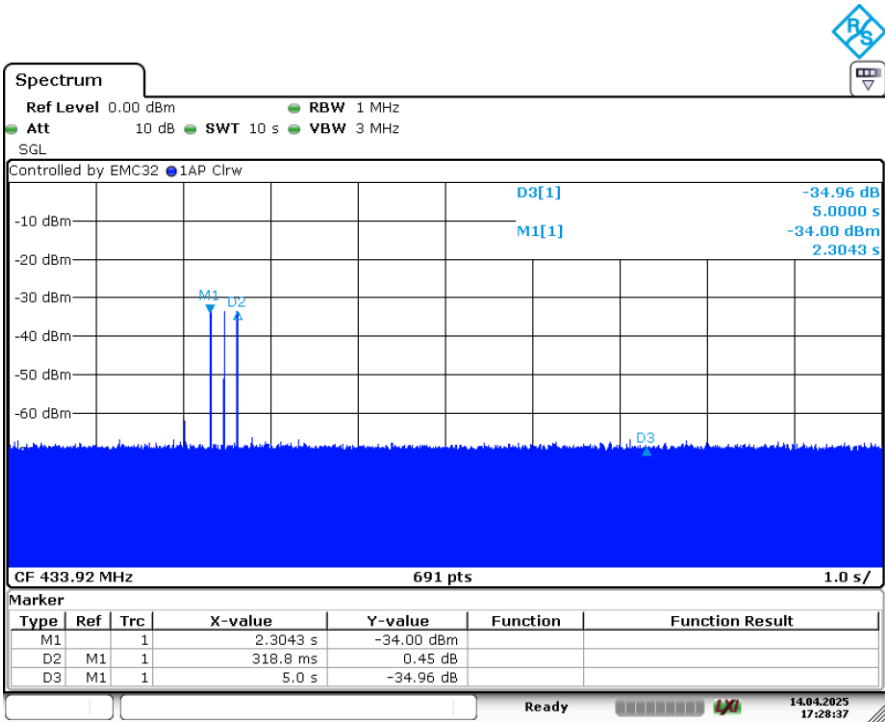

Date: 14.APR.2025 17:28:37

11 Test Equipment List

List of Test Instruments

	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	CAL. DATE	CAL. DUE DATE
RE	EMI Test Receiver	Rohde & Schwarz	ESR3	101906	2024-8-1	2025-7-31
	Signal Analyzer	Rohde & Schwarz	FSV40	101091	2024-8-1	2025-7-31
	Trilog Super Broadband Test Antenna	Schwarzbeck	VULB 9168	961	2024-8-30	2025-8-29
	Horn Antenna	Rohde & Schwarz	HF907	102393	2024-4-14	2025-4-13
	Horn Antenna	Rohde & Schwarz	HF907	102393	2025-4-14	2026-4-13
	Pre-amplifier	Shenzhen HzEMC	HPA-081843	HYP A23026	2024-4-16	2025-4-15
	Loop antenna	Rohde & Schwarz	HFH2-Z2	100443	2024-6-26	2025-6-25
	Double Ridged Horn Antenna	ETS-Lindgren	3116C	00246076	2023-7-7	2026-7-6
	3m Semi-anechoic chamber	TDK	9X6X6	----	2024-5-8	2027-5-7
CE	EMI Test Receiver	Rohde & Schwarz	ESR3	101907	2024-8-1	2025-7-31
	LISN	Rohde & Schwarz	ENV216	101924	2024-8-1	2025-7-31

Measurement Software Information			
Test Item	Software	Manufacturer	Version
RE	EMC 32	Rohde & Schwarz	V10.50.40
CE	EMC 32	Rohde & Schwarz	V9.15.03



12 System Measurement Uncertainty

For a 95% confidence level, the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 were:

Items	Extended Uncertainty
Conducted Disturbance	9kHz to 30MHz, 3.16dB (AMN)
Radiated Disturbance	9kHz to 30MHz, 3.52dB 30MHz to 1GHz, 5.03dB (Horizontal) 5.12dB (Vertical) 1GHz to 18GHz, 5.49dB 18GHz to 40GHz, 5.63dB

Measurement Uncertainty Decision Rule:

Determination of conformity with the specification limits is based on the decision rule according to IEC Guide 115: 2023, clause 4.3.3.

-----End of Test Report-----