


# Application for Grant of Certification Aviation Communications Transceiver Per CFR47, Part 87 and RSS-141

**Model: TY92**  
**FCC ID: VZI00879**  
**IC: 10614A-00879**  
**118-136.992 MHz**

For

**Trig Avionics Limited**  
**Heriot Watt Research Park**  
**Riccarton**  
**Currie EH14 4AP United Kingdom**


Test Report Number 120820A

Authorized Signatory:   
Scot D. Rogers

Rogers Labs, Inc.  
4405 West 259<sup>th</sup> Terrace  
Louisburg, KS 66053  
Phone/Fax: (913) 837-3214  
Revision 1

Trig Avionics Limited  
Model: TY92  
Test #: 120820A  
Test to: CFR47 Parts 2, 87 and RSS-141  
File: Trig Avionics TY92 TstRpt 1200820A

IC: 10614A-00879  
FCC ID: VZI00879  
SN: 0004  
Date: October 25, 2012  
Page 1 of 29



# Rogers Labs, Inc.

4405 West 259th Terrace  
Louisburg, KS 66053  
Phone / Fax (913) 837-3214

## Test Report For Application of Certification For Trig Avionics Limited

Heriot Watt Research Park  
Riccarton  
Currie EH14 4AP United Kingdom

Mr. Andrew Davis  
CEO

Model: TY92

Aviation Communications Transceiver  
Frequency Range: 118-136.992 MHz

FCC ID: VZI00879  
IC: 10614A-00879

Test Date: August 20, 2012

Certifying Engineer:

Scot D. Rogers  
Rogers Labs, Inc.  
4405 West 259th Terrace  
Louisburg, KS 66053  
Telephone/Facsimile: (913) 837-3214

This report shall not be reproduced except in full, without the written approval of the laboratory. This report must not be used by the client to claim product endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Rogers Labs, Inc.  
4405 West 259<sup>th</sup> Terrace  
Louisburg, KS 66053  
Phone/Fax: (913) 837-3214  
Revision 1

Trig Avionics Limited  
Model: TY92  
Test #: 120820A  
Test to: CFR47 Parts 2, 87 and RSS-141  
File: Trig Avionics TY92 TstRpt 1200820A

IC: 10614A-00879  
FCC ID: VZI00879  
SN: 0004  
Date: October 25, 2012  
Page 2 of 29

## Table of Contents

<b>TABLE OF CONTENTS.....</b>	<b>3</b>
<b>REVISIONS.....</b>	<b>4</b>
<b>FORWARD .....</b>	<b>5</b>
<b>OPINION / INTERPRETATION OF RESULTS .....</b>	<b>5</b>
<b>APPLICABLE STANDARDS &amp; TEST PROCEDURES .....</b>	<b>5</b>
<b>ENVIRONMENTAL CONDITIONS.....</b>	<b>5</b>
<b>APPLICATION FOR CERTIFICATION.....</b>	<b>6</b>
<b>SYSTEM DESCRIPTION.....</b>	<b>7</b>
<b>UNITS OF MEASUREMENTS .....</b>	<b>7</b>
<b>TEST SITE LOCATIONS .....</b>	<b>7</b>
<b>LIST OF TEST EQUIPMENT .....</b>	<b>8</b>
<b>TRANSMITTER POWER OUTPUT .....</b>	<b>9</b>
<b>Measurements Required .....</b>	<b>9</b>
<b>Test Arrangement.....</b>	<b>9</b>
<b>Transmitter Power Results .....</b>	<b>10</b>
Figure 1 Transmitter Output across Frequency Band.....	10
<b>MODULATION CHARACTERISTICS.....</b>	<b>11</b>
<b>Measurements Required .....</b>	<b>11</b>
<b>Test Arrangement.....</b>	<b>11</b>
<b>Modulation Characteristic Results.....</b>	<b>11</b>
Figure 2 Modulation Characteristics .....	11
Figure 3 Audio Frequency Response / Modulation Characteristics .....	12
Figure 4 Frequency Response of Audio Low pass Filter .....	12
<b>OCCUPIED BANDWIDTH .....</b>	<b>13</b>
<b>Measurements Required .....</b>	<b>13</b>

<b>Test Arrangement .....</b>	<b>13</b>
<b>Occupied Bandwidth Results .....</b>	<b>13</b>
Figure 5 Occupied Band Width Carrier frequency 118.000 MHz .....	14
Figure 6 Occupied Band Width Carrier frequency 127.000 MHz .....	14
Figure 7 Occupied Band Width Carrier frequency 136.975 MHz .....	15
Figure 8 Occupied Band Width Carrier frequency 136.992 .....	15
<b>SPURIOUS EMISSIONS AT ANTENNA TERMINALS.....</b>	<b>16</b>
<b>Measurements Required .....</b>	<b>16</b>
<b>Test Arrangement .....</b>	<b>16</b>
<b>Spurious Emissions at Antenna Terminal Results .....</b>	<b>16</b>
Antenna Port Conducted Spurious Emissions Data .....	17
Figure 9 Spurious Emissions at Antenna Terminal .....	18
Figure 10 Emission Mask.....	18
<b>FIELD STRENGTH OF SPURIOUS RADIATION (UNWANTED EMISSIONS).....</b>	<b>19</b>
<b>Measurements Required .....</b>	<b>19</b>
<b>Test Arrangement .....</b>	<b>19</b>
<b>Spurious Radiated Emission Results.....</b>	<b>20</b>
General Radiated Emissions comparison against unintentional radiator general limits .....	21
<b>FREQUENCY STABILITY .....</b>	<b>22</b>
<b>Measurements Required .....</b>	<b>22</b>
<b>Test Arrangement .....</b>	<b>22</b>
<b>Frequency Stability Results .....</b>	<b>23</b>
<b>ANNEX.....</b>	<b>24</b>
<b>Annex A Measurement Uncertainty Calculations .....</b>	<b>25</b>
<b>Annex B Rogers Labs Test Equipment List .....</b>	<b>26</b>
<b>Annex C Rogers Qualifications.....</b>	<b>27</b>
<b>Annex D FCC Site Registration Letter .....</b>	<b>28</b>
<b>Annex E Industry Canada Site Registration Letter.....</b>	<b>29</b>

## **Revisions**

Revision 1, Issued October 25, 2012

Rogers Labs, Inc.  
4405 West 259<sup>th</sup> Terrace  
Louisburg, KS 66053  
Phone/Fax: (913) 837-3214  
Revision 1

Trig Avionics Limited  
Model: TY92  
Test #: 120820A  
Test to: CFR47 Parts 2, 87 and RSS-141  
File: Trig Avionics TY92 TstRpt 1200820A

IC: 10614A-00879  
FCC ID: VZI00879  
SN: 0004  
Date: October 25, 2012  
Page 4 of 29

## Forward

In accordance with the Federal Communications, Code of Federal Regulations dated October 1, 2010, Part 2 Subpart J, Paragraphs 2.907, 2.911, 2.913, 2.915, 2.925, 2.926, 2.1031 through 2.1057, and Part 87, Subchapter D, Paragraphs 87.131 through 87.147, and Industry Canada RSS-141 Issue 2, June 2010 the following information is submitted for consideration in obtaining Grant of Certification.

## Opinion / Interpretation of Results

Tests Performed	Results
Emissions Tests	
Requirements per CFR47 paragraphs 2.1031-2.1057 and RSS-141, Issue 2	Complies
Requirements per CFR47 paragraphs 87.131 and RSS-141 paragraph 5.1	Complies
Requirements per CFR47 paragraphs 87.133 and RSS-141 paragraph 5.1	Complies
Requirements per CFR47 paragraphs 87.135 and RSS-141 paragraph 5.1	Complies
Requirements per CFR47 paragraphs 87.139 and RSS-141 paragraph 5.2.2	Complies
Requirements per CFR47 paragraphs 87.141 and RSS-141 paragraph 5.1	Complies

## Applicable Standards & Test Procedures

In accordance with the Federal Communications Code of Federal Regulations, dated October 1, 2011, Part 2, Subpart J, Paragraphs 2.907, 2.911, 2.913, 2.925, 2.926, 2.1031 through 2.1057, and applicable paragraphs of Part 87, and RSS-141, Issue 2 the following is submitted for consideration in obtaining Grant of Certification. Test procedures used are the established Methods of Measurement of Radio-Noise Emissions as described in ANSI C63.4-2009.

## Environmental Conditions

Ambient Temperature	23.8° C
Relative Humidity	36%
Atmospheric Pressure	1016.1 mb

Rogers Labs, Inc. 4405 West 259 <sup>th</sup> Terrace Louisburg, KS 66053 Phone/Fax: (913) 837-3214 Revision 1	Trig Avionics Limited Model: TY92 Test #: 120820A Test to: CFR47 Parts 2, 87 and RSS-141 File: Trig Avionics TY92 TstRpt 1200820A	IC: 10614A-00879 FCC ID: VZI00879 SN: 0004 Date: October 25, 2012 Page 5 of 29
--	---	--

## Application for Certification

- 1) Manufacturer: Trig Avionics Limited Heriot Watt Research  
Riccarton  
Currie EH14 4AP  
United Kingdom
- 2) Identification: FCC I.D.: VZI00879      IC:10614A-00879
- 3) Instruction Book: Refer to exhibit for Draft Instruction Manual.
- 4) Emission Type: Emissions designator 6k00A3E (25 kHz) or 5k60A3E (8.33 kHz)
- 5) Frequency Range: 118-136.975 MHz (25 kHz channel operation) and 118—136.992 (8.33 kHz channel operation)
- 6) Operating Power Level: 18.62 watts, 42.7 dBm
- 7) Maximum P<sub>o</sub>: 18.62 Watts delivered from this EUT. Maximum allowable power output of 55 Watts as defined per CFR 47 paragraph 87.131 and RSS-141 paragraph 5.1.
- 8) Power into final amplifying circuitry: Maximum power delivered to final amplifier stage is 100.0 watts, operating at 20 volts at 5.0 amps.
- 9) Tune Up Procedure for Output Power: Refer to Exhibit for Transceiver Alignment Procedure.
- 10) Circuit Diagrams; description of circuits, frequency stability, spurious suppression, and power and modulation limiting: Refer to Exhibit for Circuit information and theory of operation.
- 11) Photograph or drawing of the Identification Plate: Refer to Exhibit for Photograph or Drawing.
- 12) Drawings of Construction and Layout: Refer to Exhibit for Drawings of Components Layout and Chassis Drawings.
- 13) Detail Description of Digital Modulation: Not applicable.
- 14) Data required by CFR47 paragraphs 2.1046 through 2.1057 are contained in this application.
- 15) External power amplifier requirements do not apply to this device or application.
- 16) AM broadcast requirements do not apply to this device or application.
- 17) Requirements of CFR47 paragraph 25.129 do not apply to this device or application.
- 18) The device is not a software-defined radio and requirements of 2.944 do not apply to this application.

## System Description

The TY92 is an aeronautical voice communications transceiver. The transmitter operational frequency band is either 118.000 to 136.975 MHz (25 kHz mode) or 118.000 to 136.992 MHz (8.33 kHz mode). The device is marketed as a Remote Mountable Aviation-Band VHF Communications Transceiver offering operation in either 25 kHz channel spacing or 8.33 kHz channel spacing mode.

## Units of Measurements

Line Conducted EMI Data is in dB $\mu$ V; dB referenced to one microvolt.

Radiated EMI Data is in dB $\mu$ V/m; dB/m referenced to one microvolt per meter

Antenna Conducted Data is in dBm, dB referenced to one Milliwatts

## Test Site Locations

Conducted EMI The line conducted emissions testing was performed in a shielded screen room located at Rogers Labs, Inc., 4405 W. 259<sup>th</sup> Terrace, Louisburg, KS.

Radiated EMI The radiated emissions testing was performed at the 3 meters, Open Area Test Site (OATS) located at Rogers Labs, Inc., 4405 W. 259<sup>th</sup> Terrace, Louisburg, KS.

Site Registration Refer to Annex for FCC Site Registration Letter, # 90910, and Industry Canada Site Registration Letter, IC3041A-1.

## List of Test Equipment

A Rohde & Schwarz ESU40 and/or Hewlett Packard 8591EM Spectrum Analyzer was used as the measuring device for the emissions testing of frequencies below 1 GHz. A Rohde & Schwarz ESU40 and/or Hewlett Packard 8562A Spectrum Analyzer was used as the measuring device for testing the emissions at frequencies above 1 GHz. The analyzer settings used are described in the following table. Refer to the appendix for a complete list of test equipment.

Analyzer Settings		
AC Line Conducted Emissions:		
RBW	AVG. BW	Detector Function
9 kHz	30 kHz	Peak/Quasi Peak
Radiated Emissions 30-1000 MHz		
RBW	AVG. BW	Detector Function
100 kHz	100 kHz	Peak
120 kHz	300 kHz	Peak/Quasi Peak
Radiated Emissions Above 1000 MHz		
RBW	Video BW	Detector Function
1 MHz	1 MHz	Peak / Average

<u>Equipment</u>	<u>Manufacturer</u>	<u>Model</u>	<u>Band</u>	<u>Cal Date</u>	<u>Due</u>
<input type="checkbox"/> LISN	Comp. Design	FCC-LISN-2-MOD.CD	.15-30MHz	10/11	10/12
<input checked="" type="checkbox"/> Antenna	ARA	BCD-235-B	20-350MHz	10/11	10/12
<input checked="" type="checkbox"/> Antenna	EMCO	3147	200-1000MHz	10/11	10/12
<input checked="" type="checkbox"/> Antenna	Com Power	AH-118	1-18 GHz	10/11	10/12
<input type="checkbox"/> Antenna	Standard	FXRY638A	10-18 GHz	3/12	5/13
<input checked="" type="checkbox"/> Antenna	EMCO	6509	.001-30 MHz	2/12	2/13
<input type="checkbox"/> Antenna	EMCO	3143	20-1200 MHz	5/12	5/13
<input checked="" type="checkbox"/> Antenna	Sunol	JB-6	30-1000 MHz	5/12	5/13
<input type="checkbox"/> Analyzer	HP	8591EM	9kHz-1.8GHz	5/12	5/13
<input type="checkbox"/> Analyzer	HP	8562A	9kHz-110GHz	5/12	5/13
<input checked="" type="checkbox"/> Analyzer	Rohde & Schwarz	ESU40	20Hz-40GHz	5/12	5/13
<input checked="" type="checkbox"/> Amplifier	Com-Power	PA-010	100Hz-30MHz	10/11	10/12
<input checked="" type="checkbox"/> Amplifier	Com-Power	CPPA-102	1-1000 MHz	10/11	10/12
<input checked="" type="checkbox"/> Amplifier	Com-Power	PA-22	0.5-22 GHz	10/11	10/12

Rogers Labs, Inc.  
 4405 West 259<sup>th</sup> Terrace  
 Louisburg, KS 66053  
 Phone/Fax: (913) 837-3214  
 Revision 1

Trig Avionics Limited  
 Model: TY92  
 Test #: 120820A  
 Test to: CFR47 Parts 2, 87 and RSS-141  
 File: Trig Avionics TY92 TstRpt 1200820A

IC: 10614A-00879  
 FCC ID: VZI00879  
 SN: 0004  
 Date: October 25, 2012  
 Page 8 of 29


## Transmitter Power Output

### ***Measurements Required***

Measurements shall be made to establish the radio frequency power delivered by the transmitter into the standard output termination. The power output shall be monitored and recorded and no adjustment shall be made to the transmitter after the test has begun, except as noted below:

If the power output is adjustable, measurements shall be made for the highest and lowest power levels. Output transmitter power is not user selectable but installation defined. The design offers operation as a nominal 16-watt output power.

### ***Test Arrangement***




The radio frequency power output was measured at the antenna terminal by placing 16-dB attenuation in the antenna line and observing the emission with the spectrum analyzer. The spectrum analyzer offered an impedance of  $50\Omega$  to match the impedance of the standard antenna. A Rohde & Schwarz ESU40 Spectrum Analyzer was used to measure the radio frequency power at the antenna port. Data was taken in dBm and converted to watts as shown in the following Table. Refer to Figure 1 showing maximum output power of the transmitter. Data was taken per CFR47 Paragraph 2.1046(a) and applicable paragraphs of Part 87 and RSS-141.

$$\begin{aligned} P_{\text{dBm}} &= \text{power in dB above 1 milliwatt} \\ \text{Milliwatts} &= 10^{(P_{\text{dBm}}/10)} \\ \text{Watts} &= (\text{Milliwatts})(0.001)(\text{W/mW}) \\ \text{Milliwatts} &= 10^{(42.70/10)} \\ &= 18,620.9 \text{ mW} \\ &= 18.62 \text{ Watts Peak power} \end{aligned}$$

## Transmitter Power Results

Frequency	Input Power	P <sub>dBm</sub>	P <sub>mw</sub>	P <sub>w</sub>
118.000	28 V <sub>dc</sub>	42.42	17,458.2	17.46
127.000	28 V <sub>dc</sub>	42.70	18,620.9	18.62
136.975	28 V <sub>dc</sub>	42.51	17,823.8	17.82
136.99167	28 V <sub>dc</sub>	42.13	16,330.5	16.33

The EUT demonstrated compliance with specifications of CFR47 Paragraph 2.1046(a) and applicable Parts of 2 and 87.131 and RSS-141 paragraph 5.1. There are no deviations to the specifications.

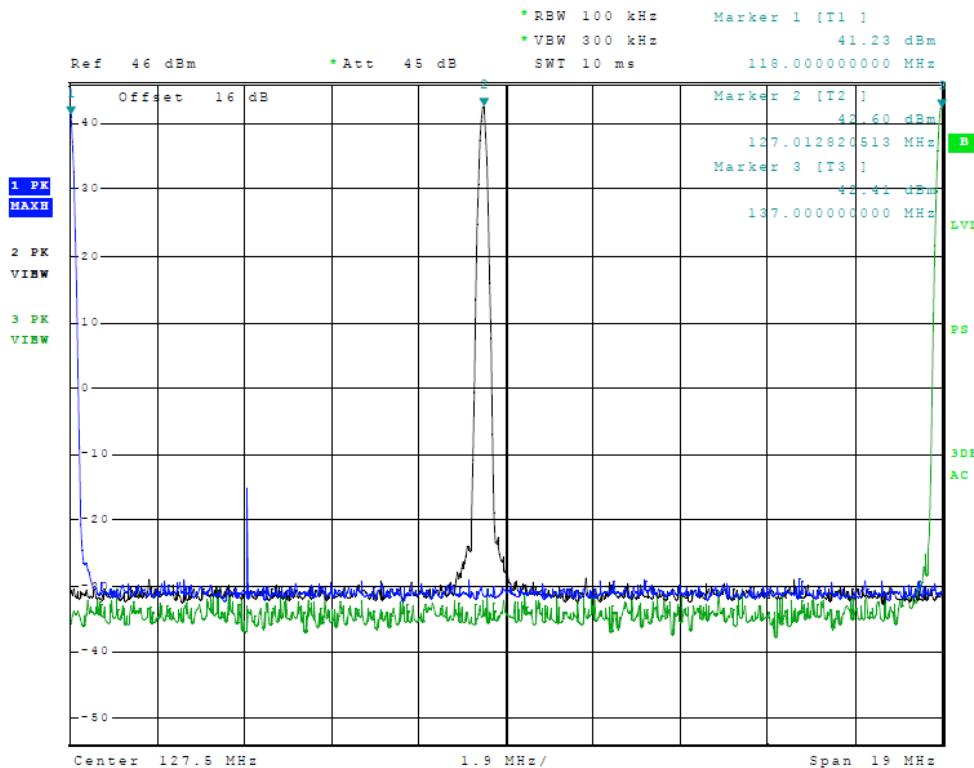


**Figure 1 Transmitter Output across Frequency Band**

## Modulation Characteristics

### Measurements Required

A curve or equivalent data, which shows that the equipment will meet the modulation requirements of the rules, under which the equipment is licensed, shall be submitted. The radio frequency output was coupled to a Spectrum Analyzer and a modulation meter. The spectrum analyzer was used to observe the radio frequency spectrum with the transmitter operating in its various modes. The modulation meter was used to measure the percent modulation.

### Test Arrangement

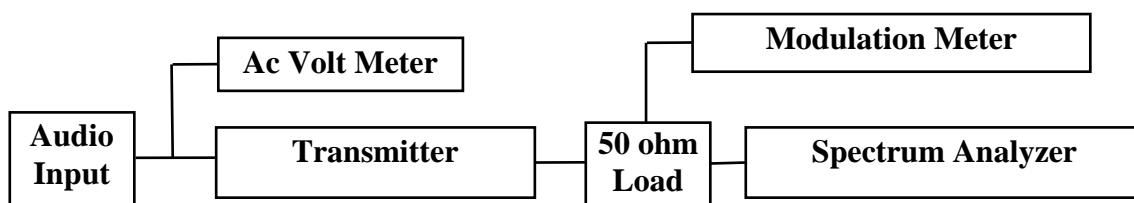

### Modulation Characteristic Results

Figure 2 shows the modulation characteristics of six frequencies while the input voltage was varied. The frequency is held constant and the percent modulation is read from the modulation meter.


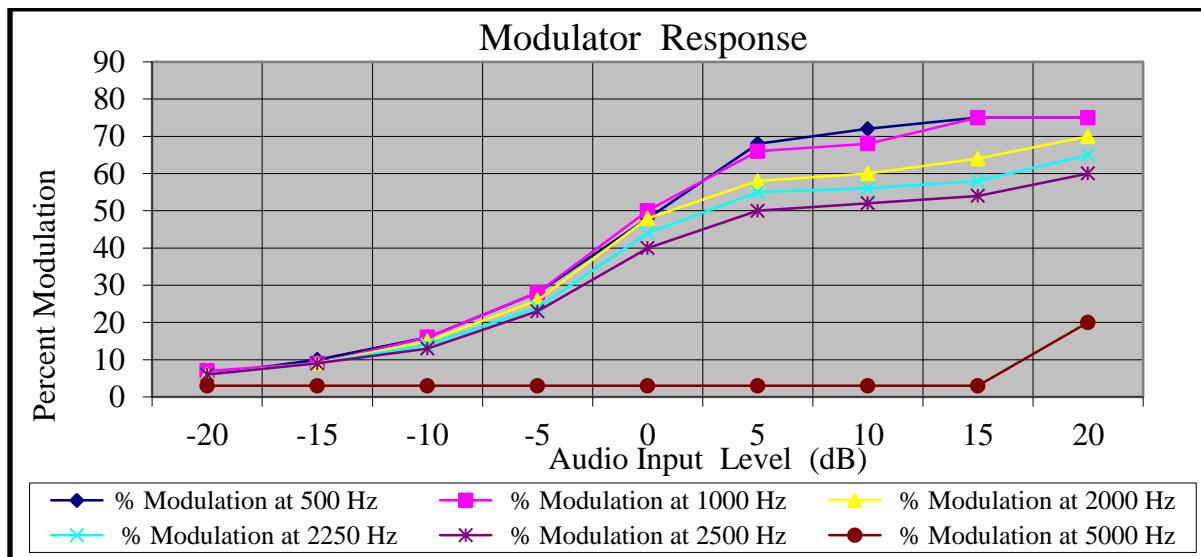



Figure 2 Modulation Characteristics

Figure 3 displays the graph made showing the audio frequency response of the modulator. The frequency generator was set to 1 kHz frequency and injected into the audio input port of the EUT. The input voltage amplitude was adjusted to obtain 50% modulation at 1000 Hz. This level was then taken as the 0-dB reference. The frequency of the generator was then varied and the output voltage level was adjusted to maintain the 50% modulation. The output level required for 50% modulation then recorded. This level was normalized to the level required for 50% modulation at 1000 Hz.

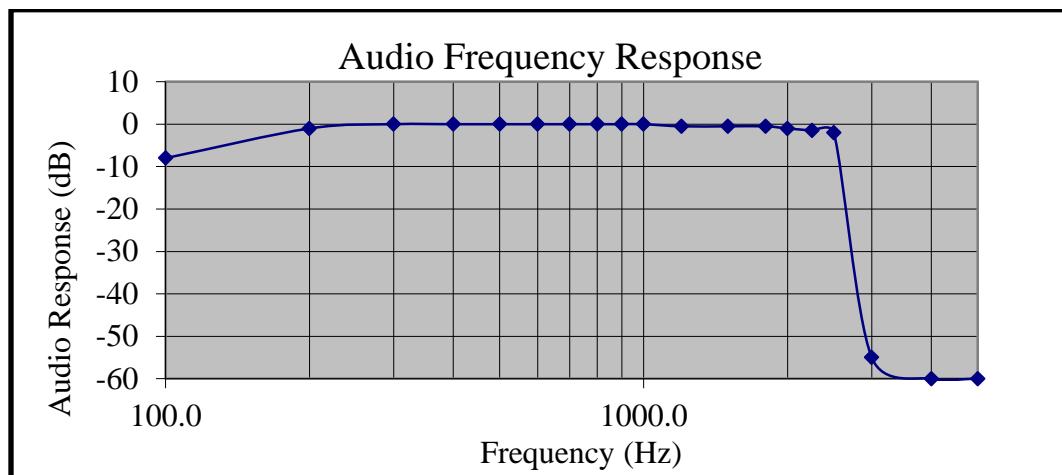

**Figure 3 Audio Frequency Response / Modulation Characteristics**

Figure 4 shows the frequency response of the audio low pass filter.

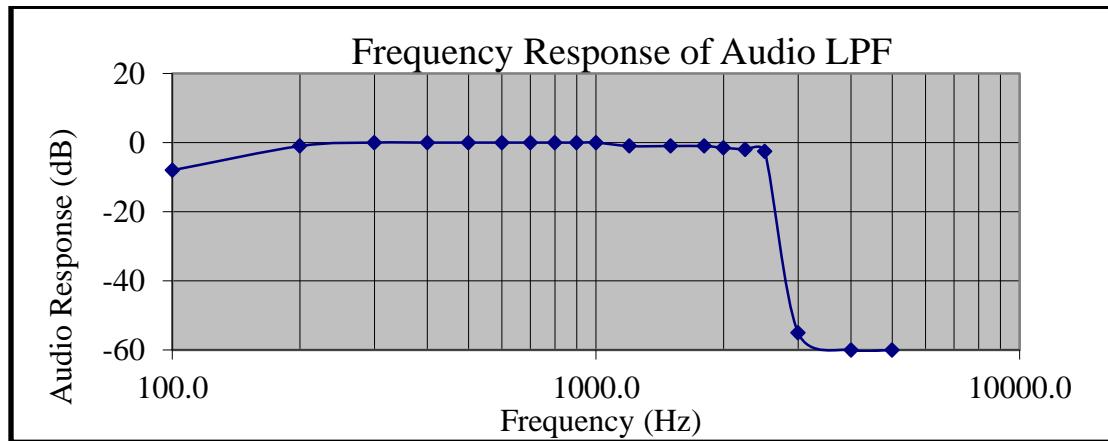

**Figure 4 Frequency Response of Audio Low pass Filter**


The EUT demonstrated compliance with specifications of CFR47 Paragraph 2.1046(a) and applicable Parts of 2 and 87.141 and RSS-141. There are no deviations to the specifications.

## Occupied Bandwidth

### Measurements Required

The occupied bandwidth, that is the frequency bandwidth such that below its lower and above its upper frequency limits, the mean powers radiated are equal to 0.5 percent of the total mean power radiated by a given emission.

### Test Arrangement



A Rohde & Schwarz ESU 40 spectrum analyzer was used to observe the radio frequency spectrum with the transmitter operating in normal modes. Characteristics for audio communications were obtained with the EUT modulated by a frequency of 2500 Hz at a level 16 dB above 50% modulation. Other modulation schemes were measured using appropriate input signals as defined by other standards. The power ratio in dB representing 99% of the total mean power was recorded from the spectrum analyzer measurements. Refer to figures 5 through 8 displaying plots of 99% power occupied bandwidth measurements.

### Occupied Bandwidth Results

Frequency (MHz)	Input Power	Occupied bandwidth (kHz)
118.000	28 V <sub>dc</sub>	5.384
127.000	28 V <sub>dc</sub>	5.417
136.975	28 V <sub>dc</sub>	5.417
136.992	28 V <sub>dc</sub>	5.417

The EUT demonstrated compliance with specifications of CFR47 Paragraph 2.1046(a) and applicable Parts of 2 and 87.135 and RSS-141 paragraph 5.1. There are no deviations to the specifications.

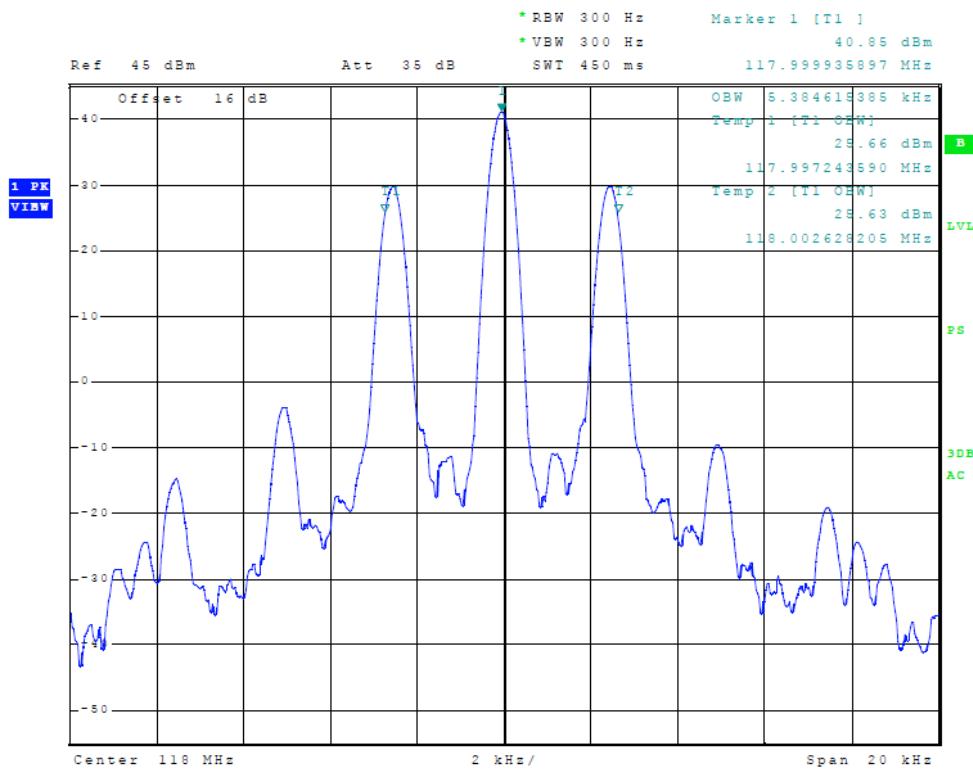


Figure 5 Occupied Band Width Carrier frequency 118.000 MHz

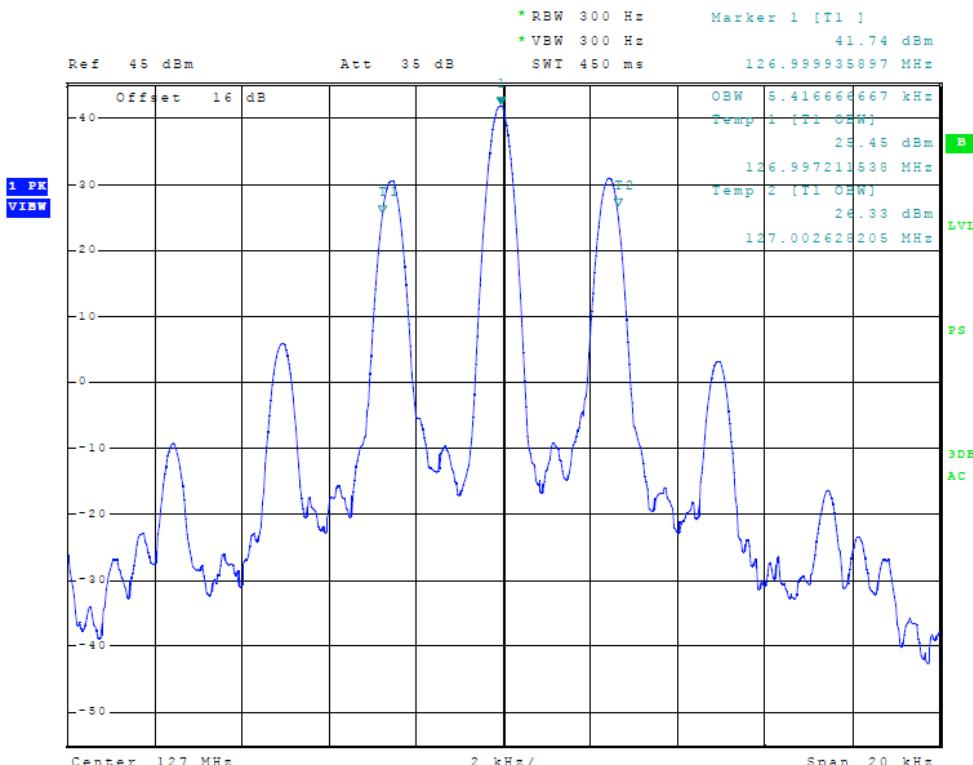


Figure 6 Occupied Band Width Carrier frequency 127.000 MHz

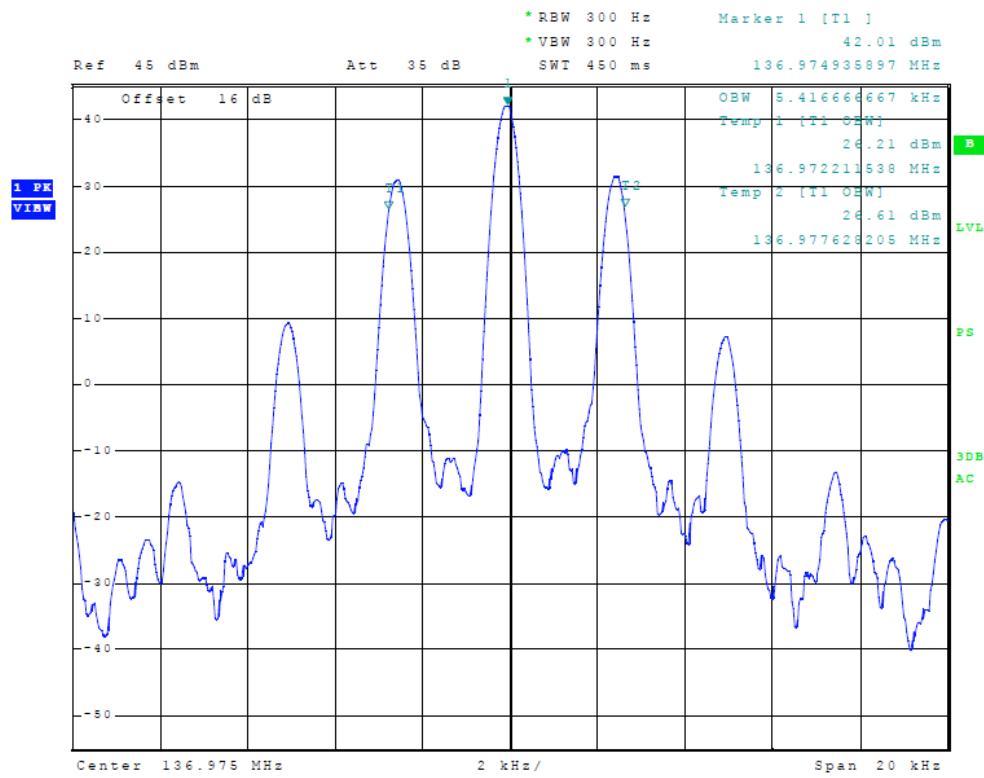


Figure 7 Occupied Band Width Carrier frequency 136.975 MHz

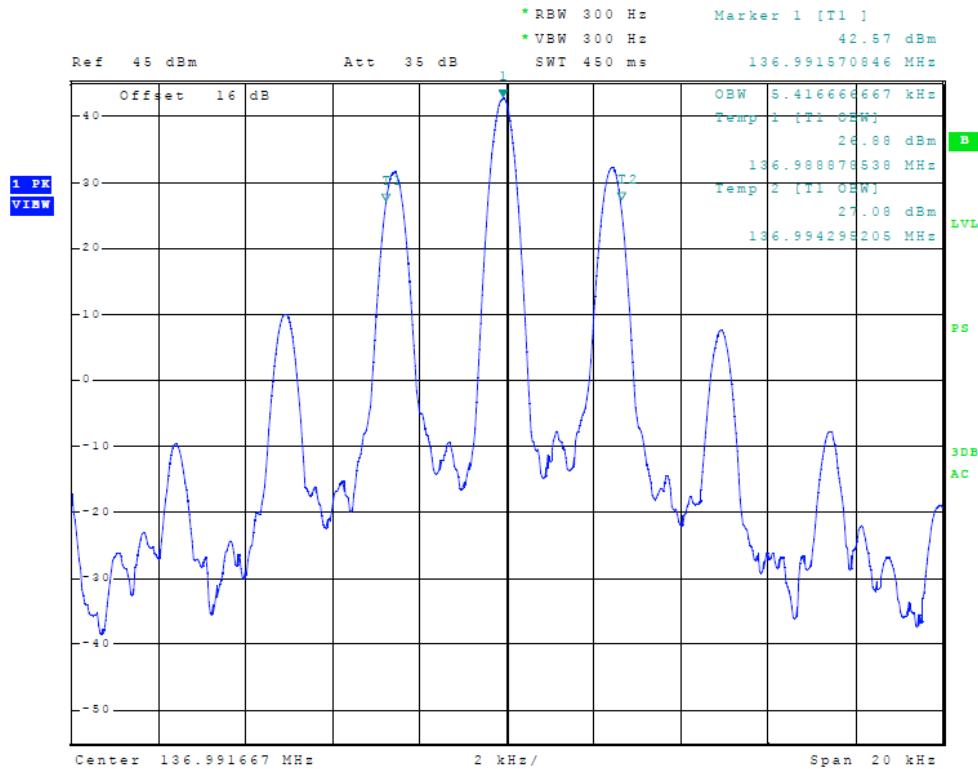


Figure 8 Occupied Band Width Carrier frequency 136.992


## Spurious Emissions at Antenna Terminals

### ***Measurements Required***

The radio frequency voltage or power generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Refer to figures 9 and 10 for plots of spurious emissions at antenna port and emission mask. All spurious emissions must be attenuated at least  $43 + 10\log(P_o)$  below the fundamental emission power level. The following equations represent the calculated attenuation offset level for the equipment.

$$\begin{aligned} 18.62 \text{ Watts} &= 43 + 10 \log (P_o) \\ &= 43 + 10 \log (18.6) \\ &= 55.7 \end{aligned}$$

### ***Test Arrangement***



The radio frequency output was coupled to a Rohde & Schwarz ESU40 Spectrum Analyzer during antenna port conducted emissions measurements. The spectrum analyzer was used to observe the radio frequency spectrum with the transmitter modulated per section 2.1049 and operated in all normal modes. The frequency spectrum from 30 MHz to 1,500 MHz was observed and plots produced of the frequency spectrum displayed on the test equipment. Data was taken per CFR47 2.1051, 2.1057, and applicable paragraphs of Part 87.139, and RSS-141.

### ***Spurious Emissions at Antenna Terminal Results***

The output of the unit was coupled to a Rohde & Schwarz ESU40 Spectrum Analyzer and the frequency emissions were measured. Data was taken as per CFR47 2.1051 and applicable paragraphs of Part 87 and RSS-141. The EUT demonstrated compliance with specifications of CFR47 Paragraph 2.1046(a) and applicable Parts of 2 and 87.139, and RSS-141 paragraph 5. There are no deviations to the specifications.

## Antenna Port Conducted Spurious Emissions Data

Channel MHz	Spurious Freq. (MHz)	Measured Level (dBm)	Level Below Carrier (dBc)
118.000	236.0	-28.33	-70.8
	354.0	-29.06	-71.5
	472.0	-22.12	-64.5
	590.0	-26.22	-68.6
127.000	254.0	-30.01	-72.7
	381.0	-25.35	-68.1
	508.0	-24.22	-66.9
	635.0	-29.29	-72.0
136.975	274.0	-25.90	-68.4
	410.9	-23.87	-66.4
	547.9	-28.71	-71.2
	684.9	-29.42	-71.9
136.99167	274.0	-24.06	-66.2
	411.0	-24.81	-66.9
	548.0	-29.92	-72.1
	685.0	-28.26	-70.4

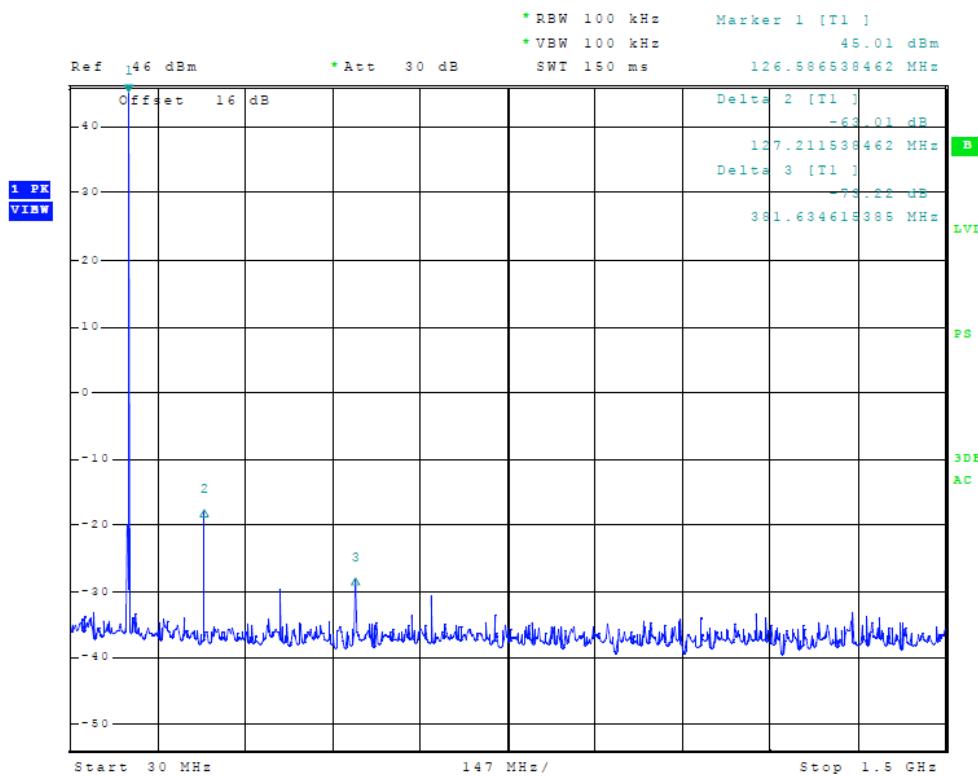


Figure 9 Spurious Emissions at Antenna Terminal

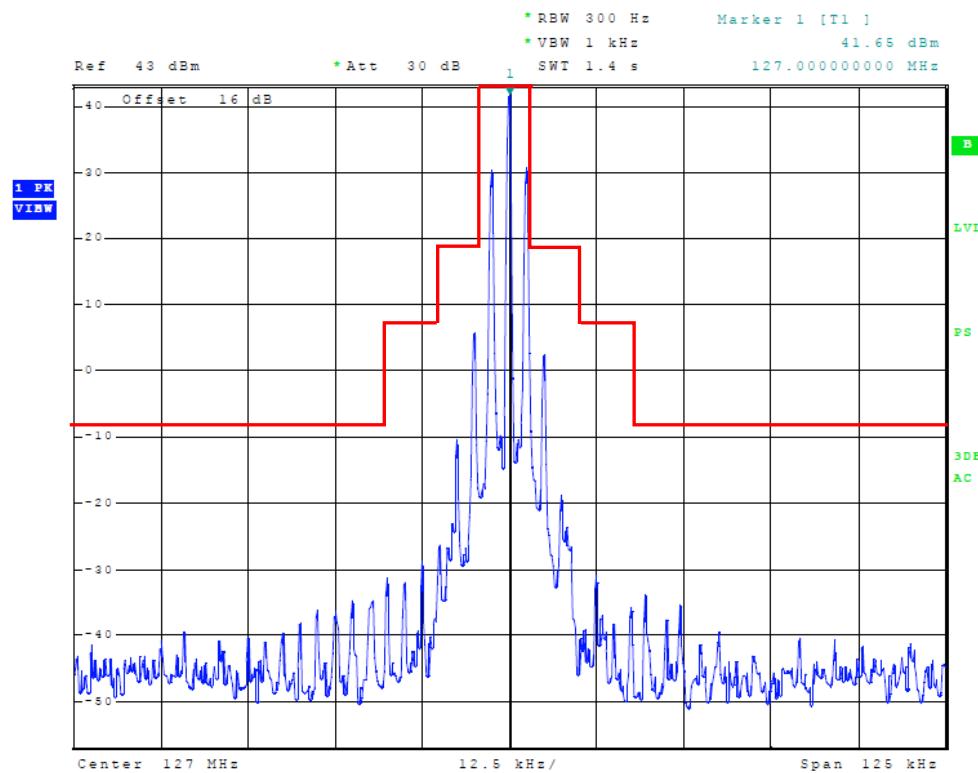



Figure 10 Emission Mask

## Field Strength of Spurious Radiation (Unwanted Emissions)

### Measurements Required

Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads, or intermediate circuit elements under normal conditions of installation and operation. This equipment may be remote mounted with interface cabling connecting the control head to the transmitter. The sample offered for testing required interfacing with additional test control panel and support equipment offering operation and communications with all functions of transmitter.

### Test Arrangement

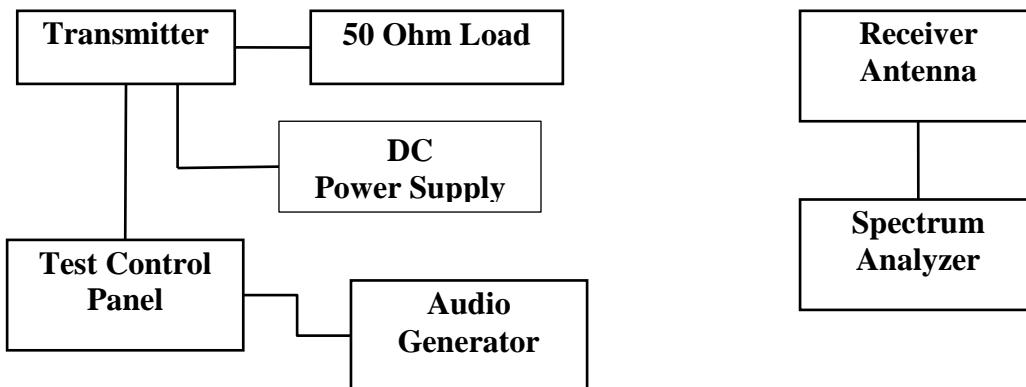

The test setup was assembled in a screen room for preliminary screening. The transmitter was placed on a wooden turntable 0.8 meters above the ground plane and at a distance of 1 meter from the receive antenna, plots were taken of the radiated emissions.

Final radiated emissions testing was performed with the transmitter placed on a wooden turntable 0.8 meters above the ground plane and at a distance of 3 meters from the Field Strength Measuring (FSM) antenna. The EUT was operational and radiating into a  $50\Omega$  load. The receiving antenna was raised and lowered from 1m to 4m in height to obtain the maximum reading of spurious radiation from the EUT, cabinet, and interface cabling. The turntable was rotated through 360 degrees to locate the position registering the highest amplitude of emission. The frequency spectrum was then searched for spurious emissions generated from the

transmitter, interface cabling, and test setup. The amplitude of each spurious emission was maximized by raising and lowering the FSM antenna, and rotating the turntable before final data was recorded. The frequency spectrum from 9 kHz to 1,500 MHz was investigated during radiated emissions testing. A loop antenna was used for frequency band 9 kHz to 30 MHz, Biconilog antenna was used for frequency measurements of 30 to 1000 MHz. A double-ridge horn antenna was used for frequencies of 1000 MHz to 12,000 MHz. Emission levels were measured and recorded from the spectrum analyzer in dB $\mu$ V. The transmitter was then removed and replaced with a substitution antenna, amplification as required, and signal generator. The signal from the generator was then adjusted such that the amplitude received was the same as that previously recorded for each frequency. This step was repeated for both horizontal and vertical polarizations. The power in dBm required to produce the desired signal level was then recorded from the signal generator. The power in dBm was then calculated by reducing the previous readings by the gain in the substitution antenna. Data was taken at the Rogers Labs, Inc. 3 meters open area test site (OATS). A description of the test facility is on file with the FCC and Industry Canada (refer to annex for site registration letters).

### ***Spurious Radiated Emission Results***

The EUT was connected to the 50-ohm load and operated in all available normal modes while radiated emissions testing were performed. The amplitude of each spurious emission was maximized and amplitude levels recorded while operating at the open area test site at a distance of 3-meters.

All spurious emissions must be attenuated at least  $43 + 10\log(P_o)$  below the fundamental emission power level. The following equations represent the calculated attenuation levels for the equipment.

$$\begin{aligned} 18.62 \text{ Watts} &= 43 + 10 \log(P_o) \\ &= 43 + 10 \log(18.6) \\ &= 55.7 \end{aligned}$$

Spurious Emission Limit as presented below was calculated by subtracting the spurious limit from the total Transmit power.

$$\begin{aligned} 18.62 \text{ Watts} - \text{Limit} &= 42.7 - 55.7 \\ &= -13 \text{ dBm} \end{aligned}$$

**General Radiated Emissions comparison against unintentional radiator general limits**

Frequency in MHz	Horizontal Peak (dB $\mu$ V/m)	Horizontal Quasi-Peak (dB $\mu$ V/m)	Horizontal Average (dB $\mu$ V/m)	Vertical Peak (dB $\mu$ V/m)	Vertical Quasi-Peak (dB $\mu$ V/m)	Vertical Average (dB $\mu$ V/m)	Limit @ 3m (dB $\mu$ V/m)
90.0	46.1	41.1	N/A	37.5	33.7	N/A	43.5
150.0	37.2	35.0	N/A	29.6	26.1	N/A	43.5
180.0	39.2	37.9	N/A	32.5	30.6	N/A	43.5
210.0	44.6	44.2	N/A	30.7	29.5	N/A	46.0
240.0	47.1	44.1	N/A	41.7	40.8	N/A	46.0
300.0	44.8	44.3	N/A	38.5	37.7	N/A	46.0
360.0	40.4	39.0	N/A	36.5	35.4	N/A	46.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded above for frequency range of 30-1000 MHz. Peak and Average amplitude emissions are recorded above for frequency range above 1000 MHz.

The EUT demonstrated compliance with specifications of CFR47 Paragraph 2.1046(a) and applicable Parts of 2 and 87.139, and RSS-141 paragraph 5. There are no deviations to the specifications. There are no deviations or exceptions to the specifications.


## Frequency Stability

### Measurements Required

The frequency stability shall be measured with variations of ambient temperature from -30° to +50° centigrade. Measurements shall be made at the extremes of the temperature range and at intervals of not more than 10° centigrade through the range. A period sufficient to stabilize all of the components of the oscillator circuit at each temperature level shall be allowed prior to frequency measurement. In addition to temperature stability, the frequency stability shall be measured with variation of primary supply voltage as follows:

- (1) Vary primary supply voltage from 85 to 115 percent of the nominal value.
- (2) The supply voltage shall be measured at the input to the cable normally provided with the equipment, or at the power supply terminals if cables are not normally provided.

### Test Arrangement

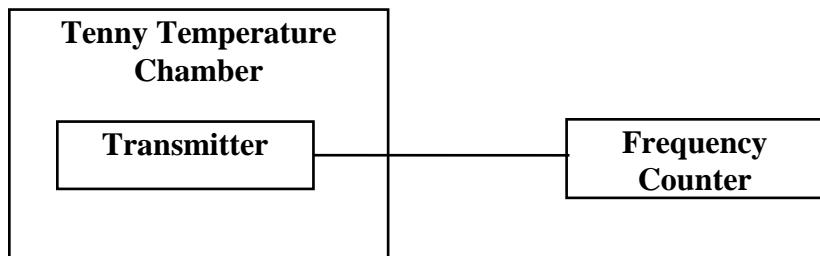

The measurement procedure outlined below shall be followed.

Step 1: The transmitter shall be installed in an environmental test chamber whose temperature is controllable. Provision shall be made to measure the frequency of the transmitter.

Step 2: With the transmitter inoperative (power switched “OFF”), the temperature of the test chamber shall be adjusted to +25°C. After a temperature stabilization period of one hour at +25°C, the transmitter shall be switched “ON” with standard test voltage applied.

Step 3: The carrier shall be keyed “ON”, and the transmitter shall be operated at full radio frequency power output at the duty cycle, for which it is rated, for duration of at least 5 minutes. The radio frequency carrier frequency shall be monitored and measurements shall be recorded.

**Step 4:** The test procedures outlined in Steps 2 and 3, shall be repeated after stabilizing the transmitter at the environmental temperatures specified, -30°C to +50°C in 10-degree increments.

The frequency stability was measured with variations in the power supply voltage from 85 to 115 percent of the nominal value. A Sorensen DC Power Supply was used to vary the DC voltage for the power input from 11.90 V<sub>dc</sub> to 16.1 V<sub>dc</sub> (or for 28-volt operation, 23.80 to 32.20). The frequency was measured and the variation in parts per million calculated. Data was taken per CFR47 Paragraphs 2.1055 and applicable paragraphs of part 87.133 and RSS-141.

### **Frequency Stability Results**

Frequency 127.000 MHz	Frequency Stability Vs Temperature								
Temperature °C	-30	-20	-10	0	+10	+20	+30	+40	+50
Change (Hz)	-40.0	-30.0	20.0	30.0	10.0	10.0	20.0	20.0	-60.0
PPM	-0.3	-0.2	0.2	0.2	0.1	0.1	0.2	0.2	-0.5
%	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
Limit (PPM)	20	20	20	20	20	20	20	20	20

Frequency (127.000 MHz)	Frequency Stability Vs Voltage Variation 14.0 volts nominal; Results In Hz change		
Voltage V <sub>dc</sub>	11.90	14.00	16.1
Change (Hz)	0.0	0.0	0.0

Frequency (127.000 MHz)	Frequency Stability Vs Voltage Variation 28.0 volts nominal; Results In Hz change		
Voltage V <sub>dc</sub>	23.80	28.00	32.20
Change (Hz)	0.0	0.0	0.0

The EUT demonstrated compliance with specifications of CFR47 Paragraph 2.1046(a) and applicable Parts of 87.133(d) and RSS-141 paragraph 5.1. There are no deviations or exceptions to the specifications.

## Annex

- Annex A Measurement Uncertainty Calculations
- Annex B Rogers Labs Test Equipment List
- Annex C Rogers Qualifications
- Annex D FCC Test Site Registration Letter
- Annex E Industry Canada Test Site Registration Letter

Rogers Labs, Inc.  
4405 West 259<sup>th</sup> Terrace  
Louisburg, KS 66053  
Phone/Fax: (913) 837-3214  
Revision 1

Trig Avionics Limited  
Model: TY92  
Test #: 120820A  
Test to: CFR47 Parts 2, 87 and RSS-141  
File: Trig Avionics TY92 TstRpt 1200820A

IC: 10614A-00879  
FCC ID: VZI00879  
SN: 0004  
Date: October 25, 2012  
Page 24 of 29

**Annex A Measurement Uncertainty Calculations**

Measurement uncertainty calculations were made for the laboratory. Result of measurement uncertainty calculations are recorded below for AC line conducted and radiated emission measurements.

Measurement Uncertainty	U <sub>(E)</sub>	U <sub>(lab)</sub>
3 Meter Horizontal 30-200 MHz Measurements	2.08	4.16
3 Meter Vertical 30-200 MHz Measurements	2.16	4.33
3 Meter Vertical Measurements 200-1000 MHz	2.99	5.97
10 Meter Horizontal Measurements 30-200 MHz	2.07	4.15
10 Meter Vertical Measurements 30-200 MHz	2.06	4.13
10 Meter Horizontal Measurements 200-1000 MHz	2.32	4.64
10 Meter Vertical Measurements 200-1000 MHz	2.33	4.66
3 Meter Measurements 1-6 GHz	2.57	5.14
3 Meter Measurements 6-18 GHz	2.58	5.16
AC Line Conducted	1.72	3.43

### Annex B Rogers Labs Test Equipment List

The test equipment is maintained in calibration and good operating condition. Use of this calibrated equipment ensures measurements are traceable to national standards.

List of Test Equipment	Calibration Date
Spectrum Analyzer: Rohde & Schwarz ESU40	5/12
Spectrum Analyzer: HP 8562A, HP Adapters: 11518, 11519, and 11520	5/12
Mixers: 11517A, 11970A, 11970K, 11970U, 11970V, 11970W	
Spectrum Analyzer: HP 8591EM	5/12
Antenna: EMCO Biconilog Model: 3143	5/12
Antenna: Sunol Biconilog Model: JB6	10/11
Antenna: EMCO Log Periodic Model: 3147	10/11
Antenna: Antenna Research Biconical Model: BCD 235	10/11
LISN: Compliance Design Model: FCC-LISN-2.Mod.cd, 50 µHy/50 ohm/0.1 µf	10/11
R.F. Preamp CPPA-102	10/11
Attenuator: HP Model: HP11509A	10/11
Attenuator: Mini Circuits Model: CAT-3	10/11
Attenuator: Mini Circuits Model: CAT-3	10/11
Cable: Belden RG-58 (L1)	10/11
Cable: Belden RG-58 (L2)	10/11
Cable: Belden 8268 (L3)	10/11
Cable: Time Microwave: 4M-750HF290-750	10/11
Cable: Time Microwave: 10M-750HF290-750	10/11
Frequency Counter: Leader LDC825	2/12
Oscilloscope Scope: Tektronix 2230	2/12
Wattmeter: Bird 43 with Load Bird 8085	2/12
Power Supplies: Sorensen SRL 20-25, SRL 40-25, DCR 150, DCR 140	2/12
R.F. Generators: HP 606A, HP 8614A, HP 8640B	2/12
R.F. Power Amp 65W Model: 470-A-1010	2/12
R.F. Power Amp 50W M185- 10-501	2/12
R.F. Power Amp A.R. Model: 10W 1010M7	2/12
R.F. Power Amp EIN Model: A301	2/12
LISN: Compliance Eng. Model 240/20	2/12
LISN: Fischer Custom Communications Model: FCC-LISN-50-16-2-08	2/12
Antenna: EMCO Dipole Set 3121C	2/12
Antenna: C.D. B-101	2/12
Antenna: Solar 9229-1 & 9230-1	2/12
Antenna: EMCO 6509	2/12
Audio Oscillator: H.P. 201CD	2/12
Peavey Power Amp Model: IPS 801	2/12
ELGAR Model: 1751	2/12
ELGAR Model: TG 704A-3D	2/12
ESD Test Set 2010i	2/12
Fast Transient Burst Generator Model: EFT/B-101	2/12
Field Intensity Meter: EFM-018	2/12
KEYTEK Ecat Surge Generator	2/12
Shielded Room 5 M x 3 M x 3.0 M	

***Annex C Rogers Qualifications******Scot D. Rogers, Engineer*****Rogers Labs, Inc.**

Mr. Rogers has approximately 17 years' experience in the field of electronics. Engineering experience includes six years in the automated controls industry and remaining years working with the design, development and testing of radio communications and electronic equipment.

**Positions Held**


Systems Engineer: A/C Controls Mfg. Co., Inc. 6 Years

Electrical Engineer: Rogers Consulting Labs, Inc. 5 Years

Electrical Engineer: Rogers Labs, Inc. Current

**Educational Background**

- 1) Bachelor of Science Degree in Electrical Engineering from Kansas State University.
- 2) Bachelor of Science Degree in Business Administration Kansas State University.
- 3) Several Specialized Training courses and seminars pertaining to Microprocessors and Software programming.



Scot D. Rogers

**Annex D FCC Site Registration Letter****FEDERAL COMMUNICATIONS COMMISSION**

**Laboratory Division  
7435 Oakland Mills Road  
Columbia, MD 21046**

November 01, 2011

Registration Number: 90910

Rogers Labs, Inc.  
4405 West 259th Terrace,  
Louisburg, KS 66053

Attention: Scot Rogers,

Re: Measurement facility located at Louisburg


3 & 10 meter site

Date of Renewal: November 01, 2011

Dear Sir or Madam:

Your request for renewal of the registration of the subject measurement facility has been received. The information submitted has been placed in your file and the registration has been renewed. The name of your organization will remain on the list of facilities whose measurement data will be accepted in conjunction with applications for Certification under Parts 15 or 18 of the Commission's Rules. Please note that the file must be updated for any changes made to the facility and the registration must be renewed at least every three years.


Measurement facilities that have indicated that they are available to the public to perform measurement services on a fee basis may be found on the FCC website [www.fcc.gov](http://www.fcc.gov) under E-Filing, OET Equipment Authorization Electronic Filing, Test Firms.

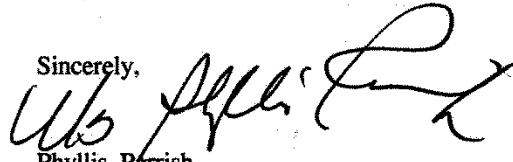Sincerely,  
  
Phyllis Parrish  
Industry Analyst

Rogers Labs, Inc.  
4405 West 259<sup>th</sup> Terrace  
Louisburg, KS 66053  
Phone/Fax: (913) 837-3214  
Revision 1

Trig Avionics Limited  
Model: TY92  
Test #: 120820A  
Test to: CFR47 Parts 2, 87 and RSS-141  
File: Trig Avionics TY92 TstRpt 1200820A

IC: 10614A-00879  
FCC ID: VZI00879  
SN: 0004  
Date: October 25, 2012  
Page 28 of 29

**Annex E Industry Canada Site Registration Letter**

December 28, 2011

OUR FILE: 46405-3041  
Submission No: 152685

Rogers Labs Inc.  
4405 West 259th Terrace  
Louisburg, KS, 66053  
USA

**Attention:** Mr. Scot D. Rogers

Dear Sir/Madame:

The Bureau has received your application for the renewal of 3/10m OATS. Be advised that the information received was satisfactory to Industry Canada. The following number(s) is now associated to the site(s) for which registration / renewal was sought (**Site# 3041A-1**). Please reference the appropriate site number in the body of test reports containing measurements performed on the site. In addition, please keep for your records the following information;

- The company address code associated to the site(s) located at the above address is: **3041A**

Furthermore, to obtain or renew a unique site number, the applicant shall demonstrate that the site has been accredited to ANSI C63.4-2003 or later. A scope of accreditation indicating the accreditation by a recognized accreditation body to ANSI C63.4-2003 or later shall be accepted. Please indicate in a letter the previous assigned site number if applicable and the type of site (example: 3 metre OATS or 3 metre chamber). If the test facility is not accredited to ANSI C63.4-2003 or later, the test facility shall submit test data demonstrating full compliance with the ANSI standard. The Bureau will evaluate the filing to determine if recognition shall be granted.

The frequency for re-validation of the test site and the information that is required to be filed or retained by the testing party shall comply with the requirements established by the accrediting organization. However, in all cases, test site re-validation shall occur on an interval not to **exceed three years**. There is no fee or form associated with an OATS filing. OATS submissions are encouraged to be submitted electronically to the Bureau using the following URL;

[http://strategis.ic.gc.ca/epic/internet/inceb-bhst.nsf/en/h\\_tt00052e.html](http://strategis.ic.gc.ca/epic/internet/inceb-bhst.nsf/en/h_tt00052e.html)

If you have any questions, you may contact the Bureau by e-mail at [certification.bureau@ic.gc.ca](mailto:certification.bureau@ic.gc.ca) Please reference our file and submission number above for all correspondence.

Yours sincerely,

A handwritten signature in black ink that reads "Dalwinder Gill".

Dalwinder Gill  
For: Wireless Laboratory Manager  
Certification and Engineering Bureau  
3701 Carling Ave., Building 94  
P.O. Box 11490, Station "H"  
Ottawa, Ontario K2H 8S2  
Email: [dalwinder.gill@ic.gc.ca](mailto:dalwinder.gill@ic.gc.ca)  
Tel. No. (613) 998-8363  
Fax. No. (613) 990-4752

Rogers Labs, Inc.  
4405 West 259<sup>th</sup> Terrace  
Louisburg, KS 66053  
Phone/Fax: (913) 837-3214  
Revision 1

Trig Avionics Limited  
Model: TY92  
Test #: 120820A  
Test to: CFR47 Parts 2, 87 and RSS-141  
File: Trig Avionics TY92 TstRpt 1200820A

IC: 10614A-00879  
FCC ID: VZI00879  
SN: 0004  
Date: October 25, 2012  
Page 29 of 29