



RADIO TEST REPORT

Test Report No. : 29GE0155-HO-01-A

Applicant : Hitachi High-Tech Materials Corporation

Type of Equipment : IC Tag Reader/Writer Module

Model No. : NRWA3

Test regulation : FCC Part 15 Subpart C : 2009
Section 15.207 and 15.225

FCC ID : VZQNRWA3

Test Result : Complied


1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with above regulation.
4. The test results in this report are traceable to the national or international standards.
5. This test report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

Date of test: April 1 and 2, 2009

Tested by: S. Matsuyama
Satofumi Matsuyama
EMC Services

H. Ohnishi
Hironobu Ohnishi
EMC Services

Approved by: M. Kosaka
Makoto Kosaka
EMC Services

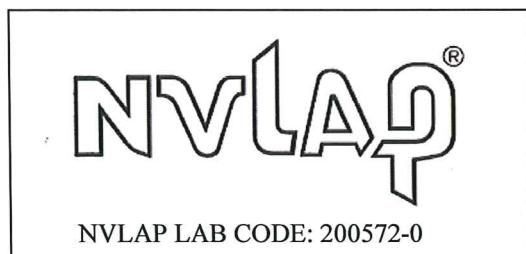

This laboratory is accredited by the NVLAP LAB CODE 200572-0, U.S.A. The tests reported herein have been performed in accordance with its terms of accreditation.

*As for the range of Accreditation in NVLAP, you may refer to the WEB address, <http://uljapan.co.jp/emc/nvlap.html>

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

CONTENTS	PAGE
SECTION 1: Customer information	3
SECTION 2: Equipment under test (E.U.T.)	3
SECTION 3: Test specification, procedures & results	4
SECTION 4: Operation of E.U.T. during testing	8
SECTION 5: Conducted emission	9
SECTION 6: Radiated emission (Fundamental, Spurious Emission and Spectrum Mask).....	10
SECTION 7: 20dB Bandwidth.....	12
SECTION 8: Frequency Tolerance.....	12
SECTION 9: 99% Occupied Bandwidth	12
APPENDIX 1: Photographs of test setup	13
Conducted emission	13
Radiated emission	14
Worst Case Position (Y-axis)	15
APPENDIX 2: Data of EMI test	17
Conducted emission	17
Radiated emission (Fundamental emission and Spectrum Mask).....	24
Radiated emission (Spurious emission: below 30MHz).....	26
Radiated emission (Spurious emission: above 30MHz).....	28
20dB Bandwidth & 99% Occupied Bandwidth.....	30
Frequency Tolerance	31
APPENDIX 3: Test instruments.....	32

SECTION 1: Customer information

Company Name : Hitachi High-Tech Materials Corporation
Brand or Trade name : Hitachi High-Tech Materials
Address : 3-37, Miyahara 3-chome, Yodogawa-ku, Osaka-shi, Osaka, 532-0003 JAPAN
Telephone Number : +81-6-4807-1871
Facsimile Number : +81-6-4807-1898
Contact Person : Teruyuki Morikawa

*Remarks:

Hitachi High-Tech Materials Corporation designates Tokyo Communication Equipment Manufacturing Co., Ltd. as manufacturer of the product (IC Tag Reader/Writer Module).

SECTION 2: Equipment under test (E.U.T.)

2.1 Identification of E.U.T.

Type of Equipment : IC Tag Reader/Writer Module
Model No. : NRWA3
Serial No. : 003
Rating : DC 5.0V
Receipt Date of Sample : April 1, 2009
Country of Mass-production : Japan
Condition of EUT : Production prototype
(Not for Sale: This sample is equivalent to mass-produced items.)
Modification of EUT : No Modification by the test lab

2.2 Product Description

Model No: NRWA3 (referred to as the EUT in this report) is the IC Tag Reader/Writer Module.

Feature of EUT: This product is IC Tag Reader/Writer Module in conformity to ISO/IEC15693-2 (Non-contact vicinity type).

The clock frequency of EUT is 13.56MHz.

Equipment Type : Transceiver
Frequency of Operation : 13.56 MHz
Type of modulation : AM
Antenna Type : Loop antenna on PCB
Method of Frequency Generation : Crystal
Operating voltage (Inner) : DC 3.3V
Operating Temperature : 0 deg. C. to +65 deg. C.

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

SECTION 3: Test specification, procedures & results

3.1 Test Specification

Test Specification : FCC Part15 Subpart C: 2009, final revised on February 27, 2009

Title : FCC 47CFR Part15 Radio Frequency Device Subpart C Intentional Radiators
Section 15.207 Conducted limits
Section 15.225 : Operation within the band 13.110-14.010MHz

FCC 15.31 (e)

This EUT provides stable voltage (DC3.3V) constantly to RF Module regardless of input voltage. Therefore, this EUT complies with the requirement.

FCC Part 15.203 Antenna requirement

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the EUT. Therefore, the equipment complies with the antenna requirement of Section 15.203.

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

3.2 Procedures and results

No.	Item	Test Procedure	Specification	Remarks	Deviation	Worst margin	Results
1	Conducted emission	ANSI C63.4:2003 7. AC powerline conducted emission measurements <IC>RSS-Gen 7.2.2	Section 15.207 <IC>RSS-Gen 7.2.2	-	N/A	[QP] 14.9dB (0.38299MHz, L) [AV] 11.6dB (0.76785MHz, L)	Complied
2	Electric Field Strength of Fundamental Emission	ANSI C63.4:2003 13. Measurement of intentional radiators <IC> RSS-Gen 4.8, 4.11	Section 15.225(a) <IC>RSS-210 A2.6	Radiated	N/A	71.0dB (13.56000MHz, QP, 90 deg.)	Complied
3	Spectrum Mask	ANSI C63.4:2003 13. Measurement of intentional radiators <IC>RSS-Gen 4.9, 4.11	Section 15.225(b)(c) <IC> RSS-210 A2.6	Radiated	N/A	46.2dB (13.10000MHz/ 13.11000MHz, QP, 90 deg.)	Complied
4	20dB Bandwidth	ANSI C63.4:2003 13. Measurement of intentional radiators <IC> -	Section 15.215(c) <IC> -	Radiated	N/A	See data	Complied
5	Electric Field Strength of Spurious Emission	ANSI C63.4:2003 13. Measurement of intentional radiators <IC>RSS-Gen 4.9, 4.11	Section 15.209, Section 15.225 (d) <IC>RSS-210 A2.6	Radiated	N/A	0.9dB (216.965MHz, Vertical, QP)	Complied
6	Frequency Tolerance	ANSI C63.4:2003 13. Measurement of intentional radiators <IC>RSS-Gen 4.7	Section 15.225(e) <IC> RSS-210 A2.6	Radiated	N/A	See data	Complied

Note: UL Japan, Inc.'s EMI Work Procedures No.QPM05 and QPM15

3.3 Addition to standard

No.	Item	Test Procedure	Specification	Remarks	Deviation	Worst margin	Results
1	99% Occupied Band Width	RSS-Gen 4.6.1	RSS-Gen 4.6.1	Radiated	N/A	N/A	Complied

Other than above, no addition, exclusion nor deviation has been made from the standard.

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

3.4 Uncertainty

The following uncertainties have been calculated to provide a confidence level of 95% using a coverage factor k=2.

Test room	Conducted emission	Radiated emission (10m*)			Radiated emission (3m*)			Radiated emission (3m*)	
		150kHz-30MHz	9kHz-30MHz	30MHz-300MHz	300MHz-1GHz	9kHz-30MHz	30MHz-300MHz	300MHz-1GHz	1GHz-18GHz
No.1 semi-anechoic chamber (±)	3.7dB	3.1dB	4.4dB	4.2dB	3.2dB	3.8dB	3.9dB	5.9dB	6.1dB
No.2 semi-anechoic chamber (±)	3.7dB	-	-	-	3.2dB	4.4dB	4.0dB	5.9dB	6.1dB
No.3 semi-anechoic chamber (±)	3.7dB	-	-	-	3.2dB	4.6dB	4.0dB	5.9dB	6.1dB
No.4 semi-anechoic chamber (±)	3.7dB	-	-	-	3.2dB	3.9dB	3.9dB	5.9dB	6.1dB

*10m/3m = Measurement distance

Conducted emission test

The data listed in this test report has enough margin, more than the site margin.

Radiated emission test (3m)

[Electric Field Strength of Fundamental Emission and Spectrum Mask]

The data listed in this test report has enough margin, more than the site margin.

[Electric Field Strength of Spurious Emission]

The data listed in this report meets the limits unless the uncertainty is taken into consideration.

Other test except Conducted Emission and Spurious Emission (Radiated)

The measurement uncertainty for this test is ±3.0dB.

The data listed in this test report has enough margin, more than the site margin.

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

3.5 Test Location

UL Japan, Inc. Head Office EMC Lab. *NVLAP Lab. code: 200572-0

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116 Facsimile : +81 596 24 8124

	FCC Registration Number	IC Registration Number	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms
No.1 semi-anechoic chamber	313583	2973C-1	19.2 x 11.2 x 7.7m	7.0 x 6.0m	No.1 Power source room
No.2 semi-anechoic chamber	655103	2973C-2	7.5 x 5.8 x 5.2m	4.0 x 4.0m	-
No.3 semi-anechoic chamber	148738	2973C-3	12.0 x 8.5 x 5.9m	6.8 x 5.75m	No.3 Preparation room
No.3 shielded room	-	-	4.0 x 6.0 x 2.7m	N/A	-
No.4 semi-anechoic chamber	134570	2973C-4	12.0 x 8.5 x 5.9m	6.8 x 5.75m	No.4 Preparation room
No.4 shielded room	-	-	4.0 x 6.0 x 2.7m	N/A	-
No.5 semi-anechoic chamber	-	-	6.0 x 6.0 x 3.9m	6.0 x 6.0m	-
No.6 shielded room	-	-	4.0 x 4.5 x 2.7m	4.75 x 5.4 m	-
No.6 measurement room	-	-	4.75 x 5.4 x 3.0m	4.75 x 4.15 m	-
No.7 shielded room	-	-	4.7 x 7.5 x 2.7m	4.7 x 7.5m	-
No.8 measurement room	-	-	3.1 x 5.0 x 2.7m	N/A	-
No.9 measurement room	-	-	8.0 x 4.5 x 2.8m	2.0 x 2.0m	-
No.10 measurement room	-	-	2.6 x 2.8 x 2.5m	2.4 x 2.4m	-
No.11 measurement room	-	-	3.1 x 3.4 x 3.0m	2.4 x 3.4m	-

* Size of vertical conducting plane (for Conducted Emission test) : 2.0 x 2.0m for No.1, No.2, No.3, and No.4 semi-anechoic chambers and No.3 and No.4 shielded rooms.

3.6 Test set up, Data of EMI, and Test instruments

Refer to APPENDIX 1 to 3.

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

SECTION 4: Operation of E.U.T. during testing

4.1 Operating Modes

The EUT was operated in a manner similar to typical use during the tests.


- The mode is used :
- 1) Transmitting mode (With Tag / Without Tag): Used for all tests except for Frequency Tolerance test
 - 2) Standby mode: Used for Conducted emission test only
 - 3) Continuous Transmitting mode (No Modulation): Used for Frequency Tolerance test only

Justification: The system was configured in typical fashion (as a customer would normally use it) for testing.

Frequency Tolerance:

Temperature for the extreme tests : -30 deg.C.(minimum) to + 50deg.C.(maximum)
 Voltage for the extreme tests : Vnom:DC 5.0V, Vmin:DC4.25V, Vmax:DC5.75V

4.2 Configuration and peripherals



* Cabling and setup were taken into consideration and test data was taken under worse case conditions.

Description of EUT and Support equipment

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	IC Tag Reader/Writer Module	NRWA3	003	Tokyo Communication Equipment Manufacturing Co., Ltd.	EUT
B	AC/DC Adapter	US300520	805-0299244	UNFIVE	-

List of cables used

No.	Name	Length (m)	Shield		Remark
			Cable	Connector	
1	DC Cable	1.9	Unshielded	Unshielded	-

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

SECTION 5: Conducted emission

5.1 Operating environment

Test place : No.4 semi anechoic chamber.
Temperature : See data
Humidity : See data

5.2 Test configuration

EUT was placed on a urethane platform of nominal size, 1.0m by 1.5m, raised 0.8m above the conducting ground plane. The rear of tabletop was located 40cm to the vertical conducting plane. The rear of EUT and its peripherals was aligned and flushed with rear of tabletop. All other surfaces of tabletop were at least 80cm from any other grounded conducting surface. EUT was located 80cm from LISN/AMN and excess AC cable was bundled in center. I/O cables that were connected to the peripherals were bundled in center. They were folded back and forth forming a bundle 30cm to 40cm long and were hanged at a 40cm height to the ground plane. Each EUT current-carrying power lead, except the ground (safety) lead, was individually connected through a LISN/ an AMN to the input power source. All unused 50ohm connectors of the LISN/ AMN were resistively terminated in 50ohm when not connected to the measuring equipment.

The AC Mains Terminal Continuous disturbance Voltage has been measured with the EUT on a horizontal conducting plane 4.0 x 4.0m and a vertical conducting plane 2.0 x 2.0m in a semi Anechoic Chamber.

Photographs of the set up are shown in Appendix 1.

5.3 Test conditions

Frequency range : 0.15MHz-30MHz
EUT position : Table top
EUT operation mode : See Clause 4.1

5.4 Test procedure

The AC Mains Terminal Continuous disturbance Voltage had been measured with the EUT in the semi Anechoic Chamber. The EUT was connected to a Line Impedance Stabilization Network (LISN)/ Artificial Mains Network (AMN). An overview sweep with peak detection has been performed.

The measurements had been performed with a quasi-peak detector and if required, with an average detector. The conducted emission measurements were made with the following detector function of the test receiver.

Detector Type : QP and AV
IF Bandwidth : 9kHz

5.5 Test result

Summary of the test results : Pass

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

SECTION 6: Radiated emission (Fundamental, Spurious Emission and Spectrum Mask)

6.1 Operating environment

The test was carried out in a No.4 semi Anechoic Chamber

Temperature : See data

Humidity : See data

6.2 Test Procedure

The Radiated Electric Field Strength intensity has been measured in a semi anechoic chamber with a ground plane and at a distance of 3m.

Frequency: From 9kHz to 30MHz at distance 3m, Used antenna: Loop

The EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

The measurements were performed for each antenna angle 0deg., 45deg., 90deg., and 135 deg.

*Refer to Figure 1 about Direction of the Loop Antenna.

Frequency: From 30MHz to 1GHz at distance 3m, Used antenna: Biconical (30-300MHz), Logperiodic (300-1000MHz)

The measuring antenna height was varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

The measurements were performed for both vertical and horizontal antenna polarization.

Measurements were performed with a QP, PK, and AV detector.

The radiated emission measurements were made with the following detector function of the test receiver.

	From 9kHz to 90kHz and From 110kHz to 150kHz	From 90kHz to 110kHz	From 150kHz to 490kHz	From 490kHz to 30MHz	From 30MHz to 1GHz
Detector Type	PK/AV	QP	PK/AV	QP	QP
IF Bandwidth	200Hz	200Hz	9kHz	9kHz	120kHz

- The carrier level and noise levels were confirmed at each position of X, Y and Z axes of EUT to see the position of maximum noise, and the test was made at the position that has the maximum noise.

* FCC Part 15 Section 15.31 (f)(2) / IC RSS-Gen 4.11 (9kHz-30MHz)

9kHz – 490kHz [Limit at 3m]=[Limit at 300m]-40log (3[m]/300[m])

490kHz – 30MHz[Limit at 3m]=[Limit at 30m]-40log (3[m]/30[m])

6.3 Test result

Summary of the test results : Pass

UL Japan, Inc.

Head Office EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116


Facsimile : +81 596 24 8124

Figure 1: Direction of the Loop Antenna

Side View

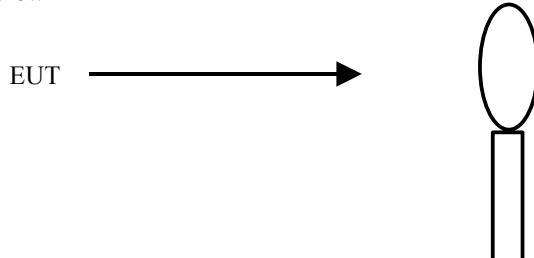

Top View

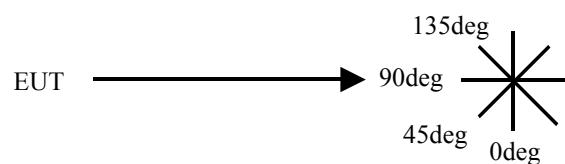

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

SECTION 7: 20dB Bandwidth

Test Procedure

The measurement was performed under the condition which has the maximum Electric field strength.

Test data : APPENDIX 2
Test result : Pass

SECTION 8: Frequency Tolerance

Test Procedure

The measurement was performed with Electric field strength using a Universal Counter.

Test data : APPENDIX 2
Test result : Pass

SECTION 9: 99% Occupied Bandwidth

Test Procedure

The measurement was performed under the condition which has the maximum Electric field strength.

Test data : APPENDIX 2
Test result : Pass