



## Test Report

Test Report No.:	KTI12EF11004		
Registration No.:	99058		
Applicant:	NITGEN&COMPANY Co., Ltd.		
Applicant Address:	Pax Tower B/D, 12FL., 231-13, Nonhyeon-dong, Gangnam-gu, Seoul, Korea (135-010)		
Product:	Access Controller		
FCC ID:	W2ASW301R	Model No.	SW301R,SW300R
Receipt No.:	12-1104	Date of receipt:	November 14, 2012
Date of Issue:	November 30, 2012		
Testing location	Korea Technology Institute Co., Ltd. 51-19, Sanglim3-Ri, Docheok-Myeun, Gwangju-Shi, Gyeungki-Do, Korea		
Test Standards:	FCC/ANSI. C63.4: 2003		
Rule Parts: FCC	Part 15, Class B		
Equipment Class:	Digital device		
Test Result:	The above-mentioned product has been tested with compliance.		

Tested by: T.J. Kim

Approved by: G. C. Min

/ Engineer

/President

Signature Date November 30, 2012

Signature Date November 30, 2012

Other Aspects:	
Abbreviations:	* OK, Pass=passed   * Fail=failed   * N/A=not applicable

- This test report is not permitted to copy partly without our permission.

- This test result is dependent on only equipment to be used.

- This test result is based on a single evaluation of one sample of the above mentioned.

- This test report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S Government.

- We certify this test report has been based on the measurement standards that is traceable to the national or international standards.

**>> Contents <<**

<b>Contents</b>	<b>2</b>
<b>List of Tables</b>	<b>2</b>
<b>List of Figures</b>	<b>2</b>
<b>List of Photographs</b>	<b>2</b>
<b>1. General</b>	<b>4</b>
<b>2. Test Site</b>	<b>4</b>
<b>2.1 Location</b>	<b>4</b>
<b>2.2 List of Test and Measurement Instruments</b>	<b>4</b>
<b>2.3 Test Date</b>	<b>5</b>
<b>2.4 Test Environment</b>	<b>5</b>
<b>3. Description of the tested samples</b>	<b>6</b>
<b>3.1 Rating and Physical characteristics</b>	<b>6</b>
<b>3.2 Submitted documents</b>	<b>6</b>
<b>4. Measurement conditions</b>	<b>7</b>
<b>4.1 Modes of operation</b>	<b>7</b>
<b>4.2 Additional Equipment</b>	<b>7</b>
<b>4.3 Uncertainty</b>	<b>7</b>
<b>4.4 Test Setup</b>	<b>8</b>
<b>5. TEST AND MEASUREMENTS</b>	<b>9</b>
<b>5.1 Antenna Requirement</b>	<b>9</b>
<b>5.1.1 Regulation</b>	<b>9</b>
<b>5.1.2 Results</b>	<b>9</b>
<b>5.2 Emission Test</b>	<b>10</b>
<b>5.2.1 Conducted Emissions</b>	<b>10</b>
<b>5.2.2 Radiated Emissions</b>	<b>17</b>
<b>5.2.2.1 Regulation</b>	<b>17</b>
<b>5.2.2.2 Measurement Procedure</b>	<b>17</b>
<b>5.2.2.3 Calculation of the field strength limits below 30 MHz</b>	<b>18</b>
<b>5.2.2.4 Test Results</b>	<b>19</b>
<b>5.2.2.5 Calculation of the field strength limits above 30 MHz</b>	<b>23</b>
<b>5.2.2.6 Test Results</b>	<b>23</b>

**>>> Contents <<<**

5. 5.3 Occupied bandwidth	20
5.3.1 Measurement Procedure	20
5.3.2 Test Results	20
6. Photograph of the Test Set-Up	22

**>> List of Tables**

Table 1	List of test and measurement equipment	5
Table 2	Test Data. Conducted Emissions	13,16
Table 3	Test Data, Fundamental Frequency (Ver / Hor)	19,21
Table 4	Test Data, Radiated Emission below 30 MHz	19,21
Table 5	Test Data, Radiated Emission above 30 MHz	23,24

**>> List of Figures**

Figure 1	Test Setup_Adaptor Mode	8
Figure 2	Test Setup_PoE Mode	8
Figure 3	Spectral Diagram, LINE-PE	11,14
Figure 4	Spectral Diagram, NEUTRAL-PE	12,15
Figure 5	Radiated spurious emissions below 30 MHz	20,22
Figure 6	Occupied Bandwidth	25,26

**>> List of Photographs**

Photograph 1	Setup for conducted Emissions	27
Photograph 2	Setup for radiated Emissions	28



## **1. General**

This equipment has been shown to be capable of compliance with the applicable technical standards and was tested in accordance with the measurement procedures as indicated in this report.

We attest to the accuracy of data. Korea Technology Institute Co., Ltd. performed all measurements reported herein. And were made under Chief Engineer's supervisor.

We assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

## **2. Test Site**

**Korea Technology Institute Co., Ltd.**

### **Location**

**51-19, Sanglim3-Ri, Docheok-Myeon, Gwangju-Shi, Gyeunggi-Do, Korea**

**The Test Site is in compliance with ANSI C63.4/2003 for measurement of radio Interference.**



## List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

### - Conducted Emissions

Kind of Equipment	Type	S/N	Calibrated until
Field Strength Meter	ESIB40	100093	05.2013
LISN	KNW407	8-1157-2	03.2013
LISN	EM-7823	115019	03.2013
Conducted Cable	N/A	N/A	11.2013

### - Radiated Emissions

Kind of Equipment	Type	S/N	Calibrated until
Field Strength Meter	ESIB40	100093	05.2013
Loop Antenna	6502	3434	02.2013
Biconic Logarithmic Periodic Antenna	VULB9163	9163-281	10.2014
Horn Antenna	3115	6443	10.2014
Open Site Cable	N/A	N/A	11.2009
Antenna Master	DETT-03	N/A	N / A
Antenna & Turntable controller	DETT-04	91X519	N / A

## Test Date

Date of Application: November 14, 2012

Date of Test: November 14, 2012

## Test Environment

Indoor: 22°C/38%/1000mbar

Outdoor: 4°C/39%/1000mbar



### 3. Description of the tested samples

The EUT is Access Controller.

#### 3.1 Rating and Physical Characteristics

Item	Description
LCD	4.3" Touch Screen TFT-LCD High Color(16Bit), 480(H) x 272(W)
CPU	667MHz 32Bit RISC
Memory	256MB RAM, 256MB Nand Flash
RF Characteristic	125KHz, 500uV/m @ Less than 3m
Sensor	NITGEN OPP06 Optic sensor 500DPI(LFD, Auto-On)
Authenticaiton	1:1 Verificaitoin: less than 0.5 second
Speed	1:N Identification: less than 1 second  in 4000 templats
FAR/FRR	0.001% /0.1%
Capacity	100,000 templates or 100,000 users(PW, RF)
Communication	TCP/IP, WIFI, Wiegand
Dimension	167.4(W) x 146.5(L) x 67(H) mm
Adaptor Power	Input : AC 100V ~ 240V, 50/60 Hz Output: DC 12V, 3A
Door Connection	Upto two doors (DeadBolt, Electro Magnetic- lock, Elecric Strike, Auto door Fire Alarm)
Temperature/ Humidity	-20 ~ 60 °C
etc	Voice announcement, USB Port Warning/Alarm

#### 3.2 Submitted Documents

- User's Guide
- Block Diagram



## 4. Measurement Conditions

Testing Input Voltage: AC 110V/60Hz

### Modes of Operation

The EUT was in the following operation mode during all testing;

Prior to a measurement, the Instruments of education shall be operated until stabilization has been reached.

### 4.2 Additional Equipment

DEVICE TYPE	Manufacturer	M/N	S/N	FCC ID
PC	COMPAQ	EvoD5M	6F28KN8ZH110	DOC
Monitor	LG	M2362DL	002KCLH3F288	-
Keyboard	Microsoft	SWT1300	X817159-004	-
Mouse	Jooyon	1113	W5082CPAJB8C007576	-
Bolt	BEHOST	BHL-700C	N / A	-
Adaptor	DVE	DSA-42D-12	N / A	-
PoE	N / A	Universal PoE Injector	N / A	-

### 4.3 Uncertainty

#### 1) Radiated disturbance

$$U_c \text{ (Combined standard Uncertainty)} = \pm 1.8 \text{dB}$$

$$\text{Expanded uncertainty } U = K U_c$$

$$K = 2$$

$$\therefore U = \pm 3.6 \text{dB}$$

#### 2) Conducted disturbance

$$U_c = \pm 0.88 \text{dB}$$

$$U = K U_c = 2 \times U_c = \pm 1.8 \text{dB}$$



## 4.4 Test Setup

Figure 1: Test Setup\_Adaptor Mode


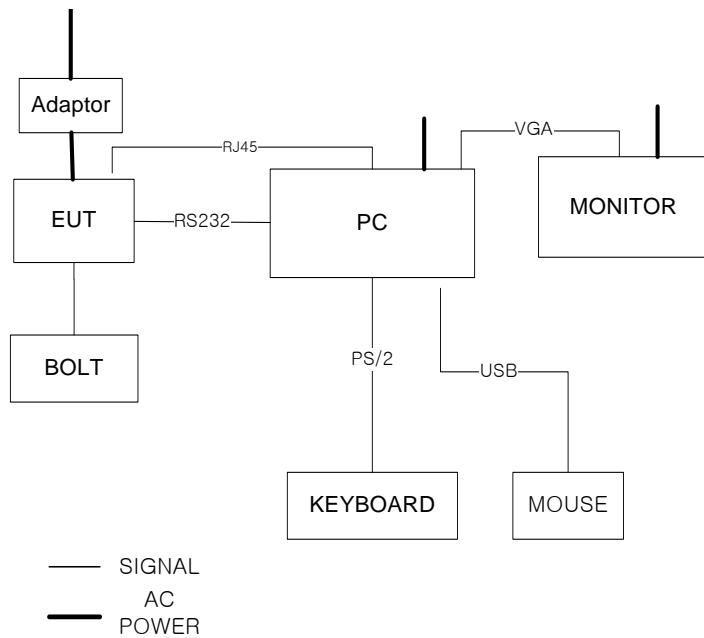


Figure 2: Test Setup\_PoE Mode



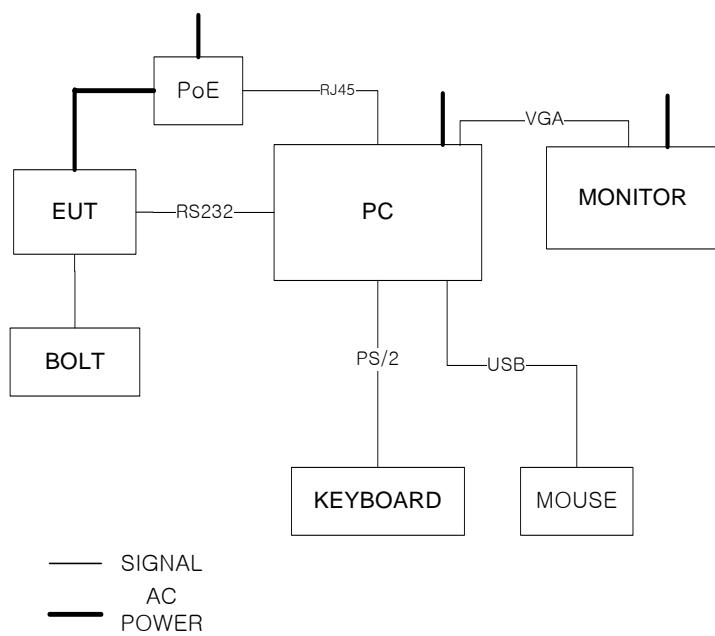

## 5. TEST AND MEASUREMENTS

### Summary of Test Results

Requirement	FCC, 47CFR15	Report Section	Test Result
Antenna Requirement	15.203	5.1	PASS
Conducted Emissions			
Radiated Emissions			
Field strength 9 kHz to 30 MHz	15.209 & 15.205	5.2	PASS
Field strength 30 MHz to 1000 MHz			
Occupied bandwidth	-	5.3	-

\* According to the Section 15.33(b)(1)&(c), Radiated Emissions & Conducted Emissions were reported in Report No. KTI12EF011001.

## 5.1 ANTNNNA REQUIREMENT

### 5.1.1 Regulation

#### FCC 47CFR15 – 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

### 5.1.2 Result: PASS

The transmitter has an integral loop coil antenna that is enclosed within the housing of the EUT, and meets the requirements of this section.



## 5.2 EMISSION TEST

### 5.2.1. Conducted Emissions

**Result:****Pass**

The line-conducted facility is located inside a 2.3M x 3.5M x 5.5M shielded closure.

The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 605-05. A 1m x 1.5m wooden table 80cm high is placed 80cm away from the conducting ground plane and 40cm away from the sidewall of the shielded room. Electro-Metroics Model EM-7823 (9kHz-30MHz)50ohm/50 uH Line-Impedance Stabilization Networks (LISN) are bonded to the shielded room.

The EUT is powered from the Electro-Metroics LISN and the support equipment is powered from the Kyoritsu LISN. Power to the LISN are filtered by a high-current high-insertion loss shield enclosures power line filters (100dB 14kHz-1GHz).

The purpose of the filter is to attenuate ambient signal interference and this filter is also bonded to the shielded enclosure.

All electrical cables are shielded by copper pipe with inner diameter of 1".

If the EUT is a DC-Powered device, power will be derived from the source power supply it normally will be powered from and this supply lines will be connected to the Rohde & Schwarz LISN.

All interconnecting cables more than 1 meter were shortened by non-inductive bundling (serpentine fashion) to a 1-meter length.

Sufficient time for the EUT, Support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer to determine the frequency producing the maximum EME from the EUT.

The frequency producing the maximum level was reexamined using EMI field Intensity meter (ESIB40). The detector function was set to CISPR quasi-peak mode.

The bandwidth of the receiver was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was maximized by: switching power lines; varying the mode of operation or resolution; clock or data exchange speed; if applicable; whichever determined the worst-case emission.

Photographs of the worst-case emission can be seen in photograph of conducted test.

Each EME reported was calibrated using self-calibrating mode.



Figure 3: Spectral Diagram\_Adaptor\_LINE-PE

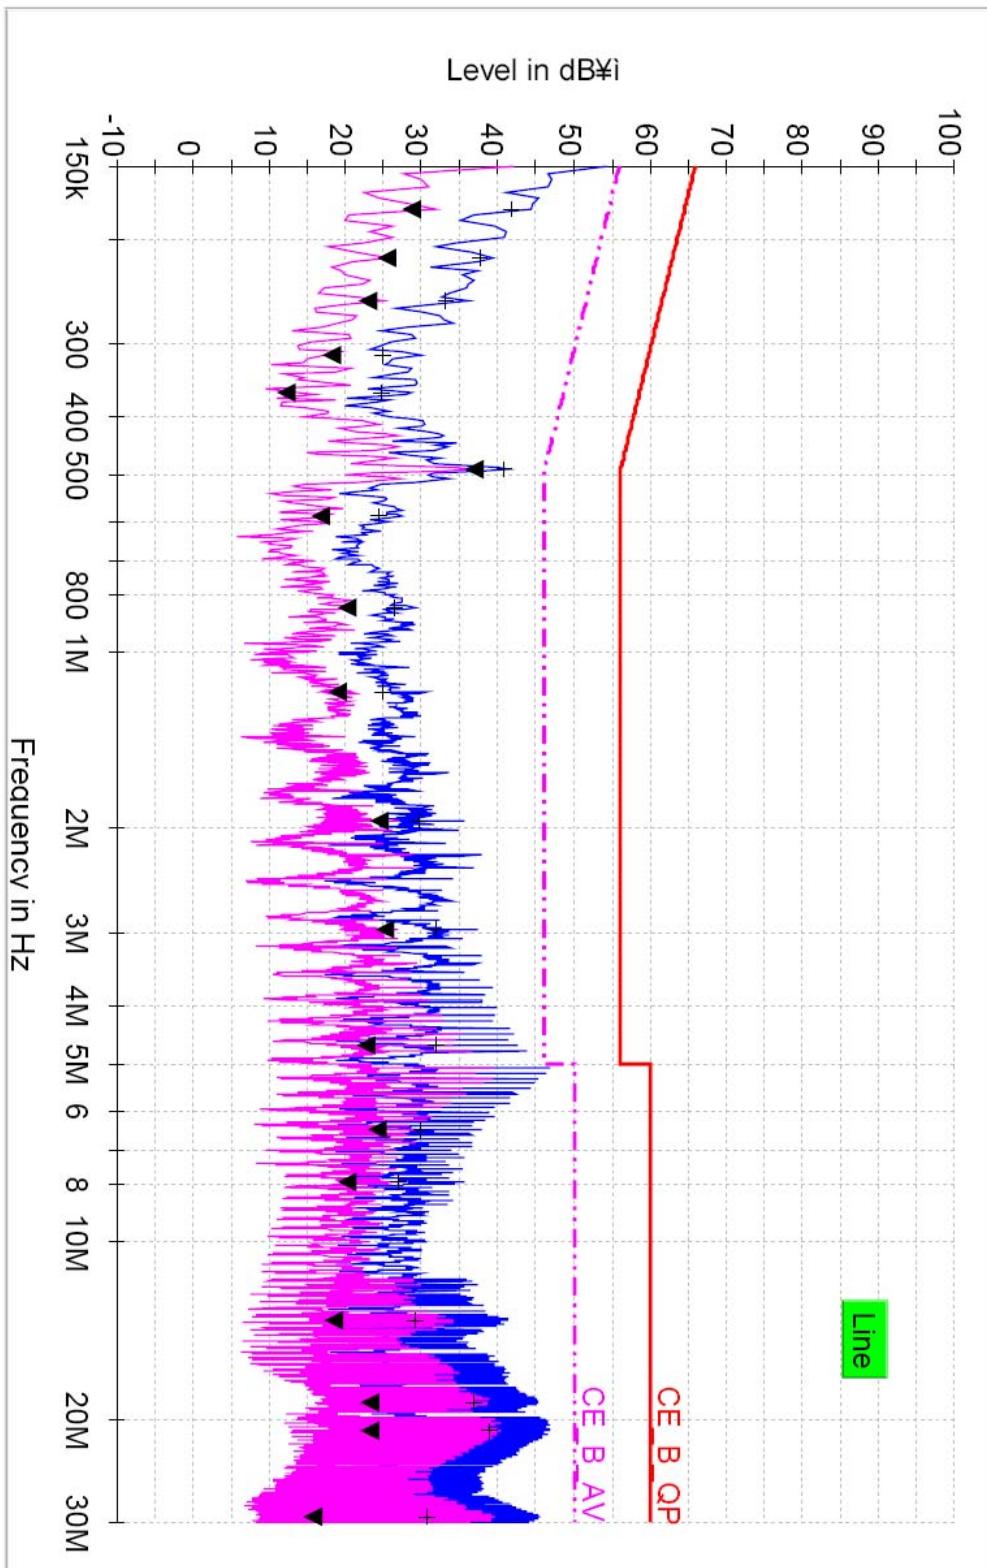




Figure 4: Spectral Diagram\_Adaptor\_NEUTRAL-PE

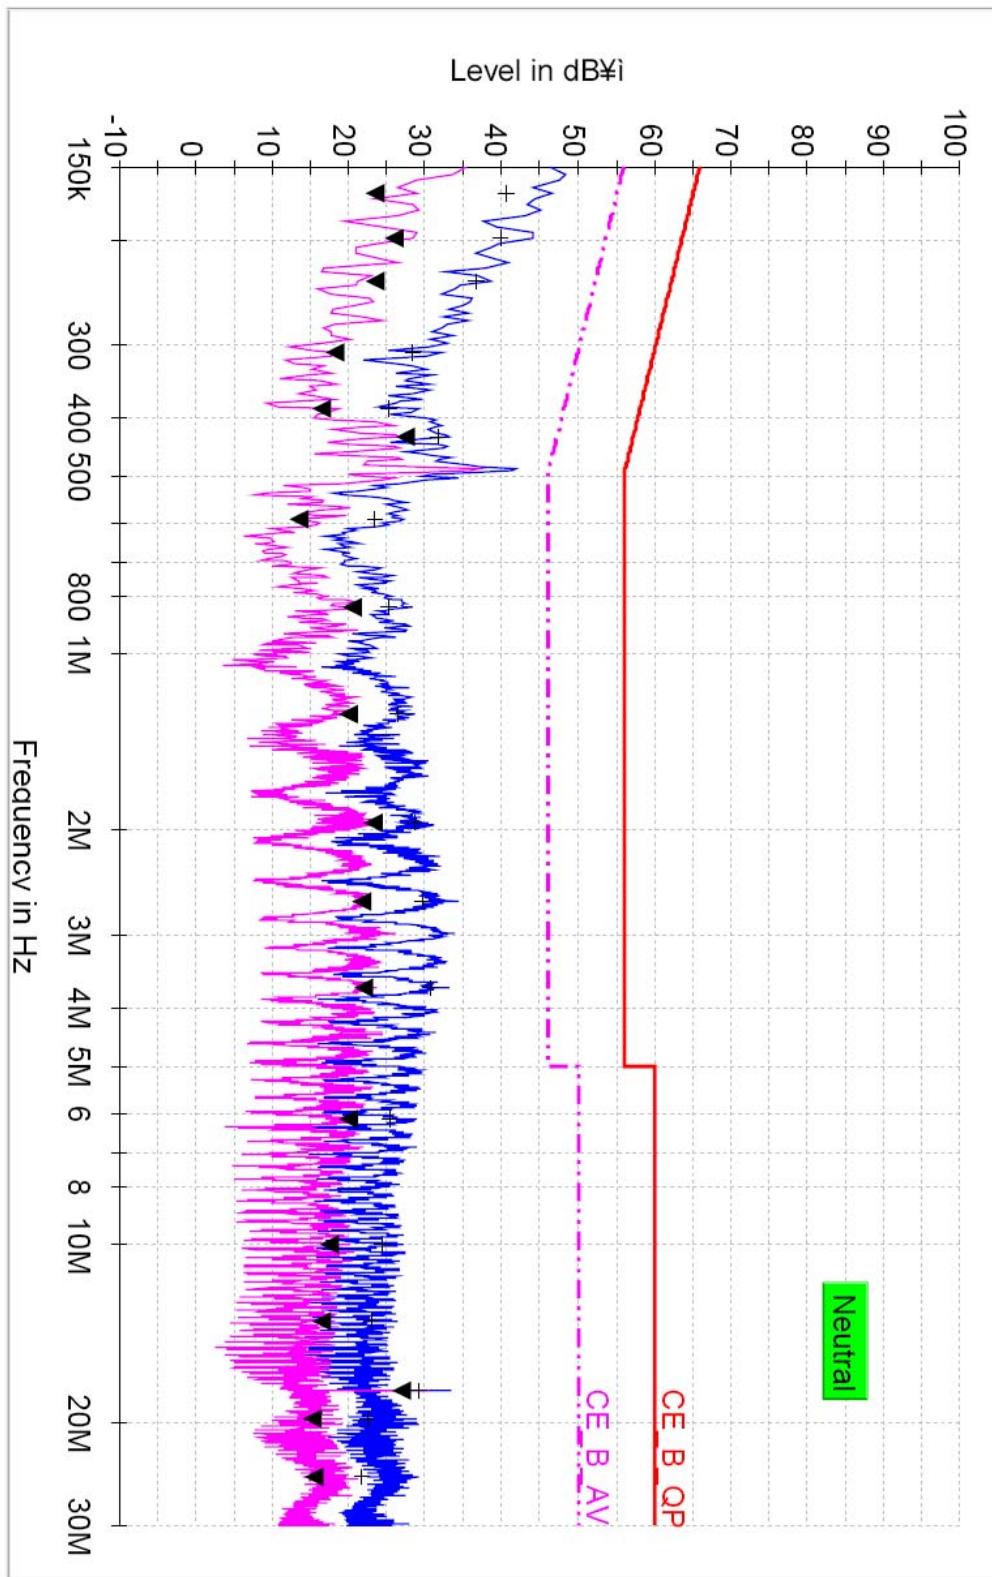




Table 2: Test Data, Conducted Emissions

Frequency (MHz)	(1) Reading (dB $\mu$ V)		Line	(2) Limit (dB $\mu$ V)		(3) Margin (dB)	
	QP	AV		QP	AV	QP	AV
0.17	40.5	23.5	L2	65.2	55.2	24.6	31.6
0.39	25.1	16.5	L2	58.1	48.1	33.0	31.7
0.59	23.4	13.4	L2	56.0	46.0	32.6	32.6
0.84	25.2	20.4	L2	56.0	46.0	30.8	25.6
19.77	22.5	15.1	L2	60.0	50.0	37.5	34.9
24.90	21.6	15.5	L2	60.0	50.0	38.4	34.5

**NOTES:**

1. All modes of operation were investigated  
And the worst-case emissions are reported.
2. All other emissions are non-significant.
3. All readings are calibrated by self-mode in receiver.
4. Measurements using CISPR quasi-peak mode.
5. L1 = LINE-PE, L2 = NEUTRAL-PE
6. The limit for Class B digital device is 66dB $\mu$ V to 56dB $\mu$ V from 150KHz to 500KHz, 56dB $\mu$ V from 500KHz to 5MHz, 60dB $\mu$ V Above 5MHz.

**♠ Margin Calculation**

$$(3) \text{ Margin} = (2) \text{ Limit} - (1) \text{ Reading}$$



Figure 3: Spectral Diagram\_PoE\_LINE-PE

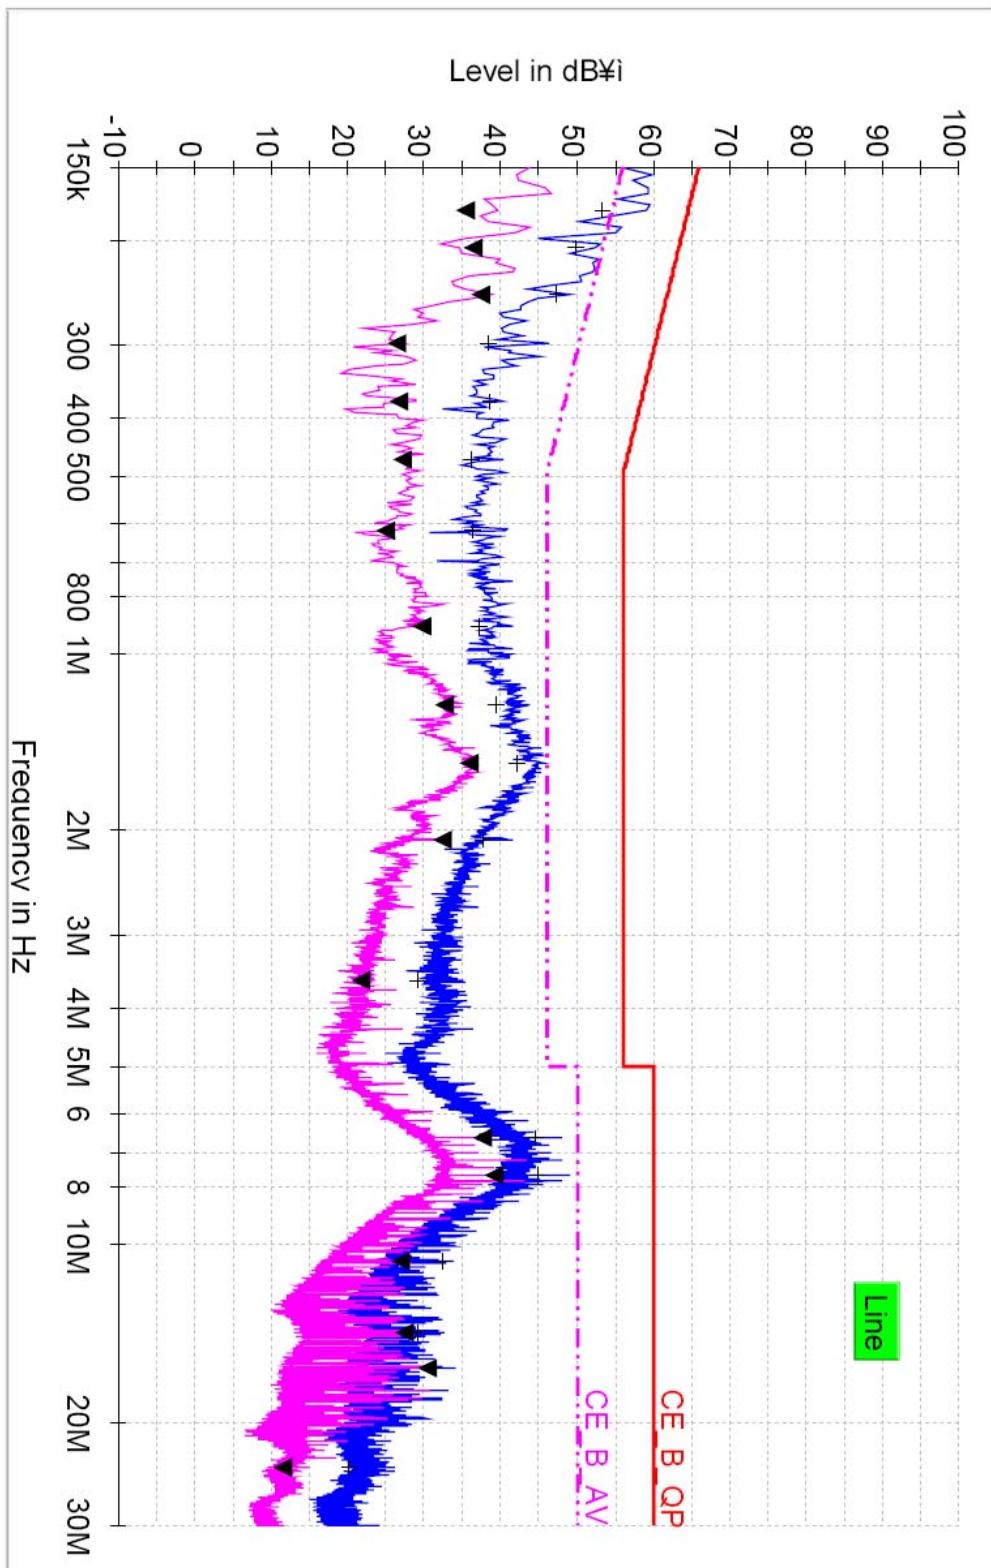




Figure 4: Spectral Diagram\_Adaptor\_NEUTRAL-PE

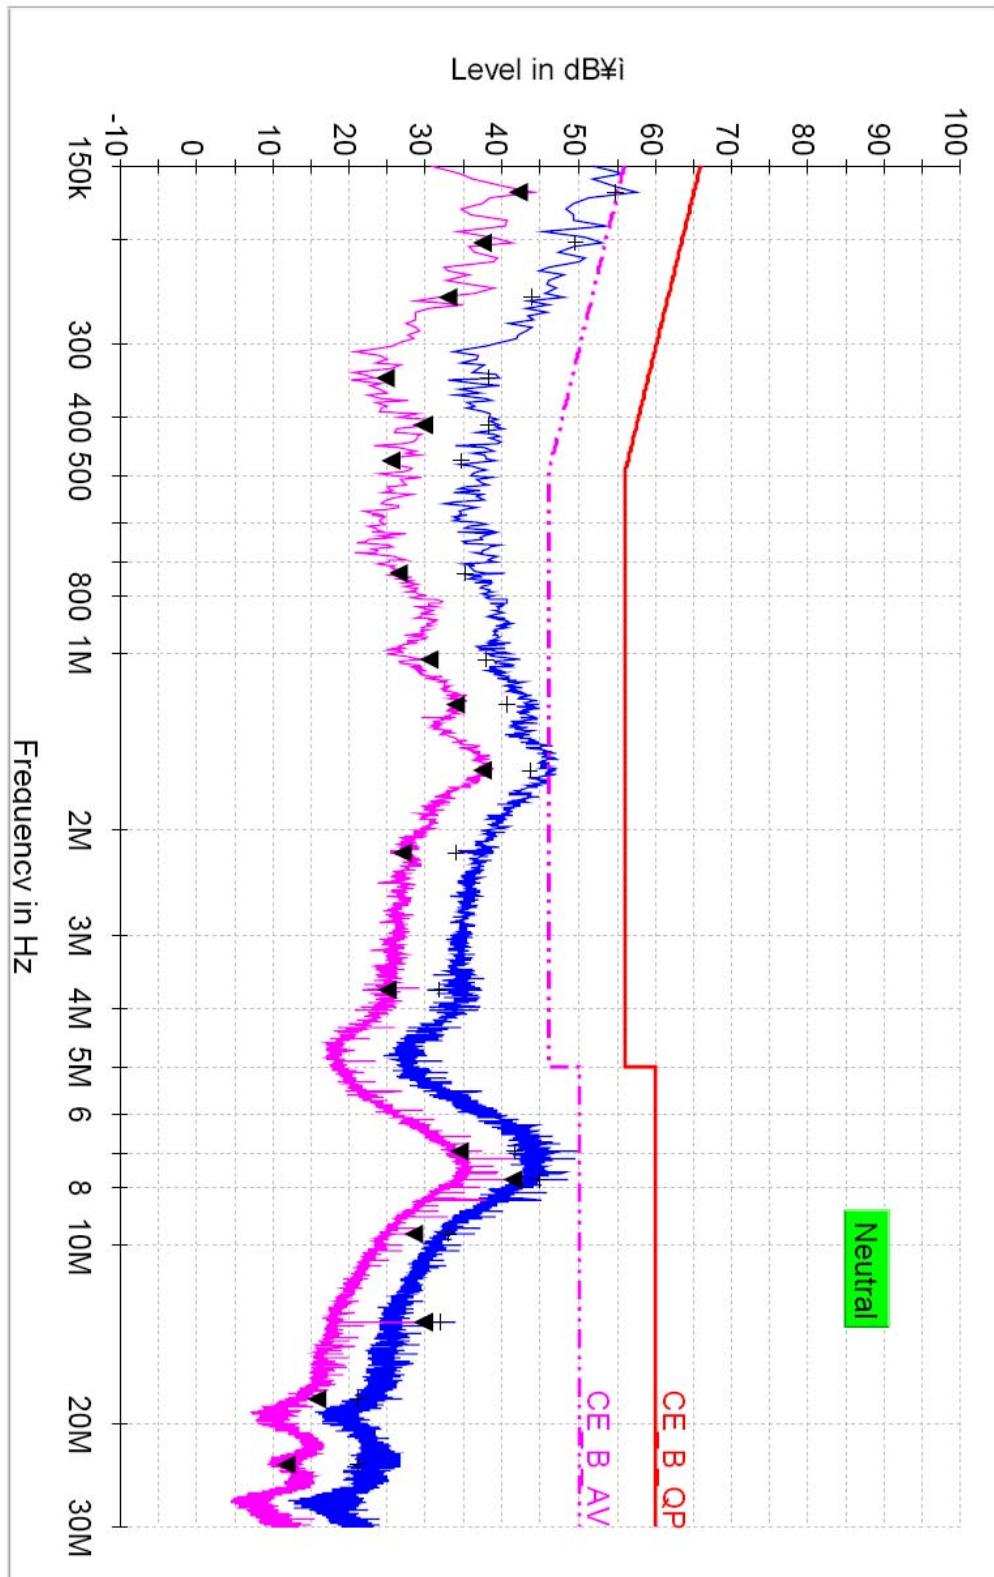




Table 2: Test Data, Conducted Emissions

Frequency (MHz)	(1) Reading (dB $\mu$ V)		Line	(2) Limit (dB $\mu$ V)		(3) Margin (dB)	
	QP	AV		QP	AV	QP	AV
0.16	56.9	44.0	L1	65.4	55.4	8.4	11.4
0.19	51.9	39.0	L1	63.9	53.9	12.0	14.9
1.22	40.7	33.9	L2	56.0	46.0	15.3	26.1
1.58	43.5	37.4	L2	56.0	46.0	12.5	22.6
6.52	40.0	31.5	L1	60.0	50.0	20.0	18.5
7.77	44.9	41.4	L2	60.0	50.0	15.1	18.6

## NOTES:

1. All modes of operation were investigated  
And the worst-case emissions are reported.
2. All other emissions are non-significant.
3. All readings are calibrated by self-mode in receiver.
4. Measurements using CISPR quasi-peak mode.
5. L1 = LINE-PE, L2 = NEUTRAL-PE
6. The limit for Class B digital device is 66dB $\mu$ V to 56dB $\mu$ V from 150KHz to 500KHz, 56dB $\mu$ V from 500KHz to 5MHz, 60dB $\mu$ V Above 5MHz.

## ♠ Margin Calculation

$$(3) \text{ Margin} = (2) \text{ Limit} - (1) \text{ Reading}$$



## 5.2.2 Radiated Emissions

### 5.2.2.1 Regulation

FCC 47CFR15 – 15.209

(a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field strength limit (uV/m)	Field strength limit (dBuV/m)	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	48.5-13.8	300
0.490 – 1.705	24000/F(kHz)	33.8-23.0	30
1.705 – 30.0	30	29.5	30
30 – 88	100	40.0	3
88 – 216	150	43.5	3
216 – 960	200	46.0	3
Above 960	500	54.0	3

### 5.2.2.2 Measurement Procedure

Radiated Emissions Test, 9kHz to 30MHz (Magnetic Field Test)

1. The preliminary radiated measurements were performed to determine the frequency producing the maximum emissions at a distance of 3 meters according to Section 15.31(f)(2).
2. The EUT was placed on the top of the 0.8-meter height, 1 x 1.5 meter non-metallic table.
3. Emissions from the EUT are maximized by adjusting the orientation of the Loop antenna and rotating the EUT on the turntable. Manipulating the system cables also maximizes EUT emissions if applicable.
4. To obtain the final measurement data, each frequency found during preliminary measurements was re-examined and investigated. The test-receiver system was set up to average, peak, and quasi-peak detector with specified bandwidth.

**Radiated Emissions Test, 30 MHz to 1000 MHz**

1. The preliminary radiated measurements were performed to determine the frequency producing the maximum emissions in an anechoic chamber at a distance of 3 meters.
2. The EUT was placed on the top of the 0.8-meter height, 1 x 1.5 meter non-metallic table. To find the maximum emission levels, the height of a measuring antenna was changed and the turntable was rotated 360
3. The antenna polarization was also changed from vertical to horizontal. The spectrum was scanned from 30 to 1000 MHz using the Biconical and Logperiodue broadband antenna,
4. To obtain the final measurement data, the EUT was arranged on a turntable situated on a 4 x 4 meter at the Open Area Test Site. The EUT was tested at a distance 3 meters.
5. Each frequency found during preliminary measurements was re-examined and investigated. The test-receiver system was set up to average, peak, and quasi-peak detector function with specified bandwidth.
6. The presence of ambient signals was verified by turning the EUT off. In case an ambient signal was detected, the measurement bandwidth was reduced temporarily and verification was made that an additional adjacent peak did not exist. This ensures that the ambient signal does not hide any emissions from the EUT

**5.2.2.3 Calculation of the field strength limits below 30 MHz**

1. No special calculation for obtaining the field strength in dBuV/m is necessary, because the EMI receiver and the active loop antenna operate as a system, where the reading gives directly the field strength result (dBuV/m). The antenna factors and cable losses are already taken into consideration.
2. For test distance other than what is specified, but fulfilling the requirements of section 15.31 (f)(2) the field strength is calculated by adding additionally an extrapolation factor of 40dB/decade (inverse linear distance for field strength measurements).
3. All following emission measurements were performed using the test receiver's average, peak, and quasi-peak detector function with specified bandwidth.



## 5.2.2.4 Test Results (Test mode : TX on)

PASS

&lt;SW301R\_Adaptor&gt;

Table 3: Test Data, Fundamental Frequency (Ver / Hor)

Frequency (MHz)	Pol.	Reading (dB $\mu$ V)	AFCL (dB/m)	Actual (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
0.125	V	50.24	11.96	62.2	105.7	46.5	QP

Frequency (MHz)	Pol.	Reading (dB $\mu$ V)	AFCL (dB/m)	Actual (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
0.125	H	57.64	11.96	69.6	105.7	36.1	QP

## FCC 47CFR15 – 15.209 (9 kHz - 30 MHz)

Table 4: Test Data, Radiated Emission below 30 MHz

Frequency (MHz)	Pol.	Height [m]	Angle [°]	(1) Reading (dB $\mu$ V)	(2) AFCL (dB/m)	(3) Actual (dB $\mu$ V/m)	(4) Limit (dB $\mu$ V/m)	(5) Margin (dB)
0.25064	H	1.36	180	24.6	11.9	36.5	99.6	63.1
0.37596	H	1.25	178	30.7	11.9	42.6	96.1	53.5
0.50128	V	1.25	180	34.2	10.8	45.0	73.6	28.6
0.62560	V	1.20	180	31.4	10.8	42.2	71.6	29.4
-								
-								

Margin (dB) = Limit – Actual

[Actual = FS + AF + CL ]

1.H = Horizontal, V = Vertical Polarization



2.AF/CL = Antenna Factor and Cable Loss

3.FS = RA + DF

Where FS = Field strength in dB $\mu$ V/mRA = Reciever Amplitude in dB $\mu$ V/m

DF = Distance Extrapolation Factor in dB

Antenna Distance : 3m

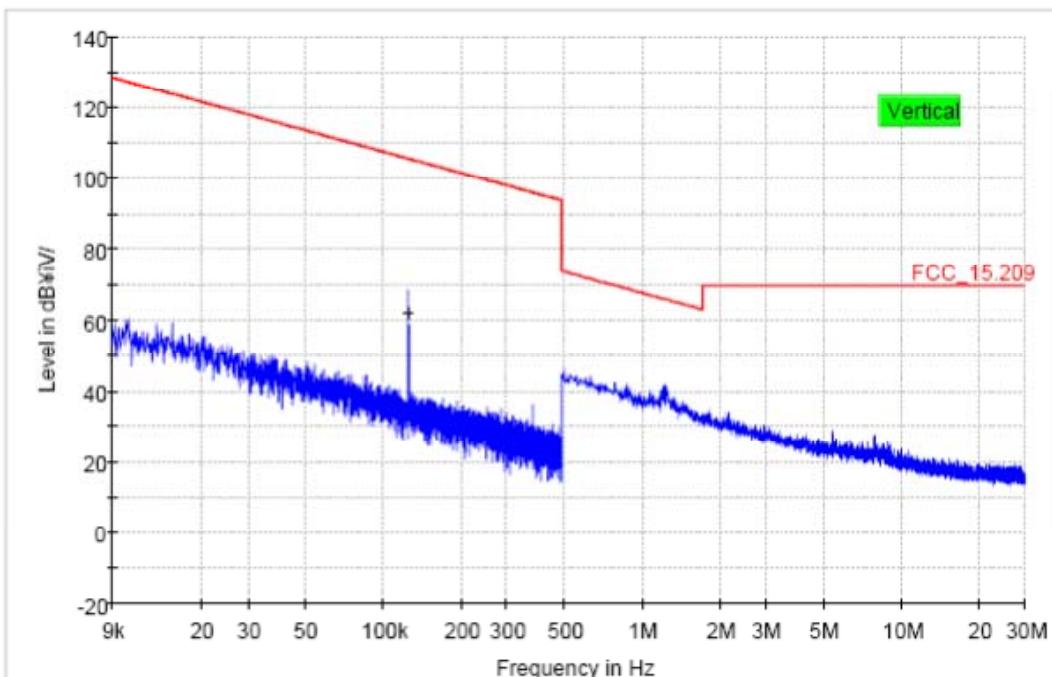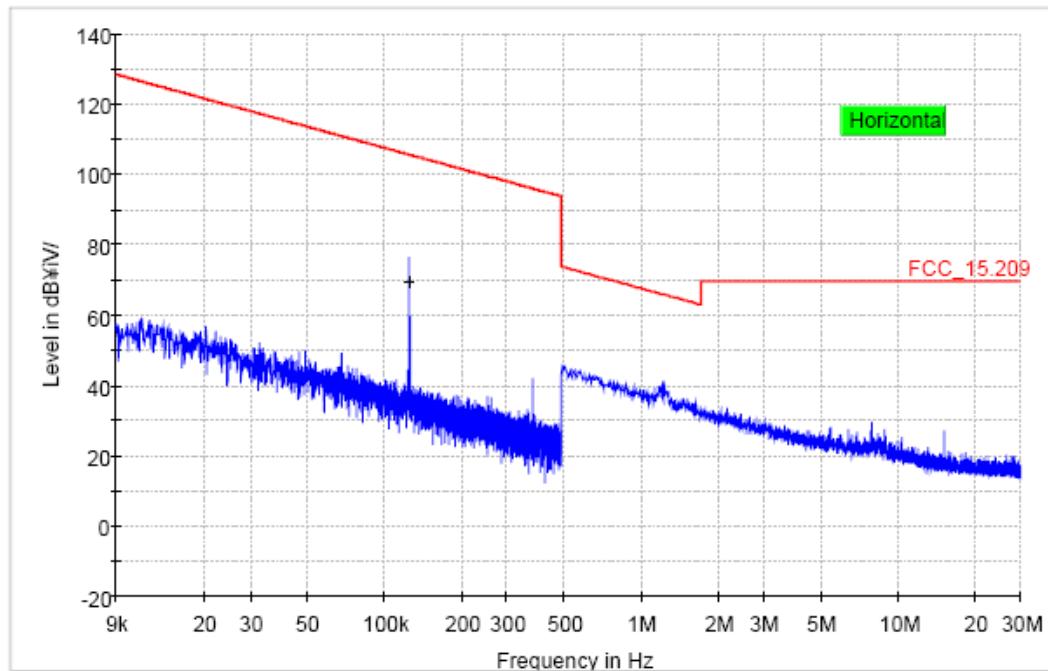**Figure 5: Radiated spurious emissions below 30 MHz****Spurious Emissions from 9 kHz to 30 MHz – Vertical****Spurious Emissions from 9 kHz to 30 MHz – Horizontal**



&lt;SW301R\_PoE&gt;

Table 3: Test Data, Fundamental Frequency (Ver / Hor)

Frequency (MHz)	Pol.	Reading (dB $\mu$ V)	AFCL (dB/m)	Actual (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
0.125	V	23.44	11.96	65.1	105.7	40.6	QP

Frequency (MHz)	Pol.	Reading (dB $\mu$ V)	AFCL (dB/m)	Actual (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector
0.125	H	42.34	11.96	51.7	105.7	54.0	QP

## FCC 47CFR15 – 15.209 (9 kHz - 30 MHz)

Table 4: Test Data, Radiated Emission below 30 MHz

Frequency (MHz)	Pol.	Height [m]	Angle [°]	(1) Reading (dB $\mu$ V)	(2) AFCL (dB/m)	(3) Actual (dB $\mu$ V/m)	(4) Limit (dB $\mu$ V/m)	(5) Margin (dB)
0.25064	V	1.52	180	28.1	11.9	40.0	99.6	59.6
0.37596	H	1.32	178	29.3	11.9	41.2	96.1	54.9
0.50128	V	1.25	180	34.2	10.8	45.0	73.6	39.4
0.62560	V	1.20	180	31.4	10.8	42.2	71.6	29.4
-								
-								

Margin (dB) = Limit – Actual

[Actual = FS + AF + CL ]

1.H = Horizontal, V = Vertical Polarization



2.AF/CL = Antenna Factor and Cable Loss

3.FS = RA + DF

Where FS = Field strength in dB $\mu$ V/mRA = Reciever Amplitude in dB $\mu$ V/m

DF = Distance Extrapolation Factor in dB

Antenna Distance : 3m

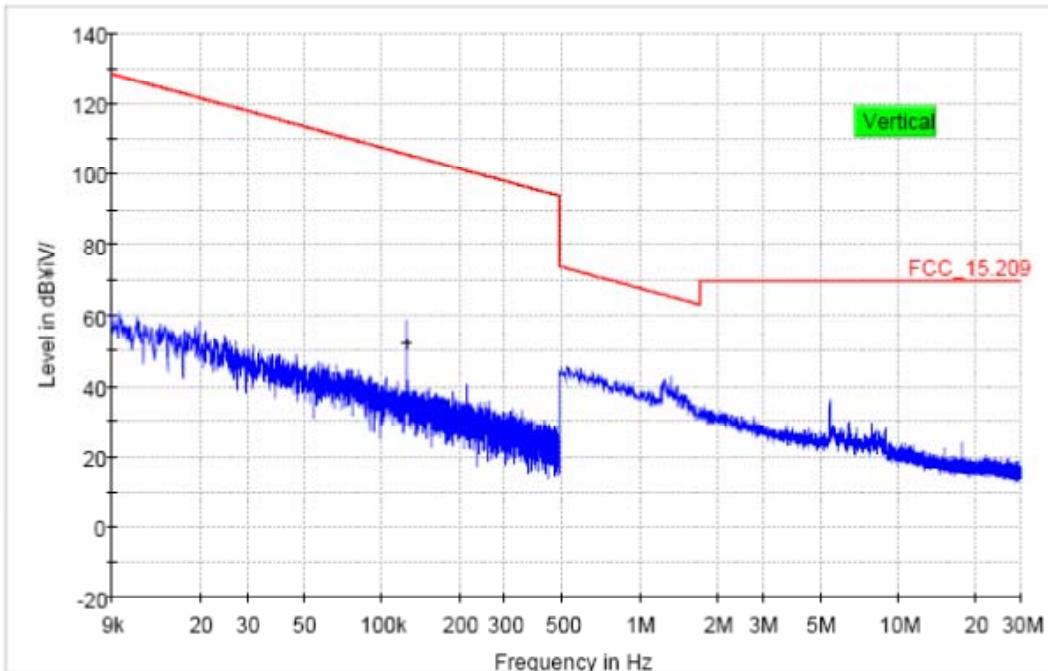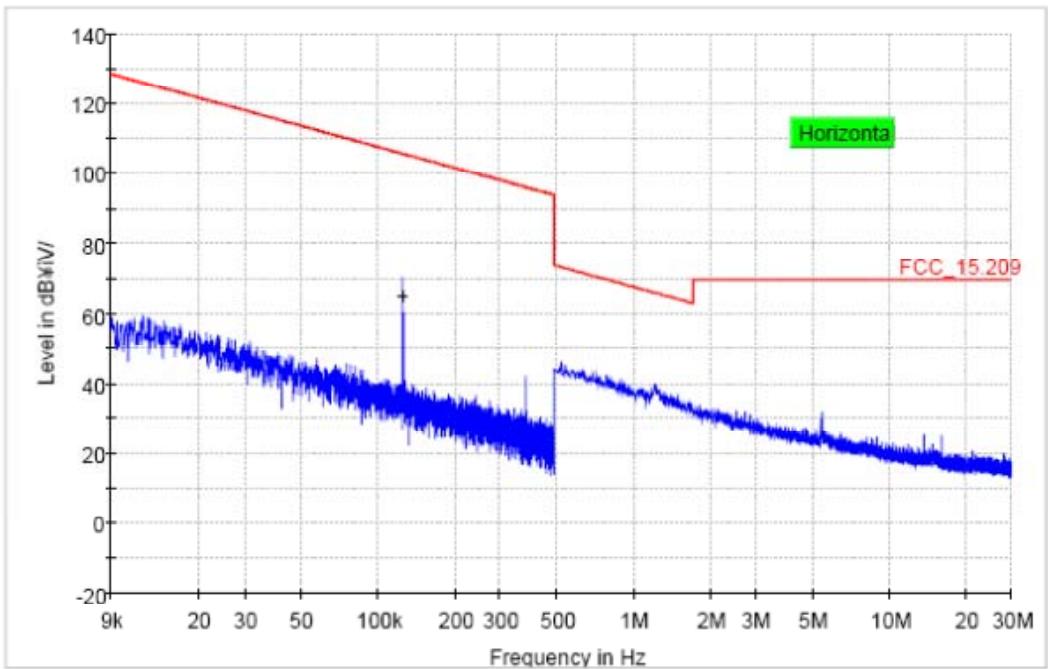**Figure 5: Radiated spurious emissions below 30 MHz****Spurious Emissions from 9 kHz to 30 MHz – Vertical****Spurious Emissions from 9 kHz to 30 MHz – Horizontal**



## 5.3 Occupied bandwidth


### 5.3.1 Measurement Procedure

1. Place the EUT in the text fixture and switch it on.
2. Use the following spectrum analyzer settings: RBW = VBW = 1 kHz, Span = wide enough to capture the 20 dB bandwidth, Trace mode = Max Hold.
3. After trace stabilization, set the first marker and the first display line to the signal peak. Set the second display line 20 dB below the first display line. The Second marker and its delta marker shall be set to cross point of the spectrum line and the second display line and note these frequencies.
4. Alternatively the 20 dB down function of the analyzer could be used, if this function will be applicable to the displayed spectrum.

Figure 6: Occupied bandwidth

#### <Use of Adaptor>

#### Occupied Bandwidth = 4.8 kHz

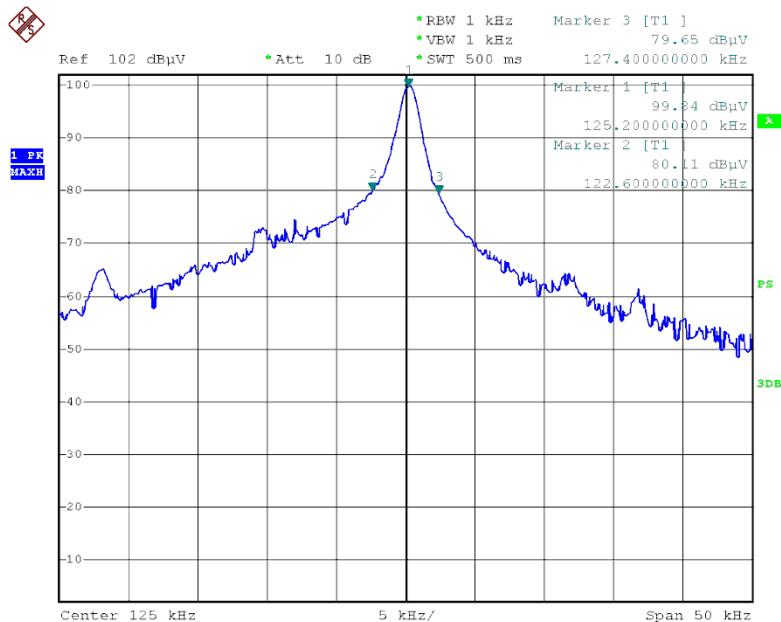


Date: 29.NOV.2012 10:34:48

$F_L$	$F_H$	Bandwidth ( $F_H - F_L$ )
122.60 (kHz)	127.40 (kHz)	4.8 (kHz)



## &lt;Use of POE&gt;

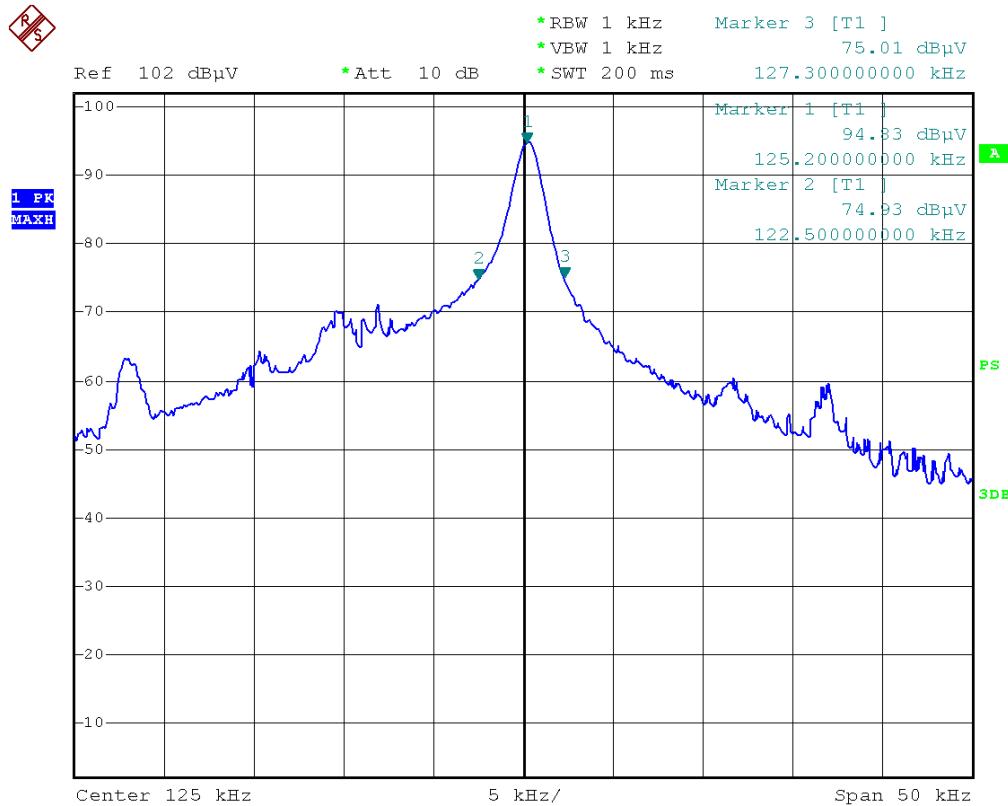Occupied Bandwidth = 4.8 kHz

Date: 29.NOV.2012 10:39:14

$F_L$	$F_H$	Bandwidth ( $F_H - F_L$ )
122.50 (kHz)	127.30 (kHz)	4.8 (kHz)