

**ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT
INTENTIONAL RADIATOR CERTIFICATION TO
FCC PART15C:2007 REQUIREMENT (TX)**

Product Name : RC WATER CANON(REMOTE CONTROL)
Model Number : PR26
FCC ID : W2HPR26
Report Number : SZEE090105113319
Date : Feb. 10, 2009

Prepared for:

CATHAY PLASTIC FACTORY LTD.
Flat B, 7/F., Cheong Wah Fty. Bldg., 39, Sheung Heung Rd.,
Tokwawan, Kowloon, Hongkong.
TEL: +852-2362 5040
FAX: +852-2774 3259

Prepared by:

CENTRE TESTING INTERNATIONAL (Shenzhen) Corporation
Building C, Hongwei Industrial Zone, Baoan 70 District,
Shenzhen, Guangdong, China
TEL: +86-755-3368 3668
FAX: +86-755-3368 3385

**This report shall not be reproduced, except in full, without the written approval of
CENTRE TESTING INTERNATIONAL**

广东省深圳市宝安区 70 区鸿威工业园 C 栋
Building C, Hongwei Industrial Zone, Baoan 70 District, Shenzhen

TABLE OF CONTENTS

Description	Page
1. VERIFICATION OF CONFORMITY	3
2. TEST SUMMARY	4
3. MEASUREMENT UNCERTAINTY	4
4. PRODUCT INFORMATION	4
5. FACILITIES AND ACCREDITATIONS.....	5
6. SETUP OF EQUIPMENT UNDER TEST.....	6
7. FCC RADIATED EMISSION TEST.....	7
7.1 LIMITS OF FCC RADIATED EMISSION TEST	7
7.2 BLOCK DIAGRAM OF TEST SETUP	7
7.3 PROCEDURE OF RADIATED EMISSION TEST	8
7.4 TEST RESULT OF RADIATED EMISSION TEST	9
APPENDIX 1 PHOTOGRAPHS OF TEST SETUP.....	12
APPENDIX 2 EXTERNAL PHOTOGRAPHS OF EUT	13
APPENDIX 3 INTERNAL PHOTOGRAPHS OF EUT	14

1. VERIFICATION OF CONFORMITY

CATHAY PLASTIC FACTORY LTD.

Applicant & Address: Flat B, 7/F., Cheong Wah Fty. Bldg., 39, Sheung Heung Rd.,
Tokwawan, Kowloon, Hongkong.

Type of Test: FCC Part 15C (Certification)

Equipment Under Test: RC WATER CANON(REMOTE CONTROL)

Trade Name: N/A

Model Number: PR26

Serial Number: N/A

Date of test: Jan. 5, 2009 to Feb. 10, 2009

Condition of Test Sample: Normal

The above equipment was tested by Centre Testing International for compliance with the requirements set forth in the FCC Rules and Regulations Part 15, Subpart B and the measurement procedure according to ANSI C63.4.

The test results of this report relate only to the tested sample identified in this report.

Prepared by : Lily Y

Lily Yan

Reviewed by : Christy Chen

Christy Chen

Approved by : Lily Y (fm)

Jim Zhang
Manager

Date : Feb. 10, 2009



2. TEST SUMMARY

The EUT has been tested according to the following specifications:

EMISSION				
Standard	Test Type	Rule	Result	Remark
FCC Part 15	Conducted emission at AC power port	15.207	N/A	EUT is powered by battery.
	Radiated emission	15.209 15.227	PASS	See clause 7 in this report

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement items	Value
Radiated emission	4.6 dB

4. PRODUCT INFORMATION

The Model: PR26

The EUT is a short range, lower power, 85003(07159) Remote control designed as an "Input Device". It is designed by way of utilizing the FSK modulation achieves the system operating.

A major technical descriptions of EUT is described as following:

- A). Operation Frequency: 27.145 MHz, one channel.
- B). Modulation: FSK
- C). Antenna Designation: integral antenna (it can't be moved during the test)
- D). Power Supply: DC3 V by battery.

5. FACILITIES AND ACCREDITATIONS

5.1 TEST FACILITY

All measurement facilities used to collect the measurement data are located at Building C, Hongwei Industrial Zone, Baoan 70 District, Shenzhen, Guangdong, China. The sites are constructed in conformance with the requirements of ANSI C63.4, and CISPR 16-1-1.

5.2 TEST EQUIPMENT LIST

Instrumentation: The following list contains equipments used at CTI for testing.

The calibrations of the measuring instruments, including any accessories that may effect such calibration, are checked frequently to assure their accuracy. Adjustments are made and correction factors applied in accordance with instructions contained in the manual for the measuring instrument.

Equipment used during the tests:

3M Semi-anechoic Chamber — Radiation Test Site					
Equipment Type	Manufacturer	Model Number	CN	Serial Number	Calibration Date
Spectrum Analyzer	Agilent	E4443A	ASZTTEE E00001-6	MY45300910	09/07/2008
Biconilog Antenna	ETS-LINDGREN	3142C	ASZTTEE E00001-4	920250	01/18/2009
Horn Antenna	ETS-LINDGREN	3117	ASZTTEE E00001-5	00057407	06/27/2008
Loop Antenna	ETS-LINDGREN	6502	BSZTTEE E00005	00071730	09/22/2008
3M Chamber& Accessory Equipments	ETS-LINDGREN	FACT-3	ASZTTEE E00001-1	N/A	05/11/2008

5.3 LABORATORY ACCREDITATIONS AND LISTINGS

The test facilities used to perform radiated and conducted emissions tests are accredited by China National Accreditation Board for Laboratories (CNAS). Electromagnetic Interference tests according to ANSI C63.4 and CISPR 16 requirements.

6. SETUP OF EQUIPMENT UNDER TEST

6.1 SETUP CONFIGURATION OF EUT

1. See test photographs attached in Appendix 1.
2. Make sure EUT work normally during the whole test.

6.2 SUPPORT EQUIPMENT

No.	Device Type	Brand	Model	Series No.	Data Cable	Power Cord
1.	---	---	---	---	---	---
2.	---	---	---	---	---	---
3.	---	---	---	---	---	---

Notes:

1. *All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.*
2. *Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.*

7. FCC RADIATED EMISSION TEST

7.1 LIMITS OF FCC RADIATED EMISSION TEST

a. Rule: FCC Part15.227(a)

The field strength of any emission within this band (frequency between 26.96 – 27.28 MHz) shall not exceed 10000 μ V/m at 3 meters. (80dB μ V at 3m) The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in section 15.35 for limiting peak emissions apply.


b. Rule: FCC Part15.227(b) (15.209)

The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in section 3.9 (Intentional Radiators general limit).as below.


Frequency (MHz)	Field strength μ V/m	Distance(m)	Field strength at 3m dB μ V/m
1.705-30	30	30	29.54
30-88	100	3	40
88-216	150	3	43.5
216-960	200	3	46
Above 960	500	3	54

Note: the tighter limit applies at the band edges.

7.2 BLOCK DIAGRAM OF TEST SETUP

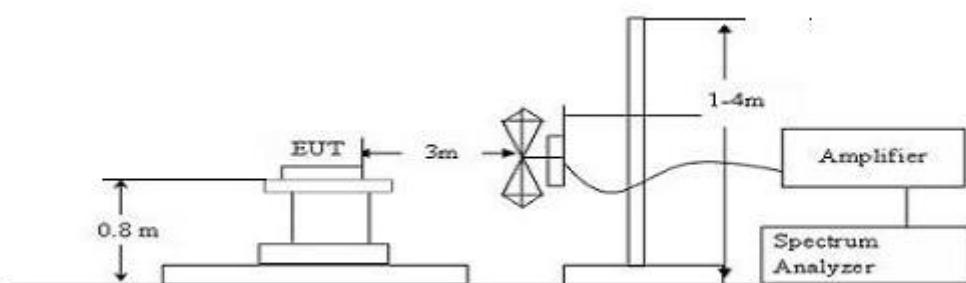

Block Diagram of test setup (above 30MHz)

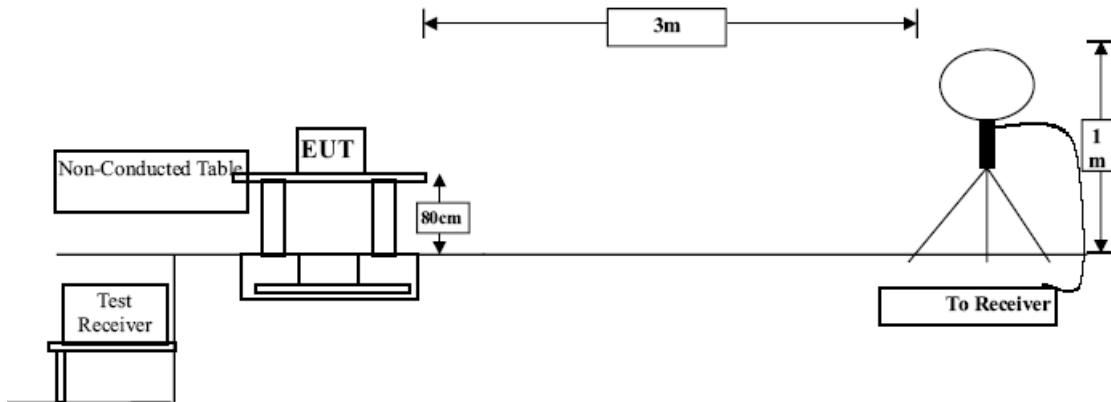

Block Diagram of test setup (below 30MHz)

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

7.3 PROCEDURE OF RADIATED EMISSION TEST

7.3.1 PROCEDURE OF RADIATED EMISSION TEST (above 30MHz)

- The EUT was placed on the top of a turntable 0.8 meters above the ground in the chamber, 3 meters away from the antenna (wideband antenna), which was mounted on the top of a variable-height antenna tower. The maximum values of the field strength are recorded by adjusting the polarizations of the test antenna and rotating the turntable.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the turn table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test frequency analyzer system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

7.3.2 PROCEDURE OF RADIATED EMISSION TEST (below 30MHz)


- The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meters away from the antenna (loop antenna). The maximum values of the field strength are recorded by adjusting the polarizations of the test antenna and rotating the turntable.
- For each suspected emission, the EUT was arranged to its worst case and then turn table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test frequency analyzer system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

7.4 TEST RESULT OF RADIATED EMISSION TEST

EUT : RC WATER CANON(REMOTE CONTROL) **Voltage** : DC 3V
M/N : PR26 **Temperature** : 26°C
Mode : Continuous working **Humidity** : 60%

a. at fundamant frequency- for FCC Part15.227(a)



FCC Radiated Emission Test Result								
Frequency (MHz)	Reading Level (dBuV)	Detector Mode (Peak/AVG)	Correct Factor (dB)	Measurement (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Result (P/F)	Remarks (H/V)
27.1450	19.26	Peak	42.20	61.46	80.00	-18.54	P	H
27.1450	17.38	Peak	42.20	59.58	80.00	-20.42	P	V

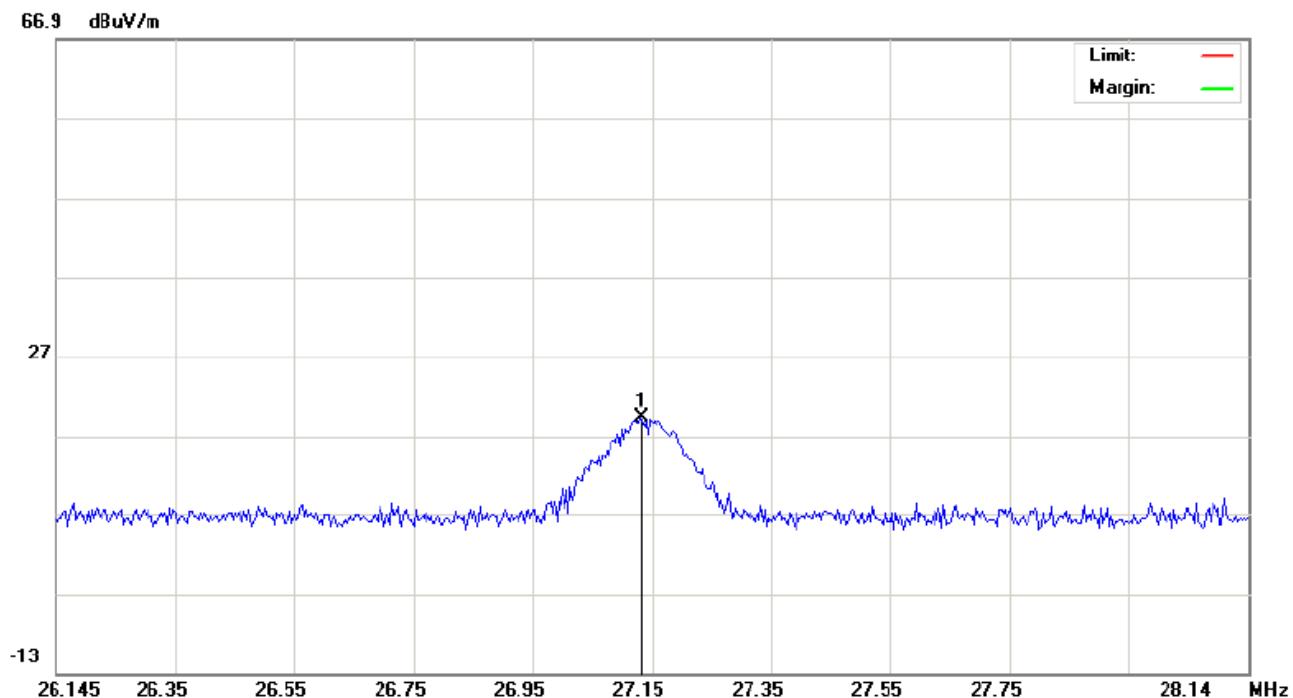

b. at spurious and band edge frequency - for FCC Part15.227(b)

FCC Radiated Emission Test Result								
Frequency (MHz)	Reading Level (dBuV)	Detector Mode (Peak/AVG)	Correct Factor (dB)	Measurement (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Result (P/F)	Remarks (H/V)
54.3000	27.18	Peak	8.78	35.96	40.00	-4.04	P	V
108.2000	20.71	Peak	9.88	30.59	43.50	-12.91	P	V
108.2000	20.63	Peak	9.88	30.51	43.50	-12.99	P	H
162.1000	19.81	Peak	11.26	31.07	43.50	-12.43	P	H
189.8667	21.16	Peak	11.90	33.06	43.50	-10.44	P	H
243.7667	20.80	Peak	13.91	34.71	46.00	-11.29	P	H

Frequency	= Emission frequency in MHz
Reading level	= Uncorrected frequency analyzer reading
Correct Factor	= Correction factors of antenna factor and cable loss
Measurement	= Reading level + Correct factor
Limit (dBuV/m)	= Limit stated in standard
Margin (dB)	= Reading in reference to limit
AVG	= Average

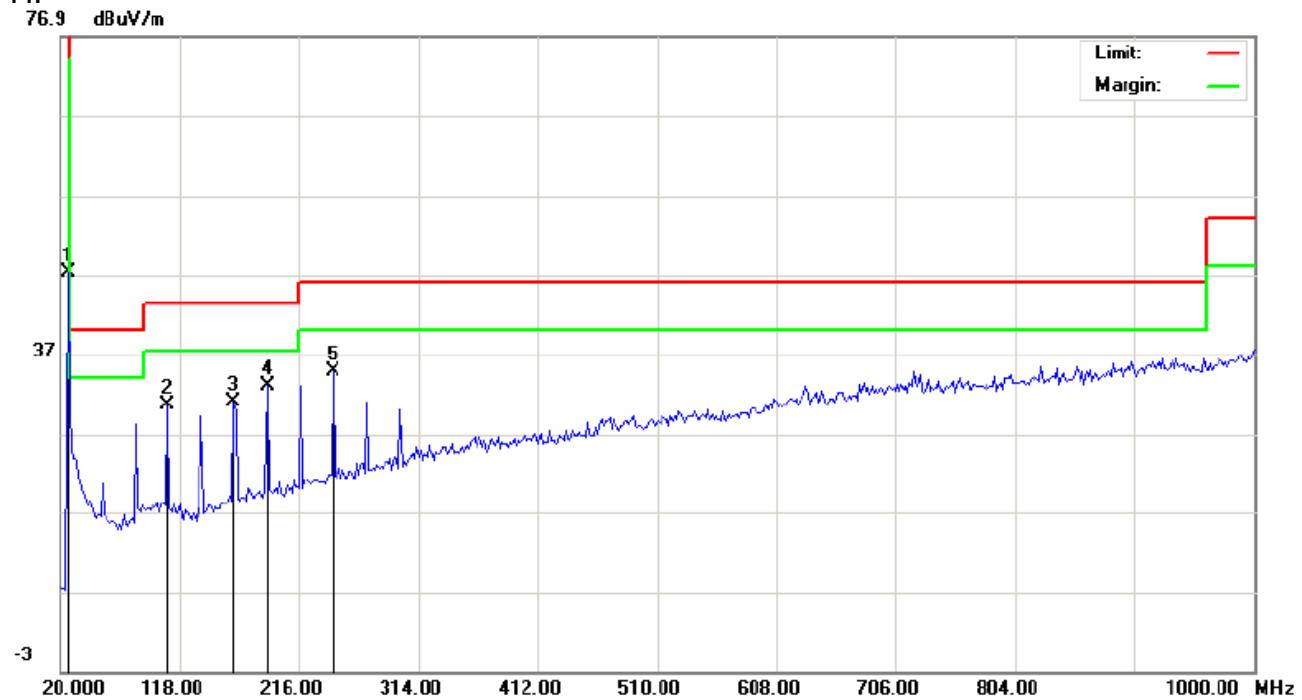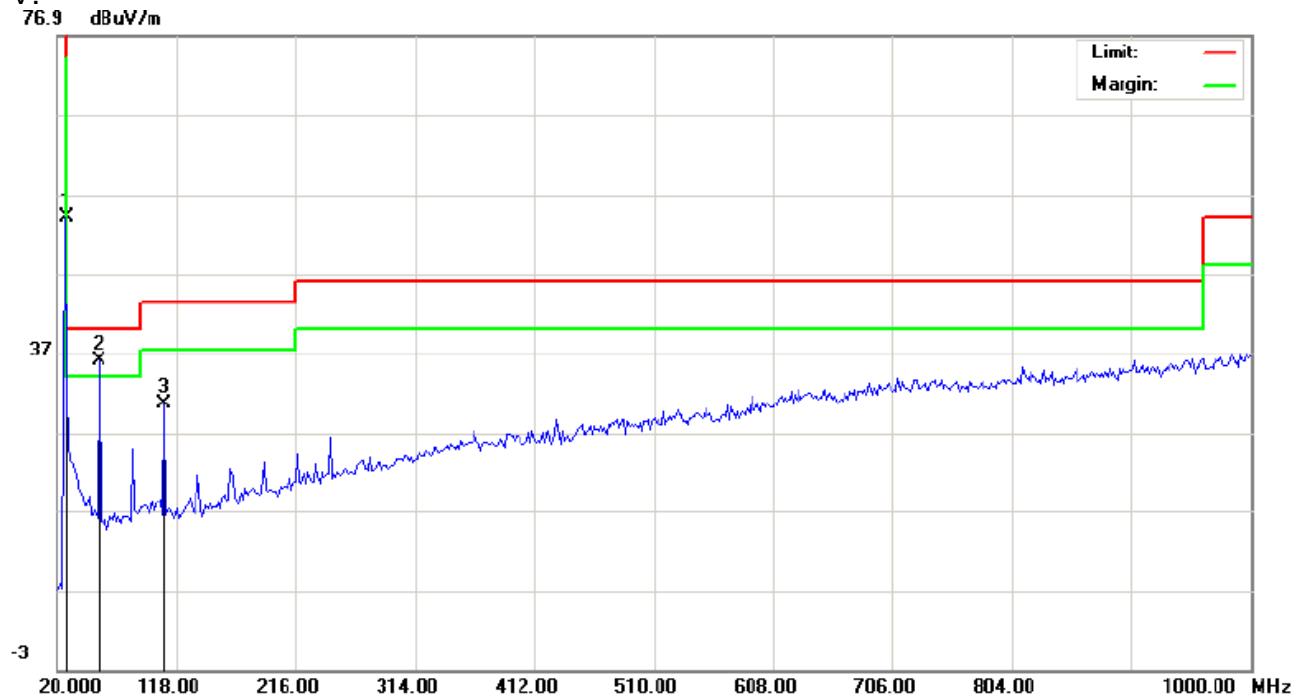
Graphs of Radiated Emissions:**H:****V:**

APPENDIX 1 PHOTOGRAPHS OF TEST SETUP

TEST SETUP OF RADIATED EMISSION (Wideband Antenna)



TEST SETUP OF RADIATED EMISSION (Loop Antenna)

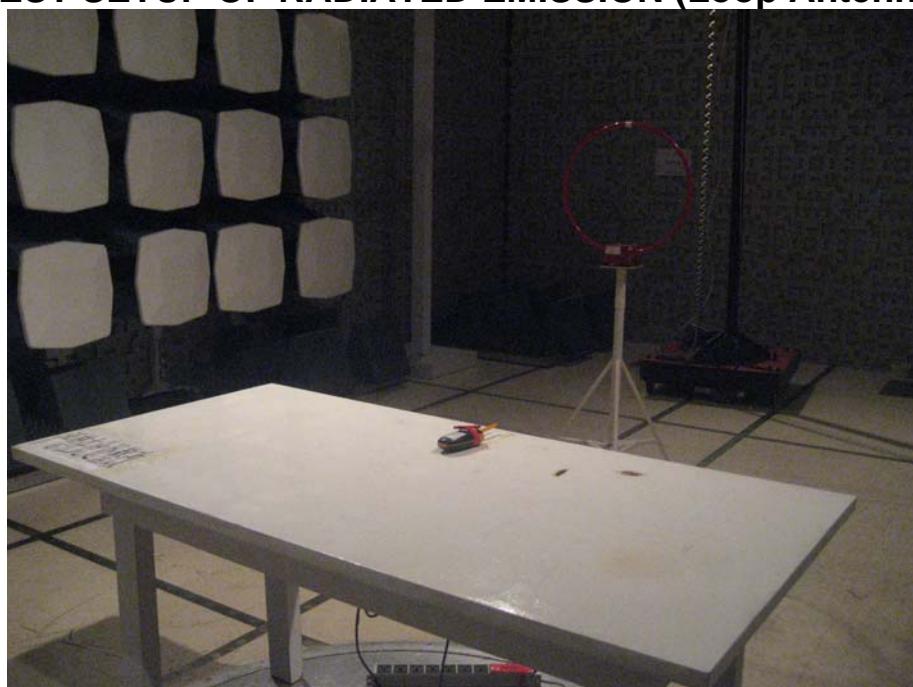

APPENDIX 2 EXTERNAL PHOTOGRAPHS OF EUT



View of EUT-1




View of EUT-2


APPENDIX 3 INTERNAL PHOTOGRAPHS OF EUT



Inside view

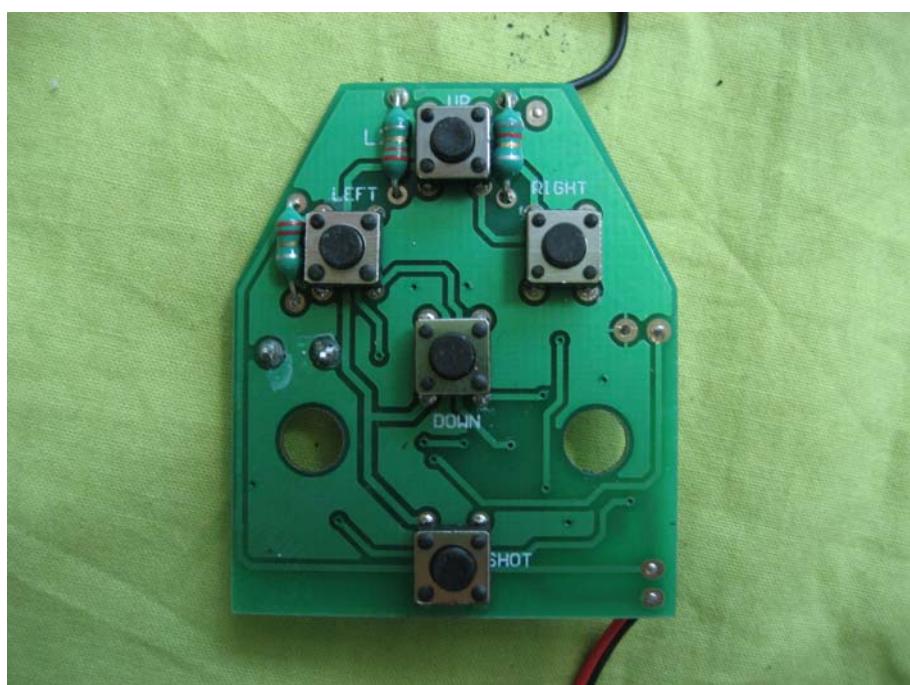

View of PCB-1

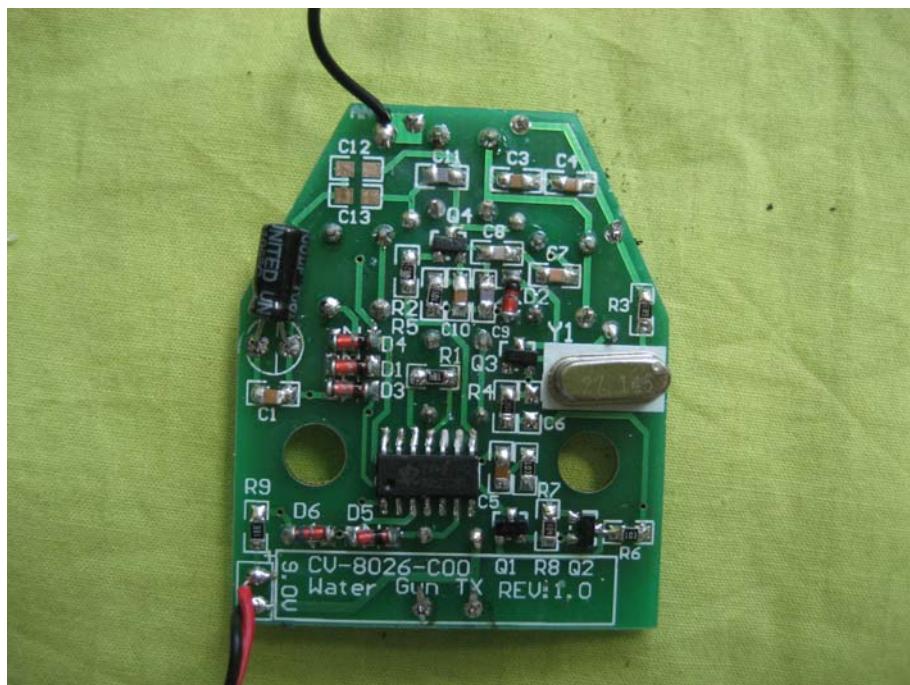

View of PCB-2

----- End of report -----