

FCC TEST REPORT

Product Name : R/C TOYS
Trade Name : XQ
Model Name : XQ RC10-1 49MHz RX(2)
FCC ID : W2MXQTOYS49RX010
Serial Number : N/A
Technical Data : DC 7.2V
Report Number : EESZD04210006-2
Date : May 6, 2011
Regulations : See below

Test Standards	Results
<input checked="" type="checkbox"/> FCC Part 15 Subpart B: 2009	PASS

Prepared for:

XQ ARTS TOYS CO.LTD.
North of Xing Ye Road, Lai Mei Industrial District, Cheng Hai,
Shan Tou Guang Dong, China

Prepared by:

CENTRE TESTING INTERNATIONAL (SHENZHEN) CORPORATION
Building C, Hongwei Industrial Zone, Baoan 70 District,
Shenzhen, Guangdong, China
TEL: +86-755-3368 3668
FAX: +86-755-3368 3385

Check No.: 30002463

This report shall not be reproduced, except in full, without the written approval of
CENTRE TESTING INTERNATIONAL (SHENZHEN) CORPORATION

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION.....	3
2. TEST SUMMARY	4
3. MEASUREMENT UNCERTAINTY	4
4. PRODUCT INFORMATION AND TEST SETUP	4
5. SYSTEM TEST CONFIGURATION.....	5
5.1. JUSTIFICATION	5
5.2. EUT EXERCISING SOFTWARE	5
6. FACILITIES AND ACCREDITATIONS	5
7. CONDUCTED EMISSION TEST.....	7
8. RADIATED EMISSION TEST	10
APPENDIX 1 PHOTOGRAPHS OF TEST SETUP	18
APPENDIX 2 PHOTOGRAPHS OF EUT.....	20

(Note: N/A means not applicable)

1. GENERAL INFORMATION

Applicant: XQ ARTS TOYS CO.LTD.
North of Xing Ye Road, Lai Mei Industrial District, Cheng Hai,
Shan Tou, Guang Dong, China

Manufacturer: XQ ARTS TOYS CO.LTD.
North of Xing Ye Road, Lai Mei Industrial District, Cheng Hai,
Shan Tou, Guang Dong, China

Equipment Authorization: FCC Part 15 (Certification)

FCC ID: W2MXQTOYS49RX010

Product Name: R/C TOYS

Trade Name: XQ

Model Name: XQ RC10-1 49MHz RX(2)

Serial Number: Not Applicable


Report Number: EESZD04210006-2

Date of Test: April 21, 2011 to May 06, 2011


The results of this test report are only valid for the mentioned equipment under test. The test report with all its sub-reports, e.g. tables, photographs and drawings, is copyrighted. Unauthorized utilization, especially without permission of the test laboratory, is not allowed and punishable. For copying parts of the test report, a written permission by the test laboratory is needed.

The test results of this report relate only to the tested sample identified in this report.

Prepared by :


Gavin Song

Reviewed by :


Louisa Lu

Approved by :


Lily Yan



Date

May 6, 2011

2. TEST SUMMARY

The EUT has been tested according to the following specifications:

Standard	Test Item	Test
FCC 15.107	Conducted Emission	Yes
FCC 15.109	Radiated Emission	Yes

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Test item	Value (dB)
Conducted Emission	2.7
Radiated Emission	4.4

4. PRODUCT INFORMATION AND TEST SETUP

4.1. PRODUCT INFORMATION

Technical Data: DC 7.2V

Adapter information: Manufacture: SHANTOU HUAJUN ELECTRONIC. CO., LTD
Model No. :HJ-UL-072250
Input : AC120V 60Hz 35mA
Output: 7.2V DC 250mA

Product Description: The equipment under test (EUT) is a receiver for a RC Car operating at 49.86 MHz. The EUT is powered by 7.2V DC (1.2V×6AA rechargeable battery). The EUT has a power switch. When the power switch is “ON”, the EUT can be controlled to run forward, backward, turning left and right directions by the corresponding controller.

Related Submittal(s) Grants: This is a single application for certification of a receiver. The transmitter for this receiver is authorized by Certification procedure with FCC ID: W2MXQTOYS49TX1.

4.2. TEST SETUP CONFIGURATION

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

5. SYSTEM TEST CONFIGURATION

5.1. JUSTIFICATION

The system was configured for testing in a typical fashion (as a customer would normally use it), The EUT was placed on a turn table, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes in receiving mode and in the confines as outlined in ANSI C63.4 (2003).

The EUT was powered by 7.2V DC (1.2Vx6AA rechargeable battery) during test.

For maximizing emissions, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed.

The unit was operated standalone and placed in the center of the turntable when it works in receiving mode and placed at the rear edge of the turntable when it works in charging mode (please see the setup photo).

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000 MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

5.2. EUT EXERCISING SOFTWARE

No Software was used during testing.

6. FACILITIES AND ACCREDITATIONS

6.1. TEST FACILITY

All test facilities used to collect the test data are located at Building C, Hongwei Industrial Zone, Baoan 70 District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4, CISPR 16-1-1 and other equivalent standards.

6.2. TEST EQUIPMENT LIST

Instrumentation: The following list contains equipments used at CTI for testing.

The calibrations of the measuring instruments, including any accessories that may effect such calibration, are checked frequently to assure their accuracy. Adjustments are made and correction factors applied in accordance with instructions contained in the manual for the measuring instrument.

Equipment used during the tests:

Shielding Room No. 1 - Conducted Emission Test				
Equipment	Manufacturer	Model	Serial No.	Due Date
Receiver	R&S	ESCI	100009	07/10/2011
LISN	R&S	ENV216	100098	07/10/2011

3M Semi-anechoic Chamber - Radiated Emission Test				
Equipment	Manufacturer	Model	Serial No.	Due Date
3M Chamber & Accessory Equipment	ETS-LINDGREN	FACT-3	3510	07/09/2012
Spectrum Analyzer	Agilent	E4440A	MY46185649	03/29/2012
Biconilog Antenna	ETS-LINGREN	3142C	00044562	07/31/2011
Multi device Controller	ETS-LINGREN	2090	00057230	N/A

Support Equipment List:

3M Semi-anechoic Chamber - Radiated Emission Test				
Equipment	Manufacturer	Model	Serial No.	Due Date
Signal Generator	IFR	2023B	202307/883	03/29/2012

6.3. LABORATORY ACCREDITATIONS AND LISTINGS

The measuring equipment utilized to perform the tests documented in this report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable under the ISO/IEC/EN 17025 to international or national standards. Equipment has been calibrated by accredited calibration laboratories.

7. CONDUCTED EMISSION TEST

7.1. LIMITS


Limits for Class B digital devices

Frequency range (MHz)	Limits dB(μ V)	
	Quasi-peak	Average
0,15 to 0,50	66 to 56	56 to 46
0,50 to 5	56	46
5 to 30	60	50

NOTE: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 to 0.50 MHz.


7.2. BLOCK DIAGRAM OF TEST SETUP

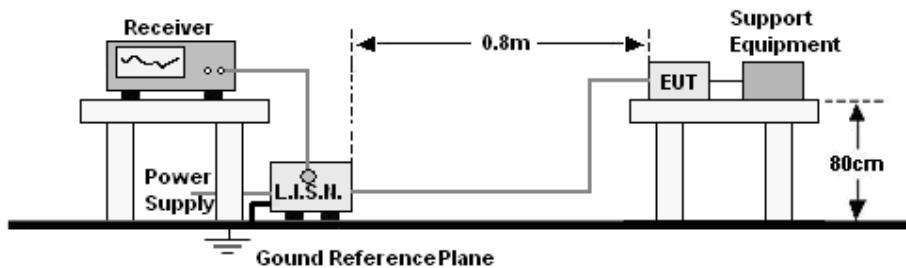


7.3. PROCEDURE OF CONDUCTED EMISSION TEST

- The EUT was placed on a nonconductive table above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N.).
- The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from EUT in all power lines in the full band.
- For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.

7.4. GRAPHS AND DATA

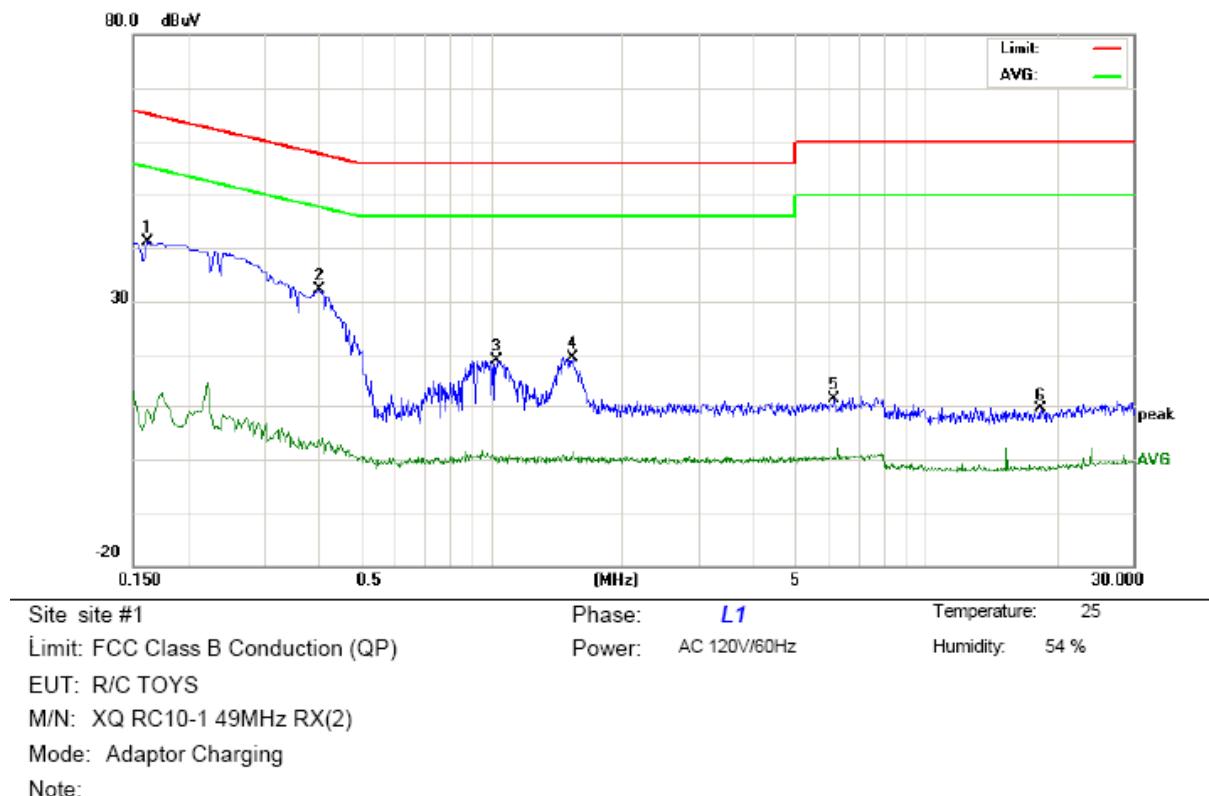

No.	Freq.	Reading_Level (dBuV)				Correct Factor	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		MHz	Peak	QP	AVG		peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1620	31.24		-0.53	9.79	41.03		9.26	65.36	55.36	-24.33	-46.10	P		
2	0.4020	22.23		-6.08	9.81	32.04		3.73	57.81	47.81	-25.77	-44.08	P		
3	1.0300	9.13		-10.3	9.86	18.99		-0.53	56.00	46.00	-37.01	-46.53	P		
4	1.5420	9.55		-8.62	9.88	19.43		1.26	56.00	46.00	-36.57	-44.74	P		
5	6.1779	1.61		-9.77	10.03	11.64		0.26	60.00	50.00	-48.36	-49.74	P		
6	18.4140	-0.60		-11.8	10.11	9.51		-1.76	60.00	50.00	-50.49	-51.76	P		

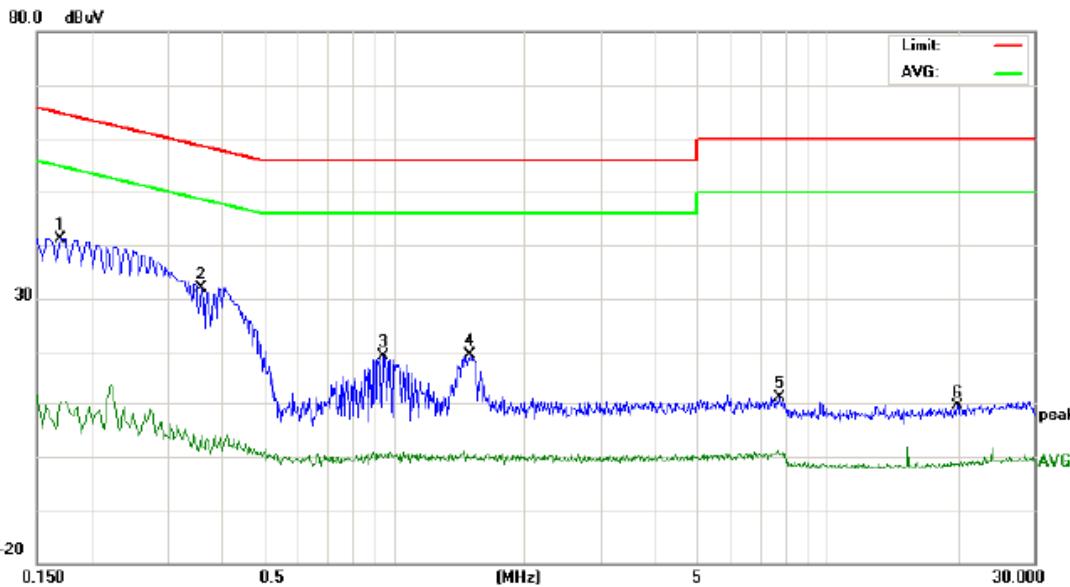

Site site #1 Phase: **N** Temperature: 25

Limit: FCC Class B Conduction (QP) Power: AC 120V/60Hz Humidity: 54 %

EUT: R/C TOYS

M/N: XQ RC10-1 49MHz RX(2)

Mode: Adaptor Charging

Note:

No.	Freq.	Reading_Level (dBuV)			Correct Factor		Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		MHz	Peak	QP	AVG	dB	peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1700	31.41		0.53	9.80	41.21		10.33	64.96	54.96	-23.75	-44.63	P		
2	0.3596	31.39		1.99	9.81	41.20		11.80	58.74	48.74	-17.54	-36.94	P		
3	0.9460	9.37		-9.87	9.86	19.23		-0.01	56.00	46.00	-36.77	-46.01	P		
4	1.4980	9.53		-9.96	9.88	19.41		-0.08	56.00	46.00	-36.59	-46.08	P		
5	7.7660	1.28		-9.67	10.10	11.38		0.43	60.00	50.00	-48.62	-49.57	P		
6	19.9500	-0.58		-11.5	10.14	9.56		-1.41	60.00	50.00	-50.44	-51.41	P		

8. RADIATED EMISSION TEST

8.1. LIMITS

Limits for Class B digital devices


Frequency (MHz)	limits at 3m dB(μ V/m)
30-88	40.0
88-216	43.5
216-960	46.0
Above 960	54.0

NOTE: 1. The lower limit shall apply at the transition frequency.

2. The limits shown above are based on measuring equipment employing a CISPR quasi-peak detector function for frequencies below or equal to 1000MHz.
3. The limits shown above are based on measuring equipment employing an average detector function for frequencies above 1000MHz.

8.2. BLOCK DIAGRAM OF TEST SETUP .

30MHz ~ 1GHz:

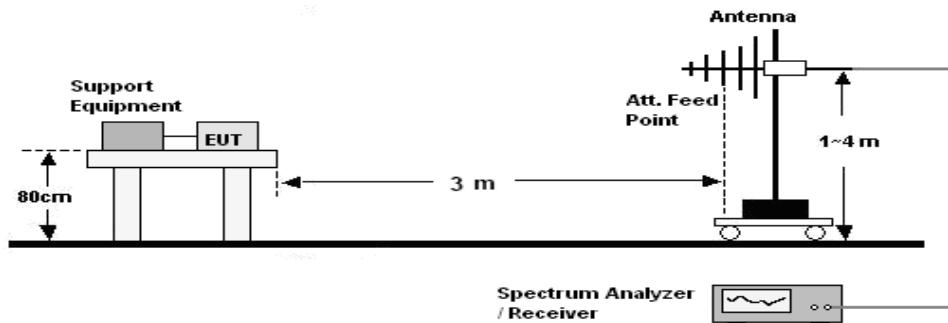

8.3. PROCEDURE OF RADIATED EMISSION TEST

FOR CHARGING MODE:

- a. The EUT was placed on the non-conductive turntable 0.8m above the ground at a chamber.
- b. Set the spectrum analyzer/receiver in Peak detector, Max Hold mode, and 100 kHz RBW. Record the maximum field strength of all the pre-scan process in the full band when the antenna is varied between 1~4 m in both horizontal and vertical, and the turntable is rotated from 0 to 360 degrees.
- c. For each frequency whose maximum record was higher or close to limit, measure its QP value: vary the antenna's height and rotate the turntable from 0 to 360 degrees to find the height and degree where EUT radiated the maximum emission, then set the test frequency

analyzer/receiver to QP Detector and specified bandwidth with Maximum Hold Mode, and record the maximum value.


FOR RECEIVING MODE:

- a. The EUT was placed on the non-conductive turntable 0.8m above the ground at a chamber.
- b. Use a signal Generator to generate a 49.86MHz un-modulated CW signal to the super-regenerative receiver. And the signal level is from low signal about -80dBm up to -10dm to sure the emission level which observed on the test receiver is not increased any more. Then begin testing.

C, Set the spectrum analyzer/receiver in Peak detector, Max Hold mode, and 100 kHz RBW. Record the maximum field strength of all the pre-scan process in the full band when the antenna is varied between 1~4 m in both horizontal and vertical, and the turntable is rotated from 0 to 360 degrees.

- c. For each frequency whose maximum record was higher or close to limit, measure its QP value: vary the antenna's height and rotate the turntable from 0 to 360 degrees to find the height and degree where EUT radiated the maximum emission, then set the test frequency analyzer/receiver to QP Detector and specified bandwidth with Maximum Hold Mode, and record the maximum value.

8.4. Graphs and data

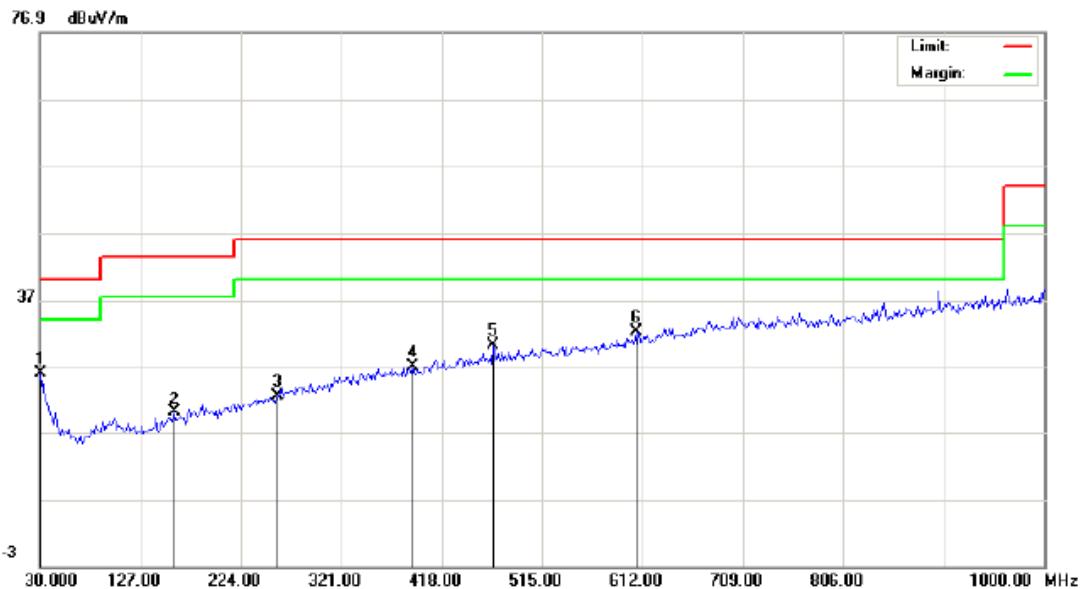

Site site #1

Polarization: **Horizontal**

Temperature: 25

Limit: FCC Class B 3M Radiation

Power: AC 120V/60Hz

Humidity: 51 %


EUT: R/C TOYS


M/N: XQ RC10-1 49MHz RX(2)

Mode: Adaptor Charging

Note:

No.	Freq.	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV/m)			Limit (dBuV/m)		Margin (dB)		P/F	Comment
		MHz	Peak	QP	Avg	Peak	QP	Avg	QP	Avg	QP	Avg		
1	30.0000	8.42				17.63	26.05		40.00		-13.95		P	
2	159.3333	8.74				11.22	19.96		43.50		-23.54		P	
3	259.5667	8.39				14.22	22.61		46.00		-23.39		P	
4	390.5167	8.92				18.15	27.07		46.00		-18.93		P	
5	468.1166	10.73				19.45	30.18		46.00		-15.82		P	
6	605.5333	9.80				22.33	32.13		46.00		-13.87		P	

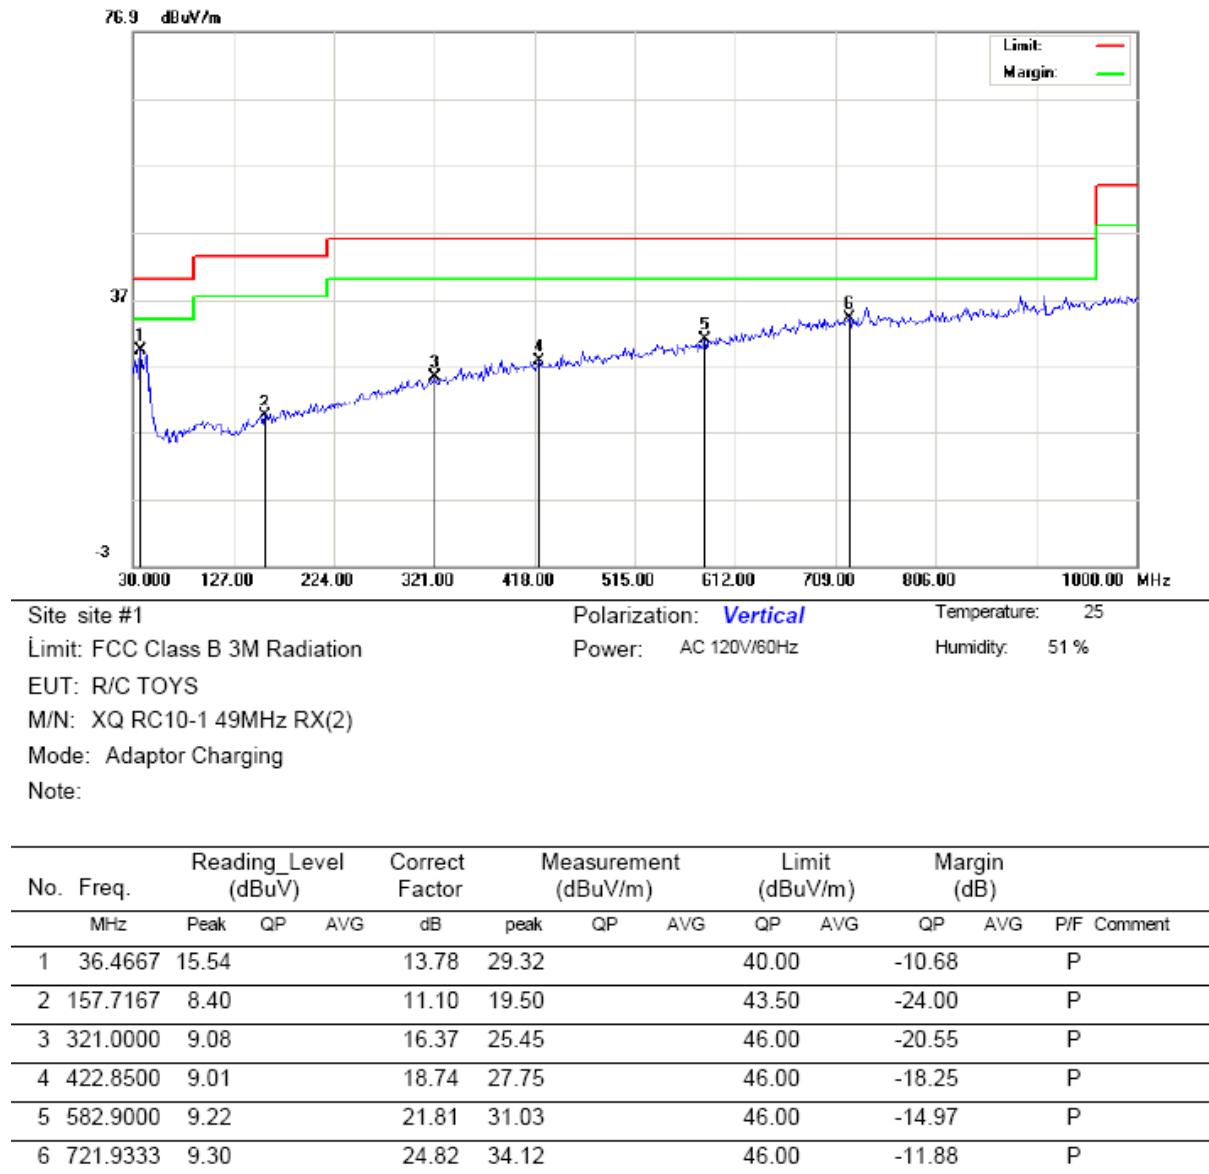

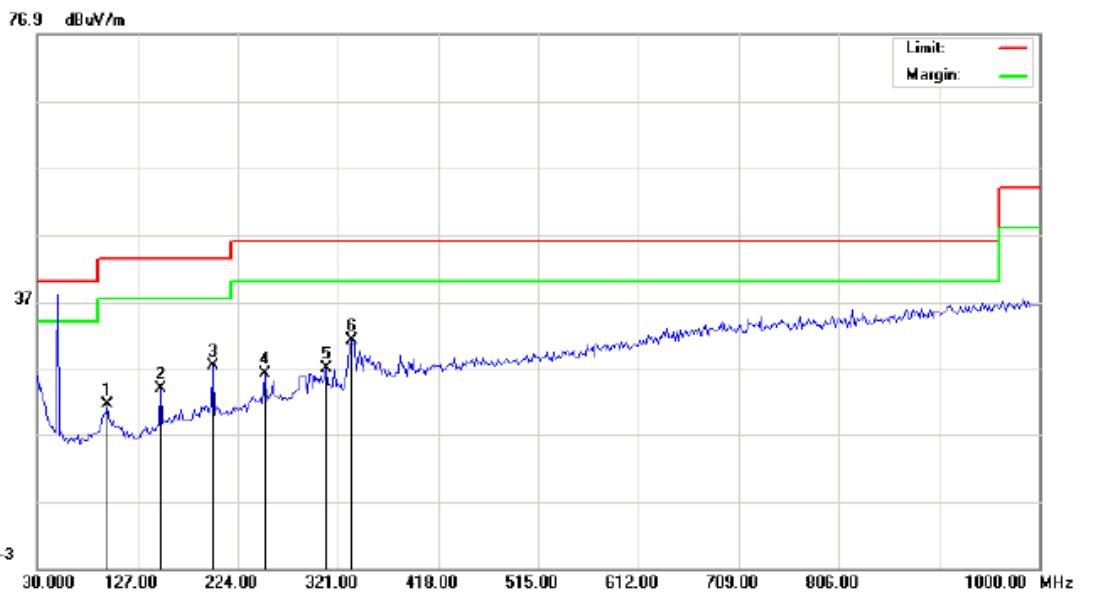

Site site #1

Polarization: *Horizontal*

Temperature: 25

Limit: FCC Class B 3M Radiation

Power: DC 7.2V

Humidity: 51 %


EUT: R/C TOYS

M/N: XQ RC10-1 49MHz RX(2)

Mode: RX

Note:

No.	Freq.	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV/m)			Limit (dBuV/m)		Margin (dB)		P/F	Comment
		MHz	Peak	QP	Avg	dB	Peak	QP	Avg	QP	Avg	P/F		
1	97.9000	11.25				10.33	21.58			43.50	-21.92		P	
2	149.6333	13.59				10.50	24.09			43.50	-19.41		P	
3	199.7500	15.55				11.84	27.39			43.50	-16.11		P	
4	249.8667	12.34				13.83	26.17			46.00	-19.83		P	
5	309.6833	10.91				16.08	26.99			46.00	-19.01		P	
6	333.9333	14.55				16.70	31.25			46.00	-14.75		P	

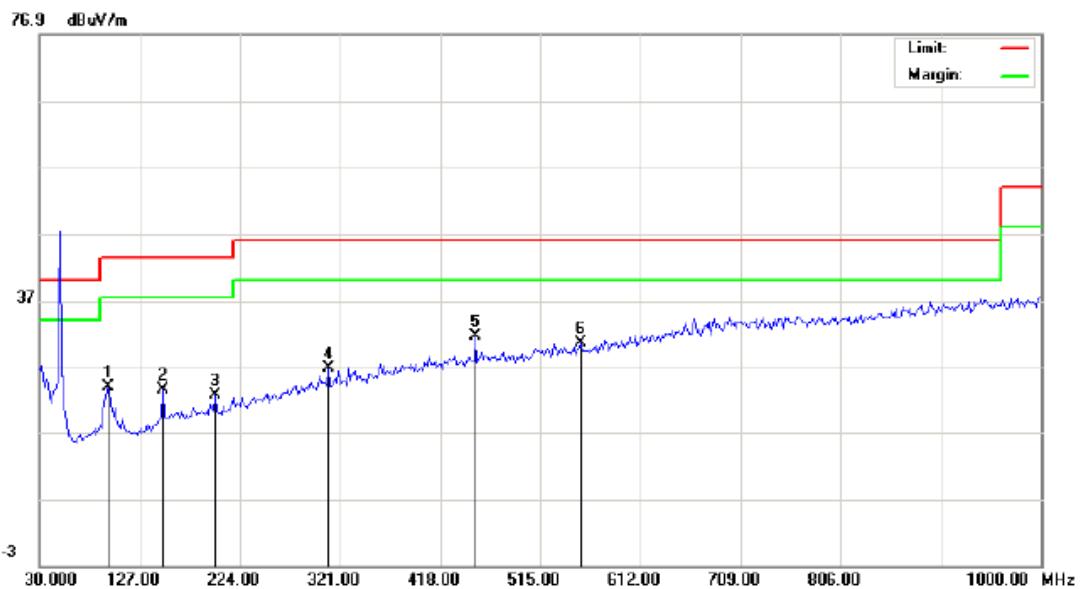

Site site #1

Polarization: *Vertical*

Temperature: 25

Limit: FCC Class B 3M Radiation

Power: DC 7.2V

Humidity: 51 %


FLIT: R/C TOYS

M/N: XQ RG10-1 49MHz RX(2)

Mode: RX

Note:-

No.	Freq.	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV/m)			Limit (dBuV/m)		Margin (dB)		P/F	Comment
		MHz	Peak	QP	Avg	dB	peak	QP	Avg	QP	Avg	QP	Avg	
1	96.2833	13.83				10.26	24.09			43.50		-19.41		P
2	149.6332	13.09				10.50	23.59			43.50		-19.91		P
3	199.7500	11.04				11.84	22.88			43.50		-20.62		P
4	309.6833	10.82				16.08	26.90			46.00		-19.10		P
5	451.9499	12.38				19.20	31.58			46.00		-14.42		P
6	553.8000	9.44				21.15	30.59			46.00		-15.41		P

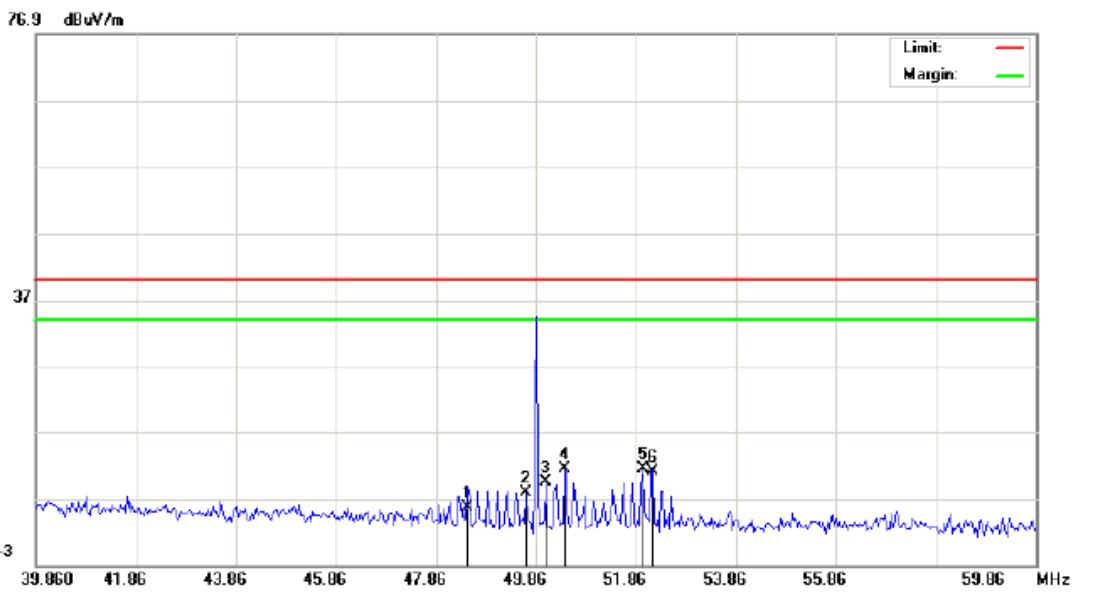

Site site #1

Polarization: *Horizontal*

Temperature: 25

Limit: FCC Class B 3M Radiation

Power: DC 7.2V

Humidity: 51 %


EUT: R/C TOYS

M/N: XQ RC10-1 49MHz RX(2)

Mode: RX

Note:

No.	Freq.	Reading_Level (dBuV)				Correct Factor	Measurement (dBuV/m)			Limit (dBuV/m)		Margin (dB)	
		MHz	Peak	QP	AVG		dB	peak	QP	AVG	QP	AVG	P/F
1	48.4933	-3.99				9.50	5.51		40.00		-34.49		P
2	49.6600	-1.37				9.20	7.83		40.00		-32.17		P
3	50.0600	0.32				9.11	9.43		40.00		-30.57		P
4	50.4267	2.38				9.08	11.46		40.00		-28.54		P
5	51.9933	2.50				8.96	11.46		40.00		-28.54		P
6	52.1933	2.16				8.94	11.10		40.00		-28.90		P

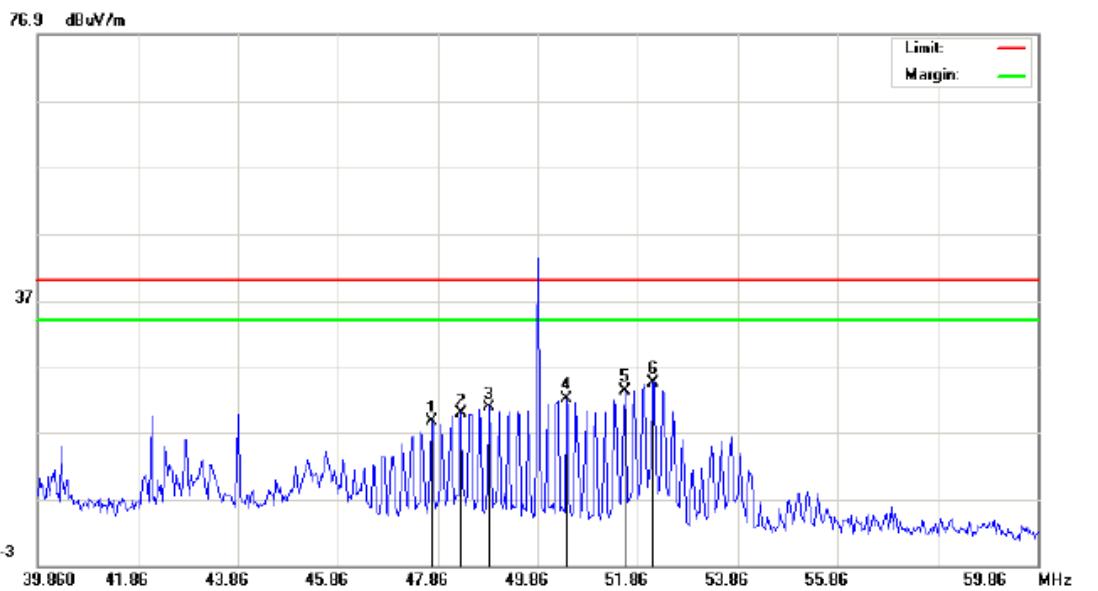

Site site #1

Polarization: *Vertical*

Temperature: 25

Limit: FCC Class B 3M Radiation

Power: DC 7.2V

Humidity: 51 %

EUT: R/C TOYS

M/N: XQ RC10-1 49MHz RX(2)

Mode: RX

Note:


No.	Freq.	Reading_Level (dBuV)			Correct Factor	Measurement (dBuV/m)			Limit (dBuV/m)		Margin (dB)	
		MHz	Peak	QP	Avg	dB	peak	QP	Avg	QP	Avg	P/F
1	47.7267	8.83				9.69	18.52			40.00	-21.48	P
2	48.3267	10.21				9.54	19.75			40.00	-20.25	P
3	48.8933	11.44				9.39	20.83			40.00	-19.17	P
4	50.4267	13.04				9.08	22.12			40.00	-17.88	P
5	51.5933	14.49				8.99	23.48			40.00	-16.52	P
6	52.1600	15.71				8.95	24.66			40.00	-15.34	P

APPENDIX 1 PHOTOGRAPHS OF TEST SETUP

CONDUCTED EMISSION TEST SETUP



RADIATED EMISSION TEST SETUP

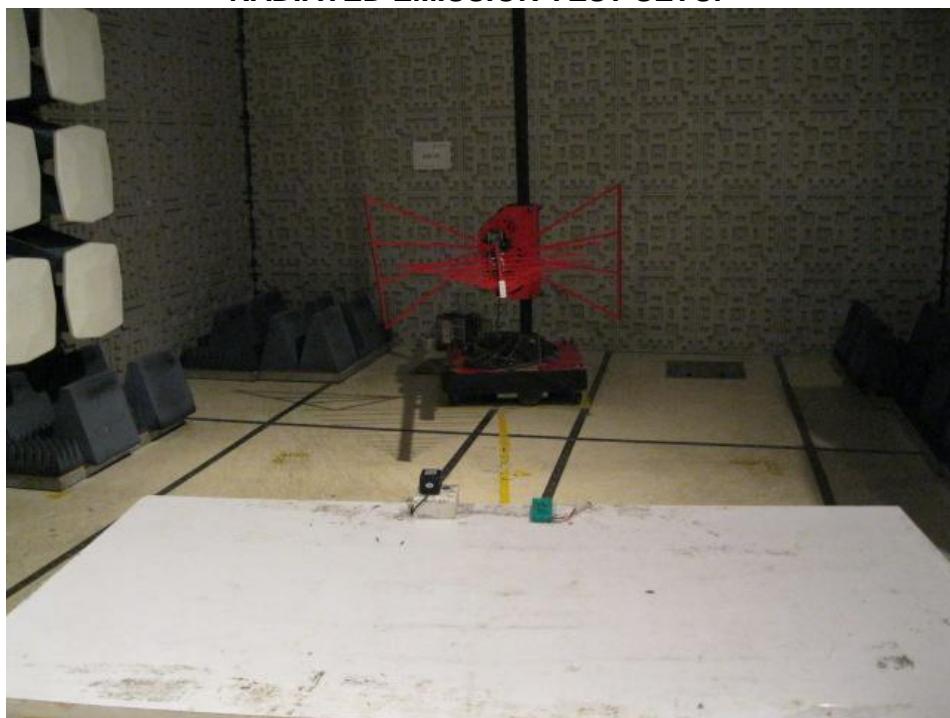

RADIATED EMISSION TEST SETUP




APPENDIX 2 PHOTOGRAPHS OF EUT




View of EUT-1



View of EUT-2

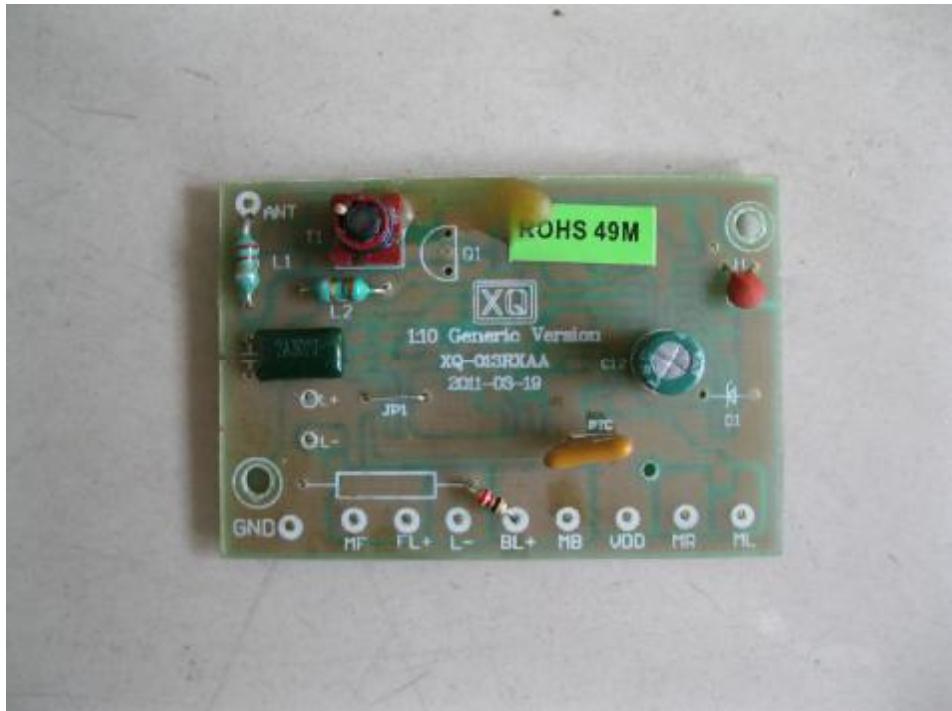

View of EUT-3

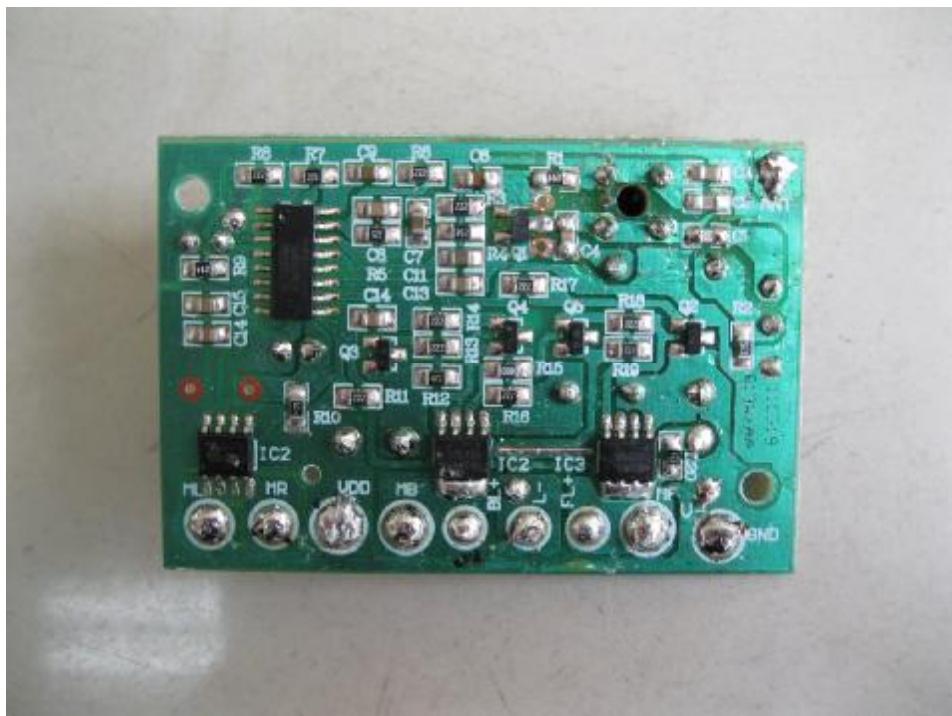

View of EUT-4

----End of the report----