

DECLARATION OF CONFORMITY
On Behalf of
Cheng Fong International Limited

Tablet PC
Model No.: TB782B

Prepared for : Cheng Fong International Limited
Address : Rm 19HG, HangDu Building, HuaFu Road, Fu Tian District
Tel: 0755-61627636
Fax: 0755-61627608

Prepared By : Anbotek Compliance Laboratory Limited
Address : 1/F, 1 /Building, SEC Industrial Park, No. 4 Qianhai Road,
Nanshan District, Shenzhen, 518054, China
Tel: (86) 755-61627636
Fax: (86) 755-61627602

Report Number : 201206799F
Date of Test : Jul. 14~21, 2012
Date of Report : Jul. 23, 2012

TABLE OF CONTENTS

Description

Page

Test Report Verification

1.GENERAL INFORMATION	4
1.1. Description of Device (EUT)	4
2.POWER LINE CONDUCTED MEASUREMENT	5
2.1. Test Equipment	5
2.2. Block Diagram of Test Setup	5
2.3. Power Line Conducted Emission Measurement Limits (FCC Part 15 Class B)	5
2.4. Configuration of EUT on Measurement.....	6
2.5. Operating Condition of EUT	6
2.6. Test Procedure.....	6
2.7. Power Line Conducted Emission Measurement Results	6
3.RADIATED EMISSION MEASUREMENT.....	9
3.1. Test Equipment	9
3.2. Block Diagram of Test Setup	9
3.3. Radiated Emission Limit (Subpart B Class B)	10
3.4. EUT Configuration on Measurement.....	10
3.5. Operating Condition of EUT	10
3.6. Test Procedure.....	10
3.7. Radiated Emission Measurement Results	11
4.PHOTOGRAPH.....	14
4.1. Photo of Power Line Conducted Emission Test.....	14
4.2. Photo of Radiated Emission Test	14

APPENDIX I (Photos of EUT) (5 Pages)

TEST REPORT VERIFICATION

Applicant : Cheng Fong International Limited
Manufacturer : Cheng Fong International Limited
EUT : Tablet PC
Model No. : TB782B
Rating : DC 5V
Trade Mark : N.A.

Measurement Procedure Used:

FCC Rules and Regulations Part 15 Subpart B 2011 & FCC / ANSI C63.4-2009

The device described above is tested by Anbotek Compliance Laboratory Limited To determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart B Class B limits both radiated and conducted emissions. The measurement results are contained in this test report and Anbotek Compliance Laboratory Limited Is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Anbotek Compliance Laboratory Limited


Date of Test : Jul. 14~21, 2012

Prepared by :




(Engineer/ Barak Ban)

Reviewer :

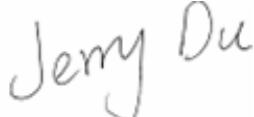

(Project Manager/ Jerry Du)

Approved & Authorized Signer :



(Manager/ Tom Chen)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Description : Tablet PC
Model Number : TB782B
Test Power Supply : DC 5V
Applicant : Cheng Fong International Limited
Address : Rm 19HG, HangDu Building, HuaFu Road, Fu Tian District
Manufacturer : Cheng Fong International Limited
Address : Rm 19HG, HangDu Building, HuaFu Road, Fu Tian District
Date of Sample received : Jul. 14, 2012
Date of Test : Jul. 14~21, 2012

2. POWER LINE CONDUCTED MEASUREMENT


2.1. Test Equipment

The following test equipments are used during the power line conducted measurement:

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Receiver	Rohde & Schwarz	ESCI	100627	Apr.25, 2012	1 Year
2.	Two-Line V-network	Rohde & Schwarz	ENV216	10055	Apr.25, 2012	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Apr.25, 2012	1 Year
4.	EMI Test Software	ES-K1 N/A		N/A	N/A	N/A

2.2. Block Diagram of Test Setup

2.2.1. Block diagram of connection between the EUT and simulators

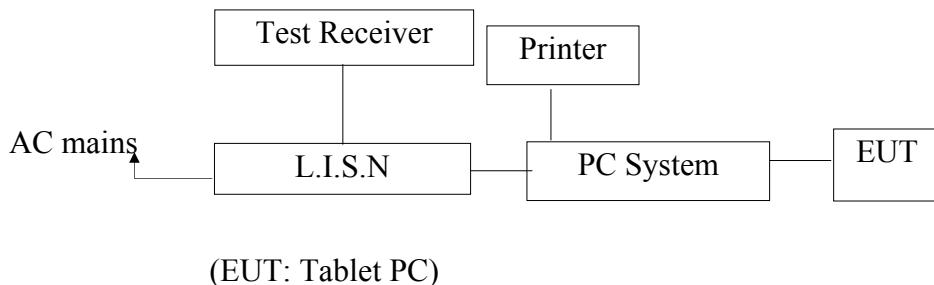

2.3. Power Line Conducted Emission Measurement Limits (FCC Part 15)

Class B)

Frequency MHz	Limits dB(μV)	
	Quasi-peak Level	Average Level
0.15 ~ 0.50	66 ~ 56*	56 ~ 46*
0.50 ~ 5.00	56	46
5.00 ~ 30.00	60	50

Notes: 1. *Decreasing linearly with logarithm of frequency.
2. The lower limit shall apply at the transition frequencies.

2.4. Configuration of EUT on Measurement

The following equipments are installed on Power Line Conducted Emission Measurement to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

EUT : Tablet PC
Model Number : TB782B
Applicant : Cheng Fong International Limited

2.5. Operating Condition of EUT

- 2.5.1. Setup the EUT and simulator as shown as Section 2.2.
- 2.5.2. Turn on the power of all equipment.
- 2.5.3. Let the EUT work measure it.

2.6. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.4-2009 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9KHz.

The frequency range from 150KHz to 30MHz is checked.

The test result are reported on Section 2.7.

2.7. Power Line Conducted Emission Measurement Results

PASS.

The frequency range from 150KHz to 30 MHz is investigated.


The test curves are shown in the following pages.

CONDUCTED EMISSION TEST DATA

EUT: Tablet PC M/N:TB782B
 Operating Condition: USB Charging and Playing
 Test Site: 1# Shielded Room
 Operator: Barak Ban
 Test Specification: DC 5V
 Comment: L
 Tem:25°C Hum:50%

SCAN TABLE: "Voltage (150K~30M) FIN"

Short Description: 150K-30M Disturbance Voltages

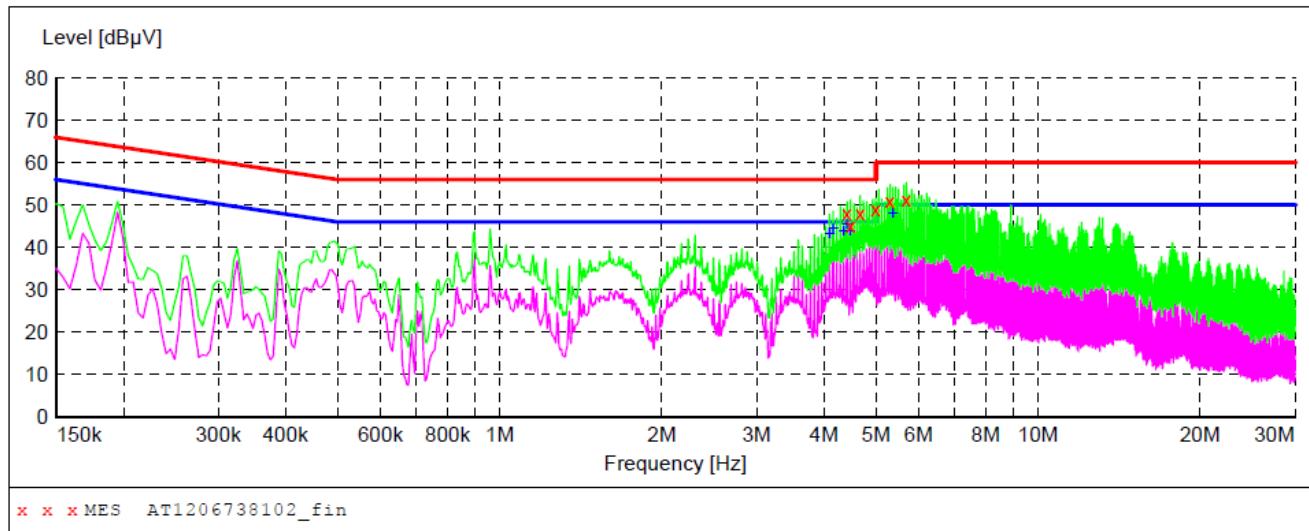**MEASUREMENT RESULT: "AT1206738102_fin"**

7/14/2012 3:27PM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
4.415500	48.00	10.5	56	8.0	QP	L1	GND
4.483000	45.20	10.5	56	10.8	QP	L1	GND
4.672000	48.00	10.5	56	8.0	QP	L1	GND
4.991500	49.10	10.5	56	6.9	QP	L1	GND
5.311000	51.10	10.5	60	8.9	QP	L1	GND
5.693500	51.30	10.5	60	8.7	QP	L1	GND

MEASUREMENT RESULT: "AT1206738102_fin2"


7/14/2012 3:27PM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
4.096000	43.30	10.5	46	2.7	AV	L1	GND
4.159000	44.40	10.5	46	1.6	AV	L1	GND
4.352500	43.80	10.5	46	2.2	AV	L1	GND
4.415500	45.50	10.5	46	0.5	AV	L1	GND
4.478500	43.80	10.5	46	2.2	AV	L1	GND
5.374000	48.00	10.5	50	2.0	AV	L1	GND

CONDUCTED EMISSION TEST DATA

EUT: Tablet PC M/N:TB782B
 Operating Condition: USB Charging and Playing
 Test Site: 1# Shielded Room
 Operator: Barak Ban
 Test Specification: DC 5V
 Comment: N
 Tem:25°C Hum:50%

SCAN TABLE: "Voltage (150K~30M) FIN"
 Short Description: 150K-30M Disturbance Voltages

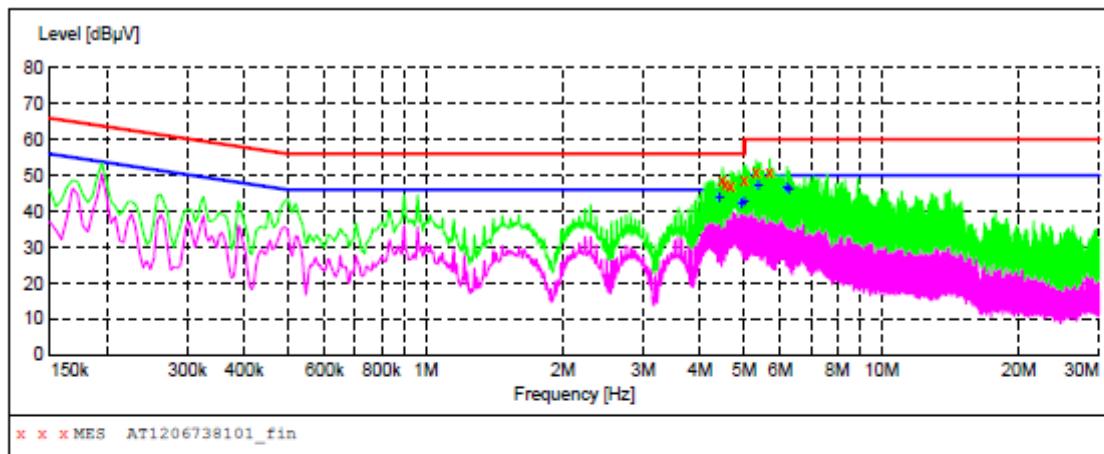**MEASUREMENT RESULT: "AT1206738101_fin"**

7/14/2012 3:24PM	Frequency	Level	Transd	Limit	Margin	Detector	Line	PE
	MHz	dB μ V	dB	dB μ V	dB			
	4.478500	48.90	10.5	56	7.1	QP	N	GND
	4.541500	47.40	10.5	56	8.6	QP	N	GND
	4.672000	46.90	10.5	56	9.1	QP	N	GND
	4.991500	48.80	10.5	56	7.2	QP	N	GND
	5.311000	50.90	10.5	60	9.1	QP	N	GND
	5.693500	50.70	10.5	60	9.3	QP	N	GND

MEASUREMENT RESULT: "AT1206738101_fin2"

7/14/2012 3:24PM	Frequency	Level	Transd	Limit	Margin	Detector	Line	PE
	MHz	dB μ V	dB	dB μ V	dB			
	4.415500	44.10	10.5	46	1.9	AV	N	GND
	4.928500	42.70	10.5	46	3.3	AV	N	GND
	4.991500	42.90	10.5	46	3.1	AV	N	GND
	5.374000	47.60	10.5	50	2.4	AV	N	GND
	6.206500	46.90	10.5	50	3.1	AV	N	GND
	6.269500	46.70	10.5	50	3.3	AV	N	GND

3. RADIATED EMISSION MEASUREMENT

3.1. Test Equipment


The following test equipments are used during the radiated emission measurement:

3.1.1. For Anechoic Chamber

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Test Receiver	Rohde & Schwarz	ESCI	101604	Apr.25, 2012	1 Year
2.	Bilog Antenna	Schwarzbeck	VULB9163	100015	Apr.25, 2012	1 Year
3.	Pre-amplifier	Compliance Direction	PAP-0203	22008	Apr.25, 2012	1 Year
4.	EMI Test Software	SHURPLE N/A		N/A	N/A	N/A
5.	Coaxial cable	ANBOTEK	N/A	N/A	N/A	N/A


3.2. Block Diagram of Test Setup

3.2.1. Block diagram of connection between the EUT and simulators

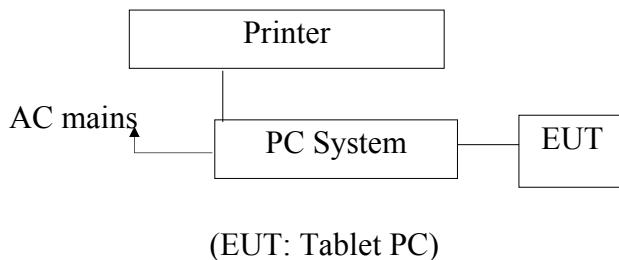

3.2.2. Anechoic Chamber Test Setup Diagram

ANTENNA TOWER

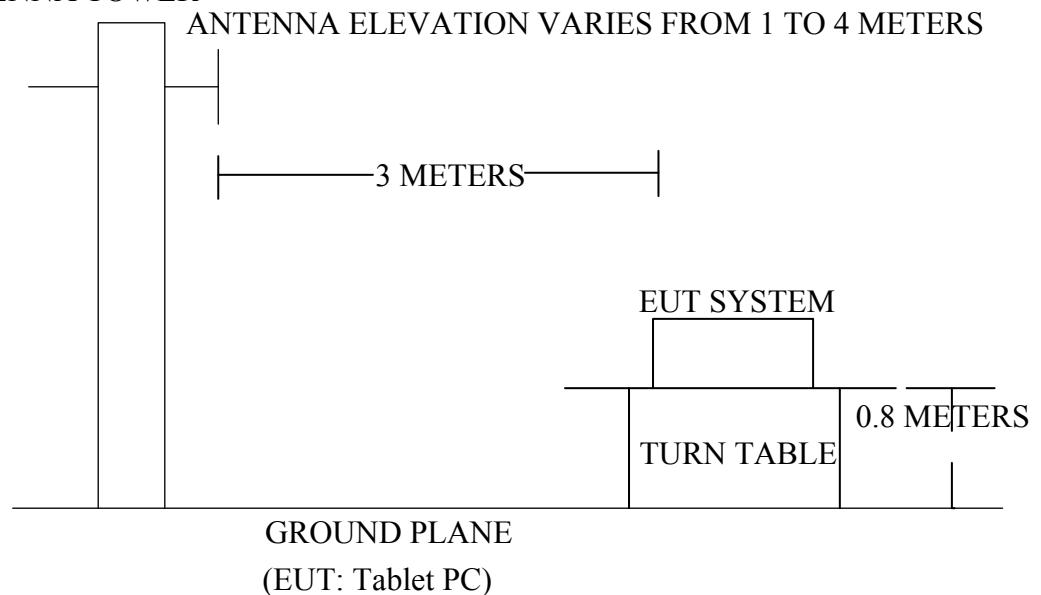

3.3. Radiated Emission Limit (Subpart B Class B)

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		μV/m dB(μV/m
30~88 3		100	40.0
88~216 3		150	43.5
216~960 3		200	46.0
960~1000 3		500	54.0

Remark : (1) Emission level (dB) μ V = 20 log Emission level μ V/m
 (2) The smaller limit shall apply at the cross point between two frequency bands.
 (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

3.4. EUT Configuration on Measurement

The following equipments are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

EUT : Tablet PC
 Model Number : TB782B
 Applicant : Cheng Fong International Limited

3.5. Operating Condition of EUT

3.5.1. Setup the EUT as shown in Section 3.2.

3.5.2. Let the EUT work measure it.

3.6. Test Procedure

EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (Trilog Broadband Antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4-2009 on radiated emission measurement.

The bandwidth of the EMI test receiver (ESPI) is set at 120kHz.

The frequency range from 30MHz to 1000MHz is checked.

The test mode (USB Charging and Playing) is tested in chamber and all the test

results are listed in Section 3.7.

3.7. Radiated Emission Measurement Results

PASS.

The test curves are shown in the following pages.


Anbotek Compliance Laboratory Limited

 1/F, 1 /Building, SEC Industrial Park, No.4 Qianhai Road,
 Nanshan District, Shenzhen, 518054, China

 Tel: (86)755-26066544
 Fax: (86)755-26014772
[Http://www.anbotek.com](http://www.anbotek.com)


Job No.:	AT1206738F	Polarziation:	Horizontal							
Standard:	(RE)FCC PART15 B _3m	Power Source:	DC 5V							
Test item:	Radiation Test	Date:	2012/07/14							
Temp.(C)/Hum.(%RH):	24.3(C)/55%RH	Time:	11:06:24							
EUT:	Tablet PC	Test By:	Barak Ban							
Model:	TB782B	Distance:	3m							
Note:	USB Charging and Playing									
No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	30.9619	58.55	-27.62	30.93	40.00	-9.07	peak			
2	98.8326	56.97	-31.78	25.19	43.50	-18.31	peak			
3	132.2206	65.32	-33.68	31.64	43.50	-11.86	peak			
4	152.1297	62.48	-33.86	28.62	43.50	-14.88	peak			
5	164.9075	62.04	-33.27	28.77	43.50	-14.73	peak			
6	528.2458	53.46	-21.71	31.75	46.00	-14.25	peak			

**Anbotech Compliance Laboratory Limited**

1/F, 1 /Building, SEC Industrial Park, No.4 Qianhai Road,
Nanshan District, Shenzhen, 518054, China

Tel: (86)755-26066544
Fax: (86)755-26014772
Http://www.anbotech.com

Job No.:	AT1206738F	Polarization:	Vertical
Standard:	(RE)FCC PART15 B _3m	Power Source:	DC 5V
Test item:	Radiation Test	Date:	2012/07/14
Temp.(C)/Hum.(%RH):	24.3(C)/55%RH	Time:	11:09:28
EUT:	Tablet PC	Test By:	Barak Ban
Model:	TB782B	Distance:	3m
Note:	USB Charging and Playing		

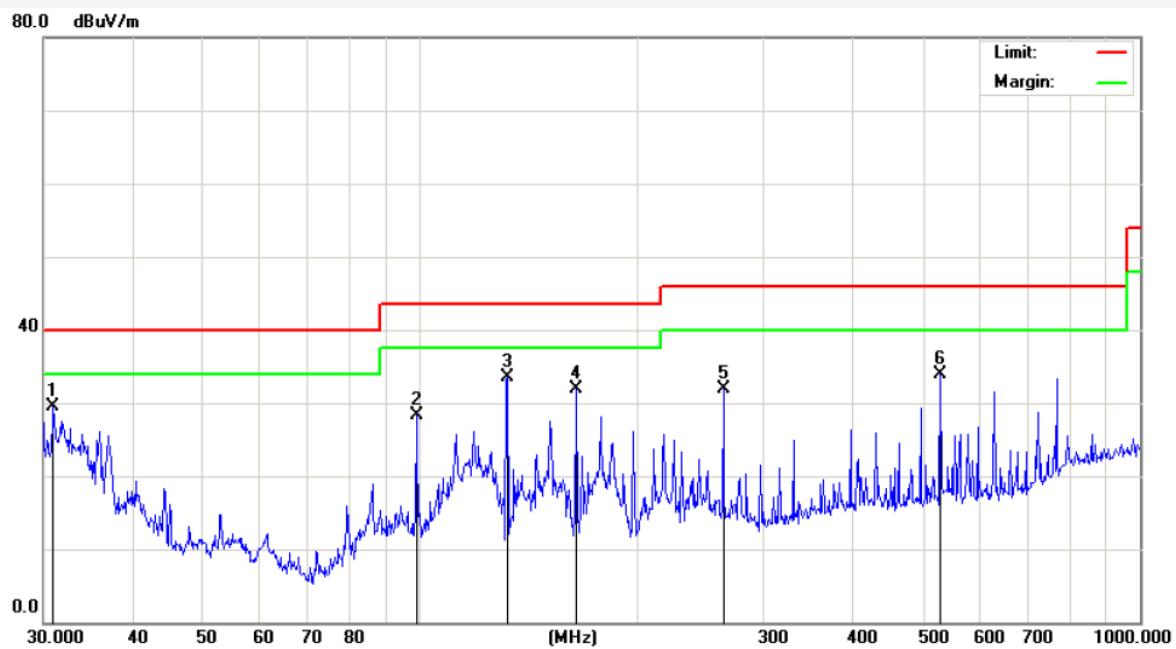

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	30.9619	57.10	-27.62	29.48	40.00	-10.52	peak			
2	98.8326	55.05	-26.78	28.27	43.50	-15.23	peak			
3	132.2206	62.14	-28.68	33.46	43.50	-10.04	peak			
4	164.9075	60.22	-28.27	31.95	43.50	-11.55	peak			
5	263.8190	56.10	-24.26	31.84	46.00	-14.16	peak			
6	528.2458	55.02	-21.14	33.88	46.00	-12.12	peak			