

FCC TEST REPORT for Cheng Fong International Limited

Tablet PC Model No.:TBDG773B

Prepared for : Cheng Fong International Limited

Address : Rm 19HG, HangDu Building, HuaFu Road, Fu Tian District

Tel: 0755-61627636 Fax: 0755-61627608

Prepared By : Anbotek Compliance Laboratory Limited

Address : 1/F, 1 /Building, SEC Industrial Park, No.4 Qianhai Road,

Nanshan District, Shenzhen, 518054, China

Tel: (86) 755-26066544 Fax: (86) 755-26014772

Report Number : 201304814F

Date of Test : Apr. 17~ May 06, 2013

Date of Report : May 06, 2013



TABLE OF CONTENT

Appendix II (3 Pages)

	Page
Test Report	
1. GENERAL INFORMATION	Δ
1.1. Description of Device (EUT)	
1.2. Description of Test Facility	
1.3. Measurement Uncertainty	
3. TEST METHODOLOGY	
3.1. Summary of Test Results	
3.2. Description of Test Modes.	
3.3. List of channels:	
4. CONDUCTED EMISSION TEST	
4.1. Block Diagram of Test Setup	
4.2. Power Line Conducted Emission Measurement Limits (15.207)	
4.3. Configuration of EUT on Measurement	
4.4. Operating Condition of EUT	
4.5. Test Procedure	9
4.6. Test equipment	9
4.7. Power Line Conducted Emission Measurement Results	9
5. FCC PART 15.247 REQUIREMENTS FOR DSSS & OFDM MODULATION	12
5.1 Test Setup	
5.2 6dB Bandwidth	
5.3 Maximum Peak output power test	20
5.4 Band Edges Measurement	
5.5 Peak Power Spectral Density	
5.6 Radiated Emissions	45
6. PHOTOGRAPH	52
6.1. Photo of Conducted Emission Measurement.	52
6.2. Photo of Radiation Emission Test	
Appendix I (2 Pages)	



TEST REPORT

Applicant : Cheng Fong International Limited

Manufacturer : Cheng Fong International Limited

EUT : Tablet PC Model No. : TBDG773B

Serial No. : N/A
Rating : DC 5V
Trade Mark : N/A

Measurement Procedure Used:

FCC Part15 Subpart C, Paragraph 15.247: 2011

The device described above is tested by Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Anbotek Compliance Laboratory Limited.

Date of Test:	Apr. 1/~ May 06, 2013
Prepared by :	Zock reng
	(Engineer / Rock Zeng)
Reviewer :	Sally. zhang
	(Project Manager / Sally Zhang)
Approved & Authorized Signer:	70 m. Chen
	(Manager /Tom Chen)



1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT : Tablet PC

Model Number : TBDG773B

Test Power Supply: DC 5V

RF Transmission : 2412MHz~2462MHz (802.11b/802.11g/802.11n(HT20))

Frequency 2422MHz~2452MHz (802.11n(HT40))

Channels : 11 For (802.11b/802.11g/802.11n(HT20))

7 For (802.11n(HT40))

Modulation 802.11b CCK

802.11g OFDM

802.11n MCS

Antenna Type : Integral

Antenna Gain : 0 dBi

Applicant : Cheng Fong International Limited

Address : Rm 19HG, HangDu Building, HuaFu Road, Fu Tian District

Manufacturer : Cheng Fong International Limited

Address : Rm 19HG, HangDu Building, HuaFu Road, Fu Tian District

Date of receiver : Apr. 17, 2013

Date of Test : Apr. 17~ May 06, 2013



1.2.Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS - LAB Code: L3503

Anbotek Compliance Laboratory Limited., Laboratory has been assessed and in compliance with CNAS/CL01: 2006 accreditation criteria for testing laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of Testing Laboratories.

FCC-Registration No.: 752021

Anbotek Compliance Laboratory Limited, EMC Laboratory has been registed and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 752021, August 20, 2010.

IC-Registration No.: 8058A-1

Anbotek Compliance Laboratory Limited., EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration 8058A, August 30, 2010.

Test Location

All Emissions tests were performed at Anbotek Compliance Laboratory Limited. at 1/F, 1 /Building, SEC Industrial Park, No.4 Qianhai Road, Nanshan District, Shenzhen, 518054, China

1.3. Measurement Uncertainty

Radiation Uncertainty : Ur = 4.3 dB

Conduction Uncertainty : Uc = 3.4dB



3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4: 2009 and FCC Part 15, Paragraph 15.247.

3.1. Summary of Test Results

The EUT has been tested according to the following specifications:

Standard	Test Type	Result	Notes
FCC Part 15, Paragraph 15.107, 15.207	Conducted Emission Test	PASS	Complies
FCC Part 15, Paragraph 15.247(b)(1)	Peak Output Power	PASS	Complies
FCC Part 15, Paragraph 15.247(a)(2)	6dB Bandwidth	PASS	Complies
FCC Part 15, Paragraph 15.247(c)	100kHz Bandwidth of Frequency Band Edges	PASS	Complies
FCC Part 15, Paragraph 15.209(a)(f)	209(a)(f) Spurious Emission		Complies
FCC Part 15, Paragraph 15.247(a)(1)	Frequency Separation	-	N/A
FCC Part 15, Paragraph 15.247(a)(1)(iii)	Number of Hopping Frequency		N/A
FCC Part 15, Paragraph 15.247(a)(1)(iii)	Time of Occupancy	-	N/A
FCC Part 15, Paragraph 15.247(c)	Peak Power Density	PASS	Complies

^{*} The digital circuit porting of the EUT has been tested and verified to comply with FCC Part 15, Subpart B., Class B Digital Devices and the associated Radio Receiver has also been tested and found to comply with FCC Part 15, Subpart B – Radio Receivers.

3.2. Description of Test Modes

The EUT has been tested under operating condition.

Software used to control the EUT for staying in continuous transmitting and receiving mode isprogrammed.

IEEE802.11b: Channel 1(2412MHz), Channel 6(2437MHz) and Channel 11(2462MHz) with 1 Mbps lowest data rate (worst case) are chosen for the final testing.

IEEE802.11g: Channel 1(2412MHz), Channel 6(2437MHz) and Channel 11(2462MHz) with 6 Mbps lowest data rate (the worst case) are chosen for the final testing.

IEEE802.11n (HT20: Channel 1(2412MHz), Channel 6(2437MHz) and Channel 11(2462MHz) with 6.5 Mbps lowest data rate (the worst case) are chosen for the final testing.

IEEE802.11n (HT40: Channel 3(2422MHz), Channel 6(2437MHz) and Channel 9(2452MHz) with 13.5 Mbps lowest data rate (the worst case) are chosen for the final testing.



3.3. List of channels:

√ - available

X - tested


a tested				
Number	Frequency(MHz)		802.11	802.11
			b/g/n	b/g/n
			(HT20)	(HT40)
1	2412	√	X	
2	2417	√		
3	2422	√		X
4	2427	√		
5	2432	√		
6	2437	√	X	X
7	2442	√		
8	2447	√		
9	2452	√		X
10	2457	√		
11	2462	1	X	



4. Conducted Emission Test

4.1. Block Diagram of Test Setup

4.1.1. Block diagram of connection between the EUT and simulators



4.2. Power Line Conducted Emission Measurement Limits (15.207)

Frequency	Limits dB(μV)					
MHz	Quasi-peak Level	Average Level				
0.15 ~ 0.50	66 ~ 56*	56 ~ 46*				
0.50 ~ 5.00	56	46				
5.00 ~ 30.00	60	50				

Notes: 1. *Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

4.3. Configuration of EUT on Measurement

The following equipments are installed on Power Line Conducted Emission Measurement to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

EUT : Tablet PC Model Number : TBDG773B

Applicant : Cheng Fong International Limited

4.4. Operating Condition of EUT

- 4.4.1. Setup the EUT and simulator as shown as Section 4.1.
- 4.4.2. Turn on the power of all equipment.
- 4.4.3. Let the EUT work in test mode (ON) and measure it.



4.5. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.4-2003 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9KHz.

The frequency range from 150KHz to 30MHz is checked.

The test results are reported on Section 4.6.

4.6.Test equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Receiver	Rohde & Schwarz	ESCI	100627	Nov. 12, 2012	1 Year
2.	LISN	SchwarzBeck	NSLK 8126	8126377	May 19, 2012	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	May 19, 2012	1 Year
4.	EMI Test Software ES-K1	Rohde & Schwarz	N/A	N/A	N/A	N/A

:

Conduction Uncertainty

Uc = 3.4dB

4.7. Power Line Conducted Emission Measurement Results **PASS.**

The frequency range from 150KHz to 30 MHz is investigated.

Please refer the following pages.

CONDUCTED EMISSION TEST DATA

EUT: Tablet PC M/N:TBDG773B Operating Condition: USB Charging and Playing

Test Site: 1# Shielded Room

Operator: Rock Zeng


Test Specification: AC 120V/60Hz for USB

Comment: Live Line

Tem:25°C Hum:50%

SCAN TABLE: "Voltage (150K~30M) FIN"

Short Description: 150K-30M Disturbance Voltages

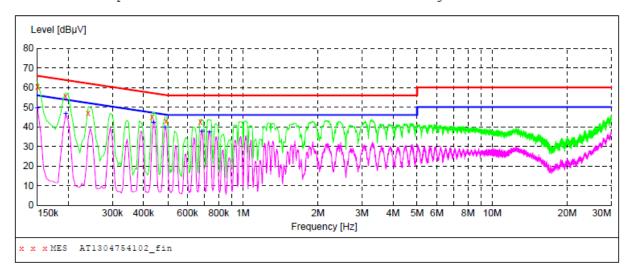

MEASUREMENT RESULT: "AT1304754102 fin"

5,	/2/2013 3:12	PM						
	Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
	0.150000	60.70	20.1	66	5.3	QP	L1	GND
	0.195000	55.80	20.1	64	8.0	QP	L1	GND
	0.240000	46.90	20.1	62	15.2	QP	L1	GND
	0.433500	45.00	20.1	57	12.2	QP	L1	GND
	0.492000	43.00	20.1	56	13.1	QP	L1	GND
	0.676500	42.40	20.1	56	13.6	QP	L1	GND

MEASUREMENT RESULT: "AT1304754102 fin2"

5/	2/2013 3:12	PM						
	Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
	0.150000	49.60	20.1	56	6.4	AV	L1	GND
	0.195000	46.50	20.1	54	7.3	AV	L1	GND
	0.438000	42.30	20.1	47	4.8	AV	L1	GND
	0.487500	39.70	20.1	46	6.5	AV	L1	GND
	0.685500	37.80	20.1	46	8.2	AV	L1	GND
	0.735000	37.20	20.1	46	8.8	AV	L1	GND

CONDUCTED EMISSION TEST DATA

EUT: Tablet PC M/N:TBDG773B Operating Condition: USB Charging and Playing

Test Site: 1# Shielded Room

Operator: Rock Zeng


Test Specification: AC 120V/60Hz for USB

Comment: Neutral Line

Tem:25°C Hum:50%

SCAN TABLE: "Voltage (150K~30M) FIN"

Short Description: 150K-30M Disturbance Voltages

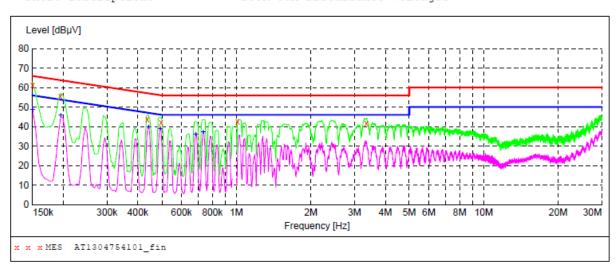

MEASUREMENT RESULT: "AT1304754101 fin"

5/2/2013 3	3:09PM						
Frequenc MF	-	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.15000	0 61.40	20.1	66	4.6	QP	N	GND
0.19500	0 55.70	20.1	64	8.1	QP	N	GND
0.43800	0 43.90	20.1	57	13.2	QP	N	GND
0.49650	0 42.20	20.1	56	13.9	QP	N	GND
1.01350	0 42.60	20.2	56	13.4	QP	N	GND
3.35350	0 41.90	20.4	56	14.1	QP	N	GND

MEASUREMENT RESULT: "AT1304754101_fin2"

5/2/2013 Frequ			Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.15	0000	48.70	20.1	56	7.3	AV	N	GND
0.19	5000	45.90	20.1	54	7.9	AV	N	GND
0.44	2500	39.70	20.1	47	7.3	AV	N	GND
0.49	2000	38.70	20.1	46	7.4	AV	N	GND
0.68	5500	36.20	20.1	46	9.8	AV	N	GND
0.73	5000	37.30	20.1	46	8.7	AV	N	GND



5. FCC Part 15.247 Requirements for DSSS & OFDM Modulation

5.1 Test Setup

EUT System	Attenuator	Test Receiver
201 27200111	1 100011000001	1 000 110001 ; 01

5.2 6dB Bandwidth

a. Limt

For the direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz.

b. Test Procedure

- 1. Place the EUT on the table and set it in the transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set the spectrum analyzer as RBW = 100kHz(802.11b/802.11g/802.11n(HT20)), RBW=300kHz, VBW = 3*RBW, Span = 50MHz, Sweep = auto.
- 4. Mark the peak frequency and -6dB (upper and lower) frequency.
- 5. Repeat until all the rest channels are investigated.
 - c. **Test Setup** See 5.1

d. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analysis	Agilent	E4407B	US39390582	July 03, 2012	1 Year
2	EMI Receiver	Rohde & Schwarz	ESCI	100627	Nov. 12, 2012	1 Year
3. Preamplifier		Instruments corporation	EMC01183 0	980100	July 03, 2012	1 Year
4	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Apr. 07, 2013	1 Year
5	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A

e. Test Results

Pass.



e	T4	D-4-
т.	1291	Data

Test mode:	IEEE	802 11h	
rest mode.	ILLL	004.110	

Channel	Frequency	Bandwidth	Limit	Results
	(MHz)	(MHz)	(kHz)	Resuits
Low	2412	10.20		Pass
Mid	2437	10.00	>500	Pass
High	2462	10.00		Pass

Test mode: IEEE 802.11g

Channel	Frequency	Bandwidth	Limit	Results
	(MHz)	(MHz)	(kHz)	Resuits
Low	2412	16.60		Pass
Mid	2437	16.60	>500	Pass
High	2462	16.60		Pass


Test mode: IEEE 802.11n (HT20)

Channel	Frequency	Bandwidth	Limit	Results
	(MHz)	(MHz)	(kHz)	Resuits
Low	2412	17.60		Pass
Mid	2437	17.60	>500	Pass
High	2462	17.60		Pass

Test mode: IEEE 802.11n (HT40)

Channel	Frequency	Bandwidth	Limit	Dagulta	
	(MHz)	(MHz)	(kHz)	Results	
Low	2422	35.30		Pass	
Mid	2437	35.20	>500	Pass	
High	2452	35.20		Pass	


Test Plots See the following page.

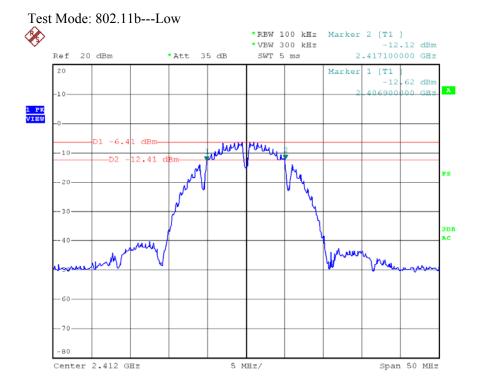


Date: 2.MAY.2013 19:35:42

Test Mode: 802.11b---Mid *REW 100 kHz Marker 1 [T1] *VBW 300 kHz 2.432000000 GHz 20 Marker 2 [T1] -12.38 dBm 2.442000000 GHz D1 -6.81 dBm 2.442000000 GHz D2 -12.81 dBm 2.442000000 GHz Span 50 MHz Center 2.437 GHz 5 MHz/ Span 50 MHz

Date: 2.MAY.2013 19:37:50

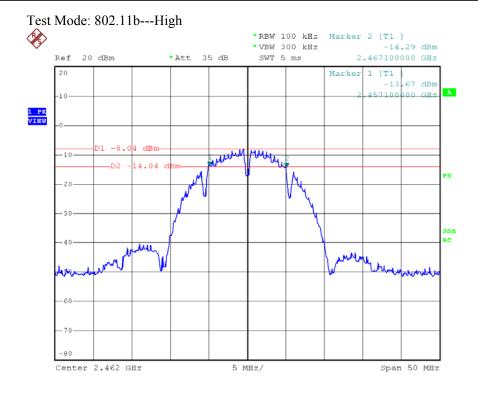


Date: 2.MAY.2013 19:39:23

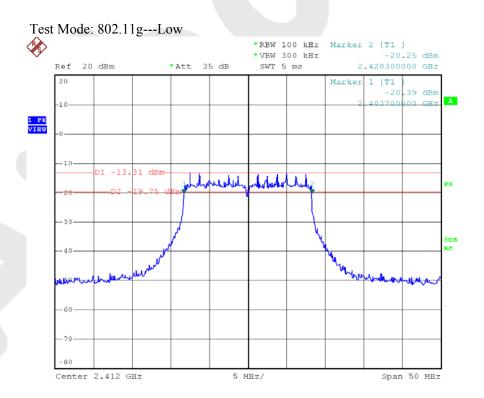


Date: 2.MAY.2013 19:54:11



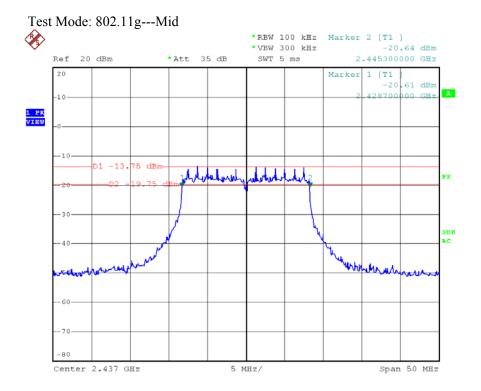


Date: 2.MAY.2013 19:52:52

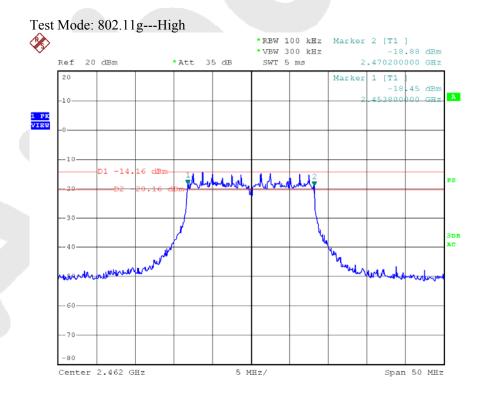


Date: 2.MAY.2013 19:42:27



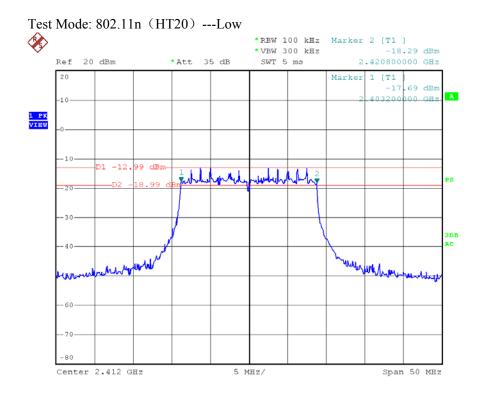


Date: 2.MAY.2013 19:55:27

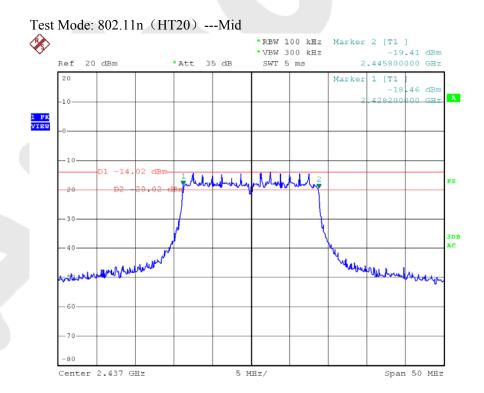


Date: 2.MAY.2013 19:59:14



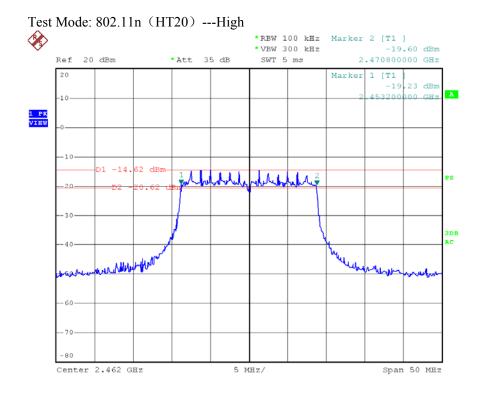


Date: 2.MAY.2013 20:00:17

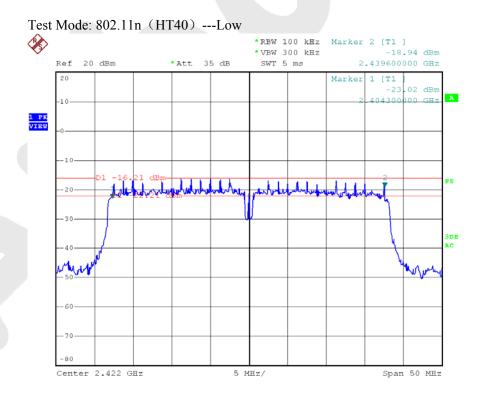


Date: 2.MAY.2013 20:05:39



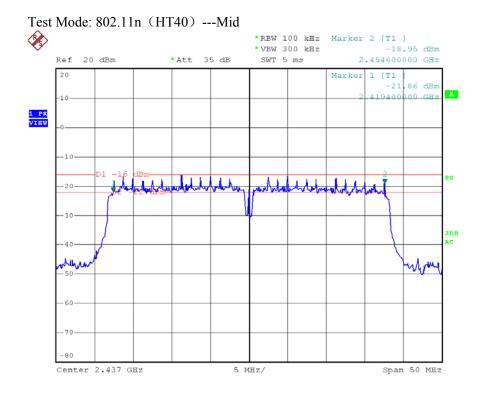

Date: 2.MAY.2013 20:04:18

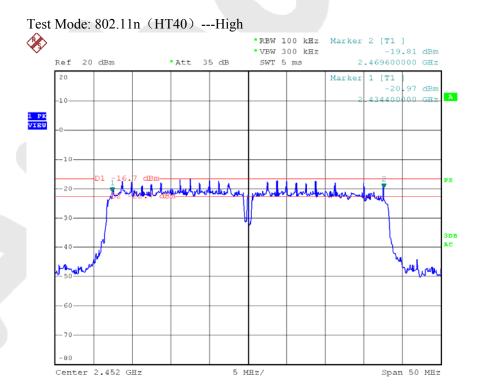

Date: 2.MAY.2013 20:03:13



5.3 Maximum Peak output power test

a. Limt

The maximum peak output power of the intentional radiator shall not exceed the following:

- 1. For systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 watt (30dBm).
- 2. Except as shown in paragraphs (b)(3) (i), (ii) and (iii) of this section, if transmitting antenna of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

b. Configuration of Measurement

EUT	DC block	ATT.		Test receiver
			ı	

c. Data Rates

IEEE802.11b: Channel 1(2412MHz), Channel 6(2437MHz) and Channel 11(2462MHz) with 1 Mbps data rate (worst case) are chosen for the final testing.

IEEE802.11g: Channel 1(2412MHz), Channel 6(2437MHz) and Channel 11(2462MHz) with 6 Mbps data rate (the worst case) are chosen for the final testing.

IEEE802.11n (HT20: Channel 1(2412MHz), Channel 6(2437MHz) and Channel 11(2462MHz) with 6.5Mbps data rate (the worst case) are chosen for the final testing.

IEEE802.11n (HT40: Channel 3(2422MHz), Channel 6(2437MHz) and Channel 9(2452MHz) with 13.5Mbps data rate (the worst case) are chosen for the final testing.

d. Test Procedure

This test was according the kdb 58074 5.2.1.2 Measurement Procedure PK2:

- 1. This procedure provides an integrated measurement alternative when the maximum available RBW < EBW.
 - 2. Set the RBW = 1 MHz.
 - 3. Set the VBW = 3 MHz.
 - 4. Set the span to a value that is 5-30 % greater than the EBW.
 - 5. Detector = peak.
 - 6. Sweep time = auto couple.
 - 7. Trace mode = max hold.
 - 8. Allow trace to fully stabilize.
 - 9. Use the spectrum analyzer's integrated band power measurement function with band limits set equal to the EBW band edges (for some analyzers, this may require a manual override to ensure use of peak detector). If the spectrum analyzer does not have a band power function, sum the spectrum levels (in linear power units) at 1 MHz intervals extending across the EBW of the spectrum.

Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analysis	Agilent	E4407B	US39390582	July 03, 2012	1 Year
2	EMI Receiver	Rohde & Schwarz	ESCI	100627	Nov. 12, 2012	1 Year
3.	Preamplifier	Instruments	EMC01183	980100	July 03, 2012	1 Year
	Preamplifier	corporation	0	980100	July 03, 2012	
4	Double Ridged	Instruments	GTH-0118	351600	Apr. 07, 2013	1 Year
	Horn Antenna	corporation			Apr. 07, 2013	1 1 eai
5	EMI Test					
	Software	SHURPLE	N/A	N/A	N/A	N/A
	EZ-EMC					

Tel: (86)755-26066544 Fax:(86)755-26014772 www.anbotek.com



e. Test Results

Pass

f. Test Data

Test mode: IEEE 802.11b

Channel	Frequency	equency Maximum transmit power		Limit			
Chamiei	(MHz)	(dBm)	(dBm)	(watts)	Result		
Low	2412	6.22			Pass		
Mid	2437	6.13	30	1	Pass		
High	2462	6.11			Pass		

Test mode: IEEE 802.11g


Champal	Frequency	Maximum transmit power	Li	mit	Dogult
Channel	(MHz)	(dBm)	(dBm)	(watts)	Result
Low	2412	5.77			Pass
Mid	2437	5.98	30	1	Pass
High	2462	5.75			Pass


Test mode: IEEE 802.11n (HT20)

Channel	Frequency	Maximum transmit power	Li	mit	Result
Chamiei	(MHz)	(dBm)	(dBm)	(watts)	Result
Low	2412	5.35			Pass
Mid	2437	5.49	30	1	Pass
High	2462	5.51			Pass


Test mode: IEEE 802.11n (HT40)


Chammal	Frequency	Maximum transmit power	Limit		Dagult
Channel	(MHz)	(dBm)	(dBm)	(watts)	Result
Low	2422	5.74			Pass
Mid	2437	5.49	30	1	Pass
High	2452	5.56			Pass

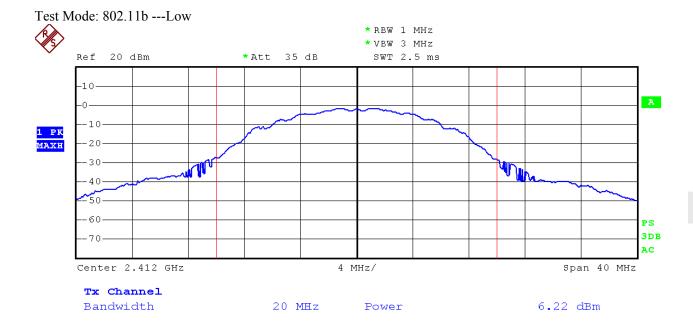


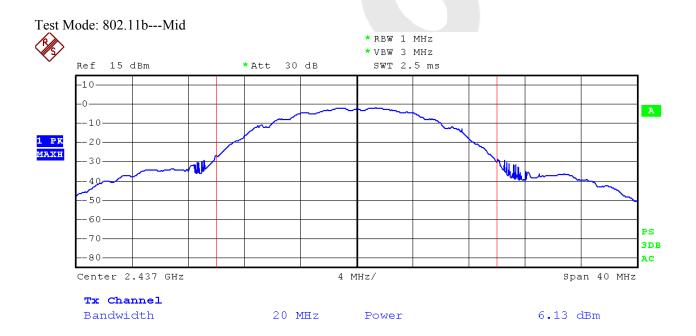





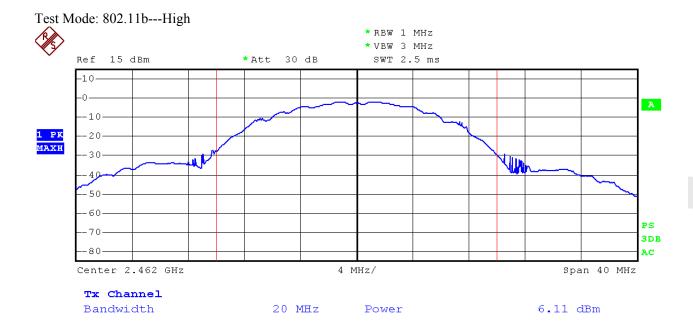


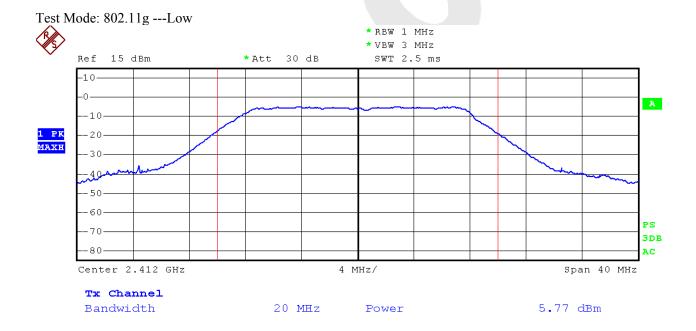

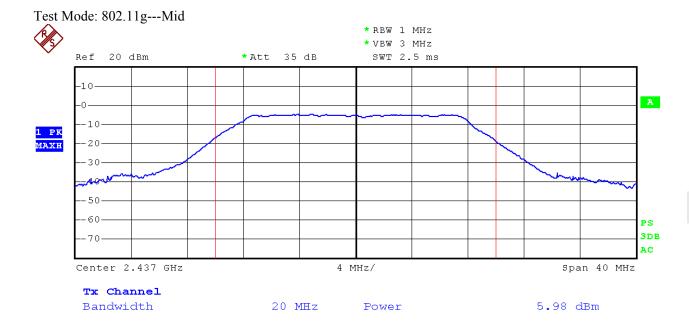


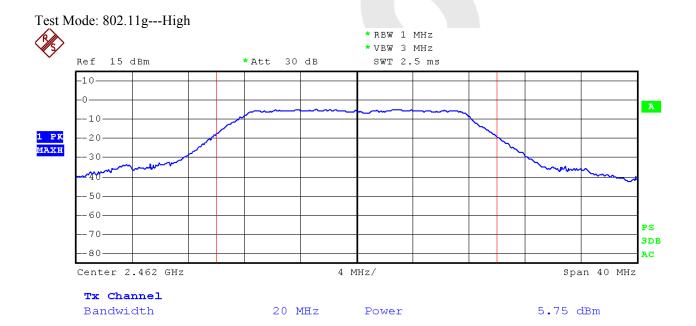


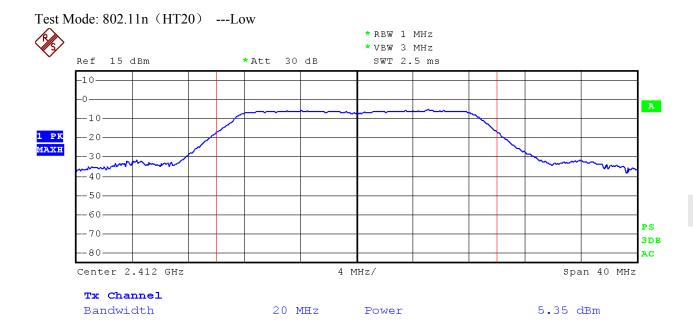


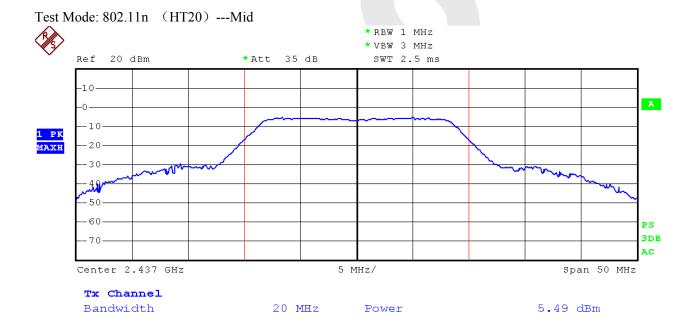




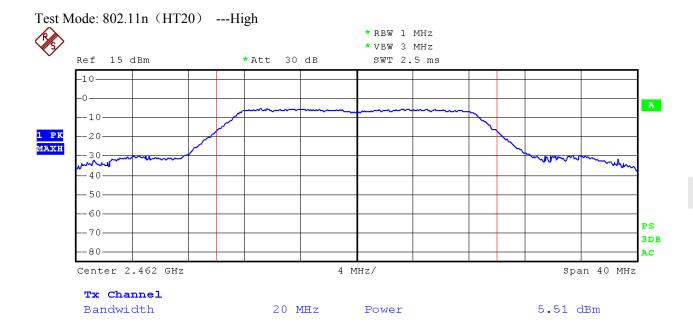

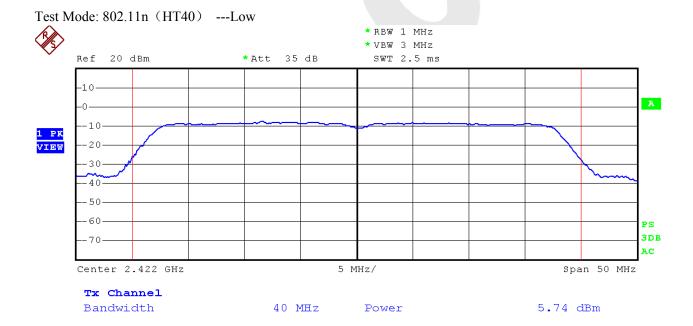

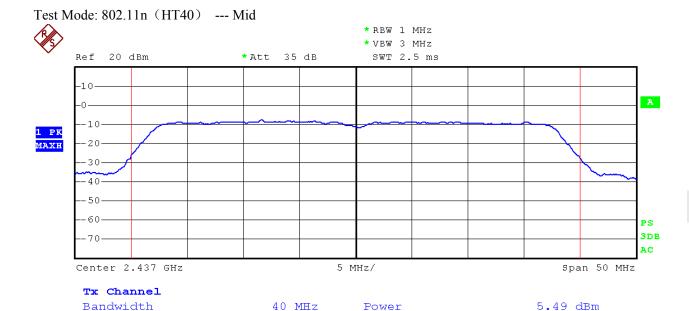

Test Mode: 802.11n (HT40) ---High

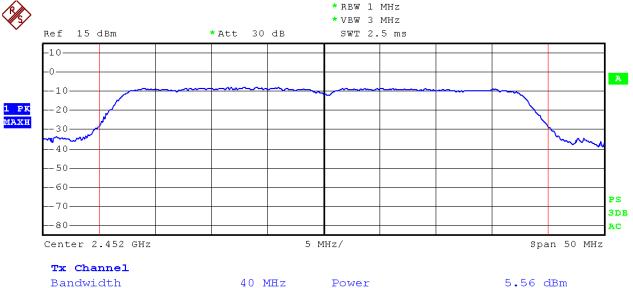



5.4 Band Edges Measurement

a. Limt


According to §15.247(c), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in15.209(a).

b. Test Procedure

- 1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
- 2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
- 3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
- 4. Peak detector: RBW=100KHz, VBW=100KHz, SWT=AUTO Average detector: RBW=1MHz, VBW=10Hz, SWT=AUTO The EUT is tested in 9*6*6 Chamber.
- 5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analysis	Agilent	E4407B	US39390582	July 03, 2012	1 Year
2	EMI Receiver	Rohde & Schwarz	ESCI	100627	Nov. 12, 2012	1 Year
3.	Preamplifier	Instruments corporation	EMC01183 0	980100	July 03, 2012	1 Year
4	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Apr. 07, 2013	1 Year
5	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A

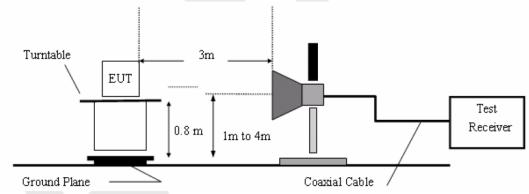


c. Test Results


Pass

d. Test Plots

See the following page.

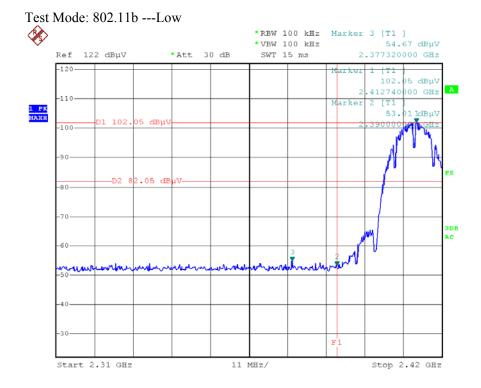


Date: 3.MAY.2013 17:23:17

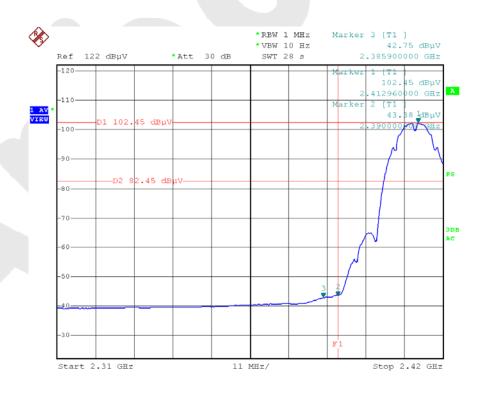


Date: 3.MAY.2013 17:25:10



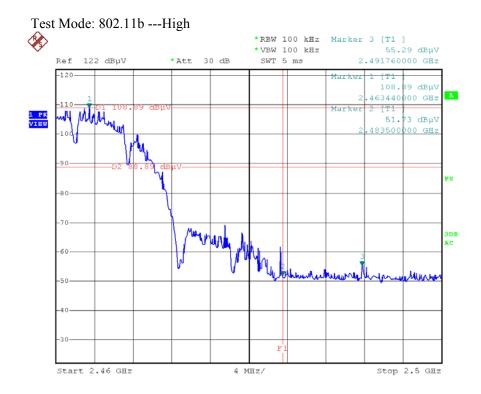


Date: 3.MAY.2013 17:21:50

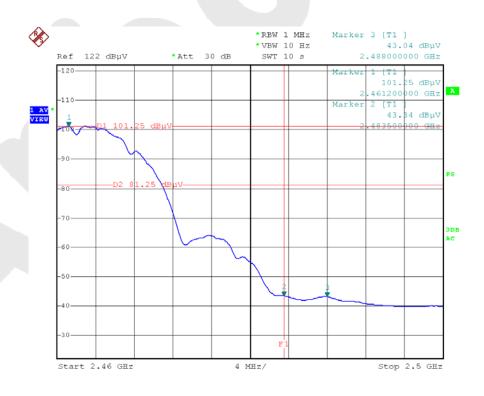


Date: 3.MAY.2013 17:26:46



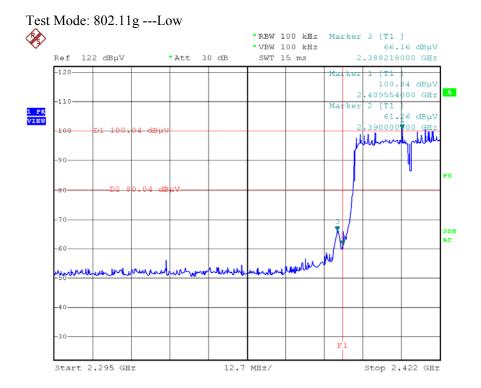


Date: 3.MAY.2013 17:10:08

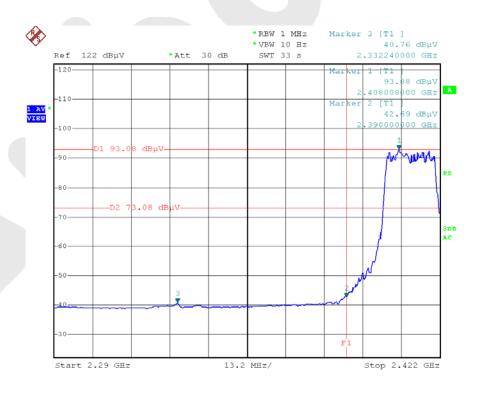


Date: 3.MAY.2013 17:31:28



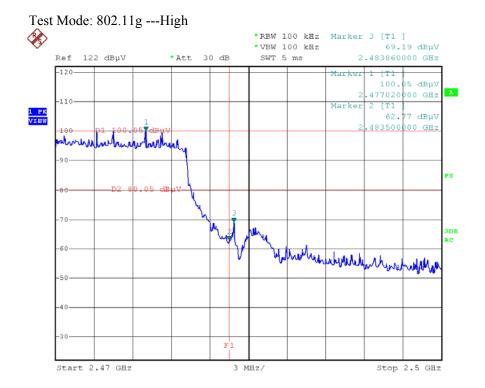


Date: 3.MAY.2013 17:08:54

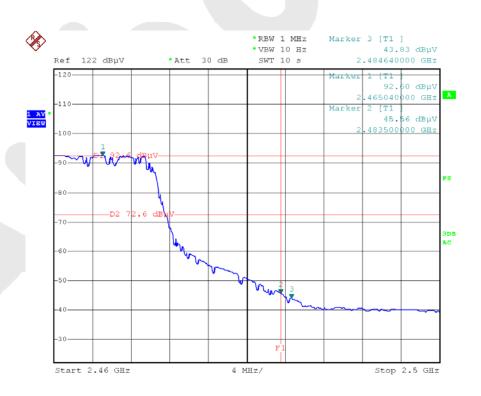


Date: 3.MAY.2013 17:28:47



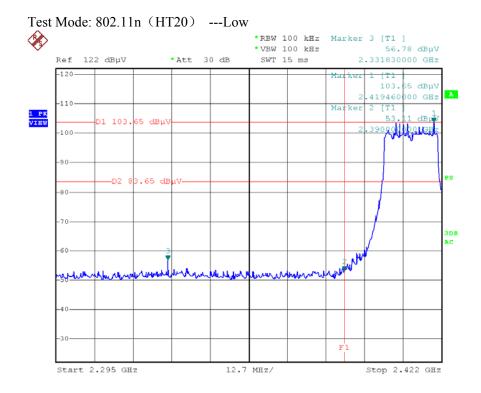


Date: 3.MAY.2013 17:11:32

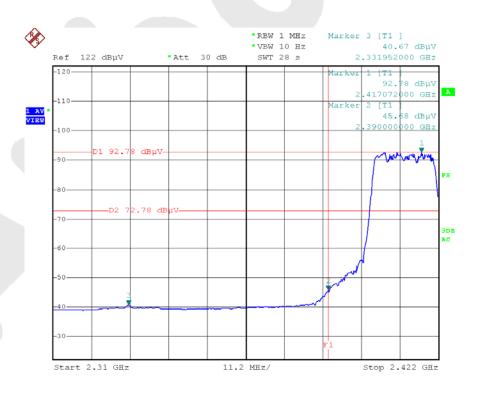


Date: 3.MAY.2013 17:36:46



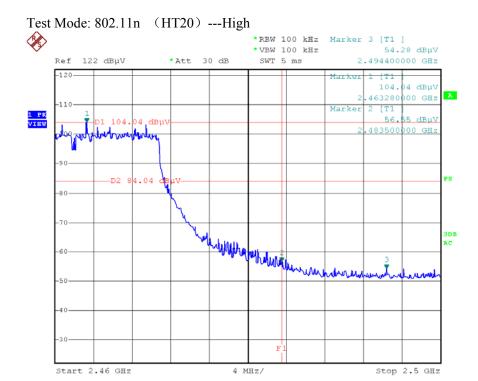


Date: 3.MAY.2013 17:12:52

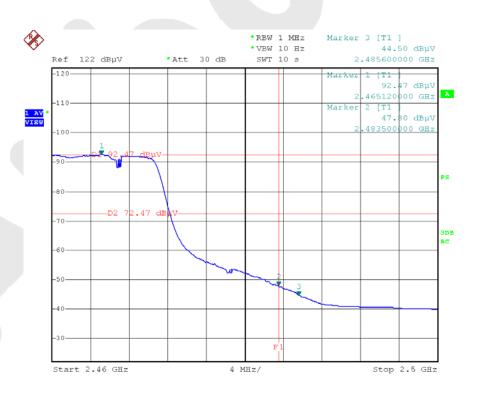


Date: 3.MAY.2013 17:34:59



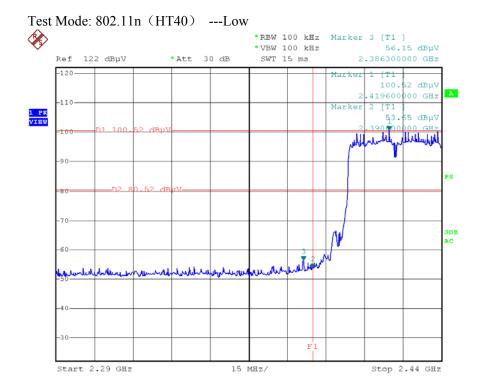


Date: 3.MAY.2013 17:15:38

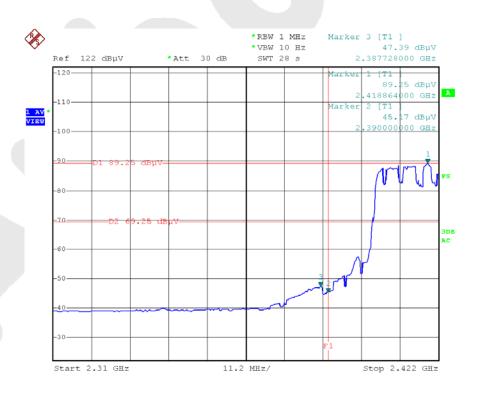


Date: 3.MAY.2013 17:47:01



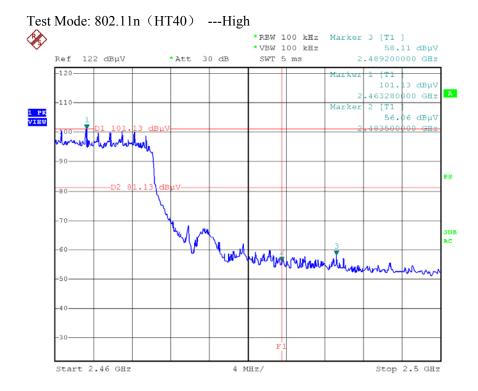

Date: 3.MAY.2013 17:14:14

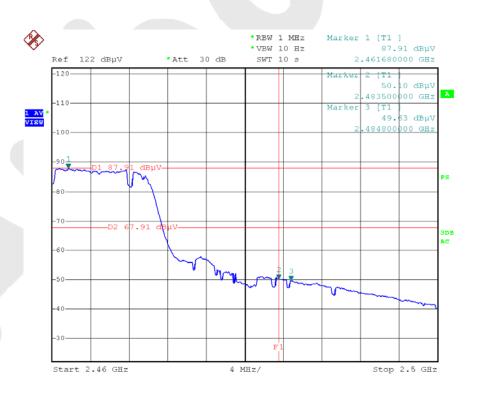

Date: 3.MAY.2013 17:50:48



5.5 Peak Power Spectral Density

a. Limt

- 1. For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.
- 2. The direct sequence operating of the hybrid system, with the frequency hopping operation turned off, shall comply with the power density requirements of paragraph (d) of this section.

b. Test Procedure

- 1. Place the EUT on the table and set it in transmitting mode. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 2. Set the spectrum analyzer as RBW = 3kHz, VBW = 10kHz, Span = 1.5MHz, Sweep=500s
- 3. Record the max. reading.
- 4. Repeat the above procedure until the measurements for all frequencies are completed. Test Equipment

Item	Equipment Manufactur		Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	July 03, 2012	1 Year
2.	Preamplifier	Preamplifier Instruments corporation		980100	July 03, 2012	1 Year
3.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Apr. 07, 2013	1 Year
4.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A

c. Test Setup

See 5.1

d. Test Results

Pass

e. Test Data


Please refer to the following data.




Test mode: IEEE	802.11b				
Channel	Frequency	PPSD	Σ PPSD	Limit	Result
	(MHz)	(dBm/3KHz)	(dBm/3KHz)	(dBm)	
Low	2412	-13.15	-		Pass
Mid	2437	-12.84	-	8.00	Pass
High	2462	-12.62	-		Pass
Test mode: IEEE	802 11σ				
	Frequency	PPSD	Σ PPSD	Limit	
Channel	(MHz)	(dBm)	(dBm)	(dBm)	Result
Low	2412	-13.26	-	()	Pass
Mid	2437	-12.83	-	8.00	Pass
High	2462	-12.82	-		Pass
_					
Test mode: IEEE	802.11n (HT20)				
Channel	Frequency	PPSD	Σ PPSD	Limit	Result
Chamiei	(MHz)	(dBm/3KHz)	(dBm/3KHz)	(dBm)	Result
Low	2412	-13.15	-		Pass
Mid	2437	-12.95	-	8.00	Pass
High	2462	-12.74	-		Pass
Test mode: IEEE	802.11n (HT40)				
Channel	Frequency	PPSD	Σ PPSD	Limit	Result
	(MHz)	(dBm/3KHz)	(dBm/3KHz)	(dBm)	
Low	2422	-13.08	-		Pass
Mid	2437	-12.94	-	8.00	Pass
High	2452	-12.83	-		Pass



f. Test Plot See the following pages 802.11 b CH--Low

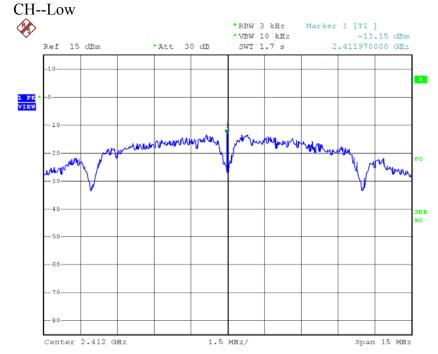


Date: 2.MAY.2013 21:07:02

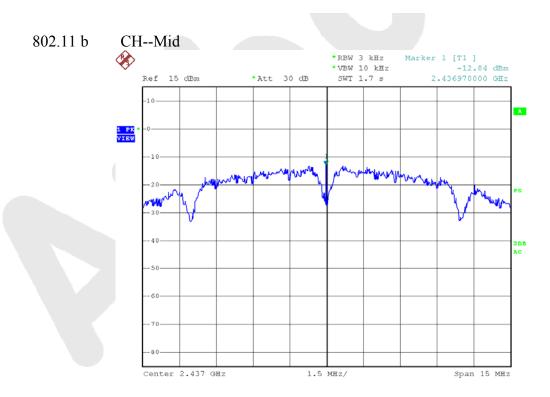

Date: 2.MAY.2013 21:07:55

Span 15 MHz




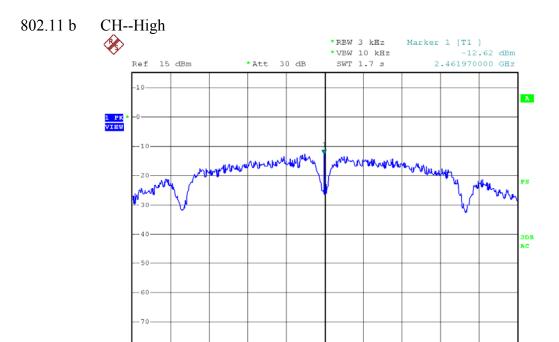

1.5 MHz/


Date: 2.MAY.2013 21:08:19

Center 2.462 GHz

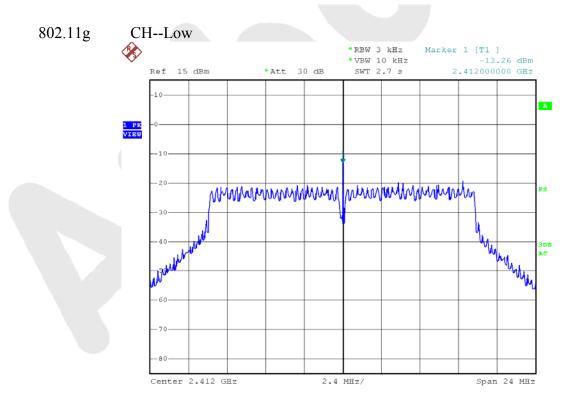


Date: 2.MAY.2013 21:09:05



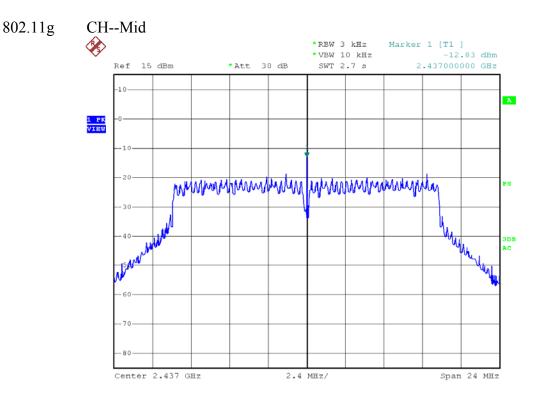



Date: 2.MAY.2013 21:09:27

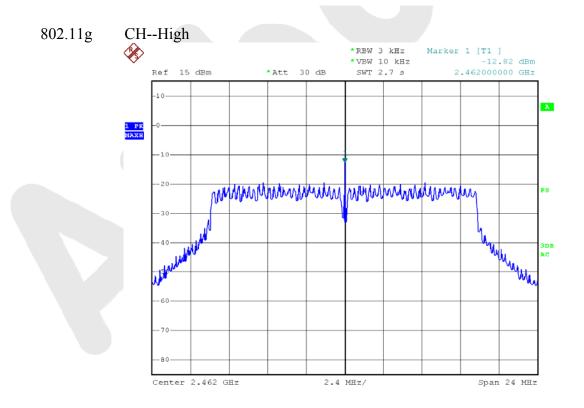

Date: 2.MAY.2013 21:09:45






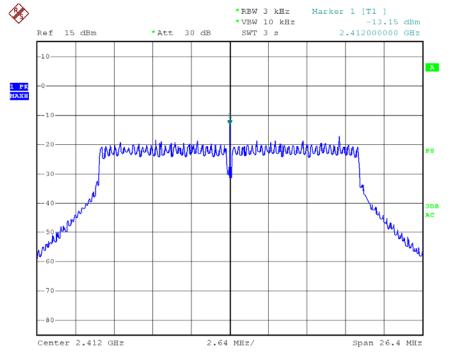


Date: 3.MAY.2013 16:29:26


802.11n (HT20) CH—Mid

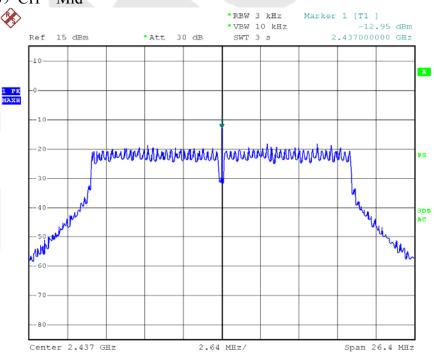

Date: 3.MAY.2013 16:30:03






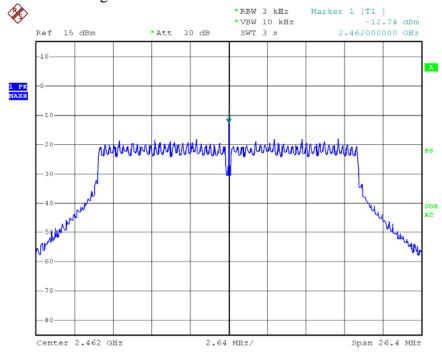

Date: 3.MAY.2013 16:31:36


802.11n (HT40) CH—Low

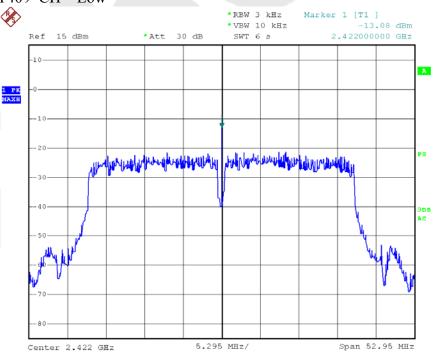

Date: 3.MAY.2013 16:34:01






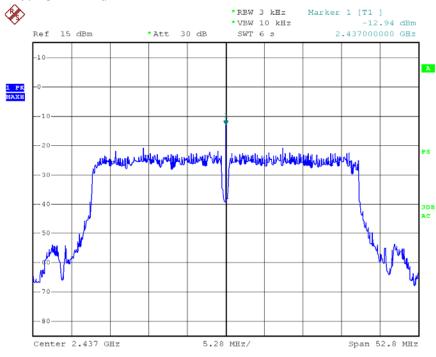

Date: 3.MAY.2013 16:34:51

802.11n (HT40) CH—High

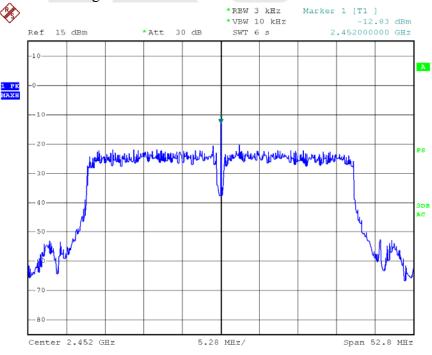

Date: 3.MAY.2013 16:36:00



5.6 Radiated Emissions

5.6.1.1. Test Limits (< 30 MHZ)

Frequency	Field Strength	Measurement Distance	
(MHz)	(microvolts/meter)	(meter)	
0.009-0.490	2400/F(kHz)	300	
0.490-1.705	24000/F(kHz)	30	
1.705-30.0	30	30	

5.6.1.2. Test Limits (≥ 30 MHZ)

FIELD STRENGTH	FIELD STRENGTH	S15.209	
of Fundamental:	of Harmonics	30 - 88 MHz	40 dBuV/m @3M
902-928 MHZ		88 - 216 MHz	43.5
2.4-2.4835 GHz		216 - 960 MHz	46
$94 \text{ dB}\mu\text{V/m} @3\text{m}$	54 dBμV/m @3m	ABOVE 960 MHz	54dBuV/m


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Test Equipment

103	t Equipment				<u> </u>	
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analysis	Agilent	E4407B	US39390582	July 03, 2012	1 Year
2.	Preamplifier	Instruments corporation	EMC01183 0	980100	July 03, 2012	1 Year
3.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Apr. 07, 2013	1 Year
4.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A


5.6.2. Test Configuration:

5.6.2.1. 9k to 30MHz emissions:

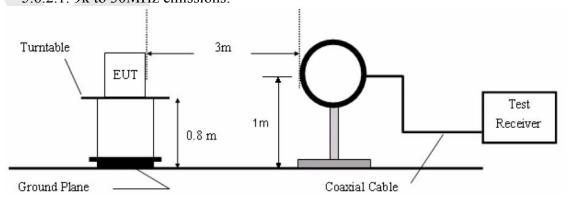




5.6.2.2. 30M to 1G emissions:

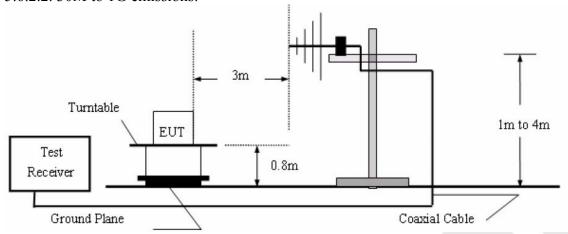

5.6.2.3. 1G to 40G emissions:

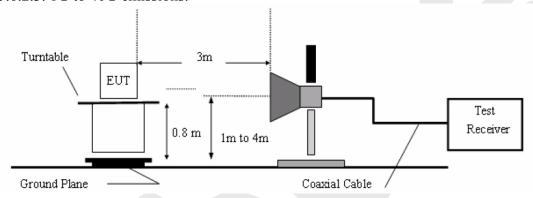

5.6.3. Test Procedure

The EUT is placed on a turn table which is 0.8 meter high above the ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on test.

Measurements are made on 9KHz to 30MHz and 30MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.

All readings from 30MHz to 1GHz are quasi-peak values with a resolution bandwidth of 120kHz. All reading are above 1GHz, peak & average values with a resolution bandwidth of 1MHz. The EUT is tested in 9*6*6 Chamber.

The test results are listed in Section 5.6.4.



g. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analysis	Agilent	E4407B	US39390582	July 03, 2012	1 Year
2.	Preamplifier	Instruments	EMC01183	980100	July 03, 2012	1 Year
	Preampinier	corporation	0	980100	July 05, 2012	
3.	Double Ridged	Instruments	GTH-0118	351600	Apr. 07, 2013	1 Year
	Horn Antenna	corporation			Apr. 07, 2013	1 1 eai
4.	EMI Test					
	Software	SHURPLE	N/A	N/A	N/A	N/A
	EZ-EMC					

5.6.4.Test Results





Below 30MHz

There is no emissions were detected below 30MHz

From 30MHz to 1 GHz

Operation Mode: Normal link
Test Date: Apr. 28, 2013
Temperature: 25°C
Tested by: Rock Zeng
Humidity: 70 % RH
Polarity: Ver. / Hor.

Totality, 70 70 KH										
Freq.	Ant.Pol.	Detector	Reading	Factor	Actual FS	Limit 3m	Safe			
(MHz)	H/V	Mode	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	Margin			
		(PK/QP)					(dB)			
39.2991	V	Peak	36.86	-10.92	25.94	40.00	-14.06			
116.9495	V	Peak	41.11	-16.12	24.99	43.50	-18.51			
446.4141	V	Peak	38.57	-11.49	27.08	46.00	-18.92			
468.8762	V	Peak	40.07	-11.85	28.22	46.00	-17.78			
584.7895	V	Peak	39.87	-9.49	30.38	46.00	-15.62			
704.2261	V	Peak	37.96	-8.34	29.62	46.00	-16.38			
40.1347	Н	Peak	32.13	-10.42	21.71	43.50	-18.29			
356.6758	Н	Peak	38.73	-13.78	24.95	46.00	-21.05			
446.4141	Н	Peak	36.44	-12.17	24.27	46.00	-21.73			
468.8762	Н	Peak	39.25	-11.85	27.40	46.00	-18.60			
517.2480	Н	Peak	36.69	-11.00	25.69	46.00	-20.31			
704.2261	Н	Peak	44.35	-8.39	35.96	46.00	-10.04			

Notes:

- 1. Measuring frequencies from 30 MHz to the 1GHz and the IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.
- 2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/Quasi-peak detector mode.
- 3. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.



Test Date: Mar. 25, 2013

Tested by: Rock Zeng



FCC ID: W2VTBDG773B

Above 1 GHz (The worst Mode)

Operation Mode: TX / IEEE 802.11g / CH Low

Temperature: 25oC Humidity: 50 % RH

	Humidity: 50 % RH Polarity: Ver. / F												
Item	Freq.	Ant.Pol	Read	Antenna	Cable	Preamp	Le	vel	Peak Limi	AV Limit	Margin		
	(MHz)	H/V	Level	Factor	Loss	Factor	Peak	AV	(dBuV/)		(dB)	Remark	
	(IVIIIZ)	11) 4	(dBuV)	(dB)	(dB)	(dB)	(dBuV/)	(dBuV/)	(dDu V/)	(dDd 17)	(ub)		
1.	4824	Н	57.29	35.76	4.58	34.94	66.69		74.00	54.00	-11.31	Peak	
2.	4824	Н	36.31	35.76	4.58	34.94		41.71	74.00	54.00	-12.29	AVG	
3.	7240	Н	43.96	37.85	5.63	35.25	52.19		74.00		-21.81	Peak	
4.	9648	Н	44.28	39.39	6.34	35.70	54.31		74.00	-	-19.69	Peak	
5.	12060	Н											
6.	14472	Н								1	-		
7.	16884	Н							/				
8.	19296	Н											
9.	21708	Н											
10.	24120	Н											
Note:	Note: An item 3 and 4 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emission												
1.	4824	V	53.78	35.13	4.58	34.94	58.55		74.00	54.00	-15.45	Peak	
_	4004	* *	20.22	25.12	4.50	2404		40.00	5400	54.00	11.01	4.7.7.0	

1.	4824	V	53.78	35.13	4.58	34.94	58.55		74.00	54.00	-15.45	Peak
2.	4824	V	38.22	35.13	4.58	34.94		42.99	74.00	54.00	-11.01	AVG
3.	7240	V	41.31	36.90	5.63	35.25	48.59		74.00		-25.40	Peak
4.	9648	V	43.45	38.57	6.34	35.70	52.66	4	74.00		-21.34	Peak
5.	12060	V							-			
6.	14472	V										
7.	16884	V										
8.	19296	V										
9.	21708	V						, -				
10.	24120	V										

Note: An item 3 and 4 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emission





Operation Mode: TX / IEEE 802.11g / CH Mid Test Date: Mar. 25, 2013

Temperature: 25°C
Humidity: 50 % RH

Tested by: Rock Zeng
Polarity: Ver. / Hor.

											-	
Item	Freq. (MHz)	Ant.Pol H/V	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Le Peak	vel AV	Peak Limi (dBuV/)		Margin (dB)	Remark
	(11112)	11/ 1	(dBuV)	(dB)	(dB)	(dB)	(dBuV/)	(dBuV/)	(aba (i)	(aba (i)	(ub)	
1.	4874	Н	41.17	35.83	4.61	34.93		46.68	74.00	54.00	-7.32	AVG
2.	4874	Н	45.34	35.83	4.61	34.93	50.85		74.00	54.00	-23.15	Peak
3.	7311	Н	42.14	37.86	5.64	35.26	50.38		74.00	54.00	-23.64	Peak
4.	9748	Н	42.15	39.51	6.36	35.70	52.32		74.00		-21.68	Peak
5.	12185	Н										
6.	14622	Н										
7.	17059	Н										
8.	19496	Н							/			
9.	21933	Н										
10.	24370	Н										
Note:	An item 4	are on ur	n-restricted	band, so the	e limit is	-20dB for	the field str	ength of the	e fundament	al emission		
			1	1		1						

1.	4874	V	45.20	35.18	4.61	34.93		49.56	74.00	54.00	-4.04	AVG
2.	4874	V	51.26	35.18	4.61	34.93	56.12		74.00	54.00	-17.88	Peak
3.	7311	V	42.27	36.92	5.64	35.26	49.57	-	74.00	54.00	-24.43	Peak
4.	9748	V	41.28	38.71	6.36	35.70	50.65		74.00		-23.35	Peak
5.	12185	V										
6.	14622	V					4-					
7.	17059	V					1					
8.	19496	V										
9.	21933	V				-						
10.	24370	V										

Note: An item 4 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emission





6.

7.

8.

9.

14772

17234

19696

22158

V

V

V

V

FCC ID: W2VTBDG773B

Operation Mode: TX / IEEE 802.11g / CH High
Temperature: 25°C
Tested by: Rock Zeng

Temperature: 25°C
Humidity: 50 % RH

Tested by: Rock Zeng
Polarity: Ver. / Hor.

ruillidity. 50 % Kri												
Item	Freq.	Ant.Pol	Read	Antenna	Cable	Preamp	Le	vel	Peak Limit	AV Limit	Margin	
	(MHz)	H/V	Level (dBuV)	Factor (dB)	Loss (dB)	Factor (dB)	Peak (dBuV/)	AV (dBuV/)	(dBuV/)	(dBuV/)	(dB)	Remark
1.	4924	Н	39.25	35.90	4.68	34.92		44.95	74.00	54.00	-9.05	AVG
2.	4924	Н	46.21	35.90	4.68	34.92	51.87		74.00	54.00	-22.13	Peak
3.	7386	Н	41.12	37.88	5.65	35.28	49.37		74.00	54.00	-24.63	Peak
4.	9848	Н	42.20	39.61	6.38	35.70	52.49		74.00		-21.87	Peak
5.	12310	Н										
6.	14772	Н								-		
7.	17234	Н	-	-	-	-				-	1	
8.	19696	Н	-	-	-	-						
9.	22158	Н		-							7	
10.	24620	Н								 -		
Note:	An item 4	are on un	-restricted	band, so the	limit is	-20dB for	the field str	ength of the	e fundament	al emission		
1.	4924	V	48.12	35.23	4.68	34.92	53.11		74.00	54.00	-20.89	Peak
2.	4924	V	44.44	35.23	4.68	34.92		49.43	74.00	54.00	-4.77	AVG
3.	7386	V	42.36	36.96	5.65	35.28	49.69	<u>-</u>	74.00	54.00	-24.31	Peak
4.	9848	V	42.24	38.81	6.38	35.70	51.73		74.00		-22.27	Peak
5.	12310	V	-	-		-						





6. PHOTOGRAPH





6.2. Photo of Radiation Emission Test





Appendix I (External Photos)

Figure 1
The EUT-Overall View



Figure 2
The EUT-Front View










Figure 4
The EUT-Port View





Appendix $\, \mathrm{II} \,$ (Internal Photos)

Figure 5
The EUT-Inside View



Figure 6
PCB of the EUT-Front View





Figure 7
PCB of the EUT-Back View



Figure 8
PCB of the EUT-Battery View







