


RF TEST REPORT



Report No.: FCC_IC_RF_SL16070501-CPC-003

Supersede Report No.: NONE

Applicant	:	ChargePoint, Inc.
Host Product Name	:	Electrical Vehicle Charging Station
Host Model No.	:	CT4000
RFID Model No.	:	28010098
Test Standard	:	FCC 15.225 RSS-210 Issue 8: 2010
Test Method	:	FCC 15.225 ANSI C63.10 2013 RSS Gen Issue 4 2014
FCC ID	:	W38-28010098
IC ID	:	8854A-28010098
Dates of test	:	07/20/2016 to 08/02/2016
Issue Date	:	08/04/2016
Test Result	:	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail
Equipment complied with the specification		[X]
Equipment did not comply with the specification		[]
This Test Report is Issued Under the Authority of:		
		
Chen Ge		Martin Ma
Test Engineer		Engineer Reviewer
This test report may be reproduced in full only		
Test result presented in this test report is applicable to the tested sample only		

Issued By:
SIEMIC Laboratories
775 Montague Expressway, Milpitas, CA 95035



775 Montague Expressway, Milpitas, CA 95035, USA • Phone: (+1) 408 526 1188 • Facsimile (+1) 408 526 1088



Visit us at: www.siemic.com; Follow us at:

Laboratory Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Accreditation Body	Scope
USA	FCC, A2LA	EMC, RF/Wireless, Telecom
Canada	IC, A2LA, NIST	EMC, RF/Wireless, Telecom
Taiwan	BSMI, NCC, NIST	EMC, RF, Telecom, Safety
Hong Kong	OFTA, NIST	RF/Wireless, Telecom
Australia	NATA, NIST	EMC, RF, Telecom, Safety
Korea	KCC/RRA, NIST	EMI, EMS, RF, Telecom, Safety
Japan	VCCI, JATE, TELEC, RFT	EMI, RF/Wireless, Telecom
Mexico	NOM, COFETEL, Caniety	EMC, RF/Wireless, Telecom, Safety
Europe	A2LA, NIST	EMC, RF, Telecom, Safety
Israel	MOC, NIST	EMC, RF, Telecom, Safety

Accreditations for Product Certifications

Country	Accreditation Body	Scope
USA	FCC TCB, NIST	EMC, RF, Telecom
Canada	IC FCB, NIST	EMC, RF, Telecom
Singapore	iDA, NIST	EMC, RF, Telecom
EU	NB	EMC & R&TTE Directive
Japan	MIC (RCB 208)	RF, Telecom
Hong Kong	OFTA (US002)	RF, Telecom

CONTENTS

1	REPORT REVISION HISTORY.....	4
2	EXECUTIVE SUMMARY.....	5
3	CUSTOMER INFORMATION	5
4	TEST SITE INFORMATION.....	5
5	MODIFICATION.....	5
6	EUT INFORMATION.....	6
6.1	EUT Description	6
6.2	Radio Description	6
6.3	EUT test modes/configuration Description	7
6.4	EUT Photos - External.....	8
6.5	EUT Photos – Internal.....	9
6.6	EUT Test Setup Photos.....	10
7	SUPPORTING EQUIPMENT/SOFTWARE AND CABLING DESCRIPTION	11
7.1	Supporting Equipment.....	11
7.2	Cabling Description	11
7.3	Test Software Description.....	11
8	TEST SUMMARY	12
9	MEASUREMENT UNCERTAINTY	13
10	MEASUREMENTS, EXAMINATION AND DERIVED RESULTS.....	14
10.1	Antenna Requirement.....	14
10.2	Conducted Emissions Test Result	15
10.3	Radiated Measurements 30MHz to 1GHz	18
10.4	Radiated Measurements below 30MHz.....	20
10.5	Frequency Stability	24
10.6	Occupied bandwidth	26
	ANNEX A. TEST INSTRUMENT	28
	ANNEX B. SIEMIC ACCREDITATION	29

1 Report Revision History

Report No.	Report Version	Description	Issue Date
FCC_IC_RF_SL16070501-CPC-003	-	Original	08/04/2016

2 Executive Summary

The purpose of this test program was to demonstrate compliance of following product

Company: ChargePoint Inc.
Product: RFID Module
Model: 28010098

against the current Stipulated Standards. The specified model product stated above has demonstrated compliance with the Stipulated Standard listed on 1st page.

3 Customer information

Applicant Name	:	ChargePoint, Inc.
Applicant Address	:	254 E. Hacienda Ave Campbell, CA 95148
Manufacturer Name	:	ChargePoint, Inc.
Manufacturer Address	:	254 E. Hacienda Ave Campbell, CA 95148

4 Test site information

Lab performing tests	:	SIEMIC Laboratories
Lab Address	:	775 Montague Expressway, Milpitas, CA 95035
FCC Test Site No.	:	881796
IC Test Site No.	:	4842D-2
VCCI Test Site No.	:	A0133

5 Modification

Index	Item	Description	Note
-	-	-	-

6 EUT Information

6.1 EUT Description

Product Name	RFID Module
Model No.	28010098
Trade Name	ChargePoint
Input Power	208VAC
Power Adapter Manu/Model	N/A
Power Adapter SN	N/A
Date of EUT received	07/20/2016
Equipment Class/ Category	Class A
Clock Frequencies	300MHz
Port/Connectors	N/A
AC Power Cord Type	IEC Type A
DC Power Cable Type	N/A

6.2 Radio Description

Specifications for Radio:

Radio Type	RFID
Model No.	28010098
Operating Frequency	13.56MHz
Modulation	ASK (13.56MHz)
Channel Spacing	None
Antenna Type	PCB Antenna
Antenna Gain	1 dBi
Antenna Connector Type	N/A

Channel List:

Type	Mode	Channel No.	Frequency (MHz)	Available (Y/N)
RFID	13.56MHz	1	13.56	Y


6.3 EUT test modes/configuration Description

Mode	Note
RF test	Normal operation with 13.56MHz radio on.
Note: None	

6.4 EUT Photos - External



6.5 EUT Photos – Internal

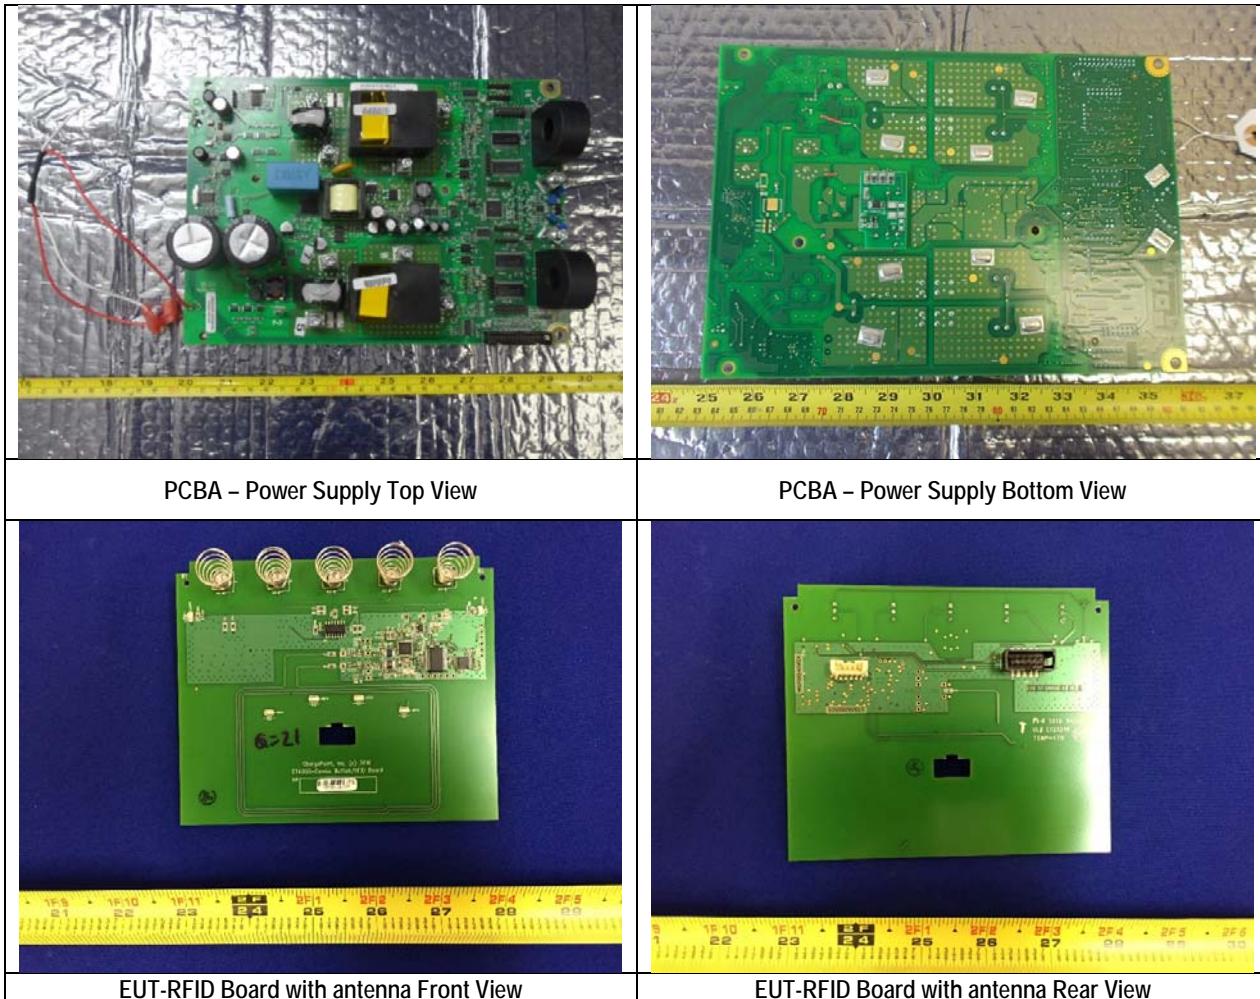

6.6 EUT Test Setup Photos



7 Supporting Equipment/Software and cabling Description

7.1 Supporting Equipment

Index	Supporting Equipment Description	Model	Serial No	Manu	Note
1					

7.2 Cabling Description

Name	Connection Start		Connection Stop		Length / shielding Info		Note
	From	I/O Port	To	I/O Port	Length (m)	Shielding	

7.3 Test Software Description

Test Item	Software	Description
RF Testing	N/A	The EUT continuously transmit itself when powered on.

8 Test Summary

Test Item	Test standard		Test Method/Procedure	Pass / Fail
Antenna Requirement	FCC	15.203	ANSI C63.10 – 2013 558074 D01 DTS Meas. Guidance v03r02	<input checked="" type="checkbox"/> Pass
	IC			<input type="checkbox"/> N/A
AC Conducted Emissions Voltage	FCC	15.225(a)	ANSI C63.10 2013 RSS Gen. 8.8	<input checked="" type="checkbox"/> Pass
	IC	RSS Gen (7.2.2)		<input type="checkbox"/> N/A
Remark	1. AC Line tests were performed on the support equipment's power adapter, laptop.			

Test Item	Test standard		Test Method/Procedure	Pass / Fail
Limit in the band of 13.553 – 13.567 MHz	FCC	15.225(a)	FCC	ANSI C63.10 2013
	IC	RSS210(A2.6)	IC	RSS Gen 6.13
Limit in the band of 13.410 – 13.553 MHz and 13.567 – 13.710 MHz	FCC	15.225(b)	FCC	ANSI C63.10 2013
	IC	RSS210(A2.6)	IC	RSS Gen 6.13
Limit in the band of 13.110 – 13.410 MHz and 13.710 – 14.010 MHz	FCC	15.225(c)	FCC	ANSI C63.10 2013
	IC	RSS210(A2.6)	IC	RSS Gen 6.13
Limit outside the band of 13.110 – 14.010 MHz	FCC	15.225(d), 15.209	FCC	ANSI C63.10 2013
	IC	RSS210(A2.6)	IC	RSS Gen 6.13
Receiver Spurious Emission	IC	-	IC	RSS Gen 7.1
Frequency Stability	FCC	15.225(e)	FCC	-
	IC	RSS210(A2.6)	IC	RSS Gen 6.11
Occupied Bandwidth	FCC	-	FCC	-
	IC	RSS-210(5.9.1)	IC	RSS Gen 6.6
Remark	2. All measurement uncertainties are not taken into consideration for all presented test result. 3. The applicant shall ensure frequency stability by showing that an emission is maintained within the band of operation under all normal operating conditions as specified in the user's manual. 4. Test Method: ANSI C63.10: 2013 / RSS – Gen Issue 4: November 2014.			

9 Measurement Uncertainty

Test Item	Description	Uncertainty
AC Conducted Emissions Voltage	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2	±3.5dB
Limit in the band of 13.553 – 13.567 MHz		+5.6dB/-4.5dB
Limit in the band of 13.410 – 13.553 MHz and 13.567 – 13.710 MHz		+5.6dB/-4.5dB
Limit in the band of 13.110 – 13.410 MHz and 13.710 – 14.010 MHz	Confidence level of approximately 95% (in the case where distributions are normal)	+5.6dB/-4.5dB
Limit outside the band of 13.110 – 14.010 MHz		+5.6dB/-4.5dB
Radiated Spurious Emissions		+5.6dB/-4.5dB

10 Measurements, examination and derived results


10.1 Antenna Requirement

Spec	Requirement	Applicable
§15.203	<p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.</p> <p>Antenna requirement must meet at least one of the following:</p> <ul style="list-style-type: none"> a) Antenna must be permanently attached to the device. b) The antenna must use a unique type of connector to attach to the device. c) Device must be professionally installed. The installer shall be responsible for ensuring that the correct antenna is employed by the device. 	<input checked="" type="checkbox"/>
Remark	The RFID antenna is integral to the PCB board permanently to the device which meets the requirement (See Internal Photographs submitted as another Exhibit).	
Result	<input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL	

10.2 Conducted Emissions Test Result

Conducted Emission Limit

Section	Frequency ranges (MHz)	Limit (dBuV)	
		QP	Average
Class B devices	0.15 ~ 0.5	66 – 56	56 – 46
	0.5 ~ 5	56	46
	5 ~ 30	60	50

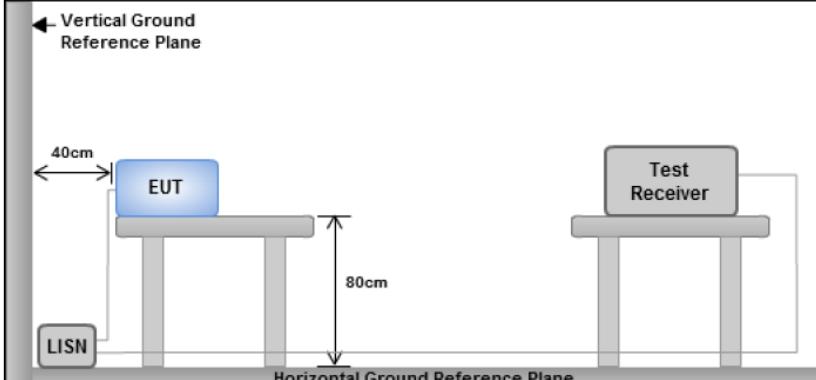
Spec	Item	Requirement	Applicable
§ 15.207, RSS210(A8.1)	a)	For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits set in § 15.207, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). AC Line conducted emission within the band 150kHz to 30MHz	<input checked="" type="checkbox"/>
Test Setup	 <p>Note: 1. Support units were connected to second LISN. 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes</p>		
Procedure	<ul style="list-style-type: none"> The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table, as shown in Annex B. The power supply for the EUT was fed through a 50Ω/50μH EUT LISN, connected to filtered mains. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable. All other supporting equipment was powered separately from another main supply. 		
Test Date	08/02/2016	Environmental conditions	Temperature 21°C Relative Humidity 38 % Atmospheric Pressure 1025 mbar
Remark	The EUT was tested at 120VAC, 60Hz.		
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data Yes N/A

Test Plot Yes N/A


Test was done by Chen Ge at Conducted Emission test site.

Test specification:	Conducted Emissions		
Mains Power:	120VAC	Result:	<input checked="" type="checkbox"/> Pass
Tested by:	Chen Ge		<input type="checkbox"/> Fail
Test Date:	08/02/2016		
Remarks:	AC Line @ Live		

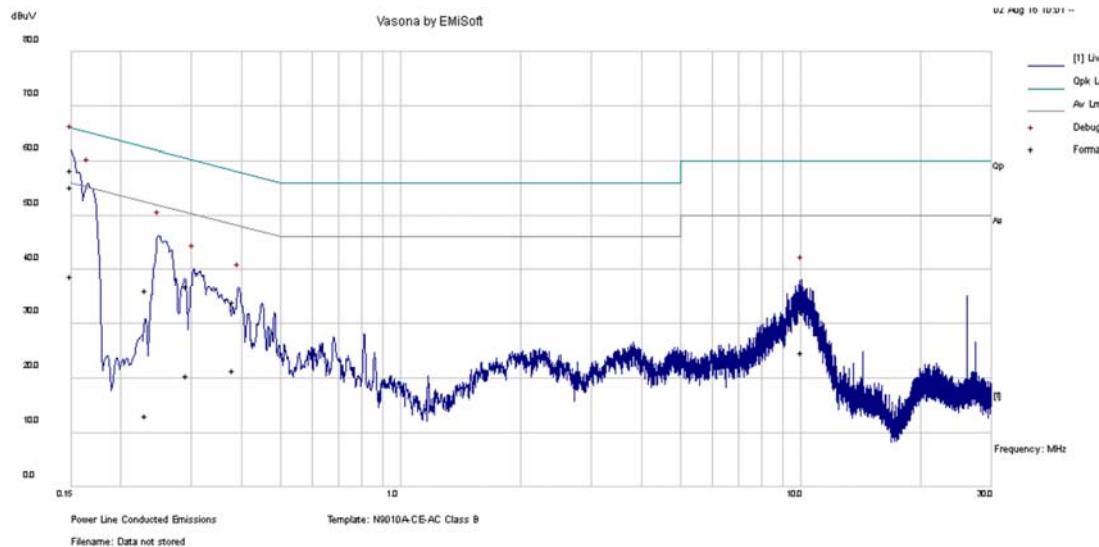Antenna is terminated

Neutral Measurements

Frequency MHz	Raw dBuV	Cable Loss	Factors dB	Level dBuV	Measurement Type	Line/ Neutral	Limit dBuV	Margin dB	Pass /Fail
0.16	43.46	10	1.8	55.26	Quasi Peak	Live	65.99	-10.72	Pass
0.15	46.54	10	1.8	58.35	Quasi Peak	Live	66	-7.65	Pass
0.23	24.95	10	1.14	36.1	Quasi Peak	Live	62.38	-26.29	Pass
0.29	25.83	10	0.93	36.77	Quasi Peak	Live	60.47	-23.69	Pass
0.38	23.19	10.01	0.77	33.97	Quasi Peak	Live	58.21	-24.24	Pass
10.06	21.69	10.05	0.55	32.29	Quasi Peak	Live	60	-27.71	Pass
0.16	27.01	10	1.8	38.81	Average	Live	55.99	-17.18	Pass
0.15	26.97	10	1.8	38.77	Average	Live	56	-17.23	Pass
0.23	1.86	10	1.14	13.01	Average	Live	52.38	-39.37	Pass
0.29	9.55	10	0.93	20.48	Average	Live	50.47	-29.98	Pass
0.38	10.72	10.01	0.77	21.49	Average	Live	48.21	-26.72	Pass
10.06	14.12	10.05	0.55	24.72	Average	Live	50	-25.28	Pass

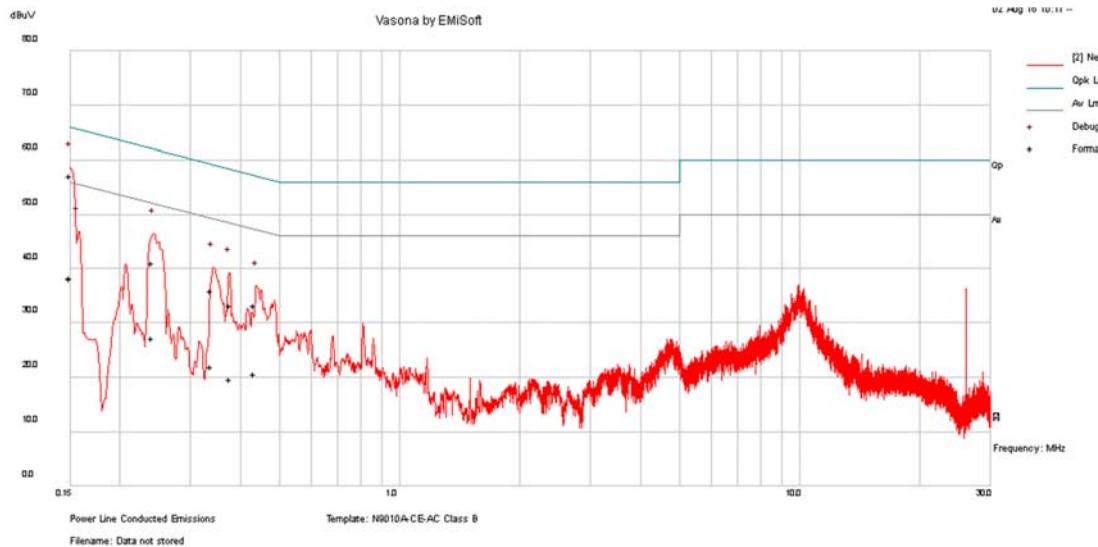
Test specification:	Conducted Emissions		
Mains Power:	120VAC	Result:	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail
Tested by:	Chen Ge		
Test Date:	08/02/2016		
Remarks:	AC Line @ Neutral		

Antenna is terminated

Line Measurements

Frequency MHz	Raw dBμV	Cable Loss	Factors dB	Level dBμV	Measurement Type	Line/Neutral	Limit dBμV	Margin dB	Pass /Fail
0.16	45.41	10	1.8	57.22	Quasi Peak	Neutral	66	-8.78	Pass
0.24	29.95	10	1.1	41.06	Quasi Peak	Neutral	62.08	-21.02	Pass
0.15	45.31	10	1.8	57.12	Quasi Peak	Neutral	66	-8.88	Pass
0.34	25.03	10.01	0.83	35.87	Quasi Peak	Neutral	59.26	-23.39	Pass
0.38	22.5	10.01	0.78	33.29	Quasi Peak	Neutral	58.34	-25.05	Pass
0.43	22.51	10.01	0.73	33.24	Quasi Peak	Neutral	57.2	-23.96	Pass
0.16	26.51	10	1.8	38.32	Average	Neutral	56	-17.69	Pass
0.24	16.05	10	1.1	27.15	Average	Neutral	52.08	-24.92	Pass
0.15	26.4	10	1.8	38.20	Average	Neutral	56	-17.80	Pass
0.34	11.1	10.01	0.83	21.94	Average	Neutral	49.26	-27.32	Pass
0.38	8.88	10.01	0.78	19.67	Average	Neutral	48.34	-28.67	Pass
0.43	9.86	10.01	0.73	20.59	Average	Neutral	47.2	-26.60	Pass

10.3 Radiated Measurements 30MHz to 1GHz

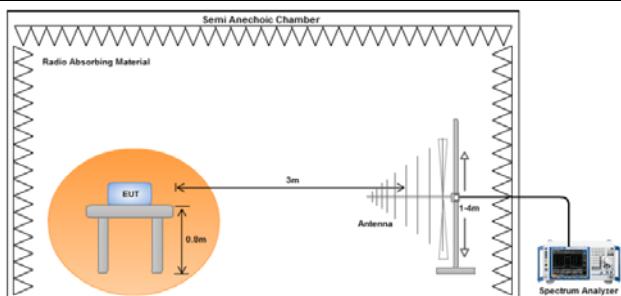Requirement(s):

Spec	Requirement	Applicable										
47 CFR §15.225 RSS-210 (A2.6)	<p>Operation within the band 13.110–14.010 MHz:</p> <p>(a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters.</p> <p>(b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.</p> <p>(c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.</p> <p>(d) The field strength of any emissions appearing outside of the 13.110–14.010 MHz band shall not exceed the general radiated emission limits in §15.209.</p> <table border="1"> <thead> <tr> <th>Frequency range (MHz)</th><th>Field Strength (uV/m)</th></tr> </thead> <tbody> <tr> <td>30 – 88</td><td>100</td></tr> <tr> <td>88 – 216</td><td>150</td></tr> <tr> <td>216 – 960</td><td>200</td></tr> <tr> <td>Above 960</td><td>500</td></tr> </tbody> </table>	Frequency range (MHz)	Field Strength (uV/m)	30 – 88	100	88 – 216	150	216 – 960	200	Above 960	500	<input checked="" type="checkbox"/>
Frequency range (MHz)	Field Strength (uV/m)											
30 – 88	100											
88 – 216	150											
216 – 960	200											
Above 960	500											
Test Setup												
Procedure	<ol style="list-style-type: none"> The EUT was switched on and allowed to warm up to its normal operating condition. The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: <ol style="list-style-type: none"> Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen. The EUT was then rotated to the direction that gave the maximum emission. Finally, the antenna height was adjusted to the height that gave the maximum emission. A Quasi-peak measurement was then made for that frequency point. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured. 											
Test Date	07/26/2016	Temperature 20.1°C Relative Humidity 36% Atmospheric Pressure 1026mbar										
Remark	-											
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail											


Test Data Yes (See below) N/A

Test Plot Yes (See below) N/A

Test was done by Chen Ge at 10 meter chamber.

Test specification:	Radiated Emissions			
Mains Power:	208V AC	Result:	<input checked="" type="checkbox"/> Pass	
Tested by:	Chen Ge		<input type="checkbox"/> Fail	
Test Date:	07/26/2016			
Remarks:	The emission at 68MHz is not from the RFID radio.			

f=30MHz – 1000MHz plot and 3 meter distance

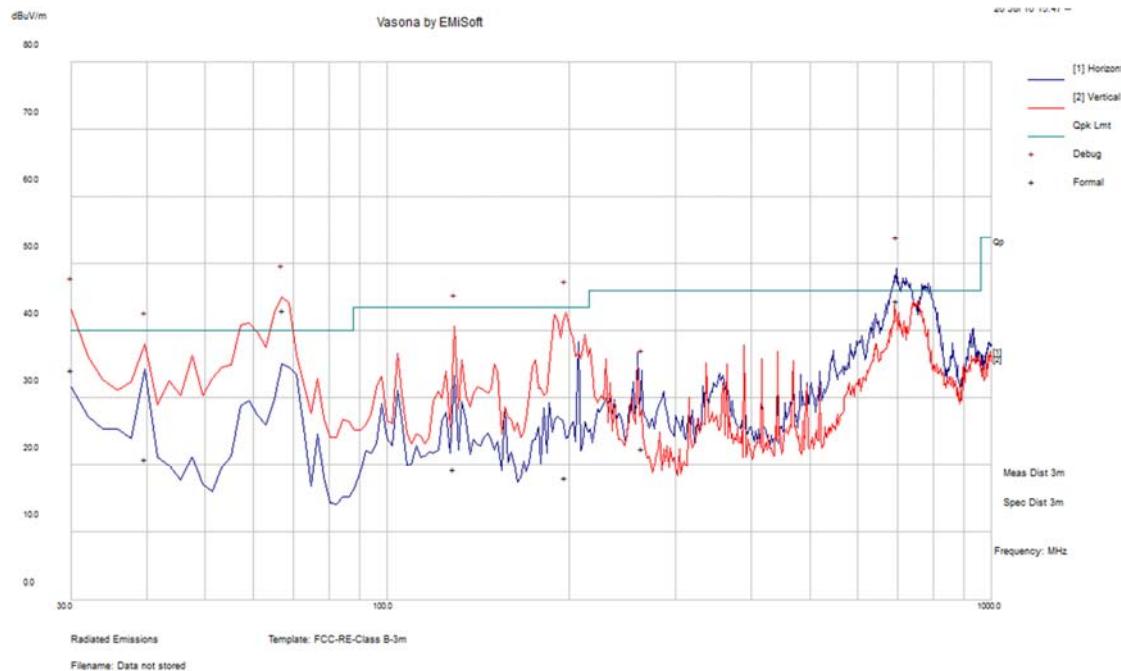


f=30MHz – 1000MHz Measurements

Frequency MHz	Raw dB μ V/m	Cable Loss	AF dB	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail
696.61	59.3	4.15	-19.01	44.44	Quasi Max	H	112	285	46.02	-1.58	Pass
30.00	49.24	0.82	-15.88	34.17	Quasi Max	V	142	261	40	-5.83	Pass
197.07	42.95	2.08	-27.02	18.01	Quasi Max	V	168	12	43.52	-25.51	Pass
39.78	43.85	0.93	-23.93	20.85	Quasi Max	V	103	282	40	-19.15	Pass
129.02	42.52	1.71	-25	19.23	Quasi Max	V	154	117	43.52	-24.29	Pass
264.03	46.68	2.46	-26.68	22.46	Quasi Max	H	143	43	46.02	-23.56	Pass

10.4 Radiated Measurements below 30MHz

Requirement(s):

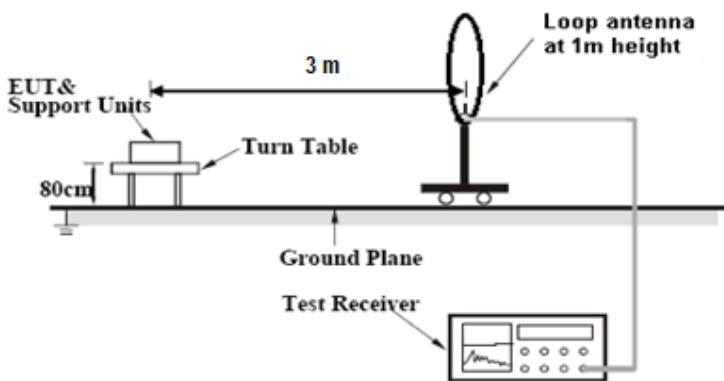
Spec	Requirement	Applicable
47 CFR §15.225 RSS-210 (A2.6)	Operation within the band 13.110–14.010 MHz (a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters. (b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters. (c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters. (d) The field strength of any emissions appearing outside of the 13.110–14.010 MHz band shall not exceed the general radiated emission limits in §15.209.	<input checked="" type="checkbox"/>
Test Setup	 <p>The diagram illustrates the test setup for radiated measurements. A 'Turn Table' is positioned on a 'Ground Plane'. An 'EUT & Support Units' is placed on the turn table, with a vertical distance of '80cm' indicated. A 'Loop antenna at 1m height' is positioned 3 meters away from the EUT. A 'Test Receiver' is connected to the loop antenna to measure the emissions.</p>	
Procedure	<p>For < 30MHz, Radiated emissions were measured according to ANSI C63.10. The EUT was set to transmit at the highest output power.</p> <p>The EUT was set 3 meter away from the measuring antenna. The loop antenna was positioned 1 meter above the ground from the center of the loop. The measuring bandwidth was set to 10 kHz.</p> <p>The limit is converted from microvolt/meter to decibel microvolt/meter.</p>	
Test Date	07/26/2016	Environmental conditions Temperature 22°C Relative Humidity 40% Atmospheric Pressure 1026mbar
Remark	-	
Result	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail

Test Data Yes (See below) N/A

Test Plot Yes (See below) N/A

Test was done by Chen Ge at 10 meter chamber.


Test specification:	Radiated Spurious Emissions		
Mains Power:	208V AC		
Tested by:	Chen Ge		Result:
Test Date:	07/26/2016		
Remarks:	$f = 100\text{kHz} - 30\text{MHz}$ plot, and loop antenna at 0 degree		

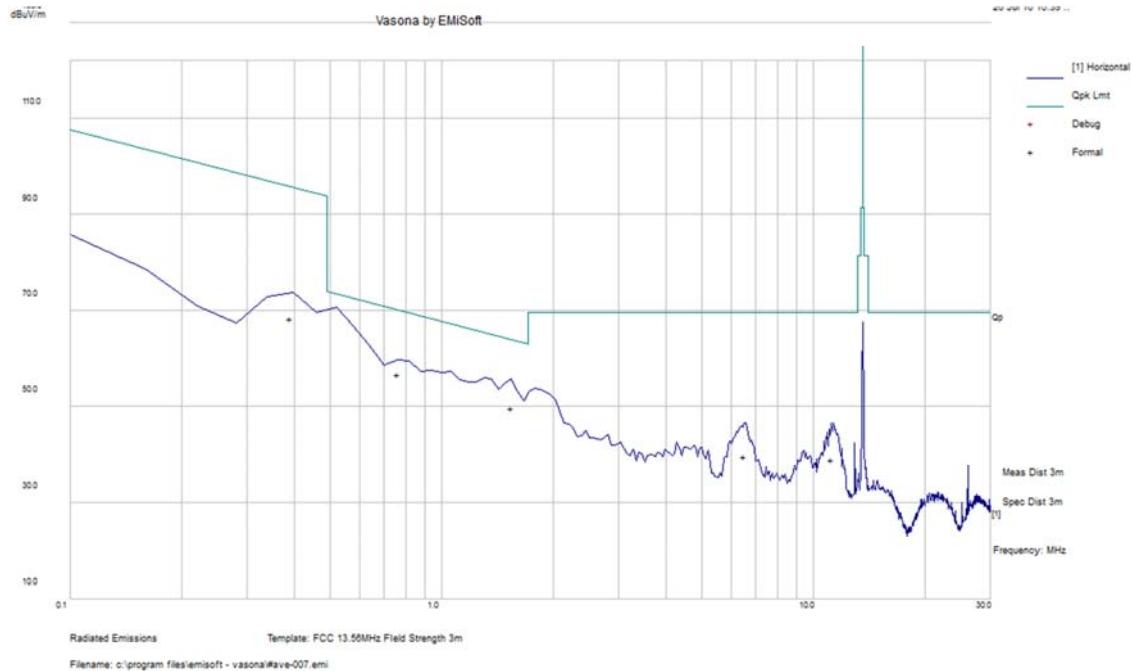

Quasi Max Measurement

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
1.55	41.97	0.25	7.47	49.69	Quasi Max	H	100	29	63.83	-14.13	Pass
0.76	42.78	0.2	13.67	56.65	Quasi Max	H	100	69	69.99	-13.34	Pass
0.39	49.09	0.17	19.05	68.31	Quasi Max	H	100	44	95.76	-27.45	Pass
6.50	39.6	0.41	-0.48	39.53	Quasi Max	H	100	91	69.54	-30.01	Pass
11.19	39.96	0.53	-1.46	39.03	Quasi Max	H	100	96	69.54	-30.51	Pass


Test specification:	Radiated Spurious Emissions		
Mains Power:	208V AC		
Tested by:	Chen Ge		Result:
Test Date:	07/26/2016		<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail
Remarks:	<i>f</i> = 100kHz – 30MHz plot, and loop antenna at 90 degree		

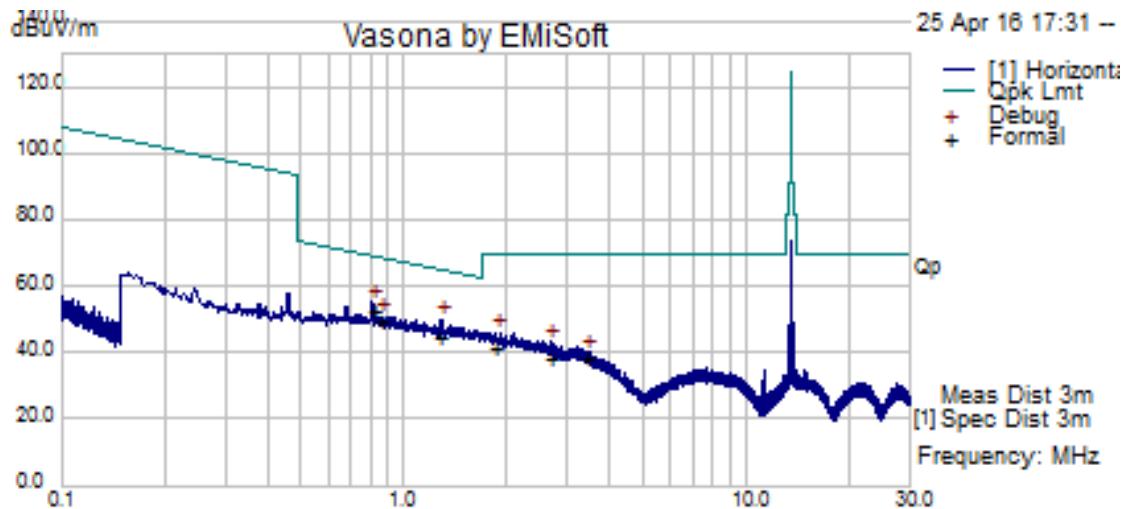

Quasi Max Measurement


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
0.76	42.97	0.2	13.65	56.82	Quasi Max	H	100	270	69.96	-13.14	Pass
1.29	42.99	0.23	8.96	52.18	Quasi Max	H	100	220	65.41	-13.23	Pass
26.06	29.98	0.82	-2.6	28.2	Quasi Max	H	100	35	69.54	-41.34	Pass
0.39	49.18	0.17	18.99	68.33	Quasi Max	H	100	238	95.68	-27.35	Pass
6.44	40.17	0.41	-0.45	40.12	Quasi Max	H	100	319	69.54	-29.42	Pass

Loop antenna at 0 degree

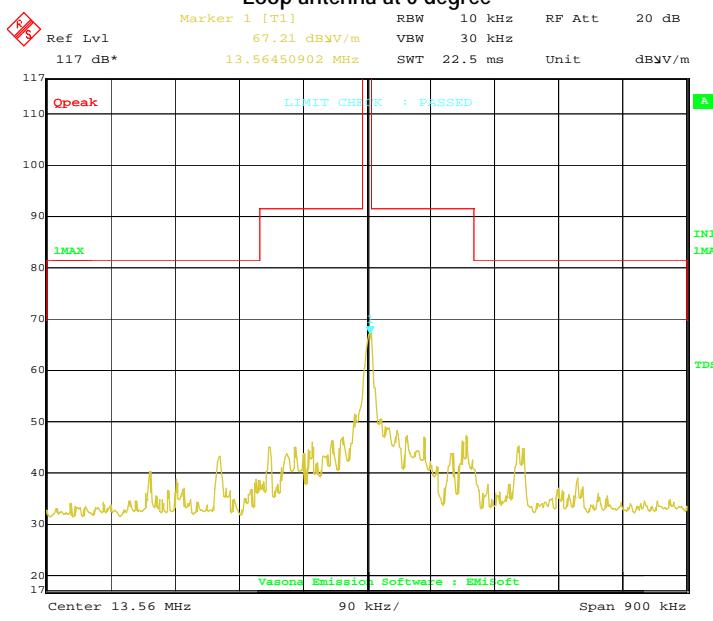

Frequency (MHz)	Amplitude (dB μ V/m)
13.56450902	67.21


Loop antenna at 90 degree

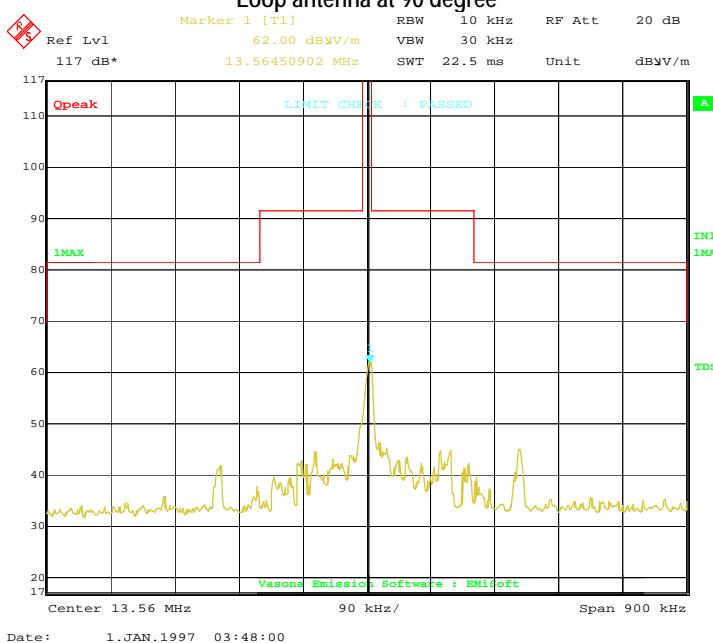

Frequency (MHz)	Amplitude (dB μ V/m)
13.56450902	62.00

10.5 Frequency Stability

Requirement(s):

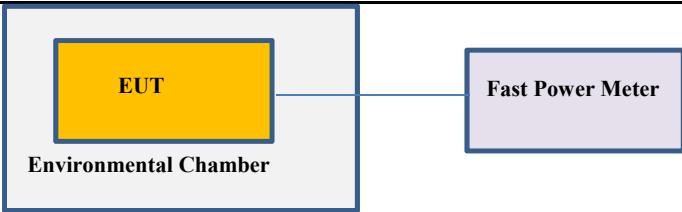Spec	Requirement	Applicable
47 CFR §15.225 e) RSS-210 (A2.6)	Limit: $\pm 0.01\%$ of 13.56 MHz = 1356 Hz	<input checked="" type="checkbox"/>
Test Setup	 <ol style="list-style-type: none"> 1. The EUT was set up inside an environmental chamber. 2. The EUT was placed in the centre of the environmental. 	
Procedure	Frequency Stability was measured according to 47 CFR §2.1055. Measurement was taken with spectrum analyzer. The spectrum analyzer bandwidth and span was set to read in hertz. A voltmeter was used to monitor when varying the voltage.	
Test Date	07/27/2016	Temperature 20°C Relative Humidity 41% Atmospheric Pressure 1026mbar
Remark	None	
Result	<input checked="" type="checkbox"/> Pass	<input type="checkbox"/> Fail

Test Data Yes (See below) N/A

Test Plot Yes (See below) N/A

Test was done by Chen Ge at RF test site.

Test Result for 13.56MHz Radio


Frequency Stability versus Temperature: The Frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20°C to +50°C at normal supply voltage.

Reference Frequency: 13.56MHz

Temperature	Measured Freq.	Freq. Drift	Freq. Deviation	Pass/Fail
(°C)	(MHz)	(Hz)	(Limit: 0.01%)	
50	13.5603868	386.8	< \pm 1356	Pass
40	13.5603886	388.6	< \pm 1356	Pass
30	13.5603887	388.7	< \pm 1356	Pass
20	13.5603887	388.7	< \pm 1356	Pass
10	13.5603975	397.5	< \pm 1356	Pass
0	13.5603978	397.8	< \pm 1356	Pass
-10	13.5603979	397.9	< \pm 1356	Pass
-20	13.5603982	398.2	< \pm 1356	Pass
-30	13.5603997	399.7	< \pm 1356	Pass
-40	13.5603997	399.7	< \pm 1356	Pass

10.6 Occupied bandwidth

Requirement(s):

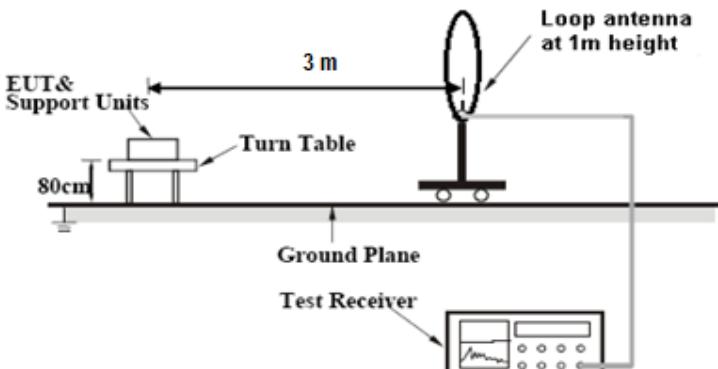
Spec	Requirement	Applicable						
RSS-Gen 4.6.1	<p>The transmitter shall be operated at its maximum carrier power measured under normal test conditions. The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used given that a peak or peak hold may produce a wider bandwidth than actual. The trace data points are recovered and directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded. The span between the two recorded frequencies is the occupied bandwidth.</p>	<input checked="" type="checkbox"/>						
Test Setup	 <p>The diagram illustrates a test setup for measuring occupied bandwidth. A 'Turn Table' is positioned on a 'Ground Plane'. An 'EUT & Support Units' assembly is mounted on the turn table, with a vertical distance of 80cm indicated. A 'Loop antenna at 1m height' is placed above the turn table, connected to a 'Test Receiver' which is shown with a waveform display.</p>							
Procedure	<ol style="list-style-type: none"> 1. The EUT was switched on and allowed to warm up to its normal operating condition. 2. To measure conducted, a SMA cable was used to replace the EUT antenna. To measure radiated, an external antenna was used to detect EUT transmission signal. 3. Measurement of the 99% Occupied Bandwidth of EUT transmission signal and make record. 							
Test Date	07/27/2016	<table> <tr> <td>Environmental conditions</td> <td>Temperature 22°C</td> </tr> <tr> <td></td> <td>Relative Humidity 39%</td> </tr> <tr> <td></td> <td>Atmospheric Pressure 1025mbar</td> </tr> </table>	Environmental conditions	Temperature 22°C		Relative Humidity 39%		Atmospheric Pressure 1025mbar
Environmental conditions	Temperature 22°C							
	Relative Humidity 39%							
	Atmospheric Pressure 1025mbar							
Remark	-							
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail							

Test Data Yes (See below) N/A

Test Plot Yes (See below) N/A

Test was done by Chen Ge at 10 meter chamber.

Test results:

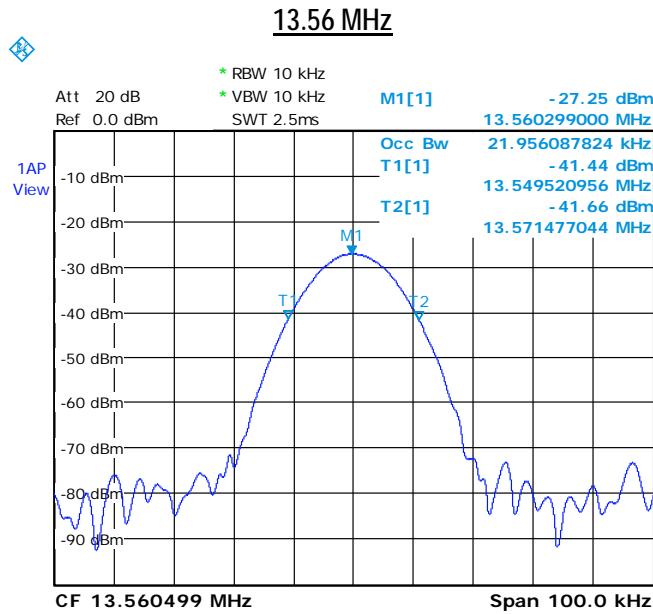

Frequency (MHz)	Occupied Bandwidth (KHz)
13.56	21.95

Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Cycle	Cal Due	In use
Conducted Emissions						
R & S Receiver	ESIB 40	100179	06/03/2016	1 Year	06/03/2017	<input checked="" type="checkbox"/>
CHASE LISN	MN2050B	1018	06/08/2016	1 Year	06/08/2017	<input checked="" type="checkbox"/>
Radiated Emissions						
R & S Receiver	ESL6	100178	05/27/2015	1 Year	05/27/2016	<input type="checkbox"/>
R & S Receiver	ESIB 40	100179	06/03/2016	1 Year	06/03/2017	<input checked="" type="checkbox"/>
Pre-Amplifier (1-26.5GHz)	8449B	3008A00715	03/04/2016	1 Year	03/04/2017	<input type="checkbox"/>
Preamplifier (100KHz-7GHz)	LPA-6-30	11140711	02/10/2016	1 Year	02/10/2017	<input checked="" type="checkbox"/>
ETS-Lingren Loop Antenna	6512	00049120	07/14/2016	1 Year	07/14/2017	<input checked="" type="checkbox"/>
Bi-Log antenna (30MHz~2GHz)	JB1	A030702	07/08/2016	1 Year	07/08/2017	<input checked="" type="checkbox"/>
Horn Antenna (1-26.5GHz)	3115	10SL0059	08/25/2015	1 Year	08/25/2016	<input type="checkbox"/>
Tuned Dipole Antenna 30 - 1000 MHz (4pcs set)	AD-100	40133	10/02/2015	1 Year	10/02/2016	<input type="checkbox"/>
3 Meters SAC	3M	N/A	06/09/2016	1 Year	06/09/2017	<input checked="" type="checkbox"/>
10 Meters SAC	10M	N/A	09/05/2015	1 Year	09/05/2016	<input type="checkbox"/>
RF Conducted Measurement						
Spectrum Analyzer	N9010A	10SL0219	10/27/2015	1 Year	10/27/2016	<input checked="" type="checkbox"/>
R & S Receiver	ESIB 40	100179	06/03/2015	1 Year	06/03/2016	<input type="checkbox"/>
Test Equity Environment Chamber	1007H	61201	07/21/2016	1 Year	07/21/2017	<input checked="" type="checkbox"/>
USB RF Power Sensor	7002-006	10SL0190	09/22/2015	1 Year	09/22/2016	<input type="checkbox"/>

Test Software Version

Test Item	Vendor	Software	Version
Radiated Emission	EMISoft	EMISoft Vasona	V5.0
Conducted Emission	EMISoft	EMISoft Vasona	V5.0

Annex B. SIEMIC Accreditation

Accreditations	Document	Scope / Remark
ISO 17025 (A2LA)		Please see the documents for the detailed scope
ISO Guide 65 (A2LA)		Please see the documents for the detailed scope
TCB Designation		A1 , A2 , A3 , A4 , B1 , B2 , B3 , B4 , C
FCC DoC Accreditation		FCC Declaration of Conformity Accreditation
FCC Site Registration		3 meter site
FCC Site Registration		10 meter site
IC Site Registration		3 meter site
IC Site Registration		10 meter site
EU NB		Radio & Telecommunications Terminal Equipment: EN45001 – EN ISO/IEC 17025
		Electromagnetic Compatibility: EN45001 – EN ISO/IEC 17025
Singapore iDA CB(Certification Body)	 	Phase I , Phase II
Vietnam MIC CAB Accreditation		Please see the document for the detailed scope
Hong Kong OFCA		(Phase II) OFCA Foreign Certification Body for Radio and Telecom
		(Phase I) Conformity Assessment Body for Radio and Telecom
Industry Canada CAB		Radio: Scope A – All Radio Standard Specification in Category I
		Telecom: CS-03 Part I, II, V, VI, VII, VIII

Japan Recognized Certification Body Designation		Radio: A1. Terminal equipment for purpose of calling Telecom: B1. Specified radio equipment specified in Article 38-2, Paragraph 1, Item 1 of the Radio Law
Korea CAB Accreditation		EMI: KCC Notice 2008-39, RRL Notice 2008-3: CA Procedures for EMI KN22: Test Method for EMI EMS: KCC Notice 2008-38, RRL Notice 2008-4: CA Procedures for EMS KN24, KN61000-4-2, -4-3, -4-4, -4-5, -4-6, -4-8, -4-11: Test Method for EMS
Taiwan NCC CAB Recognition		Radio: RRL Notice 2008-26, RRL Notice 2008-2, RRL Notice 2008-10, RRL Notice 2007-49, RRL Notice 2007-20, RRL Notice 2007-21, RRL Notice 2007-80, RRL Notice 2004-68 Telecom: President Notice 20664, RRL Notice 2007-30, RRL Notice 2008-7 with attachments 1, 3, 5, 6; President Notice 20664, RRL Notice 2008-7 with attachment 4
Taiwan BSMI CAB Recognition		LP0002, PSTN01, ADSL01, ID0002, IS6100, CNS14336, PLMN07, PLMN01, PLMN08
Japan VCCI		CNS 13438
Australia CAB Recognition		EMC: AS/NZS CISPR 11, AS/NZS CISPR 14.1, AS/NZS CISPR22, AS/NZS 61000.6.3, AS/NZS 61000.6.4 Radio communications: AS/NZS 4281, AS/NZS 4268, AS/NZS 4280.1, AS/NZS 4280.2, AS/NZS 4295, AS/NZS 4582, AS/NZS 4583, AS/NZS 4769.1, AS/NZS 4769.2, AS/NZS 4770, AS/NZS 4771 Telecommunications: AS/ACIF S002:05, AS/ACIF S003:06, AS/ACIF S004:06 AS/ACIF S006:01, AS/ACIF S016:01, AS/ACIF S031:01, AS/ACIF S038:01, AS/ACIF S040:01, AS/ACIF S041:05, AS/ACIF S043.2:06, AS/ACIF S60950.1
Australia NATA Recognition		AS/ACIF S002, AS/ACIF S003, AS/ACIF S004, AS/ACIF S006, AS/ACIF S016, AS/ACIF S031, AS/ACIF S038, AS/ACIF S040, AS/ACIF S041, AS/ACIF S043.2